

Oxygen XML Developer 17.1

Notice

Copyright

Oxygen XML Developer User Manual

Syncro Soft SRL.

Copyright © 2002-2015 Syncro Soft SRL. All Rights Reserved.

All rights reserved. No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher. Products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

Trademarks. Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this document, and Syncro Soft SRL was aware of a trademark claim, the designations have been rendered in caps or initial caps.

Notice. While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document or from the use of programs and source code that may accompany it. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly by this document.

Link disclaimer. Syncro Soft SRL is not responsible for the contents or reliability of any linked Web sites referenced elsewhere within this documentation, and Syncro Soft SRL does not necessarily endorse the products, services, or information described or offered within them. We cannot guarantee that these links will work all the time and we have no control over the availability of the linked pages.

Warranty. Syncro Soft SRL provides a limited warranty on this product. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Oxygen XML Developer End User License Agreement, as well as information regarding support for this product, while under warranty, is available through the [Oxygen XML Developer website](#).

Third-party components. Certain software programs or portions thereof included in the Product may contain software distributed under third party agreements ("Third Party Components"), which may contain terms that expand or limit rights to use certain portions of the Product ("Third Party Terms"). Information identifying Third Party Components and the Third Party Terms that apply to them is available on the [Oxygen XML Developer website](#).

Downloading documents. For the most current versions of documentation, see the [Oxygen XML Developer website](#).

Contact Syncro Soft SRL. Syncro Soft SRL provides telephone numbers and e-mail addresses for you to report problems or to ask questions about your product, see the [Oxygen XML Developer website](#).

Contents

Chapter 1: Introduction.....	17
Chapter 2: Getting Started.....	19
What is Oxygen XML Developer.....	20
Getting Familiar with the Layout.....	20
Resources to Help You Get Started Using Oxygen XML Developer	21
Your First Document or Project.....	22
Creating a New Project.....	22
Getting Help.....	23
Help Menu.....	23
Chapter 3: Installation.....	25
Installation Options.....	26
Windows Installation.....	26
Mac OS X Installation.....	28
Linux Installation.....	30
Windows Terminal Server Installation.....	31
Linux Server Installation.....	33
Java Web Start (JWS) Installation.....	35
Site-wide deployment.....	36
Licensing.....	37
Setting up a License Server.....	40
Setting up a Floating License Server Running as a Standalone Process Using a Platform-independent Distribution.....	45
Transferring or Releasing a License.....	46
Upgrading.....	46
Installing and Updating Add-ons.....	47
Uninstalling.....	48
Installer Command Line Reference.....	49
Chapter 4: Perspectives.....	51
Editor Perspective.....	52
Supported Document Types.....	53
XSLT Debugger Perspective.....	53
XQuery Debugger Perspective	54
Database Perspective	55

Chapter 5: Editing Modes.....57

Text Editing Mode.....	58
Text Mode Editor.....	58
Text Mode Views.....	59
Syntax Highlight Depending on Namespace Prefix.....	77
Presenting Validation Errors in Text Mode.....	77
Bidirectional Text Support in Text Mode.....	78
Grid Editing Mode.....	78
Grid Mode Editor.....	78
Layouts: Grid and Tree.....	79
Grid Mode Navigation.....	80
Bidirectional Text Support in Grid Mode.....	80
Design Editing Mode.....	81
XML Schema Diagram Editor (Design Mode).....	81
Navigation in the Schema Diagram.....	82
XML Schema Outline View.....	83
The Attributes View.....	85
The Facets View.....	87
The Palette View.....	88

Chapter 6: Editing Documents.....89

Working with Unicode.....	90
Opening and Saving Unicode Documents.....	90
Inserting Symbols.....	90
Unicode Fallback Font Support.....	92
Creating and Working with Documents.....	93
Creating New Documents.....	93
Opening Documents.....	96
Saving Documents.....	98
Opening and Saving Remote Documents via FTP/SFTP/WebDAV/SharePoint	99
Switching Between Opened Tabs.....	104
Searching Documents.....	104
Closing Documents.....	110
The Contextual Menu of the Current Editor Tab.....	111
Viewing File Properties.....	111
Using Projects to Group Documents.....	111
Creating a New Project.....	112
The Project View.....	113
Sharing a Project - Team Collaboration.....	120
Defining Master Files at Project Level.....	122
Editing XML Documents.....	125
Editing XML Documents in Text Mode.....	125

Editing XML Documents in Grid Mode.....	138
Associate a Schema to a Document.....	141
Content Completion Assistant.....	145
Validating XML Documents.....	154
Document Navigation.....	163
The Undo/Redo Actions.....	166
Dragging and Dropping the Selected Text.....	166
Copying and Pasting Text.....	167
Printing a File.....	167
Finding and Replacing Text in the Current File.....	168
Finding and Replacing Text in Multiple Files.....	172
Editing Large XML Documents.....	175
Working with XML Catalogs.....	177
XML Resource Hierarchy/Dependencies View.....	179
Converting Between Schema Languages.....	181
Editing XML Tree Nodes.....	183
Editing Modular XML Files in the Master Files Context.....	183
Search and Refactor Actions for IDs and IDREFS.....	183
Search and Refactor Operations Scope.....	185
Viewing Status Information.....	185
Image Preview.....	186
Making a Persistent Copy of Results.....	186
Locking and Unlocking XML Markup.....	187
Adjusting the Transparency of XML Markup.....	187
Editor Highlights.....	187
XML Quick Fixes.....	188
Refactoring XML Documents.....	190
Editing XSLT Stylesheets.....	204
Validating XSLT Stylesheets.....	205
Editing XSLT Stylesheets in the Master Files Context.....	206
Syntax Highlight.....	206
Content Completion in XSLT Stylesheets.....	207
The XSLT/XQuery Input View.....	211
The XSLT Outline View.....	213
XSLT Stylesheet Documentation Support.....	216
Generating Documentation for an XSLT Stylesheet.....	217
Finding XSLT References and Declarations.....	223
Highlight Component Occurrences.....	224
XSLT Refactoring Actions.....	224
XSLT Resource Hierarchy/Dependencies View.....	226
XSLT Component Dependencies View.....	229
XSLT Quick Assist Support.....	230
XSLT Quick Fix Support	231
XSLT Unit Test (XSpec).....	233
Editing Ant Build Files.....	235

Validate Ant Build Files.....	235
Editing Ant Build Files in the Context of Master Files.....	235
Syntax Highlight.....	236
Content Completion in Ant Build Files.....	236
Ant Outline View.....	236
Find References and Declarations of Ant Components.....	239
Highlight Component Occurrences.....	239
Ant Refactoring Actions.....	240
Ant Resource Hierarchy/Dependencies View.....	240
Ant Component Dependencies View.....	241
Ant Quick Assist Support.....	242
Ant Quick Fix Support.....	242
Editing XML Schemas.....	243
Editing XML Schema in Design Editing Mode.....	243
Editing XML Schema in Text Editing Mode.....	268
Editing XML Schema in the Master Files Context.....	270
Searching and Refactoring Actions in XML Schemas.....	270
XML Schema Outline View.....	271
Component Dependencies View for XML Schema.....	273
XML Schema Quick Assist Support.....	275
XML Schema Resource Hierarchy / Dependencies View.....	275
Generate Sample XML Files.....	278
Generating Documentation for an XML Schema.....	282
Convert Database Structure to XML Schema.....	290
Flatten an XML Schema.....	291
XML Schema Regular Expressions Builder.....	293
XML Schema 1.1.....	294
Setting the XML Schema Version.....	295
Editing XQuery Documents.....	296
XQuery Outline View.....	296
Folding in XQuery Documents.....	298
Formatting and Indenting XQuery Documents.....	298
Generating HTML Documentation for an XQuery Document.....	299
Editing WSDL Documents.....	299
WSDL Outline View.....	300
Content Completion in WSDL Documents.....	304
Editing WSDL Documents in the Master Files Context.....	304
Searching and Refactoring Operations in WSDL Documents.....	305
Searching and Refactoring Operations Scope in WSDL Documents.....	306
WSDL Resource Hierarchy/Dependencies View in WSDL Documents.....	307
Component Dependencies View in WSDL Documents.....	310
Highlight Component Occurrences in WSDL Documents.....	311
Quick Assist Support in WSDL Documents.....	311
Generating Documentation for WSDL Documents.....	312
WSDL SOAP Analyzer.....	316

Editing CSS Stylesheets.....	319
Validating CSS Stylesheets.....	319
Content Completion in CSS Stylesheets.....	320
CSS Outline View.....	320
Folding in CSS Stylesheets.....	321
Formatting and Indenting CSS Stylesheets (Pretty Print).....	321
Minifying CSS Stylesheets.....	321
Editing LESS CSS Stylesheets.....	322
Validating LESS Stylesheets.....	322
Content Completion in LESS Stylesheets.....	322
Compiling LESS Stylesheets to CSS.....	323
Editing Relax NG Schemas.....	323
Editing Relax NG Schema in the Master Files Context.....	323
Relax NG Schema Diagram.....	324
Searching and Refactoring Actions in RNG Schemas.....	329
RNG Resource Hierarchy/Dependencies View.....	330
Component Dependencies View for RelaxNG Schemas.....	333
RNG Quick Assist Support.....	334
Configuring a Custom Datatype Library for a RELAX NG Schema.....	334
Editing NVDL Schemas.....	335
NVDL Schema Diagram.....	335
Searching and Refactoring Actions in NVDL Schemas.....	337
Component Dependencies View for NVDL Schemas.....	338
Editing JSON Documents.....	339
Editing JSON Documents in Text Mode.....	339
Editing JSON Documents in Grid Mode.....	341
JSON Outline View.....	342
Validating JSON Documents.....	342
Convert XML to JSON.....	342
Editing StratML Documents.....	343
Editing XLIFF Documents.....	344
Editing JavaScript Documents.....	344
JavaScript Editor Text Mode.....	344
Content Completion in JavaScript Files.....	346
JavaScript Outline View.....	347
Validating JavaScript Files.....	348
Editing XProc Scripts.....	348
Editing Schematron Schemas.....	349
Validate an XML Document Against Schematron.....	350
Validating Schematron Documents.....	350
Content Completion in Schematron Documents.....	351
RELAX NG/XML Schema with Embedded Schematron Rules.....	351
Editing Schematron Schema in the Master Files Context.....	352
Schematron Outline View.....	352
Schematron Resource Hierarchy/Dependencies View.....	354

Highlight Component Occurrences in Schematron Documents.....	356
Searching and Refactoring Operations in Schematron Documents.....	356
Searching and Refactoring Operations Scope in Schematron Documents.....	357
Quick Assist Support in Schematron Documents.....	358
Editing Schematron Quick Fixes.....	359
Customizing Schematron Quick Fixes.....	359
Validating Schematron Quick Fixes.....	363
Content Completion in SQF.....	363
Highlight Quick Fix Occurrences in SQF.....	364
Searching and Refactoring Operations in SQF.....	364
Embed Schematron Quick Fixes in Relax NG or XML Schema.....	365
Editing SVG Documents.....	365
The Standalone SVG Viewer.....	366
Integrated SVG Viewer in the Results Panel.....	367
Editing XHTML Documents.....	367
Spell Checking.....	368
Spell Checking Dictionaries.....	369
Learned Words.....	370
Ignored Words (Elements).....	370
Automatic Spell Check.....	370
Spell Checking in Multiple Files.....	371
Loading Large Documents.....	371
File Sizes Smaller than 300 MB.....	372
File Sizes Greater than 300 MB.....	372
Scratch Buffer.....	372
Handling Read-Only Files.....	373
Editing Documents with Long Lines.....	373
Associating a File Extension with Oxygen XML Developer.....	373

Chapter 7: Document Types (Frameworks).....375

Predefined Document Types (Frameworks).....	376
The DocBook 4 Document Type.....	377
The DocBook 5 Document Type.....	383
The DITA Topics Document Type.....	390
The DITA Map Document Type.....	391
The XHTML Document Type.....	397
The TEI ODD Document Type.....	398
The TEI P4 Document Type.....	398
The TEI P5 Document Type.....	399
The JATS Document Type.....	400
The EPUB Document Type.....	400
The DocBook Targetset Document Type.....	401

Chapter 8: Transforming Documents.....403

Transformation Scenarios.....	404
Defining a New Transformation Scenario.....	404
Configure Transformation Scenario(s) Dialog Box.....	431
Duplicating a Transformation Scenario.....	433
Editing a Transformation Scenario.....	433
Apply Batch Transformations.....	433
Built-in Transformation Scenarios.....	434
Sharing the Transformation Scenarios.....	434
Transformation Scenarios View	434
Debugging PDF Transformations.....	437
XSLT Processors.....	437
XSL-FO Processors.....	440
Output Formats.....	443
WebHelp System Output.....	444

Chapter 9: Querying Documents.....475

Running XPath Expressions.....	476
What is XPath.....	476
Oxygen XML Developer XPath Toolbar.....	476
The XPath/XQuery Builder View.....	477
XPath Expression Results.....	479
Catalogs.....	480
XPath Prefix Mapping.....	481
Working with XQuery.....	481
What is XQuery.....	481
Syntax Highlight and Content Completion.....	481
XQuery Outline View.....	482
The XQuery Input View.....	483
XQuery Validation.....	485
Transforming XML Documents Using XQuery.....	485

Chapter 10: Debugging XSLT Stylesheets and XQuery Documents.....491

XSLT/XQuery Debugging Overview.....	492
Layout.....	492
Control Toolbar.....	493
Debugging Information Views.....	496
Multiple Output Documents in XSLT 2.0 and XSLT 3.0.....	505
Working with the XSLT / XQuery Debugger.....	505
Steps in a Typical Debug Process.....	505
Using Breakpoints.....	506
Determining What XSLT / XQuery Expression Generated Particular Output.....	506

Debugging Java Extensions.....	508
Supported Processors for XSLT / XQuery Debugging.....	509

Chapter 11: Performance Profiling of XSLT Stylesheets and XQuery

Documents.....	511
XSLT/XQuery Performance Profiling Overview.....	512
Viewing Profiling Information.....	512
Invocation Tree View.....	512
Hotspots View.....	513
Working with XSLT/XQuery Profiler.....	513

Chapter 12: Working with Archives.....515

Browsing and Modifying Archives.....	516
Working with EPUB.....	517
Create an EPUB.....	518
Publish to EPUB.....	519
Editing Files From Archives.....	519

Chapter 13: Working with Databases.....521

Relational Database Support.....	522
Configuring Relational Database Data Sources.....	522
Configuring Database Connections.....	522
How to Configure Support For Relational Databases.....	522
Resource Management.....	533
SQL Execution Support.....	539
Native XML Database (NXD) Support.....	541
Configuring Native XML Database Data Sources.....	541
Configuring Database Connections.....	542
How to Configure Support for Native XML Databases.....	542
Data Source Explorer View.....	546
XQuery and Databases.....	560
Build Queries with Drag and Drop from the Data Source Explorer View.....	560
XQuery Transformation.....	561
XQuery Database Debugging.....	562
WebDAV Connection.....	564
How to Configure a WebDAV Connection.....	564
WebDAV Connection Actions.....	564
BaseX Support.....	566
Resource Management.....	566
XQuery Execution.....	566

Chapter 14: Importing Data.....	569
Import from Text Files.....	570
Import from MS Excel Files.....	571
Import Data from MS Excel 2007 or Newer.....	573
Import Database Data as an XML Document.....	573
Import from HTML Files.....	576
Import Content Dynamically.....	576
 Chapter 15: Content Management System (CMS) Integration.....	 579
Integration with Documentum (CMS) (deprecated).....	580
Configure Connection to Documentum Server.....	580
Documentum (CMS) Actions in the Data Source Explorer View.....	581
Transformations on DITA Content from Documentum (CMS).....	585
Integration with Microsoft SharePoint.....	585
How to Configure a SharePoint Connection.....	585
The SharePoint Browser View.....	586
SharePoint Connection Actions.....	588
 Chapter 16: Extending Oxygen XML Developer Using the SDK.....	 591
Extending Oxygen XML Developer with Plugins.....	592
Introduction to Plugins.....	592
General Configuration of an Oxygen XML Developer Plugin.....	592
Installation.....	593
Types of plugin extensions.....	593
How to.....	601
Example - A Selection Plugin.....	606
Creating and Running Automated Tests.....	607
Debugging a Plugin Using the Eclipse Workbench.....	608
Disabling a Plugin.....	608
 Chapter 17: Tools.....	 611
SVN Client.....	612
Main Window.....	612
Getting Started.....	622
Syncro SVN Client Views.....	674
The Revision Graph of a SVN Resource.....	701
Oxygen XML Developer SVN Preferences.....	704
Entering Local Paths and URLs.....	704
Technical Issues.....	705
Tree Editor.....	708
Comparing and Merging Documents.....	708

Directories Comparison.....	709
Files Comparison.....	712
XML Digital Signatures.....	719
Digital Signatures Overview.....	720
Canonicalizing Files.....	721
Certificates.....	722
Signing Files.....	722
Verifying the Signature.....	724
Example of How to Digitally Sign XML Files or Content.....	724
Large File Viewer.....	725
Hex Viewer.....	726
The Standalone SVG Viewer.....	727
Integrating External Tools.....	728

Chapter 18: Configuring Oxygen XML Developer.....731

Preferences.....	732
Global Preferences.....	732
Appearance Preferences.....	734
Application Layout Preferences.....	736
Add-ons Preferences.....	737
Document Type Association Preferences.....	737
Encoding Preferences.....	747
Editor Preferences.....	748
CSS Validator Preferences.....	769
XML Preferences.....	770
DITA Preferences.....	789
Data Sources Preferences.....	790
SVN Preferences.....	794
Diff Preferences.....	797
Archive Preferences.....	800
Plugins Preferences.....	800
External Tools Preferences.....	801
Menu Shortcut Keys Preferences.....	802
File Types Preferences.....	803
The Open/Find Resources Preferences Page.....	804
Custom Editor Variables Preferences.....	805
Network Connection Settings Preferences.....	805
XML Structure Outline Preferences.....	808
Views Preferences.....	808
Messages Preferences.....	808
Configuring Options.....	809
Customizing Default Options.....	810
Sharing and Storing Preferences.....	810
Importing / Exporting Global Options.....	811

Reset Global Options.....	811
Configuring the Layout of the Views and Editors.....	812
Configure Toolbars.....	814
Scenarios Management.....	815
Editor Variables.....	816
Custom Editor Variables.....	820
Custom System Properties.....	820
Localizing the User Interface.....	822
Setting a Java Virtual Machine Parameter in the Launcher Configuration File / Start-up Script.....	823
Setting Parameters for the Application Launchers.....	823
Setting Parameters in the Command Line Scripts.....	824
Creating Custom Startup Parameters File.....	825
Chapter 19: Common Problems.....	827
Performance Problems.....	828
Performance Issues with Large Documents.....	828
External Processes.....	828
Common Problems and Solutions.....	828
Details to Submit in a Request for Technical Support Using the Online Form.....	828
XML Document Takes a Long Time to Open.....	829
Oxygen XML Developer Takes Several Minutes to Start on Mac.....	829
Out Of Memory Error When Opening Large Documents.....	829
Special Characters are Replaced with a Square in Editor.....	830
XSLT Debugger Is Very Slow.....	830
The Scroll Function of my Notebook Trackpad is Not Working.....	830
Crash at Startup on Windows with an Error Message About a File <code>nvogl32.dll</code>	830
Oxygen XML Developer Crashed on My Mac OS X Computer.....	830
Wrong Highlights of Matched Words in a Search in User Manual.....	831
Keyboard Shortcuts Do Not Work.....	831
After Installing Oxygen XML Developer I Cannot Open XML Files in Internet Explorer Any more.....	831
I Cannot Associate Oxygen XML Developer With a File Type on My Windows Computer.....	831
Gray Window on Linux With the Compiz / Beryl Window Manager.....	832
Drag and Drop Without Initial Selection Does Not Work.....	832
Set Specific JVM Version on Mac OS X.....	832
Segmentation Fault Error on Mac OS X.....	832
Damaged File Associations on OS X.....	832
I Cannot Connect to SVN Repository from Repositories View.....	833
Signature Verification Failed Error on Open or Edit a Resource from Documentum.....	833
Compatibility Issue Between Java and Certain Graphics Card Drivers.....	834
An Image Appears Stretched Out in the PDF Output.....	834
The DITA PDF Transformation Fails.....	835
The <i>DITA</i> to <i>CHM</i> Transformation Fails.....	835
DITA Map Ant Transformation Because it Cannot Connect to External Location.....	836

Topic References Outside the Main DITA Map Folder.....	836
The PDF Processing Fails to Use the DITA OT and Apache FOP.....	836
Navigation to the web page was canceled when viewing CHM on a Network Drive.....	837
Alignment Issues of the Main Menu on Linux Systems Based on Gnome 3.x.....	837
SVG Rendering Issues.....	837
MSXML 4.0 Transformation Issues.....	837
 Chapter 20: Glossary.....	 839

Chapter 1

Introduction

Welcome to the User Manual of Oxygen XML Developer 17.1.

Oxygen XML Developer is a cross-platform application designed to accommodate all of your XML editing, authoring, developing, and publishing needs. It is the best XML editor available for document development using structured mark-up languages such as XML, XSD, Relax NG, XSL, DTD.

It offers developers a powerful *Integrated Development Environment* and the intuitive *Graphical User Interface* of Oxygen XML Developer is easy to use and provides robust functionality for content editing, project management, and validation of structured mark-up sources. Coupled with *XSLT* and *FOP* transformation technologies, Oxygen XML Developer offers support for generating output to multiple target formats, including: *PDF*, *PS*, *TXT*, *HTML*, *JavaHelp*, *WebHelp*, and *XML*.

This user guide is focused on describing features, functionality, the application interface, and to help you quickly get started. It also includes a vast amount of advanced technical information and instructional topics that are designed to teach you how to use Oxygen XML Developer to accomplish your tasks. It is assumed that you are familiar with the use of your operating system and the concepts related to XML technologies and structured mark-up.

Chapter

2

Getting Started

Topics:

- [What is Oxygen XML Developer](#)
- [Getting Familiar with the Layout](#)
- [Resources to Help You Get Started Using Oxygen XML Developer](#)
- [Your First Document or Project](#)
- [Getting Help](#)

This chapter is designed to help you get started using Oxygen XML Developer as quickly as possible and to provide you with a variety of resources to help you get the most out of the application. Typically, the first step of getting started with Oxygen XML Developer would be to install the software. For detailed information about that process, see the [Installation](#) on page 25 chapter.

After installation, when you launch Oxygen XML Developer for the first time, you are greeted with a **Welcome** dialog box. It presents upcoming events, useful video demonstrations, helpful resources, the tip of the day, and also gives you easy access to recently used files and projects and to create new ones.

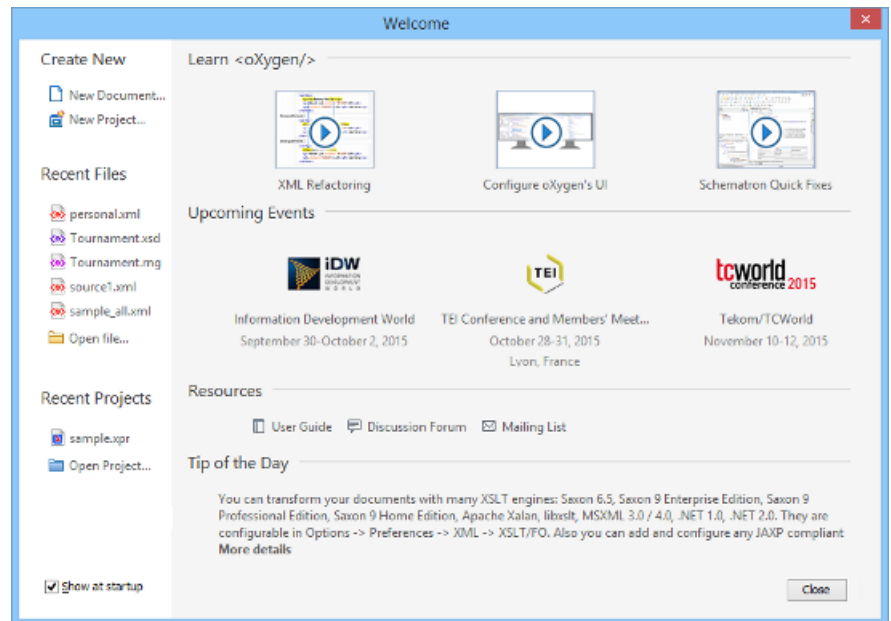


Figure 1: The Welcome Dialog Box

If you do not want it to be displayed every time you launch Oxygen XML Developer, disable the **Show at startup** option. To display it any time, go to **Help > Welcome**.

What is Oxygen XML Developer

Oxygen XML Developer is the best XML editor available and is a complete XML development and authoring solution. It is designed to accommodate a large number of users, ranging from beginners to XML experts. It is the only XML tool that supports all of the XML schema languages and provides a large variety of powerful tools for editing and publishing XML documents.

You can use Oxygen XML Developer to work with most XML-based standards and technologies. It is a cross-platform application available on all the major operating systems (Windows, Mac OS X, Linux, Solaris) and can be used either as a standalone application or as an Eclipse plugin.

For a list of many of the features and technologies that are included in Oxygen XML Developer, see the [oXygen Website](#).

Getting Familiar with the Layout

Oxygen XML Developer includes several [perspectives](#) and [editing modes](#) to help you accomplish a wide range of tasks. Each perspective and editing mode also includes a large variety of helper view, menu actions, toolbars, and contextual menu functions.

Regardless of the [perspective](#) or [editing mode](#) that you are working with, the default layout is comprised of the following areas:

Menus

Menu driven access to all the features and functions available in Oxygen XML Developer. Most of the menus are common for all types of documents, but Oxygen XML Developer also includes some context-sensitive and framework-specific menus and actions that are only available for a specific context or type of document.

Toolbars

Easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. Some of the toolbars are common for all perspectives, editing modes, and types of documents, while others are specific to the particular perspective or mode. Some toolbars are also framework-specific, depending on the type of document that is being edited. All the [toolbars can be configured](#) to suit your specific needs.

Helper Views

Oxygen XML Developer includes a large variety of views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. Many of the views also contain useful contextual menu actions, toolbar buttons, or menus. The most commonly used views for each perspective and editing mode are displayed by default and you can choose to display others to suite your specific needs. The [layout of the views can also be configured](#) according to your preferences.

Editor Pane

The main editing area in the center of the application. Each [editing mode](#) provides a main editor pane where you spend most of your time reading, editing, applying markup, and validating your documents. The editor pane in each [editing mode](#) also includes a variety of contextual menu actions and other features to help streamline your editing tasks.

Perspectives

Oxygen XML Developer includes [several different perspectives](#) that you can use to work with your documents. The **Editor** perspective is the most commonly used perspective used for displaying and editing the content of your XML documents, and it is the default perspective when you start Oxygen XML Developer for the first time. Oxygen XML Developer also includes a **Database** perspective that allows you to manage databases and their connections and a few debugging perspectives that allow you to detect problems in XSLT or XQuery transformations.

Status Bar

The status bar at the bottom of the application contains some useful information when your working with documents. It includes the following information, in the order it is displayed from left to right:

- The path of the current document.
- The [Unicode value](#) for the character directly to the right of the current cursor position.

- The status of the current document. The status of **Modified** is displayed for documents that have not yet been saved. Otherwise, this section is left blank.
- In **Text editing mode**, the current line and character position is displayed.
- If the **Check for notifications option** is enabled, this section will show you when new messages have been received. The types of messages include the addition of new videos on the Oxygen XML Developer website, the announcement of upcoming webinars and conferences where the Oxygen XML Developer team will participate, and more.
- The memory consumption, including the memory used by the application and the maximum amount that is allocated to the application.
- If the **Show memory status option** is enabled, a  **Free unused memory** icon is displayed in the bottom-right corner and you can use this icon to free up unused memory.

Resources to Help You Get Started Using Oxygen XML Developer

Configuring Oxygen XML Developer

There are numerous ways that you can configure Oxygen XML Developer to accommodate your specific needs.

- See the [Configuring Oxygen XML Developer](#) on page 731 section for details on the various ways that you can configure the application and its features.

Video Tutorials

The Oxygen XML Developer website includes numerous video demonstrations and webinars that present many of the features that are available in Oxygen XML Developer and show you how to complete specific tasks or how to use the various features.

- Go to the [Oxygen XML Developer Videos Page](#) to see the list of video tutorials and webinars.

Oxygen XML Developer Documentation

The Oxygen XML Developer documentation includes a plethora of sections and topics to provide you with a variety of information, ranging from basic authoring tasks to advanced developer techniques. You can, of course, search through the documentation using standard search mechanisms, but you can also place the cursor in any particular position in the interface and use the **F1** key to open a dialog box that presents a section in the documentation that is appropriate for the context of the current cursor position. Aside from the other topics in this *Getting Started* section, the following are links to other sections of the documentation that might be helpful for your specific needs:

- **Text Editing Mode on page 58 Section** - Provides information about the **Text** editor.
- **Editing Documents on page 89 Section** - Includes information about editing a large variety of different types of documents.
- **WebHelp System Output on page 444 Section** - Provides information about the WebHelp system that can be used for publishing content.
- **Importing Data on page 569 Section** - Provides information about importing data from text files, MS Excel files, database data, and HTML files.

Sample Documents

Your installation of Oxygen XML Developer includes a large variety of sample documents and projects that you can use as templates to get started and to experiment with the various features and technologies. They are located in the **samples** folder that is located in the installation directory of Oxygen XML Developer. You will find files and folders for a variety of different types of documents, including the following:

- **sample.xpr file** - A sample project file that will allow you to experiment with how projects can be structured and used. When you open this project file, you will be able to see all the sample files and folders in the **Project** view.
- **personal files** - A collection of interrelated sample files that will allow you to experiment with the structure and relationship between XML files, stylesheets, and schemas.

- **Various document type folders** - The various folders contain sample files for numerous different types, such as CSS, DITA, DocBook, ePub, TEI, xhtml, and many others.

Other Resources

The following list includes links to various other resources that will help you get started using the features of Oxygen XML Developer:

- See the [Oxygen XML Developer Blog Site](#) for a large variety of current and archived blogs in regards to numerous features, requests, and instructional topics.
- Take advantage of the [Oxygen XML Developer Forum](#) to see various announcements and learn more about specific issues that other users have experienced.
- If you are using DITA, see the incredibly helpful [DITA Style Guide Best Practices for Authors](#).
- To learn about the WebHelp features in Oxygen XML Developer, see the [Publishing DITA and DocBook to WebHelp](#) section of the website.
- For more information about various additional tools that are integrated into Oxygen XML Developer, see the [Tools section](#).
- See the [External Resource Page](#) for links to various other helpful resources, such as discussion lists, external tutorials, and more.
- See the [oXygen SDK](#) section for details about the SDK that allows you to extend and develop Oxygen XML Developer frameworks and plugins, and to integrate Eclipse plugins.
- For a list of new features that were implemented in the latest version of Oxygen XML Developer, see the [What's New Section of the Website](#)
- You can select the **Tip of the Day** action in the **Help** menu to display a dialog box that includes a variety of tips for using Oxygen XML Developer.

Your First Document or Project

This section includes several topics that will help you get started with your first document or project.

Creating a New Project

Oxygen XML Developer allows you to organize your XML-related files into projects. This helps you manage and organize your files and also allows you to perform batch operations (such as validation and transformation) over multiple files. You can also [share your project settings and transformation/validation scenarios](#) with other users. Use the [Project view](#) to manage projects, and the files and folders contained within.

Creating a New Project

To create a new project, select  **New Project** from the **Project** menu, the **New** menu in the contextual menu, or the drop-down menu at the top-left of the **Project** view. This opens a dialog box that allows you to assign a name to the new project and adds it to the structure of the project in the [Project view](#).

Adding Items to the Project

To add items to the project, select any of the following actions that are available when invoking the contextual menu in the **Project** view:

New >  File

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New >  Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

The project itself is considered a logical folder. You can add a logical folder, or content to a logical folder, by using one of the following actions that are available in the contextual menu, when invoked from the *project root*:

New > Logical Folder

Creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > Logical Folders from Web

Replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

** Add Folder**

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X ).

** Add Files**

Adds links to files on the local file system.

** Add Edited File**

Adds a link to the currently edited file in the project.

Using Linked Folders (Shortcuts)

Another easy way to organize your XML working files is to place them in a directory and then to create a corresponding linked folder in you project. If you add new files to that folder, you can simply use the  **Refresh (F5)** action from the toolbar or contextual menu and the **Project** view will display the existing files and subdirectories. If your files are scattered amongst several folders, but represent the same class of files, you might find it useful to combine them in a logical folder.

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (Mac OS X Finder) to the project tree, or by selecting  **Add Folder** in the contextual menu from the *project root*. Linked folders are displayed in the **Project** view with bold text. To create a file inside a linked folder, select the **New >  File** action from the contextual menu. The linked files presented in the **Project** view are marked with a special icon.

 **Note:** Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

For much more information on managing projects and their content, see the [The Project View](#) on page 59 section.

For more details about how you can share projects with other users, see the [Sharing a Project - Team Collaboration](#) on page 120 section.

Getting Help

If you run into specific problems while using Oxygen XML Developer you can take advantage of a variety of support related resources. Those resources include the following:

- [The Oxygen XML Developer Support Section of the Website](#)
- [The Oxygen XML Developer Forum](#)
- [The Oxygen XML Developer Video Tutorials](#)
- [The Common Problems and Solutions Section of the User Manual](#)
- [The Online Technical Support Form](#)

The application also includes various specific help-related resources in the **Help** menu.

Help Menu

The Oxygen XML Developer **Help** menu provides various resources to assist you with your tasks.

These resources include the following actions or options:

The Help (F1) Action

Use this action (or the **F1** key) to open a dialog box that presents a section in the User Manual that is appropriate for the context of the current cursor position. If the **Use online help** option is enabled, this action will open the User Manual in an online mode.

Dynamic Help

Use the **Show Dynamic Help view** action to open a dynamic view that automatically loads the relevant help section of the User Manual for the focused editor, view, or dialog box.

Add-ons

If you want to extend the functionality of Oxygen XML Developer with *add-ons*, the **Help** menu includes several options for installing, updating, or managing add-ons.

Licensing

If you encounter problems with your Oxygen XML Developer license, you can use the **Register** option to open a dialog box that provides options for obtaining or using a license key.

Reporting a Problem

You can use the **Report problem** option to open a dialog box that allows you to write the description of a problem that was encountered while using the application. You are able to change the URL where the reported problem is sent by using the *com.oxygenxml.report.problems.url* system property. The report is sent in XML format through the `report` parameter of the POST HTTP method. You can also use the **Support Center** option to open the [Oxygen XML Developer Support Section of the Website](#).

The About Dialog Box

Clicking **About** opens a dialog box that contains information about Oxygen XML Developer and the installed version. This dialog box includes the following tabs:

- **Copyright** - This tab contains general information about the product and the version of the product you are using, along with contact details and the *SGN* number. Details regarding the memory usage are also presented at the bottom of the dialog box.
- **Libraries** - This tab presents the list of third party libraries that Oxygen XML Developer uses. To view the End User Licence Agreement of each library, double-click it.
- **Frameworks** - This tab contains a list with the frameworks that are bundled with Oxygen XML Developer.
- **System Properties** - This tab contains a list with system properties and their values. The contextual menu allows you to select and copy the properties.

Chapter

3

Installation

Topics:

- [*Installation Options for Oxygen XML Developer*](#)
- [*Install Oxygen XML Developer on Windows*](#)
- [*Install Oxygen XML Developer on Mac OS X*](#)
- [*Install Oxygen XML Developer on Linux*](#)
- [*Installing Oxygen XML Developer on Windows Server*](#)
- [*Installing Oxygen XML Developer on a Linux / UNIX Server*](#)
- [*Installing Oxygen XML Developer using the Java Web Start \(JWS\) Installer*](#)
- [*Site-wide Deployment*](#)
- [*Obtaining and Registering a License Key for Oxygen XML Developer*](#)
- [*Setting Up a Floating License Server for Oxygen XML Developer*](#)
- [*Transferring or Releasing a License Key*](#)
- [*Upgrading Oxygen XML Developer*](#)
- [*Installing and Updating Add-ons in Oxygen XML Developer*](#)
- [*Uninstalling Oxygen XML Developer*](#)
- [*Oxygen XML Developer Installer Command Line Reference*](#)

The platform requirements and installation instructions are presented in this chapter.

Installation Options for Oxygen XML Developer

Choosing how Oxygen XML Developer runs

You can install Oxygen XML Developer to run in a number of ways:

- As a desktop application (running standalone or as an Eclipse plugin) on [Windows](#), [Linux](#), or [Mac](#).
- As a desktop application (running standalone or as an Eclipse plugin) on a [Unix or Linux server](#) or on [Windows Terminal Server](#).

Choosing an installer

You have a choice of installers;

- The native installer for your platform. On Windows and Linux, the native installer can run also in unattended mode.
- The All-platforms installer, which can be used on any supported platform.

The installation packages were checked before publication with an antivirus program to make sure they are not infected with viruses, trojan horses, or other malicious software.

Choosing a license option

You must [obtain and register a license](#) key to run Oxygen XML Developer.

You can choose from two kinds of license:

- A named-person license, which can be used by a single person on multiple computers.
- A floating license, which can be used by different people at different times. Only one person can use a floating license at a time.

Upgrading, transferring, and uninstalling.

You can also [upgrade](#) Oxygen XML Developer, [transfer a license](#), or [uninstall](#) Oxygen XML Developer.

Getting help with installation

If you need help at any point during these procedures, please send us an email at support@oxygenxml.com.

Install Oxygen XML Developer on Windows

Choosing an Installer

You can install Oxygen XML Developer on Windows using one of the following methods:

- Install using the [Windows installer](#).
- Install using the [Windows installer in unattended mode](#).
- Install using the [All Platforms installer](#). Choose the all platforms installer if you have trouble installing using the Windows installer.

System Requirements

System requirements for a Windows install:

Operating systems

Windows Vista, Windows 7, Windows 8, Windows 10, Windows Server 2008, Windows Server 2012

CPU

- Minimum - Intel Pentium III™/AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. If you use the native Windows installer, Oxygen XML Developer will be installed with its own copy of Java. If you use the all platforms installer, your system must have a compatible Java virtual machine installed.

Oxygen XML Developer supports only official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.7) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that those implementations will work with future Oxygen XML Developer updates and releases.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you install using the native Windows installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Windows environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

If you run Oxygen XML Developer using the batch file, `oxygenDeveloper.bat`, you can edit the batch file to specify a particular version to use.

Install Using the Windows Installer

To install Oxygen XML Developer using the Windows installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. Download the Windows installer.
3. Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
4. Run the installer and follow the instructions in the installation program.
5. Start Oxygen XML Developer using one of the following methods:
 - Using one of the shortcuts created by the installer.
 - By running `oxygenDeveloper.bat`, which is located in the install folder.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Unattended Installation

You can run the installation in unattended mode by running the installer from the command line with the `-q` parameter. By default, running the installer in unattended mode installs Oxygen XML Developer with the default options and does not overwrite existing files. You can change many options for the unattended installer using the [installer command line parameters](#).

Install Using the All Platforms Installer

To install using the all platforms installer, follow these steps:

1. Download the all platforms installation package (`oxygenDeveloper.tar.gz`) to a folder of your choice.
2. Extract the archive in that folder.
Oxygen XML Developer is now installed in a new sub-folder called `oxygenDeveloper`.
3. Optionally, you can move the directory where you installed Oxygen XML Developer to your applications directory. You can also rename it to contain the product version information. For example, you can rename it as `oxygenDeveloper17.1`.
4. Start Oxygen XML Developer by running `oxygenDeveloper.bat`, which is located in the install directory.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Install Oxygen XML Developer on Mac OS X

Choosing an Installer

You can install Oxygen XML Developer on Mac OS X using one of the following methods:

- Install using the Mac OS X installation package, `oxygenDeveloper.zip`.
- Install using the all platforms installer. Choose the all platforms installer if you have trouble installing using the Mac OS X archive installation.

System Requirements

System requirements for a Mac OS X install:

Operating system

OS X version 10.6 64-bit or later

CPU

- Minimum - Intel-based Mac, 1 *GHz*
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java to run. OS X includes Java by default or it will install it on the first attempt to run a Java application.

Oxygen XML Developer supports only official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.6.0 from Apple). Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that other implementations will work with future Oxygen XML Developer updates and releases.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you start Oxygen XML Developer with the application launcher (`.app`) file then:
 - a. if you use the zip distribution for OS X Oxygen XML Developer uses the Apple Java SE 6 available on your Mac computer

- b. if you use the tar.gz distribution that contains a bundled JRE then Oxygen XML Developer will use that bundled JRE
2. If you start Oxygen XML Developer using a startup .sh script then:
 - a. if a bundled JRE is available then it will be used
 - b. otherwise, if the JAVA_HOME environment variable is set then the Java distribution indicated by it will be used
 - c. otherwise the version of Java pointed to by your PATH environment variable will be used

If you run Oxygen XML Developer using the `oxygenDeveloper.sh` script, you can change the version of Java used by editing to script file. Go to the Java command at the end of the script file and specify the full path to the Java executable of the desired JVM version, for example:

```
/System/Library/Frameworks/JavaVM.framework/Versions/1.6.0/Home/bin/java "-Xdock:name= ...
```

OS X Installation

To install Oxygen XML Developer on OS X:

1. Download the OS X installation package (`oxygenDeveloper.zip`).
The Safari web browser should recognize and expand the compressed file. If it is not automatically expanded, you can expand it manually by double-clicking it.
2. Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
3. In **Finder**, move the expanded folder to your **Applications** folder.
Oxygen XML Developer is now installed.
4. Start Oxygen XML Developer, using one of the following methods:
 - Double click `Oxygen XML Developer.app`.
 - Run `sh oxygenDeveloperMac.sh` on the command line.



Notice: You can start more than one instance on the same computer by running the following command for each new instance:

```
open -n OxygenDeveloper.app
```

5. To license your copy of Oxygen XML Developer, go to **Help > Register** to enter your [license key](#).

Install Using the All Platforms Installer

To install using the all platforms installer:

1. Download the all platforms installation package (`oxygenDeveloper.tar.gz`) to a folder of your choice.
2. Extract the archive in that folder.
Oxygen XML Developer is now installed in a new sub-folder called `oxygenDeveloper`.
3. Optionally, you can move the directory where you installed Oxygen XML Developer to your applications directory. You can also rename it to contain the product version information. For example, you can rename it as `oxygenDeveloper17.1`.
4. Start Oxygen XML Developer by running `oxygenDeveloperMac.sh`, which is located in the install folder.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Install Oxygen XML Developer on Linux

Choosing an Installer

You can install Oxygen XML Developer on Linux using any of the following methods:

- Install using the Linux installer.
- Install using the Linux installer in unattended mode.
- Install using the all platforms installer. Choose the all platforms installer if you have trouble installing using the Linux installer.

System Requirements

System requirements for a Linux install:

Operating system

Any Unix/Linux distribution with an available Java SE Runtime Environment version 1.6.0 or later from Oracle

CPU

- Minimum - Intel Pentium III™/AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. Oxygen XML Developer supports only official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.6.0) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that other implementations will work with future Oxygen XML Developer updates and releases. Oxygen XML Developer does not work with the GNU libgcj Java Virtual Machine.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you used the Linux installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Linux environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

You can also change the version of the Java Virtual Machine that runs Oxygen XML Developer by editing the script file, `oxygenDeveloper.sh`. Go to the Java command at the end of the script file and specify the full path to the Java executable of the desired JVM version, for example:

```
/usr/bin/jre1.6.0_45/bin/java -Xmx256m ...
```

Linux Installation

Linux installation procedure.

To install Oxygen XML Developer on Linux, follow these steps:

1. Download the Linux installer.
2. Optionally, you can validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
3. Run the installer that you downloaded.
For example, open a shell, `cd` to the installation directory, and at the prompt type `sh ./oxygen-32bit.sh` or `sh ./oxygen-64bit.sh`, depending on which installer you downloaded.
4. Start Oxygen XML Developer using one of the following methods:
 - Use the `developer` shortcut created by the installer.
 - From a command line, type `sh oxygenDeveloper.sh`. This file is located in the installation folder.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license key](#).

Unattended Installation

You can run the installation in unattended mode by running the installer from the command line with the `-q` parameter. By default, running the installer in unattended mode installs Oxygen XML Developer with the default options and does not overwrite existing files. You can change many options for the unattended installer using the [installer command line parameters](#).

Install Using the All Platforms Installer

To install using the all platforms installer:

1. Download the all platforms installation package (`oxygenDeveloper.tar.gz`) to a folder of your choice.
2. Extract the archive in that folder.
Oxygen XML Developer is now installed in a new sub-folder called `oxygenDeveloper`.
3. Optionally, you can move the directory where you installed Oxygen XML Developer to your applications directory. You can also rename it to contain the product version information. For example, you can rename it as `oxygenDeveloper17.1`.
4. Start Oxygen XML Developer by running `oxygenDeveloper.sh`, which is located in the install folder.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Installing Oxygen XML Developer on Windows Server

Choosing an Installer

You can install Oxygen XML Developer on Windows using one of the following methods:

- Install using the [Windows installer](#).
- Install using the [Windows installer in unattended mode](#).
- Install using the [All Platforms installer](#). Choose the all platforms installer if you have trouble installing using the Windows installer.

System Requirements

System requirements for a Windows Server install:

Operating systems

Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2

CPU

- Minimum - Intel Pentium III™/AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum values per user - 512 MB of RAM
- Recommended values per user - 2 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. If you use the native Windows installer, Oxygen XML Developer will be installed with its own copy of Java. If you use the all platforms installer, your system must have a compatible Java virtual machine installed.

Oxygen XML Developer supports only official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.7) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that those implementations will work with future Oxygen XML Developer updates and releases.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you install using the native Windows installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Windows environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

If you run Oxygen XML Developer using the batch file, `oxygenDeveloper.bat`, you can edit the batch file to specify a particular version to use.

Install Using the Windows Installer

To install Oxygen XML Developer using the Windows installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. Download the Windows installer.
3. Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
4. Run the installer and follow the instructions in the installation program.
5. Start Oxygen XML Developer using one of the following methods:
 - Using one of the shortcuts created by the installer.
 - By running `oxygenDeveloper.bat`, which is located in the install folder.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Install Using the All Platforms Installer

To install using the all platforms installer, follow these steps:

1. Download the all platforms installation package (`oxygenDeveloper.tar.gz`) to a folder of your choice.
2. Extract the archive in that folder.
Oxygen XML Developer is now installed in a new sub-folder called `oxygenDeveloper`.
3. Optionally, you can move the directory where you installed Oxygen XML Developer to your applications directory. You can also rename it to contain the product version information. For example, you can rename it as `oxygenDeveloper17.1`.
4. Start Oxygen XML Developer by running `oxygenDeveloper.bat`, which is located in the install directory.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Configuring Windows Terminal Server

Windows Terminal Server configuration procedure.

1. Install Oxygen XML Developer on the server and make its shortcuts available to all users.
2. If you need to run multiple instances of Oxygen XML Developer, make sure you add the `-Dcom.oxygenxml.MultipleInstances=true` parameter in the `.bat` startup script.
3. Make sure you allocate sufficient memory to Oxygen XML Developer by adding the `-Xmx` parameter either in [the .bat startup script](#), or in [the .vmoptions configuration file](#) (if you start it from an executable launcher).

Installing Oxygen XML Developer on a Linux / UNIX Server

Choosing an Installer

You can install Oxygen XML Developer on Linux using any of the following methods:

- Install using the Linux installer.
- Install using the Linux installer in unattended mode.
- Install using the all platforms installer. Choose the all platforms installer if you have trouble installing using the Linux installer.

System Requirements

System requirements for a Linux install:

Operating system

Any Unix/Linux distribution with an available Java SE Runtime Environment version 1.6.0 or later from Oracle

CPU

- Minimum - Intel Pentium III™/AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. Oxygen XML Developer supports only official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.6.0) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that other implementations will work with future Oxygen XML Developer updates and releases. Oxygen XML Developer does not work with the GNU libgcj Java Virtual Machine.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you used the Linux installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Linux environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

You can also change the version of the Java Virtual Machine that runs Oxygen XML Developer by editing the script file, `oxygenDeveloper.sh`. Go to the Java command at the end of the script file and specify the full path to the Java executable of the desired JVM version, for example:

```
/usr/bin/jre1.6.0_45/bin/java -Xmx256m ...
```

Linux Installation

Linux installation procedure.

To install Oxygen XML Developer on Linux, follow these steps:

1. Download the Linux installer.
2. Optionally, you can validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
3. Run the installer that you downloaded.
For example, open a shell, `cd` to the installation directory, and at the prompt type `sh ./oxygen-32bit.sh` or `sh ./oxygen-64bit.sh`, depending on which installer you downloaded.
4. Start Oxygen XML Developer using one of the following methods:
 - Use the `developer` shortcut created by the installer.
 - From a command line, type `sh oxygenDeveloper.sh`. This file is located in the installation folder.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license key](#).

Install Using the All Platforms Installer

To install using the all platforms installer:

1. Download the all platforms installation package (`oxygenDeveloper.tar.gz`) to a folder of your choice.
2. Extract the archive in that folder.
Oxygen XML Developer is now installed in a new sub-folder called `oxygenDeveloper`.
3. Optionally, you can move the directory where you installed Oxygen XML Developer to your applications directory. You can also rename it to contain the product version information. For example, you can rename it as `oxygenDeveloper17.1`.
4. Start Oxygen XML Developer by running `oxygenDeveloper.sh`, which is located in the install folder.
5. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Unix / Linux Server Configuration

To install Oxygen XML Developer on a Unix / Linux server:

1. Install Oxygen XML Developer on the server and make sure the `oxygenDeveloper.sh` script is executable and the installation directory is in the `PATH` of the users that need to use the application.
2. Make sure you allocate sufficient memory to Oxygen XML Developer by setting an appropriate value for the `-Xmx` parameter in the `.sh` startup script.
The default value of the `-Xmx` parameter is 512 MB. To avoid [Performance Issues with Large Documents](#) on page 828, you may need to adjust it.
3. Make sure the X server processes located on the workstations allow connections from the server host. For this, use the `xhost` command.
4. Start `telnet` (or `ssh`) on the server host.
5. Start an `xterm` process with the **display** parameter set on the current workstation. For example: `xterm -display workstationip:0.0`.
6. Start Oxygen XML Developer by typing `sh oxygenDeveloper.sh` from the command line. This file is located in the installation folder.

Installing Oxygen XML Developer using the Java Web Start (JWS) Installer

Oxygen XML Developer provides the tools to create your own JWS distribution that can be installed on a custom web server. The advantages of a JWS distribution include:

- Oxygen XML Developer is run locally, not inside a web browser, overcoming many of the browser compatibility problems common to applets.
- JWS ensures that the most current version of the application will be deployed, as well as the correct version of JRE.
- Applications launched with Java Web Start are cached locally. Thus, an already downloaded application is launched on par with a traditionally installed application.
- You can preconfigure Oxygen XML Developer and the rest of your team will use the same preferences and frameworks.

Important: If you want to create your own JWS distribution package, please [contact Syncro Soft](#) for permission through a *Value Added Reseller Agreement*.

Note: A code signing certificate is needed to sign the JWS distribution. The following procedure assumes that you already have such a certificate (for example Thawte™, or Verisign™).

The following schematics depicts the Oxygen XML Developer Java Web Start deployment procedure:

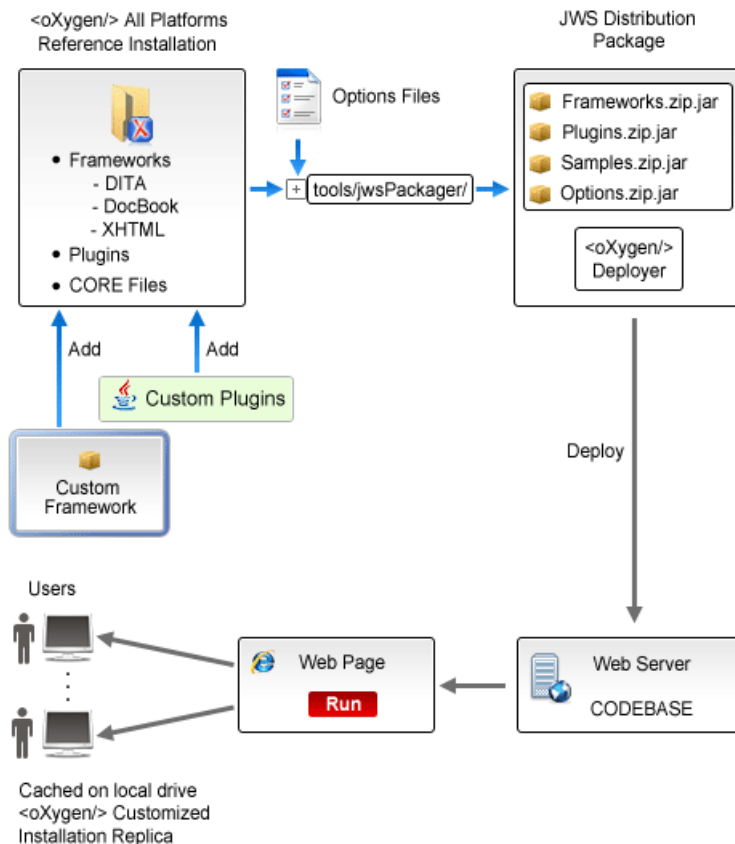


Figure 2: Java Web Start Deployment Procedure

To deploy an Oxygen XML Developer installation on a server.

1. Go to <http://www.oxygenxml.com/InstData/Developer/All/oxygenDeveloper.tar.gz> and download the All Platforms Installation package to a local drive.
2. Expand the archive to a temporary location.
The oxygenDeveloper folder is created.

3. Optionally, you can customize the content of the **frameworks** folder.
4. Edit the `oxygenDeveloper\tools\jwsPackager\packager.properties` configuration file. Adjust the following properties appropriately for your server:
 - **codebase** - Represents the location of the future JWS distribution.
 - **keystore** - The *keystore* location path.
 - **storepass** - The password for *keystore* integrity.
 - **storetype** - The type of the certificate file, such as PKCS12 or JKS.
 - **alias** - The *keystore* alias.
 - **optionsDir** - Points to the options directory that may be distributed with the JWS installer. If the directory contains an XML document named `options.xml` or `default.xml` containing exported options, these options will be used. Otherwise, the structure of the options folder has to match the structure of a stand alone application options folder.



Note: This property is optional. It is provided only if *custom options* need to be delivered to the end users.

The values of **keystore**, **storepass**, and **alias** properties are all provided by the code signing certificate. For more information, please check the documentation for your *jarsigner* tool.

5. If you want to modify the default settings, edit the JNLP `oxygenDeveloper\tools\jwsPackager\dist\javawebstart\author\developer.jnlp` template file. You can specify the list of files opened at startup by modifying the `<argument>` list. To pass system properties directly to Oxygen XML Developer when it is started, add the `oxy` prefix to them (for example: `<property name="oxyPropertyName" value="testValue"/>`). The system property is passed to Oxygen XML Developer with the prefix stripped.
6. Open a command-line console and run `ant` in the `oxygenDeveloper\tools\jwsPackager` folder. The **ant** process creates the `oxygenDeveloper\tools\jwsPackager\dist\InstData\authorJWS.zip` archive that contains the actual remote JWS installer.
7. Copy the expanded content of the archive to the folder specified in the **codebase** property, previously set in the **packager.properties** file.
8. Using your favorite web browser, go to the address specified in the **codebase** property or to its parent folder and start the remote installer.



Important: When running the Java Web Start distribution on OS X, due to changes in this [security release](#), clicking the link to the JNLP file does not start the application. The selected JNLP is downloaded locally. Right click it and choose to open the resource.

Site-wide Deployment

If you are deploying Oxygen XML Developer for a group, there are a number of things you can do to customize Oxygen XML Developer for your users and to make the deployment more efficient.

Creating custom default options

You can [create a custom set of default options](#) for Oxygen XML Developer. These will become the default options for each of your users, replacing Oxygen XML Developer's normal default settings. Users can still set options to suit themselves in their own copies of Oxygen XML Developer, but if they choose to reset their options to defaults, the custom defaults that you set will be used.

Creating default project files

Oxygen XML Developer project files are used to configure a project. You can create and deploy default project files for your projects so that your users will have a preconfigured project file to begin work with.

Shared project files

Rather than each user having their own project file, you can create and deploy shared project files so that all users share the same project configuration and settings and automatically inherit all project changes.

Using the unattended installer

You can speed up the installation process by using the [unattended installer for Windows](#) or [Linux installs](#).

Using floating licenses

If you have a number of people using Oxygen XML Developer on a part-time basis or in different time zones, you can use a [floating license](#) so that multiple people can share a license.

Obtaining and Registering a License Key for Oxygen XML Developer

Oxygen XML Developer is not free software. To enable and use Oxygen XML Developer, you need a license.

For demonstration and evaluation purposes, a time limited license is available upon request at <http://www.oxygenxml.com/register.html>. This license is supplied at no cost for a period of 30 days from the date of issue. During this period, the software is fully functional, enabling you to test all its functionality. To continue using the software after the trial period, you must purchase a permanent license. If a trial period greater than 30 days is required, please contact support@oxygenxml.com.

Choosing a License Type

You can use one of the following license types with Oxygen XML Developer:

1. A named-user license may be used by a single *Named User* on one or more computers. Named-user licenses are not transferable to a new *Named User*. If you order multiple named-user licenses, you will receive a single license key good for a specified number of named users. It is your responsibility to keep track of the named users that each license is assigned to.
2. A floating license may be used by any user on any machine. However, the total number of copies of Oxygen XML Developer in use at one time must not be more than the number of floating licenses available. A user who runs two different distributions of Oxygen XML Developer (for example Standalone and Eclipse Plugin) at the same time on the same computer, consumes a single floating license.

For definitions and legal details of the license types, consult the End User License Agreement available at http://www.oxygenxml.com/eula_developer.html.

Obtaining a License

You can obtain a license for Oxygen XML Developer in one of the following ways:

- You can purchase one or more licenses from the Oxygen XML Developer website at <http://www.oxygenxml.com/buy.html>. A license key will be sent to you by email.
- If your company or organization has purchased licenses please contact your license administrator to obtain a license key.
- If you purchased a subscription and you received a registration code, you can use it to obtain a license key from <http://www.oxygenxml.com/registerCode.html>. A license key will be sent to you by email.
- If you want to evaluate the product you can obtain a trial license key for 30 days from the Oxygen XML Developer website at <http://www.oxygenxml.com/register.html>.

Register a Named-User License

To register a named-user license on a machine owned by the *Named User*:

1. Save a backup copy of the message containing the new license key.
2. Start Oxygen XML Developer.
If this is a new install of Oxygen XML Developer, the registration dialog box is displayed. If the registration dialog box is not displayed, go to **Help > Register**.

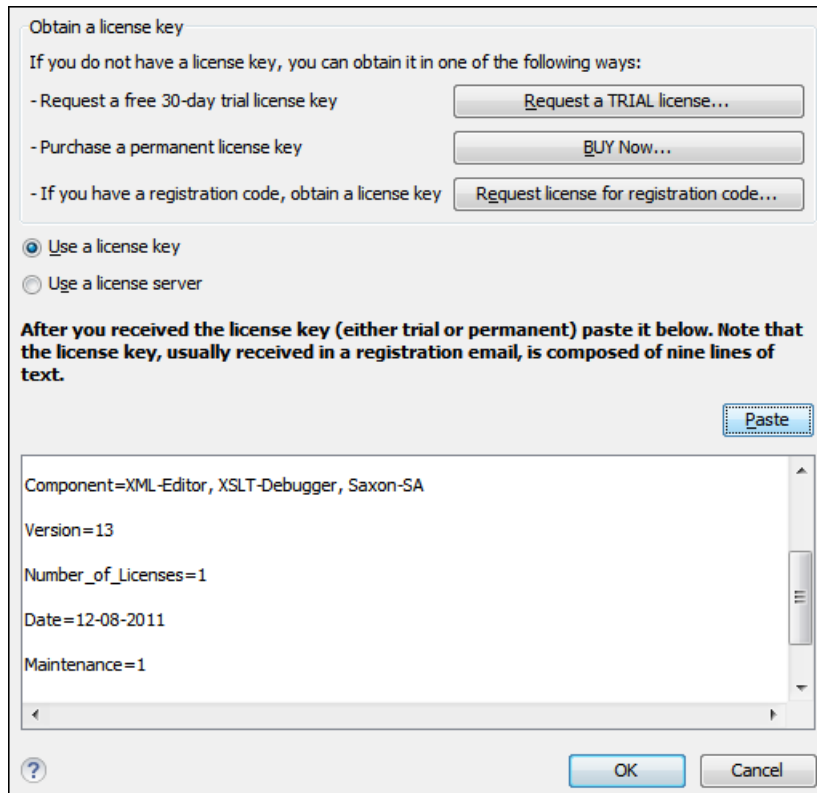


Figure 3: License Registration Dialog Box

3. Select **Use a license key** as licensing method.
4. Paste the license text into the registration dialog box.
5. Press **OK**.

Registering a Floating License

How you register to use a floating license will depend on how floating licenses are managed in your organization.

- If all the machines sharing a pool of floating licenses are on the same network segment, you will register your licence the same way you [register a named-user licence](#).



Note: [For System Administrators] Different running instances of Oxygen XML Developer communicate with each other, using UDP broadcast on the 59153 port, to the 239.255.255.255 group.



Warning: This mechanism was deprecated starting with version 17.0 and it is scheduled for removal in a future version. It is recommended to switch to the license server/servlet licensing mechanism.

- If the machines sharing the pool of floating licenses are on different network segments, someone in your company will need to [set up a license server](#). Consult that person to determine if they have set up a license server as a standalone process or as a Java servlet as the registration process is different for each.

Request a Floating License from a License Server Running as a Standalone Process

Use this procedure if your company uses a license server running as a standalone process:

1. Contact your server administrator to get network address and login details for the license server.
2. Start Oxygen XML Developer.
3. Go to **Help > Register** .
The license registration dialog box is displayed.

4. Choose **Use a license server** as licensing method.
5. Select **Standalone server** as server type.
6. In the *Host* field enter the host name or IP address of the license server.
7. In the *Port* field enter the port number used to communicate with the license server.
8. Click the **OK** button.

If a floating license is available, it is registered in Oxygen XML Developer. To display the license details, open the **About** dialog box from the **Help** menu. If a floating license is not available, you will get a message listing the users currently using floating licenses.

Request a Floating License from a License Server Running as a Java Servlet

1. Contact your server administrator to get network address and login details for the license server.
2. Start Oxygen XML Developer.
3. Go to **Help > Register**.
The license registration dialog box is displayed.
4. Choose **Use a license server** as licensing method.
5. Select **HTTP/HTTPS Server** as server type.
6. In the *URL* field enter the address of the license server.
The URL address has the following format:
`http://hostName:port/oxygenLicenseServlet/license-servlet`
7. Complete the *User* and *Password* fields.
8. Click the **OK** button.

If a floating license is available, it is registered in Oxygen XML Developer. To display the license details, open the **About** dialog box from the **Help** menu. If a floating license is not available, you will get a message listing the users currently using floating licenses.

Release a Floating License

The floating license you are using will be released and returned to the pool if any of the following occur:

- The connection with the license server is lost.
- You exit the application running on your machine, and no other copies of Oxygen XML Developer running on your machine are using your floating license.
- You register a *Named User* license with your copy of Oxygen XML Developer, and no other copies of Oxygen XML Developer running on your machine are using your floating license.

Register a Floating License for Multiple Users

If you are an administrator registering floating licenses for multiple users, you can avoid having to open Oxygen XML Developer on each machine and configuring the registration details by using the following procedure:

1. Reset the registration details:
 - a. Select **Register** from the **Help** menu.
 - b. Click **OK** without entering any information in this dialog box.
 - c. Click **Reset** and restart the application.
2. Register the license using one of the [floating license registration procedures](#).
3. Copy the `license.xml` file from the Oxygen XML Developer [preferences directory](#) to the installation folder on each installation to be registered.

Setting Up a Floating License Server for Oxygen XML Developer

Determine if you need to set up a license server

If you are using floating licenses for Oxygen XML Developer, you may need to set up a license server. If the computers that will be using the floating licenses are on different network segments, you must use an Oxygen XML Developer floating license server. A floating license server can be installed as one of the following:

- A [Java servlet](#).
- A [standalone process](#).



Note: Oxygen XML Developer version 17 or higher requires a license server version 17 or higher. License servers version 17 or higher can be used with any version of a floating license key.

Activating Floating License Keys

To help you comply with the Oxygen XML Developer EULA (terms of licensing), all floating licenses require activation. This means that the license key will be locked to a particular license server deployment and no multiple uses of the same license key are possible.


During the activation process, a code that uniquely identifies your license server deployment is sent to the Oxygen XML Developer servers, which in turn will sign the license key.

Split or combine license keys to work with your license servers

A license server can only manage one license key (which can cover any number of floating licenses). If you have multiple license keys for the same Oxygen XML Developer version and you want to have all of them managed by the same server, or if you have a multiple-user floating license and you want to split it between two or more license servers, please contact support@oxygenxml.com and ask for a new license key.

Setting up a Floating License Server Running as a Java Servlet

Setting up the floating license server as a servlet.

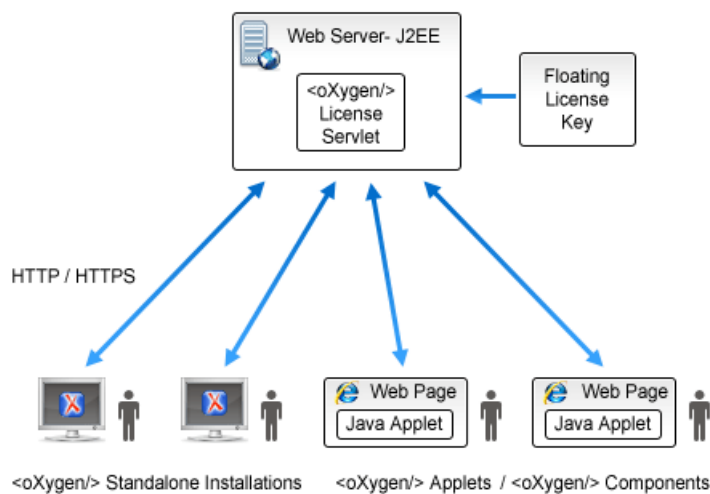

Steps for Installing the Floating License Server as a Servlet

1. Make sure that Apache Tomcat 5.5 or higher is running on the machine you have selected to be the license server. To get it, go to <http://tomcat.apache.org>.
2. Download the **Web ARchive (.war)** license servlet from the [Oxygen XML Developer website](#).
3. Configure Tomcat to use a security Realm element. Refer to the [Tomcat Documentation](#) for more information.

4. Edit the `tomcat-users.xml` file from your Tomcat installation and configure one user for each of the following roles: *standard*, *admin*, and *manager*.
5. Go to the Tomcat Web Application Manager page and log-in with the user you configured with the *manager* role. In the **WAR file to deploy** section, choose the WAR file and click the **Deploy** button. The *oXygen License Servlet* is now up and running, but the license keys are not yet registered.
6. Activate the license key. This process involves binding your license key to your license server deployment. Once the process is completed you cannot activate the license with another license server. Follow these steps to activate the license:
 - a. Access the license servlet by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the credentials configured for the *admin* or *manager* users.
Result: A page is displayed that prompts for a license key.
 - b. Paste your license key into the form and press **Submit**. The browser used in the activation process needs to have Internet access.
Result: You will be redirected to an online form hosted on the Oxygen XML Developer website. This form is pre-filled with an activation code that uniquely identifies your license server deployment, and your license key.
 **Note:** If, for some reason, your browser does not take you to this activation form, refer to the [Manual Activation Procedure](#).
 - c. Press **Activate**.
 If the activation process is successfully completed, your license server is running. Follow the on-screen instructions to configure the Oxygen XML Developer client applications.
7. By default, the license server logs its activity in the `/usr/local/tomcat/logs/oxygenLicenseServlet.log` file. To change the log file location, edit the `log4j.appender.R2.File` property from the `/usr/local/tomcat/webapps/oxygenLicenseServlet/WEB-INF/lib/log4j.properties` configuration file.

Manual License Activation Procedure

1. Access the license servlet by following the link provided by the Tomcat Web Application Manager page. You will be taken to the license registration page.
2. Copy the license server activation code.
3. Go to the activation page at <http://www.oxygenxml.com/activation/>.
4. Paste the license server activation code and floating license key in the displayed form, then click **Activate**.
5. The activated license key is displayed on-screen. Copy the activated license key and paste it in the license registration page of the servlet.

Upgrading Your Floating License Servlet

The goal of the following procedure is to help you minimize the downtime when you upgrade the Oxygen XML Developer floating license servlet to its latest version.

Follow this procedure:

1. Access the license servlet by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the *admin* or *manager* credentials.
2. Click the **View license key** link and copy the displayed license key to a file for later use.
3. Go to the Tomcat Web Application Manager page, log in with the user you configured with the *manager* role, and *Undeploy* the floating license servlet.
4. Go to Oxygen XML Developer website and [download the license servlet](#).
5. Deploy the downloaded license servlet.

6. Access the license servlet by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the credentials configured for the *admin* or *manager* users.
7. Paste the license key into the form and register it.

Replacing a Floating License Key in a Floating License Servlet

The following procedure assumes that your Oxygen XML Developer floating license servlet contains a previously [activated license key](#) and provides instructions for replacing it with another one. The goal of the procedure is to minimize the license servlet downtime during the activation step of the new license key.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your floating license servlet with a new one, follow these steps:

1. Access the license servlet by following the link provided by the Tomcat Web Application Manager page.
2. Click the **Replace license key** link. This will open a page that contains details about the license currently in use.
3. Click the **Yes** button to begin the replacement procedure.



Note: During the replacement procedure, new instances of Oxygen XML Developer cannot be licensed by the servlet until the process is completed.

4. Paste the new floating license key in the displayed form, then click **Submit**. The browser used in the process needs to have Internet access.

You will be redirected to an online form hosted on the Oxygen XML Developer website. This form is pre-filled with an activation code that uniquely identifies your license server deployment and your license key.



Note: If for some reason your browser does not take you to this activation form, refer to the [Manual Activation Procedure](#).

5. Press **Activate**.

If the activation process is completed successfully, your license servlet is now running using the new license key. You can click **View license key** to inspect the key currently used by the license servlet.



Important: If the activation procedure fails, go to step 1 and click **Cancel** to revert to the last successfully activated license key.

Getting More Information From the Report Page

You can access a license server activity report at

`http://hostName:port/oxygenLicenseServlet/license-servlet/report`.

It displays the following real time information:

- **License load** - A graphical indicator that shows how many licenses are available. When the indicator turns red, there are no more licenses available.
- **Floating license server status** - General information about the license server status, including the following information:
 - server start time
 - license count
 - rejected and acknowledged requests
 - average usage time
 - license refresh and timeout intervals
 - location of the license key
 - server version
- **License key information** - License key data, including the following information:


- licensed product
- registration name
- company name
- license category
- number of floating users
- Maintenance Pack validity
- **Current license usage** - Lists all currently acknowledged users, including the following information:
 - user name
 - date and time when the license was granted
 - name and IP address of the computer where Oxygen XML Developer runs
 - MAC address of the computer where Oxygen XML Developer runs



Note: The report is also available in XML format at `http://hostName:port/oxygenLicenseServlet/license-servlet/report-xml`.

Setting up a Floating License Server Running as a Standalone Process Using a 32-bit Windows Installer

Setting up the floating license server as a standalone process for Windows.

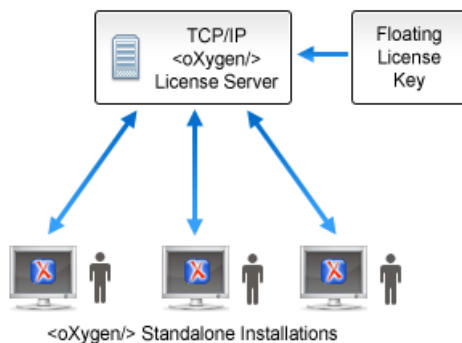

Steps for Installing the Floating License Server in Windows as a Standalone Process

1. Download the license server installation kit for Windows from the [Oxygen XML Developer website](#).
2. Run the downloaded installer and follow the on-screen instructions.

By default, the installer installs the license server as a Windows service. Optionally, you have the ability to start the Windows service automatically at Windows startup or create shortcuts on the **Start** menu for starting and stopping the Windows service manually. If you want to manually install, start, stop, or uninstall the server as a Windows service, run the following scripts from a command line as an Administrator:

- `installWindowsService.bat [serviceName]` - Installs the server as a Windows service with the name `serviceName`. The parameters for the license key folder and the server port can be set in the `oxygenLicenseServer.voptions` file.
- `startWindowsService.bat [serviceName]` - Starts the Windows service.
- `stopWindowsService.bat [serviceName]` - Stops the Windows service.
- `uninstallWindowsService.bat [serviceName]` - Uninstalls the Windows service.



Note: If you do not provide the `serviceName` argument, the default name `oxygenLicenseServer` is used.

If the license server is installed as a Windows service, the output and error messages are automatically redirected to the following log files that are created in the install folder:

- `outLicenseServer.log` - Standard output stream of the server.
- `errLicenseServer.log` - Standard error stream of the server.

3. Manually add the oXygenLicenseServer.exe file in the Windows Firewall list of exceptions. Go to **Control Panel > System and Security > Windows Firewall > Allow a program or feature through Windows Firewall > Allow another program** and browse for oXygenLicenseServer.exe from the Oxygen XML Developer License Server installation folder.
4. Floating licenses require activation prior to use. More details are available either on-screen (if the license server is started in a *command line interface*) or in the outLicenseServer.log log file.



Note: A license server can only manage one license key (which can cover any number of floating licenses). If you have multiple license keys for the same Oxygen XML Developer version and you want to have all of them managed by the same server, or if you have a multiple-user floating license and you want to split it between two or more license servers, please contact support@oxygenxml.com and ask for a new license key.

Upgrading Your Floating License Server

The goal of the following procedure is to help you minimize the downtime generated when you upgrade the Oxygen XML Developer floating license server to its newest version.

Follow this procedure:

1. Go to the Oxygen XML Developer website and download the [latest floating license server](#).
2. Run the installation kit.
3. Leave the default **Update the existing installation** option enabled. This will ensure that some options set in the previous version (namely the installation folder, port number, and the floating license key in use) of the license server will be preserved.
4. Follow the on-screen instructions to complete the installation process.

Replacing a Floating License Key in a Floating License Server

The following procedure assumes that your Oxygen XML Developer floating license server contains a previously [activated license key](#) and provides instructions for replacing the activated license key with another one. The goal of the procedure is to minimize the license servlet downtime during the activation step of the new license key.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your floating license server with a new one, follow these steps:

1. Stop the service that runs the floating license server.
2. Locate the folder that holds the previous activated license key (by default, it is named `license` and it is located in the installation directory of the license server).
3. Remove the `license.txt` file and try to restart the server. Since the file that stores the license key is missing, [the server will fail to start](#).
4. Find the license activation procedure in the on-screen instructions (if the license server is started in a *command line interface*) or in the outLicenseServer.log log file.
5. After you copy the activated license key in the `license.txt` file, restart the license server.

Common Problems

This section includes some common problems that may appear when setting up a floating license server running as a standalone process.

Windows Service Reports "Incorrect Function" When Started

The "Incorrect Function" error message when starting the Windows service usually appears because the Windows service launcher cannot locate a Java virtual machine on your system.

Make sure that you have installed a 32-bit Java SE from Oracle (or Sun) on the system:

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>.


When Started, the Windows Service Reports "Error 1067: The Process Terminated Unexpectedly"

This error message appears if the Windows service launcher quits immediately after being started.

This problem usually happens because the license key has not been correctly deployed (`license.txt` file in the `license` folder). For more information, see the [Setting up a Floating License Server section](#).

Setting up a Floating License Server Running as a Standalone Process Using a Platform-independent Distribution

This installation method can be used for running the license server on any platform where a Java virtual machine can run (OS X, Linux/Unix, Windows).

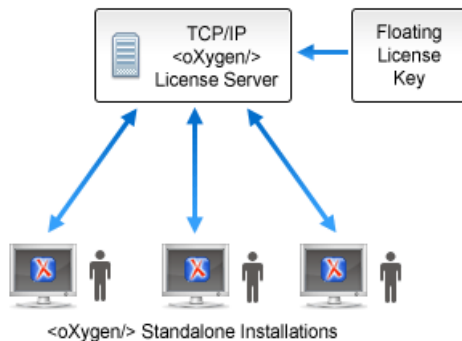

Steps for Installing the Floating License Server as a Standalone Process with a Zip Archive

1. Ensure that a Java runtime version 6 or later is installed on the server machine.
2. Download the license server installation kit for your platform from the [Oxygen XML Developer website](#).
3. Unzip the installation kit into a new folder.
4. Start the server using the startup script from a command line console.

The startup script is called `licenseServer.sh` for OS X and Unix/Linux or `licenseServer.bat` for Windows. The following parameters are accepted:

- `licenseDir` - The path of the directory where the license files will be placed. The default value is `license`.
- `port` - The TCP port number used to communicate with Oxygen XML Developer instances. The default value is **12346**.

The following is an example of the command line for starting the license server on Unix/Linux and OS X:

```
sh licenseServer.sh myLicenseDir 54321
```

5. Floating licenses require activation prior to use. Follow the on-screen instruction to complete the license activation process.

Upgrading Your Floating License Server

The goal of the following procedure is to help you minimize the downtime generated when you upgrade the Oxygen XML Developer floating license server to its newest version.

Follow this procedure:

1. Stop the current license server process.
2. Locate and open the floating server startup script. It should look like:

```
sh licenseServer.sh pathToLicenseDir 54321
```

3. Make a note of the path to the license directory (in our example is `pathToLicenseDir`) and the port number (in our example is `54321`).
4. Go to the license directory and copy the license key file (`license.txt`) for later use.

5. Go to the Oxygen XML Developer website and download the [all-platforms floating license server installation kit](#).
6. Unzip the archive and overwrite the content of your current floating license server installation.
7. Copy the license key file (`License.txt`) saved in step 4 to `license` directory of the floating license server installation.
8. Edit the floating server startup script and configure with the info you made note of in step 3.
9. Start the floating license server process.

Replacing a Floating License Key in a Floating License Server

The following procedure assumes that your Oxygen XML Developer floating license server contains a previously [activated license key](#) and provides instructions for replacing the activated license key with another one. The goal of the procedure is to minimize the license servlet downtime during the activation step of the new license key.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your floating license server with a new one, follow these steps:

1. Stop the process that runs the floating license server.
2. Locate the folder that holds the previous activated license key (by default, it is named `license` and it is located in the installation directory of the license server).
3. Remove the `License.txt` file and try to restart the server. Since the file that stores the license key is missing, the server will fail to start.
4. Find the license activation procedure in the on-screen instructions.
5. After you copy the activated license key in the `License.txt` file, restart the license server.

Transferring or Releasing a License Key

If you want to transfer your Oxygen XML Developer license key to another computer (for example if you are disposing of your old computer or transferring it to another person), or release a [floating license](#) so that someone else can use it, you must first unregister your license. You can then [register your license](#) on the new computer in the normal way.

1. Go to **Help > Register**.

The license registration dialog box is displayed.

2. The license key field should be empty (this is normal). If it is not empty, delete any text in the field.
3. Make sure the option **Use a license key** is selected.
4. Click **OK**.

A dialog box is displayed asking if you want to reset your license key.

5. Select between falling back to the license key entered previously (for the case of releasing a floating license and reverting to a *Named User* license) and removing your license key from your user account on the computer using the **Reset** button.

The **Reset** button erases all the licensing information. To complete the reset operation, close and restart Oxygen XML Developer.

Upgrading Oxygen XML Developer

From time to time, upgrade and patch versions of Oxygen XML Developer are released to provide enhancements that fix problems, and add new features.

Checking for New Versions of Oxygen XML Developer

Oxygen XML Developer checks for new versions automatically at start up. To disable this check, [open the Preferences dialog box](#), go to **Global**, and uncheck **Automatic Version Checking**.

To check for new versions manually, go to **Help > Check for New Versions**.

What is Preserved During an Upgrade?

When you install a new version of Oxygen XML Developer, some data is preserved and some is overwritten. If there is a previous version of Oxygen XML Developer already installed on your computer, it can coexist with the new one, which means you do not have to uninstall it.

If you install over a previously installed version:

- All the files from its install directory will be removed, including any modification in [document type \(framework\) files](#), XSLT stylesheets, XML catalogs, and templates.
- All global user preferences are preserved in the new version.
- All project preferences will be preserved in their project files.
- Any custom frameworks that were stored outside the installation directory (as configured in [Document type associations > Locations](#)) will be preserved and will be found by the new installation.

If you install in a new directory:

- All the files from the old install directory will be preserved, including any modification in [document type \(framework\) files](#), XSLT stylesheets, XML catalogs, and templates. However, these modifications will not be automatically imported into the new installation.
- All global user preferences are preserved in the new version.
- All project preferences will be preserved in their project files.
- Any custom frameworks that were stored outside the installation directory (as configured in [Document type associations > Locations](#)) will be preserved and will be found by the new installation.

Upgrading the Standalone Application

1. Upgrading to a new version might require a new license key. To check if your license key is compatible with the new version, select **Help > Check for New Version**. Note that the application needs an Internet connection to check the license compatibility.
2. Download and install the new version according to the instructions for your platform and the type of installer you selected.
3. If you installed from an archive (as opposed to an executable installer) you may have to update any shortcuts you have created or modify the system PATH to point to the new installation folder.
4. Start Oxygen XML Developer.
5. If you require a new license for your upgrade, install it now according to the procedure for your platform and the type of installer you selected.

Installing and Updating Add-ons in Oxygen XML Developer

Oxygen XML Developer provides an add-on mechanism that can automatically discover and install [plugins](#) from a remote location.



Note: Frameworks that you install through the add-ons system are read-only.

Installing Add-ons

To install a new add-on, follow these steps:

- Go to **Help > Install new add-ons**.
- In the displayed dialog box, fill-in the **Show add-ons from** with the [update site](#) that hosts add-ons. The add-ons list contains the name, status, update version, Oxygen XML Developer version, and the type of the add-on (either framework, or plugin). A short description of each add-on is presented under the add-ons list.



Note: To see all the add-ons from the remote update site, disable **Show only compatible add-ons** and **Show only the latest version of the add-ons**. Incompatible add-ons are shown only to acknowledge their presence on the remote update site. You cannot install an incompatible add-on.

- By default, only the latest versions of the add-ons that are compatible with the current version of Oxygen XML Developer are displayed.
- Choose the add-ons you want to install, press the **Next** button, then follow the on-screen instructions.



Note: Accepting the license agreement of the add-on is a mandatory step in the installation process.



Note: All add-ons are installed in the `extensions` directory inside the Oxygen XML Developer [preferences directory](#).

Managing installed add-ons

To manage the installed add-ons, follow these steps:

- Go to **Help > Manage add-ons**
- The displayed dialog box presents a list of the available updates (compatible with the current version of Oxygen XML Developer) and with the already installed updates. Under the updates list, Oxygen XML Developer presents a short description of each update.
- Check for box for a specific add-on, then press **Update** to update it (or **Uninstall** to remove it). If there is a newer version of the add-on available, Oxygen XML Developer will download the package and install it. Follow the on-screen instructions to complete the installation process.



Note: Accepting the license agreement of the add-on is a mandatory step in the installation process.

Checking for add-on updates

To check if there are available updates for the installed add-ons, go to **Help > Check for add-ons updates**. This action only displays updates that are compatible with the current Oxygen XML Developer version.

To watch a video demonstration about the add-ons support in Oxygen XML Developer, go to <http://www.oxygenxml.com/demo/AddonsSupport.html>.

Uninstalling Oxygen XML Developer

Uninstalling the Oxygen XML Developer Standalone



Caution: The following procedure will remove Oxygen XML Developer from your system. **All data stored in the installation directory will be removed, including any customizations or any other data you have stored within that directory. Make a back up of any data you want to keep before uninstalling Oxygen XML Developer.**

1. Backup any data you want to keep from the Oxygen XML Developer installation folder.
2. Remove the application.
 - On Windows use the appropriate uninstaller shortcut provided with your OS.
 - On OS X and Unix manually delete the installation folder and all its contents.
3. If you want to remove the user preferences:
 - **On Windows Vista/7/8/10**, remove the directory: `%APPDATA%\Roaming\com.oxygenxml.developer` (usually `%APPDATA%` has the value `[user-home-dir]\Application Data`). Note that this is directory is hidden.
 - **On Windows XP**, remove the directory: `%APPDATA%\com.oxygenxml.developer` (usually `%APPDATA%` has the value `[user-home-dir]\Application Data`).
 - **On Linux**, remove the directory: `.com.oxygenxml.developer` from the user home directory.

The Oxygen XML Developer installer supports the following command line parameters:

Option	Meaning
-q	Run the installer in unattended mode. The installer will not prompt the user for input during the install. Default settings will be used for all options unless a <code>response.varfile</code> is specified using the <code>-varfile</code> option or individual settings are specified using - on Windows: <pre>oxygenDeveloper.exe -q</pre> - on Linux: <pre>oxygenDeveloper.sh -q</pre>
-overwrite	In unattended mode, the installer does not overwrite files with the same name if a previous version of the Oxygen XML Developer is installed in the same folder. The <code>-overwrite</code> parameter added after the <code>-q</code> parameter forces the overwriting of these files. - on Windows: <pre>oxygenDeveloper.exe -q -overwrite</pre> - on Linux: <pre>oxygenDeveloper.sh -q -overwrite</pre>
-console	To display a console for the unattended installation, add a <code>-console</code> parameter to the command line. - on Windows: <pre>start /wait oxygenDeveloper.exe -q -console</pre>  Note: The use of <code>start /wait</code> on Windows is required to make the installer run in the foreground. If you run it without <code>start /wait</code>, it will run in the background. - on Linux: <pre>oxygenDeveloper.sh -q -console</pre>
-varfile	Points to the location of a <code>response.varfile</code> to be used during an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -varfile response.varfile</pre> - on Linux: <pre>oxygenDeveloper.sh -q -varfile response.varfile</pre>
-V	Is used to define a variable to be used by an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -VusageDataCollector=false</pre> - on Linux: <pre>oxygenDeveloper.sh -q -VusageDataCollector=false</pre>

The Oxygen XML Developer installation uses the install4j installer. A full list of the [command line parameters supported by the install4j installer](#) can be found on the install4j site.

Chapter

4

Perspectives

Topics:


- [*Editor Perspective*](#)
- [*XSLT Debugger Perspective*](#)
- [*XQuery Debugger Perspective*](#)
- [*Database Perspective*](#)

The Oxygen XML Developer interface uses standard interface conventions and components to provide a familiar and intuitive editing environment across all operating systems. There are several perspectives that you can use to work with documents in Oxygen XML Developer. You can change the perspective by selecting the respective icons in the top-right corner of Oxygen XML Developer or by selecting the perspective from the **Window > Open Perspective** menu.

Editor Perspective

The **Editor** perspective is the most commonly used perspective and it is the default perspective when you start Oxygen XML Developer for the first time. It is the perspective that you will use to edit the content of your XML documents.

To switch the focus to this perspective, select the **Editor** button in the top-right corner of Oxygen XML Developer



(or select **Editor** from the **Window > Open perspective** menu)

The layout of this perspective is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in Oxygen XML Developer. Most of the menus are common for all types of documents. However, Oxygen XML Developer also includes some context-sensitive and framework-specific menus that are only available for a specific context or type of document.

Toolbars

Provides easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. The [toolbars can be configured](#) to suit your specific needs.

Editor Pane

The main editing pane where you spend most of your time reading, editing, applying markup, and validating your documents.

Views

Oxygen XML Developer includes a large variety of views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. The most commonly used views are displayed by default and you can choose to display others by selecting them from the **Window > Show View** menu. The [layout of the views can also be configured](#) according to your preferences.

When two or more views are displayed, the application provides divider bars. Divider bars can be dragged to a new position increasing the space occupied by one panel while decreasing it for the other.

As the majority of the work process centers around the Editor area, other views can be hidden using the controls located on the top-right corner of the view ().

Some of the most helpful views in the **Editor** perspective include the following:

- **Project view** - Enables the definition of projects and logical management of the documents they contain.
- **Open/Find Resource view** - Designed to offer advanced search capabilities in various scopes.
- **Outline view** - It provides an XML tag overview and offers a variety of functions, such as modifications follow-up, document structure change, document tag selection, and elements filtering.
- **Results view** - Displays the messages generated as a result of user actions such as [validations](#), [transformation scenarios](#), [spell checking in multiple files](#), search operations, and others. Each message is a link to the location related to the event that triggered the message.
- **Attributes view** - Presents all possible attributes of the current element and allows you to edit attribute values. You can also use this view to insert attributes in **Text** mode.
- **Model view** - Presents the current edited element structure model and additional documentation as defined in the schema.
- **Elements view** - Presents a list of all defined elements that you can insert at the current cursor position according to the document's schema.
- **Entities view** - Displays a list with all entities declared in the current document as well as built-in ones.
- **Transformation Scenarios view** - Displays a list with all currently configured transformation scenarios.
- **XPath/XQuery Builder view** - Displays the results from running an XPath expression.
- **WSDL SOAP Analyzer view** - Provides a tool that helps you test if the messages defined in a Web Service Descriptor (WSDL) are accepted by a Web Services server.

Supported Document Types

You can use the main editing pane in the **Editor** perspective to edit a large variety of types of documents. The supported document types include:

-  - XML documents
-  - XSLT stylesheets
-  - XML Schema
-  - DTD (Document Type Definition) schemas
-  - RELAX NG full syntax schemas
-  - RELAX NG compact syntax schemas
-  - NVDL (Namespace-based Validation Dispatching Language) schemas
-  - XSL:FO documents
-  - XQuery documents
-  - WSDL documents
-  - Schematron documents
-  - JavaScript documents
-  - Python documents
-  - CSS documents
-  - LESS documents
-  - XProc scripts
-  - SQL documents
-  - JSON documents
-  - Ant build scripts

XSLT Debugger Perspective

The XSLT Debugger perspective allows you to detect problems in an XSLT transformation by executing the process step by step. To switch the focus to this perspective, select the **XSLT Debugger** button in the top-right corner of Oxygen

XML Developer  or select **XSLT Debugger** from the **Window > Open perspective** menu.

The workspace in this perspective is organized as an editing area assisted by special helper views. The editing area contains editor panels that you can *split horizontally or vertically* in a stack of XML editor panels and a stack of XSLT editor panels. The XML files and XSL files can be edited in *Text mode* only.

The layout of this perspective is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XSLT Debugger**.

Toolbars

Contains all actions needed in order to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

XML Source Pane

The editing pane where you can display and edit data or document-oriented XML documents.

XSL Source Pane

The editing pane where you can display and edit XSL stylesheets.

Output View

Displays the transformed output that results from the input of a selected document (XML) and selected stylesheet (XSL) to the transformer. The result of transformation is dynamically written as the transformation is processed. There are three types of views for the output: a text view (with XML syntax highlight), an XHTML view, and one text view for each `xsl:result-document` element used in the stylesheet (if it is a XSLT 2.0 / 3.0 stylesheet).

Debugging Information Views

Presented in two panes, they display various types of information that can be used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This allows you to obtain a clear view of the transformation progress. See the [Debugging Information Views](#) topic for a list of all the information views (and links to more details on each view).



Note: You are able to add XPath expression automatically in the **XWatch** view using the **Watch expression** action from the contextual menu. In case you select an expression or a fragment of it and then click **Watch expression** in the contextual menu, the entire selection is presented in the **XWatch** view. Using **Watch expression** without selecting an expression displays the value of the attribute from the cursor position in the **XWatch** view. Variables detected at the cursor position are also displayed. Expressions displayed in the **XWatch** view are *normalized* (unnecessary white spaces are removed from the expression).

To watch our video demonstration about the XSLT debugging capabilities in Oxygen XML Developer, go to http://www.oxygenxml.com/demo/XSLT_Debugger.html.

XQuery Debugger Perspective

The XQuery Debugger perspective allows you to detect problems in an XQuery transformation process by executing the process step by step in a controlled environment and inspecting the information provided in the special views. To switch the focus to this perspective, select the **XQuery Debugger** button in the top-right corner of Oxygen XML

Developer  or select **XQuery Debugger** from the **Window > Open perspective** menu.

The workspace in this perspective is organized as an editing area assisted by special helper views. The editing area contains editor panels that you can [split horizontally or vertically](#) in a stack of XML editor panels and a stack of XQuery editor panels. The XML files and XQuery files can be edited in [Text mode](#) only.

The layout of this perspective is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XQuery Debugger**.

Toolbars

Contains all actions needed in order to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

XML Source Pane

The editing pane where you can display and edit data or document-oriented XML documents.

XQuery Source Pane

The editing pane where you can display and edit XQuery files.

Output View

Displays the transformed output that results from the input of a selected document (XML) and selected XQuery document to the XQuery transformer. The result of transformation is dynamically written as the transformation is processed. There are two types of views for the output: a text view (with XML syntax highlight) and an XHTML view.

Debugging Information Views

Presented in two panes, they display various types of information that can be used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This allows you to obtain a clear view of the transformation progress. See the [Debugging Information Views](#) topic for a list of all the information views (and links to more details on each view).



Note: You are able to add XPath expression automatically in the **XWatch** view using the **Watch expression** action from the contextual menu. If you select an expression, or a fragment of it, and then click **Watch expression** in the contextual menu, the entire selection is presented in the **XWatch** view. Expressions displayed in the **XWatch** view are normalized (unnecessary white spaces are removed from the expression).

To watch our video demonstration about the XQuery debugging capabilities in Oxygen XML Developer, go to http://www.oxygenxml.com/demo/XQuery_Debugger.html.

Database Perspective

The Database perspective allows you to manage a database, offering support for browsing multiple connections at the same time, relational and native XML databases, SQL execution, XQuery execution and data export to XML. To switch the focus to this perspective, select the **Database Debugger** button in the top-right corner of Oxygen XML Developer



or select **Database** from the **Window > Open perspective** menu.

This perspective offers support for the following databases:

- Oracle Berkeley DB XML Database
- eXist XML Database
- IBM DB2 (Enterprise edition only)
- JDBC-ODBC Bridge
- MarkLogic (Enterprise edition only)
- Microsoft SQL Server 2005 and Microsoft SQL Server 2008 (Enterprise edition only)
- MySQL
- Oracle 11g (Enterprise edition only)
- PostgreSQL 8.3 (Enterprise edition only)
- Documentum xDb (X-Hive/DB) 10 XML Database (Enterprise edition only)
- Documentum (CMS) 6.5 (Enterprise edition only)



Note: For the databases marked with "Enterprise edition only", the XML capabilities are only available in the Enterprise edition of Oxygen XML Developer. The non-XML capabilities of any database listed here are available in the Enterprise, Academic, and Professional editions of Oxygen XML Developer by registering the database driver as a *Generic JDBC* type driver when defining the data source for accessing the database. For more information, see the [Configuring Relational Database Data Sources](#) on page 522 or [Configuring Native XML Database Data Sources](#) on page 541 sections.

The supported non-XML capabilities are as follows:

- Browsing the structure of the database instance.
- Opening a database table in the [Table Explorer view](#).
- Handling the values from **XML Type** columns as String values.

The supported XML capabilities are as follows:

- Displaying an XML Schema node in the tree of the database structure (for databases with an XML-specific structure) with actions for opening, editing, and validating the schemas in an Oxygen XML Developer editor panel.
- Handling the values from **XML Type** columns as XML instance documents that can be opened and edited in an Oxygen XML Developer editor panel.
- Validating an XML instance document added to an XML Type (column of a table, etc.)

For a detailed feature matrix that compares the Academic, Professional, and Enterprise editions of Oxygen XML Developer [go to the Oxygen XML Developer website](#).



Tip: Connections configured on relational data sources can be used to import data to XML or to generate XML schemas.

The layout of this perspective is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XQuery Debugger**.

Toolbars

Contains all actions needed in order to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

Editor Pane

The main editing pane where you spend most of your time reading, editing, applying markup, and validating your documents.

[Data Source Explorer View](#)

Provides browsing support for the configured connections.

[Table Explorer View](#)

Provides table content editing support for inserting new rows, deleting table rows, editing cell values, exporting to an XML file, and more.

Chapter

5

Editing Modes

Topics:

- [Text Editing Mode](#)
- [Grid Editing Mode](#)
- [Design Editing Mode](#)

The main editing area in Oxygen XML Developer includes several editing modes to suit the type of editing that you want to perform. You can easily switch between modes by clicking on the desired mode at the bottom of the main editing pane. Oxygen XML Developer offers the following editing modes:

- **Text** - This mode presents the source of an XML document.
- **Grid** - This mode displays an XML document as a structured grid of nested tables.
- **Design** - This mode is found in the schema editor and represents the schema as a diagram.

Text Editing Mode

The **Text** mode of Oxygen XML Developer provides the usual functionality of a plain text editor. It also includes a variety of advanced features that are unique to Oxygen XML Developer.

Text Mode Editor

The **Text** mode **Author** editor in Oxygen XML Developer is designed to be a simple, yet powerful, XML editor. It provides support to help you edit, transform, and debug XML-based documents. It also includes a specialized **Content Completion Assistant**, an **Outline view**, and many other helpful features.

Navigating the Document Content in Text Mode

Using the Keyboard

Oxygen XML Developer allows you to quickly navigate through a document using the **Ctrl Close Bracket (Meta Close Bracket on OS X)** key to go to the next XML node and **Ctrl Open Bracket (Meta Open Bracket on OS X)** to go to the previous one.

To navigate one word forward or backwards, use **Ctrl Right Arrow (Command Right Arrow on OS X)**, and **Ctrl Left Arrow (Command Left Arrow on OS X)**, respectively. To position the cursor at the beginning or end of the document you can use **Ctrl Home (Command Home on OS X)**, and **Ctrl End (Command End on OS X)**, respectively.

Using the Navigation Toolbar

The locations of selected text are stored in an internal list that allows you to navigate between them with the **Back** (← **Ctrl Alt Open Bracket (Meta Alt Open Bracket on OS X)**) and **Forward** (→ **Ctrl Alt Close Bracket (Meta Alt Close Bracket on OS X)**) buttons from the **Navigation** toolbar. The **Last Modification** (↩ **Ctrl G (Meta G on OS X)**) button automatically takes you to the latest edited text.

Using the Breadcrumb Helpers

A *breadcrumb* on the top stripe indicates the path from the document root element to the current element. It can also be used as a helpful tool to navigate to specific elements throughout the structure of the document.




Figure 4: The Breadcrumb in Text Mode

The last element listed in the *breadcrumb* is the element at the current cursor position. The current element is also highlighted by a thin light blue bar for easy identification. Clicking an element from the *breadcrumb* selects the entire element in the editor area. Also, each element provides a contextual menu with access to the following actions:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens an editing window that allows you to edit the attributes of the currently selected element.

Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

**Cut**

Removes the selected element and copies it to the clipboard.

**Copy**

Copies the selected element to the clipboard.

**Delete**

Deletes the currently selected element.

Quick Document Navigation Using Bookmarks

By using bookmarks, you can mark positions in an edited document so that you can return to it later. This is especially helpful for navigating through large documents or while editing multiple documents. You can place up to nine distinct bookmarks in any document. Shortcut keys are available to place the bookmarks or to return to any of the marked positions. To configure these shortcut keys, go to [Options > Menu Shortcut Keys](#).

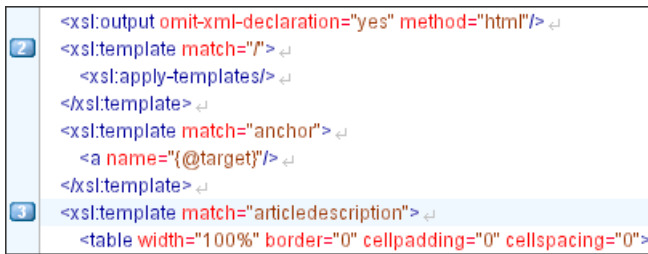


Figure 5: Editor Bookmarks

A bookmark can be inserted by one of the following:

- Right-click the vertical strip to the left of the editor.
- Select the **Create Bookmark (F9)** action from the **Edit > Bookmarks** menu.

A bookmark can be removed by right-clicking its icon on the vertical strip and select **Remove** or **Remove all (Ctrl+F7)** (you can also find the **Remove all (Ctrl+F7)** action in the **Edit > Bookmarks** menu).

You can navigate the bookmarks by using one of the actions available on the **Edit > Bookmarks > Go to** menu or by using the shortcut keys.

Text Mode Views

There is a large selection of useful views available in the **Window > Show View** menu. This section presents some of the most helpful views for editing in **Text** mode.

The Project View

The **Project** view is designed to assist you with organizing and managing related files grouped in the same XML project. The actions available on the contextual menu and toolbar associated to this panel enable the creation of XML projects and shortcuts to various operations on the project documents.

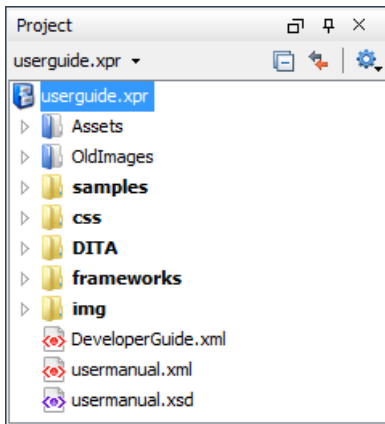


Figure 6: The Project View

By default, the **Project** view is positioned on the left side of the Oxygen XML Developer window, above the [Outline view](#). A closed view can be quickly reopened at any time with the **Project > Show Project View** menu action.

The tree structure occupies most of the view area. In the upper left side of the view, there is a drop-down menu that contains all recently used projects and project management actions:



Open Project (Ctrl F2 (Meta F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.



New Project

Creates a new, empty project.

The following actions are grouped in the upper right corner:



Collapse All

Collapses all project tree folders. You can also collapse/expand a project tree folder if you select it and press the **Enter** key or **Left Arrow** to collapse and **Right Arrow** to expand.



Link with Editor

When selected, the project tree highlights the currently edited file, if it is found in the project files.



Note: This button is disabled automatically when you move to the **Debugger** perspective.



Settings

A sub-menu that contains the following actions:



Filters

Allows you to filter the information displayed in the **Project** view. Click the toolbar button to set filter patterns for the files you want to show or hide. Also, you can set filter patterns for the linked directories that are hidden.

Show Full Path

When selected, linked files and folders are presented with a full file path.

Enable Master Files Support

Select this option to enable the [Master Files support](#).

Change Search and Refactor operations scope

Allows you to change the collection of documents that define the context of the [search and refactor operations](#).

- **Use only Master Files, if enabled** - Restricts Oxygen XML Developer to perform the search and refactor operations starting from the master files that are defined for the current resource. This option is available when you select **Project** in the **Select the scope for Search and Refactor operations** dialog box and the **Master Files** support is enabled.
- **Working sets** - Allow you to specify the set of files on which the search and refactor operations will act on.

The files are usually organized in an XML project as a collection of folders. There are three types of resources displayed in the **Project** view:

- *Logical folders* - marked with a blue icon on Windows and Unix/Linux (📁) and a magenta icon on Mac OS X (📁). They help you group files within the project. This folder type has no correspondent on the physical disk, since they are used as containers for related items. Creating and deleting them does not affect the file system on disk. They are created on the project root or inside other logical folders by using the contextual action **New > Logical Folder**. The contextual menu action ✖ **Remove from Project** can be used to remove them from the project.
- *Physical folders and files* - marked with the operating system-specific icon for folders (usually a yellow icon on Windows and a blue icon on Mac OS X). These folders and files are mirrors of real folders or files that exist in the local file system. They are created or added to the project by using contextual menu actions (such as **New > File**, **New > Folder**, **Add Folder**, etc.) Also, the contextual menu action 🗑 **Remove from Disk (Shift+Delete)** can be used to remove them from the project and local file system.
- *Shortcut folders and files* - the icons for file shortcuts include a shortcut symbol and names of folder shortcuts are displayed in bold text. All files and folders that appear as direct descendants of a logical folder are considered shortcuts. They are created and added with the contextual actions **Add Files** and **Add Folder** from the project root. Both contextual menu actions ✖ **Remove from Project** and 🗑 **Remove from Disk (Shift+Delete)** are available for shortcuts. ✖ **Remove from Project** just removes the shortcut from the project, while 🗑 **Remove from Disk (Shift+Delete)** removes the shortcut and the physical resource from the local file system.

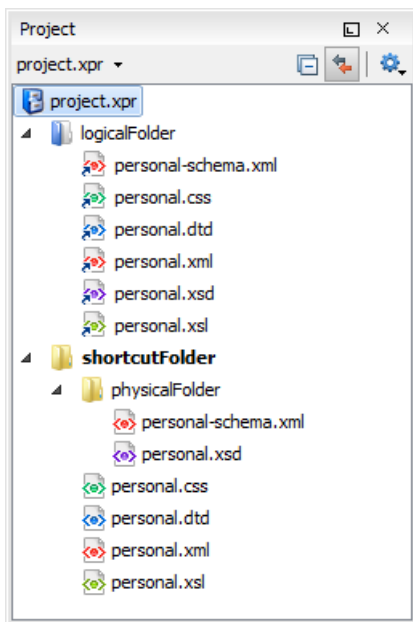


Figure 7: The Project View with Examples of all Three Types of Resources

Creating New Projects

The following action is available in the **Project** menu, the **New** menu in the contextual menu, or from the drop-down menu in the top-left of the **Project** view:

New Project

Creates a new, empty project.

Creating New Project Items

The following actions are available by selecting **New** from the contextual menu, when invoked from the **Project** view:

New > **File**

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New > **Folder**

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

New > **Logical Folder**

Available when invoked from the *project root*, this action creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > **Logical Folders from Web**

Available when invoked from the *project root*, this action replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Add Content to a Logical Folder

The project itself is considered a logical folder. You can add content to a logical folder using one of the actions available in the contextual menu, when invoked from the *project root*:

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X - ).

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Managing Project Content

Creating/Adding Files and Folders

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer / Mac OS X Finder to the project tree, or by selecting **Add Folder** in the contextual menu from the project root. To create a file inside a linked folder, select the **New >  File** action from the contextual menu.

 **Note:** The linked files presented in the **Project** view are marked with a special icon. Linked folders are displayed in bold text.

You can create physical folders by selecting **New > Folder** from the contextual menu.

When adding files to a project, the default target is the project root. To change a target, select a new folder. Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

Removing Files and Folders

To remove one or more linked files or folders, select them in the project tree and press the **Delete** key, or select the contextual menu action  **Remove from Project**. To remove a linked file or folder from both project and local file system, select the contextual menu action  **Remove from Disk (Shift+Delete)**. The  **Remove from Disk (Shift+Delete)** action is also used to remove physical files or folders.

 **Caution:** In most cases this action is irreversible, deleting the file permanently. Under particular circumstances (if you are running a Windows installation of Oxygen XML Developer and the *Recycle Bin* is active) the file is moved to *Recycle Bin*.

Moving Files and Folders

You can *move the resources of the project* with drag and drop operations on the files and folders of the tree.

You can also use the usual  **Cut**,  **Copy**, and  **Paste** actions to move resources in the **Project** view.

Renaming Files and Folders

There are three ways you can *rename an item in the Project view*. Select the item in the **Project** view and do one of the following:

- Invoke the **Rename** action from the contextual menu.
- Press **F2** and type the new name.
- Click the selected item and type the new name.

To finish editing the item name, press **Enter**.



Note: The **Rename** action is also available on *logical* files.

Locating and Opening Files

If a project folder contains a lot of documents, a certain document can be located quickly in the project tree by selecting the folder containing the desired document and typing the first few characters of the document name. The desired document is automatically selected as soon as the typed characters uniquely identify its name in the folder.

The selected document can be opened by pressing the **Enter** key, by double-clicking it, or with one of the **Open** actions from the contextual menu. The files with known document types are opened in the associated editor, while binary files are opened with the associated system application. To open a file with a known document type in an editor other than the default one, use the **Open with** action. Also, dragging and dropping files from the project tree to the editor area results in the files being opened.

Saving the Project

The project file is automatically saved every time the content of the **Project** view is saved or modified by actions such as adding or removing files and drag and drop.

Validate Files

The currently selected files in the **Project** view can be checked to be XML well-formed or validated against a schema (DTD, XML Schema, Relax NG, Schematron or NVDL) with one of the following contextual menu actions found in the **Validate** sub-menu:

Validate >  **Check Well-Formedness**

Checks if the selected file or files are well-formed.

Validate  **Validate**

Validates the selected file or files against their associated schema. EPUB files make an exception, because this action triggers a *Validate and Check for Completeness* operation.

Validate **Validate with Schema**

Validates the selected file or files against a specified schema.

Validate  **Configure Validation Scenario(s)**

Allows you to configure and run a *validation scenario*.

Applying Transformation Scenarios

The currently selected files in the **Project** view can be transformed in one step with one of the following actions available from contextual menu in the **Transform** sub-menu:

Transform >  **Apply Transformation Scenario(s)**

Obtains the output with one of the built-in scenarios.

Transform > Configure Transformation Scenario(s)

Opens a dialog box that allows you to configure pre-defined transformation scenarios.

Transform > Transform with

Allows you to select a transformation scenario to be applied to the currently selected files.

Along with the logical folder support, this allows you to group your files and transform them very easily.

Refactoring Actions (Available for certain document types (such as XML, XSD, and XSL))

Oxygen XML Developer includes some refactoring operations that help you manage the structure of your documents. The following actions are available from the contextual menu in the **Refactoring** sub-menu:

Refactoring > Rename resource

Allows you to change the name of a resource.

Refactoring > Move resource

Allows you to change the location on disk of a resource.

Refactoring > XML Refactoring

Opens [the XML Refactoring tool wizard](#) that presents refactoring operations to assist you with managing the structure of your XML documents.

Other Contextual Menu Actions

Other actions that are available in the contextual menu from the project tree include:

 Open

Opens the selected file in the editor.

Open with submenu

This submenu allows you to open the selected file with the internal editor, a system application, or other internal tools: [Archive Browser](#), [Generate/Convert Schema](#), [WSDL/SOAP Analyzer](#), [Large File Viewer](#), [Hex Viewer](#), [SVG Viewer](#).

Open All Files (when a folder or multiple resources are selected)

Opens all the selected files with the corresponding editors.

Show in Explorer (or Show in Finder on OS X)

In Windows, the content of the selected folder or file is presented in a specific explorer window. On MAC OS X, the parent folder is opened and the selected folder is highlighted in a specific finder window.

Copy Location

Copies an application-specific URL for the selected resource to the clipboard.

 Refresh

Refreshes the content and the dependencies between the resources in [the Master Files directory](#).

 Find/Replace in Files

Allows you to [find and replace text in multiple files](#).

//* XPath in Files

Opens the [XPath/XQuery Builder view](#) that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.

 Open/Find Resource

Opens the [Open/Find Resource dialog box](#).

 Check Spelling in Files

Allows you to [check the spelling of multiple files](#).

**Format and Indent Files**

Opens the *Format and Indent Files dialog box* that allows you to configure the format and indent (pretty print) action that will be applied on the selected documents.

**Open in SVN Client**

Syncro SVN Client tool is opened and it highlights the selected resource in its corresponding working copy.

Compare

Opens *the Compare Directories or Compare Files tool*.

Generate Documentation > XML Schema Documentation

Opens *the XML Schema Documentation Dialog Box*.

Generate Documentation > XSLT Stylesheet Documentation

Opens *the XSLT Stylesheet Documentation Dialog Box*.

Generate Documentation > XQuery Documentation

Opens *the XQuery Documentation Dialog Box*.

Generate Documentation > WSDL Documentation

Opens *the WSDL Documentation Dialog Box*.

**Properties**

Displays the properties of the current file in a **Properties** dialog box.

Menu Level Actions

The following actions are available in the **Project** menu:

**New Project**

Creates a new, empty project.

**Open Project (Ctrl F2 (Meta F2 on OS X))**

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Save Project As

Allows you to save the current project under a different name.

**Validate all project files**

Checks if the project files are well-formed and their mark-up conforms with the specified DTD, XML Schema, or Relax NG schema rules. It returns an error list in the message panel.

**Filters**

Opens the **Project filters** dialog box that allows you to decide which files and directories will be shown or hidden.

Enable Master Files Support

Allows you to enable the *Master Files Support* for each project you are working on.

**Change Search and Refactor operations scope**

Opens a dialog box that allows you to define the context of search and refactor operations.

Show Project View

Displays the project view.

Reopen Project

Contains a list of links of previously used projects. This list can be emptied by invoking the **Clear history** action.

The Open/Find Resource View

The **Open/Find Resource** view is designed to offer advanced search capabilities either by using a simple text search or by using the [Apache Lucene - Query Parser Syntax](#). To open this view, go to **Window > Show View > Open/Find Resource**. The view is presented in the left side of the default Oxygen XML Developer layout, next to the **Project** and **DITA Maps Manager** views.

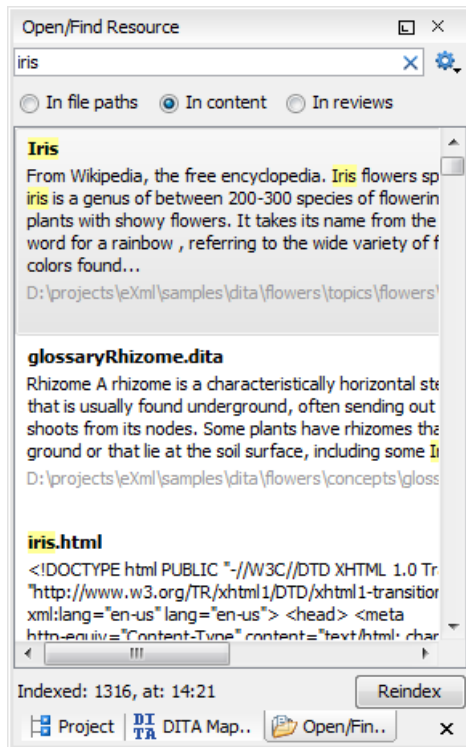


Figure 8: The Open/Find Resource View

You can use this view to find a file in the current Oxygen XML Developer project by typing only a few letters of the file name of a document or a fragment of the content you are searching for. The Open/Find Resource view also supports searching in document edits (comments, insertions, deletions, and highlighted content).



Note: Full support for searching in document edits is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers support to search through a maximum of 10 edits.

Search results are presented instantly, after you finish typing the content you are searching for. The matching fragments of text are highlighted in the results list displayed in the view. When you open one of the documents from the results list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document close the [Results view](#). To display the search history, position the cursor in the search field and press **Ctrl Down Arrow (Command Down Arrow on OS X)** or **Ctrl Up Arrow (Command Up Arrow on OS X)** on your keyboard. Pressing only the **Down Arrow** key moves the selection to the list of results.

A contextual menu available on each search result provides actions applicable to the document that contains it. These actions allow you to:

- Open the document in one of Oxygen XML Developer internal editors.
- Open the document in an external system application.
- Identify the document in the system file explorer.
- Copy the file's location.

The content of the resources used to search in is parsed from an index. The indexing is performed both automatically and on request.



Note: Automatic indexing is performed when you modify, add, or remove resources in the currently indexed project. If the index was never initialized, the index is not updated on project changes.



Note: To improve performance, the indexing process skips the following set of common English words (the so-called *stop words*): *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*. This means that if you are searching for any of these words, **Open/Find Resource** view will not be able to match any of them. However, you can configure the list of *stop words* in the [Open/Find Resources Preferences Page](#).



Note: Searches are case insensitive. For example, if you search for *car* you get the same results as when you search for *Car*.



Note: Suffix searches are supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search **in content** for **ing* you will find documents that contain the word *presenting*. If you search **in file paths** for **/samples/*.gif* you will find all the *gif* images from the *samples* directory.



Note: You can drag a resource from the **Open/Find Resource** view and drop it in a DocBook, DITA, TEI or XHTML document to create a link to that resource.

The **Open/Find Resource** view offers the following options:

- **Settings** - Displays settings for the view:
 - **Clear Index** - Clears the index.
 - **Show description** - Presents the search results in a more compact form, displaying only the title and the location of the resources.
 - **Options** - Opens the [Open/Find Resource preferences page](#).
- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, insertions, and deletion in your resources.
- **Reindex** - Reindexes your resources.

Outline View

The **Outline** view in **Text** mode displays a general tag overview of the currently edited XML Document. It also shows the correct hierarchical dependencies between elements. This makes it easier for you to be aware of the document structure and the way element tags are nested. It allows for fast navigation of the document by displaying the start of the content of the child elements in the node of the parent element, thus allowing you to quickly see the content of an element without expanding it in the **Outline** tree. It also allows you to insert or delete nodes using contextual menu actions.

By default it is displayed on screen, but if you closed it you can reopen it from **Window > Show View > Outline**.

The upper part of the view contains a filter box that allows you to focus on the relevant components. If you type a text fragment in the filter box, the components that match it are presented. For advanced usage you can use wildcards (*, ?) and separate multiple patterns with commas.

The Outline view offers the following functionality:

- [XML Document Overview](#) on page 68
- [Modification Follow-up](#) on page 68
- [Drag and Drop Actions in Outline View](#) on page 68
- [Outline Filters](#) on page 69
- [The Contextual Menu of the Outline View](#) on page 69
- [Document Tag Selection](#) on page 70

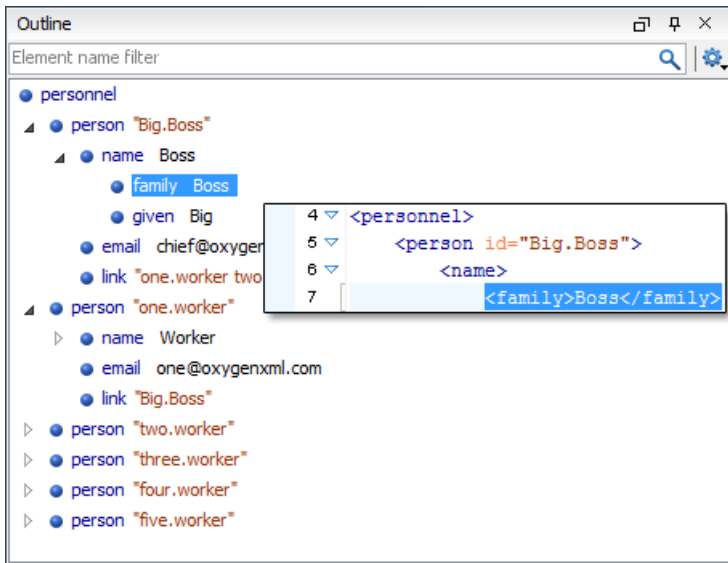


Figure 9: The Outline View

XML Document Overview

The **Outline** view displays a general tag overview of the current edited XML document. It also shows the correct hierarchical dependencies between the tag elements. This functionality makes it easier for you to be aware of the document structure and the way tags are nested.

The **Outline** view allows you to:

- Insert or delete nodes using contextual menu actions.
- Move elements by dragging them to a new position in the tree structure.
- Highlight elements in the **Author** editor area.



Note: The **Outline** view is synchronized with the **Author** editor area. When you make a selection in the **Author** editor area, the corresponding elements of the selection are highlighted in the **Outline** view and vice versa. This functionality is available both for single and multiple selection. To deselect one of the elements, use **Ctrl Single-Click (Command Single-Click on OS X)**.

Document errors (such as an element inserted in an invalid position, or a wrong attribute name, or a missing required attribute value) are highlighted in the **Outline** tree:

- A red exclamation mark decorates the element icon.
- A dotted red underline decorates the element name and value.
- A tooltip provides more information about the nature of the error, when you hover with the mouse pointer over the faulted element.

Modification Follow-up

When you edit a document, the **Outline** view dynamically follows the changes that you make, displaying the node that you modify in the middle of the view. This functionality gives you great insight on the location of your modifications in the document that you edit.

Drag and Drop Actions in Outline View

Entire XML elements can be moved or copied in the edited document using only the mouse in the **Outline** view with drag-and-drop operations. Several drag and drop actions are possible:

- If you drag an XML element in the **Outline** view and drop it on another one in the same panel then the dragged element will be moved after the drop target element.
- If you hold the mouse pointer over the drop target for a short time before the drop then the drop target element will be expanded first and the dragged element will be moved inside the drop target element after its opening tag.

- You can also drop an element before or after another element if you hold the mouse pointer towards the upper or lower part of the targeted element. A marker will indicate whether the drop will be performed before or after the target element.
- If you hold down the **(Ctrl (Command on OS X))** key after dragging, there will be performed a copy operation instead of a move one.

The drag and drop action in the **Outline** view can be *disabled and enabled from a Preferences page*.

Outline Filters

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

The following actions are available in the  **Settings** menu of the **Outline** view when editing in **Text** mode:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.



Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.



Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.



Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.



Show element name

Show/hide element name.



Show text

Show/hide additional text content for the displayed elements.



Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from *the Outline preferences panel*.



Configure displayed attributes

Displays the *XML Structured Outline preferences page*.

The Contextual Menu of the Outline View

The following actions are available from the contextual menu in the **Outline** view in **Text** mode:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

 Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Expand More**

Expands the structure of a component in the **Outline** view.

**Collapse All**

Collapses the structure of all the component in the **Outline** view.

Document Tag Selection

The Outline view can also be used to search for a specific tag location and contents in the edited document. Intuitively, by selecting with the left mouse button the desired tag in the Outline view, the document is scrolled to the position of the selected tag. Moreover, the tag contents are selected in the document, making it easy to notice the part of the document contained by that specific tag and furthermore to easily copy and paste the tag's contents in other parts of the document or in other documents.

You can double click the tag in the **Outline** tree to move the focus in the editor.

You can also use the filter text field search to look for a particular tag name in the **Outline** tree.

The Attributes View

The **Attributes** view presents all the attributes of the current element determined by the schema of the document.

You can use the **Attributes** view to insert attributes, edit their values, or add values to existing attributes.

The attributes are rendered differently depending on their state:

- The names of the attributes with a specified value are rendered with a bold font, and their value with a plain font.



Note: The names of the attributes with an empty string value are also rendered bold.

- Default values are rendered with a plain font, painted gray.
- Empty values display the text "[empty]", painted gray.
- Invalid attributes and values are painted red.

Double-click a cell in the **Value** column to edit the value of the corresponding attribute. If the possible values of the attribute are specified as `list` in the schema of the edited document, the **Value** column acts as a combo box that allows you to insert the values in the document.

You can sort the attributes table by clicking the **Attribute** column header. The table contents can be sorted as follows:

- By attribute name in ascending order.
- By attribute name in descending order.
- Custom order, where the used attributes are displayed at the beginning of the table sorted in ascending order, followed by the rest of the allowed elements sorted in ascending order.

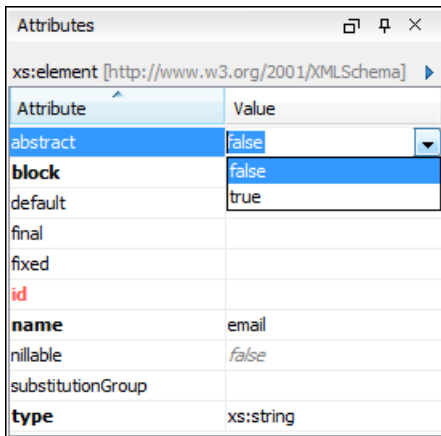


Figure 10: The Attributes View

Expand/Collapse Button

There is an  **Expand**/ **Collapse** button at the top-right of the view. When expanded, this presents the following additional combo boxes:

Name Combo Box

Use this combo box to select an attribute. The drop-down list displays the list of possible attributes allowed by the schema of the document, as in the **Attributes** view. You can use the  **Remove** button to delete an attribute and its value from the selected element.

Value Combo Box

Use this combo box to add, edit, or select the value of an attribute. If the selected attribute has predefined values in the schema, the drop-down list displays those possible values. You can use the  **Browse** button to select a URL for the value of an attribute. After you have entered or selected a value, use the  **Update** button (or press **Enter**) to add the value to the attribute.

Contextual Menu Actions in the Attributes View

The following actions are available in the contextual menu of the **Attributes** view when editing in **Text** mode:

Add

Allows you to insert a new attribute.

Set empty value

Specifies the current attribute value as empty.

Remove

Removes the attribute (action available only if the attribute is specified). You can invoke this action by pressing the **(Delete)** or **(Backspace)** keys.

Copy

Copies the `attrName="attrValue"` pair to the clipboard. The `attrValue` can be:

- The value of the attribute.
- The value of the default attribute, if the attribute does not appear in the edited document.
- Empty, if the attribute does not appear in the edited document and has no default value set.

Paste

Depending on the content of the clipboard, the following cases are possible:

- If the clipboard contains an attribute and its value, both of them are introduced in the **Attributes** view. The attribute is selected and its value is changed if they exist in the **Attributes** view.

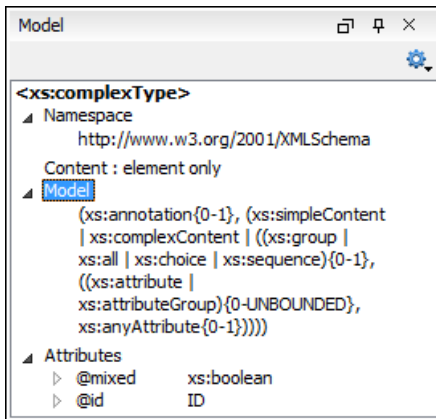


Figure 12: The Element Structure Panel

Annotation Panel

The **Annotation** panel displays the annotation information for the currently selected element. This information is collected from the XML schema.

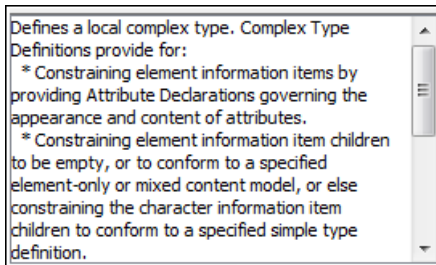


Figure 13: The Annotation panel

The Elements View


The **Elements** view presents a list of all defined elements that you can insert at the current cursor position according to the schema associated to the document. Double-clicking any of the listed elements inserts that element in the edited document. All elements from a sequence are presented but the invalid proposals (which cannot be inserted in the current context) are disabled and rendered in gray.



Figure 14: The Elements View

The Entities View

This view displays a list with all entities declared in the current document, as well as built-in ones. Double-clicking one of the entities will insert it at the current cursor position. You can also sort entities by name and value by clicking the column headers.

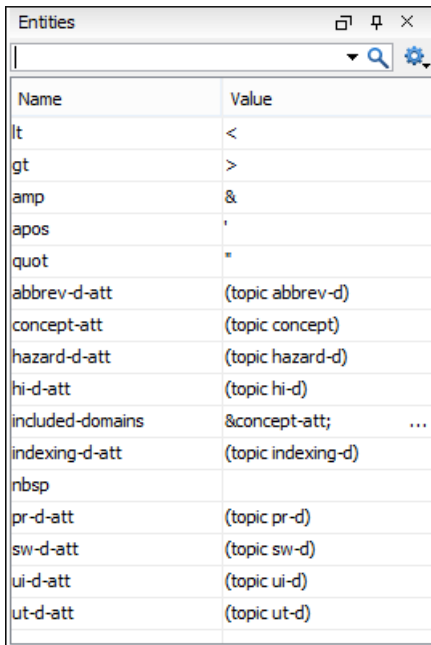

Name	Value
lt	<
gt	>
amp	&
apos	'
quot	"
abbrev-d-att	(topic abbrev-d)
concept-att	(topic concept)
hazard-d-att	(topic hazard-d)
hi-d-att	(topic hi-d)
included-domains	&concept-att; ...
indexing-d-att	(topic indexing-d)
nbsp	
pr-d-att	(topic pr-d)
sw-d-att	(topic sw-d)
ui-d-att	(topic ui-d)
ut-d-att	(topic ut-d)

Figure 15: The Entities View

The view features a filtering capability that allows you to search an entity by name, value, or both. Also, you can choose to display the internal or external entities.




Note: When entering filters, you can use the ? and * wildcards. Also, you can enter multiple filters by separating them with a comma.

The Results View

The **Results View** displays the messages generated as a result of user actions such as validations, transformations, search operations, and others. Each message is a link to the location related to the event that triggered the message. Double-clicking a message opens the file containing the location and positions the cursor at the location offset. The actions that can generate result messages include the following:

- [Validate action](#)
- [Transform action](#)
- [Check Spelling in Files action](#)
- **Find All** action from [the Find/Replace dialog box](#)
- [Find/Replace in Files dialog box](#)
- [Search References action](#)
- [XPath expression results](#)
- [SQL results](#)

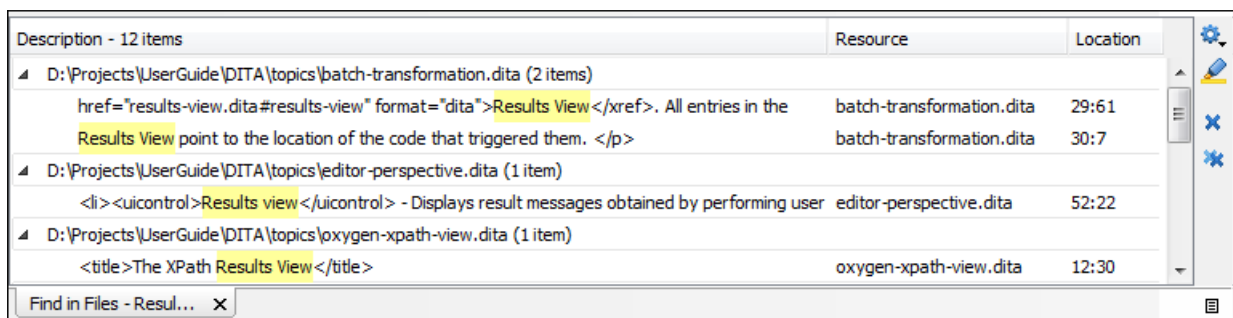

Description - 12 items	Resource	Location
D:\Projects\UserGuide\DITA\topics\batch-transformation.dita (2 items)		
href="results-view.dita#results-view" format="dita">Results View</xref>. All entries in the Results View point to the location of the code that triggered them. </p>	batch-transformation.dita	29:61
	batch-transformation.dita	30:7
D:\Projects\UserGuide\DITA\topics\editor-perspective.dita (1 item)		
<i><uicontrol>Results view</uicontrol> - Displays result messages obtained by performing user	editor-perspective.dita	52:22
D:\Projects\UserGuide\DITA\topics\oxygen-xpath-view.dita (1 item)		
<title>The XPath Results View</title>	oxygen-xpath-view.dita	12:30

Figure 16: Results View

Results View Toolbar Actions

The view includes a toolbar with the following actions:

Grouping options drop-down menu

A set of **Group by** toggle actions that allow you to group the messages according to a selected criteria so that they can be presented in a hierarchical layout. The criteria used for grouping can be the severity of the errors (error, warning, info message, etc.), the resource name, the description of the message, and so on.

This drop-down menu also includes the following additional grouping actions:

Ungroup all

Removes the grouping rules so that the messages are presented in a continuous list.

Show group columns

If any of the **Group by** options are selected, you can use this option to show or hide grouping columns.

Restore Defaults

Restores the column size for each column and the grouping rules that were saved in the user preferences the last time when this view was used. If it is the first time this view is used, the action sets an initial default column size for each column and a grouping rule that is appropriate for the type of messages. For example:

- Group the messages by the path of the validated file if there are error messages from a validation action or spelling errors reported by the **Check Spelling in Files** action.
- No grouping rule for the results of *applying an XPath expression*.

Highlight all results in editor

Oxygen XML Developer highlights all matches obtained after executing an XPath expression, or performing one of the following operations: **Find All**, **Find in Files**, **Search References**, and **Search Declarations**. Click **Highlight all results in editor** again to turn off highlighting.

 **Note:** To customize highlighting behavior, *open the Preferences dialog box* and go to **Editor > Highlights category**. You can do the following customizations:

- Set a specific color of the highlights depending on the type of action you make.
- Set a maximum number of highlights that the application displays at any given time.

Remove selected

Removes the current selection from the view. This can be helpful if you want to reduce the number of messages or remove those that have already been addressed or not relevant to your task.

Remove all

Removes all messages from the view.

Results View Contextual Menu Actions

The following actions are available when the contextual menu is invoked in the table grid:

Show message

Displays a dialog box with the full error message, which is useful for a long message that does not have enough room to be displayed completely in the view.

Previous message

Navigates to the message above the current selection.

Next message

Navigates to the message below the current selection.

Remove selected

Removes selected messages from the view.

Remove all

Removes all messages from the view.

**Copy**

Copies the information associated with the selected messages:

- The file path of the document that triggered the output message.
- The path of the main file (in the case of a *validation scenario*, it is the path of the file from which the validation starts and can be different from the validated file).
- Error severity (error, warning, info message, etc.)
- Name of validating processor.
- Name of *validation scenario*.
- The line and column in the file that triggered the message.

Select All

Extends the selection to all the messages from the view.

Print Results

Sends the complete list of messages to a printer. For each message the included details are the same as the ones for *the Copy action*.

Save Results

Saves the complete list of messages in a file in text format. For each message the included details are the same as the ones for *the Copy action*.

Save Results as XML

Saves the complete list of messages in a file in XML format. For each message the included details are the same as the ones for *the Copy action*.

Group by

A set of **Group by** toggle actions that allow you to group the messages according to a selected criteria so that they can be presented in a hierarchical layout. The criteria used for grouping can be the severity of the errors (error, warning, info message, etc.), the resource name, the description of the message, and so on.

**Ungroup all**

Removes the grouping rules so that the messages are presented in a continuous list.

Show group columns

If any of the **Group by** options are selected, you can use this option to show or hide grouping columns.

Restore Defaults

Restores the column size for each column and the grouping rules that were saved in the user preferences the last time when this view was used. If it is the first time this view is used, the action sets an initial default column size for each column and a grouping rule that is appropriate for the type of messages. For example:

- Group the messages by the path of the validated file if there are error messages from a validation action or spelling errors reported by the **Check Spelling in Files** action.
- No grouping rule for the results of *applying an XPath expression*.

**Expand All**

Expands all the nodes of the tree, which is useful when the messages are presented in a hierarchical mode.

**Collapse All**

Collapses all the nodes of the tree, which is useful when the messages are presented in a hierarchical mode.

Window > Results Menu

The following actions are also available from the **Window > Results** menu:

Save Results

Saves the complete list of messages in a file in text format.

Print Results

Sends the complete list of messages to a printer.

Close

Closes the current tab.

Close All Tabs

Closes all opened tabs.

Close Other Tabs

Closes all other opened tabs, other than the current one.

Syntax Highlight Depending on Namespace Prefix

The [syntax highlight scheme of an XML file type](#) allows the configuration of a color per each type of token that can appear in an XML file. Distinguishing between the XML tag tokens based on the namespace prefix brings additional visual help in editing some XML file types. For example, in XSLT stylesheets, elements from different namespaces (such as XSLT, XHTML, XSL:FO, or XForms) are inserted in the same document and the editor panel can become cluttered. [Marking tags with different colors based on the namespace prefix](#) allows easier identification of the tags.

```

3 <xsl:template match='name'>
4   <fo:list-item>
5     <fo:list-item-label end-indent='label-end()'>
6       <fo:block text-align='end' font-weight='bold'>Full Name</fo:block>
7     </fo:list-item-label>
8     <fo:list-item-body start-indent='body-start()'>
9       <xsl:apply-templates select='*' />
10    </fo:list-item-body>
11  </fo:list-item>
12 </xsl:template>

```

Figure 17: Example of Coloring XML Tags by Prefix

Presenting Validation Errors in Text Mode

A line with a validation error or warning will be marked in the editor panel by underlining the error region with a red color. Also a red sign will mark the position in the document of that line on the right side ruler of the editor panel. The same will happen for a validation warning, but the color will be yellow instead of red. Hovering over a validation error presents a tooltip message with more details about the error and [possible quick fixes](#) (if available for that error or warning).

The ruler on the right side of the document is designed to display the errors and warnings found during the validation process and also to help you to locate them more easily. The ruler contains the following areas:

- Top area that contains a success validation indicator that will turn green if the validation succeeded, or red otherwise. A more detailed report of the errors is displayed in the tooltip of the validation indicator. If there are multiple errors, only the first three of them will be presented in the tooltip.

- Middle area where the error markers are depicted in red (with a darker color tone for the current selected one). To limit the number of markers shown [open the Preferences dialog box](#) and go to **Editor > Document checking > Maximum number of problems reported per document**.

Clicking a marker will highlight the corresponding text area in the editor. The error message is displayed both in the tool tip and in the error area on the bottom of the editor panel.

The [Document checking user preferences](#) are easily accessible from the button displayed at the beginning of the error message on the bottom of the editor panel.

- Bottom area containing two navigation arrows that will go to the next or to the previous error and a button for clearing all the error markers from the ruler. The same actions can be triggered from menu **Document > Automatic validation > Next Error Ctrl Period (Meta Period on OS X)** and **Document > Automatic validation > Previous Error Ctrl Comma (Meta Comma on OS X)**.

The validation status area is the line at the bottom of the editor panel that presents the message of the current validation error selected on the right side ruler. Clicking the **Document checking options** button opens the [document checking](#) page in Oxygen XML Developer user preferences.

Status messages from every validation action are logged into the [Information view](#).

If you want to see all the validation error messages [grouped in a view](#) you should use the  **Validate** action from the **Document > Validate** menu or from the  ▾ **Validation** toolbar drop-down menu. This action collects all error messages in the **Errors** view.

Bidirectional Text Support in Text Mode

Bidirectional documents contain text in both directions, usually involving characters from unique types of alphabets.

If bidirectional text (such as Arabic or Hebrew languages), certain Asian languages (such as Devanagari, Bengali, Gurmukhi, Gujarati, Oriya, Tamil, Telugu, Kannada, Malayalam, Sinhala, Thai, Khmer), or other special characters (such as combining characters) are detected in a document, Oxygen XML Developer displays a **Special Characters Detected** dialog box that prompts you to **Enable** or **Disable** support for these special characters.

You can also configure this support in the **Support for Special Characters** section of the **Open/Save** preferences page. To enable or disable this support, [open the Preferences dialog box](#) and go to **Editor > Open/Save**.

 **Note:** Disabling this support may affect text rendering, cursor positioning and navigation, as well as text selection and management operations. If you need to open [very large documents](#), the bidirectional editing support can also be disabled to enhance performance while editing.

 **Restriction:** Bidirectional content in the **Text** mode cannot be rendered using **Bold** or **Italic**.

Grid Editing Mode

The **Grid** editing mode in Oxygen XML Developer displays XML documents in a structured spreadsheet-like grid. It allows you to easily edit XML documents consisting of repetitive patterns.

Grid Mode Editor

The Oxygen XML Developer **Grid** editor displays the XML document as a structured grid of nested tables. To activate this mode, select **Grid** at the bottom of the editing area.

If you are a non-technical user, you are able to modify the text content of the edited document without working with the XML tags directly. You can expand and collapse the tables using the mouse cursor and also display or hide the elements of the document as nested. The document structure can also be changed easily with drag and drop operations on the grid components. To zoom in and out, use **Ctrl + [plus sign] (Command + [plus sign] on OS X)**, **Ctrl - [minus sign] (Command - on OS X)**, **Ctrl 0 (Command 0 on OS X)** or **Ctrl Scroll Forward (Command Scroll Forward on OS X) / Ctrl Scroll Backwards (Command Scroll Backwards on OS X)**.

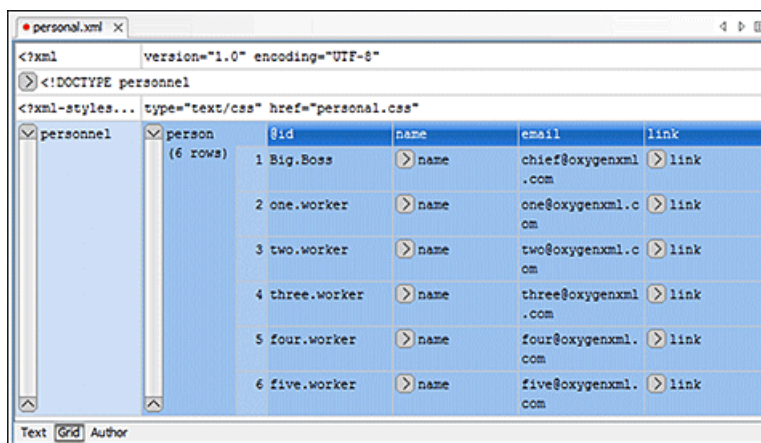


Figure 18: The Grid Editor

To switch back from the **Grid** mode to the **Text** or **Author** mode, use the **Text** and **Grid** buttons from the bottom of the editor. You are also able to perform this switch from **Document > Edit Mode > Grid** and **Document > Edit Mode > Text**.

If the edited document is associated with a schema (DTD, XML Schema, Relax NG, etc.), the editor offers **Content Completion Assistant** for the elements and attributes names and values. If you choose to insert an element that has required content, the sub-tree of needed elements and attributes are automatically included.

To display the content completion pop-up menu, you have to start editing (for example, double click a cell). Pressing **Ctrl Space (Command Space on OS X)** on your keyboard also displays the pop-up menu.

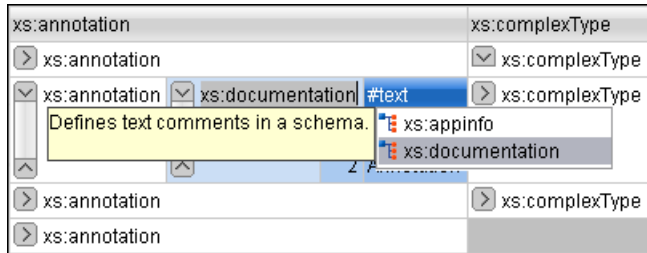


Figure 19: Content Completion in Grid Editor

To watch our video demonstration about some of the features available in the **Grid** editor, go to http://oxygenxml.com/demo/Grid_Editor.html.

Layouts: Grid and Tree

The **Grid** editor offers two layout modes. The default one is the grid layout. This smart layout detects the recurring elements in the XML document and creates tables having the children (including the attributes) of these elements as columns. This way, it is possible to have tables nested in other tables, reflecting the structure of your document.

<?xml version="1.0" encoding="UTF-8"					
test	table	tr	@id	first	last
		(3 rows)	1	10001	Jhon Doe
			2	10002	Mark Ewing
			3	10003	Dave Flint

Figure 20: Grid Layout

The other layout mode is tree-like. It does not create any tables and it only presents the structure of the document.

<?xml version="1.0" encoding="UTF-8"					
test	table	tr	@id	10001	
			first	Jhon	
			last	Doe	
		tr	@id	10002	
			first	Mark	
			last	Ewing	
		tr	@id	10003	
			first	Dave	
			last	Flint	

Figure 21: Tree Layout

To switch between the two modes, go to **Document > Grid Layout > Grid mode/Tree mode**.

Grid Mode Navigation

At first, the content of a document opened in the **Grid** mode is collapsed. Only the root element and its attributes are displayed. The grid disposition of the node names and values is similar to a web form or dialog box. The same set of key shortcuts used to select dialog box components is also available in the **Grid** mode:

Table 2: Shortcuts in the Grid Mode

Key	Action
<u>Tab</u>	Moves the cursor to the next editable value in a table row.
<u>Shift Tab</u>	Moves the cursor to the previous editable value in a table row.
<u>Enter</u>	Begins editing and lets you insert a new value. Also commits the changes after you finish editing.
<u>Up Arrow/Page Up</u>	Navigates toward the beginning of the document.
<u>Down Arrow/Page Down</u>	Navigates toward the end of the document.
<u>Shift</u>	Used in conjunction with the navigation keys to create a continuous selection area.
<u>Ctrl (Command on OS X) key</u>	Used in conjunction with the mouse cursor to create discontinuous selection areas.

The following key combinations can be used to scroll the grid:

- **Ctrl Up Arrow (Command Up Arrow on OS X)** - scrolls the grid upwards.
- **Ctrl Down Arrow (Command Down Arrow on OS X)** - scrolls the grid downwards.
- **Ctrl Left Arrow (Command Left Arrow on OS X)** scrolls the grid to the left.
- **Ctrl Right Arrow (Command Right Arrow on OS X)** scrolls the grid to the right.

An arrow sign displayed at the left of the node name indicates that this node has child nodes. To display the children, click this sign. The expand/collapse actions can be invoked either with the **NumPad+** and **NumPad-** keys, or from the **Expand/Collapse** submenu of the contextual menu or from **Document > Grid Expand/Collapse**.

The following actions are available on the **Expand/Collapse** menu:



Expand All

Expands the selection and all its children.



Collapse All

Collapses the selection and all its children.

Expand Children

Expands all the children of the selection but not the selection.

Collapse Children

Collapses all the children of the selection but not the selection.

Collapse Others

Collapses all the siblings of the current selection but not the selection.

Bidirectional Text Support in Grid Mode

If you are editing documents employing a different text orientation, you can change the way the text is rendered and edited in the grid cells by using the **Change Text Orientation(Ctrl Shift O (Meta Shift O on OS X))** action that is available from the **Edit** menu in the **Grid** editing mode. Use this action to switch from the default left to right text orientation to the right to left orientation, and vice versa.



Note: This change applies only to the text from the cells, and not to the layout of the grid editor.

<?xml	version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	世界的に話すなら、Unicode です。
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 22: Default left to right text orientation

<?xml	"version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	。世界的に話すなら、Unicode です
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 23: Right to left text orientation

Design Editing Mode

This section presents the **Design** mode that allows you to edit XML Schemas in a visual schema diagram editor.

XML Schema Diagram Editor (Design Mode)

XML Schemas enable document designers to specify the allowed structure and content of an XML document and to check if an XML document is valid.

Oxygen XML Developer provides a simple and expressive XML Schema diagram editor (**Design** mode) for editing XML Schemas. The schema diagram helps both the content authors who want to understand a schema and schema designers who develop complex schemas.

The diagram font can be increased using the usual Oxygen XML Developer shortcuts: **(Ctrl (Meta on Mac OS) + "+")** , **(Ctrl (Meta on Mac OS) + "-")** , **(Ctrl (Meta on Mac OS) + 0)** or **(Ctrl (Meta on Mac OS) - mouse wheel)**. The whole diagram can also be zoomed with one of the predefined factors [available in the Schema preferences panel](#). The same zoom factor is applied for the print and save actions.

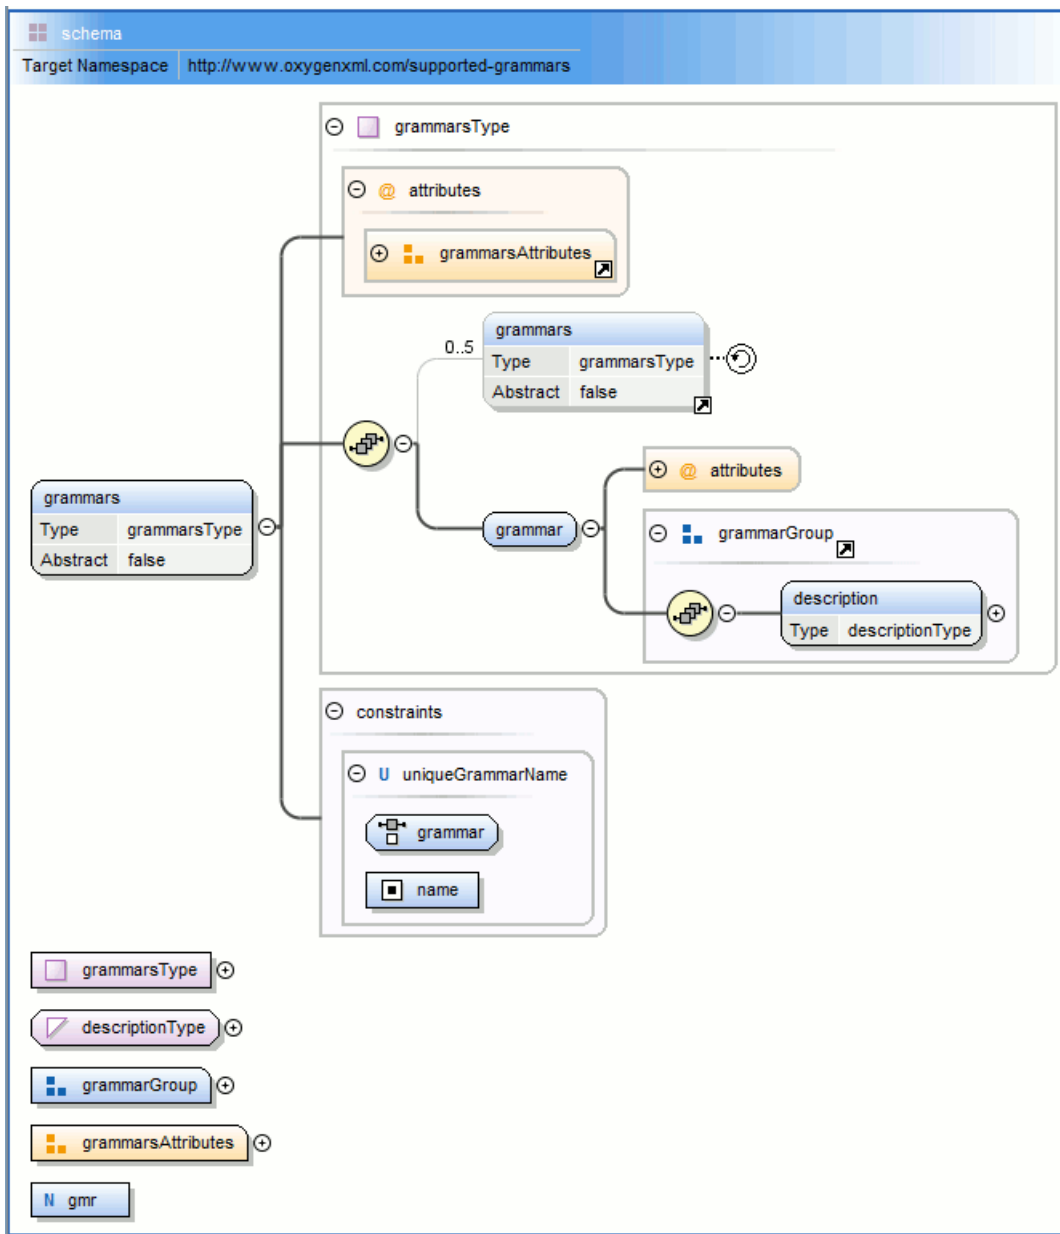


Figure 24: XML Schema Diagram

To watch our video demonstration about the basic aspects of designing an XML Schema using the new Schema Editor, go to http://oxygenxml.com/demo/XML_Schema_Editing.html.


Navigation in the Schema Diagram

The following editing and navigation features work for all types of schema components:

- Move/reference components in the diagram using drag-and-drop actions.
- Select consecutive components on the diagram (components from the same level) using the *Shift* key. You can also make discontinuous selections in the schema diagram using the **Ctrl (Meta on Mac OS)** key. To deselect one of the components, use **Ctrl Single-Click (Command Single-Click on OS X)**.
- Use the arrow keys to navigate the diagram vertically and horizontally.
- Use *Home/End* keys to jump to the first/last component from the same level. Use **Ctrl Home (Command Home on OS X)** key combination to go to the diagram root and **Ctrl End (Command End on OS X)** to go to the last child of the selected component.

- You can easily go back to a previously visited component while moving from left to right. The path will be preserved only if you use the left arrow key or right arrow key. For example, if the current selection is on the second attribute from an attribute group and you press the left arrow key to jump to the attribute group, when you press the right arrow key, then the selection will be moved to the second attribute.
 - Go back and forward between components viewed or edited in the diagram by selecting them in the **Outline** view:
 -  **Back** (go to previous schema component).
 -  **Forward** (go to next schema component).
 -  **Go to Last Modification** (go to last modified schema component).
 - Copy, reference, or move global components, attributes, and identity constraints to a different position and from one schema to another using the **Cut/Copy** and **Paste/Paste as Reference** actions.
 - Go to the definition of an element or attribute with the **Show Definition** action.
 - Search in the diagram using the [Find/Replace dialog box](#) or the [Quick find toolbar](#). You can find/replace components only in the current file scope.
 - You can expand and see the contents of the imports/includes/redefines in the diagram. In order to edit components from other schemas the schema for each component will be opened as a separate file in Oxygen XML Developer.
-  **Tip:** If an XML Schema referenced by the current opened schema was modified on disk, the change will be detected and you will be asked to refresh the current schema contents.

- Recursive references are marked with a *recurse symbol*: . Click this symbol to navigate between the element declaration and its reference.



XML Schema Outline View

The **Outline** view for XML Schema presents all the global components grouped by their location, namespace, or type. If hidden, you can open it from **Window > Show View > Outline**.

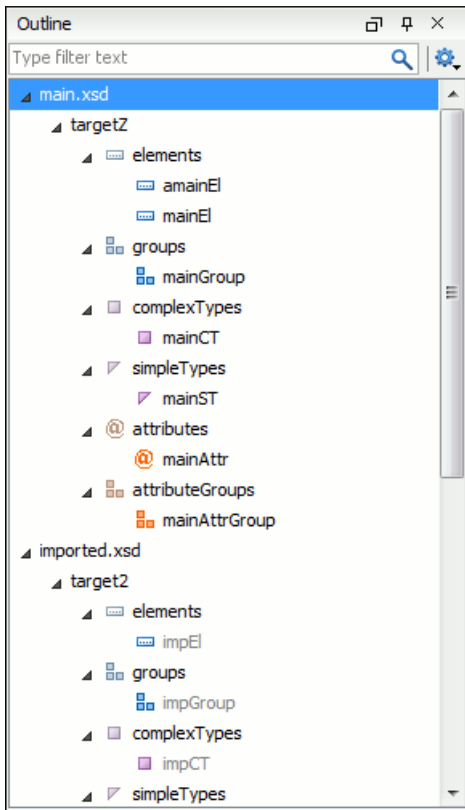


Figure 25: The Outline View for XML Schema

The **Outline** view provides the following options in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;



Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram is also selected in the **Outline** view.



Sort

Allows you to sort alphabetically the schema components.

Show all components

Displays all components that were collected starting from the main files. Components that are not referable from the current file are marked with an orange underline. To reference them, add an import directive with the component's namespace.

Show referable components

Displays all components (collected starting from the main files) that can be referenced from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

These three operations allow you to group the components by location, namespace, or type. When grouping by namespace, the main schema target namespace is the first presented in the **Outline** view.

The following contextual menu actions are available in the **Outline** view:

Remove (Delete)

Removes the selected item from the diagram.

**Search References (Ctrl (Meta on Mac OS)+Shift+R)**

Searches all references of the item found at current cursor position in the defined scope, if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

**Component Dependencies (Ctrl (Meta on Mac OS)+Shift+F4)**

Allows you to see the dependencies for the current selected component.

Resource Hierarchy (F4)

Allows you to see the hierarchy for the current selected resource.

Resource Dependencies (Shift + F4)

Allows you to see the dependencies for the current selected resource.

**Rename Component in**

Renames the selected component.

**Generate Sample XML Files**

Generate XML files using the current opened schema. The selected component is the XML document root.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search will be searched as a partial match (like *textToFind*).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

The Attributes View

The **Attributes** view presents the properties for the selected component in the schema diagram. If hidden, you can open it from **Window > Show View > Attributes**.

Name	Value
family	
Type	[ST - union]
Member Types	
Member	xs:string
Default	
Fixed	
Substitution Group	
Abstract	false
Nillable	false
Block	
Final	
ID	
Component	element
Namespace	
System ID	personal.xsd

Figure 26: The Attributes View

The default value of a property is presented in the **Attributes** view with blue foreground. The properties that can not be edited are rendered with gray foreground. A non-editable category which contains at least one child is rendered with bold. Bold properties are properties with values set explicitly to them.

Properties for components which do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a property by double-clicking by pressing Enter. For most properties you can choose valid values from a list or you can specify another value. If a property has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default properties with errors are highlighted with red and the properties with warnings are highlighted with yellow. You can customize these colors from the [Document checking user preferences](#).

For imports, includes and redefines, the properties are not edited directly in the **Attributes** view. A dialog box will open that allows you to specify properties for them.

The schema namespace mappings are not presented in **Attributes** view. You can view/edit these by choosing **Edit Schema Namespaces** from the contextual menu on the schema root. See more in the [Edit Schema Namespaces](#) section.

The **Attributes** view has five actions available on the toolbar and also on the contextual menu:

+ Add

Allows you to add a new member type to an union's member types category.

✕ Remove

Allows you to remove the value of a property.

↑ Move Up

Allows you to move up the current member to an union's member types category.

↓ Move Down

Allows you to move down the current member to an union's member types category.



Copy

Copy the attribute value.



Show Definition Ctrl (Meta on MAC OS) + Click

Shows the definition for the selected type.

Show Facets

Allows you to edit the facets for a simple type.

The Facets View

The **Facets** view presents the facets for the selected component, if available. If hidden, you can open it from **Window > Show View > Facets**.

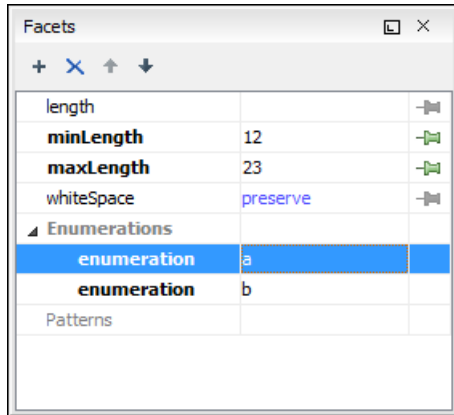


Figure 27: The Facets View

The default value of a facet is rendered in the **Facets** view with a blue color. The facets that can not be edited are rendered with a gray color. The grouping categories (for example: **Enumerations** and **Patterns**) are not editable. If these categories contain at least one child they are rendered with bold. Bold facets are facets with values set explicitly to them.



Important: Usually inherited facets are presented as default in the **Facets** view but if patterns are inherited from a base type and also specified in the current simple type only the current specified patterns will be presented. You can see the effective pattern value obtained by combining the inherited and the specified patterns as a tooltip on the **Patterns** category.

Facets for components which do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a facet by double-clicking it or by pressing Enter, when that facet is selected. For some facets you can choose valid values from a list or you can specify another value. If a facet has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default facets with errors are presented with red and the facets with warnings with yellow. You can customize the error colors from the [Document Checking user preferences](#).

The **Facets** view provides the following actions in its toolbar and contextual menu:



Add

Allows you to add a new enumeration or a new pattern.



Remove

Allows you to remove the value of a facet.

Edit Annotations

Allows you to edit an annotation for the selected facet.



Move Up

Allows you to move up the current enumeration/pattern in **Enumerations/Patterns** category.



Move Down

Allows you to move down the current enumeration/pattern in **Enumerations/Patterns** category.



Copy

Copy the attribute value.

Open in Regular Expressions Builder

Rather than editing regular expressions manually, this action allows you to open the pattern in the [XML Schema Regular Expressions Builder](#) that guides you through the process of testing and constructing the pattern..

Facets can be fixed to prevent a derivation from modifying its value. To fix a facet value just press the  **Pin** button.

The Palette View

The **Palette** view is designed to offer quick access to XML Schema components and to improve the usability of the XML Schema diagram builder. You can use the **Palette** to drag and drop components in the **Design** mode. The components offered in the **Palette** view depend on the XML schema version set in the [XML Schema preferences page](#).

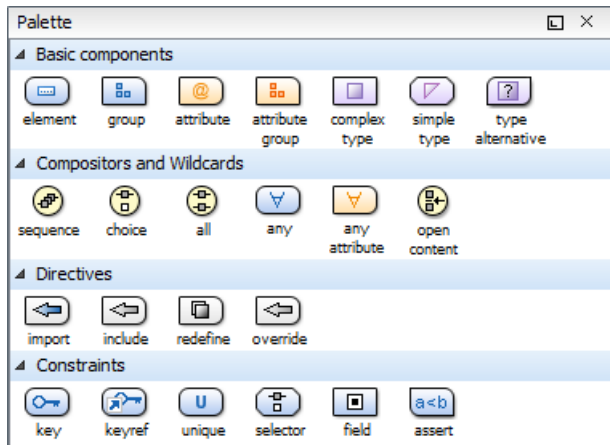


Figure 28: Palette View

Components are organized functionally into 4 collapsible categories:

- Basic components: *elements*, *group*, *attribute*, *attribute group*, *complex type*, *simple type*, *type alternative*.
- Compositors and Wildcards: *sequence*, *choice*, *all*, *any*, *any attribute*, *open content*.
- Directives: *import*, *include*, *redefine*, *override*.
- Identity constraints: *key*, *keyref*, *unique*, *selector*, *field*, *assert*.



Note: The *type alternative*, *open content*, *override*, and *assert* components are available for XML Schema 1.1.

To add a component to the edited schema:

- Click and hold a graphic symbol from the **Palette** view, then drag the component into the **Design** view.
- A line dynamically connects the component with the XML schema structure.
- Release the component into a valid position.



Note: You cannot drop a component into an invalid position. When you hover the component into an invalid position, the mouse cursor changes its shape into . Also, the connector line changes its color from the usual dark gray to the color defined in the [Validation error highlight color](#) option (default color is red).

To watch our video demonstration about the Schema palette and developing XML Schemas, go to http://oxygenxml.com/demo/Schema_Palette.html and http://oxygenxml.com/demo/Developing_XML_Schemas.html respectively.

Chapter

6

Editing Documents

Topics:

- [*Working with Unicode*](#)
- [*Creating and Working with Documents*](#)
- [*Using Projects to Group Documents*](#)
- [*Editing XML Documents*](#)
- [*Editing XSLT Stylesheets*](#)
- [*Editing Ant Build Files*](#)
- [*Editing XML Schemas*](#)
- [*Editing XQuery Documents*](#)
- [*Editing WSDL Documents*](#)
- [*Editing CSS Stylesheets*](#)
- [*Editing LESS CSS Stylesheets*](#)
- [*Editing Relax NG Schemas*](#)
- [*Editing NVDL Schemas*](#)
- [*Editing JSON Documents*](#)
- [*Editing StratML Documents*](#)
- [*Editing XLIFF Documents*](#)
- [*Editing JavaScript Documents*](#)
- [*Editing XProc Scripts*](#)
- [*Editing Schematron Schemas*](#)
- [*Editing Schematron Quick Fixes*](#)
- [*Editing SVG Documents*](#)
- [*Editing XHTML Documents*](#)
- [*Spell Checking*](#)
- [*Loading Large Documents*](#)
- [*Scratch Buffer*](#)
- [*Handling Read-Only Files*](#)
- [*Editing Documents with Long Lines*](#)
- [*Associating a File Extension with Oxygen XML Developer*](#)

This chapter explains the editor types available in Oxygen XML Developer and how to work with them for editing different types of documents.

Working with Unicode

Unicode provides a unique number for every character, independent of the platform and language. Unicode is an internationally recognized standard, adopted by industry leaders. The Unicode is required by modern standards (such as XML, Java, JavaScript, LDAP, CORBA 3.0, WML, etc.) and is the official way to implement ISO/IEC 10646.

It is supported in many operating systems, all modern browsers, and many other products. The emergence of the Unicode Standard, and the availability of tools supporting it, are among the most significant recent global software technology trends. Incorporating Unicode into client-server or multiple tiered applications and websites offers significant cost savings over the use of legacy character sets.

As a modern XML Editor, Oxygen XML Developer provides support for the Unicode standard enabling your XML application to be targeted across multiple platforms, languages, and countries without re-engineering. Internally, the Oxygen XML Developer XML Editor uses 16 bit characters covering the Unicode Character set.



Note: Oxygen XML Developer may not be able to display characters that are not supported by the operating system (either not installed or unavailable).



Tip: On windows, you can enable the support for **CJK** (Chinese, Japanese, Korean) languages from **Control Panel / Regional and Language Options / Languages / Install files for East Asian languages**.

Opening and Saving Unicode Documents

When loading documents, Oxygen XML Developer reads the document prolog to determine the specified encoding type. This encoding is then used to instruct the Java Encoder to load support for and to save the document using the specified code chart. When the encoding type cannot be determined, Oxygen XML Developer prompts and display the **Available Java Encodings** dialog box that provides a list of all encodings supported by the Java platform.

If the opened document contains an unsupported character, Oxygen XML Developer applies [the policy specified for handling such errors](#). If the policy is set to REPORT, Oxygen XML Developer displays an error dialog box with a message about the character not allowed by the encoding. If the policy is set to IGNORE, the character is removed from the document displayed in the editor panel. If the policy is set to REPLACE, the character is replaced with a standard replacement character for that encoding.

While in most cases you are using UTF-8, simply changing the encoding name causes the application to save the file using the new encoding.

When saving a document edited in the **Text**, **Grid**, or **Design** modes, if it contains characters not included in the encoding declared in the document prolog, Oxygen XML Developer detects the problem and signals it to the user. The user is responsible to resolve the conflict before saving the document.

To edit documents written in Japanese or Chinese, change the font to one that supports the specific characters (a Unicode font). For the Windows platform, *Arial Unicode MS* or *MS Gothic* is recommended. Do not expect *WordPad* or *Notepad* to handle these encodings. Use *Internet Explorer* or *Word* to examine XML documents.

When a document with a UTF-16 encoding is edited and saved in Oxygen XML Developer, the saved document has a byte order mark (BOM) which specifies the byte order of the document content. The default byte order is platform-dependent. That means that a UTF-16 document created on a Windows platform (where the default byte order mark is *UnicodeLittle*) has a different BOM than a UTF-16 document created on a Mac OS platform (where the byte order mark is *UnicodeBig*). The byte order and the BOM of an existing document are preserved when the document is edited and saved.

Inserting Symbols

You can insert symbols by using the **Character Map** dialog box that can be opened with the **Edit >  Insert from Character Map** action. If you have [enabled the Symbols toolbar](#), you can also use the  **Symbols** drop-down menu to insert some of the most commonly used symbols and selecting **More symbols** from that menu will also open the **Character Map** dialog box.

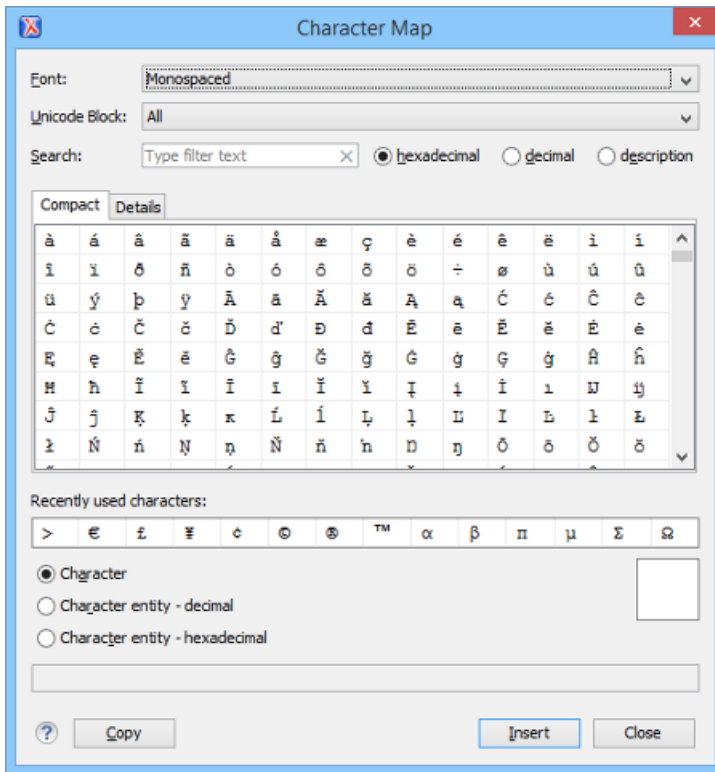


Figure 29: The Character Map Dialog Box

The **Character Map** dialog box allows you to visualize all characters that are available in a particular font, pick the character you need, and insert it in the document you are editing. It includes the following fields and sections:

Font

Use this drop-down list to choose the font for which you want to display characters.

Unicode Block

Use this drop-down list to only see a certain range of characters. This will filter the number of characters displayed, showing only a contiguous range of characters corresponding to the selected block. Unassigned characters are displayed as empty squares.

Search

Use this filter to search for a character by one of the following attributes:

- **hexadecimal**
- **decimal**
- **description**



Note: Selecting the **description** option opens the **Details** tab. If you enter a character description in the **Search** field, the **description** option is selected automatically.

Character Table Section

The characters that are available to be inserted are listed in two tabs:

- **Compact** - Matrix-like table that displays a visual representation of the characters.
- **Details** - Displays the available characters in a tabular format, presenting their decimal and hexadecimal value along with their description.

Recently Used Characters Section

Displays the symbols that you have used recently and you can also select one from there to insert it in the current document.

Character Mode Section

The next section of the dialog box allows you to select how you want the character to appear in your document. You can choose between the following:

- **Character**
- **Character entity - decimal**
- **Character entity - hexadecimal**

You can see the character or code that will be inserted in your document next to the selections in this section. You can also see the name and range name of a character either at the bottom of the dialog box, or in a tooltip when hovering the cursor over the character.

Press the **Insert** button to insert the selected character in the current editor at cursor position. You will see the character in the editor if *the editor font* is able to render it. The **Copy** button copies it to the clipboard without inserting it in the editor.



Note: The **Character Map** dialog box cannot be used to insert Unicode characters in *the Grid editor*. Accordingly, the **Insert** button of the dialog box will be disabled if the current document is edited in **Grid** mode.

Unicode Fallback Font Support

Oxygen XML Developer provides fonts for most common Unicode ranges. However, if you use special symbols or characters that are not included in the default fonts, they will be rendered as small rectangles. A *fallback* font is a reserve typeface that contains symbols for as many Unicode characters as possible. When a display system encounters a character that is not part of the range of any of the available fonts, Oxygen XML Developer will try to find that symbol in a *fallback* font.

Example of a Scenario Where a Fallback Font is Needed

Suppose that you need to insert the Wheelchair symbol (♿ - U+267F) into your content in a Windows operating system. By default, Oxygen XML Developer does not render this symbol correctly since it is not included in any of the default fonts. It is included in *Segoe UI Symbol*, but this font is not part of the default fonts that come with Oxygen XML Developer. To allow Oxygen XML Developer to recognize and render the symbol correctly, you can add *Segoe UI Symbol* as a *fallback* font.

Add a Fallback Font in Windows (7 or Later)

To add a fallback font to the Oxygen XML Developer installation, use the following procedure:

1. Start Windows Explorer and browse to the [OXYGEN_INSTALLATION_DIR]/jre/lib/fonts directory.
2. Create a directory called `fallback` (if it is not already there).
3. Copy a font file (True Type Font - TTF) that includes the special characters into this directory.



Tip: You could, for example, copy the *Segoe UI Symbol Regular* font from `C:\Windows\Fonts`.

4. Restart Oxygen XML Developer for the changes to take full effect.

Result: Whenever Oxygen XML Developer finds a character that cannot be rendered using its standard fonts, it will look for the glyph in the fonts stored in the `fallback` folder.

Alternate Solution for Other Platforms

For Mac OS X or other platforms, you could use the following approach:

1. Use a font editor (such as *FontForge*) to combine multiple true type fonts into a single custom font.
2. Install the font file into the dedicated font folder of your operating system.
3. In Oxygen XML Developer, *open the Preferences dialog box* and go to **Appearance > Fonts**.
4. Click the **Choose** button in the **Editor** option and select your custom font from the drop down list in the subsequent dialog box.
5. Restart Oxygen XML Developer for the font changes to take full effect.

Creating and Working with Documents

Oxygen XML Developer includes various features, actions, and wizards to assist you with creating new files and working with existing files. This section explains many of these features, including information on creating new documents, opening, saving, and closing existing files, searching documents, viewing file properties, and more.

Creating New Documents

Oxygen XML Developer includes a handy **New Document** wizard that allows you to customize and create new files from a large list of document types and predefined new file templates. You can also create your own templates and share them with others.

New Document Wizard

Oxygen XML Developer supports a wide range of document types. The **New Document** wizard presents the default associations between a file extension and the type of editor that opens the file. To customize these default associations, [open the Preferences dialog box](#) and go to [File Types](#).

1. To create a document in Oxygen XML Developer, either select **File > New** or click the  **New** button on the toolbar.
Oxygen XML Developer displays the **New Document** wizard and groups the supported document types in multiple categories:
 - **Recently used** - Contains the list of the most recently used files.
 - **New Document** - Contains the list of all supported document types. This list includes XML, XSL, XML Schema, Document Type Definition, Relax NG Schema, XQuery, web Services Definition Language, Schematron Schema, CSS, Text, PHP, JavaScript, Java, C, C++, Batch, Shell, Properties, SQL, XML Catalog, and PERL.
 - **Global templates** - Contains the list of predefined templates as well as user-defined custom templates. You can add custom template files to the `templates` folder of the Oxygen XML Developer installation directory. You can also specify an additional directory to use for templates in the [Document Templates Preferences](#) page.

 **Note:** You can also use [editor variables](#) in the template file content and they will be expanded when the files are opened.

 - **Framework templates** - Contains the list of templates defined in the [Document Type configuration dialog box](#), **Templates** tab.
2. Select a document type.
3. Click one of the following:
 - **Customize** - action available only for XML, XML Schema, Schematron, and XSL documents. Depending on the document type, you can set different properties before you create the file.
 - **Create** - uses default settings to create a file.

If you select **Create**, Oxygen XML Developer opens the new file in the editor view.
4. If you select **Customize**, Oxygen XML Developer opens the following dialog box. You can customize different options depending on the document type you select.

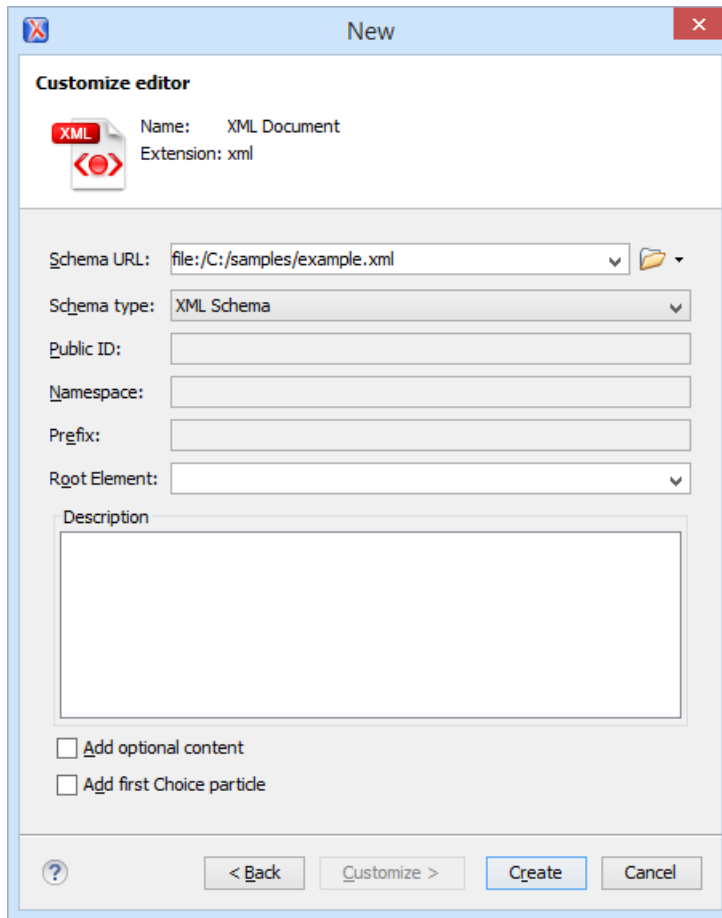


Figure 30: New XML Document Dialog Box

- **Schema URL** - Specifies the path to the schema file. When you select a file, Oxygen XML Developer analyzes its content and tries to fill the rest of the dialog box.
- **Schema type** - Allows you to select the schema type. The following options are available: XML Schema, DTD, RelaxNG XML syntax, RelaxNG compact syntax, and NVDL.
- **Public ID** - Specifies the PUBLIC identifier declared in the document prolog.
- **Namespace** - Specifies the document namespace.
- **Prefix** - Specifies the prefix for the namespace of the document root.
- **Root Element** - Populated with elements defined in the specified schema, enables selection of the element used as document root.
- **Description** - A small description of the selected document root.
- **Add optional content** - If you select this option, the elements, and attributes defined in the XML Schema as optional, are generated in the skeleton XML document.
- **Add first Choice particle** - If you select this option, Oxygen XML Developer generates the first element of an `xs:choice` schema element in the skeleton XML document. Oxygen XML Developer creates this document in a new editor panel when you click **OK**.

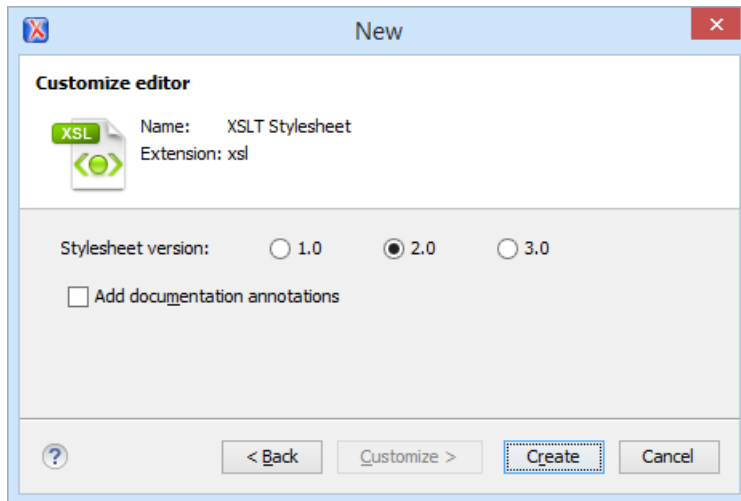


Figure 31: New XSL Document Dialog Box

- **Stylesheet version** - Allows you to select the Stylesheet version number. You can select from: 1.0, 2.0, and 3.0.
- **Add documentation annotations** - Enable this option to generate the stylesheet documentation.

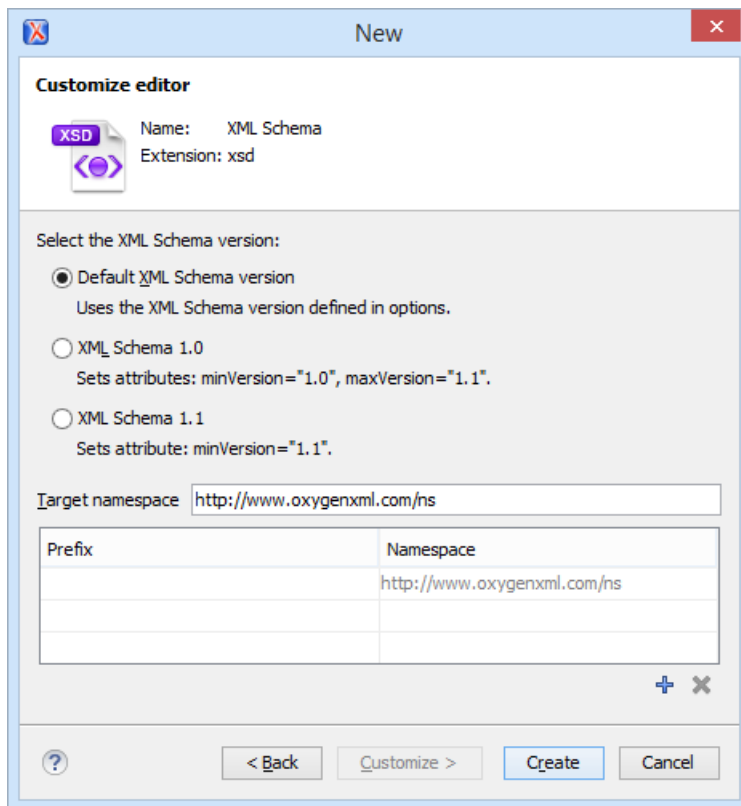


Figure 32: New XML Schema Document Dialog Box

- **Default XML Schema version** - Uses the XML Schema version defined in the **XML Schema** preferences page.
- **XML Schema 1.0** - Sets the `minVersion` attribute to `1.0` and the `maxVersion` attribute to `1.1`.
- **XML Schema 1.1** - Sets the `minVersion` attribute to `1.1`.
- **Target namespace** - specifies the schema target namespace.

- **Namespace prefix declaration table** - contains namespace prefix declarations. Table information can be managed using the **+** **New** and **×** **Delete** buttons.



Tip: For further details on how you can set the version of an XML Schema, go to [Setting the XML Schema Version](#).

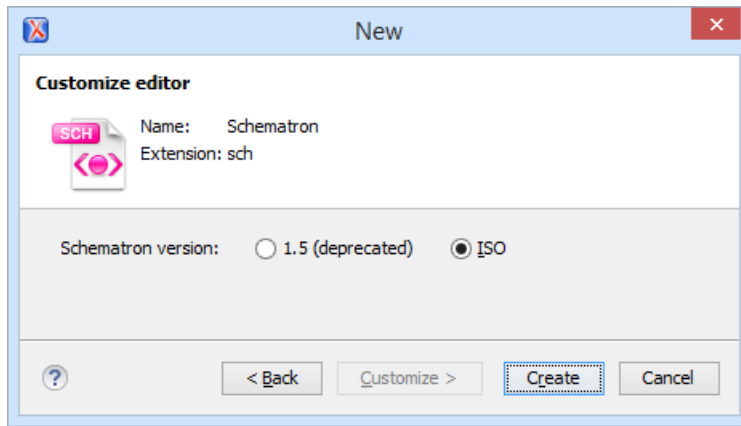


Figure 33: New Schematron Document Dialog Box

- **Schematron version** - Specifies the Schematron version. Possible options: 1.5 and ISO.



Note: Starting with version 16.0 of Oxygen XML Developer, the support for Schematron 1.5 is deprecated. It is recommended to use ISO Schematron instead.

To easily create a Schematron document the application offers two predefined document templates, ISO Schematron and Schematron 1.5.

5. Press **Create** to create the file.

Opening Documents

To open a document in Oxygen XML Developer, do one of the following:

- Go to **File > Open (Ctrl O (Meta O on OS X))** or click the **Open** toolbar button to display the **Open** dialog box. The start folder of the **Open** dialog box can be either the last folder visited by this dialog box or the folder of the currently edited file. This can be [configured in the user preferences](#).
- Go to **File > Open URL** or click the **Open URL** toolbar button to display the **Open URL** dialog box, which allows you to access any resource identified through an URL (defined by a protocol, host, resource path, and an optional port). The following actions are available in the drop-down action list:
 - **Browse for local file** - Opens a local file browser dialog box allowing you to select a local file.
 - **Browse for remote file** - Displays [the Open using FTP/SFTP dialog box](#) that allows you to open a remotely stored document.
 - **Browse for archived file** - Displays the **Archive Browser** dialog box that allows you to browse the content of an archive a choose a file to open in Oxygen XML Developer.
 - **Browse Data Source Explorer** - Opens the **Data Source Explorer** that allows you to browse the data sources defined in the [Data Sources preferences page](#).



Tip: You can get to the **Data Sources** preferences page, using the **Configure Database Sources** shortcut from the **Open URL** dialog box.

-  **Search for file** - Displays the *Open/Find Resources dialog box*.
- Click the  **Open/Find Resource** toolbar button to run the same action.
- Go to **File** >  **Reload** to load the last saved file content. All unsaved modifications are lost.
- Go to **File** > **Reopen** to reopen one of the recently opened document files. The list containing recently opened files can be emptied by invoking the **Clear history** action.
- Select the **Open** action from the contextual menu of the **Project** view. This opens the selected file from the **Project** view.

Opening the Current Document in System Application

To open the currently edited document in the associated system application, use the  **View in Browser/System Application** action that is available in the **File** menu and on the **File** toolbar. If you want to open XML files in a specific internet browser, instead of the associated system application, you can specify the internet browser to be used. To do so, *open the Preferences dialog box*, then go to **Global** and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

Opening Local Files at Start-up from Command Line

To open a local file at start-up when you open Oxygen XML Developer from the command line, add the paths for one or more local files as parameters in the command line:

- `scriptName [pathToXMLFile1] [pathToXMLFile2] ...` where `scriptName` is the name of the startup script for your platform (`oxygenDeveloper.bat` on Windows, `oxygenDeveloper.sh` on Unix/Linux, `oxygenDeveloperMac.sh` on Mac OS) and *pathToXMLFileN* is the name of a local XML file.
- an XML file and a schema file to be associated automatically to the file and used for validation and content completion:

```
scriptName -instance pathToXMLFile -schema pathToSchemaFile -schemaType
XML_SCHEMA|DTD_SCHEMA|RNG_SCHEMA|RNC_SCHEMA -dtName documentTypeName
```

where `scriptName` is the name of the startup script for your platform (`oxygen.bat` on Windows, `oxygen.sh` on Unix/Linux, `oxygenMac.sh` on Mac OS), `pathToXMLFile` is the name of a local XML file, `pathToSchemaFile` is the name of the schema which you want to associate to the XML file, the four constants (`XML_SCHEMA`, `DTD_SCHEMA`, `RNG_SCHEMA`, `RNC_SCHEMA`) are the possible schema types (W3C XML Schema, DTD, Relax NG schema in full syntax, Relax NG schema in compact syntax). The next parameter, `documentTypeName`, specifies the name of the *Document Type* for which the schema is defined. If the Document Type is already set in preferences, its schema and type are updated.

The two possibilities of opening files at startup by specifying them in the command line are explained also if the startup script receives one of the `-h` or `--help` parameters.

Opening a File at a Specific Position Using the Command Line Interface

Oxygen XML Developer offers support for opening a file at a specific position using the command line interface, by transmitting parameters to the Oxygen XML Developer batch script file. The following methods are available, depending on how you identify the position needed:

1. Specific position values (line and column number , or character offset)

Oxygen XML Developer supports the following position parameters:

- `line` - The line number
- `column` - The column number (has meaning if the `line` parameter is also defined)
- `char` - The character offset

Examples for Windows:

The following examples show how you can open an XML document in Oxygen XML Developer:

```
developer.bat file:samples/personal.xml#line=4
developer.bat file:samples/personal.xml#line=4column=5
developer.bat file:samples/personal.xml#line=4;column=5
developer.bat file:samples/personal.xml#char=334
```

2. Simplified XPath index path

Oxygen XML Developer will open an XML file and select one of its elements identified by a simplified XPath index path. For example, an index path of the form 1/5/7 identifies the seventh child of the fifth child of the root element.

Examples for Windows:

The following example shows how you can open an XML document in Oxygen XML Developer and select the third child of the root element:

```
developer.bat file:samples/personal.xml#element(1/3)
```

3. Anchors identified by ID attribute values

Oxygen XML Developer will open an XML file and select the element whose `id` attribute value is an exact match of the anchor attached to a command line instruction.

Examples for Windows:

The following example shows how you can open an XML document in Oxygen XML Developer and select the element that has the `id` element set to `titleID`:

```
developer.bat file:samples/personal.xml#titleID
```

Saving Documents

You can save the document you are editing with one of the following actions:

- **File >  Save.**
- ** Save** toolbar button - If the document was not yet saved, it displays the **Save As** dialog box.
- **File > Save As** - Displays the **Save As** dialog box, used either to name and save an open document to a file or to save an existing file with a new name.
- **File > Save To URL** - Displays the **Save to URL** dialog box that can be used to save a file identified by its URL (defined by a protocol, host, resource path, and an optional port). Use the drop-down action list to choose one of the available save actions:
 - ** Browse for local file** - Opens a local file browser dialog box allowing you to save the document locally.
 - ** Browse for remote file** - Displays the **Save to URL** dialog box that allows you to save the document to a remote location (accessible through FTP, SFTP or WebDAV).
 - ** Browse for archived file** - Displays the **Archive Browser** dialog box that allows you to save the document inside an archive.
 - ** Browse Data Source Explorer** - Opens the **Data Source Explorer** that allows you to browse the data sources defined in the [Data Sources preferences page](#).
- ** Tip:** You can get to the **Data Sources** preferences page, using the **Configure Database Sources** shortcut from the **Save to URL** dialog box.
- ** Search for file** - Displays the [Open/Find Resources dialog box](#).
- **File > Save All** - Saves all open documents. If any document does not have a file, displays the **Save As** dialog box.

Opening and Saving Remote Documents via FTP/SFTP/WebDAV/SharePoint

Oxygen XML Developer supports editing remote files, using the FTP, SFTP, WebDAV, SharePoint, and SharePoint Online for Office 365 protocols. You can edit remote files in the same way you edit local files. For example, you are able to add remote files a project, or make them subject of XSL and FO transformations.

You can open one or more remote files in [the Open URL dialog box](#).

A WebDAV resource can be locked when it is opened in Oxygen XML Developer by checking the [Lock WebDAV files on open](#) option to prevent other users to modify it concurrently on the server. If a user tries to edit a locked file, Oxygen XML Developer displays an error message that contains the lock owner's name. The lock is released automatically when the editor for that resource is closed in Oxygen XML Developer.

To avoid conflicts with other users when you edit a resource stored on a SharePoint server, you can **Check Out** the resource.

To improve the transfer speed, the content exchanged between Oxygen XML Developer and the HTTP / WebDAV server is compressed using the GZIP algorithm.

The current [WebDAV Connection](#) details can be saved using the  **Database Perspective** button and then used in the *Data Source Explorer* view.

The Open URL Dialog Box

To open this dialog box, go to **File >  Open URL** (or click the  **Open URL** toolbar button), then choose the  **Browse for remote file** option from the drop down action list.

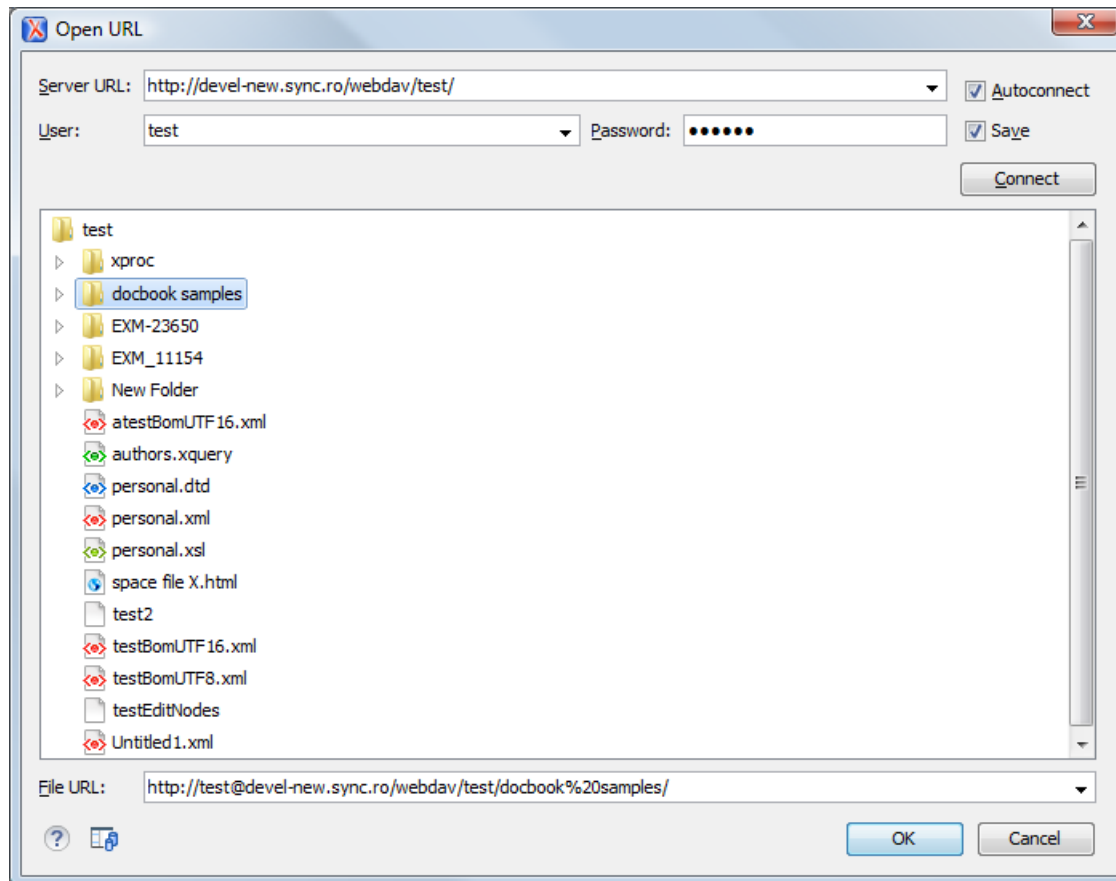


Figure 34: Open URL Dialog Box

The displayed dialog box is composed of several parts:

- The *Identification* section contains the access credentials. To browse for a file on a server, you have to specify the user and password. This information is bound to the selected URL displayed in the **File URL** combo box, and used further in opening/saving the file. If the check box **Save** is selected, then the user and password are saved between editing sessions. The password is kept encrypted in the options file.

**Note:**

Your password is well protected. In the case the options file is used on other machine by a user with a different username the password will become unreadable, since the encryption is username dependent. This is also true if you add URLs having user and password to your project.

- In the server combo you can specify the protocol (HTTP, HTTPS or FTP) and the host name or IP of the server.

**Tip:** When specifying a URL, follow these rules:

- To access an FTP server, write the protocol, host, and port (if using a non-standard one), like `ftp://server.com` or `ftp://server.com:7800/`.
- To access a WebDAV server, write the path to the directory of the WebDAV repository along with the protocol and the host name, like `https://www.some-webdav-server.com:443/webdav-repository/`.

**Important:**

Make sure that the repository directory ends in a slash "/", like `https://www.some-webdav-server.com:443/webdav-repository/`

By pressing the **Connect** button the directory listing will be shown in the component below. If the selected URL points to a SharePoint server, a dedicated SharePoint browsing component is presented. When **Autoconnect** is selected, the browse action is performed every time when you open the dialog box.

- The browser view:
 - If you are browsing a WebDAV or FTP repository, the items are presented in a tree-like fashion. You can browse the directories, and make multiple selections. Additionally, you may use the **Rename**, **Delete**, and **New Folder** actions to manage the file repository.



Note: The file names are sorted in a case-insensitive way.

- When you browse a SharePoint repository, a specialized component renders the SharePoint site content.

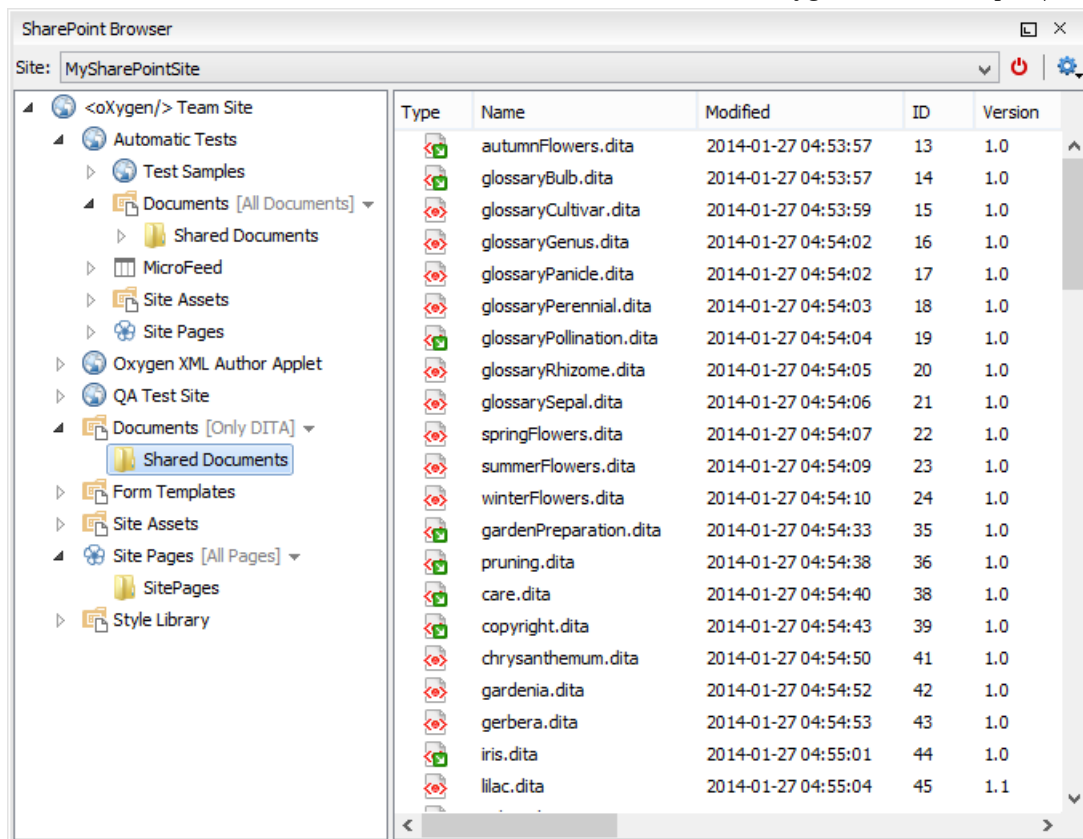


Figure 35: Browsing a SharePoint Repository


The left side navigation area presents the SharePoint site structure in a tree-like fashion displaying the following node types: *sites* (🌐), *libraries*, and *folders*.

Depending on the type of node, a contextual menu offers customized actions that can be performed on that node. The contextual menu of a folder allows you to create new folders and documents, import folders and files, and to rename and delete the folder.



Note: The rename and delete actions are not available for library root folders (folders located at first level in a SharePoint library).

Each library node displays next to its name a drop down box where you can select the current library view. This functionality is also available on the node's contextual menu, under the **Current View** submenu.




The content of a folder is displayed in a tabular form, where each row represents the properties of a folder or document. The list of columns and the way the documents and folders are organized depends on the currently selected view of the parent library.

You can filter and sort the displayed items. To display the available filters of a column, click the filter widget located on the column's header. You can apply multiple filters at the same time.



Note: A column can be filtered or sorted only if it was configured this way on the server side.

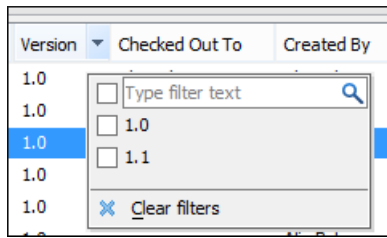

- The editable combo box, in which it can be specified directly the URL to be opened or saved.



Tip: You can type a URL, such as `http://some.site/test.xml` (if the file is accessible through normal HTTP protocol), or `ftp://anonymous@some.site/home/test.xml` (if the file is accessible through anonymous FTP).

This combo box is also displaying the current selection when the user changes selection by browsing the tree of folders and files on the server.

Changing File Permissions on a Remote FTP Server

Some FTP servers allow the modification of permissions of the files served over the FTP protocol. This protocol feature is accessible directly in the FTP/WebDAV file browser dialog box by right-clicking a tree node and selecting the *Change permissions* menu item.

In this dialog box, the usual Unix file permissions *Read*, *Write*, and *Execute* are granted or denied for the file owner, owner group, and the rest of the users. The aggregate number of permissions is updated in the *Permissions* text field when it is modified with one of the check boxes.

WebDAV over HTTPS

If you want to access a WebDAV repository across an unsecure network, Oxygen XML Developer allows you to load and save the documents over the HTTPS protocol (if the server understands this protocol) so that any data exchange with the WebDAV server is encrypted.

When a WebDAV repository is first accessed over HTTPS, the server hosting the repository will present a security certificate as part of the HTTPS protocol, without any user intervention. Oxygen XML Developer will use this certificate to decrypt any data stream received from the server. For the authentication to succeed you should make sure the security certificate of the server hosting the repository can be read by Oxygen XML Developer. This means that Oxygen XML Developer can find the certificate in the key store of the Java Runtime Environment in which it runs. You know the server certificate is not in the JRE key store if you get the error *No trusted certificate found* when trying to access the WebDAV repository.

Troubleshooting HTTPS

When Oxygen XML Developer cannot connect to an HTTPS-capable server, most likely there is no certificate set in the *Java Runtime Environment (JRE)* that Oxygen XML Developer runs into. The following procedure describes how to:

- Export a certificate to a local file using any HTTPS-capable Web browser (for example Internet Explorer).
- Import the certificate file into the JRE using the keytool tool that comes bundled with Oxygen XML Developer.

1. Export the certificate into a local file

- a) Point your HTTPS-aware Web browser to the repository URL.

If this is your first visit to the repository it will be displayed a security alert stating that the security certificate presented by the server is not trusted.

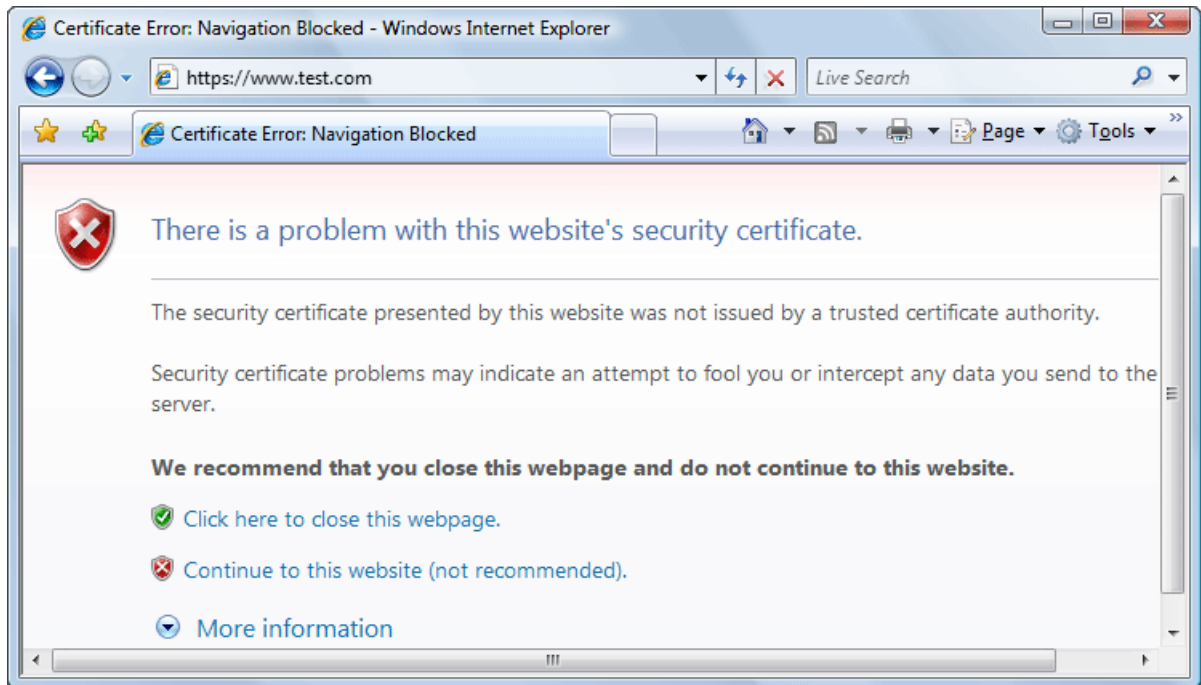


Figure 36: Security alert - untrusted certificate

- b) Go to menu **Tools > Internet Options**.
Internet Options dialog box is opened.
 - c) Select **Security** tab.
 - d) Select **Trusted sites** icon.
 - e) Press **Sites** button.
This will open **Trusted sites** dialog box.
 - f) Add repository URL to **Websites** list.
 - g) Close the **Trusted sites** and **Internet Options** dialog boxes.
 - h) Try again to connect to the same repository URL in Internet Explorer.
The same error page as above will be displayed.
 - i) Select **Continue to this website** option.
A clickable area with a red icon and text **Certificate Error** is added to Internet Explorer address bar.
 - j) Click the **Certificate Error** area.
A dialog box containing a **View certificates** link is displayed.
 - k) Click the **View certificates** link.
Certificate dialog box is displayed.
 - l) Select **Details** tab of **Certificate** dialog box.
 - m) Press **Copy to File** button.
Certificate Export Wizard is started.
 - n) Follow indications of wizard for DER encoded binary X.509 certificate. Save certificate to local file server .cer.
2. Import the local file into the JRE running Oxygen XML Developer.
- a) Open a text-mode console with administrative rights.
 - b) Go to the **lib/security** directory of the JRE running Oxygen XML Developer. You find the home directory of the JRE in the *java.home* property that is displayed in the **About** dialog box (**System properties** tab). On Mac OS X systems, the **lib/security** directory is usually located in `/System/Library/Java/JavaVirtualMachines/1.6.0.jdk/Contents/Home` directory.
 - c) Run the following command:

```
..\..\bin\keytool -import -trustcacerts -file server.cer -keystore cacerts
```

The `server.cer` file contains the server certificate, created during the previous step. `keytool` requires a password before adding the certificate to the JRE *keystore*. The default password is `changeit`. If somebody changed the default password then he is the only one who can perform the import.



Note: To make Oxygen XML Developer accept a certificate even if it is invalid, [open the Preferences dialog box](#), go to **Connection settings > HTTP(S)/WebDAV**, and enable the **Automatically accept a security certificate, even if invalid** option.



Tip: If you need to import multiple certificates, you need to specify a different alias for each additional imported certificate with the `-alias` command line argument, like in the following example:

```
..\..\bin\keytool -import -alias myalias1 -trustcacerts -file server1.cer -keystore cacerts
..\..\bin\keytool -import -alias myalias2 -trustcacerts -file server2.cer -keystore cacerts
```

3. Restart Oxygen XML Developer.

HTTP Authentication Schemes

Oxygen XML Developer supports the following HTTP authentication schemes:

- **Basic** - The *basic* authentication scheme defined in the [RFC2617 specifications](#).
- **Digest** - The *digest* authentication scheme defined in the [RFC2617 specifications](#).
- **NTLM** - The *NTLM* scheme is a proprietary Microsoft Windows Authentication protocol (considered to be the most secure among currently supported authentication schemes).



Note: For NTLM authentication, the user name must be preceded by the name of the domain it belongs to, as in the following example:

```
domain\username
```

- **Kerberos** - An authentication protocol that works on the basis of *tickets* to allow nodes communicating over a non-secure network to prove their identity to one another in a secure manner.

Single Sign-on

Oxygen XML Developer implements the *Single sign-on* property (meaning that you can log on once and gain access to multiple services without being prompted to log on for each of them), based on the *Kerberos* protocol and relies on a *ticket-granting ticket (TGT)* that Oxygen XML Developer obtains from the operating system.

To turn on the *Kerberos*-based authentication, you need to add the following system property in the `.vmoptions` configuration file or start-up script:

```
-Djavax.security.auth.useSubjectCredsOnly=false
```

Switching Between Opened Tabs

There are two actions for cycling through the opened file tabs:

Ctrl Tab (Command Tab on OS X)

Switches between the tabs with opened files in the order most recent ones first.

Ctrl + Shift + Tab (Command + Shift + Tab on OS X)

Switches between the tabs with opened files in the reverse order.

Searching Documents

Oxygen XML Developer includes advanced search capabilities to help you locate documents and resources.

The Open/Find Resource View

The **Open/Find Resource** view is designed to offer advanced search capabilities either by using a simple text search or by using the [Apache Lucene - Query Parser Syntax](#). To open this view, go to **Window > Show View > Open/Find Resource**. The view is presented in the left side of the default Oxygen XML Developer layout, next to the **Project** and **DITA Maps Manager** views.

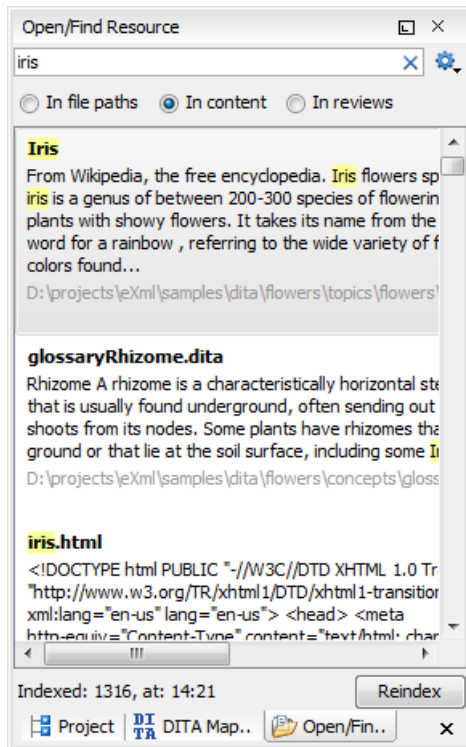


Figure 37: The Open/Find Resource View

You can use this view to find a file in the current Oxygen XML Developer project by typing only a few letters of the file name of a document or a fragment of the content you are searching for. The Open/Find Resource view also supports searching in document edits (comments, insertions, deletions, and highlighted content).



Note: Full support for searching in document edits is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers support to search through a maximum of 10 edits.

Search results are presented instantly, after you finish typing the content you are searching for. The matching fragments of text are highlighted in the results list displayed in the view. When you open one of the documents from the results list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document close the [Results view](#). To display the search history, position the cursor in the search field and press **Ctrl Down Arrow (Command Down Arrow on OS X)** or **Ctrl Up Arrow (Command Up Arrow on OS X)** on your keyboard. Pressing only the **Down Arrow** key moves the selection to the list of results.

A contextual menu available on each search result provides actions applicable to the document that contains it. These actions allow you to:

- Open the document in one of Oxygen XML Developer internal editors.
- Open the document in an external system application.
- Identify the document in the system file explorer.
- Copy the file's location.

The content of the resources used to search in is parsed from an index. The indexing is performed both automatically and on request.



Note: Automatic indexing is performed when you modify, add, or remove resources in the currently indexed project. If the index was never initialized, the index is not updated on project changes.



Note: To improve performance, the indexing process skips the following set of common English words (the so-called *stop words*): *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*. This means that if you are searching for any of these words, **Open/Find Resource** view will not be able to match any of them. However, you can configure the list of *stop words* in the [Open/Find Resources Preferences Page](#).



Note: Searches are case insensitive. For example, if you search for *car* you get the same results as when you search for *Car*.



Note: Suffix searches are supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search **in content** for **ing* you will find documents that contain the word *presenting*. If you search **in file paths** for **/samples/*.gif* you will find all the *gif* images from the *samples* directory.



Note: You can drag a resource from the **Open/Find Resource** view and drop it in a DocBook, DITA, TEI or XHTML document to create a link to that resource.

The **Open/Find Resource** view offers the following options:

- **Settings** - Displays settings for the view:
 - **Clear Index** - Clears the index.
 - **Show description** - Presents the search results in a more compact form, displaying only the title and the location of the resources.
 - **Options** - Opens the [Open/Find Resource preferences page](#).
- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, insertions, and deletion in your resources.
- **Reindex** - Reindexes your resources.

The Open/Find Resource Dialog Box

The **Open/Find Resource** dialog box offers advanced search capabilities. To open the **Open/Find Resource** dialog box, go to **Find** > **Open/Find Resource (Ctrl Shift R (Meta Shift R on OS X))**. You can also click the **Open/Find Resource** toolbar button or use the **Search for file** action, available for some URL input fields.

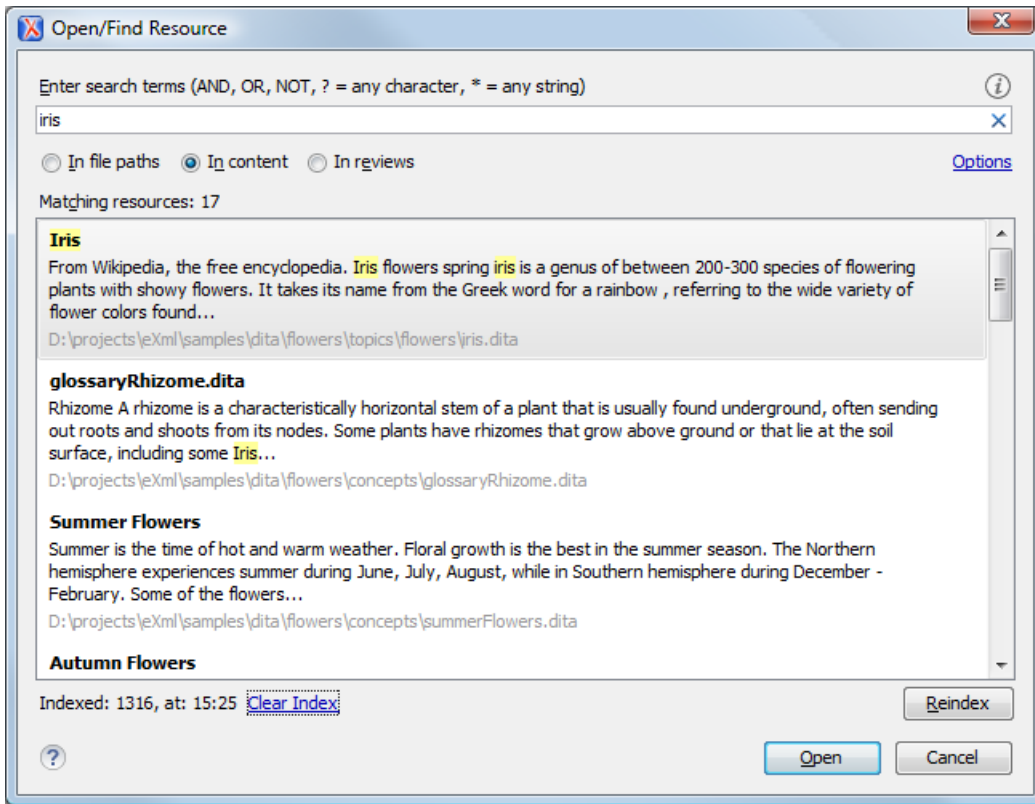


Figure 38: The Open/Find Resource Dialog Box

You can use this dialog box to find a file in the current Oxygen XML Developer project by typing a few letters of the file name of a document or a fragment of the content you are searching for. The **Open/Find Resource** dialog box also supports searching in document edits (comments, insertions, deletions, and highlighted content).

 **Note:** Full support for searching in document edits is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers support to search through a maximum of 10 edits.

Search results are presented instantly, after you finish typing the content. The matching fragments of text are highlighted in the results list displayed in the dialog box. When you open one of the documents from the results list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document close the [Results view](#). To display the search history, position the cursor in the search field and press **Ctrl Down Arrow (Command Down Arrow on OS X)** or **Ctrl Up Arrow (Command Up Arrow on OS X)** on your keyboard. Pressing only the **Down Arrow** key moves the selection to the list of results.

 **Note:** Searches are case insensitive. For example, if you search for *car* you get the same results as when you search for *Car*.

 **Note:** Suffix searches are supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search **in content** for **ing* you will find documents that contain the word *presenting*. If you search **in file paths** for **/samples/*.gif* you will find all the *gif* images from the *samples* directory.

The **Open/Find Resource** dialog box offers the following options:

- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, insertions, and deletion in your resources.
- **Options** - Opens the [Open/Find Resource preferences page](#).
- **Clear Index** - Clears the index.

- **Reindex** - Reindexes your resources.

A contextual menu available on each search result provides actions applicable to the document that contains it. These actions allow you to:

- Open the document in one of Oxygen XML Developer internal editors.
- Open the document in an external system application.
- Identify the document in the system file explorer.
- Copy the file's location.

When you perform a search a caching mechanism is used to gather the paths of all files linked in the current project. When the first search is performed, all project files are indexed and added to the cache. The next search operations use the information extracted from the cache, thus improving the processing time. The cache is kept for the currently loaded project only, so when you perform a search in a new project the cache is rewritten. Also, the cache is reset when you press the **Reindex** button.

 **Important:** Files larger than 2GB are not indexed.

If there is no file found that matches your file pattern or text search, a possible cause is that the file you are searching for was added to the Oxygen XML Developer project after the last caching operation. In this case, re-indexing the project files from the **Reindex** button enables the file to be found. The date and time of the last index operation are displayed below the file list.

Once you find the files that you want to open, select them in the list and press the **Open** button. Each of the selected files is opened in *the editor associated with the type of the file*.

To watch our video demonstration about the **Open/Find Resource** dialog box and search capabilities, go to http://oxygenxml.com/demo/Open_Find_Resource.html.

Searching in Content

To perform a search through the content of your resources, open the **Open/Find Resources** dialog box or the **Open/Find Resource** view, enable the **in content** option, and in the search field enter the terms that you want to search for.

The **Open/Find Resource** feature is powered by *Apache Lucene*. Apache Lucene is a free open source information retrieval software library.

You can use the **Open/Find Resource** dialog box and the **Open/Find Resource** view either to perform a simple text search or to perform a more complex search using the *Apache Lucene - Query Parser Syntax*. Using the *Apache Lucene - Query Parser Syntax* means you can perform any of the following searches:

Term Searches

Use the **Open/Find Resource** view or dialog box to search for plain text:

Garden Preparation

Element Specific Searches

Use the **Open/Find Resource** view or dialog box to search for content that belongs to a specific element:

title:"Garden Preparation"

Wildcard Searches

Use wildcards to make your search more permissive:

Garden Prepar?tion

Fuzzy Searches

If you are not sure of the exact form of a term that you are interested in, use the fuzzy search to find the terms that are similar to what you introduce in the **Open/Find Resource** view or dialog box. To perform a fuzzy search, use the ~ symbol after the word that you are not sure of:

```
Garden Preparing~
```

Proximity Searches

Use proximity searches to find words that are within a specific distance away. To perform a proximity search, use the ~ symbol at the end of your search. For example, to search for the word *Garden* and the word *Preparation* within 6 words of each other use:

```
"Garden Preparation"~6
```

Range Searches

Use range searches to match documents whose element values are between the lower and upper bound specified in the range query. For example, to find all documents whose titles are between *Iris* and *Lilac*, use:

```
title:{Iris TO Lilac}
```

The curly brackets denote an exclusive query. The results you get when using this query are all the documents whose titles are between *Iris* and *Lilac*, but not including *Iris* and *Lilac*. To create an inclusive query use square brackets:

```
title:[Iris to Lilac]
```

Term Prioritising Searches

Use term prioritising searches if the fragment of text that you are searching for contains certain words that are more important to your search than the rest of them. For example, if you are searching for *Autumn Flowers*, a good idea is to prioritise the word *Autumn* since the word *Flowers* occurs more often. To prioritise a word use the ^ symbol:

```
Autumn^6 Flowers
```

Searches Using Boolean Operators

You are able to use the **AND**, **+**, **OR**, **-**, and **NOT** operators.

To search for documents that contain both the words *Garden* and *Preparation*, use:

```
Garden AND Preparation
```

To search for documents that must contain the word *Garden* and may contain the word *Preparation*, use:

```
+Garden Preparation
```

To search for documents that contain either the word *Garden* or the word *Preparation*, use:

```
Garden OR Preparation
```

To search for documents that contain *Garden Preparation* but not *Preparation of the Flowers*, use:

```
"Garden Preparation" - "Preparation of the Flowers"
```

Searches Using Grouping

To search either for the word *Garden* or *Preparation*, and the word *Flowers*, use:

```
(Garden OR Preparation) AND Flowers
```

Searches Using Element Grouping

To search for a title that contains both the word *Flowers* and the phrase *Garden Preparation*, use:

```
title:(+Flowers +"Garden Preparation")
```

Searching in File Paths

To perform a search in the file paths of your resources, open the **Open/Find Resources** dialog box or the **Open/Find Resource** view, enable the **In file paths** option, and in the search field enter the terms that you want to search for.

The **Open/Find Resource** view and dialog box allows you to search for a resource either by its name or by its path (or by a fragment of its path).

You can use wildcards when you perform such searches:

- Use "*" to match any sequence of characters.
- Use "?" to match any single character.

For example, if you search for **-preferences-page* you will find all the resources that contain the *-preferences-page* fragment in their name. If you search for **/samples/*.gif*, you will find all the .gif images from the *samples* directory.

Searching in Reviews

To perform a search in the edits of your resources, open the **Open/Find Resource** dialog box or the **Open/Find Resource** view, enable the **In reviews** option, and in the search field enter the terms that you want to search for.

The following options are available:

- **Type** - Specifies whether you want to search for content in comments, insertions, deletions, or highlighted content.
- **Author** - Displays all the authors of the edits in your resources. The authors are collected when indexing. You can set a specific author for your search or all of them.
- **Time** - Specifies the time when the edits that you are searching through were created.

Both the view and the dialog box display the edits that contain the search results and their parent topics along with a short description. To hide this description, go to **Settings** and disable the **Show Description** option.

Technical Aspects

When Oxygen XML Developer performs the indexing of your resources, the refereed content from your documents is not taken into account. For example, when DITA documents are indexed, the content from the **conref** elements is not parsed. The files that make up the index are stored on disk in the `[user_home_directory]\AppData\Roaming\com.oxygenxml.developer\lucene` folder.

Closing Documents

To close open documents, use one of the following methods:

- Click **Close**(**Ctrl W** (**Meta W** on OS X)) in the contextual menu of an open tab (or from the **File** menu) to close it.

- Click **Close Other Files** in the contextual menu of an open tab (or from the **File** menu) to close all the open tabs except the selected one.
- Click **Close All**(Ctrl Shift F4 (Meta Shift F4 on OS X)) in the contextual menu of an open tab (or from the **File** menu) to close all open tabs.

The Contextual Menu of the Current Editor Tab

The contextual menu is available when you right-click the current editor tab label. It includes the following actions:

Close

Closes the current editor.

Close Other Files

Closes all opened editor but the one you are currently viewing.

Close All

Closes all opened editors.

Reopen last closed editor

Reopens the last closed editor.

Maximize/Restore Editor Area

Collapses all the side views and spans the editing area to cover the entire width of the main window.

Add to project

Adds the file you are editing to the current project.

Add all to project

Adds all the opened files to the current project.

Copy Location

Copies the disk location of the file.

Show in Explorer (Show in Finder on OS X)

Opens the Explorer to the file path of the file.

Viewing File Properties

The **Properties** view, you can quickly access information about the currently edited document. The information includes:

- Character encoding.
- Full path on the file system.
- Schema used for content completion and document validation.
- Document type name and path.
- Associated transformation scenario.
- Read-only state of a file.
- Bidirectional text (left to right and right to left) state.
- Total number of characters in the document.
- Line width.
- Indent with tabs state.
- Indent size.

The view can be accessed from **Window > Show View > Properties**.

To copy a value from the **Properties** view in the clipboard, for example the full file path, use the **Copy** action available on the contextual menu of the view.

Using Projects to Group Documents

This section explains how to create and work with Projects.

Creating a New Project

Oxygen XML Developer allows you to organize your XML-related files into projects. This helps you manage and organize your files and also allows you to perform batch operations (such as validation and transformation) over multiple files. You can also [share your project settings and transformation/validation scenarios](#) with other users. Use the [Project view](#) to manage projects, and the files and folders contained within.

Creating a New Project

To create a new project, select  **New Project** from the **Project** menu, the **New** menu in the contextual menu, or the drop-down menu at the top-left of the **Project** view. This opens a dialog box that allows you to assign a name to the new project and adds it to the structure of the project in the [Project view](#).

Adding Items to the Project

To add items to the project, select any of the following actions that are available when invoking the contextual menu in the **Project** view:

New > **File**

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New > **Folder**

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

The project itself is considered a logical folder. You can add a logical folder, or content to a logical folder, by using one of the following actions that are available in the contextual menu, when invoked from the *project root*:

New > **Logical Folder**

Creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > **Logical Folders from Web**

Replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X ).

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Using Linked Folders (Shortcuts)

Another easy way to organize your XML working files is to place them in a directory and then to create a corresponding linked folder in you project. If you add new files to that folder, you can simply use the  **Refresh (F5)** action from the toolbar or contextual menu and the **Project** view will display the existing files and subdirectories. If your files are scattered amongst several folders, but represent the same class of files, you might find it useful to combine them in a logical folder.

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (Mac OS X Finder) to the project tree, or by selecting  **Add Folder** in the contextual menu from the *project root*. Linked folders are displayed in the **Project** view with bold text. To create a file inside a linked folder, select the **New >  File** action from the contextual menu. The linked files presented in the **Project** view are marked with a special icon.

 **Note:** Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

For much more information on managing projects and their content, see the [The Project View](#) on page 59 section.

For more details about how you can share projects with other users, see the [Sharing a Project - Team Collaboration](#) on page 120 section.

The Project View

The **Project** view is designed to assist you with organizing and managing related files grouped in the same XML project. The actions available on the contextual menu and toolbar associated to this panel enable the creation of XML projects and shortcuts to various operations on the project documents.

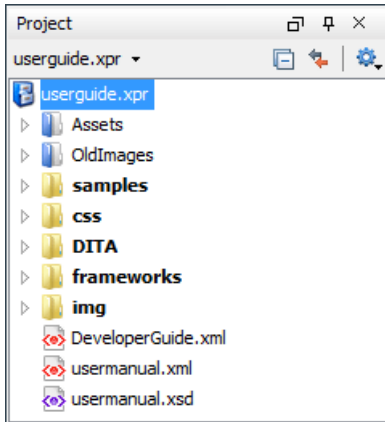


Figure 39: The Project View

By default, the **Project** view is positioned on the left side of the Oxygen XML Developer window, above the [Outline view](#). A closed view can be quickly reopened at any time with the **Project > Show Project View** menu action.

The tree structure occupies most of the view area. In the upper left side of the view, there is a drop-down menu that contains all recently used projects and project management actions:

Open Project (Ctrl F2 (Meta F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.



New Project

Creates a new, empty project.

The following actions are grouped in the upper right corner:



Collapse All

Collapses all project tree folders. You can also collapse/expand a project tree folder if you select it and press the **Enter** key or **Left Arrow** to collapse and **Right Arrow** to expand.



Link with Editor

When selected, the project tree highlights the currently edited file, if it is found in the project files.



Note: This button is disabled automatically when you move to the **Debugger** perspective.



Settings

A sub-menu that contains the following actions:



Filters

Allows you to filter the information displayed in the **Project** view. Click the toolbar button to set filter patterns for the files you want to show or hide. Also, you can set filter patterns for the linked directories that are hidden.

Show Full Path

When selected, linked files and folders are presented with a full file path.

Enable Master Files Support

Select this option to enable the [Master Files support](#).

Change Search and Refactor operations scope

Allows you to change the collection of documents that define the context of the [search and refactor operations](#).

- **Use only Master Files, if enabled** - Restricts Oxygen XML Developer to perform the search and refactor operations starting from the master files that are defined for the current resource. This option is available when you select **Project** in the **Select the scope for Search and Refactor operations** dialog box and the **Master Files** support is enabled.
- **Working sets** - Allow you to specify the set of files on which the search and refactor operations will act on.

The files are usually organized in an XML project as a collection of folders. There are three types of resources displayed in the **Project** view:

- *Logical folders* - marked with a blue icon on Windows and Unix/Linux () and a magenta icon on Mac OS X (). They help you group files within the project. This folder type has no correspondent on the physical disk, since they are used as containers for related items. Creating and deleting them does not affect the file system on disk. They are created on the project root or inside other logical folders by using the contextual action **New > Logical Folder**. The contextual menu action  **Remove from Project** can be used to remove them from the project.
- *Physical folders and files* - marked with the operating system-specific icon for folders (usually a yellow icon on Windows and a blue icon on Mac OS X). These folders and files are mirrors of real folders or files that exist in the local file system. They are created or added to the project by using contextual menu actions (such as **New > File**, **New > Folder**, **Add Folder**, etc.) Also, the contextual menu action  **Remove from Disk (Shift+Delete)** can be used to remove them from the project and local file system.
- *Shortcut folders and files* - the icons for file shortcuts include a shortcut symbol and names of folder shortcuts are displayed in bold text. All files and folders that appear as direct descendants of a logical folder are considered shortcuts. They are created and added with the contextual actions **Add Files** and **Add Folder** from the project root. Both contextual menu actions  **Remove from Project** and  **Remove from Disk (Shift+Delete)** are available for shortcuts.  **Remove from Project** just removes the shortcut from the project, while  **Remove from Disk (Shift+Delete)** removes the shortcut and the physical resource from the local file system.

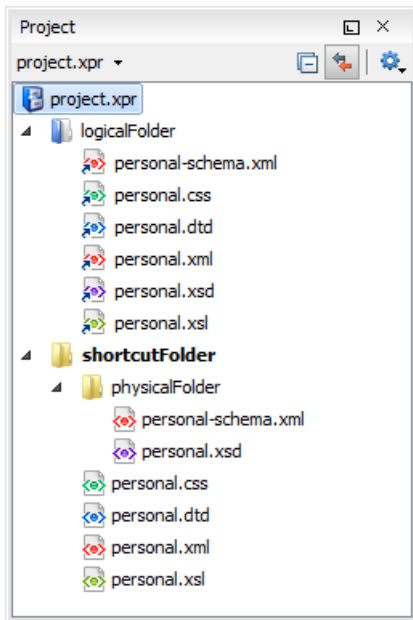


Figure 40: The Project View with Examples of all Three Types of Resources

Creating New Projects

The following action is available in the **Project** menu, the **New** menu in the contextual menu, or from the drop-down menu in the top-left of the **Project** view:



New Project

Creates a new, empty project.

Creating New Project Items

The following actions are available by selecting **New** from the contextual menu, when invoked from the **Project** view:

New > File

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New > Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

New > Logical Folder

Available when invoked from the *project root*, this action creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > Logical Folders from Web

Available when invoked from the *project root*, this action replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Add Content to a Logical Folder

The project itself is considered a logical folder. You can add content to a logical folder using one of the actions available in the contextual menu, when invoked from the *project root*:

**Add Folder**

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X .

**Add Files**

Adds links to files on the local file system.

**Add Edited File**

Adds a link to the currently edited file in the project.

Managing Project Content*Creating/Adding Files and Folders*

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer / Mac OS X Finder to the project tree, or by selecting **Add Folder** in the contextual menu from the project root. To create a file inside a linked folder, select the **New** >  **File** action from the contextual menu.



Note: The linked files presented in the **Project** view are marked with a special icon. Linked folders are displayed in bold text.

You can create physical folders by selecting **New** > **Folder** from the contextual menu.

When adding files to a project, the default target is the project root. To change a target, select a new folder. Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

Removing Files and Folders

To remove one or more linked files or folders, select them in the project tree and press the **Delete** key, or select the contextual menu action  **Remove from Project**. To remove a linked file or folder from both project and local file system, select the contextual menu action  **Remove from Disk (Shift+Delete)**. The  **Remove from Disk (Shift+Delete)** action is also used to remove physical files or folders.



Caution: In most cases this action is irreversible, deleting the file permanently. Under particular circumstances (if you are running a Windows installation of Oxygen XML Developer and the *Recycle Bin* is active) the file is moved to *Recycle Bin*.

Moving Files and Folders

You can *move the resources of the project* with drag and drop operations on the files and folders of the tree.

You can also use the usual  **Cut**,  **Copy**, and  **Paste** actions to move resources in the **Project** view.

Renaming Files and Folders

There are three ways you can *rename an item in the Project view*. Select the item in the **Project** view and do one of the following:

- Invoke the **Rename** action from the contextual menu.
- Press **F2** and type the new name.
- Click the selected item and type the new name.

To finish editing the item name, press **Enter**.



Note: The **Rename** action is also available on *logical* files.

Locating and Opening Files

If a project folder contains a lot of documents, a certain document can be located quickly in the project tree by selecting the folder containing the desired document and typing the first few characters of the document name. The desired document is automatically selected as soon as the typed characters uniquely identify its name in the folder.

The selected document can be opened by pressing the **Enter** key, by double-clicking it, or with one of the **Open** actions from the contextual menu. The files with known document types are opened in the associated editor, while binary files are opened with the associated system application. To open a file with a known document type in an editor other than the default one, use the **Open with** action. Also, dragging and dropping files from the project tree to the editor area results in the files being opened.

Saving the Project

The project file is automatically saved every time the content of the **Project** view is saved or modified by actions such as adding or removing files and drag and drop.

Validate Files

The currently selected files in the **Project** view can be checked to be XML well-formed or validated against a schema (DTD, XML Schema, Relax NG, Schematron or NVDL) with one of the following contextual menu actions found in the **Validate** sub-menu:

Validate > **Check Well-Formedness**

Checks if the selected file or files are well-formed.

Validate **Validate**

Validates the selected file or files against their associated schema. EPUB files make an exception, because this action triggers a **Validate and Check for Completeness** operation.

Validate **Validate with Schema**

Validates the selected file or files against a specified schema.

Validate **Configure Validation Scenario(s)**

Allows you to configure and run a *validation scenario*.

Applying Transformation Scenarios

The currently selected files in the **Project** view can be transformed in one step with one of the following actions available from contextual menu in the **Transform** sub-menu:

Transform > **Apply Transformation Scenario(s)**

Obtains the output with one of the built-in scenarios.

Transform > **Configure Transformation Scenario(s)**

Opens a dialog box that allows you to configure pre-defined transformation scenarios.

Transform > **Transform with**

Allows you to select a transformation scenario to be applied to the currently selected files.

Along with the logical folder support, this allows you to group your files and transform them very easily.

Refactoring Actions (Available for certain document types (such as XML, XSD, and XSL))

Oxygen XML Developer includes some refactoring operations that help you manage the structure of your documents. The following actions are available from the contextual menu in the **Refactoring** sub-menu:

Refactoring > **Rename resource**

Allows you to change the name of a resource.

Refactoring > **Move resource**

Allows you to change the location on disk of a resource.

Refactoring > **XML Refactoring**

Opens *the XML Refactoring tool wizard* that presents refactoring operations to assist you with managing the structure of your XML documents.

Other Contextual Menu Actions

Other actions that are available in the contextual menu from the project tree include:

Open

Opens the selected file in the editor.

Open with submenu

This submenu allows you to open the selected file with the internal editor, a system application, or other internal tools: [Archive Browser](#), [Generate/Convert Schema](#), [WSDL/SOAP Analyzer](#), [Large File Viewer](#), [Hex Viewer](#), [SVG Viewer](#).

Open All Files (when a folder or multiple resources are selected)

Opens all the selected files with the corresponding editors.

Show in Explorer (or Show in Finder on OS X)

In Windows, the content of the selected folder or file is presented in a specific explorer window. On MAC OS X, the parent folder is opened and the selected folder is highlighted in a specific finder window.

Copy Location

Copies an application-specific URL for the selected resource to the clipboard.

Refresh

Refreshes the content and the dependencies between the resources in [the Master Files directory](#).

Find/Replace in Files

Allows you to [find and replace text in multiple files](#).

XPath in Files

Opens the [XPath/XQuery Builder view](#) that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.

Open/Find Resource

Opens the [Open/Find Resource dialog box](#).

Check Spelling in Files

Allows you to [check the spelling of multiple files](#).

Format and Indent Files

Opens the [Format and Indent Files dialog box](#) that allows you to configure the format and indent (pretty print) action that will be applied on the selected documents.

Open in SVN Client

[Syncro SVN Client](#) tool is opened and it highlights the selected resource in its corresponding working copy.

Compare

Opens [the Compare Directories or Compare Files tool](#).

Generate Documentation > XML Schema Documentation

Opens [the XML Schema Documentation Dialog Box](#).

Generate Documentation > XSLT Stylesheet Documentation

Opens [the XSLT Stylesheet Documentation Dialog Box](#).

Generate Documentation > XQuery Documentation

Opens [the XQuery Documentation Dialog Box](#).

Generate Documentation > WSDL Documentation

Opens [the WSDL Documentation Dialog Box](#).

Properties

Displays the properties of the current file in a **Properties** dialog box.

Menu Level Actions

The following actions are available in the **Project** menu:



New Project

Creates a new, empty project.



Open Project (Ctrl F2 (Meta F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Save Project As

Allows you to save the current project under a different name.



Validate all project files

Checks if the project files are well-formed and their mark-up conforms with the specified DTD, XML Schema, or Relax NG schema rules. It returns an error list in the message panel.



Filters

Opens the **Project filters** dialog box that allows you to decide which files and directories will be shown or hidden.

Enable Master Files Support

Allows you to enable the *Master Files Support* for each project you are working on.



Change Search and Refactor operations scope

Opens a dialog box that allows you to define the context of search and refactor operations.

Show Project View

Displays the project view.

Reopen Project

Contains a list of links of previously used projects. This list can be emptied by invoking the **Clear history** action.

Moving/Renaming Resources in the Project View

The **Project** view allows you to move or rename files in the current project.

Moving Resources

To move a file or directory in the **Project** view, drag and drop it to the new location in the tree structure or use the



Cut and



Paste actions from the contextual menu or **Edit** menu (you can also use the



Copy and



Paste actions from the contextual menu or **Edit** menu to copy resources to a new location).

You can also move certain types of files (such as XML, XML Schema, Relax NG, WSDL, and XSLT) by using the **Refactoring > Move resource** action from the contextual menu. This action opens the **Move resource** dialog box that includes the following options:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, based upon the selected scope. You can *select or configure the scope* by using the  button.

Renaming Resources

To quickly rename a file or a directory, use the in-place editing either by pressing **F2** or by selecting **Rename** from the contextual menu.

You can also rename certain types of files (such as XML, XML Schema, Relax NG, WSDL, and XSLT) by using the **Refactoring > Rename resource** action from the contextual menu. This action opens the **Rename resource** dialog box that includes the following options:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references of the renamed resource** - Enable this option to update the references to the resource you are renaming. You can [select or configure the scope](#) by using the  button.

Problems Updating References of Moved/Renamed Resources

In some case the references of a moved or a renamed resource can not be updated. For example, when a resource is resolved through an XML catalog or when the path to the moved or renamed resource contains entities. For these cases, Oxygen XML Developer displays a warning dialog box.

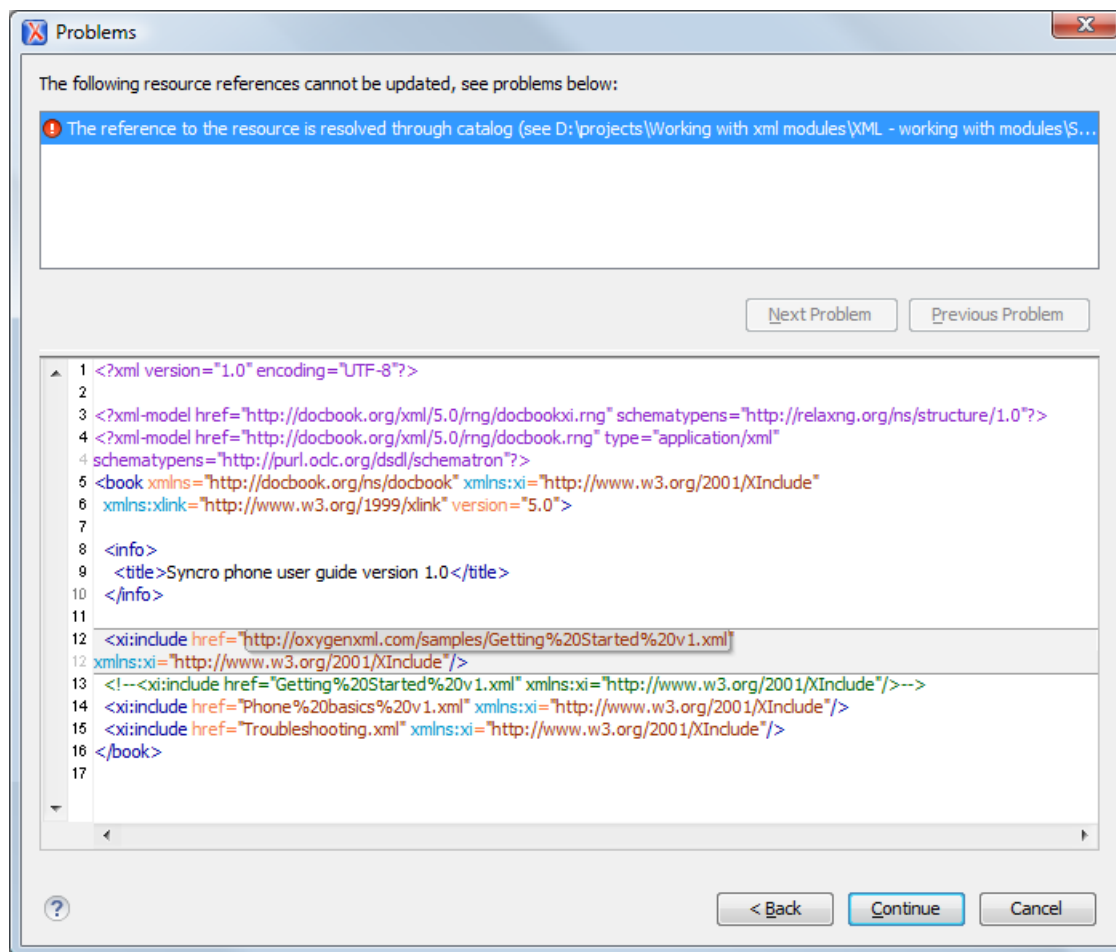


Figure 41: Problems Dialog Box

Sharing a Project - Team Collaboration

You can use XML projects to make team collaboration and synergy efficient and effective. Not only can you share the project files and folders, but Oxygen XML Developer also allows you to store preferences, transformation scenarios, and validation scenarios in a *project file* (.xpr file extension). It can be saved on a version control system (such as SVN, CVS, or Source Safe) or in a shared folder, so that your team will have access to the same resources stored in the project file.

Sharing Preferences (Creating a Project-Level Options File)

To share options that are configured in certain preferences pages, you can create a project-level options file by storing them in a *project file* (.xpr file extension). To do so, follow these steps:

1. You may want to use a fresh install for this procedure, to make sure that you do not copy personal or local preferences.
2. In [the Project view](#), create a project or open an existing one.
3. [Open the Preferences dialog box](#).
4. Configure the options in each preferences page that you want to be included in the project file and switch the storage preference to **Project Options** in each page.



Note: Some pages do not have the **Project Options** switch, since the options they host might contain sensitive data (such as passwords, for example) that is unsuitable for sharing with other users.

5. Click **OK** and close the **Preferences** dialog box.

All explicitly set values are now saved in the project file. You can then share the project file so that your team will have the same option configuration that you stored in the project file.



Note: The project file extension (.xpr) must be preserved when the file is distributed to others.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Sharing Transformation Scenarios

To share created and edited transformation scenarios, you can store them in a *project file* (.xpr file extension) by following these steps:

1. In [the Project view](#), create a project or open an existing one.
2. When you create a new transformation scenario or edit an existing one, there is a **Storage** option. Switch the storage preference to **Project Options** in each transformation scenario you want to be included in the project file.
3. Click **OK** to store the scenario in the project file.

You can then share the project file so that your team will have access to the same transformation scenarios that you stored in the project file. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.



Note: The project file extension (.xpr) must be preserved when the file is distributed to others.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Sharing Validation Scenarios

To share created and edited validation scenarios, you can store them in a *project file* (.xpr file extension) by following these steps:

1. In [the Project view](#), create a project or open an existing one.
2. When you create a new validation scenario or edit an existing one, there is a **Storage** option. Switch the storage preference to **Project Options** in each validation scenario you want to be included in the project file.
3. Click **OK** to store the scenario in the project file.

You can then share the project file so that your team will have access to the same validation scenarios that you stored in the project file. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.



Note: The project file extension (.xpr) must be preserved when the file is distributed to others.



Note: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Syncro SVN Client (Apache Subversion™)

To assist you with team collaboration and sharing projects, Oxygen XML Developer includes an embedded [SVN \(Subversion\) Client](#). Even if you start developing a new project, or you want to migrate an existing one to Subversion, the Syncro SVN Client allows you to easily share it with the rest of your team.

It can be accessed from the **Tools** menu and can be used for synchronizing your working copy with a central repository.

It can also be started by selecting the  **Open in SVN Client** action from the contextual menu of the **Project** view. This action opens the Syncro SVN Client and shows the selected project file in the **Working Copy** view.

Minimize Differences Between Versions Saved on Different Computers

The number of differences between versions of the same file saved by different content authors on different computers can be minimized by imposing the same set of formatting options when saving the file, for all the content authors. An example, the following procedure can be used to minimize the differences:

1. Create an Oxygen XML Developer project file that will be shared by all content authors.
2. Configure your own formatting preferences. To do this, [open the Preferences dialog box](#), go to **Editor > Format**, configure the appropriate options in this page, then go to **Editor > Format > XML** and configure the options there.
3. Save the configured options into your project file by selecting **Project Options** in both of the preferences pages.
4. Save the project and commit the project file to your versioning system so all the content authors can use it.
5. Make sure the project is opened in the **Project** view.
6. Open and save your XML files in the **Author** mode.
7. Commit the saved XML files to your versioning system.

When other content authors change the files, only the changed lines will be displayed in your diff tool instead of one big change that does not allow you to see the changes between two versions of the file.

Defining Master Files at Project Level

This chapter details the **Master Files Support** available in Oxygen XML Developer.

The **Master Files Support** helps you simplify the configuration and development of XML projects. A *Master File* typically refers to the root of an import/include tree of modules.

Introduction to Master Files at Project Level

Oxygen XML Developer allows you to define *master files* at project level. These *master files* are automatically used by Oxygen XML Developer to determine the context for operations such as validation, content completion, refactoring, or search for XML, XSD, XSL, WSDL, and RNG modules. Oxygen XML Developer maintains the hierarchy of the *master files*, helping you to determine the editing context.

To watch our video demonstration about the **Master Files Support** for XML documents, XSL documents, and WSDL documents, go to [Working with Modular XML Files](#), [Master Files Support](#), and [Working with Modular WSDL Files](#), respectively.

Master Files Benefits

When you edit a module after defining the *master files*, you have the following benefits:

- When the module is validated, Oxygen XML Developer automatically identifies the *master files* that include the module and validates all of them.
- The [Content Completion Assistant](#) presents all the components that are collected, from the *master files* to the modules they include.
- The **Outline** view displays all the components that are defined in the *master files* hierarchy.
- The *master files* that are defined for the current module determines the [scope of the search and refactoring actions](#). Oxygen XML Developer performs the search and refactoring actions in the context that the *master files* determine, thus improving the speed of execution.

Enabling the Master Files Support

Oxygen XML Developer stores the *master files* in a folder located in the **Project** view, as the first child of the project root. The **Master Files Support** is disabled by default. To enable the **Master Files Support**, go to the **Settings** menu of the **Project** view and select **Enable Master Files Support**. You can also select **Enable Master Files Support** from the contextual menu of the **Master Files** directory, or from the contextual menu of the project itself. Oxygen XML Developer allows you to enable/disable the **Master Files Support** for each project you are working on.

When the **Master Files Support** is disabled, Oxygen XML Developer displays a window tip located at the bottom of the project view. This window contains an **Enable** button and a **read more** option. Clicking the **read more** option takes you to the user guide. Clicking the **Enable** button opens the **Enable Master Files** dialog box. This dialog box contains general information about the **Master Files Support** and allows you to enable it. You can also use the **Detect and Enable** option to detect the *master files* from the current project.



Note: Once you close this window tip, Oxygen XML Developer hides it for all projects. To make the window tip reappear, restore Oxygen XML Developer to its default settings.



Warning: Restoring Oxygen XML Developer to its default settings causes loss of your customized options.

Detecting Master Files

Oxygen XML Developer allows you to detect the *master files* using the  **Detect Master Files** option available in the contextual menu of the project. This action applies to the folders you select in the project. To detect *master files* over the entire project, do one of the following:

- Right-click the root of the project and select  **Detect Master Files**.
- Use the  **Detect Master Files from Project** option, available in the contextual menu of the **Master Files** folder.

Both of these options display the **Detect Master Files** wizard. In the first panel you can select the type of *master files* you want Oxygen XML Developer to detect. In the subsequent panel the detected *master files* are presented in a tree-like fashion. The resources are grouped into three categories:

- Possible *master files* - the files presented on the first level in this category are not imported/included from other files. These files are most likely to be set as *master files*.
- Cycles - the files that are presented on the first level have circular dependencies between them. Any of the files presented on the first level of a cycle is a possible *master file*.
- Standalone - files that do not include/import other files and are also not included/imported themselves. It is not necessary to set them as *master files*.

To set them as *master files*, enable their check-boxes. Oxygen XML Developer marks all the children of a *master file* as modules. Modules are rendered in gray and their tool-tip presents a list of their *master files*. A module can be accessed from more than one *master file*.

The *master files* that are already defined in the project are automatically marked in the tree and cannot be removed. The only way to disable a *master file* is to delete it from the **Master Files** folder.

The next panel displays a list with the selected *master files*. Click the **Finish** button to add the *master files* in the **Master Files** folder.

You can use the **Select Master Files** option to automatically mark all *master files*. This action sets all the resources from the **Possible Master Files** category and the first resource of each **Cycle** as *master files*.



Tip: We recommend you to only add top-level files (files that are at the root of the include/import graph) in the **Master Files** directory. Keep the file set to a minimum and only add files that import or include other files.



Attention: If the **Master Files Support** is disabled, the **Master Files** directory is rendered only if it contains *master files*.

Adding/Removing a Master File

The **Master Files** directory only contains logical folders and linked files. To add files in the **Master Files** directory, use one of the following methods:

- Right-click a file from your project and select  **Add to Master Files** from the contextual menu.
- Select  **Add Files** or  **Add Edited File** from the contextual menu of the **Master Files** directory.
- Drag and drop files into the **Master Files** directory.
- From the contextual menu of the  **Resource Hierarchy Dependencies** view, use the  **Add to Master Files** action.

You can view the *master files* for the current resource in the **Properties** dialog of the **Project** view and the *master files* for the current editor in the **Properties** and **Information** views.

Project Validation and Transformation

The **Master Files Support** is also useful for project level validation and transformation. When you hover the cursor over a file in the **Master Files** directory, Oxygen XML Developer displays the  **Validate** and  **Transform** buttons at the right of the file. Select one of these buttons to run a transformation, or validation scenario. If the current node is selected, Oxygen XML Developer executes a batch transformation and validation. If the current node is not selected, Oxygen XML Developer executes the validation and transformation for the current node only. The behavior of these actions is the same as the behavior of the transformation actions that are available in the contextual menu.

 **Note:** The tooltip of the  **Validate** and  **Transform** buttons displays the associated scenarios that you can apply.

When you hover the cursor over the **Master Files** directory itself, apart from the  **Validate** and  **Transform** buttons, Oxygen XML Developer displays a  **Help** button. To open the **Help** section regarding the **Master Files Support** click this button, or press **F1** on your keyboard.

The Contextual Menu of the Master Files

The contextual menu of the **Master Files** directory contains the following actions:

New

Allows you to create a **File**, **Logical Folder**, or **Project**.

Add Files

Allows you to add *master files* to the **Master Files** directory.

Add Edited File

Use this option to add the currently edited file to the **Master Files** directory.

Open All Files

Opens all the files of the **Master Files** directory.

Paste

Pastes the files you copy in the **Master Files** directory.

Rename

Allows you to rename a file in the **Master Files** directory.

Refresh

Refreshes the content of the **Master Files** directory.

Find/Replace in Files

Opens the [Find/Replace dialog box](#).

//* XPath in Files

Opens the *[XPath/XQuery Builder view](#)* that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.

 Open/Find Resource

Opens the *[Open/Find Resource dialog box](#)*.

 Check Spelling in Files

Opens the *[Check Spelling in Files dialog box](#)*.

Transform

Provides access to one of the following actions:

 Apply Transformations Scenario(s)

Applies the transformation scenarios associated with the **Master Files** directory.

 Configure Transformation Scenario(s)

Opens the *[Configure Transformation Scenario dialog box](#)*.

 Transform with

Opens the **Transform with** dialog box that allows you to select the transformation scenario you want to execute.

Validate

Provides access to one of the following actions:

 Check Well-Formedness

Allows you to check if a document is *Namespace Well-Formed XML*.

 Validate

Oxygen XML Developer performs the validation of the *master files*.

Validate with Schema

Opens the **Validate with** dialog box. Oxygen XML Developer performs the validation of the *master files* using a schema.

 Configure Validation Scenario(s)

Opens the *[Configure Validation Scenario dialog box](#)*.

 Detect Master Files from Project

Enables automatic detection of *master files*.

Enable Master Files Support

Select this option to enable the **Master Files Support**.

Editing XML Documents

This section explains the XML editing features of the application. All the user interface components and actions available to users are described in detail with appropriate procedures for various tasks.

Editing XML Documents in Text Mode

This section includes features and actions for editing XML documents in the **Text** mode of Oxygen XML Developer.

Contextual Menu Actions in Text Mode

When editing XML documents in **Text** mode, Oxygen XML Developer provides the following actions in the contextual menu (many of them also appear in the submenus of the **Document** menu):

 Cut, **Copy**, **Paste**

Executes the typical editing actions on the currently selected content.

Copy XPath

Copies the XPath expression of the current element or attribute from the current editor to the clipboard.

 Toggle Comment (Ctrl Shift Comma (Meta Shift M on OS X))

Comments the current selection of the current editor. If the selection already contains a comment the action removes the comment from around the selection. If there is no selection in the current editor and the cursor is not positioned inside a comment the current line is commented. If the cursor is positioned inside a comment then the commented text is uncommented.

Go to submenu

This submenu includes the following actions:

 Go to Matching Tag (Ctrl Shift G)

Moves the cursor to the end tag that matches the start tag, or vice versa.

Go after Next Tag (Ctrl Close Bracket (Meta Close Bracket on OS X))

Moves the cursor to the end of the next tag.

Go after Previous Tag (Ctrl Open Bracket (Meta Open Bracket on OS X))

Moves the cursor to the end of the previous tag.

Select submenu

This submenu allows you to select the following:

Element

Selects the entire element at the current cursor position.

Content

Selects the entire content of the element at the current cursor position, excluding the start and end tag. Performing this action repeatedly will result in the selection of the content of the ancestor of the currently selected element content.

Attributes

Selects all the attributes of the element at the current cursor position.

Parent

Selects the parent of the element at the current cursor position.

Source submenu

This submenu includes the following actions:

 Shift Right (Tab)

Shifts the currently selected block to the right.

 Shift Left (Shift Tab)

Shifts the currently selected block to the left.

 Indent selection (Ctrl I (Meta I on OS X))

Corrects the indentation of the selected block of lines if it does not follow the current *indenting preferences*.

 Escape Selection

Escapes a range of characters by replacing them with the corresponding character entities.

 Unescape Selection

Replaces the character entities with the corresponding characters.

 Format and Indent Element (Ctrl Shift I (Meta Shift I on OS X))

Pretty prints the element that surrounds the current cursor position.

To Upper Case

Converts the content selection to upper case characters.

To Lower Case

Converts the content selection to lower case characters.

Capitalize Lines

It capitalizes the first letter found on every new line that is selected. Only the first letter is affected, the rest of the line remains the same. If the first character on the new line is not a letter then no changes are made.

Convert Hexadecimal Sequence to Character (Alt X (Meta Shift X on OS X))

Converts a sequence of hexadecimal characters to the corresponding Unicode character. A valid hexadecimal sequence can be composed of 2 to 4 hexadecimal characters, preceded or not by the 0x or 0X prefix. Examples of valid sequences: 0x0045, 0X0125, 1253, 265, 43.

To convert a hexadecimal sequence to a character, do one of the following:

- place the cursor at the right side of a valid hexadecimal sequence, then press **Alt X (Meta Shift X on OS X)** on your keyboard
- select a valid hexadecimal sequence, then press **Alt X (Meta Shift X on OS X)** on your keyboard

Join and Normalize Lines (Ctrl J (Meta J on OS X))

For the current selection, this action joins the lines by replacing the *line separator* with a single space character. It also normalizes the whitespaces by replacing a sequence of such characters with a single space.

Insert new line after (Ctrl Alt Enter (Meta Alt Enter on OS X))

This action has the same result as moving the cursor to the end of the current line and pressing the *ENTER* key.

**Insert XInclude**

Displays a dialog box that allows you to browse and select the content to be included and automatically generates the corresponding XInclude instruction.



Note: In the **Author** mode, this dialog box presents a preview of the inserted document as an author page in the **preview** tab and as a text page in the **Source** tab. In the **Text** mode, the **Source** tab is presented.

**Import entities list**

Displays a dialog box that allows you to select a list of files as sources for external DTD entities. The internal subset of the DOCTYPE declaration of your document will be updated with the chosen entities. For instance, choosing the files `chapter1.xml` and `chapter2.xml` inserts the following section in the DOCTYPE:

```
<!ENTITY chapter1 SYSTEM "chapter1.xml">
<!ENTITY chapter2 SYSTEM "chapter2.xml">
```

**Lock / Unlock the XML Tags**

Disables or enables the ability to edit XML tags.

Canonicalize

Opens the **Canonicalize** dialog box that allows you to select a canonicalization algorithm to standardize the format of the document.

Sign

Opens the **Sign** dialog box that allows you to configure a digital signature for the document.

Verify Signature

Allows you to specify the location of a file to verify its digital signature.

Manage Highlighted Content submenu

This submenu is available from the contextual menu when it is invoked from a highlight after you perform a search operation or apply an XPath expression that highlights more than one result. The following options are available in this submenu:

Modify All

Allows you to modify (in-place) all the occurrences of the selected content. A thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Surround All

Surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.

Remove All

Removes all the highlighted content.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment in which the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

**Show Definition (Ctrl Shift Enter)**

Moves the cursor to the definition of the current element or attribute in the schema (DTD, XML Schema, Relax NG schema) associated with the edited XML document. If the current attribute is a “type” belonging to the “<http://www.w3.org/2001/XMLSchema-instance>” namespace, the cursor is moved in the XML schema to the definition of the type referenced in the value of the attribute.

Refactoring submenu

This submenu includes the following actions:

**Rename Element**

The element from the cursor position, and any elements with the same name, can be renamed according with the options from the **Rename** dialog box.

**Rename Prefix (Alt Shift P)**

The prefix of the element from the cursor position, and any elements with the same prefix, can be renamed according with the options from the **Rename** dialog box.

- If you select the **Rename current element prefix** option, the application will recursively traverse the current element and all its children.



Note: For example, to change the `xmlns:p1="ns1"` association in the current element to `xmlns:p5="ns1"`, if the `xmlns:p1="ns1"` association is applied on the parent element, then Oxygen XML Developer will introduce `xmlns:p5="ns1"` as a new declaration in the current element and will change the prefix from `p1` to `p5`. If `p5` is already associated with another namespace in the current element, then the conflict will be displayed in a dialog box. By pressing **OK**, the prefix is modified from `p1` to `p5` without inserting a new declaration.

- If you select the **Rename current prefix in all document** option, the application will apply the change on the entire document.
- To also apply the action inside attribute values, check the **Rename also attribute values that start with the same prefix** checkbox.

**Surround with submenu**

Presents a drop-down menu that allows you to choose a tag to surround a selected portion of content.

**Surround with Tags (Ctrl E (Meta E on OS X))**

Allows you to choose a tag that encloses a selected portion of content. If there is no selection, the start and end tags are inserted at the cursor position.

- If the **Cursor position between tags** option is enabled in the [Content Completion Preferences page](#), the cursor is placed between the start and end tag.

- If the **Cursor position between tags** option is disabled in the [Content Completion Preferences page](#), the cursor is placed at the end of the start tag, in an insert-attribute position.

Surround with ((Ctrl /))

Surround the selected content with the last tag used.

Delete element tags (Alt Shift X (Meta Alt X on OS X))

Deletes the start and end tag of the current element.

Split element (Alt Shift D (Ctrl Alt D on OS X))

Split the element from the cursor position into two identical elements. The cursor must be inside the element.

Join elements (Alt Shift J (Meta Alt J on OS X))

Joins the left and right elements relative to the current cursor position. The elements must have the same name, attributes, and attributes values.

Attributes submenu

Contains predefined XML refactoring operations that pertain to attributes. Oxygen XML Developer considers the editing context to get the names and namespaces of the element or attribute for which the contextual menu was invoked, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

Add/Change attribute

Allows you to change the value of an attribute or insert a new one.

Delete attribute

Allows you to remove one or more attributes.

Rename attribute

Allows you to rename an attribute.

Replace in attribute value

Allows you to search for a text fragment inside an attribute value and change the fragment to a new value.

Elements submenu

Contains predefined XML refactoring operations that pertain to elements. Oxygen XML Developer considers the editing context to get the names and namespaces of the element or attribute for which the contextual menu was invoked, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

Delete element

Allows you to delete elements.

Delete element content

Allows you to delete the content of elements.

Insert element

Allows you to insert new elements.

Rename element

Allows you to rename elements.

Unwrap element

Allows you to remove the surrounding tags of elements, while keeping the content unchanged.

Wrap element

Allows you to surround elements with element tags.

Wrap element content

Allows you to surround the content of elements with element tags.

Fragments submenu

Contains predefined XML refactoring operations that pertain to XML fragments. Oxygen XML Developer considers the editing context to get the names and namespaces of the element or attribute for which the contextual menu was invoked, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

Insert XML fragment

Allows you to insert an XML fragment.

Replace element content with XML fragment

Allows you to replace the content of elements with an XML fragment.

Replace element with XML fragment

Allows you to replace elements with an XML fragment.

Manage IDs submenu

This submenu is available for XML documents that have an associated DTD, XML Schema, or Relax NG schema. It includes the following actions:



Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and *choose the scope of the rename operation*. For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.



Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the *Select the scope for the Search and Refactor operations* dialog box, this scope will be used instead.

Search References in

Searches for the references of the ID. Selecting this action opens the *Select the scope for the Search and Refactor operations*.



Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the *Select the scope for the Search and Refactor operations* dialog box, this scope will be used instead.

Search Declarations in

Searches for the declaration of the ID reference. Selecting this action opens the *Select the scope for the Search and Refactor operations*.



Search Occurrences in file

Searches for the declaration and references of the ID in the current document.

Quick Assist (**Alt 1** (**Meta Alt 1** on OS X))

Available when the cursor is inside an ID or IDREF, this action opens the Quick Assist window that allows you to select some search and refactoring actions for the selected ID or IDREF.

Open submenu

The following actions are available in this submenu:

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or

the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Resource Hierarchy

Opens the **Resource Hierarchy/Dependencies** view that allows you to see the resource hierarchy for an XML document.

Resource Dependencies

Opens the **Resource Hierarchy/Dependencies** view that allows you to see the resource dependencies for an XML document.

Smart Editing

Oxygen XML Developer includes *smart editing* features to help you edit XML documents in **Text** mode. The following smart editing features are included:

- *Closing tag auto-expansion* - This feature helps save some keystrokes by automatically inserting a closing tag when you insert a complete start tag and the cursor is automatically placed in between the start and end tags. For instance, after entering a start `<tag>`, the corresponding closing `</tag>` is automatically inserted and the cursor is placed between the two (`<tag>|</tag>`).
- *Auto-rename matching tag* - When you edit the name of a start tag, Oxygen XML Developer will mirror-edit the name of the matching end tag. This feature can be controlled from the [Content Completion option page](#).
- *Auto-breaking the edited line* - The [Hard line wrap option](#) automatically breaks the edited line when its length exceeds the maximum line length [defined for the format and indent operation](#).
- *Indent on Enter* - The [Indent on Enter option](#) indents the new line inserted when you press **Enter**.
- *Smart Enter* - The [Smart Enter option](#) inserts an empty line between the start and end tags. If you press **Enter** between a start and end tag, the action places the cursor in an indented position on the empty line between the lines that contain the start and end tag.
- *Double-click* - A double-click selects a certain text, depending on the position of the click in the document:
 - If the click position is on a start tag or end tag, then the element name is selected.
 - If the click position is immediately after the opening quote or immediately before the closing quote of an attribute value, then the entire attribute value is selected.
 - Otherwise, a double-click selects contiguous text.
- *Triple-click* - A triple-click selects entire regions of text, depending on the click position:
 - If the click position is on a start or end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is after a start tag or before an end tag, then the entire content of the element without the start and end tags is selected.
 - If the click position is before a start tag or after an end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is immediately before an attribute, then the entire attribute and its value is selected.
 - If the click position is in between the opening and closing quotes of an attribute value, then the entire attribute value is selected.
 - Otherwise, it selects the entire current line of text.

Using the Go To Dialog Box

To navigate precisely to a part of the document you are editing in the **Text** mode, use the **Go to** dialog box. To open the **Go to** dialog box, go to **Find > Go to (Ctrl+L (Cmd+L on Mac))**.

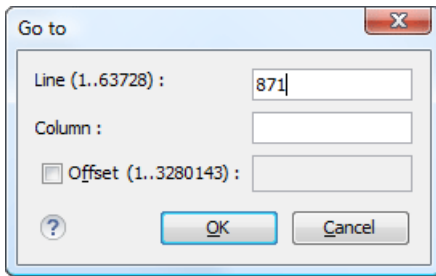


Figure 42: Go to Dialog Box

Complete the dialog box as follows:

- **Line** - Destination line in the current document.
- **Column** - Destination column in the current document.
- **Offset** - Destination offset relative to the beginning of document.

Highlight ID Occurrences in Text Mode

To see the occurrences of an ID in an XML document in the **Text** mode, place the cursor inside the ID declaration or reference. The occurrences are marked in the vertical side bar at the right of the editor. Click a marker on the side bar to jump to the occurrence that it corresponds to. The occurrences are also highlighted in the editing area.



Note: Highlighted ID declarations are rendered with a different color than highlighted ID references. To customize these colors or disable this feature, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**.

Quick Assist Support for IDs and IDREFS

The Quick Assist support is activated automatically when you place the cursor inside an ID or an IDREF. To access it, click the yellow bulb help marker placed on the current line, in the line number stripe of the editor. You can also invoke the quick assist menu from the contextual menu or by pressing **Alt 1 (Meta Alt 1 on Mac OS X)** on your keyboard.

The following actions are available:



Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.



Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.



Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.



Change scope

Opens the [Select the scope for the Search and Refactor operations](#) dialog box.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.



Search Occurrences

Searches for the declaration and references of the ID located at the cursor position in the current document.

Shortcut Actions in Text Mode

The **Text** editing mode allows you to use the following shortcut actions:

Ctrl Delete (Command Delete on OS X)

Deletes the next word.

Ctrl Backspace (Command Backspace on OS X)

Deletes the previous word.

Ctrl W (Meta W on OS X)

Cuts the previous word.

Ctrl K (Meta K on OS X)

Cuts to end of line.

Ctrl Single-Click (Command Single-Click on OS X)

Use this shortcut to open any of the following:

- Any absolute URL (URLs that have a protocol), regardless of their location in the document.
- URI attributes such as: *schemaLocation*, *noNamespaceSchemaLocation*, *href* and others.
- Processing instructions used for associating resources, xml-models, xml-stylesheets.

Ctrl Shift Y (Meta Shift Y on OS X) (Document > Edit > Toggle Line Wrap)

Enables or disables line wrapping. When enabled, if text exceeds the width of the displayed editor, content is wrapped so that you do not have to scroll horizontally.

Inserting or Opening a File at Cursor Location

When editing content in **Text** mode, the following actions (in regards to inserting, opening, or comparing files) are available in the **Document > File** menu:

Insert File

Inserts the content of the file with the specified file path into the current document, at the current position of the cursor.

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Formatting and Indenting XML Documents

Oxygen XML Developer creates XML documents using several different *edit modes*. In *text mode*, you as the author decide how the XML file is formatted and indented. In the other modes, and when you switch between modes, Oxygen XML Developer must decide how to format and indent the XML. Oxygen XML Developer will also format and indent your XML for you in text mode if you use one of the Format and Indent options:

- **Document > Source >  Format and Indent** - Formats and indents the whole document.
- **Document > Source >  Indent Selection** - Indents the current selection (but does not add line breaks). This action is also available in the **Source** submenu of the contextual menu.

- **Document > Source >  Format and Indent Element** - Formats and indents the current element (the inmost nested element which currently contains the cursor) and its child-elements. This action is also available in the **Source** submenu of the contextual menu.

A number of settings affect how Oxygen XML Developer formats and indents XML. Many of these settings have to do with how whitespace is handled.

Significant and insignificant whitespace in XML

XML documents are text files that describe complex documents. Some of the white space (spaces, tabs, line feeds, etc.) in the XML document belongs to the document it describes (such as the space between words in a paragraph) and some of it belongs to the XML document (such as a line break between two XML elements). Whitespace belonging to the XML file is called *insignificant whitespace*. The meaning of the XML would be the same if the insignificant whitespace were removed. Whitespace belonging to the document being described is called *significant whitespace*.

Knowing when whitespace is significant or insignificant is not always easy. For instance, a paragraph in an XML document might be laid out like this:

```
<p>
NO Freeman shall be taken or imprisoned, or be disseised of his Freehold, or Liberties, or
free Customs, or be outlawed, or exiled, or any other wise destroyed; nor will We not pass
upon him, nor condemn him, but by lawful judgment of his Peers, or by the <xref
href="http://en.wikipedia.org/wiki/Law_of_the_land" format="html" scope="external">Law of the land</xref>.
We will sell to no man, we will not deny or defer to any man either Justice or Right.
</p>
```

By default, XML considers a single whitespace between words to be significant, and all other whitespace to be insignificant. Thus the paragraph above could be written all on one line with no spaces between the start tag and the first word or between the last word and the end tag and the XML parser would see it as exactly the same paragraph. Removing the insignificant space in markup like this is called *normalizing space*.

In some cases, all the spaces inside an element should be treated as significant. For example, in a code sample:

```
<codeblock>
class HelloWorld
{
    public static void main(String args[])
    {
        System.out.println("Hello World");
    }
}
</codeblock>
```

Here every whitespace character between the `codeblock` tags should be treated as significant.

How Oxygen XML Developer determines when whitespace is significant

When Oxygen XML Developer formats and indents an XML document, it introduces or removes insignificant whitespace to produce a layout with reasonable line lengths and elements indented to show their place in the hierarchy of the document. To correctly format and indent the XML source, Oxygen XML Developer needs to know when to treat whitespace as significant and when to treat it as insignificant. However it is not always possible to tell this from the XML source file alone. To determine what whitespace is significant, Oxygen XML Developer assigns each element in the document to one of four categories:

Ignore space

In the ignore space category, all whitespace is considered insignificant. This generally applies to content that consists only of elements nested inside other elements, with no text content.

Normalize space

In the normalize space category, a single whitespace character between character strings is considered significant and all other spaces are considered insignificant. This generally applies to elements that contain text content only. This content can be normalized by removing insignificant whitespace. Insignificant whitespace may then be added to format and indent the content.

Mixed content

In the mixed content category, a single whitespace between text characters is considered significant and all other spaces are considered insignificant. However,

- Whitespace between two child elements embedded in the text is normalized to a single space (rather than to zero spaces as would normally be the case for a text node with only whitespace characters, or the space between elements generally).
- The lack of whitespace between a child element embedded in the text and either adjacent text or another child element is considered significant. That is, no whitespace can be introduced here when formatting and indenting the file.

For example:

```
<p>The file is located in <i>HOME</i>/<i>USER</i>/hello. This is s <strong>big</strong>
<emphasis>deal</emphasis>.
</p>
```

In this example, whitespace should not be introduced around the `i` tags as it would introduce extra significant whitespace into the document. The space between the end `</strong>` tag and the beginning `<emphasis>` tag should be normalized to a single space, not zero spaces.

Preserve space

In the preserve space category, all whitespace in the element is regarded as significant. No changes are made to the spaces in elements in this category. Note, however, that child elements may be in a different category, and may be treated differently.

Attribute values are always in the preserve space category. The spaces between attributes in an element tag are always in the default space category.

Oxygen XML Developer consults several pieces of information to assign an element to one of these categories. An element is always assigned to the most restrictive category (from Ignore to Preserve) that it is assigned to by any of the sources Oxygen XML Developer consults. For instance, if the element is named on the **Default elements** list (as described below) but it has an `xml:space="preserve"` attribute in the source file, it will be assigned to the preserve space category. If an element has the `xml:space="default"` attribute in the source, but is listed on the **Mixed content** elements list, it will be assigned to the mixed content category.

To assign elements to these categories, Oxygen XML Developer consults information from the following sources:

xml:space

If the XML element contains the `xml:space` attribute, the element is promoted to the appropriate category based on the value of the attribute.

Schema aware formatting

If a schema is available for the XML document, Oxygen XML Developer can use information from the schema to promote the element to the appropriate category. For example:

- If the schema declares an element to be of type `xs:string`, the element will be promoted to the preserve space category because the string built-in type has the whitespace facet with the value preserve.
- If the schema declares an element to be mixed content, it will be promoted to the mixed content category.

Schema aware formatting can be turned on and off.

- To turn it on or off for the Text editing mode, *open the [Preferences dialog box](#)* and go to **Editor > Format > XML > Schema aware format and indent**.

Preserve space elements list

If an element is listed in the **Preserve space** list in the [XML formatting preferences](#), it is promoted to the preserve space category.

Default space elements list

If an element is listed in the **Default space** list in the [XML formatting preferences](#), it is promoted to the default space category.

Mixed content elements list

If an element is listed in the **Mixed content** list in the [XML formatting preferences](#), it is promoted to the mixed content category.

Element content

If an element contains mixed content, that is, a mix of text and other elements, it is promoted to the mixed content category. (Note that, in accordance with these rules, this happens even if the schema declares the element to have element only content.)

If an element contains text content, it is promoted to the default space category.

Text node content

If a text node contains any non-whitespace characters then the text node is promoted to the normalize space category.

How Oxygen XML Developer formats and indents XML

You can control how Oxygen XML Developer formats and indents XML documents. This can be particularly important if you store your XML document in a version control system, as it allows you to limit the number of trivial changes in spacing between versions of an XML document. The following settings pages control how XML documents are formatted:

- [Format Preferences](#) on page 752
- [XML Formatting Preferences](#) on page 753
- [Whitespaces Preferences](#) on page 755

When Oxygen XML Developer formats and indents XML

Oxygen XML Developer formats and indents a document, or part of it, on the following occasions:

- In text mode when you select one of the format and indent options (**Document > Source > Format and Indent**, **Document > Source > Indent Selection**, or **Document > Source > Format and Indent Element**).
- When saving documents in **Design** mode.
- When switching from **Design** mode to another mode.
- When saving or switching to **Text** mode from **Grid** mode, if the option [Editor / Edit modes / Grid / Format and indent when passing from grid to text or on save](#) is selected.

Setting an Indent Size to Zero

Oxygen XML Developer will automatically [format and indent](#) documents at certain times. This includes indenting the content from the margin to reflect its structure. In some cases you may not want your content indented. To avoid your content being indented, you can set an indent size of zero.



Note: Changing the indent size does not override the rules that Oxygen XML Developer uses for handling whitespace when formatting and indenting XML documents. Indents in elements that require whitespace to be maintained will not have their indent changed by these settings.

There are two cases to consider.

Maintaining zero indent in documents with zero indent

If you have existing documents with zero indent and you want Oxygen XML Developer to maintain a zero indent when editing or formatting those documents:

1. [Open the Preferences dialog box](#) and go to **Editor > Format**.
2. Select **Detect indent on open**.
3. Select **Use zero-indent if detected**.

Oxygen XML Developer will examine the indent of each document as it is opened and if the indent is zero for all lines, or for nearly all lines, a zero indent will be used when formatting and indenting the document. Otherwise, Oxygen XML Developer will use the indent closest to what it detects in the document.

Enforcing zero indent for all documents

If you want all documents to be formatted with zero indent, regardless of their current indenting:

1. [Open the Preferences dialog box](#) and go to **Editor > Format**.
2. Deselect **Detect indent on open**.
3. Set **Indent size** to 0.

All documents will be formatted and indented with an indent of zero.

 **Warning:** Setting the indent size to zero can change the meaning of some file types, such as Python source files.

Format and Indent (Pretty Print) Multiple Files

Oxygen XML Developer provides support for formatting and indenting (*pretty printing*) multiple files at once. This action is available for any document in XML format, as well as for XQuery, CSS, JavaScript, and JSON documents.

To format and indent multiple files, use the  **Format and Indent Files** action that is available in the contextual menu of the **Project** view or from the **Tools** menu. This opens the **Format and Indent Files** dialog box that allows you to configure options for the action.

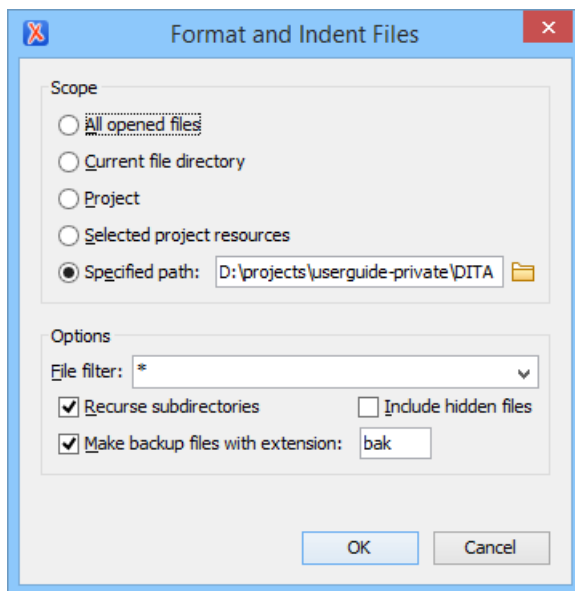


Figure 43: The Format and Indent Files Dialog Box

The **Scope** section allows you choose from the following scopes:

- **All opened files** - The *pretty print* is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - *Pretty prints* the files located at a specified path.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When enabled, the *pretty print* is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.

- **Include hidden files** - When enabled, the *pretty print* is also performed in the hidden files.
- **Make backup files with extension** - When enabled, Oxygen XML Developer makes backup files of the modified files. The default extension is `.bak`, but you can change the extension as you prefer.

Managing Highlighted Content

While working with XML documents you often have frequent changes to the structure and content. You are often faced with a situation where you need to make a slight change in multiple places in the same document. Oxygen XML Developer includes a feature, **Manage Highlighted Content**, that is designed to help you achieve this.

When you are in **Text** mode and you perform a search operation or apply an XPath that highlights more than one result, you can select the **Manage Highlighted Content** action from the contextual menu of any highlight in the document, and the following options are available in its submenu:

- **Modify All** - Use this option to modify (in-place) all the occurrences of the selected content. When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.



Note: If you select a very large number of highlights that you want to modify using this feature, a dialog box informs you that you may experience performance issues. You have the option to either use the **Find/Replace** operation, or continue the operation.

- **Surround All** - Use this option to surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.
- **Remove All** - Removes all the highlighted content.

If you right-click content in another part of the document, other than a highlight, you have the option to select the following option:

- **Modify All Matches** - Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment in which the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Editing XML Documents in Grid Mode

This section includes features and actions for editing XML documents in the **Grid** mode of Oxygen XML Developer.

Editing Actions in Grid Mode

In order to access these actions, you can click the column header and choose the **Table** item from the contextual menu. The same set of actions is available in the **Document** menu and on the **Grid** toolbar which is opened from menu **Window > Show Toolbar > Grid**.

Sorting a Table Column

You can sort certain table columns by using the  Sort ascending or  Sort descending actions that are available on the **Grid** toolbar or from the contextual menu.

The sorting result depends on the data type of the column content. It can be different in case of number (numerical sorting) or text information (alphabetical sorting). The editor automatically analyzes the content and decides what type of sorting to apply. When a mixed set of values is present in the sorted column, a dialog box is displayed that allows you to choose the desired type of sorting between *numerical* and *alphabetical*.

Inserting a Row in a Table

You can add a new row using the **Copy/Paste** actions, or by selecting  **Insert row** from the contextual menu or the **Grid** toolbar.

For a faster way to insert a new row, move the selection over the row header, and then press **Enter**. The row header is the zone in the left of the row that holds the row number. The new row is inserted below the selection.

Inserting a Column in a Table

You can insert a column after the selected column by using the  **Insert column** action from the contextual menu or the **Grid** toolbar.

Clearing the Content of a Column

You can clear all the cells from a column by using the **Clear content** action from the contextual menu.

Adding Nodes

You can add nodes before, after, or as a child of the currently selected node by using the various actions in the following submenus of the contextual menu:

- **Insert before** - Offers a list of valid nodes, depending on the context, and inserts your selection before the currently selected node, as a sibling.
- **Insert after** - Offers a list of valid nodes, depending on the context, and inserts your selection after the currently selected node, as a sibling.
- **Append child** - Offers a list of valid nodes, depending on the context, and appends your selection as a child of the currently selected node.

Duplicating Nodes

You can quickly create new nodes by duplicating existing ones. The **Duplicate** action is available in the contextual menu and in the **Document > Grid Edit** menu.

Refresh Layout

When using drag and drop to reorganize the document, the resulting layout can be different from the expected one. For instance, the layout can contain a set of sibling tables that can be joined together. To force the layout to be recomputed, you can use the  **Refresh selected** action that is available in the contextual menu and in the **Document > Grid Edit** menu.

Start and Stop Editing a Cell Value

To edit the value of a cell, simply select the grid cell and press **(Enter)** or you can use the  **Start Editing** action found in the **Document > Grid Edit** menu.

To stop editing a cell value, press **(Enter)** again or use the  **End Editing** action found in the **Document > Grid Edit** menu.

To cancel the editing without saving the current changes in the document, press the **(Esc)** key.

Drag and Drop in the Grid Editor

You are able to easily arrange different sections in your XML document in the **Grid** mode by using drag and drop actions.

You can do the following with drag and drop:

- Copy or move a set of nodes.
- Change the order of columns in the tables.
- Move the rows from the tables.

These operations are available for both single and multiple selections. To deselect one of the selected fragments, use **Ctrl Single-Click (Command Single-Click on OS X)**.

While dragging, the editor paints guide-lines showing the locations where you can drop the nodes. You can also drag nodes outside the **Grid** editor and text from other applications into the **Grid**. For more information, see [Copy and Paste in the Grid Editor](#).

Copy and Paste in the Grid Editor

The selection in the **Grid** mode is a bit complex compared to the selection in a text component. It consists of a current selected cell and additional selected cells. These additional cells are either selected with the cursor, or implied by the

currently selected cell. To be more specific, consider that you click the name of the column (this becomes the current selected cell), but the editor automatically extends the selection so that it contains all the cells from that column. The current selected cell is painted with a color that is different from the rest of the selection.

You can select discontinuous regions of nodes and place them in the clipboard using the copy action. To deselect one of the selected fragments, use **Ctrl Single-Click (Command Single-Click on OS X)**. Pasting these nodes relative to the current selected cell may be done in two ways: just below (after) as a brother, which is the default behavior, or as the last child of the selected cell.

The **Paste as Child** action is available in the contextual menu.

The same action can be found in the menu **Document > Grid Edit > Paste as Child**.

The nodes copied from the **Grid** editor can also be pasted into the **Text** editor or other applications. When copying from the **Grid** into the **Text** editor or other text based applications, the inserted string represents the nodes serialization. The nodes from tables can be copied using HTML or RTF in table format. The resulting cells contain only the concatenated values of the text nodes.

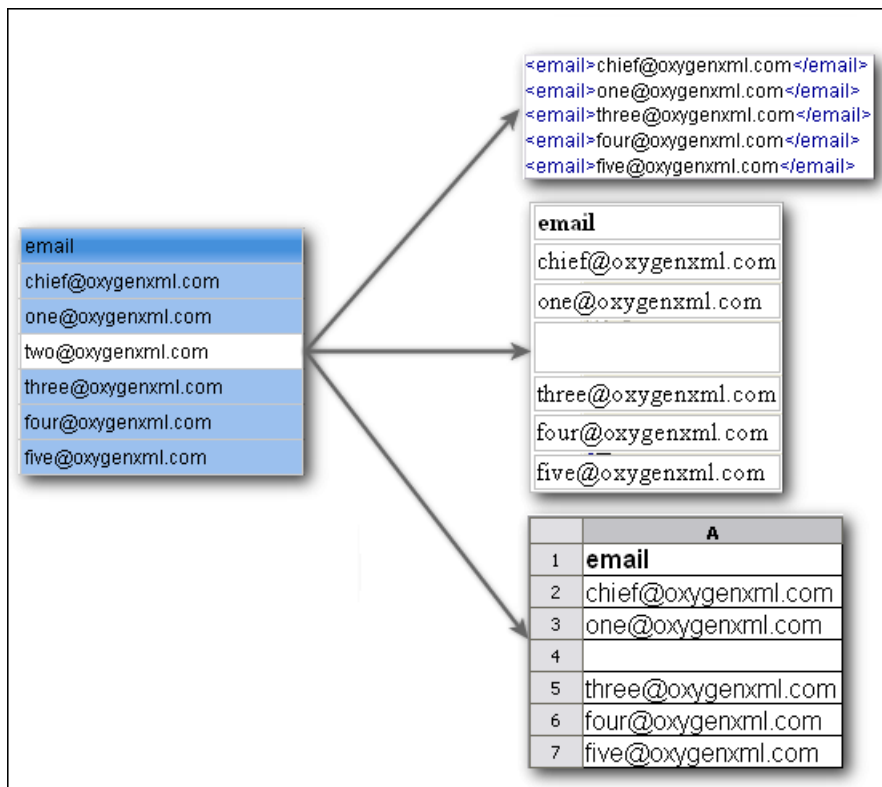


Figure 44: Copying from Grid to Other Editors

In the **Grid** editor you can paste well-formed XML content or tab separated values from other editors. If you paste XML content, the result will be the insertion of the nodes obtained by parsing this content.

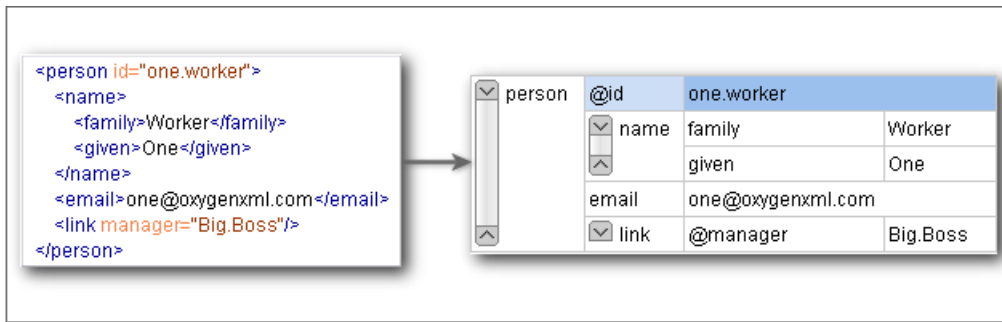


Figure 45: Copying XML Data into Grid

If the pasted text contains multiple lines of tab separated values it can be considered as a matrix of values. By pasting this matrix of values into the **Grid** editor the result will be a matrix of cells. If the operation is performed inside existing cells, the existing values will be overwritten and new cells will be created when needed. This is useful, for example, when trying to transfer data from Excel like editors into the **Grid** editor.



Figure 46: Copying Tab Separated Values into Grid

Associate a Schema to a Document

This section explains the methods of associating a schema to a document for validation and content completion purposes.

Setting a Schema for Content Completion

This section explains the available methods of setting a schema for content completion in an XML document edited in Oxygen XML Developer.

Supported Schema Types for XML Documents

The supported schema types are:

- W3C XML Schema 1.0 and 1.1 (with and without embedded Schematron rules);
- DTD;
- Relax NG - XML syntax (with and without embedded Schematron rules);
- Relax NG - compact syntax;
- NVDL;
- Schematron (both ISO Schematron and Schematron 1.5).

Setting a Default Schema

When trying to detect a schema, Oxygen XML Developer searches in multiple locations, in the exact following order:

- The *validation scenario* associated with the document.
- The validation scenario associated with the document type (if defined).
- The document schema declaration.
- The document type schema definition. Each document type available in [Document Type Association preferences page](#) contains a set of rules for associating a schema with the current document.



Note: The locations are sorted by priority, from high to low.

The schema has one of the following types: XML Schema, XML Schema with embedded Schematron rules, Relax NG (XML syntax or compact syntax), Relax NG (XML syntax) with embedded Schematron rules, Schematron, DTD, NVDL.

The rules are applied in the order they appear in the table and take into account the local name of the root element, the default namespace and the file name of the document.



Important:

The editor is creating the content completion lists by analysing the specified schema and the current context (the position in the editor). If you change the schema, then the list of tags to be inserted is updated.

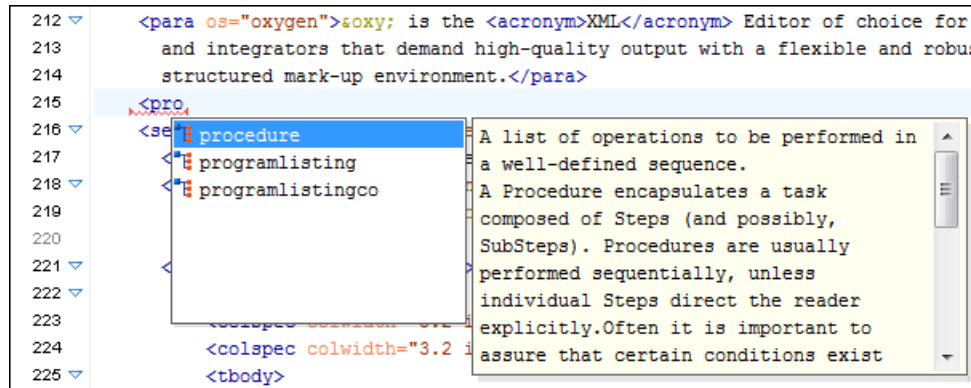


Figure 47: Content Completion Driven by DocBook DTD

Making the Schema Association Explicit in the XML Instance Document

The schema used by the [Content Completion Assistant](#) and [document validation](#) engine can be associated with the document using the **Associate Schema** action. For most of the schema types, it uses [the xml-model processing instruction](#), the exceptions being:

- **W3C XML Schema** - The `xsi:schemaLocation` attribute is used.
- **DTD** - The DOCTYPE declaration is used.

The association can specify a relative file path or a URL of the schema. The advantage of relative file path is that you can configure the schema at file level instead of document type level.

Select the **Associate schema** action from the **Document > Schema** menu or the **Document** toolbar to select the schema that will be associated with the XML document. The **Associate Schema** dialog box is displayed:

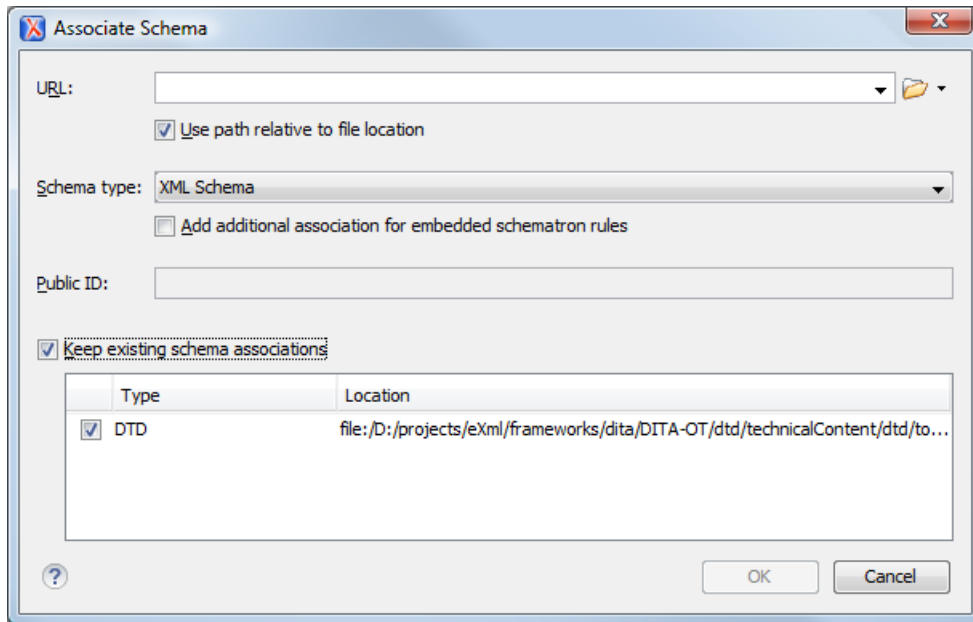


Figure 48: The Associate Schema Dialog Box

The available options are:

- **URL** - Contains a predefined set of schemas that are used more often and it also keeps a history of the last used schemas. The URL must point to the schema file which can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#).
- **Schema type** - Selected automatically from the list of possible types in the **Schema type** combo box (XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, NVDL) based on the extension of the schema file that was entered in the **URL** field.
- **Public ID** - Specify a public ID if you have selected a DTD.
- **Add additional association for embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules, enable this option.
- **Use path relative to file location** - Enable this option if the XML instance document and the associated schema contain relative paths. The location of the schema file is inserted in the XML instance document as a relative file path. This practice allows you, for example, to share these documents with other users, without running into problems caused by different project locations on physical disk.
- **Keep existing schema associations** - Enable this option to keep the associations of the currently edited document with a Schema when you associate a new one.

The association with an XML Schema is added as an attribute of the root element. The **Associate schema** action adds one of the following:

- `xsi:schemaLocation` attribute, if the root element of the document sets a default namespace with an `xmlns` attribute.
- `xsi:noNamespaceSchemaLocation` attribute, if the root element does not set a default namespace.

The association with a DTD is added as a **DOCTYPE** declaration. The association with a Relax NG, Schematron or NVDL schema is added as [xml-model processing instruction](#).

Associating a Schema With the Namespace of the Root Element

The namespace of the root element of an XML document can be associated with an XML Schema using an [XML catalog](#). If there is no `xsi:schemaLocation` attribute on the root element and the [XML](#) document is not matched with a [document type](#), the namespace of the root element is searched in [the XML catalogs set in Preferences](#).

If the XML catalog contains an `uri` or `rewriteUri` or `delegateUri` element, its schema will be used by the application to drive the [content completion](#) and document [validation](#).

The xml-model Processing Instruction

The `xml-model` processing instruction associates a schema with the XML document that contains the processing instruction. It must be added at the beginning of the document, just after the XML prologue. The following code snippet contains an `xml-model` processing instruction declaration:

```
<?xml-model href="../../../schema.sch" type="application/xml" schematypens="http://purl.oclc.org/dsdl/schematron" phase="ALL" title="Main schema"?>
```

It is available in the *Content Completion Assistant*, before XML document root element, and includes the following attributes:

- **href** (required) - The schema file location.
- **type** - The content type of the schema. This is an optional attribute with the following possible values for each specified type:
 - DTD - The recommended value is `application/xml-dtd`.
 - W3C XML Schema - The recommended value is `application/xml`, or can be left unspecified.
 - RELAX NG XML Syntax - The recommended value is `application/xml`, or can be left unspecified.
 - RELAX NG Compact Syntax - The recommended value is `application/relax-ng-compact-syntax`.
 - Schematron - The recommended value is `application/xml`, or can be left unspecified.
 - NVDL - The recommended value is `application/xml`, or can be left unspecified.
- **schematypens** - The namespace for the schema language of the referenced schema with the following possible values:
 - DTD - Not specified.
 - W3C XML Schema - The recommended value is `http://www.w3.org/2001/XMLSchema`.
 - RELAX NG XML Syntax - The recommended value is `http://relaxng.org/ns/structure/1.0`.
 - RELAX NG Compact Syntax - Not specified.
 - Schematron - The recommended value is `http://purl.oclc.org/dsdl/schematron`.
 - NVDL - The recommended value is `http://purl.oclc.org/dsdl/nvdl/ns/structure/1.0`.
- **phase** - The phase name for the validation function in Schematron schema. This is an optional attribute. To run all phases from the Schematron, use the special `#ALL` value. If the phase is not specified, the default phase that is configured in the Schematron will be applied.
- **title** - The title for the associated schema. This is an optional attribute.

Older versions of Oxygen XML Developer used the `oxygen` processing instruction with the following attributes:

- **RNGSchema** - Specifies the path to the Relax NG schema that is associated with the current document.
- **type** - Specifies the type of Relax NG schema. It is used along with the **RNGSchema** attribute and can have the value `xml` or `compact`.
- **NVDLSchema** - Specifies the path to the NVDL schema that is associated with the current document.
- **SCHSchema** - Specifies the path to the SCH schema that is associated with the current document.



Note: Documents that use the `oxygen` processing instruction are compatible with newer versions of Oxygen XML Developer.

Learning Document Structure

When working with documents that do not specify a schema, or for which the schema is not known or does not exist, Oxygen XML Developer is able to learn and translate the document structure to a DTD. You can choose to save the learned structure to a file in order to provide a DTD as an initialization source for *content completion* and *document validation*. This feature is also useful for producing DTD's for documents containing personal or custom element types.

When you open a document that is not associated with a schema, Oxygen XML Developer automatically learns the document structure and uses it for *content completion*. To disable this feature you have to uncheck the checkbox *Learn on open document in the user preferences*.

Create a DTD from Learned Document Structure

When there is no schema associated with an XML document, Oxygen XML Developer can learn the document structure by parsing the document internally. This feature is enabled with [the option Learn on open document](#) that is available in the user preferences.

To create a DTD from the learned structure:

1. Open the XML document for which a DTD will be created.
2. Go to **Document > XML Document > Learn Structure (Ctrl Shift L (Meta Shift L on OS X))**.
The **Learn Structure** action reads the mark-up structure of the current document. The **Learn completed** message is displayed in the application's status bar when the action is finished.
3. Go to **Document > XML Document > Save Structure (Ctrl Shift S (Meta Shift S on OS X))** and enter the DTD file path.
4. Press the *Save* button.

Content Completion Assistant

The intelligent **Content Completion Assistant** available in Oxygen XML Developer enables rapid, in-line identification and insertion of structured language elements, attributes and, in some cases, their parameter options.

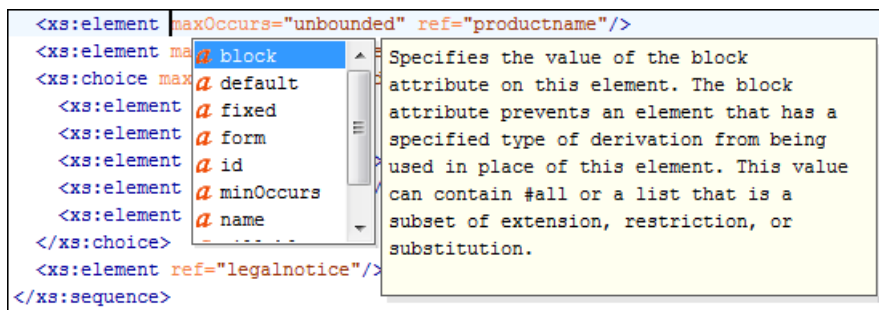


Figure 49: Content Completion Assistant

The functioning of the **Content Completion Assistant** feature is schema-driven (XML Schema, DTD, and RELAX NG). When Oxygen XML Developer detects a schema, it logs its URL in the [Information view](#).

The **Content Completion Assistant** is enabled by default. To disable it, [open the Preferences dialog box](#) and go to **Editor > Content Completion**. It is activated:

- Automatically, after a configurable delay from the last key press of the < character. You can adjust the delay [from the Content Completion preferences page](#).
- On demand, by pressing **Ctrl Space (Command Space on OS X)** on a partial element or attribute name.



Note: If the Content Completion list contains only one valid proposal, when you press the **Ctrl Space (Command Space on OS X)** shortcut key, the proposal is automatically inserted.



Note: You can also start the **Content Completion Assistant** from **Document > Content Completion > Start Content Completion**.

When active, it displays a list of context-sensitive proposals valid at the current cursor position. Elements are selected in the list using the Up and Down cursor keys on your keyboard. For each selected item in the list, the **Content Completion Assistant** displays a documentation window. You can customize the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected content, do one of the following:

- Press Enter or Tab key on your keyboard to insert both the start and end tags. The cursor is positioned inside the start tag, in a position suitable for inserting attributes.

- Press **Ctrl Enter (Meta Enter on OS X)** on your keyboard. Oxygen XML Developer inserts both the start and end tags and positions the cursor between the tags, so you can start typing content.



Note: When the DTD, XML Schema or RELAX NG schema specifies required child elements for the newly added element, they are inserted automatically only if the Add Element Content option (found in the [Content Completion preferences page](#)) is enabled. The **Content Completion Assistant** can also add optional content and first choice particle, as specified in the DTD or XML Schema or RELAX NG schema. To activate this feature, [open the Preferences dialog box](#), go to **Content Completion**, and select the **Add optional content** and **Add first Choice particle** check boxes.

After inserting an element, the cursor is positioned:

- Before the > character of the start tag, if the element allows attributes, in order to enable rapid insertion of any of the attributes supported by the element. Pressing the space bar displays the Content Completion list once again. This time it contains the list of allowed attribute names. If the attribute supports a fixed set of parameters, the assistant list displays the list of valid parameters. If the parameter setting is user-defined and therefore variable, the assistant is closed to enable manual insertion. The values of the attributes can be learned from the same elements in the current document
- After the > character of the start tag if the element has no attributes.

The **Content Completion Assistant** is displayed:

- Anywhere within a tag name or at the beginning of a tag name in an XML document, XML Schema, DTD, or Relax NG (full or compact syntax) schema
- Anywhere within an attribute name or at the beginning of an attribute name in any XML document with an associated schema
- Within attribute values or at the beginning of attribute values in XML documents where lists of possible values have been defined for that element in the schema associated with the document.

The items that populate the **Content Completion Assistant** depend on the element structure specified in the DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema associated with the edited document.



Note: The **Content Completion Assistant** is able to offer elements defined both by XML Schemas version 1.0 and 1.1.

The number and type of elements displayed by the **Content Completion Assistant** is dependent on the cursor's current position in the structured document. The child elements displayed within a given element are defined by the structure of the specified DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema.

A schema may declare certain attributes as *ID* or *IDREF/IDREFS*. When the document is validated, Oxygen XML Developer checks the uniqueness and correctness of the ID attributes. It also collects the attribute values declared in the document to prepare the **Content Completion Assistant's** list of proposals. This is available for documents that use DTD, XML Schema, and Relax NG schema.

Also, values of all the *xml:id* attributes are handled as ID attributes. They are collected and displayed by the **Content Completion Assistant** as possible values for *anyURI* attributes defined in the schema of the edited document. This works only for XML Schema and Relax NG schemas.

For documents that use an XML Schema or Relax NG schema, the content assistant offers proposals for attributes and elements values that have as type an enumeration of tokens. Also, if a default value or a fixed value is defined in the XML Schema used in validation for an attribute or element, then that value is offered in the **Content Completion Assistant** window.

Set Schema for Content Completion

The DTD, XML Schema, Relax NG, or NVDL schema used to populate the **Content Completion Assistant** is specified in the following methods, in order of precedence:

- The schema specified explicitly in the document. In this case Oxygen XML Developer reads the beginning of the document and resolves the location of the DTD, XML Schema, Relax NG schema, or NVDL schema.
- The default schema declared in the [Document Type configuration dialog box](#) that matches the edited document.

- For XSLT stylesheets, the schema specified in the Oxygen XML Developer [Content Completion options](#). Oxygen XML Developer will read the Content Completion settings when the prolog fails to provide or resolve the location of a DTD, XML Schema, Relax NG or NVDL schema.
- For XML Schemas, the schema specified in the Oxygen XML Developer [Content Completion options](#). Oxygen XML Developer will read the Content Completion settings and the specified schema will enhance the content completion inside the `xs:annotation/xs:appinfo` elements of the XML Schema.

Content Completion in Documents with Relax NG Schemas

Inside the documents that use a Relax NG schema, the **Content Completion Assistant** is able to present element values if such values are specified in the Relax NG schema. Also in Relax NG documents the **Content Completion Assistant** presents additional values of type ID for an *anyURI* data type. It presents also pattern names defined in the Relax NG schema as possible values for pattern references. For example if the schema defines an `enumValuesElem` element like:

```
<element name="enumValuesElem">
  <choice>
    <value>value1</value>
    <value>value2</value>
    <value>value3</value>
  </choice>
</element>
```

In documents based on this schema, the **Content Completion Assistant** offers the following list of values:

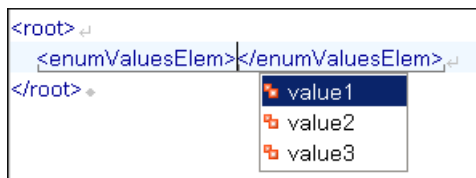


Figure 50: Content Completion assistant - element values in Relax NG documents

Schema Annotations

A schema annotation is a documentation snippet associated with the definition of an element or attribute in a schema. If such a schema is associated with an XML document, the annotations are displayed in:

- The Content Completion Assistant.
- A small tooltip window shown when the mouse hovers over an element or attribute. The tooltip window can be invoked at any time using the F2 shortcut.

The schema annotations support is available the schema type is one of the following: XML Schema, Relax NG, NVDL, or DTD. If you want to turn off this feature, disable the [Show annotations in Content Completion Assistant](#) option.

Styling Annotations with HTML

You can use HTML format in the annotations you add in an XML Schema or Relax NG schema. This improves the visual appearance and readability of the documentation window displayed when editing XML documents validated against such a schema. An annotation is recognized and displayed as HTML if it contains at least one HTML element, like: `div`, `body`, `p`, `br`, `table`, `ul`, or `ol`.

The HTML rendering is controlled by the **Show annotations using HTML format, if possible** option. When this options is disabled, the annotations are converted and displayed as plain text. If the annotation contains one or more HTML tags (`p`, `br`, `ul`, `li`), they are rendered as an HTML document loaded in a web browser: `p` begins a new paragraph, `br` breaks the current line, `ul` encloses a list of items, `li` encloses an item of the list.

Collecting Annotations from XML Schemas

In an XML Schema the annotations are specified in an `<xs:annotation>` element like this:

```
<xs:annotation>
  <xs:documentation>
    Description of the element.
```



```
</xs:documentation>
</xs:annotation>
```

For XML Schema, if an element or attribute does not have a specific annotation, then Oxygen XML Developer looks for an annotation in the type definition of that element or attribute.

Collecting Annotations from Relax NG Schemas

For Relax NG schema element / attribute annotation are made using the `<documentation>` element from the `http://relaxng.org/ns/compatibility/annotations/1.0` namespace. However, any element outside the Relax NG namespace (`http://relaxng.org/ns/structure/1.0`) is handled as annotation and the text content is displayed in the annotation window. To activate this behavior, enable the [Use all Relax NG annotations as documentation](#) option.

Collecting Annotation from DTDs

For DTD Oxygen XML Developer defines a custom mechanism for annotation using comments enabled from the option [Use DTD comments as annotations](#). Following is an example of a DTD annotation:

```
<!--doc:Description of the element. -->
```

Content Completion Helper Views

Information about the current element being edited is also available in various views, such as the **Model** view, **Attributes** view, **Elements** view, and **Entities** view. By default, they are located on the right-hand side of the main editor window. These views, along with the powerful **Outline** view, provide spatial and insight information about the edited document and the current element.

The Model View

The **Model** view presents the structure of the currently selected tag, and its documentation, defined as annotation in the schema of the current document. To open the **Model** view, select it from the **Window > Show View** menu.

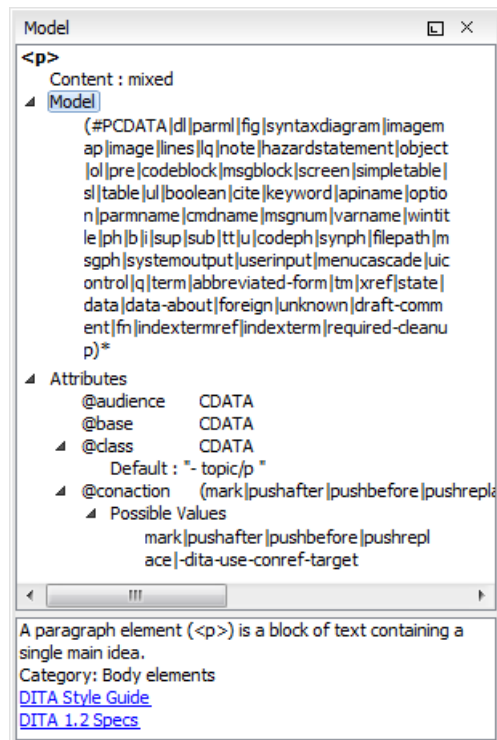


Figure 51: The Model View

The **Model** view is comprised of two sections, an element structure panel and an annotations panel.

Element Structure Panel

The element structure panel displays the structure of the currently edited or selected tag in a tree-like format. The information includes the name, model, and attributes of the current tag. The allowed attributes are shown along with imposed restrictions, if any.

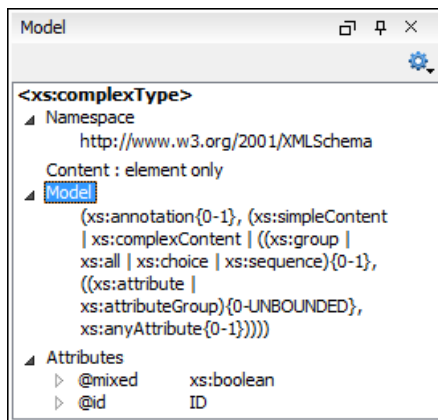


Figure 52: The Element Structure Panel

Annotation Panel

The **Annotation** panel displays the annotation information for the currently selected element. This information is collected from the XML schema.

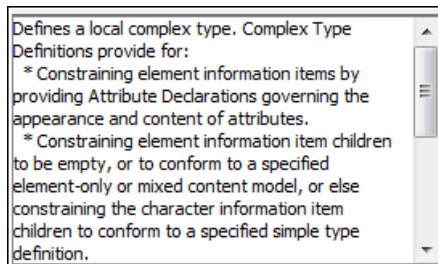


Figure 53: The Annotation panel

The Attributes View

The **Attributes** view presents all the attributes of the current element determined by the schema of the document.

You can use the **Attributes** view to insert attributes, edit their values, or add values to existing attributes.

The attributes are rendered differently depending on their state:

- The names of the attributes with a specified value are rendered with a bold font, and their value with a plain font.



Note: The names of the attributes with an empty string value are also rendered bold.

- Default values are rendered with a plain font, painted gray.
- Empty values display the text "[empty]", painted gray.
- Invalid attributes and values are painted red.

Double-click a cell in the **Value** column to edit the value of the corresponding attribute. If the possible values of the attribute are specified as **list** in the schema of the edited document, the **Value** column acts as a combo box that allows you to insert the values in the document.

You can sort the attributes table by clicking the **Attribute** column header. The table contents can be sorted as follows:

- By attribute name in ascending order.
- By attribute name in descending order.

- Custom order, where the used attributes are displayed at the beginning of the table sorted in ascending order, followed by the rest of the allowed elements sorted in ascending order.

Attribute	Value
abstract	false
block	false
default	true
final	
fixed	
id	
name	email
nillable	false
substitutionGroup	
type	xs:string

Figure 54: The Attributes View

Expand/Collapse Button

There is an  **Expand**/ **Collapse** button at the top-right of the view. When expanded, this presents the following additional combo boxes:

Name Combo Box

Use this combo box to select an attribute. The drop-down list displays the list of possible attributes allowed by the schema of the document, as in the **Attributes** view. You can use the  **Remove** button to delete an attribute and its value from the selected element.

Value Combo Box

Use this combo box to add, edit, or select the value of an attribute. If the selected attribute has predefined values in the schema, the drop-down list displays those possible values. You can use the  **Browse** button to select a URL for the value of an attribute. After you have entered or selected a value, use the  **Update** button (or press **Enter**) to add the value to the attribute.

Contextual Menu Actions in the Attributes View

The following actions are available in the contextual menu of the **Attributes** view when editing in **Text** mode:

Add

Allows you to insert a new attribute.

Set empty value

Specifies the current attribute value as empty.

Remove

Removes the attribute (action available only if the attribute is specified). You can invoke this action by pressing the **(Delete)** or **(Backspace)** keys.

Copy

Copies the `attrName="attrValue"` pair to the clipboard. The `attrValue` can be:

- The value of the attribute.
- The value of the default attribute, if the attribute does not appear in the edited document.
- Empty, if the attribute does not appear in the edited document and has no default value set.

Paste

Depending on the content of the clipboard, the following cases are possible:

- If the clipboard contains an attribute and its value, both of them are introduced in the **Attributes** view. The attribute is selected and its value is changed if they exist in the **Attributes** view.
- If the clipboard contains an attribute name with an empty value, the attribute is introduced in the **Attributes** view and you can start editing it. The attribute is selected and you can start editing it if it exists in the **Attributes** view.
- If the clipboard only contains text, the value of the selected attribute is modified.

The Elements View

The **Elements** view presents a list of all defined elements that you can insert at the current cursor position according to the schema associated to the document. Double-clicking any of the listed elements inserts that element in the edited document. All elements from a sequence are presented but the invalid proposals (which cannot be inserted in the current context) are disabled and rendered in gray.



Figure 55: The Elements View

The Entities View

This view displays a list with all entities declared in the current document, as well as built-in ones. Double-clicking one of the entities will insert it at the current cursor position. You can also sort entities by name and value by clicking the column headers.

 A screenshot of the 'Entities' view in Oxygen XML Developer. It shows a table with two columns: 'Name' and 'Value'. The table lists various entities, including built-in ones like '<', '>', '&', and '"', as well as document-specific ones like 'abbrev-d-att' and 'concept-att'.

Name	Value
lt	<
gt	>
amp	&
apos	'
quot	"
abbrev-d-att	(topic abbrev-d)
concept-att	(topic concept)
hazard-d-att	(topic hazard-d)
hi-d-att	(topic hi-d)
included-domains	&concept-att; ...
indexing-d-att	(topic indexing-d)
nbsp	
pr-d-att	(topic pr-d)
sw-d-att	(topic sw-d)
ui-d-att	(topic ui-d)
ut-d-att	(topic ut-d)

Figure 56: The Entities View

The view features a filtering capability that allows you to search an entity by name, value, or both. Also, you can choose to display the internal or external entities.



Note: When entering filters, you can use the ? and * wildcards. Also, you can enter multiple filters by separating them with a comma.

Code Templates

Code templates are code fragments that can be inserted quickly at the current editing position. Oxygen XML Developer comes with a set of built-in code templates for CSS, LESS, Schematron, XSL, XQuery, and XML Schema document types. You can also [define you own code templates and share them with others](#).

To get a complete list of available code templates, press **Ctrl Shift Space** in **Text** mode. To enter the code template, select it from the list or type its code and press **Enter**. If a shortcut key has been assigned to the code template, you can also use the shortcut key to enter it. Code templates are displayed with a  symbol in the content completion list.

When the **Content Completion Assistant** is invoked (**Ctrl Space (Command Space on OS X)** in **Text** mode or **Enter** in **Author** mode), it also presents a list of code templates specific to the type of the active editor.

To watch our video demonstration about code templates, go to http://oxygenxml.com/demo/Code_Templates.html.

Configuring the Proposals in the Content Completion Assistant

Oxygen XML Developer gathers information from the associated schemas (DTDs, XML Schema, RelaxNG) to determine the proposals that appear in the **Content Completion Assistant**. Oxygen XML Developer also includes support that allows you to configure the possible attribute or element values for the proposals. To do so, a configuration file can be used, along with the associated schema, to add or replace possible values for attributes or elements that are proposed in the **Content Completion Assistant**. An example of a specific use-case is if you want the **Content Completion Assistant** to propose several possible values for the language code whenever you use an `xml:lang` attribute.

To configure content completion proposals, follow these steps:

1. Create a new `resources` folder (if it does not already exist) in the frameworks directory for the document type. For instance: `OXYGEN_INSTALL_DIR/frameworks/dita/resources`.
2. [Open the Preferences dialog box](#) and go to **Document Type Association**. Edit the document type configuration for your XML vocabulary, and in the **Classpath** tab add a link to that `resources` folder.
3. Use the **New** document wizard to create a configuration file using the **Content Completion Configuration** file template.
4. Make the appropriate changes to your custom configuration file. The file template includes details about how each element and attribute is used in the configuration file.
5. Save the file in the `resources` folder, using the fixed name: `cc_value_config.xml`.
6. Re-open the application and open an XML document. In the **Content Completion Assistant** you should see your customizations.

The Configuration File

The configuration file is composed of a series of `match` instructions that will match either an element or an attribute name. A new value is specified inside one or more `item` elements, which are grouped inside an `items` element. The behavior of the `items` element is specified with the help of the `action` attribute, which can have any of the following values:

- `append` - Adds new values to appear in the proposals list (default value).
- `addIfEmpty` - Adds new values to the proposals list, only if no other values are contributed by the schema.
- `replace` - Replaces the values contributed by the schema with new values to appear in the proposals list.

The values in the configuration file can be specified either directly or by calling an external XSLT file that will extract data from any external source.

Example - Specifying Values Directly

```
<!-- Replaces the values for an element with the local name "lg", from the given namespace -->
<match elementName="lg" elementNS="http://www.oxygenxml.com/ns/samples">
  <items action="replace">
    <item value="stanza"/>
    <item value="refrain"/>
  </items>
</match>

<!-- Adds two values for an attribute with the local name "type", from any namespace -->
```

```
<match attributeName="type">
  <items>
    <item value="stanza"/>
    <item value="refrain"/>
  </items>
</match>
```

Example - Calling an External XSLT Script

```
<xslt href="../../../xsl/get_values_from_db.xsl" useCache="false" action="replace"/>
```

In this example, the `get_values_from_db.xsl` is executed in order to extract values from a database.



Note: A comprehensive XSLT sample is included in the **Content Completion Configuration** file template.

Configuring Proposals in the Context for which the Content Completion was Invoked

A more complex scenario for configuring the content completion proposals would be if you want to choose the possible values to provide, depending on the context of the element in which the content completion was invoked.

Suppose that you want to propose certain possible values for one property (for example, *color*) and other values for another property (for example, *shape*). If the property represents a color, then the values should represent applicable colors, while if the property represents a shape, then the values should represent applicable shapes. See the following code snippets:

Your main document:

```
<sampleArticle>
  <!-- The possible values for @value should be "red" and "blue" -->
  <property name="color" value=""/>
  <!-- The possible values for @value should be "square" and "rectangle" -->
  <property name="shape" value=""/>
</sampleArticle>
```

The content completion configuration file:

```
<config xmlns="http://www.oxygenxml.com/ns/ccfilter/config">
  <match elementName="property" attributeName="value">
    <xslt href="get_values.xsl" useCache="false" action="replace"/>
  </match>
</config>
```

The stylesheet that defines the possible values based on the context of the property on which the content completion was invoked:

```
<xsl:stylesheet
  xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:saxon="http://saxon.sf.net/"
  exclude-result-prefixes="xs"
  version="2.0">

  <xsl:param name="documentSystemID" as="xs:string"/></xsl:param>
  <xsl:param name="contextElementXPathExpression" as="xs:string"/></xsl:param>

  <xsl:template name="start">
    <xsl:apply-templates select="doc($documentSystemID)"/>
  </xsl:template>

  <xsl:template match="/">
    <xsl:variable name="propertyElement"
      select="saxon:eval(saxon:expression($contextElementXPathExpression, ../*))"/>

    <items>
      <xsl:if test="$propertyElement/@name = 'color'">
        <item value='red' />
        <item value='blue' />
      </xsl:if>
      <xsl:if test="$propertyElement/@name = 'shape'">
        <item value='rectangle' />
        <item value='square' />
      </xsl:if>
    </items>
  </xsl:template>
</xsl:stylesheet>
```

The `contextElementXPathExpression` parameter will be bound to an XPath expression that identifies the element in the context for which the content completion was invoked.

Validating XML Documents

The W3C XML specification states that a program should not continue to process an XML document if it finds a validation error. The reason is that XML software should be easy to write and all XML documents should be compatible. With HTML it is possible to create documents with lots of errors (for example, when you forget an end tag). One of the main reasons that various HTML browsers have performance and compatibility problems is that they have different methods of figuring out how to render a document when an HTML error is encountered. Using XML helps to eliminate such problems.

Even when creating XML documents, errors are very easily introduced. When working with large projects or a large number of files, the probability that errors will occur is even greater. Preventing and solving errors in your projects can be time consuming and frustrating. Fortunately, Oxygen XML Developer provides validation functions that enable you to easily identify errors and their location.

Checking XML Well-formedness

A *Well-Formed XML* document is a document that conforms to the XML syntax rules. A *Namespace Well-Formed XML* document is a document that is XML Well-Formed and is also namespace-wellformed and namespace-valid.

The XML Syntax rules for Well-Formed XML are:

- All XML elements must have a closing tag.
- XML tags are case-sensitive.
- All XML elements must be properly nested.
- All XML documents must have a root element.
- Attribute values must always be quoted.
- With XML, whitespace is preserved.

The namespace-wellformed rules are:

- All element and attribute names contain either zero or one colon.
- No entity names, processing instruction targets, or notation names contain any colons.

The namespace-valid rules are:

- The prefix *xml* is by definition bound to the namespace name *http://www.w3.org/XML/1998/namespace*. It MAY, but need not, be declared, and MUST NOT be undeclared or bound to any other namespace name. Other prefixes MUST NOT be bound to this namespace name.
- The prefix *xmlns* is used only to declare namespace bindings and is by definition bound to the namespace name *http://www.w3.org/2000/xmlns/*. It MUST NOT be declared or undeclared. Other prefixes MUST NOT be bound to this namespace name.
- All other prefixes beginning with the three-letter sequence *x*, *m*, *l*, in any case combination, are reserved. This means that users SHOULD NOT use them except as defined by later specifications and processors MUST NOT treat them as fatal errors.
- The namespace prefix, unless it is *xml* or *xmlns*, MUST have been declared in a namespace declaration attribute in either the start-tag of the element where the prefix is used or in an ancestor element (for example, an element in whose content the prefixed markup occurs). Furthermore, the attribute value in the innermost such declaration MUST NOT be an empty string.

To check if a document is *Namespace Well-Formed XML*, select the  **Check Well-Formedness (Ctrl Shift W (Meta Shift W on OS X))** action from the **Document > Validate** menu or from the  **Validation** toolbar drop-down menu. If any error is found the result is returned to the message panel. Each error is one record in the result list and is accompanied by an error message. Clicking the record will open the document containing the error and highlight its approximate location.

A not Well-Formed XML Document

```
<root><tag></root>
```

When **Check Well-Formedness** is performed the following error is raised:

The element type "tag" must be terminated by the matching end-tag "</tag>"

To resolve the error, click in the result list record which will locate and highlight the errors approximate position. Identify which start tag is missing an end tag and insert </tag>.

A not namespace-wellformed document

```
<x::y></x::y>
```

When **Check document form** is performed the following error is raised:

Element or attribute do not match QName production:
QName ::= (NCName ':')? NCName .

A not namespace-valid document

```
<x:y></x:y>
```

When **Check document form** is performed the following error is raised:

The prefix "x" for element "x:y" is not bound.

Also the selected files in the current project can be checked for well-formedness with a single action by selecting the  **Check Well-Formedness** action from the **Validate** submenu when invoking the contextual menu in the **Project view**.

Validating XML Documents Against a Schema

A *Valid* XML document is a *Well-Formed* XML document that also conforms to the rules of a schema that defines the legal elements of an XML document. The schema type can be: XML Schema, Relax NG (full or compact syntax), Schematron, Document Type Definition (DTD), or Namespace-based Validation Dispatching Language (NVDL).

The purpose of the schema is to define the legal building blocks of an XML document. It defines the document structure with a list of legal elements.

The  **Validate** function ensures that your document is compliant with the rules defined by an associated DTD, XML Schema, Relax NG, or Schematron schema. XML Schema or Relax NG Schema can embed Schematron rules. For Schematron validations you can select the validation phase.

Presenting Validation Errors in Text Mode

A line with a validation error or warning will be marked in the editor panel by underlining the error region with a red color. Also a red sign will mark the position in the document of that line on the right side ruler of the editor panel. The same will happen for a validation warning, but the color will be yellow instead of red. Hovering over a validation error presents a tooltip message with more details about the error and *possible quick fixes* (if available for that error or warning).

The ruler on the right side of the document is designed to display the errors and warnings found during the validation process and also to help you to locate them more easily. The ruler contains the following areas:

- Top area that contains a success validation indicator that will turn green if the validation succeeded, or red otherwise. A more detailed report of the errors is displayed in the tooltip of the validation indicator. If there are multiple errors, only the first three of them will be presented in the tooltip.

- Middle area where the error markers are depicted in red (with a darker color tone for the current selected one). To limit the number of markers shown [open the Preferences dialog box](#) and go to **Editor > Document checking > Maximum number of problems reported per document**.

Clicking a marker will highlight the corresponding text area in the editor. The error message is displayed both in the tool tip and in the error area on the bottom of the editor panel.

The [Document checking user preferences](#) are easily accessible from the button displayed at the beginning of the error message on the bottom of the editor panel.

- Bottom area containing two navigation arrows that will go to the next or to the previous error and a button for clearing all the error markers from the ruler. The same actions can be triggered from menu **Document > Automatic validation > Next Error Ctrl Period (Meta Period on OS X)** and **Document > Automatic validation > Previous Error Ctrl Comma (Meta Comma on OS X)**.

The validation status area is the line at the bottom of the editor panel that presents the message of the current validation error selected on the right side ruler. Clicking the  **Document checking options** button opens the [document checking](#) page in Oxygen XML Developer user preferences.

Status messages from every validation action are logged into the [Information view](#).

If you want to see all the validation error messages [grouped in a view](#) you should use the  **Validate** action from the **Document > Validate** menu or from the  ▾ **Validation** toolbar drop-down menu. This action collects all error messages in the **Errors** view.

Customizing Assert Error Messages

To customize the error messages that the Xerces or Saxon validation engines display for the `assert` and `assertion` elements, set the `message` attribute on these elements. For Xerces, the `message` attribute has to belong to the `http://xerces.apache.org` namespace. For Saxon, the `message` attribute has to belong to the `http://saxon.sourceforge.net/` namespace. The value of the `message` attribute is the error message displayed if the assertion fails.

Validation Example - A DocBook Validation Error

In the following DocBook 4 document the content of the `listitem` element does not match the rules of the DocBook 4 schema, that is `docbookx.dtd`.

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE article PUBLIC "-//OASIS//DTD DocBook XML V4.4//EN"
"http://www.docbook.org/xml/4.4/docbookx.dtd">
<article>
  <title>Article Title</title>
  <sect1>
    <title>Section1 Title</title>
    <itemizedlist>
      <listitem>
        <link>a link here</link>
      </listitem>
    </itemizedlist>
  </sect1>
</article>
```

The **Validate Document** action will return the following error:

```
Unexpected element "link". The content of the parent element type must match
"(calloutlist|glosslist|bibliolist|itemizedlist|orderedlist|segmentedlist|simplelist
|variablelist|caution|important|note|tip|warning|literallayout|programlisting
|programlistingco|screen|screenco|screenshot|synopsis|cmdsynopsis|funcsynopsis
|classsynopsis|fieldsynopsis|constructorsynopsis|destructorsynopsis|methodsynopsis
|formalpara|para|simpara|address|blockquote|graphic|graphicco|mediaobject|mediaobjectco
|informalequation|informalexample|informalfigure|informaltable|equation|example|figure
|table|msgset|procedure|sidebar|qandaset|task|anchor|bridgehead|remark|highlights
|abstract|authorblurb|epigraph|indexterm|beginpage)+".
```

This error message is a little more difficult to understand, so understanding of the syntax or processing rules for the DocBook XML DTD's `listitem` element is recommended. However, the error message does give us a clue as to the source of the problem, indicating that “The content of element type must match”.

Luckily most standards based DTDs, XML Schemas, and Relax NG schemas are supplied with reference documentation. This enables us to lookup the element and read about it. In this case you should learn about the child elements of `listitem` and their nesting rules. Once you have correctly inserted the required child element and nested it in accordance with the XML rules, the document will become valid on the next validation test.

Automatic Validation

Oxygen XML Developer *can be configured* to mark validation errors in the document as you are editing. If you *enable the Automatic validation option*, all validation errors and warnings will be *highlighted automatically in the editor panel*. The automatic validation starts parsing the document and marking the errors after a *configurable delay* from the last key typed. Errors are highlighted with underline markers in the main editor panel and small rectangles on the right side ruler of the editor panel, *in the same way as for manual validation invoked by the user*. Hovering over a validation error presents a tooltip message with more details about the error.

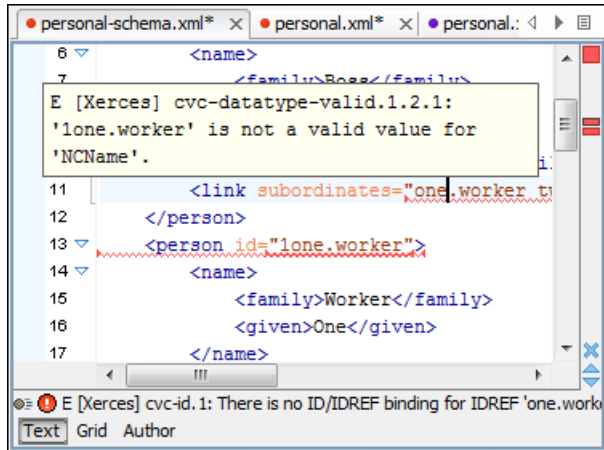


Figure 57: Automatic Validation on the Edited Document

If the error message is long and it is not displayed completely in the error line at the bottom of the editing area, double-clicking the error icon at the left of the error line or on the error line displays an information dialog box with the full error message. The arrow buttons of the dialog box enable the navigation to other errors issued by the Automatic Validation feature.

Custom Validators

If you need to validate the edited document with a validation engine that is different from the built-in engine, you can configure external validators in the Oxygen XML Developer preferences. After a custom validation engine is *properly configured*, it can be applied on the current document by selecting it from the list of custom validation engines in the ☒ **Validation** toolbar drop-down menu. The document is validated against the schema declared in the document.

Some validators are configured by default but there are third party processors which do not support the *output message format* of Oxygen XML Developer for linked messages:

- **LIBXML** - Included in Oxygen XML Developer (Windows edition only). It is associated to XML Editor. It is able to validate the edited document against XML Schema, Relax NG schema full syntax, internal DTD (included in the XML document) or a custom schema type. XML catalogs support (the `--catalogs` parameter) and XInclude processing (`--xininclude`) are enabled by default in the preconfigured LIBXML validator. The `--postvalid` parameter is also set by default which allows LIBXML to validate correctly the main document even if the XInclude fragments contain IDREFS to ID's located in other fragments.

For validation against an external DTD specified by URI in the XML document, add the `--dtdvalid ${ds}` parameter manually to the DTD validation command line. `${ds}` represents the detected DTD declaration in the XML document.



Caution: File paths containing spaces are not handled correctly in the LIBXML processor. For example the built-in XML catalog files of the predefined document types (DocBook, TEI, DITA, etc) are not handled by LIBXML if Oxygen XML Developer is installed in the default location on Windows (C:\Program Files) because the built-in XML catalog files are stored in the `frameworks` subfolder of the installation folder which in this case contains at least one space character in the file path.



Attention: On OS X if the full path to the LIBXML executable file is not specified in the **Executable path** text field, some errors may occur during validation against a W3C XML Schema, such as:

```
Unimplemented block at ... xmlschema.c
```

To avoid these errors, specify the full path to the LIBXML executable file.

- **Saxon-EE** - Included in Oxygen XML Developer. It is associated to XML Editor and XSD Editor. It is able to validate XML Schema schemas and XML documents against XML Schema schemas. The validation is done according to the W3C XML Schema 1.0 or 1.1. This can be [configured in Preferences](#).
- **MSXML 4.0** - Included in Oxygen XML Developer (Windows edition only). It is associated to XML Editor, XSD Editor and XSL Editor. It is able to validate the edited document against XML Schema, internal DTD (included in the XML document), external DTD or a custom schema type.
- **MSXML.NET** - Included in Oxygen XML Developer (Windows edition only). It is associated to XML Editor, XSD Editor and XSL Editor. It is able to validate the edited document against XML Schema, internal DTD (included in the XML document), external DTD or a custom schema type.
- **XSV** - Not included in Oxygen XML Developer. Windows and Linux distributions of XSV can be downloaded from <http://www.cogsci.ed.ac.uk/~ht/xsv-status.html>. The executable path is [already configured in Oxygen XML Developer](#) for the [OXYGEN_DIR]/xsv installation folder. If it is installed in a different folder the predefined executable path must be [corrected in Preferences](#). It is associated to XML Editor and XSD Editor. It is able to validate the edited document against XML Schema or a custom schema type.
- **SQC (Schema Quality Checker from IBM)** - Not included in Oxygen XML Developer. It can be downloaded [from here](#) (it comes as a .zip file, at the time of this writing SQC2.2.1.zip is about 3 megabytes). The executable path and working directory are already configured for the SQC installation directory [OXYGEN_DIR]/sqc. If it is installed in a different folder the predefined executable path and working directory must be [corrected in the Preferences page](#). It is associated to XSD Editor.

A custom validator cannot be applied on files loaded through an [Oxygen XML Developer custom protocol plugin](#) developed independently and added to Oxygen XML Developer after installation.

Linked Output Messages of an External Engine

Validation engines display messages in an output view at the bottom of the Oxygen XML Developer window. If such an output message (*warning*, *error*, *fatal error*, etc) spans between three to six lines of text and has the following format, then the message is linked to a location in the validated document. Clicking the message in the output view highlights the location of the message in an editor panel containing the file referenced in the message. This behavior is similar to the linked messages generated by the default built-in validator.

Linked messages have the following format:

- **Type:**[F|E|W] (the string *Type:* followed by a letter for the type of the message: fatal error, error, warning) - this property is optional in a linked message
- **SystemID:** a system ID of a file (the string *SystemID:* followed by the system ID of the file that will be opened for highlighting when the message is clicked in the output message - usually the validated file, the schema file or an included file)
- **Line:** a line number (the string *Line:* followed by the number of the line that will be highlighted)
- **Column:** a column number (the string *Column:* followed by the number of the column where the highlight will start on the highlighted line) - this property is optional in a linked message
- **EndLine:** a line number (the string *EndLine:* followed by the number of the line where the highlight ends) - this property is optional in a linked message
- **EndColumn:** a column number (the string *EndColumn:* followed by the number of the column where the highlight ends on the end line) - this property is optional in a linked message



Note: The *Line/Column* pair works in conjunction with the *EndLine/EndColumn* pair. Thus, if both pairs are specified, then the highlight starts at *Line/Column* and ends at *EndLine/EndColumn*. If the *EndLine/EndColumn* pair is missing, the highlight starts from the beginning of the line identified by the *Line* parameter and ends at the column identified by the *Column* parameter.

- *AdditionalInfoURL*: the URL string pointing to a remote location where additional information about the error can be found - this line is optional in a linked message.
- *Description*: message content (the string *Description*: followed by the content of the message that will be displayed in the output view).

Example of how a custom validation engine can report an error using the format specified above:

```
Type: E
SystemID: file:///c:/path/to/validatedFile.xml
Line: 10
Column: 20
EndLine: 10
EndColumn: 35
AdditionalInfoURL: http://www.host.com/path/to/errors.html#errorID
Description: custom validator message
```

Validation Scenario

A complex XML document is split in smaller interrelated modules. These modules do not make much sense individually and cannot be validated in isolation due to interdependencies with other modules. Oxygen XML Developer validates the main module of the document when an imported module is checked for errors.

A typical example is the chunking DocBook XSL stylesheet which has `chunk.xsl` as the main module and `param.xsl`, `chunk-common.xsl`, and `chunk-code.xsl` as imported modules. `param.xsl` only defines XSLT parameters. The module `chunk-common.xsl` defines an XSLT template with the name `chunk`. `Chunk-code.xsl` calls this template. The parameters defined in `param.xsl` are used in the other modules without being redefined.

Validating `chunk-code.xsl` as an individual XSLT stylesheet, generates misleading errors in regards to parameters and templates that are used but undefined. These errors are only caused by ignoring the context in which this module is used in real XSLT transformations and in which it is validated. To validate such a module, define a validation scenario to set the main module of the stylesheet and the validation engine used to find the errors. Usually this engine applies the transformation during the validation process to detect the errors that the transformation generates.

You can validate a stylesheet with several engines to make sure that you can use it in different environments and have the same results. For example an XSLT stylesheet is applied with Saxon 6.5, Xalan, and MSXML 4.0 in different production systems.

Other examples of documents which can benefit of a validation scenario are:

- A complex XQuery with a main module which imports modules developed independently but validated in the context of the main module of the query. In an XQuery validation scenario the default validator of Oxygen XML Developer (Saxon 9) or any connection to a database that supports validation (Berkeley DB XML Database, eXist XML Database, Documentum xDb (X-Hive/DB) 10 XML Database, MarkLogic version 5 or newer) can be set as a validation engine.
- An XML document in which the master file includes smaller fragment files using XML entity references.



Note: When you validate a document for which a master file is defined, Oxygen XML Developer uses the scenarios defined in [the Master Files directory](#).

To watch our video demonstration about how to use a validation scenario in Oxygen XML Developer, go to http://oxygenxml.com/demo/Validation_Scenario.html.

How to Create a Validation Scenario

To create a validation scenario, follow these steps:

1. Select the **Configure Validation Scenario(s)** from the **Document > Validate** menu, or the **Validation** toolbar drop-down menu, or from the **Validate** submenu when invoking the contextual menu on a file in the **Project** view.

The **Configure Validation Scenario(s)** dialog box is displayed. It contains the following types of scenarios:

- **Predefined** scenarios are organized in categories depending on the type of file they apply to. You can identify **Predefined** scenarios by a yellow key icon that marks them as *read-only*. If the predefined scenario is the default

scenario of the framework, its name is written in bold font. You can use the options in the  **Settings** drop-down menu to filter which scenarios are shown.

- **User defined** scenarios are organized under a single category, but you can use the options in the  **Settings** drop-down menu to filter them.

 **Note:** If the current file has no associated scenarios, the preview area displays a message to let you know that you can apply the default validation.

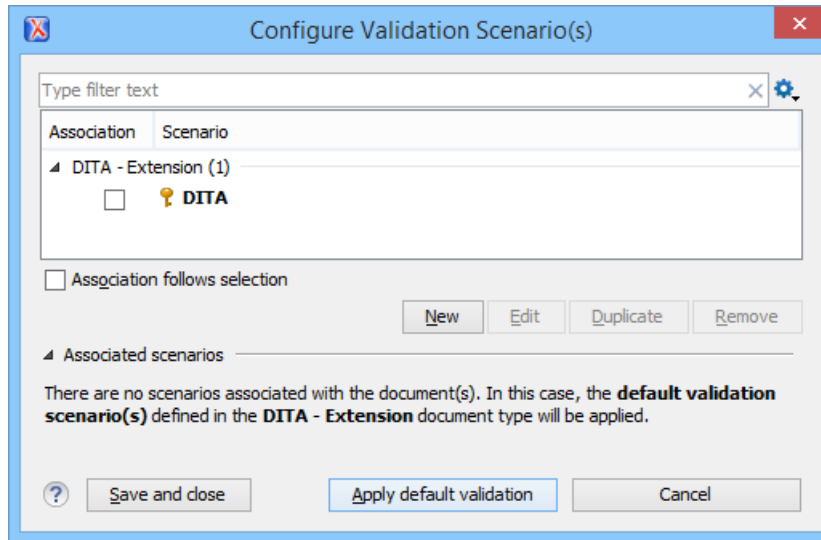


Figure 58: Configure Validation Scenario

- To edit an existing scenario, select the scenario and press the **Edit** button. If you try to edit one of the *read-only* predefined scenarios, Oxygen XML Developer creates a customizable duplicate (you can also use the **Duplicate** button).
- To add a new scenario, press the  **New** button. The **New scenarios** dialog box is displayed. It lists all the validation units for the scenario.

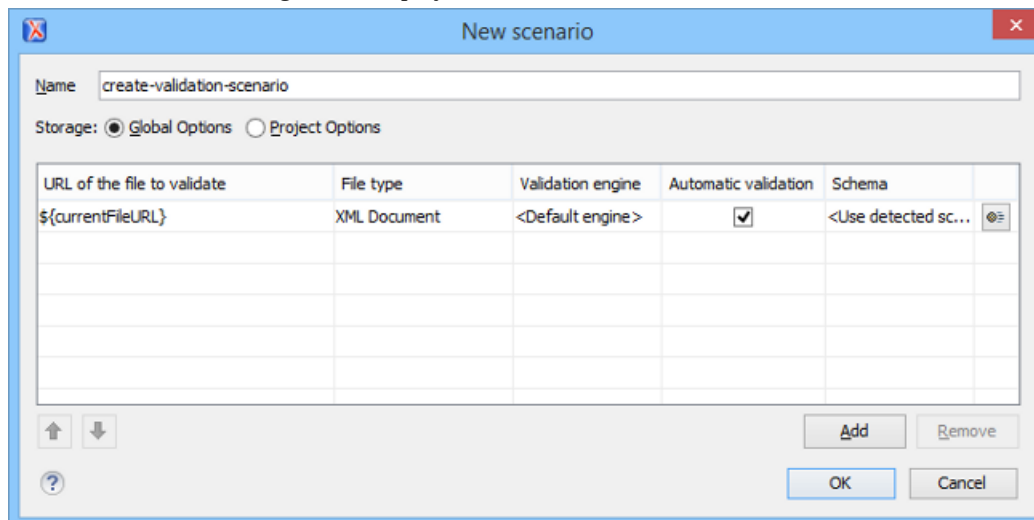


Figure 59: Add / Edit a Validation Unit

The **New scenario** dialog box includes the following information:

- **Name** - The name of the current validation scenario.

- **Storage** - You can choose between storing the scenario in the **Global Options** or **Project Options**.
- **URL of the file to validate** - The URL of the main module that includes the current module. It is also the entry module of the validation process when the current one is validated.
- **File type** - The type of the document that is validated in the current validation unit. Oxygen XML Developer automatically selects the file type depending on the value of the **URL of the file to validate** field.
- **Validation engine** - One of the engines available in Oxygen XML Developer for validation of the type of document to which the current module belongs. **Default engine** means that the default engine is used to run the validation and is set in the **Preferences** pages for the current document type (XML, XML Schema, XSLT, XQuery, etc.).
- **Automatic validation** - If this option is checked, the validation operation defined by this row is also applied by the automatic validation feature. If the **Automatic validation** feature is disabled in Preferences, then this option is ignored, as the Preference setting has a higher priority.
- **Schema** - This option becomes active when you set the **File type** to **XML Document**.
-  **Settings** - Opens the **Specify Schema** dialog box that allows you to set a schema for validating XML documents, or a list of extensions for validating XSL or XQuery documents. You can also set a default phase for validation with a Schematron schema.

4. If you want to add a new validation unit, press the **Add** button.

5. To edit the URL of the main validation module, double-click its cell in the **URL of the file to validate** column.

Specify the URL of the main module by doing one of the following:

- Enter the URL in the text field or select it from the drop-down list.
- Use the  **Browse** drop-down button to browse for a local, remote, or archived file.
- Use the  **Insert Editor Variable** button to insert an *editor variable* or a *custom editor variable*.

<code>\${Desktop}</code>	- My Desktop
<code>\${start-dir}</code>	- Start directory of custom validator
<code>\${standard-params}</code>	- List of standard params for command line
<code>\${cfn}</code>	- The current file name without extension
<code>\${currentFileURL}</code>	- The path of the currently edited file (URL)
<code>\${cfdu}</code>	- The path of current file directory (URL)
<code>\${frameworks}</code>	- Oxygen frameworks directory (URL)
<code>\${pdu}</code>	- Project directory (URL)
<code>\${oxygenHome}</code>	- Oxygen installation directory (URL)
<code>\${home}</code>	- The path to user home directory (URL)
<code>\${pn}</code>	- Project name
<code>\${env(VAR_NAME)}</code>	- Value of environment variable VAR_NAME
<code>\${system(var.name)}</code>	- Value of system variable var.name

Figure 60: Insert an Editor Variable

6. Select the **File type** of the validated document.

Note that this determines the list of possible validation engines.

7. Select the **Validation engine** by clicking its cell and selecting it from the drop-down list.

8. Select the **Automatic validation** option if you want the current unit to be used by the automatic validation feature.


9. Choose the schema to be used during validation (the schema detected after parsing the document or a custom one).

10. Press **OK**.

The newly created validation scenario is now included in the list of scenarios in the **Configure Validation Scenario(s)** dialog box. You can select the scenario in this dialog box to associate it with the current document and press the **Apply associated** button to run the validation scenario.

Sharing Validation Scenarios

The validation scenarios and their settings can be shared with other users by saving them at project level or by *exporting them to a specialized scenarios file* that can then be imported. When you create a new validation scenario or edit an existing one, there is a **Storage** option to control whether the scenarios are stored in **Global Options** or **Project Options**.



Selecting **Global Options** stores the scenario in the global options that are stored in the user home directory.

Selecting **Project Options** stores the scenario in the project file and can be shared with other users that have access to the project. If your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) then your team will have access to the scenarios that you define. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

You can also change the storage options on existing validation scenarios by using the **Change storage** action from the contextual menu of the list of scenarios.

Validation Actions in the User Interface

To validate the currently edited document, use one of the following methods:

- Select the  **Validate (Ctrl Shift V (Meta Shift V on OS X))** action from the **Document > Validate** menu, from the  ▾ **Validation** toolbar drop-down menu, or from the **Validate** submenu when invoking the contextual menu in the **Project** view. An error list is presented in the message panel. Markup of current document is checked to conform with the specified DTD, XML Schema, or Relax NG schema rules. This action also re-parses the XML catalogs and resets the schema used for content completion.
- Select the  **Validate (cached)** action from the **Document > Validate** menu or from the  ▾ **Validation** toolbar drop-down menu. This action caches the schema, allowing it to be reused for the next validation. Markup of the current document is checked to conform with the specified DTD, XML Schema, or Relax NG schema rules.



Note: Automatic validation also caches the associated schema.

- Select the **Validate with** action from the **Document > Validate** menu, from the  ▾ **Validation** toolbar drop-down menu, or from the **Validate** submenu when invoking the contextual menu in the **Project** view. You can use this action to validate the current document using a schema of your choice (XML Schema, DTD, Relax NG, NVDL, Schematron schema), other than the associated one. An error list is presented in the message panel. Markup of current document is checked to conform with the specified schema rules.



Note: The **Validate with** action does not work for files loaded through an *Oxygen XML Developer custom protocol plugin* developed independently and added to Oxygen XML Developer after installation.

- Select **Validate with Schema** from the **Validate** submenu when invoking contextual menu in the **Project** view to choose a schema and validate all selected files with it.

To open the schema used for validating the current document, select the  **Open Associated Schema** action from the **Document > Schema** menu.

The  **Validation options** button, available in the **Document > Validate** menu, allows you to quickly access to the *validation options* for the built-in validator in the Oxygen XML Developer preferences page.



Tip: If a large number of validation errors are detected and the validation process takes too long, you can *limit the maximum number of reported errors in the Preferences page*.

References to XML Schema Specification

If validation is done against XML Schema Oxygen XML Developer indicates a specification reference relevant for each validation error. The error messages contain an **Info** field that when clicked will open the browser on the *XML Schema Part 1:Structures* specification at exactly the point where the error is described. This allows you to understand the reason for that error.

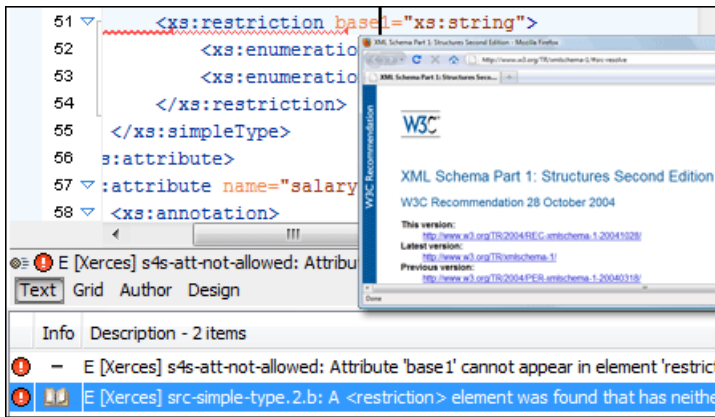


Figure 61: Link to Specification for XML Schema Errors

Resolving References to Remote Schemas with an XML Catalog

When a reference to a remote schema must be used in the validated XML document for interoperability purposes, but a local copy of the schema should be actually used for validation for performance reasons, the reference can be resolved to the local copy of the schema with an *XML catalog*. For example, if the XML document contains a reference to a remote schema `docbook.rng` like this:

```
<?xml-model href="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng" type="application/xml"
schematypens="http://relaxng.org/ns/structure/1.0"?>
```

it can be resolved to a local copy with a catalog entry:

```
<uri name="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng"
uri="rng/docbook.rng"/>
```

An XML catalog can be used also to map a W3C XML Schema specified with an URN in the `xsi:schemaLocation` attribute of an XML document to a local copy of the schema. For example, if the XML document specifies the schema with:

```
<topic xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xsi:noNamespaceSchemaLocation="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1">
```

the URN can be resolved to a local schema file with a catalog entry like:

```
<uri name="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1"
uri="topic.xsd"/>
```

Document Navigation

This section explains various methods for navigating the edited XML document.

Quick Document Navigation Using Bookmarks

By using bookmarks, you can mark positions in an edited document so that you can return to it later. This is especially helpful for navigating through large documents or while editing multiple documents. You can place up to nine distinct bookmarks in any document. Shortcut keys are available to place the bookmarks or to return to any of the marked positions. To configure these shortcut keys, go to **Options > Menu Shortcut Keys**.

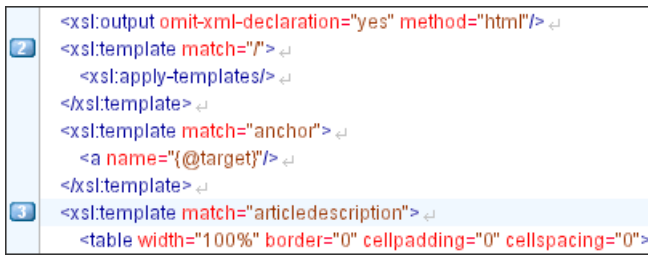


Figure 62: Editor Bookmarks

A bookmark can be inserted by one of the following:

- Right-click the vertical strip to the left of the editor.
- Select the  **Create Bookmark (F9)** action from the **Edit > Bookmarks** menu.

A bookmark can be removed by right-clicking its icon on the vertical strip and select **Remove** or **Remove all (Ctrl+F7)** (you can also find the **Remove all (Ctrl+F7)** action in the **Edit > Bookmarks** menu).

You can navigate the bookmarks by using one of the actions available on the **Edit > Bookmarks > Go to** menu or by using the shortcut keys.

Folding of the XML Elements

An XML document is organized as a tree of elements. When working on a large document you can collapse some elements, leaving only the ones you need to edit in the focus. Expanding and collapsing works on individual elements. Expanding an element leaves the child elements unchanged.



Figure 63: Folding of the XML Elements

The fact that the folds are persistent is a unique feature of Oxygen XML Developer. The next time you open the document the folds are restored to its last state.

To toggle the folded state of an element, click the special mark displayed in the left part of the document editor next to the start tag of that element or use the  **Toggle fold** action that is available from the **Document > Folding** menu. The element extent is marked with a gray line displayed in the left part of the edited document. The gray line always cover the lines of text between the start tag and end tag of the element where the cursor is positioned.

The following other menu actions related to folding of XML elements are available from the **Document > Folding** menu or the contextual menu of the folding stripe:

Collapse Other Folds (Ctrl NumPad / (Meta NumPad / on OS X))

Folds all the elements except the current element.

Collapse Child Folds (Ctrl NumPad . (Meta NumPad . on OS X))

Folds the elements indented with one level inside the current element.

Expand Child Folds

Unfolds all child elements of the currently selected element.

Expand All (Ctrl NumPad * (Meta NumPad * on OS X))

Unfolds all elements in the current document.

To watch our video demonstration about the folding support in Oxygen XML Developer, go to <http://oxygenxml.com/demo/FoldingSupport.html>.

Navigation Using the Outline View

The **Outline** view displays a general tag overview of the currently edited XML Document. It also shows the correct hierarchical dependencies between elements. This makes it easier for you to be aware of the document structure and the way element tags are nested. It allows for fast navigation of the document by displaying the start of the content of the child elements in the node of the parent element, thus allowing you to quickly see the content of an element without expanding it in the **Outline** tree. It also allows you to insert or delete nodes using contextual menu actions.

By default it is displayed on screen, but if you closed it you can reopen it from **Window > Show View > Outline**.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

It also includes a in the top-right corner that presents a variety of options to help you filter the view even further.

XML Document Overview

The **Outline** view displays a general tag overview of the current edited XML document. It also shows the correct hierarchical dependencies between the tag elements. This functionality makes it easier for you to be aware of the document structure and the way tags are nested.

The **Outline** view allows you to:

- Insert or delete nodes using contextual menu actions.
- Move elements by dragging them to a new position in the tree structure.
- Highlight elements in the **Author** editor area.



Note: The **Outline** view is synchronized with the **Author** editor area. When you make a selection in the **Author** editor area, the corresponding elements of the selection are highlighted in the **Outline** view and vice versa. This functionality is available both for single and multiple selection. To deselect one of the elements, use **Ctrl Single-Click (Command Single-Click on OS X)**.

Document errors (such as an element inserted in an invalid position, or a wrong attribute name, or a missing required attribute value) are highlighted in the **Outline** tree:

- A red exclamation mark decorates the element icon.
- A dotted red underline decorates the element name and value.
- A tooltip provides more information about the nature of the error, when you hover with the mouse pointer over the faulted element.

Modification Follow-up

When you edit a document, the **Outline** view dynamically follows the changes that you make, displaying the node that you modify in the middle of the view. This functionality gives you great insight on the location of your modifications in the document that you edit.

Drag and Drop Actions in Outline View

Entire XML elements can be moved or copied in the edited document using only the mouse in the **Outline** view with drag-and-drop operations. Several drag and drop actions are possible:

- If you drag an XML element in the **Outline** view and drop it on another one in the same panel then the dragged element will be moved after the drop target element.
- If you hold the mouse pointer over the drop target for a short time before the drop then the drop target element will be expanded first and the dragged element will be moved inside the drop target element after its opening tag.

- You can also drop an element before or after another element if you hold the mouse pointer towards the upper or lower part of the targeted element. A marker will indicate whether the drop will be performed before or after the target element.
- If you hold down the **(Ctrl (Command on OS X))** key after dragging, there will be performed a copy operation instead of a move one.

The drag and drop action in the **Outline** view can be *disabled and enabled from a Preferences page*.

Document Tag Selection

The Outline view can also be used to search for a specific tag location and contents in the edited document. Intuitively, by selecting with the left mouse button the desired tag in the Outline view, the document is scrolled to the position of the selected tag. Moreover, the tag contents are selected in the document, making it easy to notice the part of the document contained by that specific tag and furthermore to easily copy and paste the tag's contents in other parts of the document or in other documents.

You can double click the tag in the **Outline** tree to move the focus in the editor.

You can also use the filter text field search to look for a particular tag name in the **Outline** tree.

Navigation Buttons

These buttons are available in the main toolbar and the **Find** menu:

-  **Last Modification** - Moves the cursor to the last modification in any opened document.
-  **Back** - Moves the cursor to the previous position.
-  **Forward** - Moves the cursor to the next position. Enabled after at least one press of the **Back** button.

Changing the Font Size

The font size of the editor panel can be changed with the following actions:

- **Document > Font size > Increase editor font (Ctrl NumPad+[plus sign] (Command NumPad+[plus sign] on OS X))** - increases the font size with one point for each execution of the action.
- **Document > Font size > Decrease editor font (Ctrl NumPad-[minus sign] (Command NumPad-[minus sign] on OS X))** - decreases the font size with one point for each execution of the action.
- **Document > Font size > Normal editor font (Ctrl 0 (Command 0 on OS X))** - resets the font size to *the value of the editor font set in Preferences*.

The Undo/Redo Actions

The typical undo and redo actions are available in the **Edit** menu:

Undo Ctrl Z (Meta Z on OS X)

Reverses a maximum of 200 editing actions (configurable in the *Editor preferences page*) to return to the preceding state.



Note: Complex operations like **Replace All** or **Indent selection** count as single undo events.

Redo Ctrl Y (Meta Shift Z on OS X, Ctrl Shift Z on Linux/Unix)

Recreates a maximum of 100 editing actions that were undone by the **Undo** function.

Dragging and Dropping the Selected Text

To move a whole region of text to other location in the same edited document just select the text, drag the selection by holding down the left mouse button and drop it to the target location.

You can also copy content from other applications and paste it into the document.

Copying and Pasting Text

The typical copying and pasting actions are available:

Edit >  Cut Ctrl C (Meta C on OS X)

Removes the current selected node from the document and places it in the clipboard as RTF. All text attributes such as color, font, or syntax highlight are preserved when pasting into another application.

Edit >  Copy Ctrl C (Meta C on OS X)

Places a copy of the current selection in the clipboard as RTF. All text attributes such as color, font, or syntax highlight are preserved when pasting into another application.

Edit >  Paste Ctrl V (Meta V on OS X)

Places the current clipboard content into the document at the cursor position.

Edit > Select All Ctrl A (Meta A on OS X)

Selects the entire body of the current document, including whitespace preceding the first and following the last character.

Printing a File

Printing is supported in **Text** and **Grid** modes. The **Print**(Ctrl P (Meta P on OS X)) action that is available from **File** menu displays the **Page Setup** dialog box, used for defining the page size and orientation properties for printing.

A **Print Preview** action is also available in the **File** menu. It allows you to manage the format of the printed document.

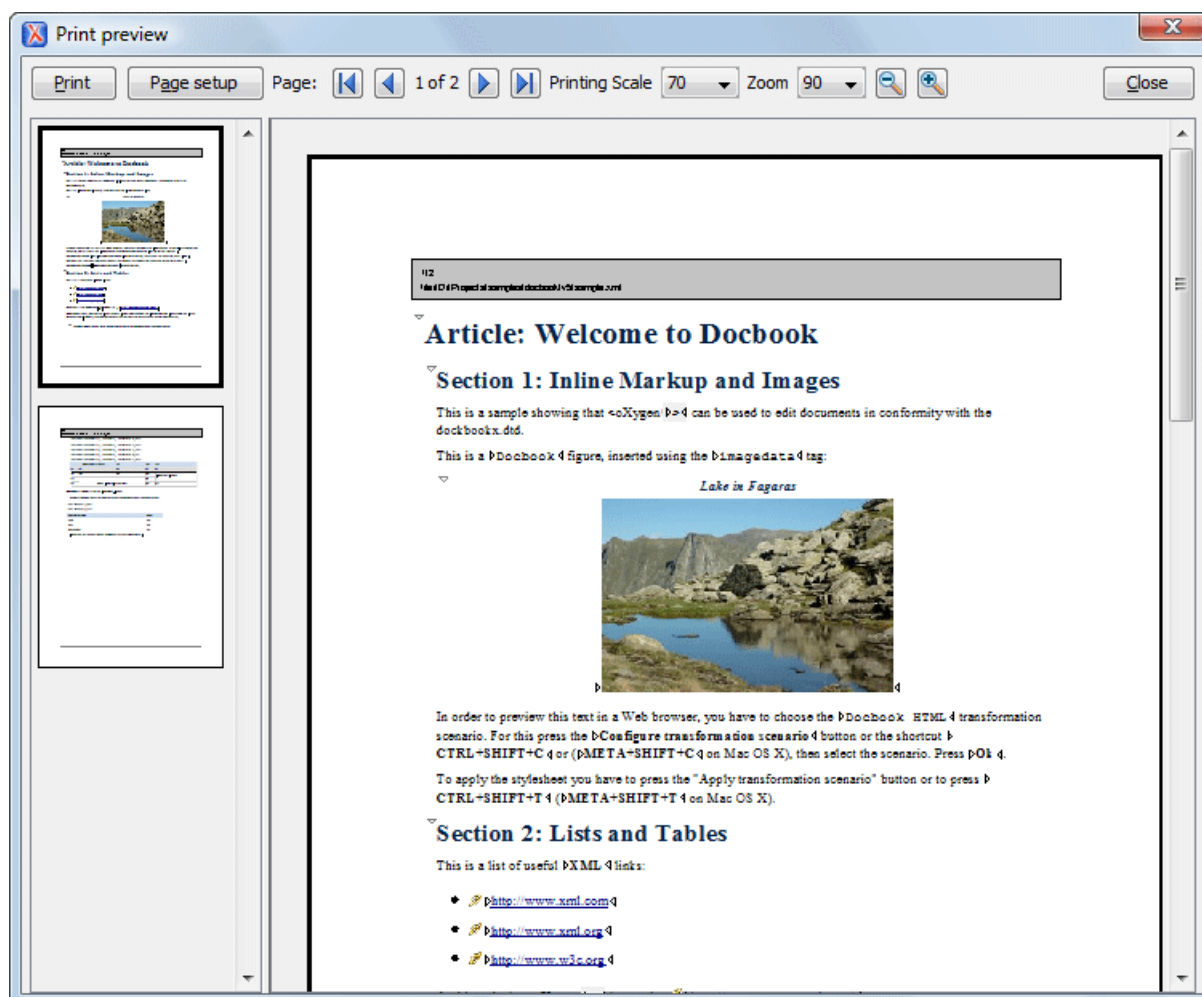


Figure 64: Print Preview Dialog Box

The main window is split in three sections:

- **Preview area** - Displays the formatted document page as it will appear on printed paper.
- **Left stripe** - The left-side stripe that displays a list of thumbnail pages. Clicking any of them displays the page content in the main preview area.
- **Toolbar** - The toolbar area at the top that contains controls for printing, page settings, page navigation, print scaling, and zoom.

Finding and Replacing Text in the Current File

This section walks you through the find and replace features available in Oxygen XML Developer.

You can use a number of advanced views depending on what you need to find in the document you are editing or in your entire project. The [Find/Replace dialog box](#) allows you to search through the current project or selected resources and offers a set of options to improve your search. The [Find All Elements/Attributes dialog box](#) allows you to search through the structure of the current document for elements and attributes.

As an alternative to the dedicated search operations, you can also use the [Quick Find toolbar](#).

The Find/Replace Dialog Box

To open the **Find/Replace** dialog box, use the  **Find/Replace** action that is available in the **Find** menu, on the toolbar, or by pressing **Ctrl F (Meta F on OS X)**.

You can use the **Find/Replace** dialog box to perform the following operations:

- Replace occurrences of target defined in the **Find** area with a new fragment of text defined in **Replace with** area.
- Find all the occurrences of a word or string of characters (that can span over multiple lines) in the document you are editing. This operation also takes into account all the white spaces contained in the fragment you are searching for.



Note: The **Find/Replace** dialog box counts the number of occurrences of the text you are searching for and displays it at the bottom of the dialog box, above the **Close** button. This number is also displayed in [the Results view](#).

The *find* operation works on multiple lines, meaning that a find match can cover characters on more than one line of text. To input multiple-line text in the **Find** and **Replace with** areas, do one of the following:

- Press **Ctrl Enter (Meta Enter on OS X)** on your keyboard.
- Use the **Insert newline** contextual menu action.

You can use [Perl-like regular expressions syntax](#) to define patterns. A content completion assistant window is available in the **Find** and **Replace with** areas to help you edit regular expressions. It is activated every time you type \ (backslash key) or on-demand if you press **Ctrl Space (Command Space on OS X)** on your keyboard.

The *replace* operation can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.

To replace the **tag-name** start tag and its attributes with the new-**tag-name** tag use as **Find** the expression `<tag-name(\s+)(.*)>` and as **Replace with** the expression `<new-tag-name$1$2>`.

The dialog box contains the following options:

- **Find** - The target character string to search for. You can search for Unicode characters specified in the \UNNNN format. Also, hexadecimal notation (\xNNNN) and octal notation (\0NNNN) can be used. In this case you have to select the **Regular expression** option. For example, to search for a space character you can use the \u0020 code.
- **Replace with** - The character string with which to replace the target. The string for replace can be on a line or on multiple lines. It can contain Perl notation capturing groups, only if the search expression is a regular expression and the **Regular expression** option is selected.



Note: Some regular expressions can block indefinitely the application. If the execution of the regular expression does not end in about 5 seconds, the application displays a dialog box that allows you to interrupt the operation.



Note: Special characters like *newline* and *tab* can be inserted in the **Find** and **Replace with** text boxes using dedicated actions in the contextual menu (**Insert newline** and **Insert tab**).

Unicode characters in the \uNNNN format can also be used in the **Replace with** area.

- The  **History** button - Contain lists of the last find and replace expressions. Use the  **Clear history** action from the bottom of the lists to remove these expressions.
- **XPath** - The XPath 2.0 expression you input in this combo is used for restricting the search scope.



Note: The **Content Completion Assistant** helps you input XPath expressions, valid in the current context.

- **Direction** - Specifies if the search direction is from current position to end of file (**Forward**) or to start of file (**Backward**).
- **Scope** - Specifies whether the **Find/Replace** operation is executed over the entire content of the edited document (**All** option), or over the selected lines of text (**Only selected lines** option). If the selection spans across multiple lines, when you open the **Find/Replace** dialog box, the scope is set to **Only selected lines**.
- **Case sensitive** - When checked, the search operation follows the exact letter case of the text entered in the **Find** field.
- **Whole words only** - Only entire occurrences of a word are included in the search operation.
- **Incremental** - The search operation is started every time you type or delete a letter in the **Find** text box.
- **Regular expression** - When this option is enabled, you can use regular expressions in *Perl-like regular expressions syntax* to look for specific pieces of text.
 - **Dot matches all** - A dot used in a regular expression also matches end of line characters.
 - **Canonical equivalence** - If enabled, two characters will be considered a match if, and only if, their full *canonical* decompositions match. For example, the ã symbol can be inserted as a single character or as two characters (the a character, followed by the tilde character). This option is disabled by default.
- **Wrap around** - When the end of the document is reached, the search operation is continued from the start of the document, until its entire content is covered.
- **Enable XML search options** - This option is only available when editing in **Text** mode. It provides access to a set of options that allow you to search specific XML component types:
 - **Element names** - Only the element names are included in the search operation which ignores XML-tag notations ('<', '/', '>'), attributes or white-spaces.
 - **Element contents** - Search in the text content of XML elements.
 - **Attribute names** - Only the attribute names are included in the search operation, without the leading or trailing white-spaces.
 - **Attribute values** - Only the attribute values are included in the search operation, without single quotes(') or double quotes(").
 - **Comments** - Only the content of comments is included in the search operation, excluding the XML comment delimiters ('<!--', '-->').
 - **PIs (Processing Instructions)** - Only the content are searched, skipping '<?', '?>'. e. g.: `<?processing instruction?>`
 - **CDATA** - Searches inside content of CDATA sections.
 - **DOCTYPE** - Searches inside content of DOCTYPE sections.
 - **Entities** - Only the entity names are searched.

The two buttons **Select All** and **Deselect All** allow a simple activation and deactivation of all types of XML components.



Note: Even if you enable all options of the **Enable XML search options** section, the search is still XML-aware. If you want to perform the search over the entire file content, disable **Enable XML search options**.

- **Find** - Executes a find operation for the next occurrence of the target. It stops after highlighting the find match in the editor panel.
- **Replace** - Executes a replace operation for the target followed by a find operation for the next occurrence.

- **Find All** - Executes a find operation and displays all results in the [Results view](#). The results are [displayed in the Results view](#).
- **Replace All** - Executes a replace operation in the entire scope of the document.
- **Replace to End** - Executes a replace operation starting from current target until the end of the document, in the direction specified by the current selection of the **Direction** switch (**Forward** or **Backward**).

The Find All Elements Dialog Box

To open the **Find All Elements** dialog box, go to **Find > Find All Elements** (**Ctrl Shift E** (**Meta Shift E on OS X**)) or from the shortcut **Find All Elements** that is available in [the Find / Replace dialog box](#). It assists you in defining XML element / attribute search operations in the current document.

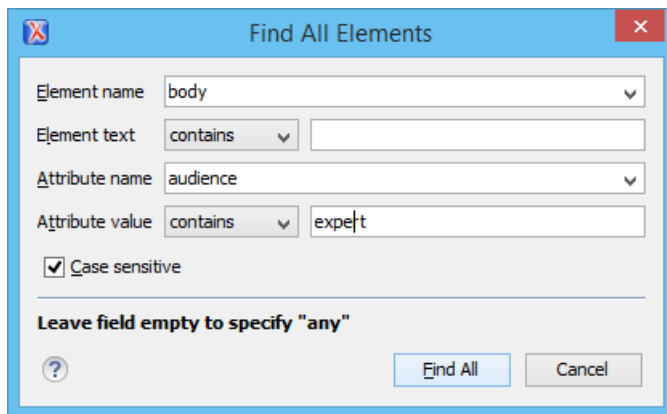


Figure 65: Find All Elements Dialog Box

The dialog box can perform the following actions:

- Find all the elements with a specified name
- Find all the elements that contain, or does not contain, a specified string in their text content
- Find all the elements that have a specified attribute
- Find all the elements that have an attribute with, or without, a specified value

You can combine all of these search criteria to filter your results.

The following fields are available in the dialog box:

- **Element name** - The qualified name of the target element to search for. You can use the drop-down menu to find an element or enter it manually. It is populated with valid element names collected from the associated schema. To specify *any* element name, leave the field empty.



Note: Use the qualified name of the element (`<namespace prefix>:<element name>`) when the document uses this element notation.

- **Element text** - The target element text to search for. The drop-down menu beside this field allows you to specify whether you are looking for an exact or partial match of the element text. For *any* element text, select **contains** from the drop-down menu and leave the field empty. If you leave the field empty but select **equals** from the drop-down menu, only elements with no text will be found. Select **not contains** to find all elements that do not include the specified text.
- **Attribute name** - The name of the attribute that must be present in the element. You can use the drop-down menu to select an attribute or enter it manually. It is populated with valid attribute names collected from the associated schema. For *any* or no attribute name, leave the field empty.



Note: Use the qualified name of the attribute (`<namespace prefix>:<attribute name>`) when the document uses this attribute notation.

- **Attribute value** - The drop-down menu beside this field allows you to specify that you are looking for an exact or partial match of the attribute value. For *any* or no attribute value, select **contains** from the drop-down menu and

leave the field empty. If you leave the field empty but select **equals** from the drop-down menu, only elements that have at least an attribute with an empty value will be found. Select **not contains** to find all elements that have attributes without a specified value.

- **Case sensitive** - When this option is checked, operations are case-sensitive

When you press **Find All**, Oxygen XML Developer tries to find the items that match all the search parameters. The results of the operation are presented as a list in the message panel.

The Quick Find Toolbar

A reduced version of [the Find / Replace dialog box](#) is available as [a dockable toolbar](#). To display it press the **Alt Shift F (Meta Alt F on OS X)** key combination or invoke the **Find >  Quick Find** action. By default, the toolbar is displayed at the bottom of the Oxygen XML Developer window, above the status bar, but can be changed at any time by dragging (and docking) it to a different location. To hide the toolbar, use the  **Close** button or **ESC** key.

All matches are highlighted in the current editor.

The toolbar offers the following controls:

- A search input box where you insert the text you want to search for. The input box keeps a history of the last used search text. The background color of the input box turns red when no match is found.
- **Next** and **Previous** buttons. They allow you to advance to the next or previous match.
- **All** button. Highlights in the current document all matches of the search string.
- **Incremental** check box. The search operation is started every time you type or delete a character in the search input box.
- **Case sensitive** check box. When selected, the search operation follows the exact letter case of the search text.
- Shortcuts to the  **Find/Replace** and  **Find/Replace in Files** dialog boxes.

Keyboard Shortcuts for Finding the Next and Previous Match

Navigating from one match to the next or previous one is very easy to perform using the **F3** and **Shift F3 (Meta Shift G on OS X)** keyboard shortcuts. They are useful to quickly repeat the last find action performed in [the Find / Replace dialog box](#), taking into account the same find options.

Regular Expressions Syntax

Oxygen XML Developer uses the Java regular expression syntax. It is **similar** to that used in Perl 5, with several exceptions. Thus, Oxygen XML Developer does not support the following constructs:

- The conditional constructs **(?{X})** and **(?(condition)X|Y)**.
- The embedded code constructs **(?{code})** and **(??{code})**.
- The embedded comment syntax **(?#comment)**.
- The preprocessing operations **\l**, **\u**, **\L**, and **\U**.

There are some other notable differences that may cause unexpected results, including the following:

- In Perl, **\1** through **\9** are always interpreted as back references; a backslash-escaped number greater than 9 is treated as a back reference if at least that many sub-expressions exist, otherwise it is interpreted, if possible, as an octal escape. In this class octal escapes must always begin with a zero. In Java, **\1** through **\9** are always interpreted as back references, and a larger number is accepted as a back reference if at least that many sub-expressions exist at that point in the regular expression, otherwise the parser will drop digits until the number is smaller or equal to the existing number of groups or it is one digit.
- Perl uses the **g** flag to request a match that resumes where the last match left off.
- In Perl, embedded flags at the top level of an expression affect the whole expression. In Java, embedded flags always take effect at the point at which they appear, whether they are at the top level or within a group; in the latter case, flags are restored at the end of the group just as in Perl.
- Perl is forgiving about malformed matching constructs, as in the expression ***a**, as well as dangling brackets, as in the expression **abc]**, and treats them as literals. This class also accepts dangling brackets but is strict about dangling meta-characters like **+**, **?** and *****.

Finding and Replacing Text in Multiple Files

To open the **Find/Replace in Files** dialog box, use the  **Find/Replace in Files** action that is available in the following locations::

- The **Find** menu.
- The main toolbar.
- The contextual menu of the **DITA Maps Manager** view.
- The contextual menu of the **Project** view.
- The contextual menu of the **Data Source Explorer** view for Documentum xDb (X-Hive/DB), eXist and WebDAV connections. This action is available for Documentum (CMS), but lacks the *replace* feature.

The operation works on both local and remote files from an (S)FTP, WebDAV or [CMS](#) server.

It enables you to define *Search for* or *Search for and Replace* operations across a number of files. You can use [Perl-like regular expression syntax](#) to match patterns in text content. The *replace* operation can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.

To replace the `tag-name` start tag and its attributes with the new-`tag-name` tag use as **Text to find** the expression `<tag-name(\s+)(.*)>` and as **Replace with** the expression `<new-tag-name$1$2>`.

The encoding used to read and write the files is detected from the XML header or from the BOM. If a file does not have an XML header or BOM Oxygen XML Developer uses by default the UTF-8 encoding for files of type XML, that is for files with one of the extensions: `.xml`, `.xsl`, `.fo`, `.xsd`, `.rng`, `.nvd1`, `.sch`, `.wsdl` or [an extension associated with the XML editor type](#). For the other files it uses [the encoding configured for non-XML files](#).

You can cancel a long operation at any time by pressing the **Cancel** button of the progress dialog box displayed when the operation is executed.

Since the content of read-only files cannot be modified, the **Replace** operation is not processing those files. For every such file, a warning message is displayed in the message panel.

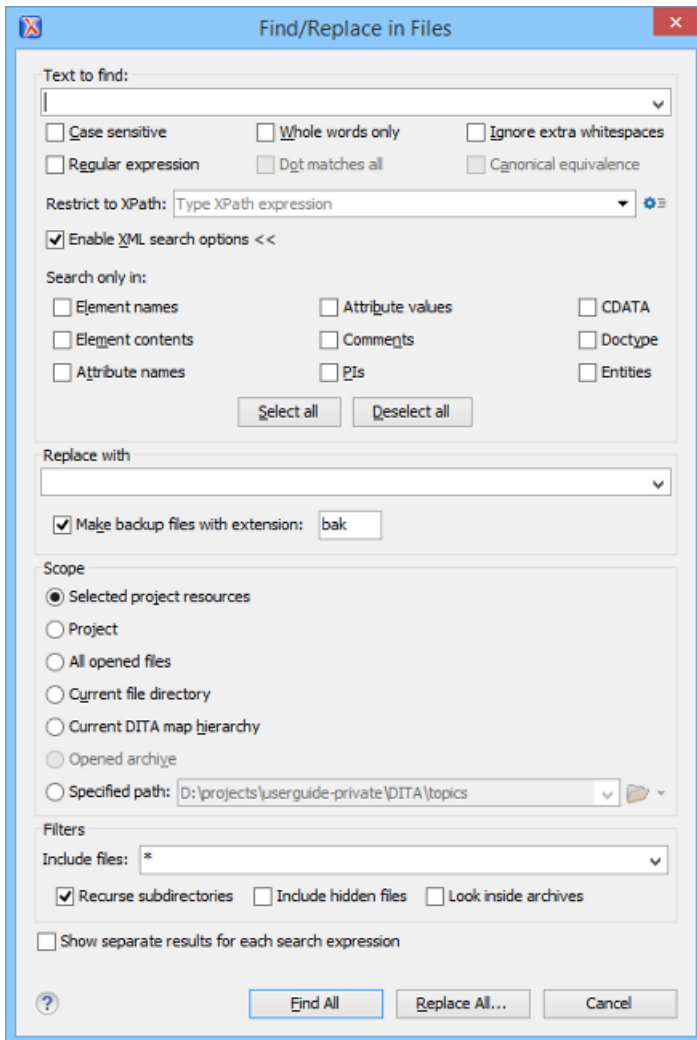


Figure 66: Find / Replace in Files Dialog Box

The dialog box contains the following options:

- **Text to find** - The target character string to search for. You can search for Unicode characters specified in the \UNNNN format. Also, hexadecimal notation (\XNNNN) and octal notation (\ONNNN) can be used. In this case you have to select the **Regular expression** option. For example, to search for a space character you can use the \u0020 code.
- **Case sensitive** - When checked, the search operation follows the exact letter case of the value entered in the **Text to find** field.
- **Whole words only** - Only entire occurrences of a word are included in the search operation.
- **Ignore extra whitespaces** - If enabled, the application normalizes the content (collapses any sequence of whitespace characters into a single space) and trims its leading and trailing whitespaces when performing the search operation.
- **Regular expression** - When this option is enabled, you can use regular expressions in *Perl-like regular expressions syntax* to look for specific pieces of text.
 - **Dot matches all** - A dot used in a regular expression also matches end of line characters.
 - **Canonical equivalence** - If enabled, two characters will be considered a match if, and only if, their full *canonical* decompositions match. For example, the ã symbol can be inserted as a single character or as two characters (the a character, followed by the tilde character). This option is disabled by default.
- **XPath** - The XPath 2.0 expression you input in this combo is used for restricting the search scope.



Note: The **Content Completion Assistant** helps you input XPath expressions, valid in the current context.

- **Enable XML search options** - This option is only available when editing in **Text** mode. It provides access to a set of options that allow you to search specific XML component types:
 - **Element names** - Only the element names are included in the search operation which ignores XML-tag notations ('<', '/', '>'), attributes or white-spaces.
 - **Element contents** - Search in the text content of XML elements.
 - **Attribute names** - Only the attribute names are included in the search operation, without the leading or trailing white-spaces.
 - **Attribute values** - Only the attribute values are included in the search operation, without single quotes(') or double quotes(").
 - **Comments** - Only the content of comments is included in the search operation, excluding the XML comment delimiters ('<!--', '-->').
 - **PIs (Processing Instructions)** - Only the content are searched, skipping '<?', '?>'. e. g.: `<?processing instruction?>`
 - **CDATA** - Searches inside content of CDATA sections.
 - **DOCTYPE** - Searches inside content of DOCTYPE sections.
 - **Entities** - Only the entity names are searched.

The two buttons **Select All** and **Deselect All** allow a simple activation and deactivation of all types of XML components.



Note: Even if you enable all options of the **Enable XML search options** section, the search is still XML-aware. If you want to perform the search over the entire file content, disable **Enable XML search options**.

- **Replace with** - The character string with which to replace the target. It may contain regular expression group markers if the search expression is a regular expression and the **Regular expression** checkbox is checked.
- **Make backup files with extension** - In the replace process Oxygen XML Developer makes backup files of the modified files. The default extension is `.bak`, but you can change the extension as you prefer.
- **Selected project resources** - Searches only in the selected files of the currently opened project. This option is not displayed when this dialog box is opened from the [Archive Browser](#) view.
- **Project files** - Searches in all files from the current project. This option is not displayed when this dialog box is opened from the [Archive Browser](#) view.
- **All opened files** - Searches in all files opened in Oxygen XML Developer. You are prompted to save all modified files before any operation is performed. This option is not displayed when this dialog box is started from the [Archive Browser](#) view.
- **Current file directory** - The search is done in the directory of the file opened in the current editor panel. If there is no opened file, this option is disabled. This option is not displayed when this dialog box is opened from the [Archive Browser](#) view.
- **Opened archive** - The search is done in an archive opened in the [Archive Browser](#) view. Displayed only when this dialog box is opened from the [Archive Browser](#) view.
- **Specified path** - Chooses the search path.
- **Include files** - Narrows the scope of the operation only to the files that match the given filters.
- **Recurse subdirectories** - When enabled, the *pretty print* is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When enabled, the search is also performed in the hidden files.
- **Include archives** - When enabled, the search is also done in all individual file entries from all supported ZIP-type archives.
- **Show separate results for each search expression** - When enabled, the application opens a new tab to display the result of each new search expression. When the option is unchecked, the search results are displayed in the *Find in Files* tab, replacing any previous search results.
- **Find All** - Executes a find operation and returns the result list to the message panel. The results are [displayed in a view](#) that allows grouping the results as a tree with two levels.
- **Replace All** - Replaces all occurrences of the target contained in the specified files.

When you replace a fragment of text, Oxygen XML Developer provides a preview of the changes you make. The **Preview** dialog box is divided in two sections. The first section presents a list of all the documents containing the fragment of text you want to modify. The second section offers a view of the original file and a view of the final result. It also allows you to highlight all changes using the vertical bar from the right side of the view. The **Next change** and **Previous change** buttons allow you to navigate through the changes displayed in the **Preview** dialog box.



Caution: Use this option with caution. Global search and replace across all project files does not open the files containing the targets, nor does it prompt on a per occurrence basis, to confirm that a replace operation must be performed. As the operation simply matches the string defined in the find field, this may result in replacement of matching strings that were not originally intended to be replaced.

Editing Large XML Documents

Consider the case of documenting a large project. It is likely that there will be several people involved. The resulting document can be few megabytes in size. The question becomes how to deal with this amount of data in such a way that work parallelism will not be affected.

Fortunately, XML provides two solutions for this: DTD entities and XInclude. A master document can be created, with references to the other document parts, containing the document sections. The users can edit the documents individually, then apply an XSLT stylesheet over the master and obtain the output files in various formats (for example, PDF or HTML).

Including Document Parts with DTD Entities

There are two conditions for including a part using DTD entities:

- The master document should declare the DTD to be used, while the external entities should declare the XML sections to be referenced.
- The document containing the section must not define again the DTD.

A master document looks like this:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE book SYSTEM "../xml/docbookx.dtd" [
<!ENTITY testing SYSTEM "testing.xml" > ]
>
<book>
<chapter> ...
```

The referenced document looks like this:

```
<section> ... here comes the section content ... </section>
```



Note:

The indicated DTD and the element names (*section*, *chapter*) are used here only for illustrating the inclusion mechanism. You can use any DTD and element names you need.

At a certain point in the master document there can be inserted the section *testing.xml* entity:

```
... &testing; ...
```

When splitting a large document and including the separate parts in the master file using external entities, only the master file will contain the Document Type Definition (the DTD) or other type of schema. The included sections can not define the schema again because the main document will not be valid. If you want to validate the parts separately you have to [use XInclude](#) for assembling the parts together with the master file.

Including Document Parts with XInclude

XInclude is a standard for assembling XML instances into another XML document through inclusion. It enables larger documents to be dynamically created from smaller XML documents without having to physically duplicate the content of the smaller files in the main file. XInclude is targeted as the replacement for External Entities. The advantage of using XInclude is that, unlike the entities method, each of the assembled documents is permitted to contain a Document Type Declaration (DOCTYPE). This means that each file is a valid XML instance and can be independently validated. It also means that the main document to which smaller instances are included can be validated without having to remove or comment out the DOCTYPE, as is the case with External Entities. This makes XInclude a more convenient and effective method for managing XML instances that need to be stand-alone documents and part of a much larger project.

The main application for XInclude is in the document-oriented content frameworks such as manuals and Web pages. Employing XInclude enables authors and content managers to manage content in a modular fashion that is akin to Object Oriented methods used in languages such as Java, C++ or C#.

The advantages of modular documentation include: reusable content units, smaller file units that are easier to be edited, better version control and distributed authoring.

Include a chapter in an article using XInclude

Create a chapter file and an article file in the `samples` folder of the Oxygen XML Developer install folder.

Chapter file (`introduction.xml`) looks like this:

```
<?xml version="1.0"?>
<!DOCTYPE chapter PUBLIC "-//OASIS//DTD DocBook XML V4.3//EN"
"http://www.oasis-open.org/docbook/xml/4.3/docbookx.dtd">
<chapter>
  <title>Getting started</title>
  <section>
    <title>Section title</title>
    <para>Para text</para>
  </section>
</chapter>
```

Main article file looks like this:

```
<?xml version="1.0"?>
<!DOCTYPE article PUBLIC "-//OASIS//DTD DocBook XML V4.3//EN"
"http://www.docbook.org/xml/4.3/docbookx.dtd"
[ <!ENTITY % xinclude SYSTEM "../frameworks/docbook/dtd/xinclude.mod">
%xinclude;
]>
<article>
  <title>Install guide</title>
  <para>This is the install guide.</para>
  <xi:include xmlns:xi="http://www.w3.org/2001/XInclude"
             href="introduction.dita">
    <xi:fallback>
      <para>
        <emphasis>FIXME: MISSING XINCLUDE CONTENT</emphasis>
      </para>
    </xi:fallback>
  </xi:include>
</article>
```

In this example the following is of note:

- The DOCTYPE declaration defines an entity that references a file containing the information to add the *xi* namespace to certain elements defined by the DocBook DTD.
- The href attribute of the *xi:include* element specifies that the `introduction.xml` file will replace the *xi:include* element when the document is parsed.
- If the `introduction.xml` file cannot be found, the parser will use the value of the *xi:fallback* element - a FIXME message.

If you want to include only a fragment of a file in the master file, the fragment must be contained in a tag having an `xml:id` attribute and you must use an XPointer expression pointing to the `xml:id` value. For example if the master file is:

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="test.rng" type="application/xml" schematypens="http://relaxng.org/ns/structure/1.0"?>
<test>
  <xi:include href="a.xml" xpointer="a1"
    xmlns:xi="http://www.w3.org/2001/XInclude"/>
</test>
```

and the `a.xml` file is:

```
<?xml version="1.0" encoding="UTF-8"?>
<test>
  <a xml:id="a1">test</a>
</test>
```

after resolving the XPointer reference the document is:

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="test.rng" type="application/xml" schematypens="http://relaxng.org/ns/structure/1.0"?>
<test>
  <a xml:id="a1" xml:base="a.xml">test</a>
</test>
```

The XInclude support in Oxygen XML Developer is enabled by default. To [configure it](#), open the **Preferences dialog box** and go to **XML > XML Parser > Enable XInclude processing**. When enabled, Oxygen XML Developer will be able to validate and transform documents comprised of parts added using XInclude.

Working with XML Catalogs

An *XML Catalog* maps a system ID or an URI reference pointing to a resource (stored either remotely or locally) to a local copy of the same resource. If XML processing relies on external resources (like referenced schemas and stylesheets, for example), the use of an XML Catalog becomes a necessity when Internet access is not available or the Internet connection is slow.

Oxygen XML Developer supports any XML Catalog file that conforms to one of:

1. [OASIS XML Catalogs Committee Specification v1.1](#)
2. [OASIS Technical Resolution 9401:1997](#) including the plain-text flavor described in that resolution

The version 1.1 of the OASIS XML Catalog specification introduces the possibility to map a system ID, a public ID or a URI to a local copy using only a suffix of the ID or URI used in the actual document. This is done using the catalog elements [systemSuffix](#) and [uriSuffix](#).

Depending on the resource type, Oxygen XML Developer uses different catalog mappings.

Table 3: Catalog Mappings

Document	Referenced Resource	Mappings
XML	DTD	<i>system</i> or <i>public</i> The Prefer option controls which one of the mappings should be used.
	XML Schema	The following strategy is used (if one step fails to provide a resource, the next is applied):
	Relax NG	1. resolve the schema using <i>URI</i> catalog mappings.
	Schematron	2. resolve the schema using <i>system</i> catalog mappings.
	NVDL	This happens only if the Resolve schema locations also through system mappings option is enabled (it is by default).
		3. resolve the root <i>namespace</i> using <i>URI</i> catalog mappings.

Document	Referenced Resource	Mappings
XSL	XSL/ANY	URI
CSS	CSS	URI
XML Schema	XML Schema	The following strategy is used (if one step fails to provide a resource, the next is applied):
Relax NG	Relax NG	1. resolve schema reference using <i>URI</i> catalog mappings. 2. resolve schema reference using <i>system</i> catalog mappings. This happens only if the Resolve schema locations also through system mappings option is enabled (it is by default). 3. resolve schema <i>namespace</i> using <i>uri</i> catalog mappings. This happens only if the Process namespaces through URI mappings for XML Schema option is enabled (it is not by default).

An XML Catalog file can be created quickly in Oxygen XML Developer starting from the two XML Catalog document templates called *OASIS XML Catalog 1.0* and *OASIS XML Catalog 1.1* and available when [creating new document templates](#).

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE catalog
  PUBLIC "-//OASIS//DTD XML Catalogs V1.1//EN"
  "http://www.oasis-open.org/committees/entity/release/1.1/catalog.dtd">

<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">

  <!-- Use "system" and "public" mappings when resolving DTDs -->
  <system
    systemId="http://www.docbook.org/xml/4.4/docbookx.dtd"
    uri="frameworks/docbook/4.4/dtd/docbookx.dtd"/>
  <!-- The "systemSuffix" matches any system ID ending in a specified string -->
  <systemSuffix
    systemIdSuffix="docbookx.dtd"
    uri="frameworks/docbook/dtd/docbookx.dtd"/>

  <!-- Use "uri" for resolving XML Schema and XSLT stylesheets -->
  <uri
    name="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng"
    uri="frameworks/docbook/5.0/rng/docbookxi.rng"/>

  <!-- The "uriSuffix" matches any URI ending in a specified string -->
  <uriSuffix
    uriSuffix="docbook.xsl"
    uri="frameworks/docbook/xsl/fo/docbook.xsl"/>

</catalog>
```

Oxygen XML Developer comes with a built-in catalog set as default, but you can also create your own one. Oxygen XML Developer looks for a catalog in the following order:

- User-defined catalogs set globally in the [XML Catalog preferences](#) page.
- User-defined catalogs set at document type level, in the **Catalog** tab from the [Document Type configuration dialog box](#).
- Built-in catalogs.

An XML catalog can be used to map a W3C XML Schema specified with an URN in the `xsi:noNamespaceSchemaLocation` attribute of an XML document to a local copy of the schema.

Considering the following XML document code snippet:

```
<topic xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1">
```

The URN can be resolved to a local schema file with a catalog entry like:

```
<uri name="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1"
      uri="topic.xsd"/>
```

Resolve Schemas Through XML Catalogs

Oxygen XML Developer resolves the location of a schema in the following order:

- First, it attempts to resolve the schema location as a URI (`uri`, `uriSuffix`, `rewriteURI` mappings from the XML catalog). If this succeeds, the process ends here.
- If the [Resolve schema locations also through system mappings](#) option is selected, it attempts to resolve the schema location as a systemID (`system`, `systemSuffix`, `rewriteSuffix`, `rewriteSystem` from the XML catalog). If this succeeds, the process ends here.
- If the [Process namespace through URI mappings for XML Schema](#) option is selected, it attempts to resolve the location by processing the schema namespace as a URI (`uri`, `uriSuffix`, `rewriteURI` from the XML catalog). The namespace is taken into account only when the schema specified in the `schemaLocation` attribute was not resolved successfully. If this succeeds, the process ends here.
- If none of these succeeds, the actual schema location is used.

XML Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to easily see the hierarchy / dependencies for an XML document. The tree structure presented in this view is built based on the *XIinclude* and *External Entity* mechanisms. To define the scope for calculating the dependencies of a resource, click  [Configure dependencies search scope](#) on the **Resource Hierarchy/Dependencies** toolbar.

To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**. As an alternative, right click the current document and either select **Resource Hierarchy** or **Resource Dependencies**.

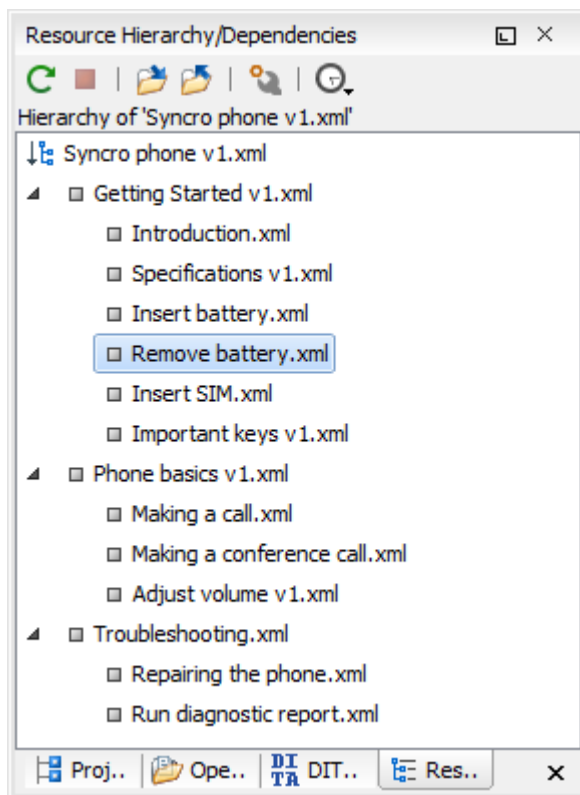


Figure 67: Resource Hierarchy/Dependencies View - Hierarchy for Syncro phone v1.xml

The build process for the dependencies view is started with the **Resource Dependencies** action available on the contextual menu.

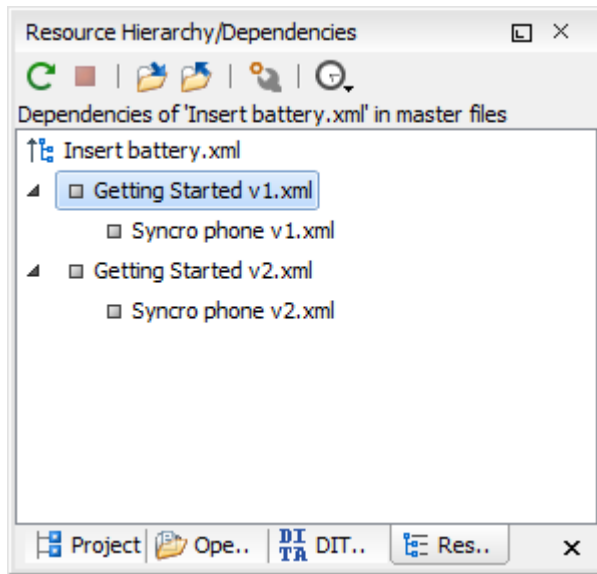


Figure 68: Resource Hierarchy/Dependencies View - Dependencies for Insert battery.xml

The following actions are available in the **Resource Hierarchy/Dependencies** view:



Refresh

Refreshes the Hierarchy/Dependencies structure.



Stop

Stops the hierarchy/dependencies computing.



Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.



Show Dependencies

Allows you to choose a resource to compute the dependencies structure.



Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.



History

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

**Add to Master Files**

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .



Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#). Only the references made through the *XInclude* and *External Entity* mechanisms are handled.

Moving/Renaming XML Resources

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Converting Between Schema Languages

The **Generate/Convert Schema** dialog box allows you to convert a DTD or Relax NG (full or compact syntax) schema or a set of XML files to an equivalent XML Schema, DTD or Relax NG (full or compact syntax) schema. Where perfect equivalence is not possible due to limitations of the target language, Oxygen XML Developer generates an approximation of the source schema. Oxygen XML Developer uses [Trang multiple format converter](#) to perform the actual schema conversions.

To open the **Generate/Convert Schema** dialog box, select the  **Generate/Convert Schema**(**Alt Shift C (Meta Alt C on OS X)**) action from the **Tools** menu or from the **Open with** submenu when invoking the contextual menu in the **Project view**.

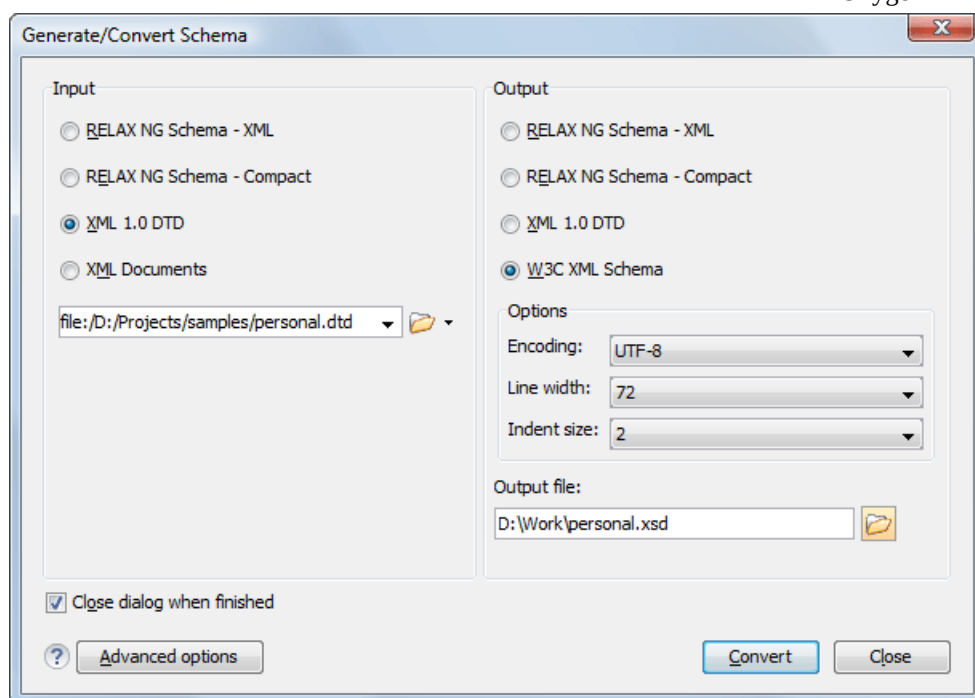


Figure 69: Convert a Schema to Other Schema Language

The language of the source schema is specified with one of the four radio buttons in the **Input** panel. If the conversion is based on a set of XML files, not just a single XML file, select the **XML Documents** option. Then use the file selector to add the XML files involved in the conversion.

The language of the target schema is specified with one of the four options in the **Output** panel. Here you can also choose the encoding, the maximum line width and the number of spaces for one level of indentation.

The conversion can be further fine-tuned by specifying more advanced options available from the **Advanced options** button. For example if the input is a DTD and the output is an XML Schema the following options are available:

Input panel:

- **xmlns** - Specifies the default namespace, that is the namespace used for unqualified element names.
- **xmlns** - Each row specifies the prefix used for a namespace in the input schema.
- **colon-replacement** - Replaces colons in element names with the specified chars when constructing the names of definitions used to represent the element declarations and attribute list declarations in the DTD.
- **element-define** - Specifies how to construct the name of the definition representing an element declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **inline-attlist** - Instructs the application not to generate definitions for attribute list declarations, but instead move attributes declared in attribute list declarations into the definitions generated for element declarations. This is the default behavior when the output language is XSD.
- **attlist-define** - Specifies how to construct the name of the definition representing an attribute list declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **any-name** - Specifies the name of the definition generated for the content of elements declared in the DTD as having a content model of ANY.
- **strict-any** - Preserves the exact semantics of ANY content models by using an explicit choice of references to all declared elements. By default, the conversion engine uses a wildcard that allows any element
- **generate-start** - Specifies whether the conversion engine should generate a start element. DTD's do not indicate what elements are allowed as document elements. The conversion engine assumes that all elements that are defined but never referenced are allowed as document elements.

- **annotation-prefix** - Default values are represented using an annotation attribute `prefix:defaultValue` where `prefix` is the specified value and is bound to `http://relaxng.org/ns/compatibility/annotations/1.0` as defined by the RELAX NG DTD Compatibility Committee Specification. By default, the conversion engine will use a `for` prefix unless that conflicts with a prefix used in the DTD.

Output panel:

- **disable-abstract-elements** - Disables the use of abstract elements and substitution groups in the generated XML Schema. This can also be controlled using an annotation attribute.
- **any-process-contents** - One of the values: `strict`, `lax`, `skip`. Specifies the value for the `processContents` attribute of any elements. The default is `skip` (corresponding to RELAX NG semantics) unless the input format is DTD, in which case the default is `strict` (corresponding to DTD semantics).
- **any-attribute-process-contents** - Specifies the value for the `processContents` attribute of anyAttribute elements. The default is `skip` (corresponding to RELAX NG semantics).

Editing XML Tree Nodes

A *Well-Formed XML document* can be viewed and edited in Oxygen XML Developer also as a tree of XML elements. This is possible in the Tree Editor perspective, available from **Tools > Tree Editor**. The **Tree Editor** provides specially designed views, toolbars and an editable tree allowing you to use common tree actions, such as create/delete nodes, edit node names, and move nodes with drag and drop.

If you want to be able to edit XML documents that are not well-formed and still have a tree view of the document you should use the *Outline view* in the Editor perspective.

Editing Modular XML Files in the Master Files Context

Smaller interrelated modules that define a complex XML modular structure cannot be correctly edited or validated individually, due to their interdependency with other modules. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any file from the hierarchy in the context of the master XML files.

You can set a main XML document either using the *master files support from the Project view*, or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main XML document. In this case, it considers the current module as the main XML document.

The advantages of editing in the context of a master file include:

- Correct validation of a module in the context of a larger XML structure.
- **Content Completion Assistant** displays all collected entities and IDs starting from the master files.
- Oxygen XML Developer uses the schema defined in the master file when you edit a module which is included in the hierarchy through the *External Entity* mechanism.
- The master files defined for the current module determines the *scope of the search and refactoring actions* for ID/IDREFS values and for updating references when renaming/moving a resource. Oxygen XML Developer performs the search and refactoring actions in the context that the master files determine, improving the speed of execution.

To watch our video demonstration about editing modular XML files in the master files context, go to http://oxygexml.com/demo/Working_With_XML_Modules.html.

Search and Refactor Actions for IDs and IDREFS

Oxygen XML Developer allows you to search for ID declarations and references (IDREFS) and to *define the scope of the search and refactor operations*. These operations are available for XML documents that have an associated DTD, XML Schema, or Relax NG schema. These operations are available through the search and refactor actions in the contextual menu. In **Text** mode, these actions are also available in the *Quick Assist* menu.

The search and refactor actions from the contextual menu are grouped in the **Manage IDs** section:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and *choose the scope of the rename operation*. For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.



Note: Available in the **Text** mode only.



Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the *Select the scope for the Search and Refactor operations* dialog box, this scope will be used instead.

Search References in

Searches for the references of the ID. Selecting this action opens the *Select the scope for the Search and Refactor operations*.



Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the *Select the scope for the Search and Refactor operations* dialog box, this scope will be used instead.



Note: Available in the **Text** mode only.

Search Declarations in

Searches for the declaration of the ID reference. Selecting this action opens the *Select the scope for the Search and Refactor operations*.



Note: Available in the **Text** mode only.



Search Occurrences in file

Searches for the declaration and references of the ID in the current document.



Tip: A quick way to go to the declaration of an ID in **Text** mode is to move the cursor over an ID reference and use the **Ctrl Single-Click (Command Single-Click on OS X)** navigation.

Selecting an ID for which you use search or refactor operations differs between the **Text** and **Author** modes. In the **Text** mode, you position the cursor inside the declaration or reference of an ID. In the **Author** mode, Oxygen XML Developer collects all the IDs by analyzing each element from the path to the root. If more IDs are available, you are prompted to choose one of them.

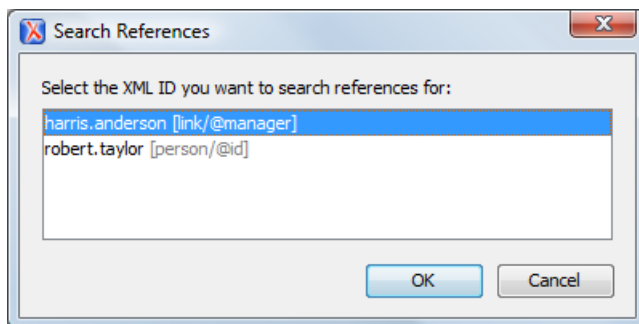


Figure 70: Selecting an ID in the Author Mode

Search and Refactor Operations Scope

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the Quick Assist action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple working sets. The **Use only Master Files, if enabled** check-box allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the [Master Files support](#).

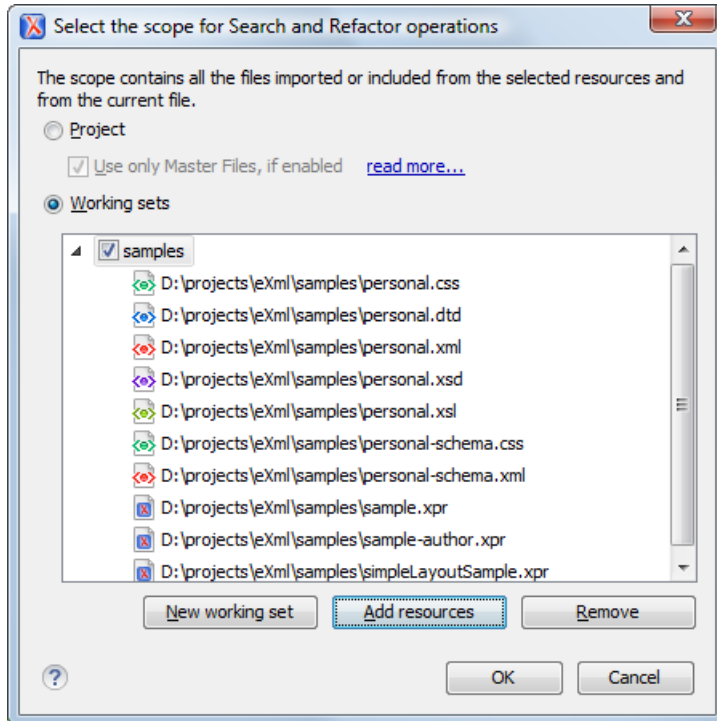


Figure 71: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the working set structure.

Viewing Status Information

Status information generated by the **Schema Detection**, **Validation**, **Automatic validation**, and **Transformation** threads are fed into the **Information** view allowing you to monitor how the operation is being executed.

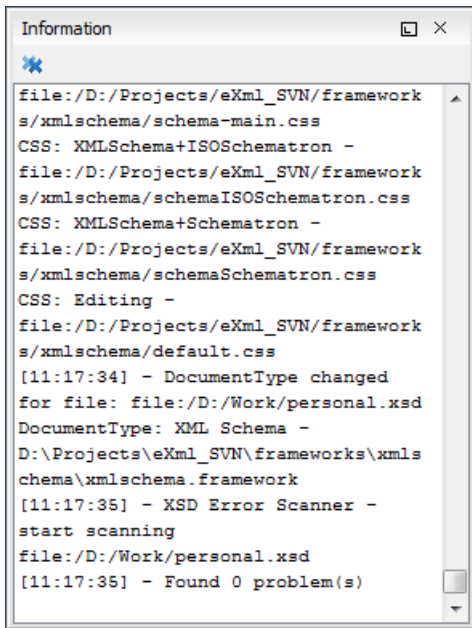


Figure 72: Information view messages

Messages contain a timestamp, the name of the thread that generated it and the actual status information. The number of displayed messages can be controlled from the [Options panel](#).

In order to make the view visible go to menu **Window > Show View > Information**.

Image Preview

Images and SVG files from the **Project** view can be previewed in a separate panel.

To preview an image, either double click the image name or click the **Preview** action from the **Project** view's contextual menu. Supported image types are GIF, JPEG/JPG, PNG, BMP. Once the image is displayed in the **Preview** panel using the actions from the contextual menu, you can scale the image to its original size (1:1 action) or scale it down to fit in the view's available area (**Scale to fit** action).

To preview an [SVG file](#), click the **Preview** action from the **Project** view's contextual menu. Once the SVG is displayed in the **Preview** panel, the following actions are available on the contextual menu: **Zoom in**, **Zoom out**, **Rotate** and **Refresh**.



Note: You can drag an image from the **Image Preview** view and drop it in a DITA, DocBook, or TEI document.

Making a Persistent Copy of Results

The **Results** panel displays the results from the following operations:

- [document validation](#)
- [checking the form of documents](#)
- [XSLT or FO transformation](#)
- [find all occurrences of a string in a file](#)
- [find all occurrences of a string in multiple files](#)
- [applying an XPath expression to the current document](#)

To make a persistent copy of the **Results** panel, use one of these actions:

File > Save Results

Displays the **Save Results** dialog box, used to save the result list of the current message tab. The action is also available on the right click menu of the **Results** panel.

File > Print Results

Displays the **Page Setup** dialog box used to define the page size and orientation properties for printing the result list of the current **Results panel**. The action is also available on the right click menu of the **Results** panel.

Save Results as XML from the contextual menu

Saves the content of the **Results** panel in an XML file with the format:

```
<Report>
  <Incident>
    <engine>The engine who provide the error.</engine>
    <severity>The severity level</severity>
    <Description>Description of output message.</Description>
    <SystemID>The location of the file linked to the message.</SystemID>
    <Location>
      <start>
        <line>Start line number in file.</line>
        <column>Start column number in file</column>
      </start>
      <end>
        <line>End line number in file.</line>
        <column>End column number in file</column>
      </end>
    </Location>
  </Incident>
</Report>
```

Locking and Unlocking XML Markup

For documents with fixed markup, such as forms in which the XML tags are not allowed to be modified (only their text content), the possibility to edit the XML tag names can be disabled/enabled with the  **Lock / Unlock the XML tags** action available in **Text** editing mode from:

- The **Document > Source** menu.
- The **Source** submenu from the contextual menu.

You can set the default lock state for all opened editors using the **Lock the XML tags** option in the [Text preferences page](#).

Adjusting the Transparency of XML Markup

Most of the time you want the content of a document displayed on screen with zero transparency. However, if you want to focus your attention only on editing text content inside XML markup, Oxygen XML Developer offers the option of reducing the visibility of the markup by increasing their transparency when displayed in **Text** mode. To change the level

of transparency, use the  [Tags Transparency Selector] drop-down menu that is available from the **Source** toolbar. By default, this drop-down menu is not visible. You can add it to the toolbar by using [the Configure Toolbars action](#). There are several levels of transparency that can be adjusted to make the content more or less visible:

- **Normal contrast** - Resets the transparency level back to normal.
- **Semi-transparent Text** - Slightly reduces the visibility of text to place greater emphasis on the visibility of the XML markup.
- **Transparent Text** - Greatly reduces the visibility of text to place even greater emphasis on the visibility of the XML markup.
- **Semi-transparent Markup** - Slightly reduces the visibility of the XML markup to place greater emphasis on the visibility of the text.

Editor Highlights

An *editor highlight* is a text fragment emphasized by a colored background.

Highlights are generated when the following actions generate results:

- Find/Replace in Files
- Open/Find Resource
- Find All

- Find All Elements
- XPath in Files
- Search References
- Search Declarations

By default, Oxygen XML Developer uses a different color for each type of highlight (*XPath in Files*, *Find/Replace*, *Search References*, *Search Declarations*, etc.) You can customize these colors and the maximum number of highlights displayed in a document on the [Editor preferences page](#). The default maximum number of highlights is 10000.

You are able to navigate the highlights in the current document by using the following methods:

- Clicking the markers from the range ruler, located at the right side of the document.
- Clicking the  **Next** and **Previous** buttons from the bottom of the range ruler.



Note: When there are multiple types of highlights in the document, the  **Next** and **Previous** buttons navigate through highlights of the same type.

- Clicking the messages displayed in the [Results view](#) at the bottom of the editor.

To remove the highlights, you can do the following:

- Click the  **Remove all** button from bottom of the range ruler.
- Close the results tab at the bottom of the editor that contains the output of the action that generated the highlights.
- Click the  **Remove all** button from the results panel at the bottom of the editor.



Note: Use the  **Highlight all results in editor** button to either display all the highlights or hide them.

XML Quick Fixes

The Oxygen XML Developer Quick Fix support helps you resolve errors that appear in an XML document by offering quick fixes to problems such as missing required attributes or invalid elements. Quick fixes are available in **Text** mode

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a Quick Fix is available for that particular error or warning, you can access the Quick Fix proposals with any of the following methods:

- When hovering over the error or warning, the proposals are presented in a tooltip popup window and the available quick fixes include a link that can be used to perform the fix.

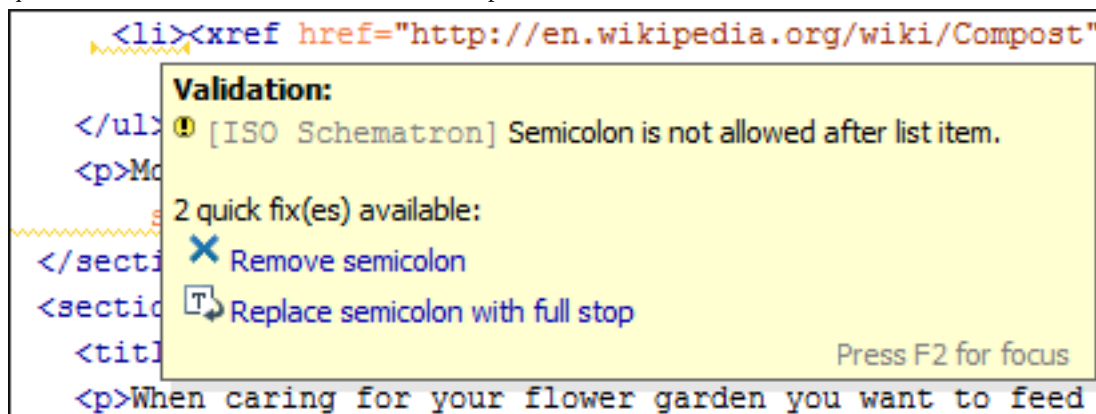


Figure 73: Quick Fix Presented in a Tooltip in Text Mode

- If you place the cursor in the highlighted area where a validation error or warning occurs, a quick fix icon () is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.

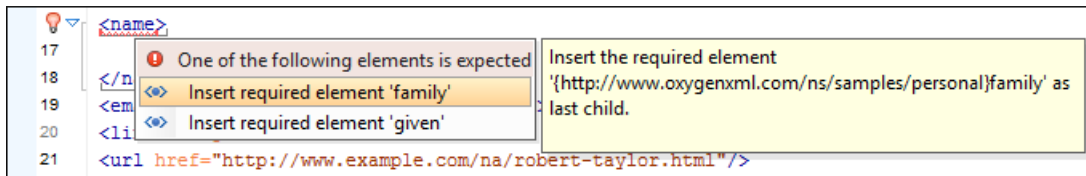


Figure 74: Quick Fix Menu Invoked by Clicking on the  Icon

- With the cursor placed in the highlighted area of the error or warning, you can also invoke the quick fix menu by pressing **Alt 1 (Meta Alt 1 on OS X)** on your keyboard.

Whenever you make a modification in the XML document or you apply a fix, the list of quick fixes is recomputed to ensure that you always have valid proposals.



Note: A quick fix that adds an element inserts it along with required and optional elements, and required and fixed attributes, depending on how the [Content Completion Assistant options](#) are configured.

Quick Fixes for XSD and Relax NG Errors

Oxygen XML Developer offers quick fixes for common errors that appear in XML documents that are validated against XSD or Relax NG schemas.



Note: For XML documents validated against XSD schemas, the quick fixes are only available if you use the default Xerces validation engine.

Quick fixes are available in **Text** mode .

Oxygen XML Developer provides quick fixes for numerous types of problems, including the following:

Problem type	Available quick fixes
A specific element is required in the current context	Insert the required element
An element is invalid in the current context	Remove the invalid element
The content of the element should be empty	Remove the element content
An element is not allowed to have child elements	Remove all child elements
Text is not allowed in the current element	Remove the text content
A required attribute is missing	Insert the required attribute
An attribute is not allowed to be set for the current element	Remove the attribute
The attribute value is invalid	Propose the correct attribute values
ID value is already defined	Generate a unique ID value
References to an invalid ID	Change the reference to an already defined ID

Schematron Quick Fixes (SQF)

Oxygen XML Developer provides support for Schematron Quick Fixes (SQF). They help you resolve errors that appear in XML documents that are validated against Schematron schemas by offering you solution proposals. The Schematron Quick Fixes are an extension of the Schematron language and they allow you to define fixes for Schematron error messages. Specifically, they are associated with *assert* or *report* messages.

A typical use case is using Schematron Quick Fixes to assist technical writers with common editing tasks. For example, you can use Schematron rules to automatically report certain validation warnings (or errors) when performing regular editing tasks, such as inserting specific elements or changing IDs to match specific naming conventions. For more details

and examples, please see the following blog:

<http://blog.oxygenxml.com/2015/05/schematron-checks-to-help-technical.html>.

Displaying the Schematron Quick Fix Proposals

The defined Schematron Quick Fixes are displayed on validation errors in **Text** mode.

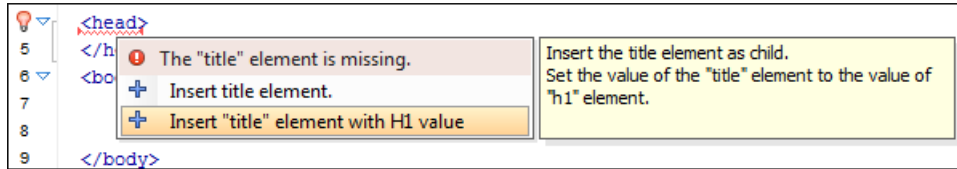


Figure 75: Example of a Schematron Quick Fix

Refactoring XML Documents

In the life cycle of XML documents there are instances when the XML structure needs to be changed to accommodate various needs. For example, when an associated schema is updated, an attribute may have been removed, or a new element added to the structure.

These types of situations cannot be resolved with a traditional *Find/Replace* tool, even if the tool accepts regular expressions. The problem becomes even more complicated if an XML document is computed or referenced from multiple modules, since multiple resources need to be changed.

To assist you with these types of refactoring tasks, Oxygen XML Developer includes a specialized **XML Refactoring** tool that helps you manage the structure of your XML documents.

XML Refactoring Tool

The **XML Refactoring** tool is presented in the form of an easy to use wizard that is designed to reduce the time and effort required to perform various structure management tasks. For example, you can insert, delete, or rename an attribute in all instances of a particular element that is found in all documents within your project.

To access the tool, select the  **XML Refactoring** action from one of the following locations:

- The **Tools** menu.
- The **Refactoring** submenu from the contextual menu in the **Project** view.




Note: The predefined refactoring operations are also available from the **Refactoring** submenu in the contextual menu of **Text** mode. This is useful because by selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to skip directly to the wizard page of the appropriate operation and to help you by preconfiguring some of the parameter values.

The tool includes the following wizard pages:


Refactoring operations

The first wizard page displays, and allows you to select, the available operations, which are grouped by category. To search for an operation, you can use the filter text box at the top of the page.

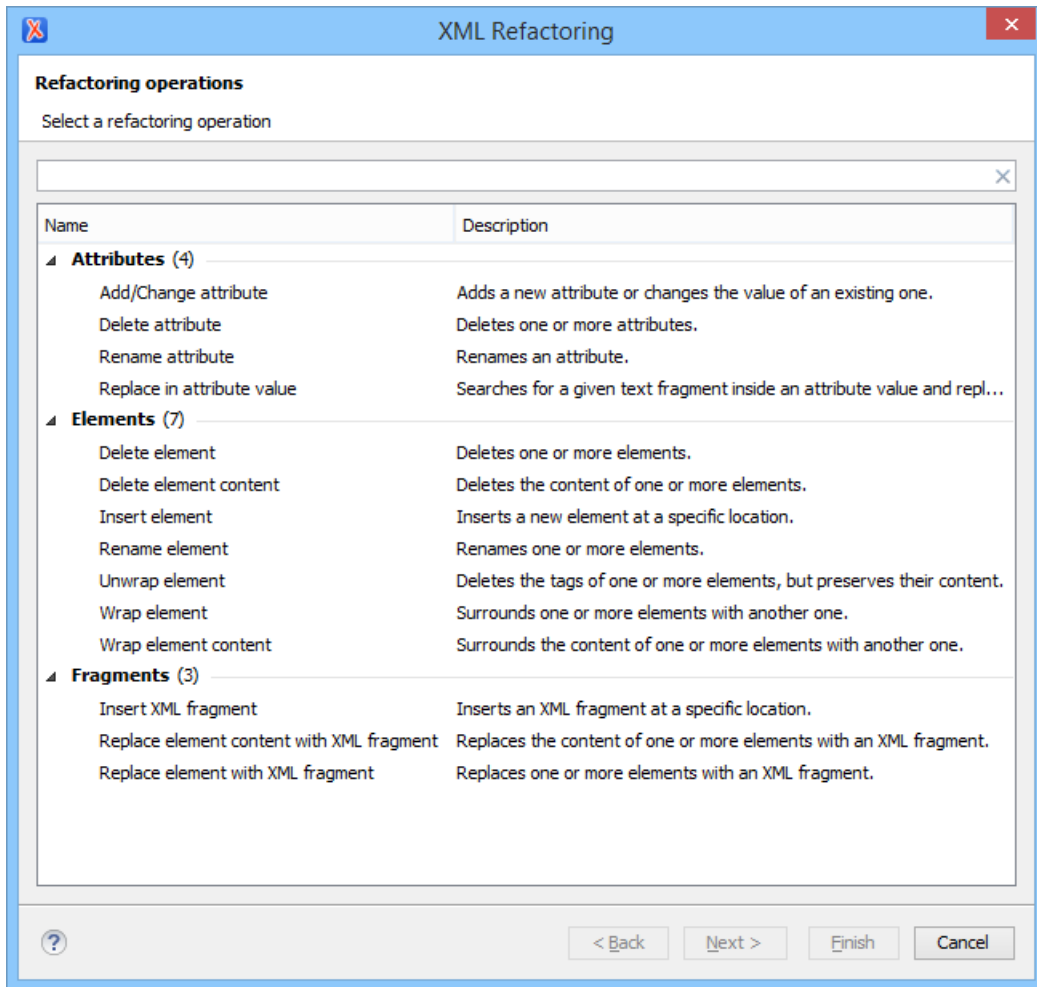

Configure Operation Parameters

The next wizard page allows you to specify the parameters for the refactoring operation. The parameters are specific to the type of refactoring operation that is being performed. For example, to delete an attribute you need to specify the parent element and the qualified name of the attribute to be removed.

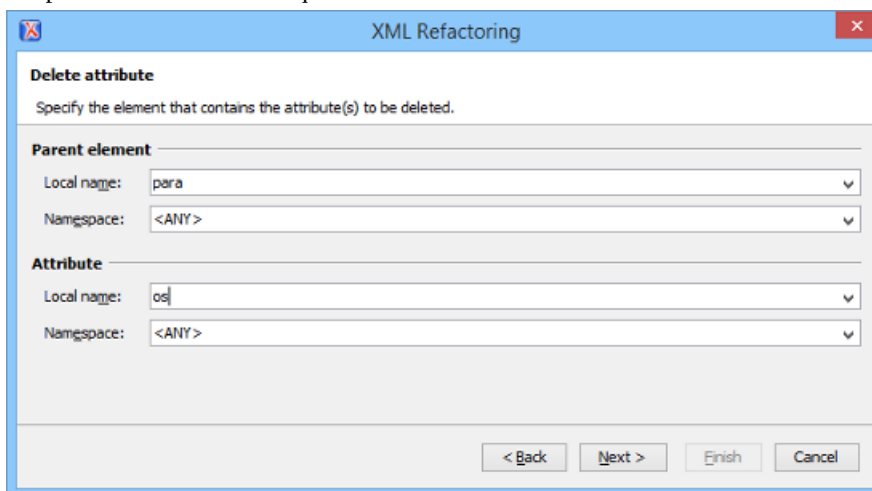


Scope and Filters

The last wizard page allows you to select the set of files that represent the input of the operation. You can select from predefined resource sets (such as the current file, your whole project, the current DITA map hierarchy, etc.) or you can define your own set of resources by creating a working set.

The **Filters** section includes the following options:

- **Include files** - Allows you to filter the selected resources by using a file pattern. For example, to restrict the operation to only analyze build files you could use `build*.xml` for the file pattern.
- **Restrict only to known XML file types** - When enabled, only resources with a known XML file type will be affected by the operation.
- **Look inside archives** - When enabled, the resources inside archives will also be affected.

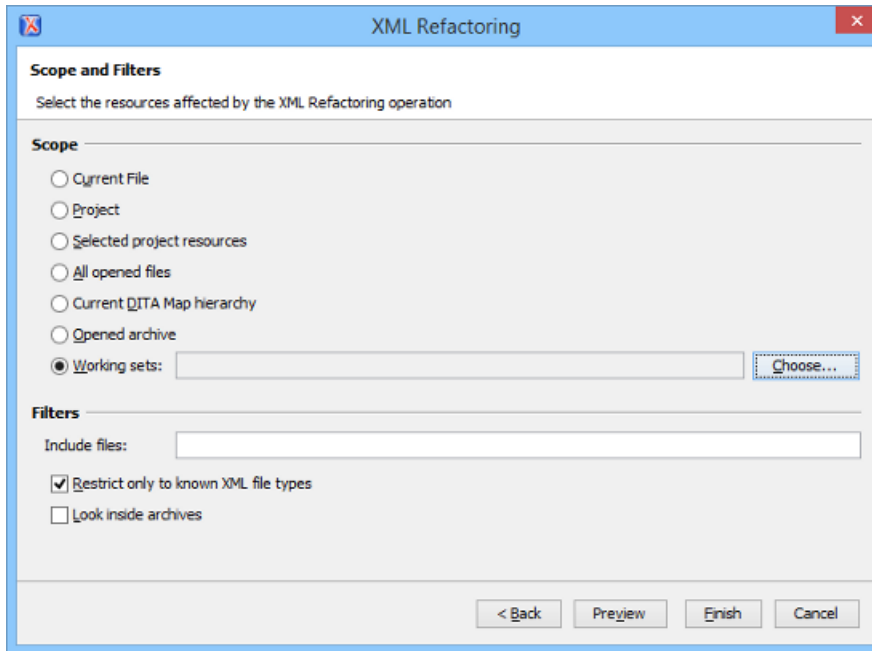

If an operation takes longer than expected you can use the  **Stop** button in the progress bar to cancel the operation.



Note: It is recommended that you use the **Preview** button to review all the changes that will be made by the refactoring operation before applying the changes.



Warning: After clicking the **Finish** button, the operation will be processed and Oxygen XML Developer provides no automatic means for reverting the operations. Any **Undo** action will only revert changes on the current document.

Predefined Refactoring Operations

The XML Refactoring tool includes a variety of predefined operations that can be used for common refactoring tasks. They are grouped by category in the **Refactoring operations** wizard page. You can also access the operations from the **Refactoring** submenu in the contextual menu of **Text** mode. The operations are also grouped by category in this submenu (**Attributes**, **Elements**, and **Fragments**). When selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to get the names and namespaces of the current element or attribute, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

The following predefined operations are available:

Refactoring Operations for *Attributes*

Add/Change attribute

Use this operation to change the value of an attribute or insert a new one. To perform this operation, specify the following parameters:

- The parent **Element** of the attribute to be changed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- The **Local name**, **Namespace**, and **Value** of the affected attribute.

- One of the following choices for the **Operation mode** in the *Options* section:
 - **Add the attribute in the parent elements where it is missing**
 - **Change the value in the parent elements where the attribute already exists**
 - **Both**



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Delete attribute

Use this operation to remove one or more attributes. To perform this operation, specify the following parameters:

- The parent **Element** of the attribute to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- The name of the **Attribute** to be deleted.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Rename attribute

Use this operation to rename an attribute. Specify the following parameters in the **Rename attribute** dialog box:

- The parent **Element** of the attribute to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- The name of the **Attribute** to be renamed.
- **New local name** of the attribute.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Replace in attribute value

Use this operation to search for a text fragment inside an attribute value and change the fragment to a new value. To perform this operation, specify the following parameters:

- The parent **Element** of the attribute to be modified, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- The name of the **Attribute** to be modified.
- The text fragments to **Find**. You can use Perl-like regular expressions when specifying the text to find.
- The text fragment to **Replace with**. This parameter can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Refactoring Operations for *Elements*

Delete element

Use this operation to delete elements. To perform this operation, specify the following parameter:

- The target **Element** to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Delete element content

Use this operation to delete the content of elements. To perform this operation, specify the following parameter:

- The target **Element** in which its content is to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Insert element

Use this operation to insert new elements. To perform this operation, specify the following parameters:

- The **Local name** of the element to be inserted.
- The **Namespace** of the element to be inserted.
- The **XPath** location of an existing element where the new element will be inserted, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **Position**, in relation to the specified existing element, where the new element will be inserted. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Rename element

Use this operation to rename elements. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **New local name** of the element.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Unwrap element

Use this operation to remove the surrounding tags of elements, while keeping the content unchanged. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** for which its surrounding tags will be removed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Wrap element

Use this operation to surround elements with element tags. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** to be surrounded with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **Local name** of the *Wrapper element*.
- The **Namespace** of the *Wrapper element*.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Wrap element content

Use this operation to surround the content of elements with element tags. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** to surround its content with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **Local name** of the *Wrapper element* in which its content will be wrapped.
- The **Namespace** of the *Wrapper element* in which its content will be wrapped.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Refactoring Operations for *Fragments*

Insert XML fragment

Use this operation to insert an XML fragment. To perform this operation, specify the following parameters:

- The **XML Fragment** to be inserted.
- The **XPath** location of an existing element where the fragment will be inserted, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **Position**, in relation to the specified existing element, where the fragment will be inserted. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Replace element content with XML fragment

Use this operation to replace the content of elements with an XML fragment. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** for which its content will be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **XML Fragment** with which to replace the content of the target element.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Replace element with XML fragment

Use this operation to replace elements with an XML fragment. To perform this operation, specify the following parameters:

- The **Target elements (XPath)** to be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- The **XML Fragment** with which to replace the target element.



Tip: Use the link provided in the lower part of the wizard to open the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

Additional Notes



Note: There are some operations that allows **<ANY>** for the **local name** and **namespace** parameters. This value can be used to select an element or attribute regardless of its local name or namespace. Also, the **<NO_NAMESPACE>** value can be used to select nodes that do not belong to a namespace.



Note: Some operations have parameters that accept XPath expressions to match elements or attributes. In these XPath expressions you can only use the prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) page. This preferences page can be easily opened by clicking the link in the note **(Each prefix used in an XPath expression must be declared in the Default prefix-namespace mappings section)** at the bottom of the **Configure Operation Parameters** wizard page.

Custom Refactoring Operations

If none of the predefined operations will help you accomplish a particular refactoring task, you can create a custom operation that is specific to your needs. For example, if you want to convert an attribute to an element and insert the element as the first child of the parent element, a custom refactoring operation needs to be created.



Note: The custom refactoring operations are only available in the Enterprise edition.

An XML Refactoring operation is defined as a pair of resources:

- An *XQuery Update script* or *XSLT stylesheet* that Oxygen XML Developer will run in order to refactor the XML files.
- An *XML Operation Descriptor* file that contains information about the operation, such as the name, description, and parameters.

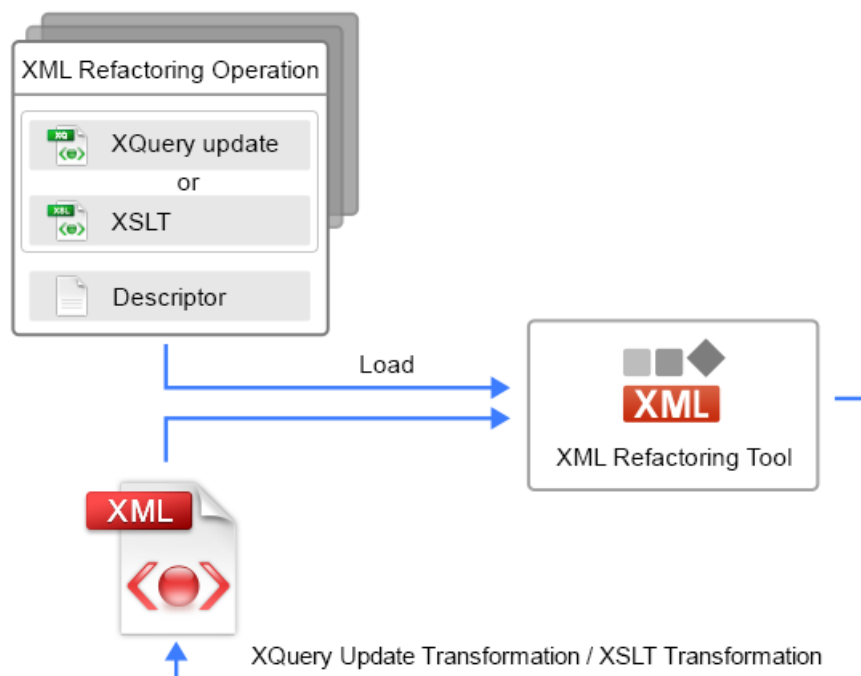


Figure 76: Diagram of an XML Refactoring Operation

All the defined custom operations are loaded by the XML Refactoring tool and presented in [the Refactoring operations wizard page](#), along with the predefined built-in operations.

After the user chooses an operation and specifies its parameters, Oxygen XML Developer processes an XQuery Update or XSLT transformation over the input file. This transformation is executed in a *safe mode*, which implies the following:

- When loading the document:
 - The XInclude mechanism is disabled. This means that the resources included by using XInclude will not be visible in the transformation.
 - The DTD entities will be processed without being expanded.
 - The associated DTD will be not loaded, so the default attributes declared in the DTD will not be visible in the transformation.
- When saving the updated XML document:
 - The DOCTYPE will be preserved.
 - The DTD entities will be preserved as they are in the original document when the document is saved.
 - The attribute values will be kept in their original form without being normalized.
 - The spaces between attributes are preserved. Basically, the spaces are lost by a regular XML serialization since they are not considered important.

The result of this transformation overrides the initial input file.



Note: To achieve some of the previous goals, the XML Refactoring mechanism adds several attributes that are interpreted internally. The attributes belong to the `http://oxygenxml.com/app/xml_refactory/additional_attributes` namespace. These

attributes should not be taken into account when processing the input XML document, since they are discarded when the transformed document is serialized.



Restriction: *Comments* or *processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation. In other words, XML Refactoring operations can only be performed on *comments* or *processing instructions* that are inside the root element.

Creating a Custom Refactoring Operation

To create a custom refactoring operation, follow these steps:

1. [Create an XQuery Update script or XSLT file.](#)
2. [Create an XML Refactoring Operation Descriptor file.](#)
3. Store both files in [one of the locations that Oxygen XML Developer](#) scans when loading the custom operations.

Once you run the **XML Refactoring** tool again, the custom operation appears in [the Refactoring operations wizard page](#).

Custom Refactoring Script

The first step in creating a custom refactoring operation is to create an [XQuery Update script](#) or [XSLT stylesheet](#) that is needed to process the refactoring operations. The easiest way to create this script file is to use the **New** document wizard to create a new **XQuery** or **XSLT** file and you can use [our examples](#) to help you with the content.

There are cases when it is necessary to add parameters in the [XQuery script](#) or [XSLT stylesheet](#). For instance, if you want to rename an element, you may want to declare an external parameter associated with the name of the element to be renamed. To allow you to specify the value for these parameters, they need to be declared in [the refactoring operation descriptor file](#) that is associated with this operation.



Note: The XQuery Update processing is disabled by default in Oxygen XML Developer. Thus, if you want to create or edit an XQuery Update script you have to enable this facility by creating an [XQuery transformation scenario](#) and choose **Saxon EE** as the transformation engine. Also, you need to make sure the **Enable XQuery update** option is enabled in the [Saxon processor advanced options](#).



Note: If you are using an XSLT file, XPath expressions that are passed as parameters will automatically be rewritten to conform with the mapping of the namespace prefixes declared in the [XML /XSLT-FO-XQuery / XPath preferences page](#).

The next step in creating a custom refactoring operation is to [create a custom operation descriptor file](#).

Custom Refactoring Operation Descriptor File

The second step in creating a custom refactoring operation is to create an operation descriptor file. The easiest way to do this is to use the **New** document wizard and choose the **XML Refactoring Operation Descriptor** template.

Introduction to the Descriptor File

This file contains information (such as `name`, `description`, and `id`) that is necessarily when loading an XML Refactoring operation . It also contains the path to the XQuery Update script or XSLT stylesheet that is associated with the particular operation through the `script` element.

You can specify a `category` for your custom operations to logically group certain operations. The `category` element is optional and if it is not included in the descriptor file, the default name of the category for the custom operations is *Other operations*.

The descriptor file is edited and validated against the following schema:
frameworks/xml_refactoring/operation_descriptor.xsd.

Declaring Parameters in the Descriptor File

If the XQuery Update script or XSLT stylesheet includes parameters, they should be declared in the **parameters** section of the descriptor file. All the parameters specified in this section of the descriptor file will be displayed in the **XML Refactoring** tool within [the Configure Operation Parameters wizard page](#) for that particular operation.

The value of the first **description** element in the **parameters** section will be displayed at the top of [the Configure Operation Parameters wizard page](#).

To declare a parameter, specify the following information:

- **label** - This value is displayed in the user interface for the parameter.
- **name** - The parameter name used in the XQuery Update script or XSLT stylesheet and it should be the same as the one declared in the script.
- **type** - Defines the type of the parameter and how it will be rendered. There are several types available:
 - **TEXT** - Generic type used to specify a simple text fragment.
 - **XPATH** - Type of parameter whose value is an XPATH expression. For this type of parameter, Oxygen XML Developer will use a text input with corresponding content completion and syntax highlighting.



Note: The value of this parameter is transferred as plain text to the XQuery Update or XSLT transformation without being evaluated. You should evaluate the XPath expression inside the XQuery Update script or XSLT stylesheet. For example, you could use the `saxon:evaluate` Saxon extension function.



Note: A relative XPath expression is converted to an absolute XPath expression by adding `//` before it (`//XPathExp`). This conversion is done before transferring the XPath expression to the XML refactoring engine.



Note: When writing XPath expressions, you can only use prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) options page.

- **NAMESPACE** - Used for editing namespace values.
- **REG_EXP_FIND** - Used when you want to match a certain text by using Perl-like regular expressions.
- **REG_EXP_REPLACE** - Used along with **REG_EXP_FIND** to specify the replacement string.
- **XML_FRAGMENT** - This type is used when you want to specify an XML fragment. For this type, Oxygen XML Developer will display a text area specialized for inserting XML documents.
- **NC_NAME** - The parameter for **NC_NAME** values. It is useful when you want to specify the local part of a *QName* for an element or attribute.
- **BOOLEAN** - Used to edit boolean parameters.
- **TEXT_CHOICE** - It is useful for parameters whose value should be from a list of possible values. Oxygen XML Developer renders each possible value as a radio button option.
- **description** - The description of the parameter. It is used by the application to display a tooltip when you hover over the parameter.
- **possibleValues** - Contains the list with possible values for the parameter and you can specify the default value, as in the following example:

```
<possibleValues onlyPossibleValuesAllowed="true">
  <value name="before">Before</value>
  <value name="after" default="true">After</value>
  <value name="firstChild">First child</value>
  <value name="lastChild">Last child</value>
</possibleValues>
```

Specialized Parameters to Match Elements or Attributes

If you want to match elements or attributes, you can use some specialized parameters, in which case Oxygen XML Developer will propose all declared elements or attributes based on the schema associated with the currently edited file. The following specialized parameters are supported:

elementLocation

This parameter is used to match elements. For this type of parameter, the application displays a text field where you can enter the element name or an XPath expression. The text from the `label` attribute is displayed in the application as the label of the text field. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If the value of the `useCurrentContext` attribute is set to `true`, the element name from the cursor position is used as proposed values for this parameter.

Example of an `elementLocation`:

```
<elementLocation name="elem_loc" useCurrentContext="false">
  <element label="Element location">
    <description>Element location description.</description>
  </element>
</ ElementLocation>
```

attributeLocation

This parameter is used to match attributes. For this type of parameter, the application displays two text fields where you can enter the parent element name and the attribute name (both text fields accept XPath expressions for a finer match). The text from the `label` attributes is displayed in the application as the label of the associated text fields. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. The value of this parameter is an XPath expression that is computed by using the values of the expression from the `element` and `attribute` text fields. For example, if `section` is entered for the element and a `title` is entered for the attribute, the XPath expression would be computed as `//section/@title`. If the value of the `useCurrentContext` attribute is set to `true`, the element and attribute name from the cursor position is used as proposed values for the operation parameters.

Example of an `attributeLocation`:

```
<attributeLocation name="attr_xpath" useCurrentContext="true">
  <element label="Element path">
    <description>Element path description.</description>
  </element>
  <attribute label="Attribute" >
    <description>Attribute path description.</description>
  </attribute>
</ AttributeLocation>
```

elementParameter

This parameter is used to specify elements by local name and namespace. For this type of parameter, the application displays two combo boxes with elements and namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as label of the associated combo. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If you specify the `allowsAny` attribute, the application will propose `<ANY>` as a possible value for the **Name** and **Namespace** combo boxes. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the element name and namespace from the cursor position is used as proposed values for the operation parameters.

Example of an `elementParameter`:

```
<elementParameter id="elemID">
  <localName label="Name" name="element_localName" allowsAny="true" useCurrentContext="true">
    <description>The local name of the attribute's parent element.</description>
  </localName>
  <namespace label="Namespace" name="element_namespace" allowsAny="true">
    <description>The local name of the attribute's parent element</description>
  </namespace>
</elementParameter>
```

attributeParameter

This parameter is used to specify attributes by local name and namespace. For this type of parameter, the application displays two combo boxes with attributes and their namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as the label of the associated combo box. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the attribute name and namespace from the cursor position is used as proposed values for the operation parameters.



Note: An `attributeParameter` is dependant upon an `elementParameter`. The list of attributes and namespaces are computed based on the selection in the `elementParameter` combo boxes.

Example of an `attributeParameter`:

```
<attributeParameter dependsOn="elemID">
  <localName label="Name" name="attribute_localName" useCurrentContext="true">
    <description>The name of the attribute to be converted.</description>
  </localName>
  <namespace label="Namespace" name="attribute_namespace" allowsAny="true">
    <description>The namespace of the attribute to be converted.</description>
  </namespace>
</attributeParameter>
```




Note: All predefined operations are loaded from the `[OXYGEN_DIR]/refactoring` folder.

Example of an XML Refactoring Operation

To demonstrate creating a custom operation, consider that we have a task where we need to convert an attribute into an element and insert it inside another element. A specific example would be if you have a project with a variety of `image` elements where a deprecated `alt` attribute was used for the description and you want to convert all instances of that attribute into an element with the same name and insert it as the first child of the `image` element.

Thus, our task is to convert this attribute into an element with the same name and insert it as the first child of the `image` element.

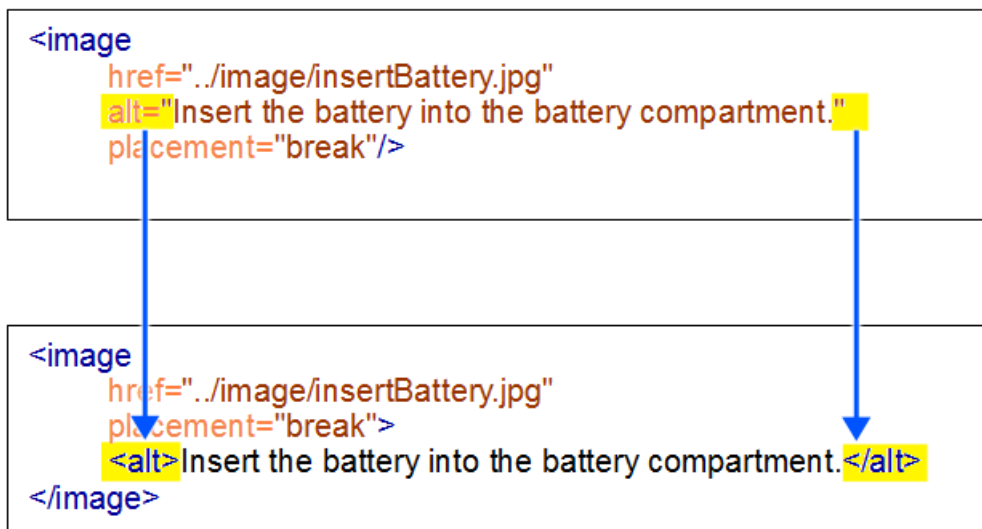

A new custom XML refactoring operation requires:

- An *XQuery Update script* or *XSLT stylesheet*.
- An *XML Refactoring operation descriptor file* that contains the path to the XQuery Update script or XSLT stylesheet.

Example of an XQuery Update Script for Creating a Custom Operation to *Convert an Attribute to an Element*

The XQuery Update script does the following:

- Iterates over all elements from the document that have the specified local name and namespace.
- Finds the attribute that will be converted to an element.
- Computes the *QName* of the new element to be inserted and inserts it as the first child of the parent element.

```
(:
  xQuery document used to implement 'Convert attribute to element' operation from XML Refactoring tool.
:)
```

```

declare namespace output = "http://www.w3.org/2010/xslt-xquery-serialization";
declare option output:method "xml";
declare option output:indent "no";

(: Local name of the attribute's parent element. :)
declare variable $element_localName as xs:string external;

(: Namespace of the attribute's parent element. :)
declare variable $element_namespace as xs:string external;

(: The local name of the attribute to be converted :)
declare variable $attribute_localName as xs:string external;

(: The namespace of the attribute to be converted :)
declare variable $attribute_namespace as xs:string external;

(: Local name of the new element. :)
declare variable $new_element_localName as xs:string external;

(: Namespace of the new element. :)
declare variable $new_element_namespace as xs:string external;

(: Convert attribute to element :)
for $node in /**
(: Find the attribute to convert :)
let $attribute :=
  $node/@*[local-name() = $attribute_localName and
    ($attribute_namespace = '<ANY>' or $attribute_namespace = namespace-uri())]

(: Compute the prefix for the new element to insert :)
let $prefix :=
  for $p in in-scope-prefixes($node)
  where $new_element_namespace = namespace-uri-for-prefix($p, $node)
return $p

(: Compute the QName for the new element to insert :)
let $new_element_qName :=
  if (empty($prefix) or $prefix[1] = '') then $new_element_localName
  else $prefix[1] || ':' || $new_element_localName

where ('<ANY>' = $element_localName or local-name($node) = $element_localName) and
  ($element_namespace = '<ANY>' or $element_namespace = namespace-uri($node))

return
  if (exists($attribute)) then
    (insert node element {QName($new_element_namespace, $new_element_qName)}
     {string($attribute)} as first into $node,
     delete node $attribute)
  else ()

```

Example of an XSLT Script for Creating a Custom Operation to *Convert an Attribute to an Element*

The XSLT stylesheet does the following:

- Iterates over all elements from the document that have the specified local name and namespace.
- Finds the attribute that will be converted to an element.
- Adds the new element as the first child of the parent element.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  exclude-result-prefixes="xs"
  xmlns:xr="http://www.oxygenxml.com/ns/xmlRefactoring"
  version="2.0">

  <xsl:import href="http://www.oxygenxml.com/ns/xmlRefactoring/resources/commons.xsl"/>

  <xsl:param name="element_localName" as="xs:string" required="yes"/>
  <xsl:param name="element_namespace" as="xs:string" required="yes"/>
  <xsl:param name="attribute_localName" as="xs:string" required="yes"/>
  <xsl:param name="attribute_namespace" as="xs:string" required="yes"/>
  <xsl:param name="new_element_localName" as="xs:string" required="yes"/>
  <xsl:param name="new_element_namespace" as="xs:string" required="yes"/>

  <xsl:template match="node() | @*">
    <xsl:copy>
      <xsl:apply-templates select="node() | @*" />
    </xsl:copy>
  </xsl:template>
  <xsl:template match="/*[xr:check-local-name($element_localName, ., true()) and
    xr:check-namespace-uri($element_namespace, .)]">

    <xsl:variable name="attributeToConvert"
      select="@*[xr:check-local-name($attribute_localName, ., true()) and

```

```

        xr:check-namespace-uri($attribute_namespace, .)]"/>
    <xsl:choose>
      <xsl:when test="empty($attributeToConvert)">
        <xsl:copy>
          <xsl:apply-templates select="node() | @"/>
        </xsl:copy>
      </xsl:when>
      <xsl:otherwise>
        <xsl:copy>
          <xsl:for-each select="@*[empty(. intersect $attributeToConvert)]">
            <xsl:copy-of select="."/>
          </xsl:for-each>
          <!-- The new element namespace -->
          <xsl:variable name="nsURI" as="xs:string">
            <xsl:choose>
              <xsl:when test="$new_element_namespace eq $xr:NO-NAMESPACE">
                <xsl:value-of select=""/>
              </xsl:when>
              <xsl:otherwise>
                <xsl:value-of select="$new_element_namespace"/>
              </xsl:otherwise>
            </xsl:choose>
          </xsl:variable>
          <xsl:element name="{ $new_element_localName }" namespace="{ $nsURI }">
            <xsl:value-of select="$attributeToConvert"/>
          </xsl:element>
          <xsl:apply-templates select="node()"/>
        </xsl:copy>
      </xsl:otherwise>
    </xsl:choose>
  </xsl:template>
</xsl:stylesheet>

```



Note: The XSLT stylesheet imports a module library that contains utility functions and variables. The location of this module is resolved via an XML catalog set in the *XML Refactoring* framework.

Example of an Operation Descriptor File for Creating a Custom Operation to *Convert an Attribute to an Element*

After you have developed the XQuery script or XSLT stylesheet, you have to create an XML Refactoring operation descriptor. This descriptor is used by the application to load the operation details such as name, description, or parameters.

```

<?xml version="1.0" encoding="UTF-8"?>
<refactoringOperationDescriptor
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns="http://www.oxygenxml.com/ns/xmlRefactoring"
  id="convert-attribute-to-element"
  name="Convert attribute to element">
  <description>Converts the specified attribute to an element. The new element will be inserted as first child
  of the attribute's parent element.</description>
  <!-- For the XSLT stylesheet option uncomment the following line and comment the line referring the XQuery
  Update script -->
  <!-- <script type="XSLT" href="convert-attribute-to-element.xsl"/> -->
  <script type="XQUERY_UPDATE" href="convert-attribute-to-element.xq"/>
  <parameters>
    <description>Specify the attribute to be converted to element.</description>
    <section label="Parent element">
      <elementParameter id="elemID">
        <localName label="Name" name="element_localName" allowsAny="true">
          <description>The local name of the attribute's parent element.</description>
        </localName>
        <namespace label="Namespace" name="element_namespace" allowsAny="true">
          <description>The local name of the attribute's parent element</description>
        </namespace>
      </elementParameter>
    </section>
    <section label="Attribute">
      <attributeParameter dependsOn="elemID">
        <localName label="Name" name="attribute_localName">
          <description>The name of the attribute to be converted.</description>
        </localName>
        <namespace label="Namespace" name="attribute_namespace" allowsAny="true">
          <description>The namespace of the attribute to be converted.</description>
        </namespace>
      </attributeParameter>
    </section>
    <section label="New element">
      <elementParameter>
        <localName label="Name" name="new_element_localName">
          <description>The name of the new element.</description>
        </localName>
      </elementParameter>
    </section>
  </parameters>
</refactoringOperationDescriptor>

```

```

        </localName>
        <namespace label="Namespace" name="new_element_namespace">
            <description>The namespace of the new element.</description>
        </namespace>
    </elementParameter>
</section>
</parameters>
</refactoringOperationDescriptor>

```



Note: If you are using an XSLT file, the line with the `script` element would look like this:

```
<script type="XSLT" href="convert-attribute-to-element.xsl"/>
```

Results

After you have created these files, copy them into a folder *scanned by Oxygen XML Developer when it loads the custom operation*. When the XML Refactoring tool is started again, you will see the created operation.

Since various parameters can be specified, this custom operation can also be used for other similar tasks. The following image shows the parameters that can be specified in our example of the custom operation to convert an attribute to an element:

Storing and Sharing Refactoring Operations

Oxygen XML Developer scans the following locations when looking for XML Refactoring operations to provide flexibility:

- A `refactoring` folder, created inside a directory that is associated to a *framework* you are customizing.
- Any folder. In this case, you need to *open the Preferences dialog box*, go to **XML > XML Refactoring**, and specify the same folder in the **Load additional refactoring operations from** text box.



Note: If you share a project with your team, you can also share the custom operation by saving them in a folder that is part of your project. Then switch the **XML Refactoring** option page at project level (*open the Preferences dialog box*, go to **XML > XML Refactoring**, and select **Project Options** at the bottom of the dialog box), and in the **Load additional refactoring operations from** text box, use the `${pd}` editor variable so that the folder path is declared relative to the project.

- A folder specified by the *XML Refactoring Operations Plugin Extension*.
- The refactoring folder from the Oxygen XML Developer installation directory (`[OXYGEN_INSTALLATION_DIRECTORY]/refactoring/`).

Sharing Custom Refactoring Operations

The purpose of Oxygen XML Developer scanning multiple locations for the XML Refactoring operations is to provide more flexibility for developers who want to share the refactoring operations with the other team members. Depending on your particular use case, you can attach the custom refactoring operations to other resources, such as frameworks or projects.

After storing custom operations, you can share them with other users by sharing the resources.

Localizing XML Refactoring Operations

Oxygen XML Developer includes localization support for the XML refactoring operations.

The translation keys for the built-in refactoring operations are located in [OXYGEN_INSTALLATION_DIRECTORY]/refactoring/i18n/translation.xml.

The localization support is also available for custom refactoring operations. The following information can be translated:

- The operation name, description, and category.
- The description of the parameters element.
- The label, description, and possibleValues for each parameter.

Translated refactoring information uses the following form:

```
${i18n(translation_key)}
```

Oxygen XML Developer scans the following locations to find the translation.xml files that are used to load the translation keys:

- A refactoring/i18n folder, created inside a directory that is associated to a customized *framework*.
- A i18n folder, created inside a directory that is associated to a customized *framework*.
- An i18n folder inside any specified folder. In this case, you need to [open the Preferences dialog box](#), go to **XML > XML Refactoring**, and specify the folder in the **Load additional refactoring operations from** text box.
- An i18n folder located in directories specified through the [XML Refactoring Operations Plugin Extension](#).
- The refactoring/i18n folder from the Oxygen XML Developer installation directory ([OXYGEN_INSTALLATION_DIRECTORY]/refactoring/i18n).

Example of a Refactoring Operation Descriptor File with i18n Support

```
<?xml version="1.0" encoding="UTF-8"?>
<refactoringOperationDescriptor xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://oxygenxml.com/app/xml_refactory
http://oxygenxml.com/app/xml_refactory/operation_descriptor.xsd"
  xmlns="http://oxygenxml.com/app/xml_refactory" id="remove_text_content"
  name="${i18n(Remove_text_content)}">
  <description>${i18n(Remove_text_content_description)}</description>
  <script type="XQUERY_UPDATE" href="remove_text_content.xq"/>
  <parameters>
    <description>${i18n(parameters_description)}</description>
    <parameter label="${i18n(Element_name)}" name="element_localName" type="NC_NAME">
      <description>${i18n(Element_name_descriptor)}</description>
      <possibleValues>
        <value default="true" name="value1">${i18n(value_1)}</value>
        <value name="value2">${i18n(value_2)}</value>
      </possibleValues>
    </parameter>
  </parameters>
</refactoringOperationDescriptor>
```

Editing XSLT Stylesheets

This section explains the features of the XSLT editor.

To watch our video demonstration about basic XSLT editing and transformation scenarios in Oxygen XML Developer, go to http://oxygenxml.com/demo/XSL_Editing.html.

Validating XSLT Stylesheets

Oxygen XML Developer performs the validation of XSLT documents with the help of an XSLT processor *that you can configure in the preferences pages* according to the XSLT version. For XSLT 1.0, the options are: Xalan, Saxon 6.5.5, Saxon 9.6.0.7 and *a JAXP transformer specified by the main Java class*. For XSLT 2.0, the options are: Saxon 9.6.0.7 and *a JAXP transformer specified by the main Java class*. For XSLT 3.0, the options are Saxon 9.6.0.7 and *a JAXP transformer specified by the main Java class*.

To access the *XSLT preferences* quickly, use the  **Validation options** action from the **Document > Validate** menu.

Creating a Validation Scenario for XSLT Stylesheets

You can validate an XSLT document using the engine defined in the transformation scenario, or a custom validation scenario. If you choose to validate using the engine from transformation scenario, and a transformation scenario is not associated with the current document or the engine has no validation support, the default engine is used. To set the default engine, *open the Preferences dialog box* and go to **XML > XSLT/FO/XQuery > XSLT**.

You can also create new validation scenarios or edit existing ones, and you can add jars and classes that contain extension functions. To create or edit a validation scenario for an XSLT stylesheet, follow these steps:

1. With the XSLT file opened in Oxygen XML Developer, select the  **Configure Validation Scenario(s)** from the **Document > Validate** menu, or the  **Validation** toolbar drop-down menu, or from the **Validate** submenu when invoking the contextual menu on the XSLT file in the **Project** view .
The **Configure Validation Scenario(s)** dialog box is displayed. It contains the existing scenarios, organized in categories depending on the type of file they apply to. You can use the options in the  **Settings** drop-down menu to filter which scenarios are shown.
2. To edit an existing scenario, select the scenario and press the **Edit** button. If you try to edit one of the *read-only* predefined scenarios, Oxygen XML Developer creates a customizable duplicate (you can also use the **Duplicate** button).
3. To add a new scenario, press the  **New** button.
The **New scenarios** dialog box is displayed. It lists all validation units of the scenario.

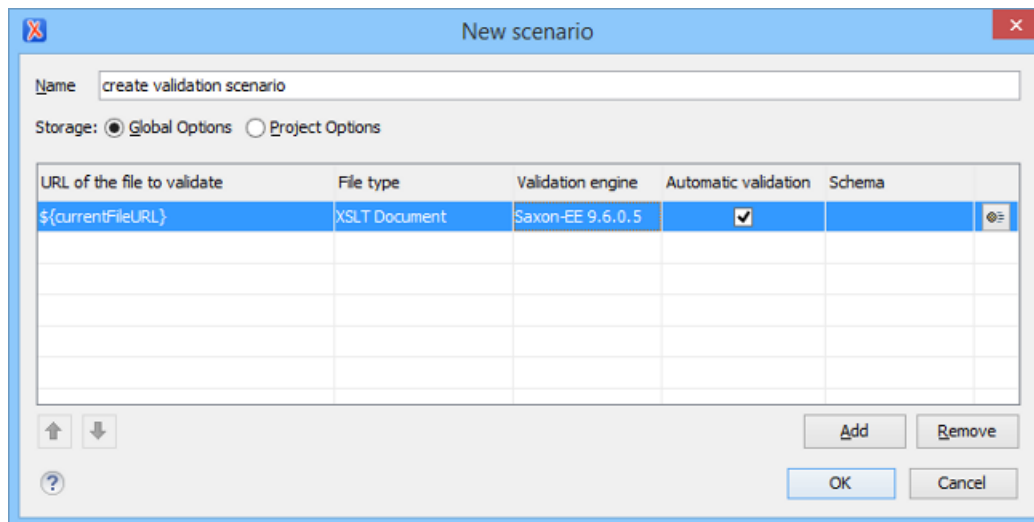


Figure 77: Add / Edit a Validation Unit

4. Configure the following information in this dialog box:
 - a) **Name** - The name of the validation scenario.
 - b) **Storage** - You can choose between storing the scenario in the **Global Options** or **Project Options**.
 - c) **URL of the file to validate** - In most cases leave this field as the default selection (the URL of the current file). If you want to specify a different URL, double-click its cell and enter the URL in the text field, select it from the drop-down list, or use the  **Browse** drop-down menu or  **Insert Editor Variable** button.

- d) **File type** - The file type should be XSLT Document.
 - e) **Validation engine** - Click the cell to select a validation engine. You must select an engine to be able to add or edit extensions.
 - f) **Automatic validation** - If this option is checked, the validation operation defined by this row is also used by the automatic validation feature.
5. To add or edit extensions, click the  **Edit extensions** button. This button is only available if the **File type** is set as XSLT Document and a **Validation engine** is chosen.
- The **Libraries** dialog box is opened. It is used to specify the jars and classes that contain extension functions called from the XSLT file of the current validation scenario. They will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item and press the **↑ Move up** or **↓ Move down** buttons.
6. Press **OK** to close the **New scenario** dialog box.
- The newly created validation scenario is now included in the list of scenarios in the **Configure Validation Scenario(s)** dialog box. You can select the scenario in this dialog box to associate it with the current XSLT document and press the **Apply associated** button to run the validation scenario.

Validating XSLT Stylesheets with Custom Engines

If you need to validate an XSLT stylesheet with a validation engine that is different from the built-in engine, you can configure external engines as custom XSLT validation engines in the Oxygen XML Developer preferences. After a custom validation engine is *properly configured*, it can be applied on the current document by selecting it from the list of custom validation engines in the  **Validation** toolbar drop-down menu. The document is validated against the schema declared in the document.

By default, there are two validators that are configured for XSLT stylesheets:

- **MSXML 4.0** - included in Oxygen XML Developer (Windows edition). It is associated to the XSL Editor type in *Preferences page*.
- **MSXML.NET** - included in Oxygen XML Developer (Windows edition). It is associated to the XSL Editor type in *Preferences page*.

Editing XSLT Stylesheets in the Master Files Context

Smaller interrelated modules that define a complex stylesheet cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, a function defined in a main stylesheet is not visible when you edit an included or imported module. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger stylesheet structure.

You can set a main XSLT stylesheet either using the *master files support from the Project view*, or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main stylesheet. In this case, it considers the current module as the main stylesheet.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger stylesheet structure.
- **Content Completion Assistant** displays all components valid in the current context.
- The **Outline** displays the components collected from the entire stylesheet structure.

To watch our video demonstration about editing XSLT stylesheets in the master files context, go to <http://oxygenxml.com/demo/MasterFilesSupport.html>.

Syntax Highlight

The XSL editor renders the CSS and JS scripts, and XPath expressions with dedicated coloring schemes. To customize the coloring schemes, *open the Preferences dialog box* and go to **Editor > Syntax Highlight**.

Content Completion in XSLT Stylesheets

The items in the list of proposals offered by the **Content Completion Assistant** are context-sensitive. The proposed items are valid at the current cursor position. You can enhance the list of proposals by specifying an additional schema. This schema is *defined by the user in the Content Completion / XSL preferences* page and can be: XML Schema, DTD, RELAX NG schema, or NVDL schema.

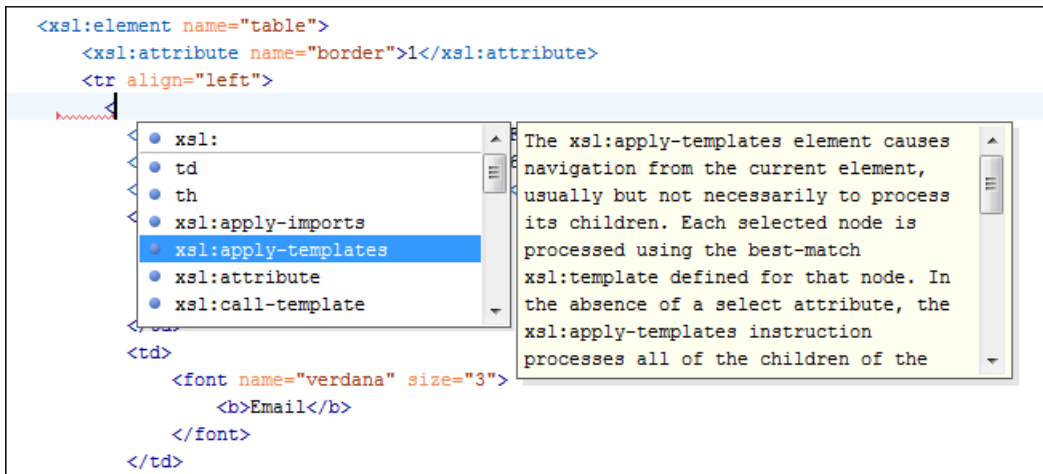


Figure 78: XSLT Content Completion Window

The **Content Completion Assistant** proposes numerous item types (such as templates, variables, parameters, keys, etc.) that are defined in the current stylesheet, and in the imported and included XSLT stylesheets. The **Content Completion Assistant** also includes *code templates that can be used to quickly insert code fragments* into stylesheets.



Note: For XSL and XSD resources, the **Content Completion Assistant** collects its components starting from the master files. The master files can be defined in the project or in the associated validation scenario. For further details about the **Master Files** support go to *Defining Master Files at Project Level*.

The extension functions built in the Saxon 6.5.5 and 9.6.0.7 transformation engines are presented in the content completion list only if the Saxon namespace (<http://saxon.sf.net> for XSLT version 2.0 / 3.0 or <http://icl.com/saxon> for XSLT version 1.0) is declared and one of the following conditions is true:

- The edited file has a transformation scenario that uses as transformation engine Saxon 6.5.5 (for XSLT version 1.0), Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE (for XSLT version 2.0 / 3.0).
- The edited file has a validation scenario that uses as validation engine Saxon 6.5.5 (for version 1.0), Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE (for version 2.0 / 3.0).
- The validation engine specified in *Options* page is Saxon 6.5.5 (for version 1.0), Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE (for version 2.0 / 3.0).

Additionally, the Saxon-CE-specific extension functions and instructions are presented in the Content Completion Assistant's proposals list only if the <http://saxonica.com/ns/interactiveXSLT> namespace is declared.

Namespace prefixes in the scope of the current context are presented at the top of the content completion window to speed up the insertion into the document of prefixed elements.

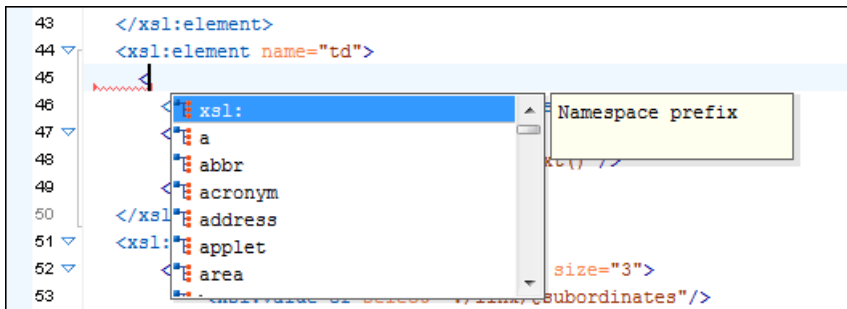


Figure 79: Namespace Prefixes in the Content Completion Window

For the common namespaces like XSL namespace (<http://www.w3.org/1999/XSL/Transform>), XML Schema namespace (<http://www.w3.org/2001/XMLSchema>) or Saxon namespace (<http://icl.com/saxon> for version 1.0, <http://saxon.sf.net/> for version 2.0 / 3.0), Oxygen XML Developer provides an easy mode to declare them by proposing a prefix for these namespaces.

Content Completion in XPath Expressions

In XSLT stylesheets, the **Content Completion Assistant** provides *all the features available in the XML editor* and also adds some enhancements. In XPath expressions used in attributes of XSLT stylesheets elements like `match`, `select` and `test`, the **Content Completion Assistant** offers the names of XPath and XSLT functions, the XSLT axes, and user-defined functions (the name of the function and its parameters). If a transformation scenario was defined and associated to the edited stylesheet, the **Content Completion Assistant** computes and presents elements and attributes based on:

- The input XML document selected in the scenario.
- The current context in the stylesheet.

The associated document is displayed in *the XSLT/XQuery Input view*.

Content completion for XPath expressions is started:

- On XPath operators detected in one of the `match`, `select` and `test` attributes of XSLT elements: `"`, `'`, `/`, `///`, `(`, `[`, `|`, `;`, `::`, `$`
- For attribute value templates of non-XSLT elements, that is the `{` character when detected as the first character of the attribute value.
- On request, if the combination **Ctrl Space (Command Space on OS X)** is pressed inside an edited XPath expression.

The items presented in the content completion window are dependent on:

- The context of the current XSLT element.
- The XML document associated with the edited stylesheet in the stylesheet transformation scenario.
- The XSLT version of the stylesheet (1.0, 2.0, or 3.0).



Note: The XSLT 3.0 content completion list of proposals includes specific elements and attributes for the 3.0 version.

For example, if the document associated with the edited stylesheet is:

```
<personnel>
  <person id="Big.Boss">
    <name>
      <family>Boss</family>
      <given>Big</given>
    </name>
    <email>chief@oxygenxml.com</email>
    <link subordinatess="one.worker"/>
  </person>
  <person id="one.worker">
    <name>
      <family>Worker</family>
      <given>One</given>
    </name>
  </person>
</personnel>
```

```

<email>one@oxygenxml.com</email>
<link manager="Big.Boss"/>
</person>
</personnel>

```

If you enter an `xsl:template` element using the content completion assistant, the following actions are triggered:

- The `match` attribute is inserted automatically.
- The cursor is placed between the quotes.
- The XPath **Content Completion Assistant** automatically displays a popup window with all the XSLT axes, XPath functions and elements and attributes from the XML input document that can be inserted in the current context.

The set of XPath functions depends on the XSLT version declared in the root element `xsl:stylesheet`: 1.0, 2.0 or 3.0.

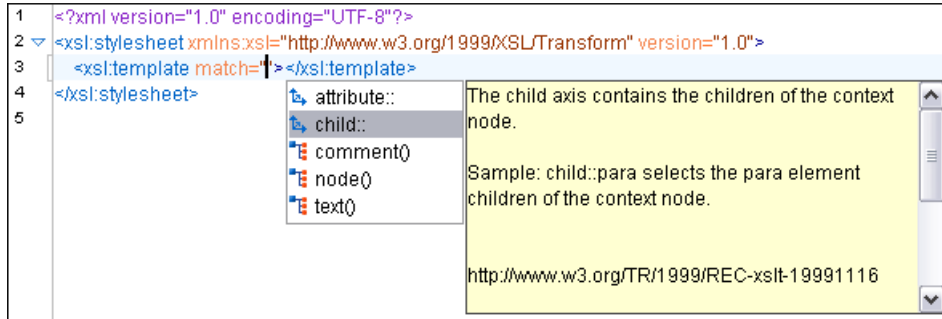


Figure 80: Content Completion in the match Attribute

If the cursor is inside the `select` attribute of an `xsl:for-each`, `xsl:apply-templates`, `xsl:value-of` or `xsl:copy-of` element the content completion proposals depend on the path obtained by concatenating the XPath expressions of the parent XSLT elements `xsl:template` and `xsl:for-each` as shown in the following figure:

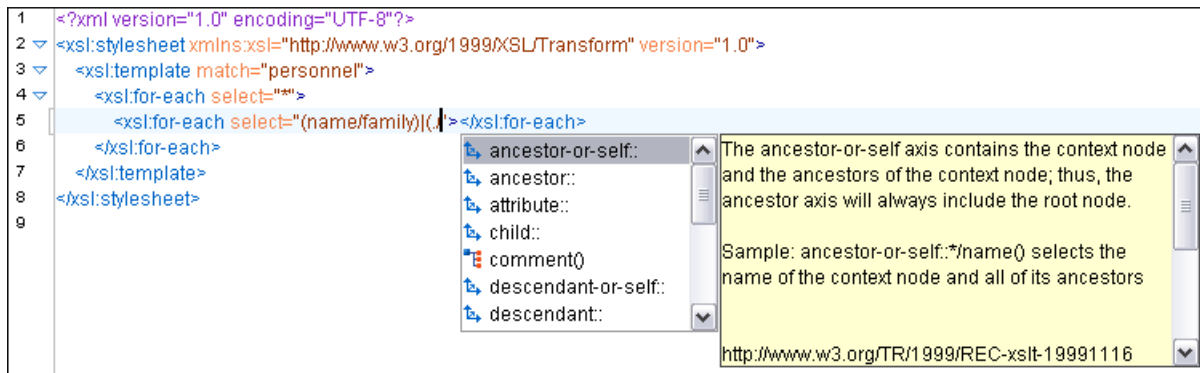


Figure 81: Content Completion in the select Attribute

Also XPath expressions typed in the `test` attribute of an `xsl:if` or `xsl:when` element benefit of the assistance of the content completion.

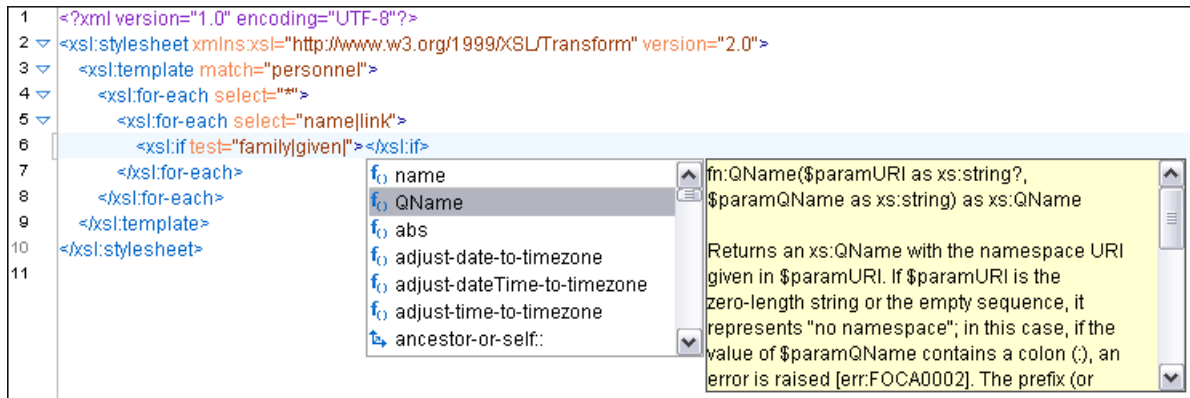


Figure 82: Content Completion in the test Attribute

XSLT variable references are easier to insert in XPath expressions with the help of the content completion popup triggered by the \$ character which signals the start of such a reference in an XPath expression.

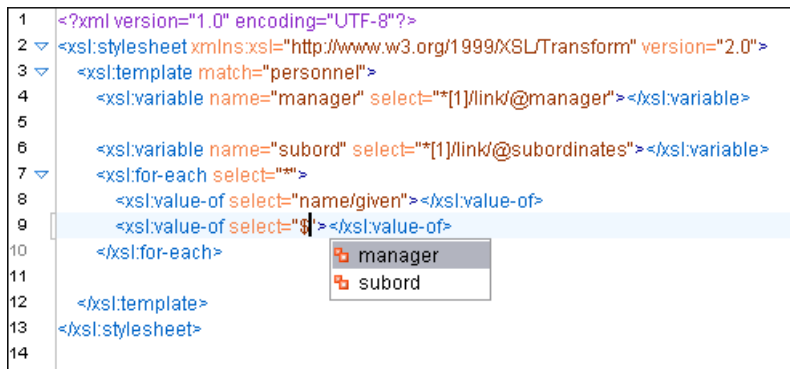


Figure 83: Content Completion in the test Attribute

If the { character is the first one in the value of the attribute, the same **Content Completion Assistant** is available also in attribute value templates of non-XSLT elements.

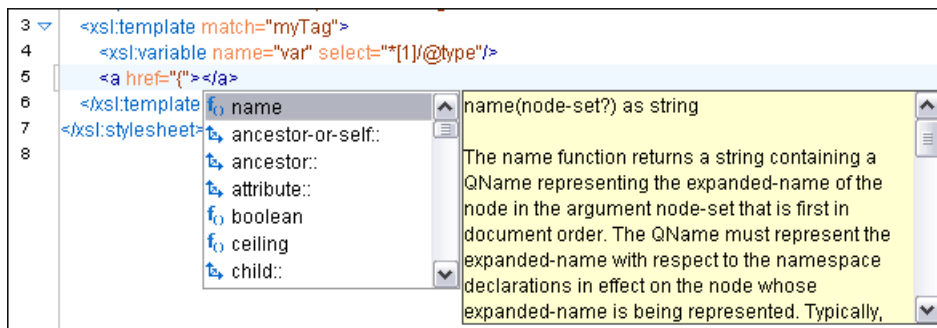


Figure 84: Content Completion in Attribute Value Templates

The time delay [configured in Preferences](#) page for all content completion windows is applied also for the XPath expressions content completion window.

Tooltip Helper for the XPath Functions Arguments

When editing the arguments of an XPath/XSLT function, Oxygen XML Developer tracks the current entered argument by displaying a tooltip containing the function signature. The currently edited argument is highlighted with a bolder font.

When moving the cursor through the expression, the tooltip is updated to reflect the argument found at the cursor position.

We want to concatenate the absolute values of two variables, named *v1* and *v2*.

```
<xsl:template match="/">
  <xsl:value-of select="concat(abs($v1), abs($v2))"></xsl:value-of>
</xsl:template>
```

When moving the cursor before the first **abs** function, Oxygen XML Developer identifies it as the first argument of the **concat** function. The tooltip shows in bold font the following information about the first argument:

- Its name is **\$arg1**.
- Its type is **xdt:anyAtomicType**.
- It is optional (note the ? sign after the argument type).

The function takes also other arguments, having the same type, and returns a **xs:string**.

```
name: concat($arg1 as xdt:anyAtomicType?, $arg2 as xdt:anyAtomicType?, ...) as xs:string
match:
select: "concat(abs($v1), abs($v2))" </xsl:value-of>
</xsl:template>
!stylesheet>
```

Figure 85: XPath Tooltip Helper - Identify the concat Function's First Argument

Moving the cursor on the first variable *\$v1*, the editor identifies the **abs** as context function and shows its signature:

```
name="v2" select="concat(abs($arg1 as numeric?), abs($arg2 as numeric?))" </xsl:value-of>
match:
select: "concat(abs($v1), abs($v2))" </xsl:value-of>
</xsl:template>
!stylesheet>
```

Figure 86: XPath Tooltip Helper - Identify the abs Function's Argument

Further, clicking the second **abs** function name, the editor detects that it represents the second argument of the **concat** function. The tooltip is repainted to display the second argument in bold font.

```
name: concat($arg1 as xdt:anyAtomicType?, $arg2 as xdt:anyAtomicType?, ...) as xs:string
match:
select: "concat(abs($v1), abs($v2))" </xsl:value-of>
</xsl:template>
!stylesheet>
```

Figure 87: XPath Tooltip Helper - Identify the concat Function's Second Argument

The tooltip helper is available also in the XPath toolbar and the **XPath Builder** view.

The XSLT/XQuery Input View

The structure of the XML document associated to the edited XSLT stylesheet, or the structure of the source documents of the edited XQuery is displayed in a tree form in a view called **XSLT/XQuery Input**. The tree nodes represent the elements of the documents.

The XSLT Input View

If you click a node, the corresponding template from the stylesheet is highlighted. A node can be dragged from this view and dropped in the editor area for quickly inserting **xsl:template**, **xsl:for-each**, or other XSLT elements that have the **match/select/test** attribute already completed. The value of the attribute is the correct XPath expression that refers to the dragged tree node. This value is based on the current editing context of the drop spot.

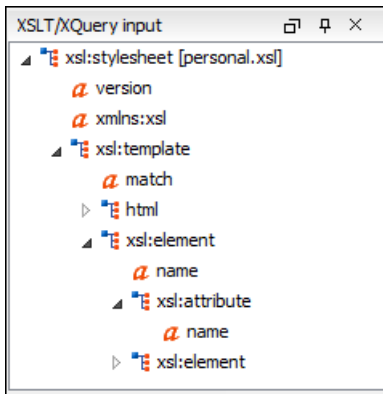


Figure 88: XSLT Input View

For example, for the following XML document:

```
<personnel>
  <person id="Big.Boss">
    <name>
      <family>Boss</family>
      <given>Big</given>
    </name>
    <email>chief@oxygenxml.com</email>
    <link subordinates="one.worker"/>
  </person>
  <person id="one.worker">
    <name>
      <family>Worker</family>
      <given>One</given>
    </name>
    <email>one@oxygenxml.com</email>
    <link manager="Big.Boss"/>
  </person>
</personnel>
```

and the following XSLT stylesheet:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  version="2.0">
  <xsl:template match="personnel">
    <xsl:for-each select="*">

    </xsl:for-each>
  </xsl:template>
</xsl:stylesheet>
```

if you drag the `given` element and drop it inside the `xsl:for-each` element, the following pop-up menu is displayed:

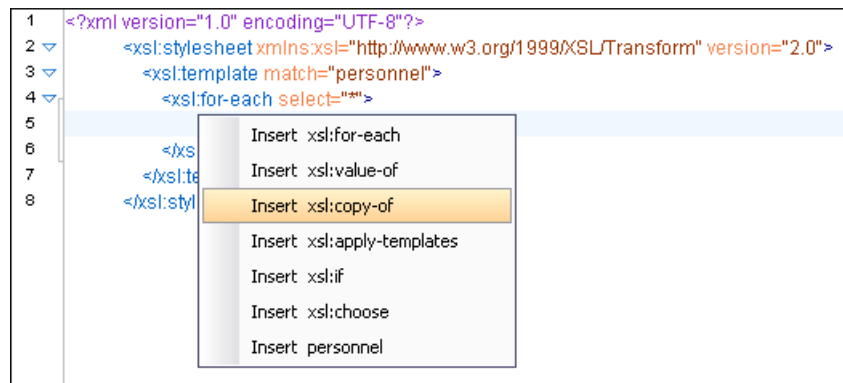


Figure 89: XSLT Input Drag and Drop Pop-up Menu

Select for example **Insert xsl:value-of** and the result document is:

```

1 <?xml version="1.0" encoding="UTF-8"?>
2 <xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="2.0">
3   <xsl:template match="personnel">
4     <xsl:for-each select="*">
5       <xsl:value-of select="name/given"/>
6     </xsl:for-each>
7   </xsl:template>
8 </xsl:stylesheet>

```

Figure 90: XSLT Input Drag and Drop Result

The XSLT Outline View

The XSLT **Outline** view displays the list of all the components (templates, attribute-sets, character-maps, variables, functions, keys, outputs) from both the edited stylesheet and its imports or includes. For XSL and XSD resources, the **Outline** view collects its components starting from the master files. The master files can be defined in the project or in the associated validation scenario. For further details about the **Master Files** support go to [Defining Master Files at Project Level](#). To enable the **Outline** view, go to **Window > Show View > Outline**.

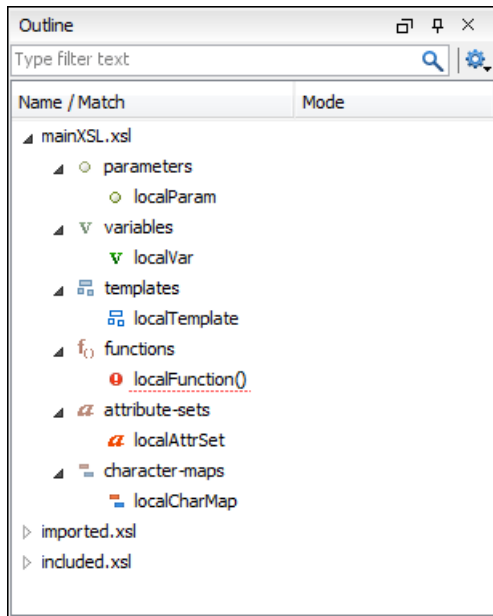


Figure 91: The XSLT Outline View

The following actions are available in the **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;



Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the XSLT editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

When the **Show components** option is selected, the following actions are available:



Show XML structure

Displays the XML document structure in a tree-like structure.

Show all components

Displays all components that were collected starting from the main file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/type

The stylesheet components can be grouped by location and type.

When the  **Show XML structure** option is selected, the following actions are available:

 Show components

Switches the **Outline** view to the components display mode.

 Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

 Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

 Show element name

Show/hide element name.

 Show text

Show/hide additional text content for the displayed elements.

 Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

 Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available when the  **Show components** option is selected in the

 **Settings** menu:

Edit Attributes

Opens a small in-place editor that allow you to edit the attributes of the selected node.

 Cut

Cuts the currently selected node.

 Copy

Copies the currently selected node.

 Delete

Deletes the currently selected node.

 Search References Ctrl Shift R (Meta Shift R on OS X)

Searches all references of the item found at current cursor position in the defined scope, if any. See [Finding XSLT References and Declarations](#) for more details.

Search References in

Searches all references of the item found at current cursor position in the specified scope. See [Finding XSLT References and Declarations](#) for more details.

Component Dependencies

Allows you to see the dependencies for the current selected component. See [Component Dependencies View](#) for more details.

Resource Hierarchy

Displays the hierarchy for the currently selected resource.

Resource Dependencies

Displays the dependencies of the currently selected resource.

**Rename Component in**

Renames the selected component. See [XSLT Refactoring Actions](#) for more details.

The following contextual menu actions are available in the **Outline** view when the **Show XML structure** option is selected in the **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a small in-place editor that allow you to edit the attributes of the selected node.

**Toggle Comment**

Comments/uncomments the currently selected element.

**Search references**

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

**Component dependencies**

Displays the dependencies of the currently selected component.

**Rename Component in**

Renames the currently selected component in the context of a scope that you define.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Expand More**

Expands the structure of a component in the **Outline** view.

**Collapse All**

Collapses the structure of all the component in the **Outline** view.

The stylesheet components information is presented on two columns: the first column presents the **name** and **match** attributes, the second column the **mode** attribute. If you know the component name, match or mode, you can search it in the **Outline** view by typing one of these pieces of information in the filter text field from the top of the view or directly on the tree structure. When you type the component name, match or mode in the text field, you can switch to the tree structure using:

- Keyboard arrow keys

- **Enter** key
- **Tab** key
- **Shift-Tab** key combination

To switch from tree structure to the filter text field, you can use **Tab** and **Shift-Tab**.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- ***** - any string
- **?** - any character
- **,** - patterns separator

If no wildcards are specified, the string to search is used as a partial match (like ***textToFind***).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Oxygen XML Developer allows you to sort the components of the tree in the **Outline** view.



Note: Sorting groups in the **Outline** view is not supported.

Oxygen XML Developer has a predefined order of the groups in the **Outline** view:

- For location, the names of the files are sorted alphabetically. The main file is the one you are editing and it is located at the top of the list.
- For type, the order is: parameters, variables, templates, functions, set attributes, character-map.



Note: When no grouping is available and the table is not sorted, Oxygen XML Developer sorts the components depending on their order in the document. Oxygen XML Developer also takes into account the name of the file that the components are part of.

XSLT Stylesheet Documentation Support

Oxygen XML Developer offers built-in support for documenting XSLT stylesheets. If the expanded *QName* of the element has a non-null namespace URI, the `xsl:stylesheet` element may contain any element not from the XSLT namespace. Such elements are referenced as user-defined data elements. Such elements can contain the documentation for the stylesheet and its elements (top-level elements whose names are in the XSLT namespace). Oxygen XML Developer offers its own XML schema that defines such documentation elements. The schema is named `stylesheet_documentation.xsd` and can be found in `[OXYGEN_DIR]/frameworks/stylesheet_documentation`. The user can also specify a custom schema in [XSL Content Completion options](#).

When content completion is invoked inside an XSLT editor by pressing **Ctrl Space (Command Space on OS X)**, it offers elements from the XSLT documentation schema (either the built-in one or one specified by user).

In **Text** mode, to add documentation blocks while editing use the **Add component documentation** action available in the contextual menu.

If the cursor is positioned inside the `xsl:stylesheet` element context, documentation blocks are generated for all XSLT elements. If the cursor is positioned inside a specific XSLT element (like a template or a function), a documentation block is generated for that element only.

Example of a documentation block using Oxygen XML Developer built-in schema

```
<xd:doc>
  <xd:desc>
    <xd:p>Search inside parameter <xd:i>string</xd:i> for the last occurrence of parameter
    <xd:i>searched</xd:i>. The substring starting from the 0 position to the identified last
    occurrence will be returned. <xd:ref name="f:substring-after-last" type="function"
    xmlns:f="http://www.oxygenxml.com/doc/xsl/functions">See also</xd:ref></xd:p>
  </xd:desc>
  <xd:param name="string">
    <xd:p>String to be analyzed</xd:p>
```

```

</xd:param>
<xd:param name="searched">
  <xd:p>Marker string. Its last occurrence will be identified</xd:p>
</xd:param>
<xd:return>
  <xd:p>A substring starting from the beginning of <xd:i>string</xd:i> to the last
  occurrence of <xd:i>searched</xd:i>. If no occurrence is found an empty string will be
  returned.</xd:p>
</xd:return>
</xd:doc>

```

Generating Documentation for an XSLT Stylesheet

You can use Oxygen XML Developer to generate detailed documentation in HTML format for the elements (top-level elements whose names are in the XSLT namespace) of an XSLT stylesheet. You are able to select what XSLT elements to include in the generated documentation and also the level of details to present for each of them. The elements are hyperlinked. To generate documentation in a *custom output format*, you can edit the XSLT stylesheet used to generate the documentation, or create your own stylesheet.

To open the **XSLT Stylesheet Documentation** dialog box, select **XSLT Stylesheet Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project** view.

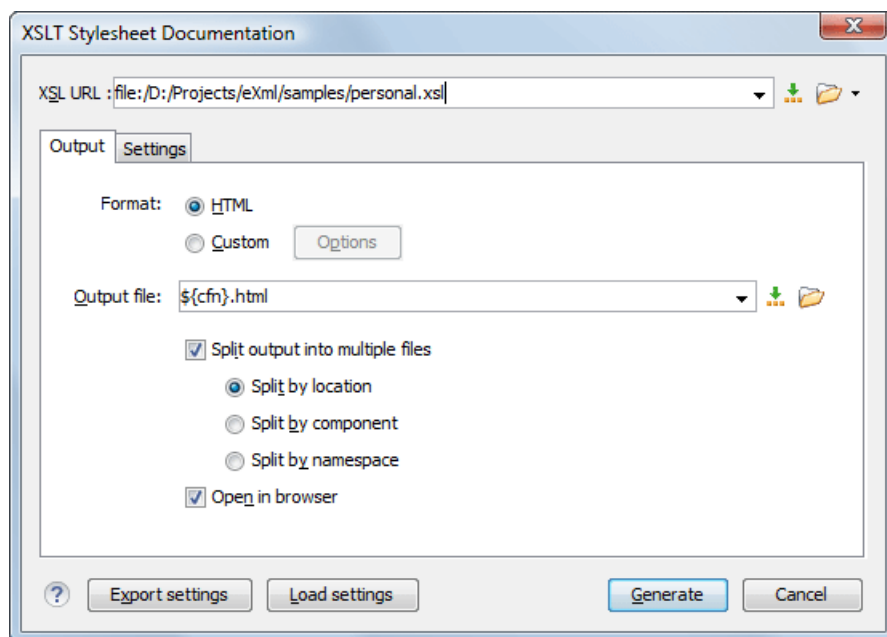


Figure 92: The XSLT Stylesheet Documentation Dialog Box

The **XSL URL** field of the dialog box must contain the full path to the XSL Stylesheet file you want to generate documentation for. The stylesheet may be a local or a remote file. You can specify the path to the stylesheet by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.

The Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in *HTML output format*.
 - **Custom** - The documentation is generated in a *custom output format*, allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for

creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.

- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. For large XSLT stylesheets being documented, choosing a different split criterion may generate smaller output files providing a faster documentation browsing. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.



Note: To set the browser or system application that will be used, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

The Settings Tab

When you generate documentation for an XSLT stylesheet you can choose what XSLT elements to include in the output (templates, functions, global parameters, global variables, attribute sets, character maps, keys, decimal formats, output formats, XSLT elements from referenced stylesheets) and the details to include in the documentation.

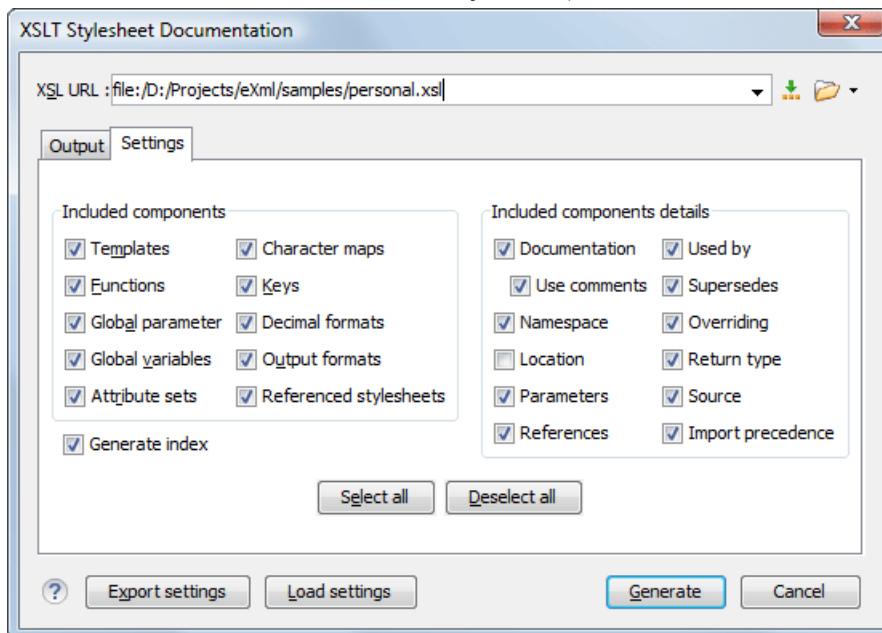


Figure 93: The Settings Tab of the XSLT Stylesheet Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following components: **Templates**, **Functions**, **Global parameters**, **Global variables**, **Attribute sets**, **Character maps**, **Keys**, **Decimal formats**, **Output formats**, **Referenced stylesheets**.

You can choose whether or not to include the following other details:

- **Documentation** - Shows the documentation for each XSLT element. For HTML format, the user-defined data elements that are recognized and transformed in documentation blocks of the XSLT elements they precede, are the ones from the following schemas:
 - Oxygen XML Developer built-in XSLT documentation schema.
 - A subset of DocBook 5 elements. The recognized elements are: section, sect1 to sect5, emphasis, title, ulink, programlisting, para, orderedlist, itemizedlist.

- A subset of DITA elements. The recognized elements are: `concept`, `topic`, `task`, `codeblock`, `p`, `b`, `i`, `ul`, `ol`, `pre`, `sl`, `sli`, `step`, `steps`, `li`, `title`, `xref`.
- Full XHTML 1.0 support.
- XSLStyle documentation environment. XSLStyle uses DocBook or DITA languages inside its own user-defined data elements. The supported DocBook and DITA elements are the ones mentioned above.
- Doxsl documentation framework. Supported elements are : `codefrag`, `description`, `para`, `docContent`, `documentation`, `parameter`, `function`, `docSchema`, `link`, `list`, `listitem`, `module`, `parameter`, `template`, `attribute-set`;

Other XSLT documentation blocks that are not recognized will just be serialized inside an HTML `pre` element. You can change this behavior by using a [custom format](#) instead of the built-in [HTML format](#) and providing your own XSLT stylesheets.

- **Use comments** - Controls whether or not the comments that precede an XSLT element is treated as documentation for the element they precede. Comments that precede or succeed the `xsl:stylesheet` element, are treated as documentation for the whole stylesheet. Note that comments that precede an import or include directive are not collected as documentation for the imported/included module. Also, comments from within the body of the XSLT elements are not collected at all.
- **Namespace** - Shows the namespace for named XSLT elements.
- **Location** - Shows the stylesheet location for each XSLT element.
- **Parameters** - Shows parameters of templates and functions.
- **References** - Shows the named XSLT elements that are referenced from within an element.
- **Used by** - Shows the list of all the XSLT elements that reference the current named element.
- **Supersedes** - Shows the list of all the XSLT elements that are superseded the current element.
- **Overriding** - Shows the list of all the XSLT elements that override the current element.
- **Return type** - Shows the return type of the function.
- **Source** - Shows the text stylesheet source for each XSLT element.
- **Import precedence** - Shows the computed import precedence as declared in the XSL transformation specifications.
- **Generate index** - Creates an index with all the XSLT elements included in the documentation.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

Load settings - Reloads the settings from the exported file.

Generate - Use this button to generate the XSLT documentation.

Generate XSLT Documentation in HTML Format

The XSLT documentation generated in HTML format is presented in a visual diagram style with various sections, hyperlinks, and options.

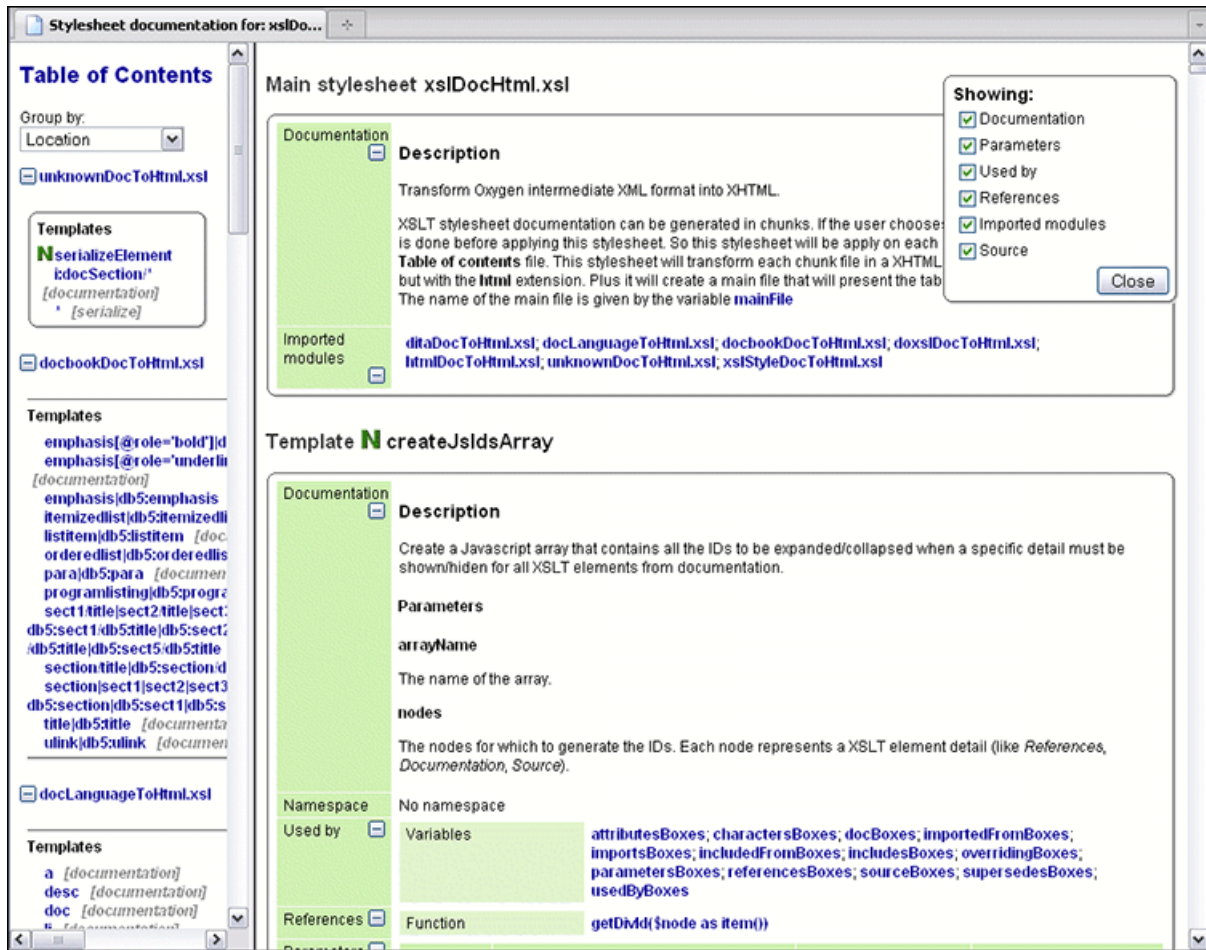


Figure 94: XSLT Stylesheet Documentation Example

The generated documentation includes the following:

- Table of Contents - You can group the contents by namespace, location, or component type. The XSLT elements from each group are sorted alphabetically (named templates are presented first and the match ones second).
- Information about main, imported, and included stylesheets. This information consists of:
 - XSLT modules included or imported by the current stylesheet.
 - The XSLT stylesheets where the current stylesheet is imported or included.
 - The stylesheet location.



Figure 95: Information About an XSLT Stylesheet

If you choose to split the output into multiple files, the table of contents is displayed in the left frame. The contents are grouped using the same criteria as the split.

After the documentation is generated, you can collapse or expand details for some stylesheet XSLT elements by using the **Showing** options or the  **Collapse** or  **Expand** buttons.




Figure 96: The Showing Options

For each element included in the documentation, the section presents the element type followed by the element name (value of the name or match attribute for match templates).

Function func:substring-before-last

Documentation

Description

Get the substring before the last occurrence of the given substring

Parameters

string

The string in which to search

searched

The string to search

Return

The substring starting from the start of the **string** to the index of the last occurrence of **searched**

Namespace

http://www.oxygenxml.com/doc/xsl/functions

Type

xs:string

Used by

Template

Nindex

Function

func:substring-before-last(\$string as item(), \$searched as item())

Variable

indexFile

References

Function

substring-before-last(\$string as item(), \$searched as item())

Parameters

QName

Namespace

searched

No namespace

string

No namespace

Import precedence

7

Source

```

<xsl:function as="xs:string" name="func:substring-before-last">
  <xsl:param name="string"/>
  <xsl:param name="searched"/>
  <xsl:variable name="toReturn">
    <xsl:choose>
      <xsl:when test="contains($string, $searched)">
        <xsl:variable name="before" select="substring-before($string, $searched)"/>
        <xsl:variable name="rec" select="func:substring-before-last(substring-after
      <xsl:choose>

```

Figure 97: Documentation for an XSLT Element

Generate XSLT Documentation in a Custom Format

XSLT stylesheet documentation can be also generated in a custom format. You can choose the format from the [XSLT Stylesheet Documentation dialog box](#). Specify your own stylesheet to transform the intermediary XML generated in the documentation process. You must write your stylesheet based on the schema `xslDocSchema.xsd` from `[OXYGEN_DIR]/frameworks/stylesheet_documentation`. You can create a custom format starting from one of the stylesheets used in the predefined HTML, PDF, and DocBook formats. These stylesheets are available in `[OXYGEN_DIR]/frameworks/stylesheet_documentation/xsl`.

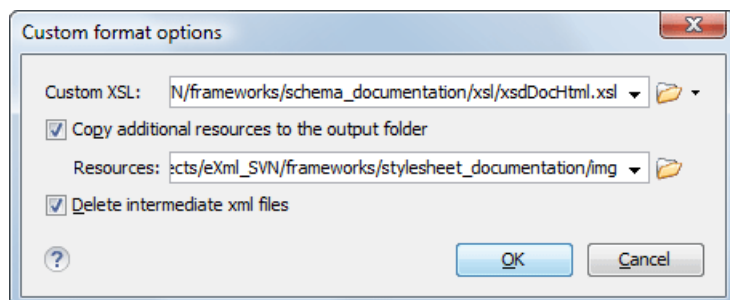


Figure 98: The Custom Format Options Dialog Box

When using a custom format, you can also copy additional resources into the output folder or choose to keep the intermediate XML files created during the documentation process.

Generating XSLT Documentation From the Command-Line Interface

You can export the settings of the **XSLT Stylesheet Documentation** dialog box to an XML file by pressing the **Export settings** button. With the exported settings file, you can generate the same documentation from the command line by running the script `stylesheetDocumentation.bat` (on Windows) / `stylesheetDocumentation.sh` (on OS X / Unix / Linux) located in the Oxygen XML Developer installation folder. The script can be integrated in an external batch process launched from the command-line interface.

The command-line parameter of the script is the relative path to the exported XML settings file. The files that are specified with relative paths in the exported XML settings are resolved relative to the script directory.

Example of an XML Configuration File

```
<serialized>
  <map>
    <entry>
      <String xml:space="preserve">xsd.documentation.options</String>
      <xsdDocumentationOptions>
        <field name="outputFile">
          <String xml:space="preserve">${cfn}.html</String>
        </field>
        <field name="splitMethod">
          <Integer xml:space="preserve">1</Integer>
        </field>
        <field name="openOutputInBrowser">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="format">
          <Integer xml:space="preserve">1</Integer>
        </field>
        <field name="customXSL">
          <null/>
        </field>
        <field name="deleteXMLFiles">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeIndex">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeGlobalElements">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeGlobalAttributes">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeLocalElements">

```

```

        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeLocalAttributes">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeSimpleTypes">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeComplexTypes">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeGroups">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeAttributesGroups">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeRedefines">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="includeReferencedSchemas">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsDiagram">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsNamespace">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsLocation">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsType">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsTypeHierarchy">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsModel">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsChildren">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsInstance">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsUsedby">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsProperties">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsFacets">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsAttributes">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsIdentityConstr">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsEscapeAnn">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsSource">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
    <field name="detailsAnnotations">
        <Boolean xml:space="preserve">true</Boolean>
    </field>
</xsdDocumentationOptions>
</entry>
</map>
</serialized>

```

Finding XSLT References and Declarations

The following search actions related with XSLT references and declarations are available from the **Search** submenu of the contextual menu and from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined but the currently edited resource is not part of the range of determined resources, a warning dialog box is displayed that allows you to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when a scope is defined.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope, if any. If a scope is defined but the current edited resource is not part of the range of resources determined by this scope, a warning dialog box is displayed that allows you to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when a scope is defined.
- **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document** > **Schema** menu:

-  **Show Definition** - Moves the cursor to the location of the definition of the current item.



Note: You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Highlight Component Occurrences

When a component (for example variable or named template) is found at current cursor position, Oxygen XML Developer performs a search over the entire document to find the component declaration and all its references. When found, they are highlighted both in the document and in the stripe bar, at the right side of the document.



Note: Oxygen XML Developer also supports occurrences highlight for template modes.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected and a new search is performed. All occurrences are removed when you start to edit the document.

This feature is enabled by default. To configure it, [open the Preferences dialog box](#) and go to **Editor** > **Mark Occurrences**. A search can also be triggered with the **Search** > **Search Occurrences in File (Ctrl Shift U (Meta Shift U on OS X))** contextual menu action. Matches are displayed in separate tabs of the **Results** view.

XSLT Refactoring Actions

Oxygen XML Developer offers a set of actions that allow changing the structure of an XSLT stylesheet without changing the results of running it in an XSLT transformation. Depending on the selected text, the following refactoring actions are available from **Refactoring** submenu from the contextual menu of the current editor and the **Document** > **Refactoring** menu:

-  **Extract template** - Extracts the selected XSLT instructions sequence into a new template. Opens a dialog box that allows you to specify the name of the new template to be created. The possible changes to perform on the document can be previewed before altering the document. After pressing OK, the template is created and the selection is replaced with a `<xsl:call-template>` instruction referencing the newly created template.



Note: This action is available only when the selection contains well-formed elements.



Note: The newly created template is indented and its name is highlighted in the `<xsl:call-template>` element.

-  **Move to another stylesheet** - Allows you to move one or more XSLT global components (templates, functions, or parameters) to another stylesheet. Active only when these entire components are selected. Follow these steps:

1. Choose whether you want to move the selected components to a new stylesheet or an existing one.

2. Select the destination stylesheet. Press the **Choose** button to select the destination stylesheet file. Oxygen XML Developer will automatically check if the destination stylesheet is already contained by the hierarchy of the current stylesheet. If it is not contained, choose whether or not the destination stylesheet will be referenced (imported or included) from the current stylesheet. The following options are available:

- **Include** - The current stylesheet will use an `xsl:include` instruction to reference the destination stylesheet.
- **Import** - The current stylesheet will use an `xsl:import` instruction to reference the destination stylesheet.
- **None** - There will be created no relation between the current and destination stylesheets.

3. Press the **Move** button to move the components to the destination stylesheet. The moved components are highlighted in the destination stylesheet.

- **Convert attributes to xsl:attributes** - Converts the attributes from the selected element and represents each of them with an `<xsl:attribute>` instruction. For example, from the following element:

```
<person id="Big{test}Boss"/>
```

you obtain:

```
<person>
  <xsl:attribute name="id">
    <xsl:text>Big</xsl:text>
    <xsl:value-of select="test"/>
    <xsl:text>Boss</xsl:text>
  </xsl:attribute>
</person>
```

- **Convert xsl:if into xsl:choose/xsl:when** - Converts an `xsl:if` block to an `xsl:when` block surrounded by an `xsl:choose` element. For example, the following block:

```
<xsl:if test="a">
  <!-- XSLT code -->
</xsl:if>
```

is converted to:

```
<xsl:choose>
  <xsl:when test="a">
    <!-- XSLT code -->
  </xsl:when>
  <xsl:otherwise>
    |
  </xsl:otherwise>
</xsl:choose>
```

where the `|` character is the current cursor position.

- **Extract local variable** - Allows you to create a new local variable by extracting the selected XPath expression. After creating the new local variable before the current element, Oxygen XML Developer allows you to edit in-place the variable's name.



Note: The action is active on a selection made inside an attribute that contains an XPath expression.

- **Extract global variable** - Allows you to create a new global variable by extracting the selected XPath expression. After creating the new global variable, Oxygen XML Developer allows you to edit in-place the variable's name.



Note: The action is active on a selection made inside an attribute that contains an XPath expression.



Note: Oxygen XML Developer checks if the selected expression depends on local variables or parameters that are not available in the global context where the new variable is created.

- **Extract template parameter** - Allows you to create a new template parameter by extracting the selected XPath expression. After creating the new parameter, Oxygen XML Developer allows you to edit in-place its name.



Note: The action is active on a selection made inside an attribute that contains an XPath expression.

- **Extract global parameter** - Allows you to create a new global parameter by extracting the selected XPath expression. After creating the new parameter, Oxygen XML Developer allows you to edit in-place its name.



Note: The action is active on a selection made inside an attribute that contains an XPath expression.



Note: Oxygen XML Developer checks if the selected expression depends on local variables or parameters that are not available in the global context where the new parameter is created.

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename component_type** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

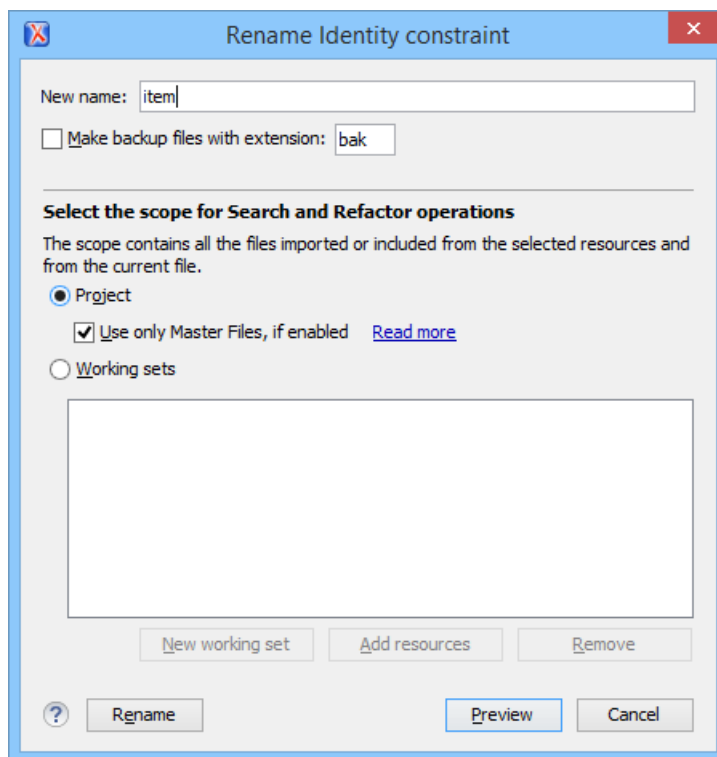


Figure 99: Rename Identity Constraint Dialog Box



Note: These refactoring actions are also proposed by the [Quick Assist support](#).

To watch our video demonstration about XSLT refactoring, go to http://oxygenxml.com/demo/XSL_Refactoring.html.

XSLT Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a stylesheet. To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**.

If you want to see the hierarchy of a stylesheet, select the desired stylesheet in the project view and choose **Resource Hierarchy** from the contextual menu.

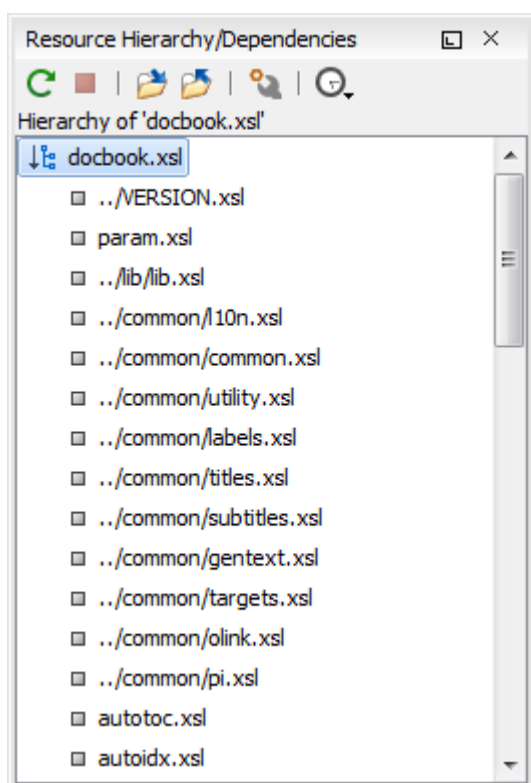


Figure 100: Resource Hierarchy/Dependencies View - Hierarchy for docbook.xml

If you want to see the dependencies of a stylesheet, select the desired stylesheet in the project view and choose **Resource Dependencies** from the contextual menu.

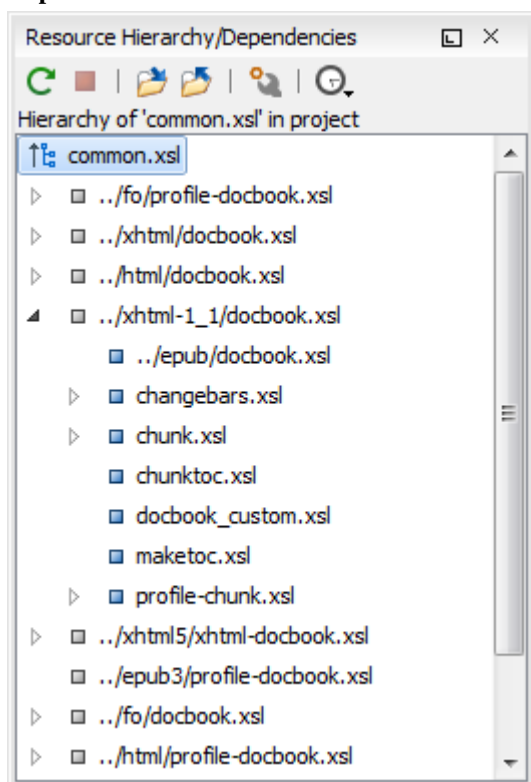


Figure 101: Resource Hierarchy/Dependencies View - Dependencies for common.xml

The following actions are available in the **Resource Hierarchy/Dependencies** view:



Refresh

Refreshes the Hierarchy/Dependencies structure.



Stop

Stops the hierarchy/dependencies computing.



Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.



Show Dependencies

Allows you to choose a resource to compute the dependencies structure.



Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.



History

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Moving/Renaming XSLT Resources

You are able to move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

XSLT Component Dependencies View

The Component Dependencies view allows you to see the dependencies for a selected XSLT component. You can open the view from **Window > Show View > Component Dependencies**.

If you want to see the dependencies of an XSLT component, select the desired component in the editor and choose the **Component Dependencies** action from the contextual menu. The action is available for all named components (templates, variables, parameters, attribute sets, keys, functions, outputs).

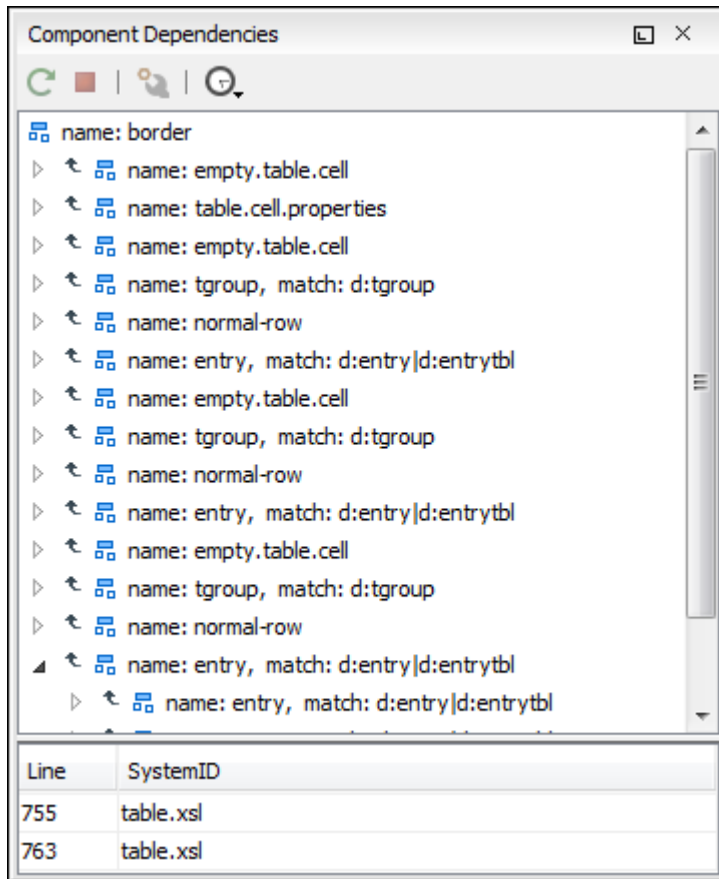


Figure 102: Component Dependencies View - Hierarchy for table.xsl

In the Component Dependencies view you have several actions in the toolbar:



Refresh

Refreshes the dependencies structure.



Stop

Stops the dependencies computing.

Configure

Allows you to configure a search scope to compute the dependencies structure. You can decide to use automatically the defined scope for future operations by checking the corresponding checkbox.

History

Allows you to repeat a previous dependencies computation.

The following actions are available on the contextual menu:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Shows the definition of the current selected component in the dependencies tree.

 **Tip:** If a component contains multiple references to another, a small table is displayed that contains all references. When a recursive reference is encountered, it is marked with a special icon .

XSLT Quick Assist Support

The **Quick Assist** support helps you to rapidly access search and refactoring actions. If one or more actions are available in the current context, they are accessible via a yellow bulb help marker placed on the cursor line, in the editor line number stripe. Also, you can invoke the **Quick Assist** menu if you press **Alt + 1** keys (**Meta + Alt + 1** on Mac OS X) on your keyboard.

Two categories of actions are available in the **Quick Assist** menu:

- Actions available on a selection made inside an attribute that contains an XPath expression:
 -  **Extract template** - Extracts the selected XSLT instructions sequence into a new template.
 -  **Move to another stylesheet** - Allows you to move one or more XSLT global components (templates, functions, or parameters) to another stylesheet.
 - **Extract local variable** - Allows you to create a new local variable by extracting the selected XPath expression.
 - **Extract global variable** - Allows you to create a new global variable by extracting the selected XPath expression.
 - **Extract template parameter** - Allows you to create a new template parameter by extracting the selected XPath expression.
 - **Extract global parameter** - Allows you to create a new global parameter by extracting the selected XPath expression.

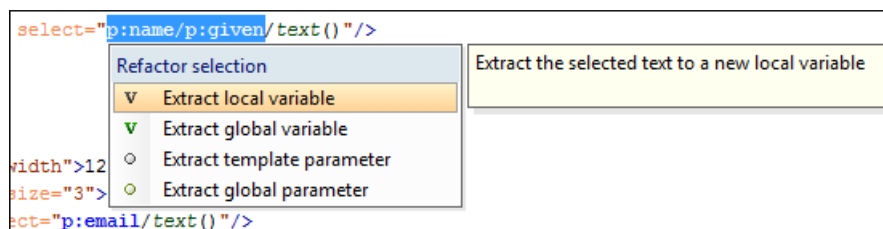


Figure 103: XSLT Quick Assist Support - Refactoring Actions

- actions available when the cursor is positioned over the name of a component:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

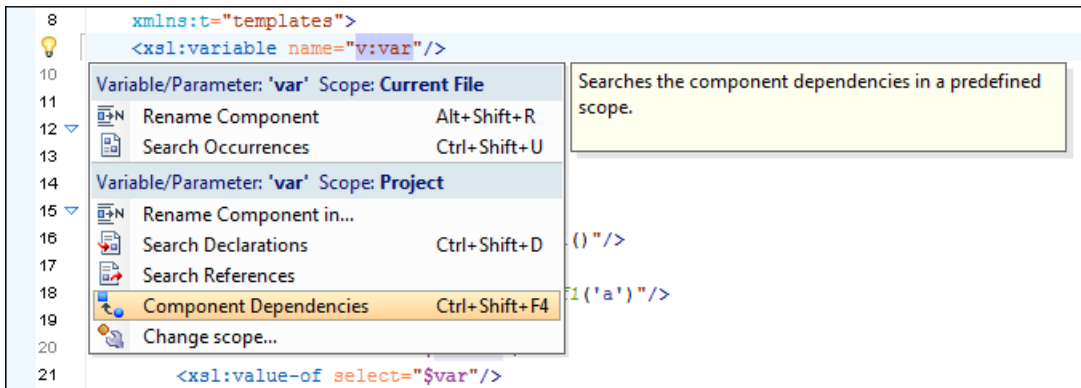


Figure 104: XSLT Quick Assist Support - Component Actions

XSLT Quick Fix Support

The Oxygen XML Developer Quick Fix support helps you resolve various errors that appear in a stylesheet by proposing quick fixes to problems such as missing templates, misspelled template names, missing functions, or references to an undeclared variable or parameter.

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a Quick Fix is available for that particular error or warning, you can access the Quick Fix proposals with any of the following methods:

- When hovering over the error or warning, the proposals are presented in a tooltip popup window.
- If you place the cursor in the highlighted area where a validation error or warning occurs, a quick fix icon () is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.
- With the cursor placed in the highlighted area of the error or warning, you can also invoke the quick fix menu by pressing **Alt 1 (Meta Alt 1 on OS X)** on your keyboard.

 **Note:** The quick fixes are available only when validating an XSLT file with Saxon HE/PE/EE.

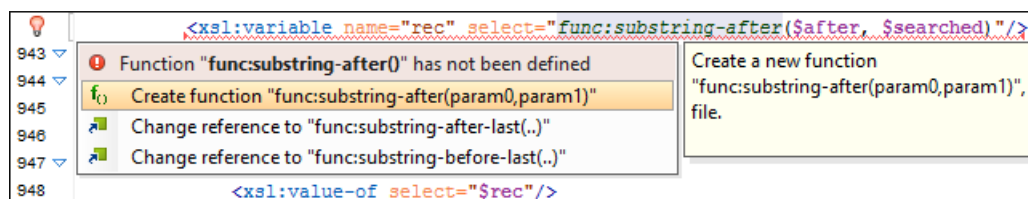


Figure 105: Example of an Undefined XSLT Functions Quick Fix

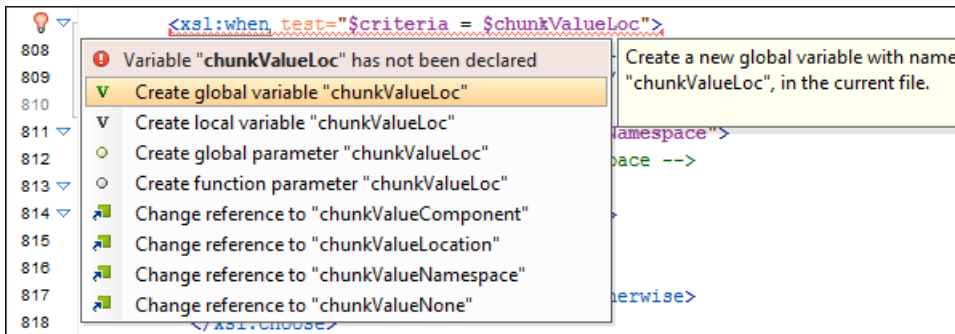


Figure 106: Example of an Undeclared XSLT Variables/Parameters Quick Fix

Oxygen XML Developer provides XSLT quick fixes for the following types of instances:

- **Template does not exist**, when the template name referenced in a `call-template` element does not exist. The following fixes are available:
 - **Create template "templateName"** - creates a template and generates its corresponding parameters. The template name and parameter names and types are collected from the `call-template` element.
 - **Change reference to "newTemplateName"** - changes the name of the missing template referenced in the `call-template` element. The proposed new names are the existing templates with names similar with the missing one.
- **Variable/Parameter not declared**, when a parameter or variable reference cannot be found. The following fixes are available:
 - **Create global variable "varName"** - creates a global variable with the specified name in the current stylesheet. The new variable is added at the beginning of the stylesheet after the last global variable or parameter declaration.
 - **Create global parameter "paramName"** - creates a global parameter with the specified name in the current stylesheet. The new parameter is added at the beginning of the stylesheet after the last global parameter or variable declaration.
 - **Create local variable "varName"** - creates a local variable with the specified name before the current element.
 - **Create template parameter "paramName"** - creates a new parameter with the specified name in the current template. This fix is available if the error is located inside a template.
 - **Create function parameter "paramName"** - creates a new parameter with the specified name in the current function. This fix is available if the error is located inside a function.
 - **Change reference to "varName"** - changes the name of the referenced variable/parameter to an existing local or global variable/parameter, that has a similar name with the current one.
- **Parameter from a called template is not declared**, when a parameter referenced from a `call-template` element is not declared. The following fixes are available:
 - **Create parameter "paramName" in the template "templateName"** - creates a new parameter with the specified name in the referenced template.
 - **Change "paramName" parameter reference to "newParamName"** - changes the parameter reference from the `call-template` element to a parameter that is declared in the called template.
 - **Remove parameter "paramName" from call-template** - removes the parameter with the specified name from the `call-template` element.
- **No value supplied for required parameter**, when a required parameter from a template is not referenced in a `call-template` element. The following quick-fix is available:
 - **Add parameter "paramName" in call-template** - creates a new parameter with the specified name in call-template element.
- **Function "prefix:functionName()" has not been defined**, when a function declaration is not found. The following quick fixes are available:

- **Create function "prefix:functionName(param1, param2)"** - creates a new function with the specified signature, after the current top level element from stylesheet.
- **Change function to "newFunctionName(..)"** - changes the referenced function name to an already defined function. The proposed names are collected from functions with similar names and the same number of parameters.
- **Attribute-set "attrSetName" does not exist**, when the referenced attribute set does not exist. The following quick fixes are available:
 - **Create attribute-set "attrSetName"** - creates a new attribute set with the specified name, after the current top level element from stylesheet.
 - **Change reference to "attrSetName"** - changes the referenced attribute set to an already defined one.
- **Character-map "chacterMap" has not been defined**, when the referenced character map declaration is not found. The following quick fixes are available:
 - **Create character-map "characterMapName"** - creates a new character map with the specified name, after the current top level element from stylesheet.
 - **Change reference to "characterMapName"** - changes the referenced character map to an already defined one.

XSLT Unit Test (XSpec)

XSpec is a behavior driven development (BDD) framework for XSLT and XQuery. XSpec consists of a syntax for describing the behavior of your XSLT or XQuery code, and some code that enables you to test your code against those descriptions.

To create an XSLT Unit Test, go to **File > New > XSLT Unit Test**. You can also create an XSLT Unit Test from the contextual menu of an XSL file in the **Project** view. Oxygen XML Developer allows you to customize the XSpec document when you create it. In the customization dialog box, you can enter the path to an XSL document or to a master XSL document.

To run an XSLT Unit Test, open the XSPEC file in an editor and click  **Apply Transformation Scenario(s)** on the main toolbar.

 **Note:** The transformation scenario is defined in the XSPEC [document type](#).

When you create an XSpec document based on an XSL document, Oxygen XML Developer uses information from the validation and transformation scenarios associated with the XSL file. From the transformation scenario Oxygen XML Developer uses extensions and properties of Saxon 9.6.0.7, improving the Ant scenario associated with the XSpec document.

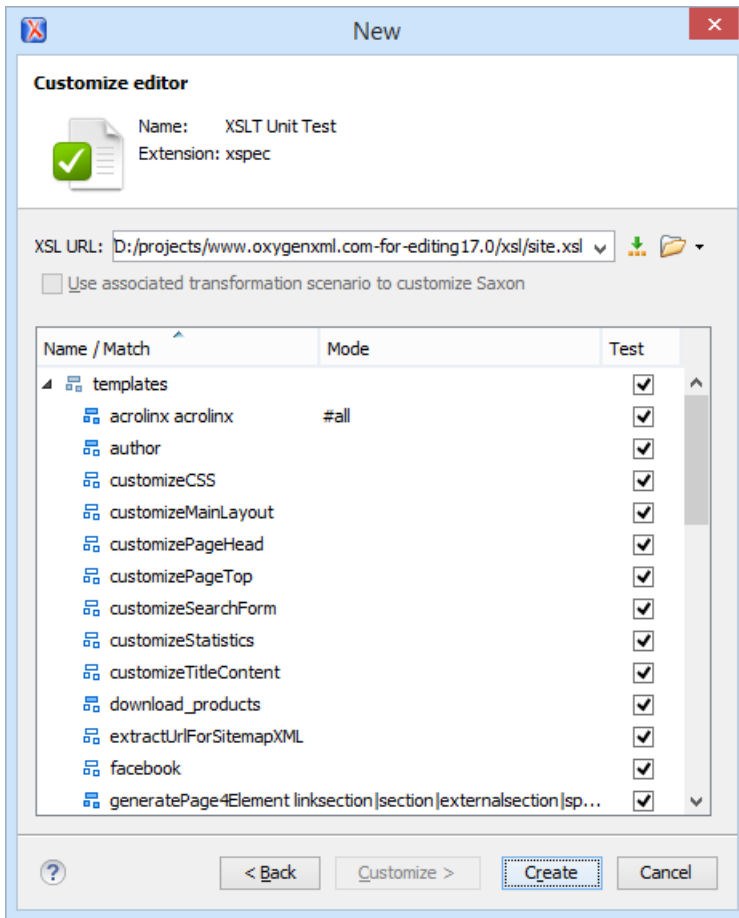


Figure 107: The New XSLT Unit Test Wizard

An XSpec file contains one, or more test scenarios. You can test a stylesheet in one of the following ways:

- Test an entire stylesheet.

Testing is performed in a certain context. You can define a context as follows:

- Inline context, building the test based on a string.

```
<x:scenario label="when processing a para element">
  <x:context>
    <para>...</para>
  </x:context>
  ...
</x:scenario>
```

- Based on an external file, or on a part of an external file extracted with an XPath expression.

```
<x:scenario label="when processing a para element">
  <x:context href="source/test.xml" select="/doc/body/p[1]" />
  ...
</x:scenario>
```

- Test a function.

```
<x:scenario label="when capitalising a string">
  <x:call function="eg:capital-case">
    <x:param select="'an example string'" />
    <x:param select="true()" />
  </x:call>
  ...
</x:scenario>
```

- Test a template with a name.

```
<x:call template="createTable">
  <x:param name="nodes">
    <value>A</value>
    <value>B</value>
  </x:param>
  <x:param name="cols" select="2" />
</x:call>
```

You are able to reference test files between each other, which allows you to define a suite of tests. For further details about test scenarios, go to <https://github.com/expath/xspec/wiki/Writing-Scenarios>.

Editing Ant Build Files

This section explains the features of the Ant build file editor.

Validate Ant Build Files

Oxygen XML Developer performs the validation of Ant build files with the help of a built-in processor, which is largely based on the Apache Ant libraries. The path to these libraries can be configured in the [Ant Preferences](#) on page 786 page. The validation processor accesses the [parameters set in the associated Ant transformation scenario](#) and uses them as Ant properties when validating the current build script.

Oxygen XML Developer automatically validates Ant build files as you type. You can also validate the currently edited file by selecting the  **Validate** action from the  ▾ **Validation** toolbar drop-down menu or the **Document** > **Validate** menu.



Tip: To make a custom task available in the Ant validation engine, add a *JAR* file that contains the task implementation to the library directory of the built-in Ant distribution that comes bundled with Oxygen XML Developer (for example, [OXYGEN INSTALLATION DIRECTORY]/tools/ant/lib folder).

Create a Validation Scenario for Ant Build Files

If you want to customize the validation process for Ant build files, you can create a new validation scenario (or configure an existing one). For example, if you want to validate interrelated modules that define a complex Ant build file, you can specify the main Ant file by configuring a validation scenario. To create or configure a validation scenario, select



Configure Validation Scenario(s) from the  ▾ **Validation** toolbar drop-down menu or the **Document** > **Validate** menu.

Editing Ant Build Files in the Context of Master Files

Smaller interrelated modules that define a complex Ant build file cannot be correctly edited or validated individually due to their interdependency with other modules. For example, a *target* defined in a main build file is not visible when you edit an included or imported module. Oxygen XML Developer provides support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger Ant build structure.

You can set a main Ant build file either by using the [master files support from the Project view](#), or [a validation scenario](#).

To set a main file using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main build file. In this case, it considers the current module as the main build file.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger build structure.
- **Content Completion Assistant** displays all components valid in the current context.
- The **Outline** view displays the components collected from the entire build file structure.

Syntax Highlight

To change the syntax highlighting colors for Ant build files, [open the Preferences dialog box](#) and go to **Editor > Syntax Highlight**.

Content Completion in Ant Build Files

The items in the list of proposals offered by the **Content Completion Assistant** are context-sensitive.

The **Content Completion Assistant** proposes various item types that are defined in the current Ant build and in the imported and included builds. The proposals include:

- Element names
- Attribute names
- Property names



Note: In addition to the user-defined properties, the **Content Completion Assistant** offers the following values:

- The system properties set in the Java Virtual Machine.
- The built-in properties that Ant provides.
- Target names
- Task and type reference IDs



Tip: To make a custom task available in the **Content Completion Assistant**, add a *JAR* file that contains the task implementation to the library directory of the built-in Ant distribution that comes bundled with Oxygen XML Developer (for example, [OXYGEN INSTALLATION DIRECTORY]/tools/ant/lib folder).



Note: For Ant resources, the proposals are collected starting from the master files. The master files can be defined in the project or in the associated validation scenario. For further details about the **Master Files** support go to [Defining Master Files at Project Level](#).

Ant Outline View

The Ant **Outline** view displays the list of all the components (properties, targets, extension points, task/type definitions and references) from both the edited Ant build file and its imported and included modules. For Ant resources, the **Outline** view collects its components starting from the master files. The master files can be defined in the project and the main build file can be specified in a validation scenario. For more details, see [Defining Master Files at Project Level](#).

To enable the **Outline** view, go to **Window > Show View > Outline**.

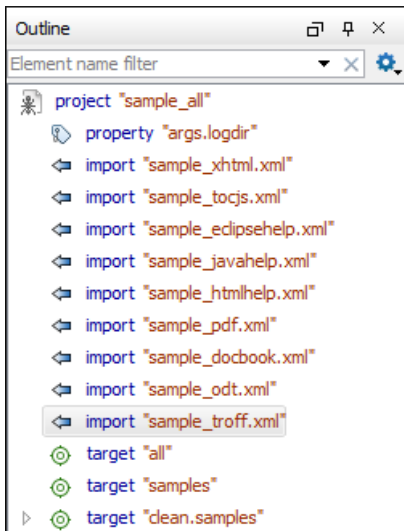


Figure 108: Ant Outline View

The following actions are available in the  **Settings** menu on the Outline view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches. By default, this filter is not selected.



Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the Ant editor. Selecting one of the components from the outline view also selects the corresponding item in the source document.

When the  **Show components** option is selected, the following actions are available:



Show XML structure

Displays the XML document structure in a tree-like manner.



Sort

Sorts the components in the **Outline** view alphabetically.

Show all components

Displays all components that were collected starting from the main file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/type

The build file components can be grouped by location and type.

When the  **Show XML structure** option is selected, the following actions are available:



Show components

Switches the **Outline** view to the components display mode.



Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.



Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.



Show element name

Show/hide element name.

 Show text

Show/hide additional text content for the displayed elements.

 Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

 Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following actions are available in the contextual menu of the **Outline** view (when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that can be inserted as children of the current element.

Insert Before

Displays a list of elements that can be inserted as siblings of the current element, before the current element.

Insert After

Displays a list of elements that can be inserted as siblings of the current element, after the current element.

Edit Attributes

Displays an in-place attribute editing window.

 Toggle Comment

Comments/uncomments the currently selected element.

 Search References Ctrl Shift R (Meta Shift R on OS X)

Searches all references of the item found at current cursor position in the defined scope. See [Find References and Declarations of Ant Components](#) for more details.

Search References in

Searches all references of the item found at current cursor position in the specified scope. See [Find References and Declarations of Ant Components](#) for more details.

 Component Dependencies

Allows you to see the dependencies for the current selected component. See [Ant Component Dependencies View](#) for more details.

 Rename Component in

Renames the selected component. See [Ant Refactoring Actions](#) for more details.

 Cut, **Copy**, **Delete**

Executes the typical editing actions on the currently selected component.

 Expand More

Expands recursively all sub-components of the selected component.

 Collapse All

Collapses recursively all sub-components of the selected component.

You can search a component in the **Outline** view by typing its name in the filter text field at the top of the view or directly on the tree structure. When you type the component name in the text field, you can switch to the tree structure using the following:

- **Down** arrow key
- **Tab** key
- **Shift-Tab** key combination

To switch from tree structure to the filter text field, you can use **Tab** and **Shift-Tab**.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match (such as ***textToFind***).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Oxygen XML Developer has a predefined order for the groups in the **Outline** view:

- For location, the names of the files are sorted alphabetically. The main file is the one you are editing and it is located at the top of the list.
- For type, the order is: properties, targets, references.



Note: When no grouping is available Oxygen XML Developer sorts the components depending on their order in the document. Oxygen XML Developer also takes into account the name of the file that the components are part of.

Find References and Declarations of Ant Components

The following search actions related to references and declarations of Ant components are available from the **Search** submenu of the contextual menu and from the **Document > References** menu::

- **Search References** - Searches all references of the item found at current cursor position in the defined scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify after selecting a scope for the search operation.
- **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when defining a new scope.
- **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

- **Show Definition** - Moves the cursor to the location of the definition of the current item.



Note: You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Highlight Component Occurrences

When a component (for example *property* or *target*) is found at the current cursor position, they are highlighted in both the document and in the stripe bar at the right side of the document. Oxygen XML Developer also supports occurrences highlight for type and task references.

Customizable colors are used (one for the component definition and another one for component references). Occurrences are displayed until another component is selected and a new search is performed. All highlights are removed when you start to edit the document.

This feature is enabled by default. To configured it, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**. If the automatic feature is disabled for a particular type of file, you can perform this search by going to **Search > Search Occurrences in File Ctrl Shift U (Meta Shift U on OS X)** in the contextual menu. Matches are displayed in separate tabs of the **Results** view.

Ant Refactoring Actions

The following refactoring actions can be applied on *targets*, *extension-points*, *properties*, and *references* and allow you to consistently rename a component in the entire Ant build file structure. They are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document** > **Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename component_type** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

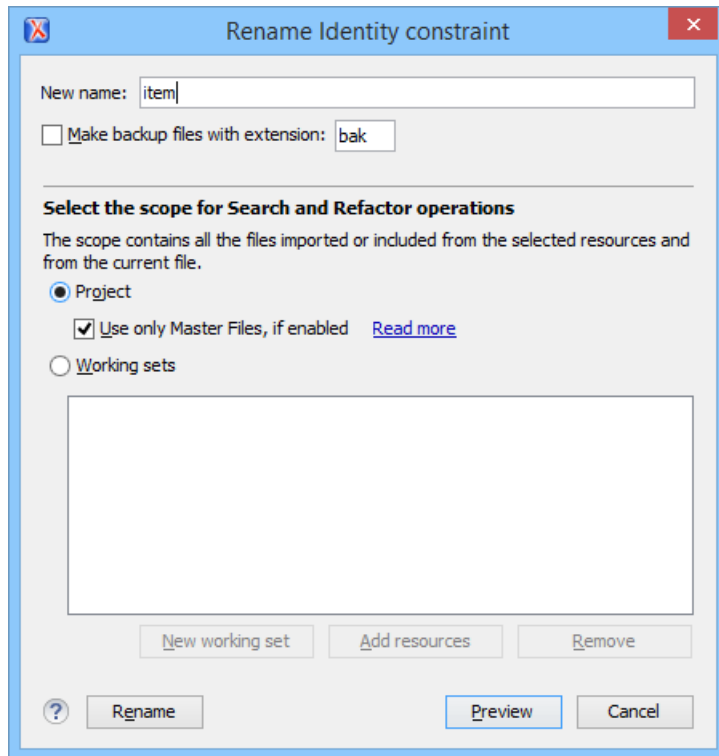


Figure 109: Rename Identity Constraint Dialog Box

Ant Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for an Ant build file by analyzing imported or included build files. To open this view, go to **Window** > **Show View** > **Resource Hierarchy/Dependencies**.

If you want to see the hierarchy of a build file, select it in the project view and choose **Resource Hierarchy** from the contextual menu.

If you want to see the dependencies of a build file, select it in the project view and choose **Resource Dependencies** from the contextual menu.

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

**Stop**

Stops the hierarchy/dependencies computing.

**Show Hierarchy**

Allows you to choose a resource to compute the hierarchy structure.

**Show Dependencies**

Allows you to choose a resource to compute the dependencies structure.

**Configure**

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

**History**

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

**Add to Master Files**

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Ant Component Dependencies View

The Component Dependencies view allows you to see the dependencies for a selected Ant component. You can open the view from **Window > Show View > Component Dependencies**.

If you want to see the dependencies of an Ant component, select the desired component in the editor or **Outline** view and choose the **Component Dependencies** action from the contextual menu. The action is available for the following components: *properties*, *targets*, *extension-points*, and *references* (those that have an id set).

The following toolbar actions are available in the **Component Dependencies** view:

**Refresh**

Refreshes the dependencies structure.

**Stop**

Stops the dependencies computing.

**Configure**

Allows you to configure a search scope to compute the dependencies structure. You can decide to use automatically the defined scope for future operations by checking the corresponding checkbox.

**History**

Allows you to repeat a previous dependencies computation.

The following actions are available from the contextual menu:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Shows the definition of the current selected component in the dependencies tree.



Tip: If a component contains multiple references to another, these references are listed in a table displayed at the bottom of **Component Dependencies** view. When a recursive reference is encountered, it is marked with a special icon .

Ant Quick Assist Support

The **Quick Assist** support helps you to rapidly access search and refactoring actions. If one or more actions are available in the current context, they are accessible via a yellow bulb help marker placed on the cursor line, in the editor line number stripe. Also, you can invoke the **Quick Assist** menu by pressing **Alt 1 (Meta Alt 1 on OS X)** on your keyboard.

The quick assist support offers direct access to the following actions:

**Rename Component in**

Renames the component and all its dependencies.

**Search Declarations**

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

**Search References**

Searches all references of the component in a predefined scope.

**Component Dependencies**

Searches the component dependencies in a predefined scope.

**Change Scope**

Configures the scope that will be used for future search or refactor operations.

**Rename Component**

Allows you to rename the current component in-place.

**Search Occurrences**

Searches all occurrences of the component within the current file.

Ant Quick Fix Support

The Oxygen XML Developer Quick Fix support helps you resolve missing target reference errors that may occur when developing Ant build documents.

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a Quick Fix is available for that particular error or warning, you can access the Quick Fix proposals with any of the following methods:

- When hovering over the error or warning, the proposals are presented in a tooltip popup window.
- If you place the cursor in the highlighted area where a validation error or warning occurs, a quick fix icon (💡) is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.
- With the cursor placed in the highlighted area of the error or warning, you can also invoke the quick fix menu by pressing **Alt 1 (Meta Alt 1 on OS X)** on your keyboard.

Oxygen XML Developer provides the following types of quick fixes for Ant build files:

- **Create new target** - Creates a new target with the specified name.
- **Change reference to "targetName"** - Corrects the reference to point to an already defined target.
- **Remove target reference** - Removes the erroneous reference.

Editing XML Schemas

An XML Schema describes the structure of an XML document and is used to validate XML document instances against it, to check that the XML instances conform to the specified requirements. If an XML instance conforms to the schema then it is said to be valid, otherwise it is invalid.

Two editing modes are provided for working with XML Schema:

- The **Text** editing mode.
- The visual **Design** editing mode.



Note: Oxygen XML Developer offers support for both XML schema 1.0 and 1.1.

Editing XML Schema in Design Editing Mode

This section explains how to use the graphical diagram editing mode for a W3C XML Schema.

Schema Editing Actions

You can edit an XML schema using drag and drop operations or contextual menu actions.

Drag and drop is the easiest way to move the existing components to other locations in an XML schema. For example, you can quickly insert an element reference in the diagram with a drag and drop from the **Outline** view to a compositor in the diagram. Also, the components order in an `xs:sequence` can be easily changed using drag and drop.

If this property has not been set, you can easily set the attribute/element type by dragging over it a simple type or complex type from the diagram. If the type property for a simple type or complex type is not already set, you can set it by dragging over it a simple or complex type.

Depending on the drop area, different actions are available:

- **move** - Context dependent, the selected component is moved to the destination.
- **reference** - Context dependent, the selected component is referenced from the parent.
- **copy** - If **(Ctrl (Meta on Mac OS))** key is pressed, a copy of the selected component is inserted to the destination.

Visual clues about the operation type are indicated by the mouse pointer shape:

-  - When moving a component.
-  - When referencing a component.

-  - When copying a component.

You can edit some schema components directly in the diagram. For these components, you can edit the name and the additional properties presented in the diagram by double clicking the value you want to edit. If you want to edit the name of a selected component, you can also press **(Enter)**. The list of properties which can be displayed for each component can be customized [in the Preferences](#).

When editing references, you can choose from a list of available components. Components from an imported schema for which the target namespace does not have an associated prefix is displayed in the list as `componentName#targetNamespace`. If the reference is from a target namespace which was not yet mapped, you are prompted to add prefix mappings for the inserted component namespace in the current edited schema.

You can also change the compositor by double-clicking it and choose the compositor you want from the proposals list.

There are some components that cannot be edited directly in the diagram: imports, includes, redefines. The editing action can be performed if you double-click or press **(Enter)** on an import/include/define component. An edit dialog box is displayed, allowing you to customize the directives.

Contextual Menu Actions in the Design Mode

The contextual menu of the **Design** mode includes the following actions:



Show Definition (**Ctrl Shift Enter**)

Shows the definition for the current selected component. For references, this action is available by clicking the arrow displayed in its bottom right corner.



Open Schema (**Ctrl Shift Enter**)

Opens the selected schema. This action is available for `xsd:import`, `xsd:include` and `xsd:redefine` elements. If the file you try to open does not exist, a warning message is displayed and you have the possibility to create the file.

Edit Attributes ()

Allows you to edit the attributes of the selected component in a small in-place editor that presents the same attributes as in the [Attributes View](#) and the [Facets View](#). The actions that can be performed on attributes in this dialog box are the same actions presented in the two views.

Append child

Offers a list of valid components, depending on the context, and appends your selection as a child of the currently selected component. You can set a name for a named component after it has been added in the diagram.

Insert before

Offers a list of valid components, depending on the context, and inserts your selection before the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

Insert after

Offers a list of valid components, depending on the context, and inserts your selection after the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

New global

Inserts a global component in the schema diagram. This action does not depend on the current context. If you choose to insert an import you have to specify the URL of the imported file, the target namespace and the import ID. The same information, excluding the target namespace, is requested for an `xsd:include` or `xsd:redefine` element.



Note: If the imported file has declared a target namespace, the field **Namespace** is completed automatically.

Edit Schema Namespaces

When performed on the schema root, it allows you to edit the schema target namespace and namespace mappings. You can also invoke the action by double-clicking the target namespace property from **Attributes** view for the schema or by double-clicking the schema component.

Edit Annotations

Allows you to edit the annotation for the selected schema component in the **Edit Annotations** dialog box. You can perform the following operations in the dialog box:

- **Edit all appinfo/documentation items for a specific annotation** - all appinfo/documentation items for a specific annotation are presented in a table and can be easily edited. Information about an annotation item includes: type (documentation/appinfo), content, source (optional, specify the source of the documentation/appinfo element) and `xml:lang`. The content of a documentation/appinfo item can be edited in the **Content** area below the table.
- **Insert/Insert before/Remove documentation/appinfo**. The **+** **Add** button allows you to insert a new annotation item (documentation/appinfo). You can add a new item before the item selected in table by pressing the **+** **Insert Before** button. Also, you can delete the selected item using the **X** **Remove** button.
- **Move items up/down** - to do this use the **↑** **Move up** and **↓** **Move down** buttons.
- **Insert/Insert before/Remove annotation** - available for components that allow multiple annotations like schemas or redefines.
- **Specify an ID for the component annotation**. the ID is optional.

Annotations are rendered by default under the graphical representation of the component. When you have a reference to a component with annotations, these annotations are presented in the diagram also below the reference component. The **Edit Annotations** action invoked from the contextual menu edit the annotations for the reference. If the reference component does not have annotations, you can edit the annotations of the referenced component by double-clicking the annotations area. Otherwise you can edit the referenced component annotations only if you go to the definition of the component.



Note: For imported/included components which do not belong to the currently edited schema, the **Edit Annotations** dialog box presents the annotation as read-only. To edit its annotation, open the schema where the component is defined.

Extract Global Element

Action that is available for local elements. A local element is made global and is replaced with a reference to the global element. The local element properties that are also valid for the global element declaration are kept.


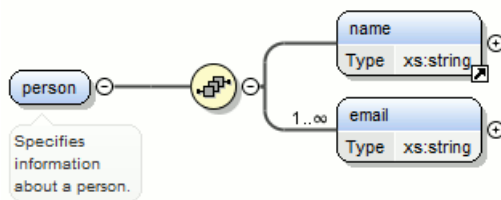


Figure 110: Extracting a Global Element

If you use the **Extract Global Element** action on a `name` element, the result is:

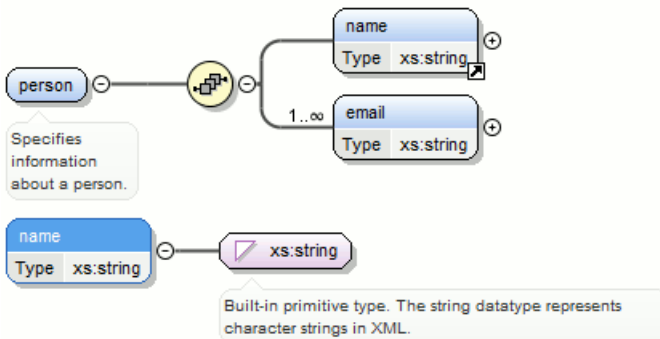

Extract Global Attribute

Action available for local attributes. A local attribute is made global and replaced with a reference to the global attribute. The properties of local attribute that are also valid in the global attribute declaration are kept.


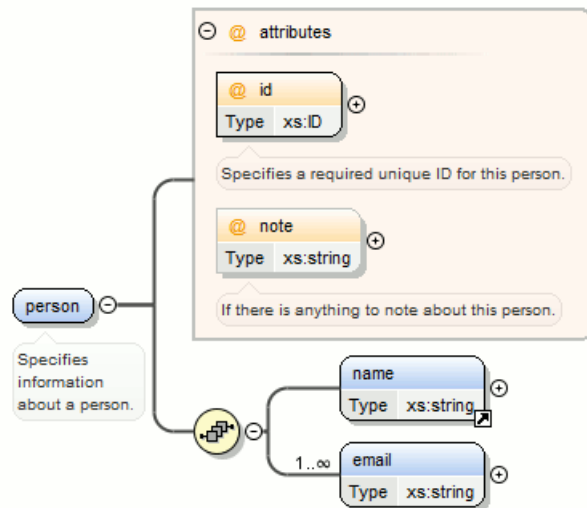



Figure 111: Extracting a Global Attribute

If you use the **Extract Global Attribute** action on a `note` attribute, the result is:

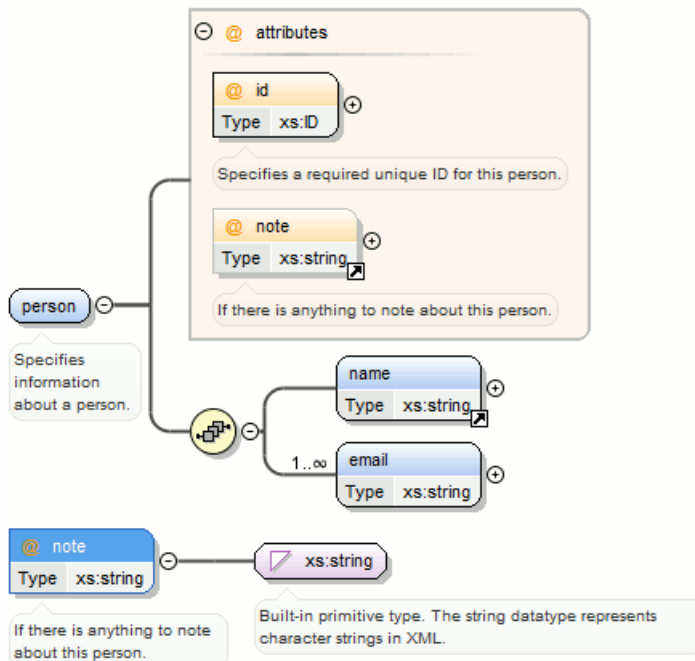

Extract Global Group

Action available for compositors (sequence, choice, all). This action extracts a global group and makes a reference to it. The action is enabled only if the parent of the compositor is not a group.

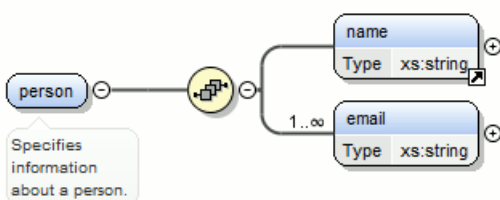

If you use the **Extract Global Group** action on the sequence element, the **Extract Global Component** dialog box is displayed and you can choose a name for the group. If you type `personGroup`, the result is:

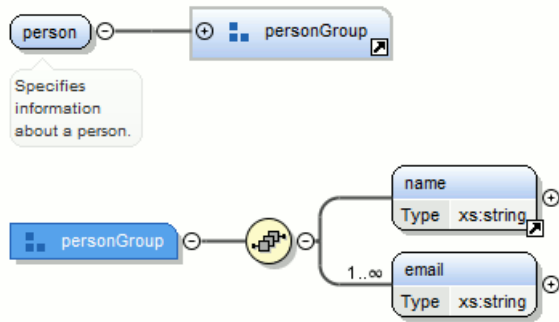


Figure 112: Extracting a Global Group

Extract Global Type

Action used to extract an anonymous simple type or an anonymous complex type as global. For anonymous complex types, the action is available on the parent element.

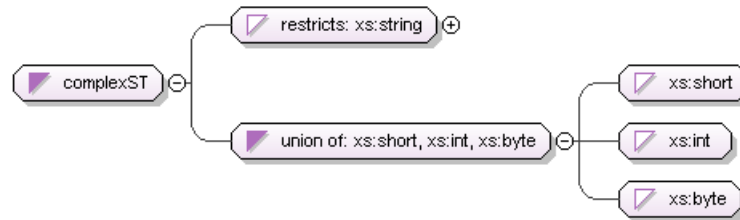


Figure 113: Extracting a Global Simple Type

If you use the action on the `union` component and choose `numericST` for the new global simple type name, the result is:


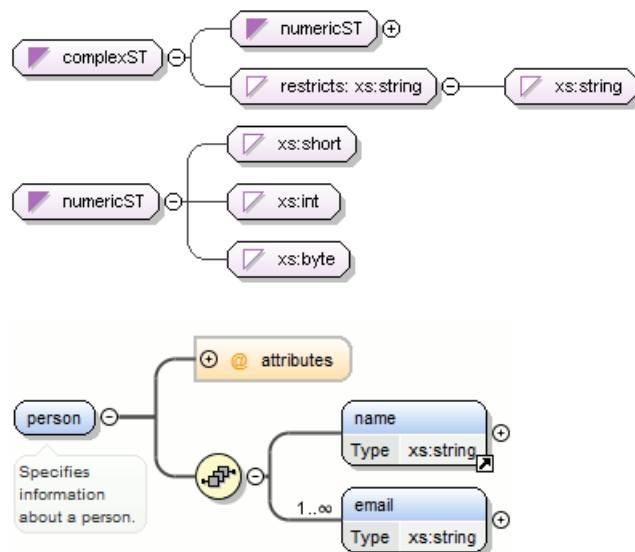


Figure 114: Extracting a Global Complex Type

If you use the action on a `person` element and choose `person_type` for the new complex type name, the result is:

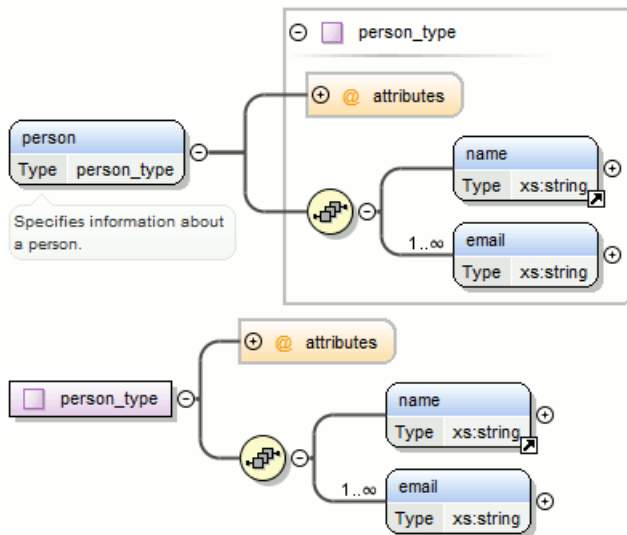

Rename Component in

Rename the selected component.

Cut Ctrl X (Meta X on OS X)

Cut the selected component(s).

Copy Ctrl C (Meta C on OS X)

Copy the selected component(s).

Copy XPath

This action copies an XPath expression that identifies the selected element or attribute in an instance XML document of the edited schema and places it in the clipboard.

Paste Ctrl V (Meta V on OS X)

Paste the component(s) from the clipboard as children of the selected component.

Paste as Reference

Create references to the copied component(s). If not possible a warning message is displayed.

Remove (Delete)

Remove the selected component(s).

Override component

Copies the overridden component in the current XML Schema. This option is available for *xs:override* components.

Redefine component

The referenced component is added in the current XML Schema. This option is available for *xs:redefine* components.

Optional

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `minOccurs` property is set to 0 and the `use` property for attributes is set to `optional`.

Unbounded

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `maxOccurs` property is set to `unbounded` and the `use` property for attributes is set to `required`.

Search

Can be performed on local elements or attributes. This action makes a reference to a global element or attribute.

Search References

Searches all references of the item found at current cursor position in the defined scope if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

Search Occurrences in File

Searches all occurrences of the item found at current cursor position in the current file.

 Component Dependencies

Allows you to see the dependencies for the current selected component.

Resource Hierarchy

Allows you to see the hierarchy for the current selected resource.

Flatten Schema

Recursively adds the components of included Schema files to the main one. It also flattens every imported XML Schema from the hierarchy.

Resource Dependencies

Allows you to see the dependencies for the current selected resource.

**Expand All**

Recursively expands all sub-components of the selected component.

**Collapse All**

Recursively collapses all sub-components of the selected component.

Save as Image

Save the diagram as image, in JPEG, BMP, SVG or PNG format.

**Generate Sample XML Files**

Generate XML files using the current opened schema. The selected component is the XML document root. See more in the [Generate Sample XML Files](#) section.


**Options**

Show the [Schema preferences panel](#).


XML Schema Components

A schema diagram contains a series of interconnected components. To quickly identify the relation between two connected components, the connection is represented as:


- A thick line to identify a connection with a required component (in the following image, `family` is a required element).

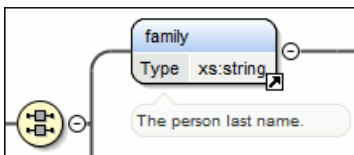

- A thin line to identify a connection with an optional component (in the following image, `email` is an optional element).



The following topics explain in detail all available components and their symbols as they appear in an XML schema diagram.

xs:schema


Target Namespace <http://www.oxygenxml.com/supported-grammars>

Defines the root element of a schema. A schema document contains representations for a collection of schema components, such as type definitions and element declarations, that have a common target namespace. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-schema>.

By default, it displays the *targetNamespace* property when rendered.

xs:schema properties

Property Name	Description	Possible Values
Target Namespace	The schema target namespace.	Any URI
Element Form Default	Determining whether local element declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Attribute Form Default	Determining whether local attribute declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Block Default	Default value of the <code>block</code> attribute of <code>xs:element</code> and <code>xs:complexType</code> .	#all, extension, restriction, substitution, restriction extension, restriction substitution, extension substitution, restriction extension substitution, [Empty].
Final Default	Default value of the <code>final</code> attribute of <code>xs:element</code> and <code>xs:complexType</code> .	#all, restriction, extension, restriction extension, [Empty].
Default Attributes	Specifies a set of attributes that apply to every complex Type in a schema document.	Any.
Xpath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
Version	Schema version	Any token.
ID	The schema id	Any ID.
Component	The edited component name.	Not editable property.
SystemID	The schema system id	Not editable property.

xs:element

Defines an element. An element declaration is an association of a name with a type definition, either simple or complex, an (optional) default value and a (possibly empty) set of identity-constraint definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-element>.

An element by default displays the following properties when rendered in the diagram: *default*, *fixed*, *abstract* and *type*. When referenced or declared locally, the element graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the element are drawn using dotted lines if the element is optional.

xs:element properties

Property Name	Description	Possible Values	Mentions
Name	The element name. Always required.	Any NCName for global or local elements, any QName for element references.	If missing, will be displayed as '[element]' in diagram.
Is Reference	When set, the local element is a reference to a global element.	true/false	Appears only for local elements.
Type	The element type.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].	For all elements. For references, the value is set in the referenced element.
Base Type	The extended/restricted base type.	All declared or built-in types	For elements with complex type, with simple or complex content.
Mixed	Defines if the complex type content model will be mixed.	true/false	For elements with complex type.
Content	The content of the complex type.	simple/complex	For elements with complex type which extends/restricts a base type. It is automatically detected.
Content Mixed	Defines if the complex content model will be mixed.	true/false	For elements with complex type which has a complex content.
Default	Default value of the element. A default value is automatically assigned to the element when no other value is specified.	Any string	The fixed and default attributes are mutually exclusive.
Fixed	A simple content element may be fixed to a specific value using this attribute. A fixed value is also automatically assigned to the element and you cannot specify another value.	Any string	The fixed and default attributes are mutually exclusive.
Min Occurs	Minimum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements
Max Occurs	Maximum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements

Property Name	Description	Possible Values	Mentions
Substitution Group	Qualified name of the head of the substitution group to which this element belongs.	All declared elements. For XML Schema 1.1 this property supports multiple values.	For global and reference elements
Abstract	Controls whether the element may be used directly in instance XML documents. When set to true, the element may still be used to define content models, but it must be substituted through a substitution group in the instance document.	true/false	For global elements and element references
Form	Defines if the element is "qualified" (i.e. belongs to the target namespace) or "unqualified" (i.e. doesn't belong to any namespace).	unqualified/qualified	Only for local elements
Nilable	When this attribute is set to true, the element can be declared as nil using an <code>xsi:nil</code> attribute in the instance documents.	true/false	For global elements and element references
Target Namespace	Specifies the target namespace for local element and attribute declarations. The namespace URI may be different from the schema target namespace. This property is available for local elements only.	Not editable property.	For all elements.
Block	Controls whether the element can be subject to a type or substitution group substitution. '#all' blocks any substitution, 'substitution' blocks any substitution through substitution groups and 'extension'/'restriction' block any substitution (both through <code>xsi:type</code> and substitution groups) by elements or types, derived respectively by extension or restriction from the type of the element. Its default value is defined by the <code>blockDefault</code> attribute of the parent <code>xs:schema</code> .	#all, restriction, extension,substitution, extension restriction, extension substitution, restriction substitution, restriction extension substitution	For global elements and element references

Property Name	Description	Possible Values	Mentions
Final	Controls whether the element can be used as the head of a substitution group for elements whose types are derived by extension or restriction from the type of the element. Its default value is defined by the <code>finalDefault</code> attribute of the parent <code>xs:schema</code> .	#all, restriction, extension, restriction extension, [Empty]	For global elements and element references
ID	The component id.	Any id	For all elements.
Component	The edited component name.	Not editable property.	For all elements.
Namespace	The component namespace.	Not editable property.	For all elements.
System ID	The component system id.	Not editable property.	For all elements.

xs:attribute


Defines an attribute. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attribute>.

An attribute by default displays the following properties when rendered in the diagram: *default*, *fixed*, *use* and *type*. Connectors to the attribute are drawn using dotted lines if the attribute use is optional. The attribute name is stroked out if prohibited.

xs:attribute properties

Property Name	Description	Possible Value	Mentions
Name	Attribute name. Always required.	Any NCName for global/local attributes, all declared attributes' QName for references.	For all local or global attributes. If missing, will be displayed as '[attribute]' in the diagram.
Is Reference	When set, the local attribute is a reference.	true/false	For local attributes.
Type	Qualified name of a simple type.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for creating anonymous simple types more easily.	For all attributes. For references, the type is set to the referenced attribute.
Default	Default value. When specified, an attribute is added by the schema processor (if it is missing from the instance XML document) and it is given this value. The default and	Any string	For all local or global attributes. For references the value is from the referenced attribute.

Property Name	Description	Possible Value	Mentions
Fixed	fixed attributes are mutually exclusive. When specified, the value of the attribute is fixed and must be equal to this value. The default and fixed attributes are mutually exclusive.	Any string	For all local or global attributes. For references the value is from the referenced attribute.
Use	Possible usage of the attribute. Marking an attribute "prohibited" is useful to exclude attributes during derivations by restriction.	optional, required, prohibited	For local attributes
Form	Specifies if the attribute is qualified (i.e. must have a namespace prefix in the instance XML document) or not. The default value for this attribute is specified by the <code>attributeFormDefault</code> attribute of the <code>xs:schema</code> document element.	unqualified/qualified	For local attributes.
Inheritable	Specifies if the attribute is inheritable. Inheritable attributes can be used by <code><alternative></code> element on descendant elements.	true/false	For all local or global attributes. The default value is false. This property is available for XML Schema 1.1.
Target Namespace	Specifies the target namespace for local attribute declarations. The namespace URI may be different from the schema target namespace.	Any URI	Setting a target namespace for local attribute is useful only when restricts attributes of a complex type that is declared in other schema with different target namespace. This property is available for XML Schema 1.1.
ID	The component id.	Any id	For all attributes.
Component	The edited component name.	Not editable property.	For all attributes.
Namespace	The component namespace.	Not editable property.	For all attributes.
System ID	The component system id.	Not editable property.	For all attributes.

xs:attributeGroup


The properties of an area.

Defines an attribute group to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attributeGroup>.

xs:attributeGroup properties

Property Name	Description	Possible Values	Mentions
Name	Attribute group name. Always required.	Any NCName for global attribute groups, all declared attribute groups for reference.	For all global or referenced attribute groups. If missing, will be displayed as '[attributeGroup]' in diagram.
ID	The component id.	Any id	For all attribute groups.
Component	The edited component name.	Not editable property.	For all attribute groups.
Namespace	The component namespace.	Not editable property.	For all attribute groups.
System ID	The component system id.	Not editable property.	For all attribute groups.

xs:complexType



Defines a top level complex type. Complex Type Definitions provide for: See more data at <http://www.w3.org/TR/xmlschema11-1/#element-complexType>.

- Constraining element information items by providing Attribute Declarations governing the appearance and content of attributes.
- Constraining element information item children to be empty, or to conform to a specified element-only or mixed content model, or else constraining the character information item children to conform to a specified simple type definition.
- Using the mechanisms of Type Definition Hierarchy to derive a complex type from another simple or complex type.
- Specifying post-schema-validation info: contributions for elements.
- Limiting the ability to derive additional types from a given complex type.
- Controlling the permission to substitute, in an instance, elements of a derived type for elements declared in a content model to be of a given complex type.




Tip: A complex type which is a base type to another type will be rendered with yellow background.

xs:complexType properties

Property Name	Description	Possible Values	Mentions
Name	The name of the complex type. Always required.	Any NCName	Only for global complex types. If missing, will be displayed as '[complexType]' in diagram.
Base Type Definition	The name of the extended/restricted types.	Any from the declared simple or complex types.	For complex types with simple or complex content.
Derivation Method	The derivation method.	restriction/ extension	Only when base type is set. If the base type is a simple type, the derivation method is always extension.
Content	The content of the complex type.	simple/ complex	For complex types which extend/restrict a base type. It is automatically detected.
Content Mixed	Specifies if the complex content model will be mixed.	true/false	For complex contents.
Mixed	Specifies if the complex type content model will be mixed.	true/false	For global and anonymous complex types.

Property Name	Description	Possible Values	Mentions
Abstract	When set to <code>true</code> , this complex type cannot be used directly in the instance documents and needs to be substituted using an <code>xsi:type</code> attribute.	true/false	For global and anonymous complex types.
Block	Controls whether a substitution (either through a <code>xsi:type</code> or substitution groups) can be performed for a complex type, which is an extension or a restriction of the current complex type. This attribute can only block such substitutions (it cannot "unblock" them), which can also be blocked in the element definition. The default value is defined by the <code>blockDefault</code> attribute of <code>xs:schema</code> .	all, extension, restriction, extension restriction, [Empty]	For global complex types.
Final	Controls whether the complex type can be further derived by extension or restriction to create new complex types.	all, extension, restriction, extension restriction, [Empty]	For global complex types.
Default Attributes Apply	The schema element can carry a <code>defaultAttributes</code> attribute, which identifies an attribute group. Each <code>complexType</code> defined in the schema document then automatically includes that attribute group, unless this is overridden by the <code>defaultAttributesApply</code> attribute on the <code>complexType</code> element.	true/false	This property is available only for XML Schema 1.1.
ID	The component id.	Any id	For all complex types.
Component	The edited component name.	Not editable property.	For all complex types.
Namespace	The component namespace.	Not editable property.	For all complex types.
System ID	The component system id.	Not editable property.	For all complex types.

xs:simpleType



The person name.

Defines a simple type. A simple type definition is a set of constraints on strings and information about the values they encode, applicable to the normalized value of an attribute information item or of an element information item with no

element children. Informally, it applies to the values of attributes and the text-only content of elements. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-simpleType>.



Tip: A simple type which is a base type to another type will be rendered with yellow background.

xs:simpleType properties

Name	Description	Possible Values	Scope
Name	Simple type name. Always required.	Any NCName.	Only for global simple types. If missing, will be displayed as '[simpleType]' in diagram.
Derivation	The simple type category: restriction, list or union.	restriction,list or union	For all simple types.
Base Type	A simple type definition component. Required if derivation method is set to restriction.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to restriction.
Item Type	A simple type definition component. Required if derivation method is set to list.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to list. Derivation by list is the process of transforming a simple datatype (named the item type) into a whitespace-separated list of values from this datatype. The item type can be defined inline by adding a simpleType definition as a child element of the list element, or by reference, using the itemType attribute (it is an error to use both).
Member Types	Category for grouping union members.	Not editable property.	For global and anonymous simple types with the derivation method set to union.
Member	A simple type definition component. Required if derivation method is set to union.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to union. Deriving a simple datatype by union merges the lexical spaces of several simple datatypes (called member types) to create a new simple datatype. The member types can be defined either by reference (through the memberTypes attribute) or embedded as simple


Name	Description	Possible Values	Scope
Final	Blocks any further derivations of this datatype (by list, union, derivation or all).	#all, list, restriction, union, list restriction, list union, restriction union. In addition, [Empty] proposal is present for set empty string as value.	datatype local definitions in the xs:union element. Both styles can be mixed. Only for global simple types.
ID	The component id.	Any id.	For all simple types
Component	The name of the edited component.	Not editable property.	Only for global and local simple types
Namespace	The component namespace.	Not editable property.	For global simple types.
System ID	The component system id.	Not editable property.	Not present for built-in simple types..

xs:alternative

The *type alternatives* mechanism allows you to specify type substitutions on an element declaration.



Note: `xs:alternative` is available for XML Schema 1.1.



xs:alternative properties

Name	Description	Possible Values
Type	Specifies type substitutions for an element, depending on the value of the attributes.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	Specifies the type of XML schema component.	Not editable property.

Name	Description	Possible Values
System ID	Points to the document location of the schema.	Not editable property.

xs:group

Defines a group of elements to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-group>.

When referenced, the graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the group are drawn using dotted lines if the group is optional.

xs:group properties

Property Name	Description	Possible Values	Mentions
Name	The group name. Always required.	Any NCName for global groups, all declared groups for reference.	If missing, will be displayed as '[group]' in diagram.
Min Occurs	Minimum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
Max Occurs	Maximum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
ID	The component id.	Any id	For all groups.
Component	The edited component name.	Not editable property.	For all groups.
Namespace	The component namespace.	Not editable property	For all groups.
System ID	The component system id.	Not editable property.	For all groups.

xs:include

Adds multiple schemas with the same target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-include>.

xs:include properties


Property Name	Description	Possible Values
Schema Location	Included schema location.	Any URI
ID	Include ID.	Any ID
Component	The component name.	Not editable property.

xs:import

Adds multiple schemas with different target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-import>.

xs:import properties

Property Name	Description	Possible Values
Schema Location	Imported schema location	Any URI
Namespace	Imported schema namespace	Any URI
ID	Import ID	Any ID
Component	The component name	Not editable property.

xs:redefine

Redefines simple and complex types, groups, and attribute groups from an external schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-redefine>.

xs:redefine properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID
Component	The component name.	Not editable property.

xs:override

The override construct allows replacements of old components with new ones without any constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-override>.

xs:override properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID

xs:notation

Describes the format of non-XML data within an XML document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-notation>.

xs:notation properties

Property Name	Description	Possible values	Mentions
Name	The notation name. Always required.	Any NCName.	If missing, will be displayed as '[notation]' in diagram.
System Identifier	The notation system identifier.	Any URI	Required if public identifier is absent, otherwise optional.
Public Identifier	The notation public identifier.	A Public ID value	Required if system identifier is absent, otherwise optional.
ID	The component id.	Any ID	For all notations.
Component	The edited component name.	Not editable property.	For all notations.

Property Name	Description	Possible values	Mentions
Namespace	The component namespace.	Not editable property.	For all notations.
System ID	The component system id.	Not editable property.	For all notations.

xs:sequence, xs:choice, xs:all



Figure 115: An xs:sequence in diagram

xs:sequence specifies that the child elements must appear in a sequence. Each child element can occur from 0 to any number of times. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-sequence>.



Figure 116: An xs:choice in diagram

xs:choice allows only one of the elements contained in the declaration to be present within the containing element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-choice>.



Figure 117: An xs:all in diagram

xs:all specifies that the child elements can appear in any order. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-all>.

The compositor graphical representation also contains the value for the **minOccurs** and **maxOccurs** properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the compositor are drawn using dotted lines if the compositor is optional.

xs:sequence, xs:choice, xs:all properties

Property Name	Description	Possible Values	Mentions
Compositor	Compositor type.	sequence, choice, all.	'all' is only available as a child of a group or complex type.
Min Occurs	Minimum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
Max Occurs	Maximum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
ID	The component id.	Any ID	For all compositors.
Component	The edited component name.	Not editable property.	For all compositors.
System ID	The component system id.	Not editable property.	For all compositors.

xs:any




Enables the author to extend the XML document with elements not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-any>.

The graphical representation also contains the value for the `minOccurs` and `maxOccurs` properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the wildcard are drawn using dotted lines if the wildcard is optional.

xs:any properties

Property Name	Description	Possible Values
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
notNamespace	Specifies the namespace that extension elements or attributes cannot come from.	##local, ##targetNamespace
notQName	Specifies an element or attribute that is not allowed.	##defined
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
Min Occurs	Minimum occurrences of any	A numeric positive value. Default is 1.
Max Occurs	Maximum occurrences of any	A numeric positive value. Default is 1.
ID	The component id.	Any ID.
Component	The name of the edited component.	Not editable property.
System ID	The component system id.	Not editable property.

xs:anyAttribute




Enables the author to extend the XML document with attributes not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-anyAttribute>.

xs:anyAttribute properties

Property Name	Description	Possible Value
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
ID	The component id.	Any ID.


Property Name	Description	Possible Value
Component	The name of the edited component.	Not editable property.
System ID	The component system id.	Not editable property.

xs:unique

Defines that an element or an attribute value must be unique within the scope. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-unique>.

xs:unique properties


Property Name	Description	Possible Values
Name	The unique name. Always required.	Any NCName.
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system id.	Not editable property.

xs:key

Specifies an attribute or element value as a key (unique, non-nullable and always present) within the containing element in an instance document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-key>.

xs:key properties

Property Name	Description	Possible Value
Name	The key name. Always required.	Any NCName.
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system id.	Not editable property.


xs:keyRef

Specifies that an attribute or element value corresponds to that of the specified key or unique element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-keyref>.

A keyref by default displays the *Referenced Key* property when rendered.

xs:keyRef properties

Property Name	Description	Possible Values
Name	The keyref name. Always required.	Any NCName.
Referenced Key	The name of referenced key.	any declared element constraints.
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system id.	Not editable property.

xs:selector

Specifies an XPath expression that selects a set of elements for an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-selector>.

xs:selector properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the element on which the constraint applies.	An XPath expression.
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system id.	Not editable property.

xs:field

Specifies an XPath expression that specifies the value used to define an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-field>.

xs:field properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the field(s) composing the key, key reference, or unique constraint.	An XPath expression.


Property Name	Description	Possible Values
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system id.	Not editable property.

xs:assert

Assertions provide a flexible way to control the occurrence and values of elements and attributes available in an XML Schema.



Note: `xs:assert` is available for XML Schema 1.1.



xs:assert properties

Property Name	Description	Possible Values
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system id.	Not editable property.

xs:openContent

The `openContent` element enables instance documents to contain extension elements interleaved among the elements declared by the schema. You can declare open content for your elements at one place - within the `complexType` definition, or at the schema level.

For further details about the `openContent` component, go to <http://www.w3.org/TR/xmlschema11-1/#element-openContent>.

xs:openContent properties

Property Name	Description	Possible Value
Mode	Specifies where the extension elements can be inserted.	The value can be: "interleave", "suffix" or "none". The default value is "interleave".
ID	The component id.	Any ID.
Component	The edited component name.	Not editable property.

Property Name	Description	Possible Value
System ID	The component system id.	Not editable property.




Note: This component is available for XML Schema 1.1 only. To change the version of the XML Schema, open the [Preferences dialog box](#) and go to **XML > XML Parser > XML Schema**.

Constructs Used to Group Schema Components

This section explains the components that can be used for grouping other schema components:

- [Attributes](#)
- [Constraints](#)
- [Substitutions](#)

Attributes




Groups all attributes and attribute groups belonging to a complex type.

Attributes properties

Property Name	Description	Possible Values
Component	The element for which the attributes are displayed.	Not editable property.
System ID	The component system id.	Not editable property.

Constraints




Groups all constraints ([xs:key](#), [xs:keyRef](#) or [xs:unique](#)) belonging to an element.

Attributes properties

Property Name	Description	Possible Values
Component	The element for which the constraints are displayed.	Not editable property.
System ID	The component system id.	Not editable property.

Substitutions

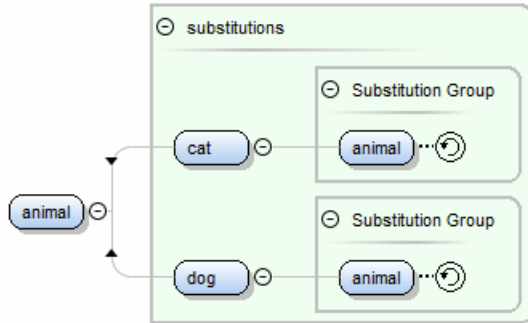

Groups all elements which can substitute the current element.

Attributes properties

Property Name	Description	Possible Values
Component	The element for which the substitutions are displayed.	Not editable property.
System ID	The component system id.	Not editable property.

Schema Validation

Validation for the **Design** mode is seamlessly integrated in the Oxygen XML Developer [XML documents validation](#) capability.

Figure 118: XML Schema Validation

A schema validation error is presented by highlighting the invalid component:

- In the [Attributes View](#).
- In the diagram by surrounding the component that has the error with a red border.
- A marker on the errors stripe at the right of the diagram view.
- A status label with a red icon (❗) below the diagram view.

Invalid facets for a component are highlighted in the [Facets View](#).

Components with invalid properties are rendered with a red border. This is a default color, but you can customize it in the [Document checking user preferences](#). When hovering an invalid component, the tooltip will present the validation errors associated with that component.

When editing a value which is supposed to be a qualified or unqualified XML name, the application provides automatic validation of the entered value. This proves to be very useful in avoiding setting invalid XML names for the given property.

If you validate the entire schema using the  **Validate** action from the **Document > Validate** menu or from the  **Validation** toolbar drop-down menu, all validation errors will be presented in the **Errors** tab. To resolve an error, just click it (or double-click for errors located in other schemas) and the corresponding schema component will be displayed as the diagram root so that you can easily correct the error.

 **Important:** If the schema imports only the namespace of other schema without specifying the schema location and a [catalog is set-up](#) that maps the namespace to a certain location both the validation and the diagram will correctly identify the imported schema.

 **Tip:** If the validation action finds that the schema contains unresolved references, the application will suggest the use of validation scenarios, but only if the current edited schema is a XML Schema module.

Edit Schema Namespaces

You can use the **XML Schema Namespaces** dialog box to easily set a target namespace and define namespace mappings for a newly created XML Schema. In the **Design** mode these namespaces can be modified anytime by choosing **Edit Schema Namespaces** from the contextual menu. Also you can do that by double-clicking the schema root in the diagram.

The **XML Schema Namespaces** dialog box allows you to edit the following information:

- **Target namespace** - The target namespace of the schema.
- **Prefixes** - The dialog box displays a table with namespaces and the mapped prefixes. You can add a new prefix mapping or remove an already existing one.

Editing XML Schema in Text Editing Mode

This page is used for editing the XML Schema in a text mode. It offers powerful content completion support, a synchronized Outline view, and multiple [refactoring actions](#). The Outline view has two display modes: the [standard outline](#) mode and the [components](#) mode.

A diagram of the XML Schema can be presented side by side with the text. To activate the diagram presentation, enable the *Show Full Model XML Schema diagram* check box from the [Diagram](#) preferences page.

Content Completion in XML Schema

The intelligent **Content Completion Assistant** available in Oxygen XML Developer enables rapid, in-line identification and insertion of elements, attributes and attribute values valid in the editing context. All available proposals are listed in a pop-up menu displayed at the current cursor position.

The **Content Completion Assistant** is enabled by default. To disable it, [open the Preferences dialog box](#) and go to **Editor > Content Completion**. It is activated:

- Automatically, after a configurable delay from the last key press of the < character. You can adjust the delay [from the Content Completion preferences page](#).
- On demand, by pressing **Ctrl Space (Command Space on OS X)** on a partial element or attribute name.



Note: If the Content Completion list contains only one valid proposal, when you press the **Ctrl Space (Command Space on OS X)** shortcut key, the proposal is automatically inserted.



Note: You can also start the **Content Completion Assistant** from **Document > Content Completion > Start Content Completion**.

When active, it displays a list of context-sensitive proposals valid at the current cursor position. Elements are selected in the list using the Up and Down cursor keys on your keyboard. For each selected item in the list, the **Content Completion Assistant** displays a documentation window. You can customize the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected content, do one of the following:

- Press Enter or Tab key on your keyboard to insert both the start and end tags. The cursor is positioned inside the start tag, in a position suitable for inserting attributes.
- Press **Ctrl Enter (Meta Enter on OS X)** on your keyboard. Oxygen XML Developer inserts both the start and end tags and positions the cursor between the tags, so you can start typing content.

Depending on the [selected schema version](#), Oxygen XML Developer populates the proposals list with information taken either from XML Schema 1.0 or 1.1.

Oxygen XML Developer helps you to easily reference a component by providing the list of proposals (complex types, simple types, elements, attributes, groups, attribute groups, or notations) valid in the current context. The components are collected from the current file or from the imported/included schemas.

When editing `xs:annotation`/`xs:appinfo` elements of an XML Schema, the Content Completion Assistant proposes elements and attributes from a custom schema (by default ISO Schematron). This feature can be configured from the [XSD Content Completion](#) preferences page.

References to XML Schema Specification

[The same as in editing XML documents](#), the message of an error obtained by validation of an XML Schema document includes a reference to the W3C specification for XML Schema. An error message contains an *Info* field that will open the browser on the "XML Schema Part 1: Structures" specification at exactly the point where the error is described thus allowing you to understand the reason for that error.

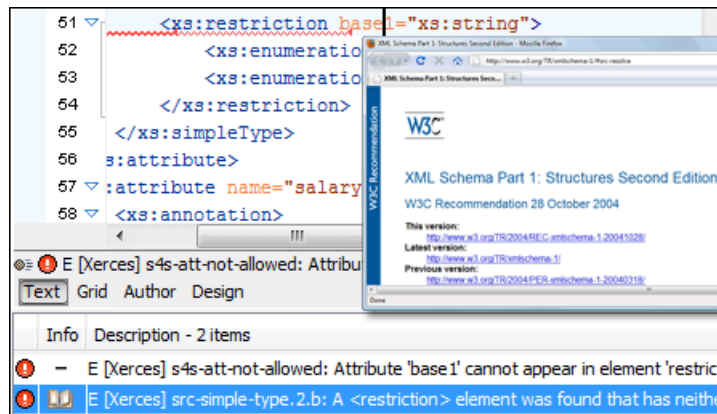


Figure 119: Link to Specification for XML Schema Errors

Validation of an XML Schema containing a type definition with a `minOccurs` or `maxOccurs` attribute having a value larger than 256 limits the value to 256 and issues a warning about this restriction in the Message panel at the bottom of the Oxygen XML Developer window. Otherwise, for large values of the `minOccurs` and `maxOccurs` attributes the validator fails with an *OutOfMemory* error which practically makes Oxygen XML Developer unusable without a restart of the entire application.



Important:

If the schema imports only a namespace without specifying the schema location and a [catalog is set-up](#) mapping the namespace to a certain location both validation and the schema components outline will correctly identify the imported schema.

Highlight Component Occurrences

When a component (for example types, elements, attributes) is found at current cursor position, Oxygen XML Developer performs a search over the entire document to find the component declaration and all its references. When found, they are highlighted both in the document and in the stripe bar, at the right side of the document. Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected and a new search is performed. All occurrences are removed when you start to edit the document.

This feature is on by default. To configure it, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**. A search can also be triggered with the **Search > Search Occurrences in File ()** contextual menu action. All matches are displayed in a separate tab of the **Results** view.

Editing XML Schema in the Master Files Context

Smaller interrelated modules that define a complex XML Schema cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, an element defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main XML document either using the [master files support from the Project view](#), or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger schema structure.
- **Content Completion Assistant** displays all the referable components valid in the current context. This includes components defined in modules other than the currently edited one.
- The **Outline** displays the components collected from the entire schema structure.

Searching and Refactoring Actions in XML Schemas

Search Actions

The following search actions can be applied on `attribute`, `attributeGroup`, `element`, `group`, `key`, `unique`, `keyref`, `notation`, `simple`, or `complexType` types and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when you define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Show Definition** - Moves the cursor to the definition of the referenced XML Schema item.



Note: You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on `attribute`, `attributeGroup`, `element`, `group`, `key`, `unique`, `keyref`, `notation`, `simple`, or `complex` types and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename *component_type*** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

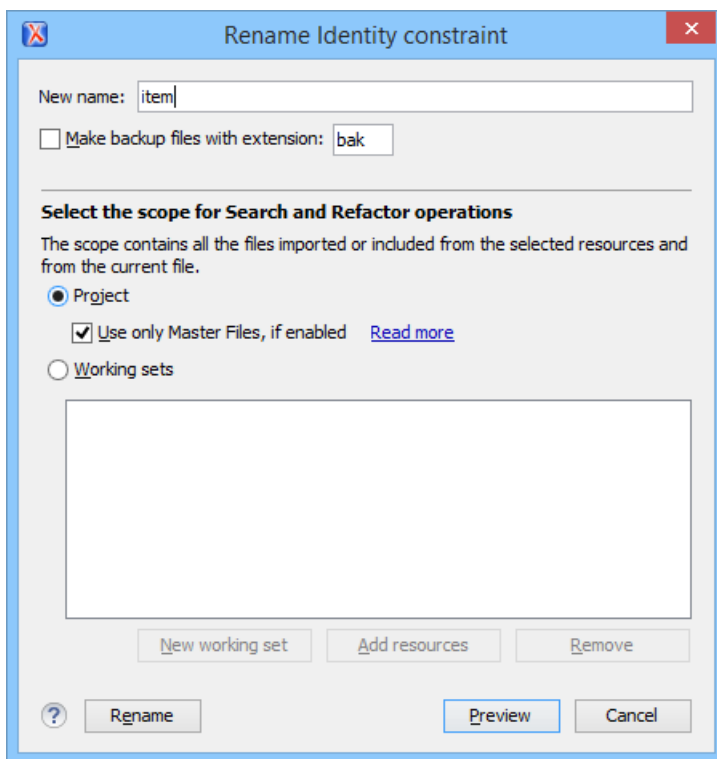


Figure 120: Rename Identity Constraint Dialog Box

XML Schema Outline View

The **Outline** view for XML Schema presents all the global components grouped by their location, namespace, or type. If hidden, you can open it from **Window > Show View > Outline**.

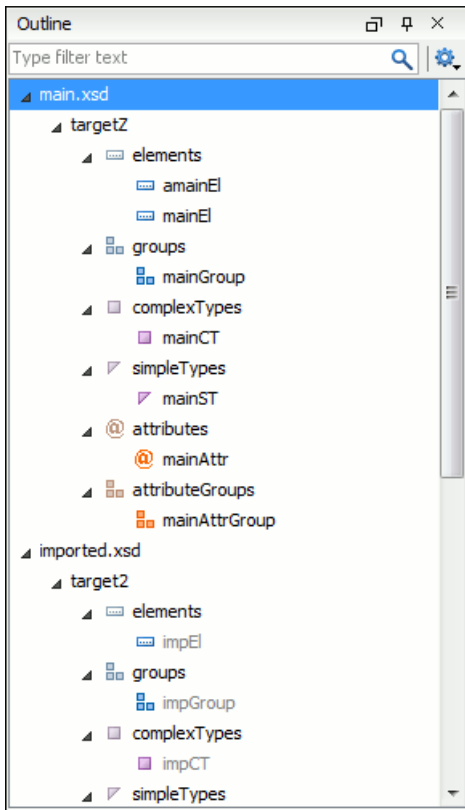


Figure 121: The Outline View for XML Schema

The **Outline** view provides the following options in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;



Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram is also selected in the **Outline** view.



Sort

Allows you to sort alphabetically the schema components.

Show all components

Displays all components that were collected starting from the main files. Components that are not referable from the current file are marked with an orange underline. To reference them, add an import directive with the component's namespace.

Show referable components

Displays all components (collected starting from the main files) that can be referenced from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

These three operations allow you to group the components by location, namespace, or type. When grouping by namespace, the main schema target namespace is the first presented in the **Outline** view.

The following contextual menu actions are available in the **Outline** view:

Remove (Delete)

Removes the selected item from the diagram.

**Search References (Ctrl (Meta on Mac OS)+Shift+R)**

Searches all references of the item found at current cursor position in the defined scope, if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

**Component Dependencies (Ctrl (Meta on Mac OS)+Shift+F4)**

Allows you to see the dependencies for the current selected component.

Resource Hierarchy (F4)

Allows you to see the hierarchy for the current selected resource.

Resource Dependencies (Shift + F4)

Allows you to see the dependencies for the current selected resource.

**Rename Component in**

Renames the selected component.

**Generate Sample XML Files**

Generate XML files using the current opened schema. The selected component is the XML document root.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search will be searched as a partial match (like *textToFind*).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Component Dependencies View for XML Schema

The **Component Dependencies** view allows you to spot the dependencies for the selected component of an XML Schema, a [Relax NG schema](#), a [NVDL schema](#) or an [XSLT stylesheet](#). You can open the view from **Window > Show View > Component Dependencies**.

If you want to see the dependencies of a schema component:

- Select the desired schema component in the editor.
- Choose the **Component Dependencies** action from the contextual menu.

The action is available for all named components (for example elements or attributes).

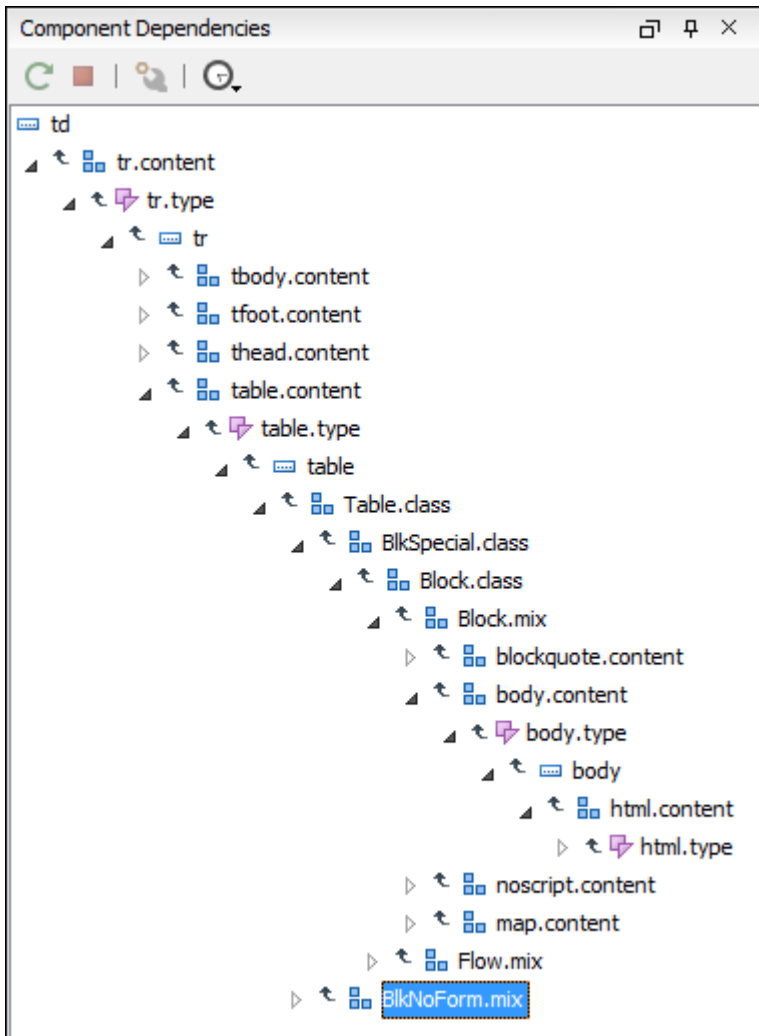


Figure 122: Component Dependencies View - Hierarchy for xhtml11.xsd

In the **Component Dependencies** view the following actions are available in the toolbar:

-  **Refresh**
Refreshes the dependencies structure.
-  **Stop**
Stop the dependencies computing.
-  **Configure**
Allows you to configure a search scope to compute the dependencies structure.
-  **History**
Contains a list of previously executed dependencies computations.

The contextual menu contains the following actions:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.



Tip: If a component contains multiple references to another components, a small table is displayed that contains all these references. When a recursive reference is encountered, it is marked with a special icon

XML Schema Quick Assist Support

The *Quick Assist* support improves the development work flow, offering fast access to the most commonly used actions when you edit XML Schema documents.

The *Quick Assist* feature is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb help marker placed on the cursor line, in the line number stripe on the left side of the editor. Also, you can invoke the quick assist menu by using the **Alt + 1** keys (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

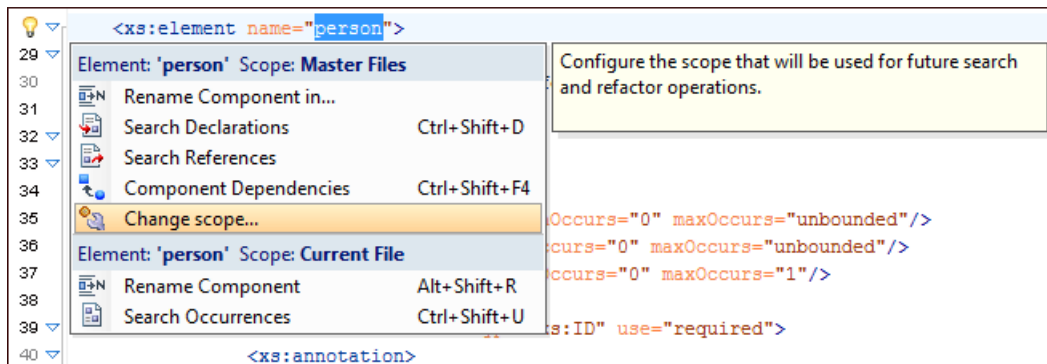


Figure 123: Quick Assist Support

The quick assist support offers direct access to the following actions:



Rename Component in

Renames the component and all its dependencies.



Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.



Search References

Searches all references of the component in a predefined scope.



Component Dependencies

Searches the component dependencies in a predefined scope.



Change Scope

Configures the scope that will be used for future search or refactor operations.



Rename Component

Allows you to rename the current component in-place.



Search Occurrences

Searches all occurrences of the component within the current file.

To watch our video demonstration about improving schema development using the **Quick Assist** action set, go to http://oxygenxml.com/demo/Quick_Assist.html.

XML Schema Resource Hierarchy / Dependencies View

The **Resource Hierarchy / Dependencies** view allows you to easily see the hierarchy / dependencies for an XML Schema, a *Relax NG schema* or an *XSLT stylesheet*. To open this view, go to **Window > Show View > Resource Hierarchy / Dependencies**.

The **Resource Hierarchy / Dependencies** is useful when you want to start from an XML Schema (XSD) file and build and review the hierarchy of all the other XSD files that are imported, included or redefined in the given XSD file. The view is also able to build the tree structure, that is the structure of all other XSD files that import, include or redefine the given XSD file. The scope of the search is configurable (the current project, a set of local folders, etc.)

The build process for the hierarchy view is started with the **Resource Hierarchy** action available on the contextual menu of the editor panel.

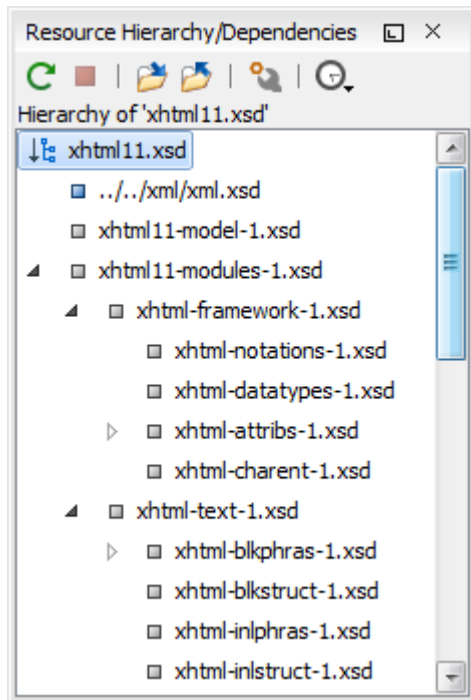


Figure 124: Resource Hierarchy/Dependencies View - Hierarchy for xhtml11.xsd

The build process for the dependencies view is started with the **Resource Dependencies** action available on the contextual menu.

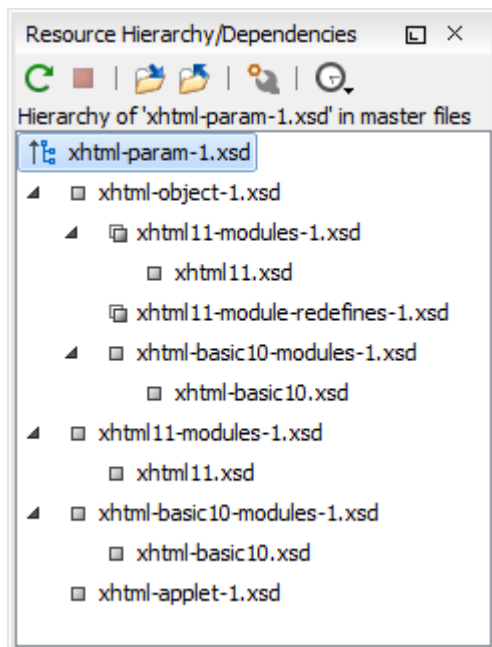


Figure 125: Resource Hierarchy/Dependencies View - Dependencies for xhtml-param-1.xsd

The following actions are available in the **Resource Hierarchy/Dependencies** view:



Refresh

Refreshes the Hierarchy/Dependencies structure.



Stop

Stops the hierarchy/dependencies computing.



Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.



Show Dependencies

Allows you to choose a resource to compute the dependencies structure.



Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.



History

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .



Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Moving/Renaming XML Schema Resources

You are able to move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Generate Sample XML Files

Oxygen XML Developer offers support to generate sample XML files both from XML schema 1.0 and XML schema 1.1, depending on the XML schema version set in **Preferences**.


To generate sample XML files from an XML Schema, use the  **Generate Sample XML Files** action from the **Tools** menu. This action is also available in the contextual menu of the schema *Design mode*.

The **Generate Sample XML Files** dialog box contains the following tabs:

- *Schema*
- *Options*
- *Advanced*

To watch our video demonstration about generating sample XML files, go to http://oxygenxml.com/demo/Generate_Sample_XML_Files.html.

The Schema Tab

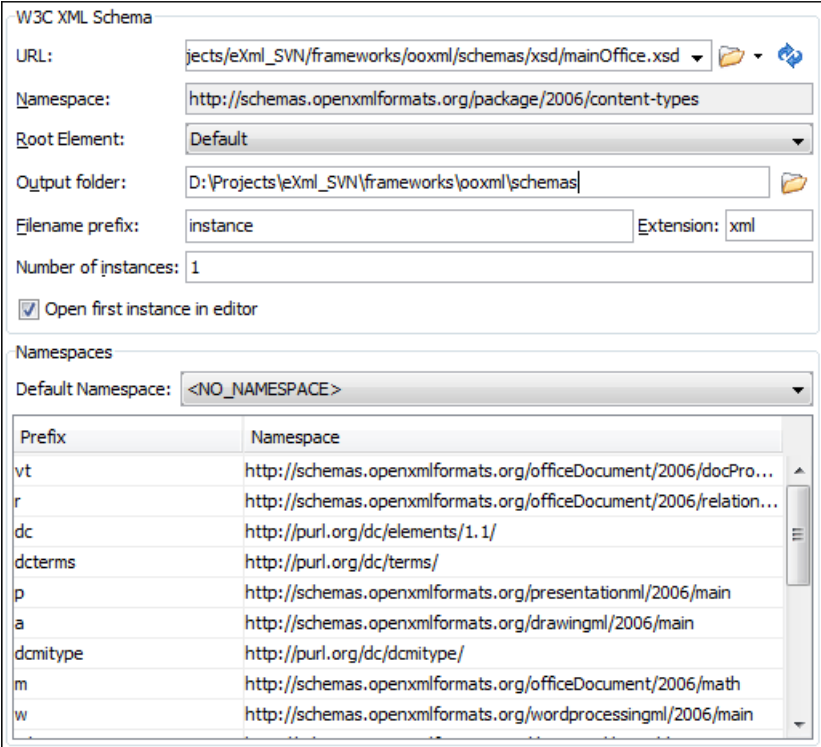

W3C XML Schema

URL:

Namespace:

Root Element:

Output folder:

Filename prefix: Extension:

Number of instances:

☒ Open first instance in editor

Namespaces

Default Namespace:

Prefix	Namespace
vt	http://schemas.openxmlformats.org/officeDocument/2006/docPro...
r	http://schemas.openxmlformats.org/officeDocument/2006/relation...
dc	http://purl.org/dc/elements/1.1/
dcterms	http://purl.org/dc/terms/
p	http://schemas.openxmlformats.org/presentationml/2006/main
a	http://schemas.openxmlformats.org/drawingml/2006/main
dcmitype	http://purl.org/dc/dcmitype/
m	http://schemas.openxmlformats.org/officeDocument/2006/math
w	http://schemas.openxmlformats.org/wordprocessingml/2006/main

Figure 126: The Generate Sample XML Files Dialog Box

Complete the dialog box as follows:

- **URL** - Schema location as an URL. A history of the last used URLs is available in the drop-down box.
- **Namespace** - Displays the namespace of the selected schema.
- **Document root** - After the schema is selected, this drop-down box is populated with all root candidates gathered from the schema. Choose the root of the output XML documents.
- **Output folder** - Path to the folder where the generated XML instances will be saved.
- **Filename prefix and Extension** - Generated file names have the following format: `prefixN.extension`, where N represents an incremental number from 0 up to *Number of instances* - 1.
- **Number of instances** - The number of XML files to be generated.
- **Open first instance in editor** - When checked, the first generated XML file is opened in editor.
- **Namespaces** - Here you can specify the default namespace as well as the proxies (prefixes) for namespaces.
- **Load settings / Export settings** - The current settings can be saved for further usage with the **Export settings** button, and reloaded when necessary with the **Load settings** button.

The Options Tab

The **Options** tab allows you to set specific options for different namespaces and elements.

Namespace	Element
<ANY>	<ANY>

Add Edit Remove

Settings **Element values** Attribute values

Namespace: <ANY>
Element: <ANY>

☒ Generate optional elements
☒ Generate optional attributes

Values of elements and attributes: Default (ignore restrictions) ⓘ

Preferred number of repetitions: 2 ⓘ

Maximum recursivity level: 1 ⓘ

"Choice" and "Substitution Group"

Choice strategy: Random ⓘ

☐ Generate the other options as comments ⓘ

Figure 127: The Generate Sample XML Files Dialog Box

- **Namespace / Element table** - Allows you to set a namespace for each element name that appears in an XML document instance. The following prefix-to-namespace associations are available:
 - All elements from all namespaces (<ANY> - <ANY>). This is the default setting and can be customized from the [XML Instances Generator](#) preferences page.
 - All elements from a specific namespace.
 - A specific element from a specific namespace.
- **Settings**
 - **Generate optional elements** - When checked, all elements are generated, including the optional ones (having the `minOccurs` attribute set to 0 in the schema).

- **Generate optional attributes** - When checked, all attributes are generated, including the optional ones (having the `use` attribute set to `optional` in the schema.)
- **Values of elements and attributes** - Controls the content of generated attribute and element values. Several choices are available:
 - **None** - No content is inserted.
 - **Default** - Inserts a default value depending of data type descriptor of the particular element or attribute. The default value can be either the data type name or an incremental name of the attribute or element (according to the global option from the **XML Instances Generator** preferences page). Note that type restrictions are ignored when this option is enabled. For example, if an element is of a type that restricts an **xs:string** with the **xs:maxLength** facet in order to allow strings with a maximum length of 3, the XML instance generator tool may generate string element values longer than 3 characters.
 - **Random** - Inserts a random value depending of data type descriptor of the particular element or attribute.



Important:

If all of the following are true, the **XML Instances Generator** outputs invalid values:

- At least one of the restrictions is a **regex**.
- The value generated after applying the **regex** does not match the restrictions imposed by one of the facets.

This limitation leads to attributes or elements with values set to *Invalid*.

- **Preferred number of repetitions** - Allows you to set the preferred number of repeating elements related with `minOccurs` and `maxOccurs` facets defined in XML Schema.
 - If the value set here is between `minOccurs` and `maxOccurs`, then that value is used.
 - If the value set here is less than `minOccurs`, then the `minOccurs` value is used.
 - If the value set here is greater than `maxOccurs`, then `maxOccurs` is used.
- **Maximum recursion level** - If a recursion is found, this option controls the maximum allowed depth of the same element.
- **Choice strategy** - Option used for `xs:choice` or `substitutionGroup` elements. The possible strategies are:
 - **First** - The first branch of `xs:choice` or the head element of `substitutionGroup` is always used.
 - **Random** - A random branch of `xs:choice` or a substitute element or the head element of a `substitutionGroup` is used.
- **Generate the other options as comments** - Option to generate the other possible choices or substitutions (for `xs:choice` and `substitutionGroup`). These alternatives are generated inside comments groups so you can uncomment and use them later. Use this option with care (for example on a restricted namespace and element) as it may generate large result files.
- **Load settings / Export settings** - The current settings can be saved for further usage with the **Export settings** button, and reloaded when necessary with the **Load settings** button.
- **Element values** - The **Element values** tab allows you to add values that are used to generate the elements content. If there are more than one value, then the values are used in a random order.
- **Attribute values** - The **Attribute values** tab allows you to add values that are used to generate the attributes content. If there are more than one value, then the values are used in a random order.

The Advanced Tab

Strings and values	
☒ Use incremental attribute/element names as default	
Maximum length	30
Performance	
Discard optional elements after nested level	6

Figure 128: Advanced Tab

This tab allows you to set advanced options that controls the output values of elements and attributes.

- **Use incremental attribute / element names as default** - If checked, the value of an element or attribute starts with the name of that element or attribute. For example, for an **a** element the generated values are: **a1**, **a2**, **a3**, and so on. If not checked, the value is the name of the type of that element / attribute (for example: **string**, **decimal**, etc.)
- **Maximum length** - The maximum length of string values generated for elements and attributes.
- **Discard optional elements after nested level** - The optional elements that exceed the specified nested level are discarded. This option is useful for limiting deeply nested element definitions that can quickly result in very large XML documents.

Running the Generate Sample XML Files Action from Command Line

The **Generate Sample XML Files** tool can be also used from command line by running the script called `xmlGenerator.bat` (on Windows) / `xmlGenerator.sh` (on Mac OS X / Unix / Linux) located in the Oxygen XML Developer installation folder. The parameters can be set once in the dialog box, exported to an XML file on disk with the button **Export settings** and reused from command line. With the exported settings file you can generate the same XML instances from the command line as from the dialog box:

```
xmlGenerator.bat path_of_CFG_file
```

The script can be integrated in an external batch process launched from the command line. The command line parameter of the script is the relative path to the exported XML settings file. The files specified with relative paths in the exported XML settings will be made absolute relative to the folder where the script is run.

The following example shows such an XML configuration file:

XML Configuration File

```
<settings>
  <schemaSystemId>http://www.w3.org/2001/XMLSchema.xsd</schemaSystemId>
  <documentRoot>schema</documentRoot>
  <outputFolder>D:\projects\output</outputFolder>
  <filenamePrefix>instance</filenamePrefix>
  <filenameExtension>xml</filenameExtension>
  <noOfInstances>1</noOfInstances>
  <openFirstInstance>true</openFirstInstance>
  <defaultNamespace>&lt;NO_NAMESPACE</defaultNamespace>
  <element namespace="&lt;ANY" name="&lt;ANY">
    <generateOptionalElements>false</generateOptionalElements>
    <generateOptionalAttributes>false</generateOptionalAttributes>
    <valuesForContentType>DEFAULT</valuesForContentType>
    <preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
    <maximumRecursivityLevel>1</maximumRecursivityLevel>
    <choicesAndSubstitutions strategy="RANDOM"
      generateOthersAsComments="false"/>
    <attribute namespace="&lt;ANY"
      name="&lt;ANY">
      <attributeValue>attrValue1</attributeValue>
      <attributeValue>attrValue2</attributeValue>
    </attribute>
  </element>
  <element namespace="&lt;NO_NAMESPACE"
    name="&lt;ANY">
    <generateOptionalElements>true</generateOptionalElements>
    <generateOptionalAttributes>true</generateOptionalAttributes>
    <valuesForContentType>DEFAULT</valuesForContentType>
```

```

<preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
<maximumRecursivityLevel>1</maximumRecursivityLevel>
<choicesAndSubstitutions strategy="RANDOM"
  generateOthersAsComments="true"/>
<elementValue>value1</elementValue>
<elementValue>value2</elementValue>
<attribute namespace="&lt;ANY>"
  name="&lt;ANY>">
  <attributeValue>attrValue1</attributeValue>
  <attributeValue>attrValue2</attributeValue>
</attribute>
</element>
</settings>

```

Generating Documentation for an XML Schema

Oxygen XML Developer can generate detailed documentation for the components of an XML Schema in HTML, PDF, DocBook, or other custom formats. You can select the components and the level of detail. The components are hyperlinked in both HTML and DocBook documents.

 **Note:** You can generate documentation for both XML Schema version 1.0 and 1.1.

To generate documentation for an XML Schema document, select **XML Schema Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project** view.

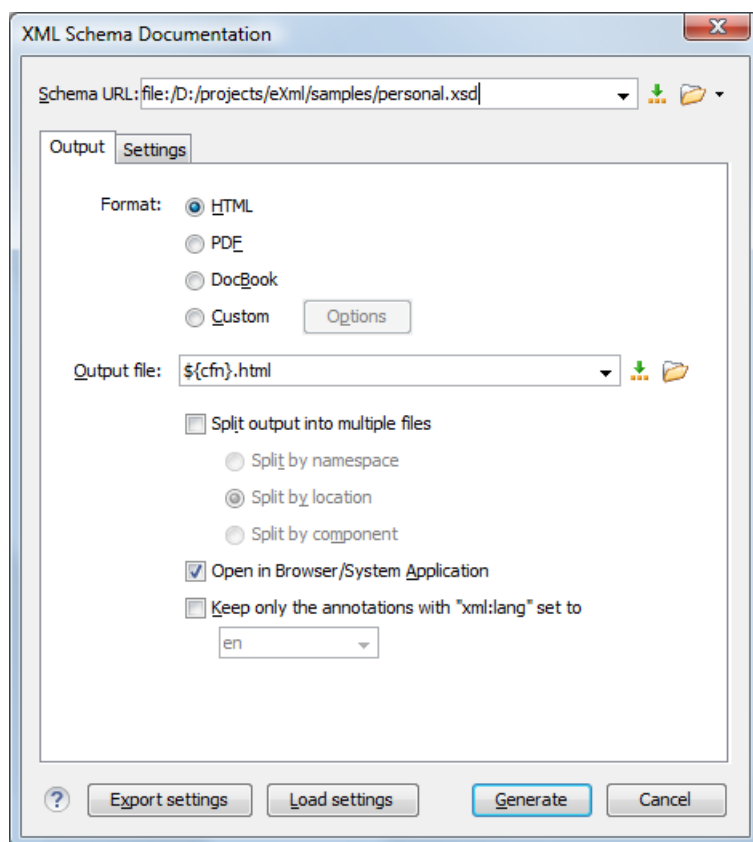


Figure 129: The XML Schema Documentation Dialog Box

The **Schema URL** field of the dialog box must contain the full path to the XML Schema (XSD) file for which you want to generate documentation. The schema may be a local or a remote file. You can specify the path to the schema by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.

The Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in [HTML output format](#).
 - **PDF** - The documentation is generated in [PDF output format](#).
 - **DocBook** - The documentation is generated in [DocBook output format](#).
 - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.

 **Note:** To set the browser or system application that will be used, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.
- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

The Settings Tab

When you generate documentation for an XML schema you can choose what components to include in the output and the details to be included in the documentation.

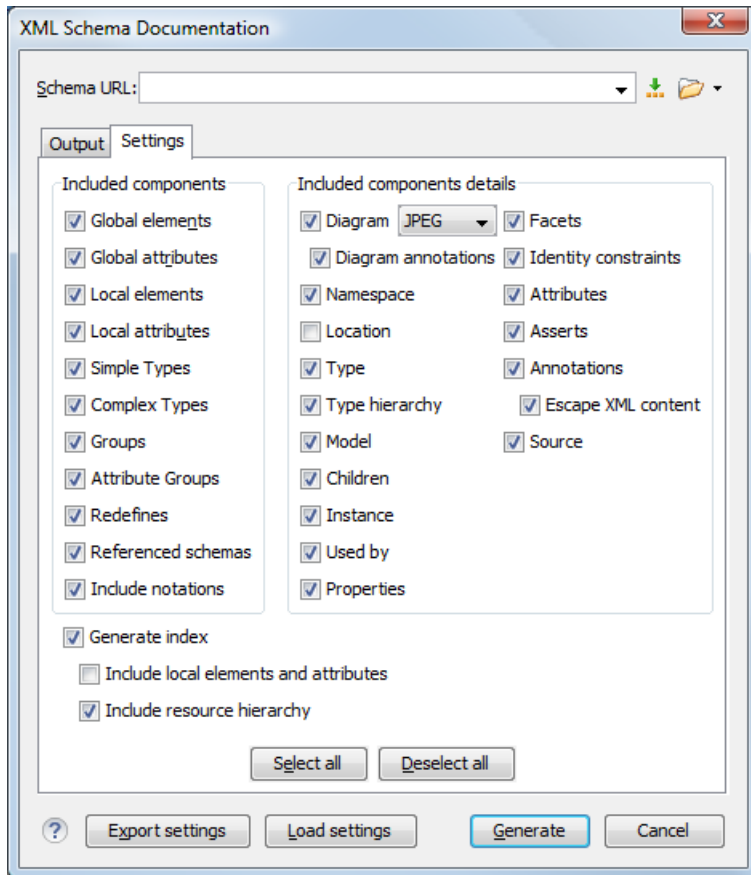


Figure 130: The Settings Tab of the XML Schema Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following components: **Global elements**, **Global attributes**, **Local elements**, **Local attributes**, **Simple Types**, **Complex Types**, **Groups**, **Attribute Groups**, **Redefines**, **Referenced schemas**, **Include notations**.

You can choose whether or not to include the following other details:

- **Diagram** - Displays the diagram for each component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section. The generated diagrams are dependent on the options from the [Schema Design Properties](#) page.
 - **Diagram annotations** - This option controls whether the annotations of the components presented in the diagram sections are included.
- **Namespace** - Displays the namespace for each component.
- **Location** - Displays the schema location for each component.
- **Type** - Displays the component type if it is not an anonymous one.
- **Type hierarchy** - Displays the types hierarchy.
- **Model** - Displays the model (sequence, choice, all) presented in BNF form. Different separator characters are used depending on the information item used:
 - `xs:all` - its children will be separated by space characters.
 - `xs:sequence` - its children will be separated by comma characters.
 - `xs:choice` - its children will be separated by | characters.
- **Children** - Displays the list of component's children.
- **Instance** - Displays an XML instance generated based on each schema element.
- **Used by** - Displays the list of all the components that reference the current one. The list is sorted by component type and name.

- **Properties** - Displays some of the component's properties.
- **Facets** - Displays the facets for each simple type
- **Identity constraints** - Displays the identity constraints for each element. For each constraint there are presented the name, type (unique, key, keyref), reference attribute, selector and field(s).
- **Attributes** - Displays the attributes for the component. For each attribute there are presented the name, type, fixed or default value, usage and annotation.
- **Asserts** - Displays the **assert** elements defined in a complex type. The test, XPath default namespace, and annotation are presented for each assert.
- **Annotations** - Displays the annotations for the component. If you choose **Escape XML Content**, the XML tags are present in the annotations.
- **Source** - Displays the text schema source for each component.
- **Generate index** - Displays an index with the components included in the documentation.
 - **Include local elements and attributes** - If checked, local elements and attributes are included in the documentation index.
 - **Include resource hierarchy** - Specifies whether the resource hierarchy for an XML Schema documentation is generated.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command line interface](#).)

Load settings - Reloads the settings from the exported file.

Generate - Use this button to generate the XML Schema documentation.

Output Formats for Generating XML Schema Documentation

XML Schema documentation can be generated in HTML, PDF, DocBook, or a custom format. You can choose the format from the [Schema Documentation](#) dialog box. For the PDF and DocBook formats, the option to split the output in multiple files is not available.

HTML Output Format

The XML Schema documentation generated in HTML format contains images corresponding to the same schema definitions as the ones displayed by [the schema diagram editor](#). These images are divided in clickable areas that are linked to the definitions of the names of types or elements. The documentation of a definition includes a **Used By** section with links to the other definitions that reference it. If the **Escape XML Content** option is unchecked, the HTML or XHTML tags used inside the `xs:documentation` elements of the input XML Schema for formatting the documentation text (for example `<b>`, `<i>`, `<u>`, `<ul>`, `<li>`, etc.) are rendered in the generated HTML documentation.

The generated images format is **PNG**. The image of an XML Schema component contains the graphical representation of that component as it is rendered in [the Schema Diagram panel of the Oxygen XML Developer XSD editor panel](#).

Table of Contents

Group by:
Location

personal.xsd

Elements
email
family
given
link
name
person
personnel
uri

Notations
gif

XML Schema documentation generated by
oXygen® XML Editor.

Element name

Namespace: No namespace

Annotations: Name, Annotation

Diagram

Properties: Content, complex

Used by: Element, person

Model: ALL(family given)

Children: family, given

Instance

Source

Showing:

☒ Annotations
☒ Attributes
☒ Diagrams
☒ Facets
☒ Identity Constraints
☒ Instances
☒ Model
☒ Properties
☒ Source
☒ Used by

Close

name

Name Annotation

family

Type: xs:string

Family Annotation

given

Type: xs:string

```
<name>  
<family>{1,1}</family>  
<given>{1,1}</given>  
</name>  
  
<xs:element name="name">  
  <xs:annotation>  
    <xs:documentation>Name</xs:documentation>  
    <xs:documentation>Annotation</xs:documentation>  
  </xs:annotation>  
  <xs:complexType>  
    <xs:all>  
      <xs:element ref="family"/>  
      <xs:element ref="given"/>  
    </xs:all>  
  </xs:complexType>  
</xs:element>
```

Figure 131: XML Schema Documentation Example

The generated documentation includes a table of contents. You can group the contents by namespace, location, or component type. After the table of contents there is some information about the main, imported, included, and redefined schemas. This information contains the schema target namespace, schema properties (attribute form default, element form default, version), and schema location.

Namespace: No namespace

Properties: Attribute Form Default: unqualified, Element Form Default: unqualified

Schema location: file:/D:/personal.xsd

Figure 132: Information About a Schema

If you choose to split the output into multiple files, the table of contents is displayed in the left frame. The contents are grouped in the same mode. If you split the output by location, each file contains a schema description and the components that you have chosen to include. If you split the output by namespace, each file contains information about schemas from that namespace and the list with all included components. If you choose to split the output by component, each file contains information about a schema component.

After the documentation is generated, you can collapse or expand details for some schema components by using the **Showing** options or the ☐ **Collapse** or ☐ **Expand** buttons.

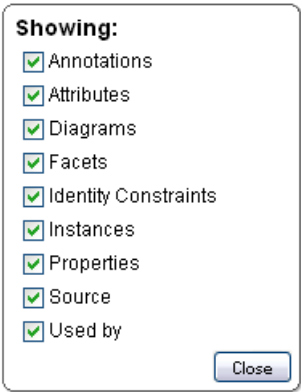


Figure 133: The Showing Options

For each component included in the documentation, the section presents the component type follow by the component name. For local elements and attributes, the name of the component is specified as *parent name/component name*. You can easily go to the parent documentation by clicking the parent name.


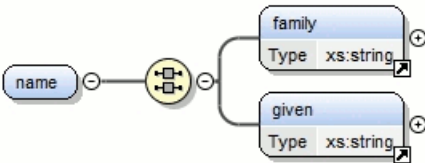
Namespace	No namespace	
Annotations	Specifies the person family and given name.	
Diagram		
Properties	Content	complex
Used by	Element	person
Model	ALL(family given)	
Children	family, given	
Instance	<pre><name> <family>{1,1}</family> <given>{1,1}</given> </name></pre>	
Source	<pre><xs:element name="name"> <xs:annotation> <xs:documentation>Specifies the person family and given name.</xs:documentation> </xs:annotation> <xs:complexType> <xs:all> <xs:element ref="family"/> <xs:element ref="given"/> </xs:all> </xs:complexType> </xs:element></pre>	

Figure 134: Documentation for a Schema Component

If the schema contains imported or included modules, their dependencies tree is generated in the documentation.

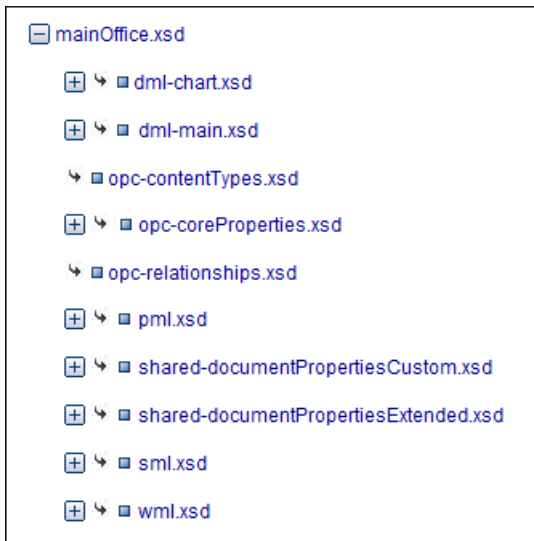

PDF Output Format

For the PDF output format, the documentation is generated in DocBook format and a transformation using the FOP processor is applied to obtain the PDF file. To configure the FOP processor, see the [FO Processors](#) preferences page.

For information about customizing the PDF output, see the [Customizing the PDF Output of Generated XML Schema Documentation](#) on page 288 topic.

DocBook Output Format

If you generate the documentation in DocBook output format, the documentation is generated as a DocBook XML file. You can then apply a predefined transformation scenario (such as, *DocBook PDF* or *DocBook HTML*) on the output file, or configure your own transformation scenario for it to convert it into whatever format you desire.

Custom Output Format

For the custom format, you can specify a stylesheet to transform the intermediary XML file generated in the documentation process. You have to edit your stylesheet based on the schema `xsdDocSchema.xsd` from `[OXYGEN_DIR]/frameworks/schema_documentation`. You can create a custom format starting from one of the stylesheets used in the predefined HTML, PDF, and DocBook formats. These stylesheets are available in `[OXYGEN_DIR]/frameworks/schema_documentation/xsl`.

When using a custom format you can also copy additional resources into the output folder and choose to keep the intermediate XML files created during the documentation process.

Customizing the PDF Output of Generated XML Schema Documentation

To customize the PDF output of the generated XML Schema documentation, use the following procedure:

1. Customize the `[OXYGEN_DIR]/frameworks/schema_documentation/xsl/xsdDocDocbook.xsl` stylesheet to include the content that you want to add in the PDF output. Add the content in the XSLT template with the `match="schemaDoc"` attribute between the `info` and `xsl:apply-templates` elements, as commented in the following example:

```
<info>
  <pubdate><xsl:value-of select="format-date(current-date(), '[Mn] [D], [Y]', 'en', (), ())"/></pubdate>
</info>
<!-- Add the XSLT template content with the match="schemaDoc" attribute here -->
<xsl:apply-templates select="schemaHierarchy"/>
```



Note: The content that you insert here has to be wrapped in DocBook markup. For details about working with DocBook see the following video demonstration:

http://www.oxygenxml.com/demo/DocBook_Editing_in_Author.html.

2. Create an intermediary file that holds the content of your XML Schema documentation.

- a. Go to **Tools > Generate Documentation > XML Schema Documentation**.
- b. Select **Custom** for the output format and click the **Options** button.
- c. In the **Custom format options** dialog box, do the following:
 - a. Enter the customized stylesheet in the **Custom XSL** field ([OXYGEN_DIR]/frameworks/schema_documentation/xsl/xsdDocDocbook.xsl).
 - b. Enable the **Copy additional resources to the output folder** option, and leave the default selection in the **Resources** field.
 - c. Click **OK**.
- d. When you return to the **XML Schema Documentation** dialog box, just press the **Generate** button to generate a DocBook XML file with an intermediary form of the Schema documentation.

3. Create the final PDF document.

- a. Use the  **Configure Transformation Scenario(s)** action from the toolbar or the **Document > Transformation** menu, click **New**, and select **XML transformation with XSLT**.
- b. In the **New Scenario** dialog box, go to the **XSL URL** field and choose the [OXYGEN_DIR]/frameworks/docbook/oxygen/xsdDocDocbookCustomizationFO.xsl file.
- c. Go to the **FO Processor** tab and enable the **Perform FO Processing** and **XSLT result as input** options.
- d. Go to the **Output** tab and select the directory where you want to store the XML Schema documentation output and click **OK**.
- e. Click **Apply Associated**.



Tip: If you want your modifications to be permanent so that you can simply select the PDF output format in the **XML Schema Documentation** dialog box, rather than configuring a custom format each time you generate this documentation, follow this procedure:

1. Create a JAR or ZIP file that includes the modified stylesheet (customized in step 1 above), placed in the following directory structure:
builtin/documentation/schema_documentation/xsdDocDocbook.xsl.
2. Create a new directory named `endorsed` inside the [OXYGEN_DIR]/lib directory and place the created JAR or ZIP file inside it.
3. Restart Oxygen XML Developer and the PDF output format will now use your customized stylesheet.

Generating XML Schema Documentation From the Command-Line Interface

You can export the settings of the *XML Schema Documentation dialog box* to an XML file by pressing the **Export settings** button. With the exported configuration file, you can generate the same documentation from the command-line interface by running the following script:

- `schemaDocumentation.bat` on Windows.
- `schemaDocumentation.sh` on OS X / Unix / Linux.

The script is located in the Oxygen XML Developer installation folder. The script can be integrated in an external batch process launched from the command-line interface. The script accepts a variety of command line arguments that allow you to configure the documentation.

The accepted syntax and arguments are as follows:

```
schemaDocumentation schemaFile [ [-cfg:configFile] | [ [-out:outputFile]
[-format:<value>] [-xsl:<xslFile>] [-split:<value>] [-openInBrowser:<value>] ] |
--help | -help | --h | -h ]
```

schemaFile

The XML Schema file.

-cfg:configfile

The exported configuration file. It contains the output file, output format options, split method, and some advanced options regarding the included components and components details. If an external configuration file is specified, all other supplied arguments except for the XML Schema file will be ignored.

-out:outputFile

The file where the generated documentation will be saved. By default, it is the name of the schema file with an *html* extension.

-format:<value>

The output format type used when generating the documentation. Possible values are as follows:

- **html** - To generate documentation in HTML format.
- **pdf** - To generate documentation in PDF format.
- **docbook** - To generate documentation in DocBook format.
- **custom** - To generate documentation in a custom format.

-xsl:<xslFile>

The XSL file to be applied on the intermediate XML format. If there is no XSL file provided, the result will be in the HTML format.

-split:<value>

The split method used when generating the documentation. Splitting is recommended for large schemas. Possible values are as follows:

- **none** (default value) - To generate one single output file.
- **namespace** - To generate an output file for every namespace in the schema.
- **component** - To generate an output file for every component in the schema.
- **location** - To generate an output file for every schema location.

-openInBrowser:<value>

Opens the result of the transformation in a browser or system application. Possible values are **true** or **false** (default value).

--help | -help | --h | -h

Displays the available options.

Example of the script in a Windows command line:

```
schemaDocumentation example.xsd -out:schemaDocumentation.html -format:custom -xsl:example.xsl
-split:namespace
```

Convert Database Structure to XML Schema

Oxygen XML Developer includes a tool that allows you to create an XML Schema from the structure of a database. To convert a database structure to an XML Schema, use the following procedure:

1. Select the **Convert DB Structure to XML Schema** action from the **Tools** menu.
The **Convert DB Structure to XML Schema** dialog box is opened and your current database connections are displayed in the **Connections** section.
2. If the database source is not listed, click the **Configure Database Sources** button to open the [Data Sources preferences page](#) where you can configure data sources and connections.
3. In the **Format for generated schema** section, select one of the following formats:
 - **Flat schema** - A flat structure that resembles a tree-like view of the database without references to elements.
 - **Hierarchical schema** - Display the table dependencies visually, in a type of tree view where dependent tables are shown as indented child elements in the content model. Select this option if you want to configure the database columns of the tables to be converted.

4. Click **Connect**

The database structure is listed in the **Select database tables** section according to the format you chose.

5. Select the database tables that you want to be included in the XML Schema.

6. If you selected **Hierarchical schema** for the format, you can configure the database columns.

a) Select the database column you want to configure.

b) In the **Criterion** section you can choose to convert the selected database column as an **Element**, **Attribute**, or to be **Skipped** in the resulting XML Schema.

c) You can also change the name of the selected database column by changing it in the **Name** text field.

7. Click **Generate XML Schema**.

The database structure is converted to an XML Schema and it is opened for viewing and editing.

Flatten an XML Schema

You can organize an XML schema on several levels linked by `xs:include` and `xs:import` statements. In some cases, working on such a schema as on a single file is more convenient.

The **Flatten Schema** operation allows you to flatten an entire hierarchy of XML schemas. Starting with the main XML schema, Oxygen XML Developer calculates its hierarchy by processing the `xs:include` and `xs:import` statements. This action is available from the contextual menu of the editor or from the **Tools** menu.

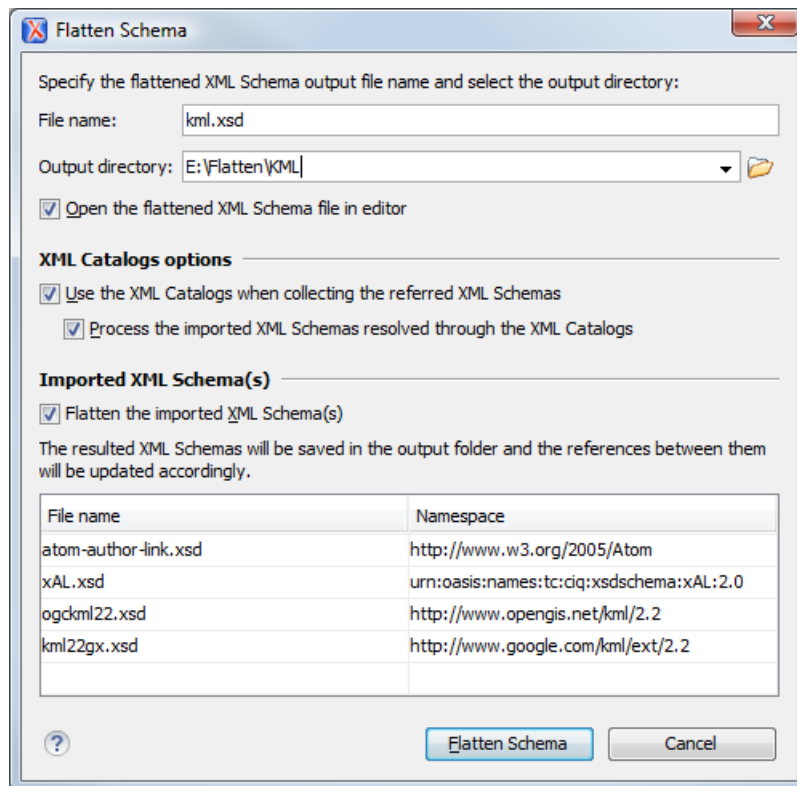


Figure 135: Flatten Schema Dialog Box

For the main schema file and for each imported schema, a new flattened schema is generated in the output folder. These schemas have the same name as the original ones.



Note: If necessary, the operation renames the resulted schemas to avoid duplicated file names.



Note: You can choose the output folder and the name of each generated schema file.

A flattened XML schema is obtained by recursively adding the components of the included schemas into the main one. This means Oxygen XML Developer replaces the `xs:include`, `xs:redefine`, and `xs:override` elements with the ones coming from the included files.

The following options are available in the **Flatten Schema** dialog box:

- **Open the flattened XML Schema file in editor** - opens the main flattened schema in the editing area after the operation completes
- **Use the XML Catalogs when collecting the referenced XML Schemas** - enables resolving the imported and included schemas through the available XML Catalogs;



Note: Changing this option triggers the recalculation of the dependencies graph for the main schema.

- **Process the imported XML Schemas resolved through the XML Catalogs** - specifies whether the imported schemas that were resolved through an XML Catalog are flattened
- **Flatten the imported XML Schema(s)** - specifies whether the imported schemas are flattened.



Note: For the schemas skipped by the flatten operation, no files are created in the output folder and the corresponding import statements remain unchanged.

To flatten a schema from the command line, use the following command:

- `flattenSchema.bat` on Windows
- `sh flattenSchemaMac.sh` on OS X
- `sh flattenSchema.sh` on Unix/Linux

The command line accepts the following parameters:

- `-in:inputSchemaURL` - the input schema URL
- `-outDir:outputDirectory` - the directory where the flattened schemas should be saved
- `-flattenImports:<boolean_value>` - controls if the imported XML Schemas should be flattened or not. The default value `true`
- `-useCatalogs:<boolean_value>` - controls if the references to other XML Schemas should be resolved through the available XML Catalogs. The default value `false`
- `-flattenCatalogResolvedImports:<boolean_value>` - controls if the imported schemas that were resolved through the XML Catalogs should be flattened or not



Note: This option is used only when `-useCatalogs` is set to `true`. The default value is `true`.

- `-verbose` - provides information about the current flatten XML Schema operation
- `--help` | `-help` | `--h` | `-h` - prints the available parameters for the operation

Command Line Example for Windows

```
flattenSchema.bat -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```

Command Line Example for OS X

```
sh flattenSchemaMac.sh -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```


Command Line Example for Unix/Linux

```
sh flattenSchema.sh -in:http://www.w3.org/Markup/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```

XML Schema Regular Expressions Builder

The XML Schema regular expressions builder allows testing regular expressions on a fragment of text as they are applied to an XML instance document. Start the tool from the **Tools** menu.

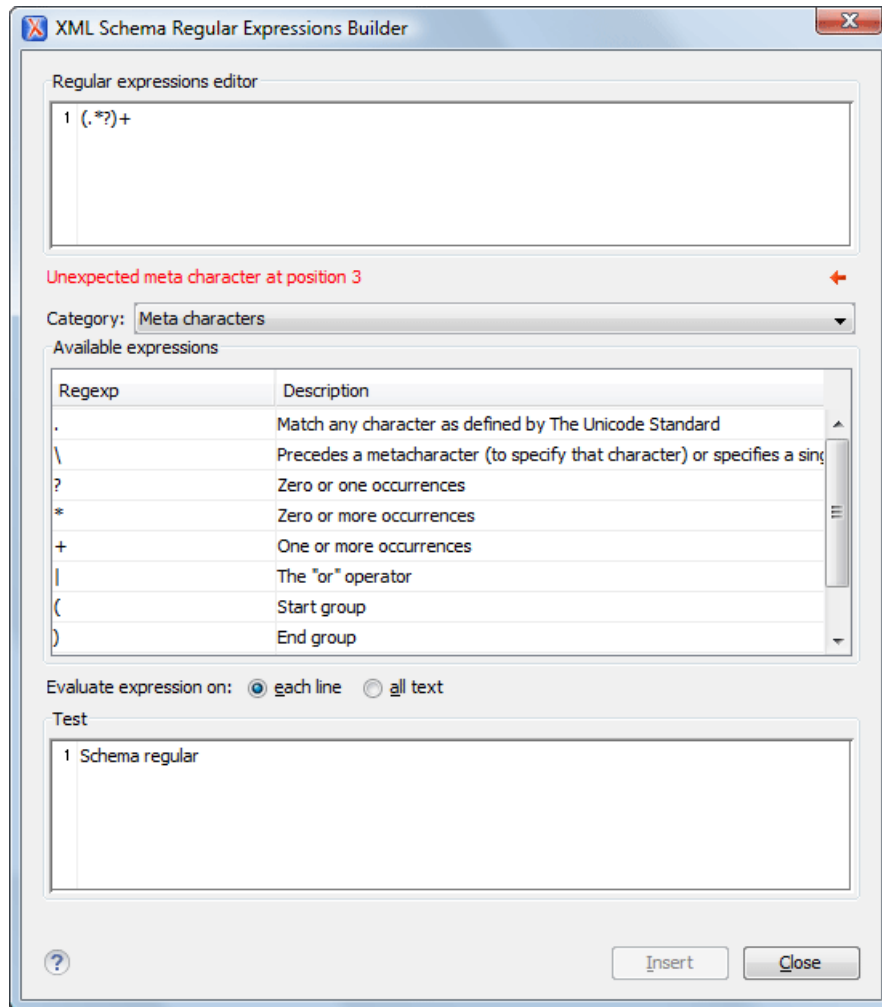


Figure 136: XML Schema Regular Expressions Builder Dialog Box

The dialog box contains the following sections:

- **Regular expressions editor** - allows you to edit the regular expression to be tested and used. Content completion is available and presents a list with all the predefined expressions. It is triggered by pressing **Ctrl Space (Command Space on OS X)**.
- **Error display area** - if the edited regular expression is incorrect, an error message will be displayed here. The message contains the description and the exact location of the error. Also, clicking the quick navigation button (↩) highlights the error inside the regular expression.
- **Category** combo box - here you can choose from several categories of predefined expressions. The selected category influences the displayed expressions in the **Available expressions** table.

- **Available expressions** table - holds the available regular expressions and a short description for each of them. The set of expressions depends on the category selected in the previous combo box. You can add an expression in the **Regular expressions editor** by double-clicking the expression row in the table. You will notice that in the case of **Character categories** and **Block names** the expressions are also listed in complementary format. For example: `\p{Lu}` - Uppercase letters; `\P{Lu}` - Complement of: Uppercase letters.
- **Evaluate expression on** radio buttons - there are available two options:
 - **Evaluate expression on each line** - the edited expression will be applied on each line in the **Test** area.
 - **Evaluate expression on all text** - the edited expression will be applied on the whole text.
- **Test** area - a text editor which allows you to enter a text sample on which the regular expression will be applied. All matches of the edited regular expression will be highlighted.

After editing and testing your regular expression you can insert it in the current editor. The **Insert** button will become active when an editor is opened in the background and there is an expression in the **Regular expressions editor**.

The regular expression builder cannot be used to insert regular expressions in *the grid version* or *the schema version* of a document editor. Accordingly, the **Insert** button of the dialog box will be disabled if the current document is edited in grid mode.



Note: Some regular expressions may block indefinitely the Java Regular Expressions engine. If the execution of the regular expression does not end in about five seconds, the application displays a dialog box that allows you to interrupt the operation.

XML Schema 1.1

Oxygen XML Developer offers full support for XML Schema 1.1, including:

- XML Documents Validation and Content Completion Based on XML Schema 1.1.
- XML Schema 1.1 Validation and Content Completion.
- Editing XML Schema 1.1 files in the Schema **Design** mode.
- The Flatten Schema action.
- Resource Hierarchy/Dependencies and Refactoring Actions.
- Master Files.
- Generating Documentation for XML Schema 1.1.
- Support for generating XML instances based on XML Schema.
- Support for validating XML documents with an NVDL schema that contains an XML Schema 1.1 validation step.



Note: To enable XML Schema 1.1 validation in NVDL, you need to pass the following option to the validation engine to specify the schema version:
`http://www.thaiopensource.com/validate/xsd-version` (the possible values are 1.0 or 1.1).



Note: To enable the full XPath expression in assertions and type alternatives, you need to set the
`http://www.thaiopensource.com/validate/full-xpath` option.

XML Schema 1.1 is a superset of XML Schema 1.0, that offers lots of new powerful capabilities.

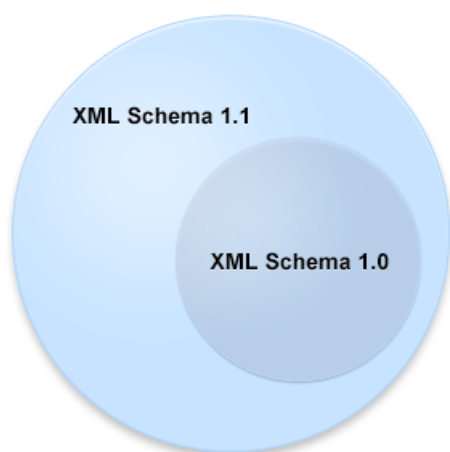


Figure 137: XML Schema 1.1

The significant new features in XSD 1.1 are:

- **Assertions** - support to define assertions against the document content using XPath 2.0 expressions (an idea borrowed from Schematron).
- **Conditional type assignment** - the ability to select the type against which an element is validated based on the values of the attribute of the element.
- **Open content** - content models are able to use the `openContent` element to specify content models with *open content*. These content models allow elements not explicitly mentioned in the content model to appear in the document instance. It is as if wildcards were automatically inserted at appropriate points within the content model. A schema document wide default may be set, which causes all content models to be open unless specified otherwise.

To see the complete list with changes since version 1.0, go to http://www.w3.org/TR/xmlschema11-1/#ch_specs.

XML Schema 1.1 is intended to be mostly compatible with XML Schema 1.0 and to have approximately the same scope. It also addresses bug fixes and brings improvements that are consistent with the constraints on scope and compatibility.



Note: An XML document conforming to a 1.0 schema can be validated using a 1.1 validator, but an XML document conforming to a 1.1 schema may not validate using a 1.0 validator.

If you are constrained to use XML Schema 1.0 (for example if you develop schemas for a server that uses an XML Schema 1.0 validator which cannot be updated), change the default XML Schema version to 1.0. If you keep the default XML Schema version set to 1.1, the content completion window presents XML Schema 1.1 elements that you can insert accidentally in an 1.0 XML Schema. So even if you make a document invalid conforming with XML Schema 1.0, the validation process does not signal any issues.

To change the default XML Schema version, *open the Preferences dialog box* and go to **XML > XML Parser > XML Schema**.

To watch our video demonstration about the XML Schema 1.1 support, go to http://oxygenxml.com/demo/XML_Schema_11.html.

Setting the XML Schema Version

Oxygen XML Developer lets you set the version of the XML Schema you are editing either in the **XML Schema** preferences page, or through the versioning attributes. If you want to use the versioning attributes, set the `minVersion` and `maxVersion` attributes, from the <http://www.w3.org/2007/XMLSchema-versioning> namespace, on the schema root element.



Note: The versioning attributes take priority over the XML Schema version defined in the preferences page.

Table 4: Using the minVersion and maxVersion Attributes to Set the XML Schema Version

Versioning Attributes	XML Schema Version
minVersion = "1.0" maxVersion = "1.1"	1.0
minVersion = "1.1"	1.1
minVersion = "1.0" maxVersion = greater than "1.1"	the XML Schema version defined in the XML Schema preferences page.
Not set in the XML Schema document.	the XML Schema version defined in the XML Schema preferences page.

To change the XML Schema version of the current document, use the **Change XML Schema version** action from the contextual menu. This is available both in the **Text** mode, and in the **Design** mode and opens the **Change XML Schema version** dialog box. The following options are available:

- **XML Schema 1.0** - Inserts the minVersion and maxVersion attributes on the schema element and gives them the values "1.0" and "1.1" respectively. Also, the namespace declaration (*xmlns:vc=http://www.w3.org/2007/XMLSchema-versioning*) is inserted automatically if it does not exist.
- **XML Schema 1.1** - Inserts the minVersion attribute on the schema element and gives it the value "1.1". Also, removes the maxVersion attribute if it exists and adds the versioning namespace (*xmlns:vc=http://www.w3.org/2007/XMLSchema-versioning*) if it is not declared.
- **Default XML Schema version** - Removes the minVersion and maxVersion attributes from the schema element. The default schema version, defined in the **XML Schema** preferences page, is used.



Note: The **Change XML Schema version** action is also available in the informative panel presented at the top of the edited XML Schema. If you close this panel, it will no longer appear until you restore Oxygen XML Developer to its default options.

Oxygen XML Developer automatically uses the version set through the versioning attributes, or the default version if the versioning attributes are not declared, when proposing content completion elements and validating an XML Schema. Also, the XML instance validation against an XML Schema is aware of the versioning attributes defined in the XML Schema.

When you generate sample XML files from an XML Schema, Oxygen XML Developer takes into account the minVersion and maxVersion attributes defined in the XML Schema.

Editing XQuery Documents

This section explains the features of the XQuery editor and how to use them.

XQuery Outline View

The XQuery document structure is presented in the XQuery **Outline** view. The outline tree presents the list of all the components (namespaces, imports, variables, and functions) from both the edited XQuery file and its imports. It allows quick access to components and can be opened from **Window > Show View > Outline**.

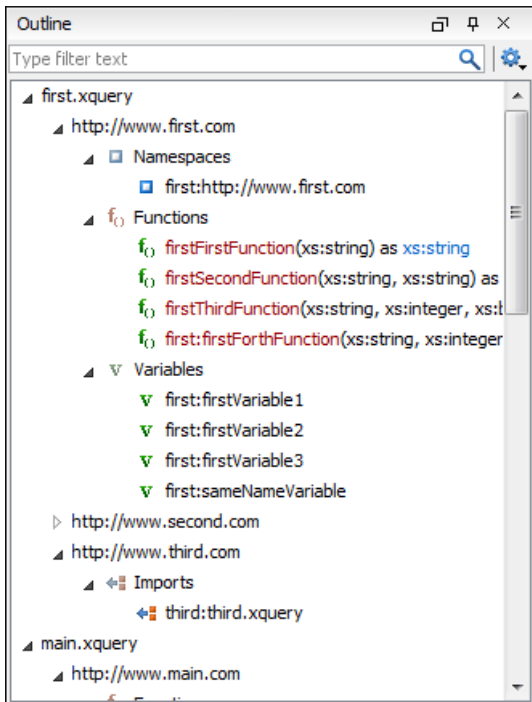


Figure 138: XQuery Outline View

The following actions are available in the  **Settings** menu on the **Outline** view toolbar:

 Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes performed in the XQuery editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

 Sort

Allows you to alphabetically sort the XQuery components.

Show all components

Displays all collected components starting from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

Allows you to group the components by location, namespace, and type. When grouping by namespace, the main XQuery module namespace is presented first in the **Outline** view.

If you know the component name, you can search it in the **Outline** view by typing its name in the filter text field from the top of the view or directly on the tree structure. When you type the component name in the filter text field you can switch to the tree structure using the arrow keys of the keyboard, **(Enter)**, **(Tab)**, **(Shift-Tab)**. To switch from tree structure to the filter text field, you can use **(Tab)**, **(Shift-Tab)**.

 **Tip:** The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match (like *textToFind*).

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Folding in XQuery Documents

In a large XQuery document, the instructions enclosed in the '{' and '}' characters can be collapsed so that only the needed instructions remain in focus. The same [folding features available for XML documents](#) are also available in XQuery documents.

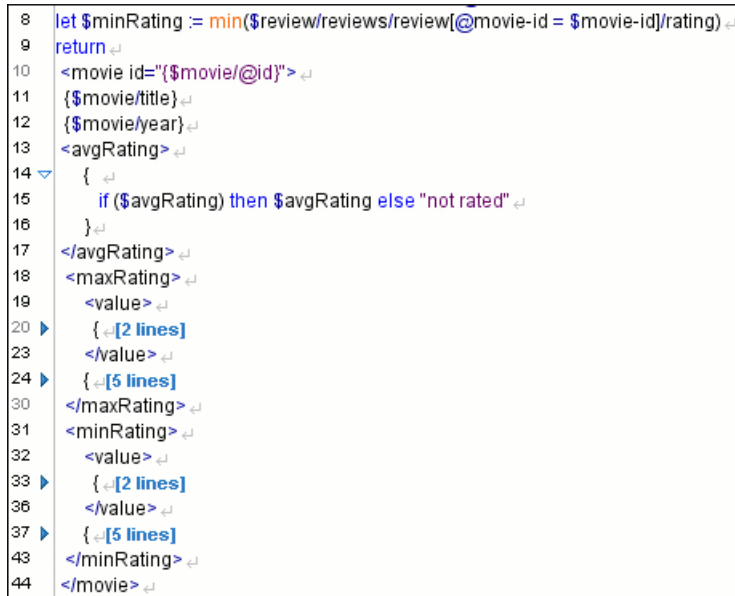


Figure 139: Folding in XQuery Documents

There is available the action **Go to Matching Bracket** **Ctrl Shift G** on contextual menu of XQuery editor for going to matching character when cursor is located at '{' character or '}' character. It helps for finding quickly matching character of current folding element.

Formatting and Indenting XQuery Documents

Editing XQuery documents may lead to large chunks of content that are not easily readable by human audience. Also, each developer may have a particular way of writing XQuery code. Oxygen XML Developer assists you in maintaining a consistent code writing style with the  **Format and Indent** action that is available in the **Document > Source** menu and also on the toolbar..

The  **Format and Indent** action achieves this by performing the following steps:

- Manages whitespaces, by collapsing or inserting space characters where needed.
- Formats complex expressions on multiple, more readable lines by properly indenting each of them. The amount of whitespaces that form an indent unit is controlled through one of the **Indent with tabs** and **Indent size** options from the [Format Preferences page](#).



Note: These operations can be performed only if your XQuery document conforms with W3C XQuery 1.0, XQuery Update Facility 1.0, and XQuery 3.0 specifications. If the *Format and Indent* operation fails, the document is left unaltered and an error message is presented in the **Results** view.

Generating HTML Documentation for an XQuery Document

To generate HTML documentation for an XQuery document, use the **XQuery Documentation** dialog box. It is opened with the **XQuery Documentation** action that is available from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project** view.

The dialog box allows you to configure a set of parameters for the process of generating the HTML documentation.

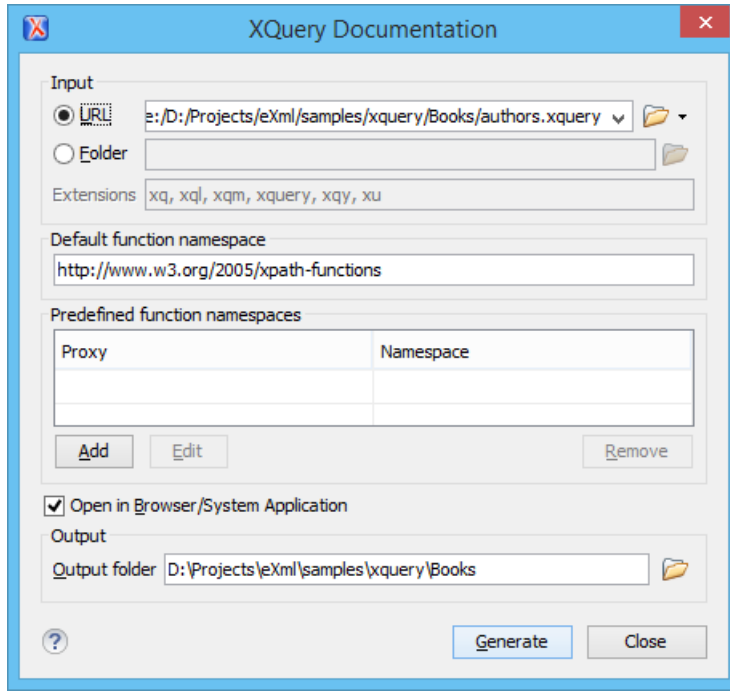


Figure 140: The XQuery Documentation Dialog Box

The following options are available:

- **Input** - The full path to the XQuery file must be specified in one of the two fields in this section:
 - **URLFile** - The URL of the file in which you want to generate the documentation.
 - **Folder** - The directory that contains the files for which you want to generate the documentation. You can also specify the XQuery file extensions to be searched for in the specified directory.
- **Default function namespace** - Optional URI for the default namespace for the submitted XQuery.
- **Predefined function namespaces** - Optional, engine-dependent, predefined namespaces that the submitted XQuery refers to. They allow the conversion to generate annotation information to support the presentation component hypertext linking (only if the predefined modules have been loaded into the local xqDoc XML repository).
- **Open in Browser/System Application** - Select this option if you want the result to be opened in the system application associated with that file type.



Note: To set the browser or system application that will be used, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

- **Output** - Allows you to specify where the generated documentation is saved on disk.

Editing WSDL Documents

WSDL is an XML format for describing network services as a set of endpoints operating on messages containing either document-oriented or procedure-oriented information. The operations and messages are described abstractly, and then

bound to a concrete network protocol and message format to define an endpoint. Related concrete endpoints are combined into abstract endpoints (services).

Oxygen XML Developer provides a special type of editor dedicated to WSDL documents. The WSDL editor offers support to check whether a WSDL document is valid, a specialized Content Completion Assistant, a component oriented **Outline** view, searching and refactoring operations, and support to generate documentation.

Both WSDL version 1.1 and 2.0 are supported and SOAP versions 1.1 and 1.2. That means that in the location where a SOAP extension can be inserted the **Content Completion Assistant** offers elements from both SOAP 1.1 and SOAP 1.2. Validation of SOAP requests is executed first against a SOAP 1.1 schema and then against a SOAP 1.2 schema. In addition to validation against the XSD schemas, Oxygen XML Developer also checks if the WSDL file conforms with the WSDL specification (available only for WSDL 1.1 and SOAP 1.1).

In the following example you can see how the errors are reported.

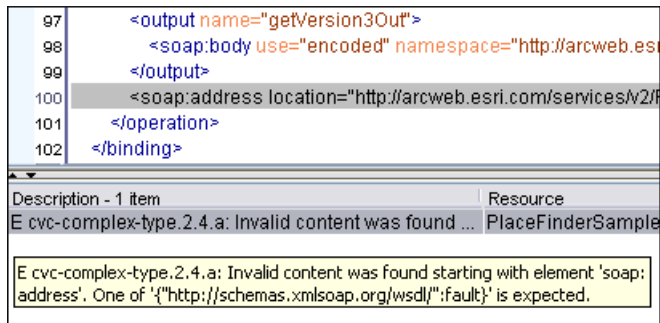


Figure 141: Validating a WSDL file

To watch our video demonstration about the WSDL editing support in Oxygen XML Developer, go to http://www.oxygenxml.com/demo/Create_New_WSDL.html.

WSDL Outline View

The WSDL **Outline** view displays the list of all the components (services, bindings, port types and so on) of the currently open WSDL document along with the components of its imports.

If you use the **Master Files support**, the **Outline** view collects the components of a WSDL document starting from the master files of the current document.

To enable the **Outline** view, go to **Window > Show View > Outline**.

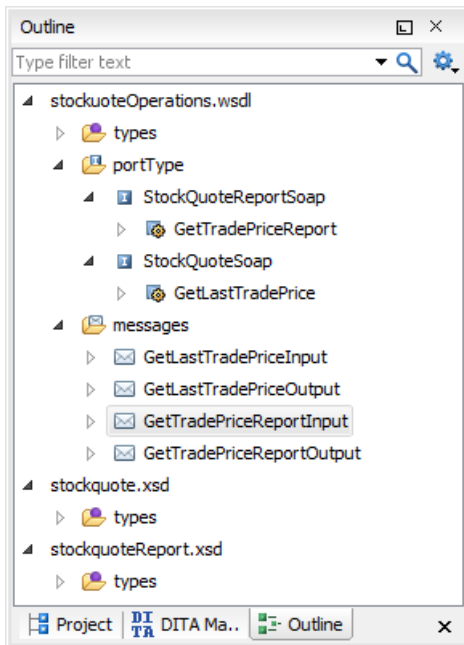


Figure 142: The WSDL Outline View

The **Outline** view can display both the components of the current document and its XML structure, organized in a tree-like fashion. You can switch between the display modes by using the **Show XML structure** and **Show components** actions in the **Settings** menu on the **Outline** view toolbar. The following actions are available:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.



Selection update on cursor move

Controls the synchronization between the **Outline** view and the current document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the WSDL editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the current document.

When the **Show components** option is selected, the following actions are available:



Show XML structure

Displays the XML structure of the current document in a tree-like manner.



Sort

Sorts the components in the **Outline** view alphabetically.

Show all components

Displays all the components that were collected starting from current document or from the main document, if it is defined.

Show referable components

Displays all the components that you can reference from the current document.

Show only local components

Displays the components defined in the current file only.

Group by location

Groups the WSDL components by their location.

Group by type

Groups the WSDL components by their type.

Group by namespace

Groups the WSDL components by their namespace.



Note: By default all the three grouping criteria are active.

When the  **Show XML structure** option is selected, the following actions are available:

**Show components**

Switches the **Outline** view to the components display mode.

**Flat presentation mode of the filtered results**

When active, the application flattens the filtered result elements to a single level.

**Show comments and processing instructions**

Show/hide comments and processing instructions in the **Outline** view.

**Show element name**

Show/hide element name.

**Show text**

Show/hide additional text content for the displayed elements.

**Show attributes**

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

**Configure displayed attributes**

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are available in the **Outline** view when the  **Show components** option is selected in the  **Settings** menu:

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Search references**

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

Component dependencies

Displays the dependencies of the currently selected component.

Resource Hierarchy

Displays the hierarchy for the currently selected resource.

Resource Dependencies

Displays the dependencies of the currently selected resource.

**Rename Component in**

Renames the currently selected component in the context of a scope that you define.

The following contextual menu actions are available in the **Outline** view when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

**Toggle Comment**

Comments/uncomments the currently selected element.

**Search references**

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

**Component dependencies**

Displays the dependencies of the currently selected component.

**Rename Component in**

Renames the currently selected component in the context of a scope that you define.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Expand More**

Expands the structure of a component in the **Outline** view.

**Collapse All**

Collapses the structure of all the component in the **Outline** view.

To switch from the tree structure to the text filter, use **Tab** and **Shift-Tab**.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match (like *textToFind*).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Content Completion in WSDL Documents

The **Content Completion Assistant** is a powerful feature that enhances the editing of WSDL documents. It helps you define WSDL components by proposing context-sensitive element names. Another important capability of the **Content Completion Assistant** is to propose references to the defined components when you edit attribute values. For example, when you edit the type attribute of a binding element, the **Content Completion Assistant** proposes all the defined port types. Each proposal that the **Content Completion Assistant** offers is accompanied by a documentation hint.

 **Note:** XML schema specific elements and attributes are offered when the current editing context is the internal XML schema of a WSDL document.

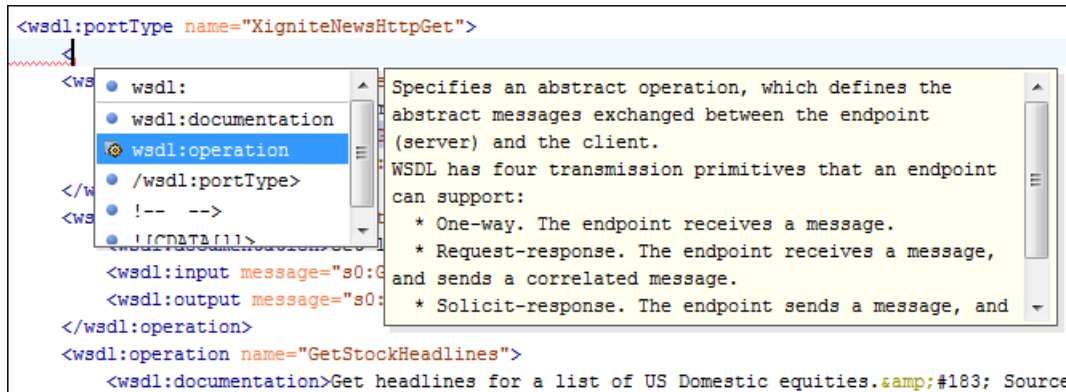


Figure 143: WSDL Content Completion Window

 **Note:** The **Content Completion Assistant** collects its components starting from the master files. The master files can be defined in the project or in the associated validation scenario. For further details about the **Master Files** support go to [Defining Master Files at Project Level](#).

Namespace prefixes in the scope of the current context are presented at the top of the content completion window to speed up the insertion into the document of prefixed elements.



Figure 144: Namespace Prefixes in the Content Completion Window

For the common namespaces, like XML Schema namespace (<http://www.w3.org/2001/XMLSchema>) or SOAP namespace (<http://schemas.xmlsoap.org/wsdl/soap/>), Oxygen XML Developer provides an easy mode to declare them by proposing a prefix for these namespaces.

Editing WSDL Documents in the Master Files Context

Smaller interrelated modules that define a complex WSDL structure cannot be correctly edited or validated individually, due to their interdependency with other modules. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger WSDL structure.

You can set a main WSDL document either using the [master files support from the Project view](#), or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main WSDL document. In this case, it considers the current module as the main WSDL document.

The advantages of editing in the context of a master file include:

- Correct validation of a module in the context of a larger WSDL structure.
- **Content Completion Assistant** displays all components valid in the current context.
- The **Outline** displays the components collected from the entire WSDL structure.



Note: When you edit an XML schema document that has a WSDL document set as master, the validation operation is performed over the master WSDL document.

To watch our video demonstration about editing WSDL documents in the master files context, go to http://oxygenxml.com/demo/WSDL_Working_Modules.html.

Searching and Refactoring Operations in WSDL Documents

Search Actions

The following search actions are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the **Document > Schema** menu:

-  **Show Definition** - Takes you to the location of the definition of the current item.



Note: You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions are available from the **Refactoring** submenu from the **Document > Refactoring** menu or in the contextual menu of the current editor:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename component_type** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

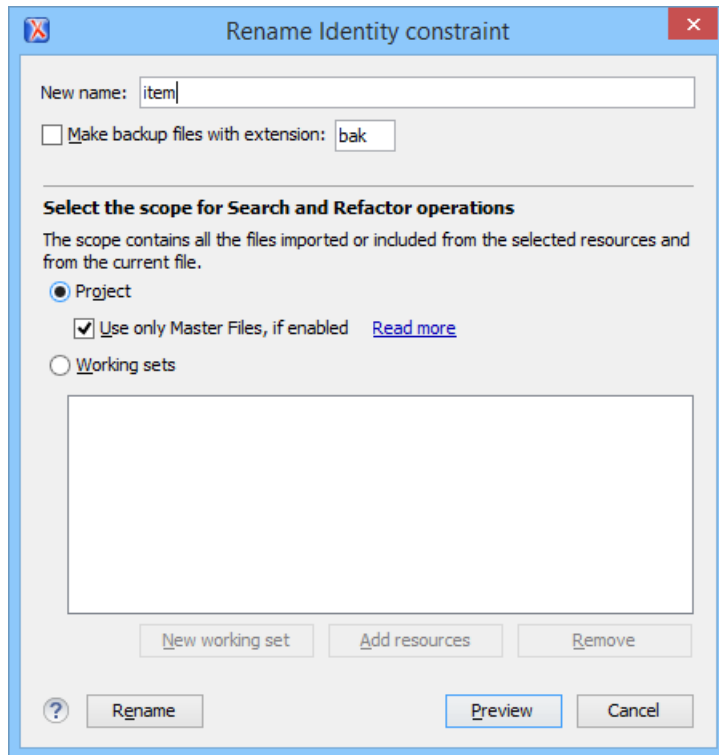


Figure 145: Rename Identity Constraint Dialog Box

Searching and Refactoring Operations Scope in WSDL Documents

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the Quick Assist action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple working sets. The **Use only Master Files, if enabled** check-box allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the [Master Files support](#).

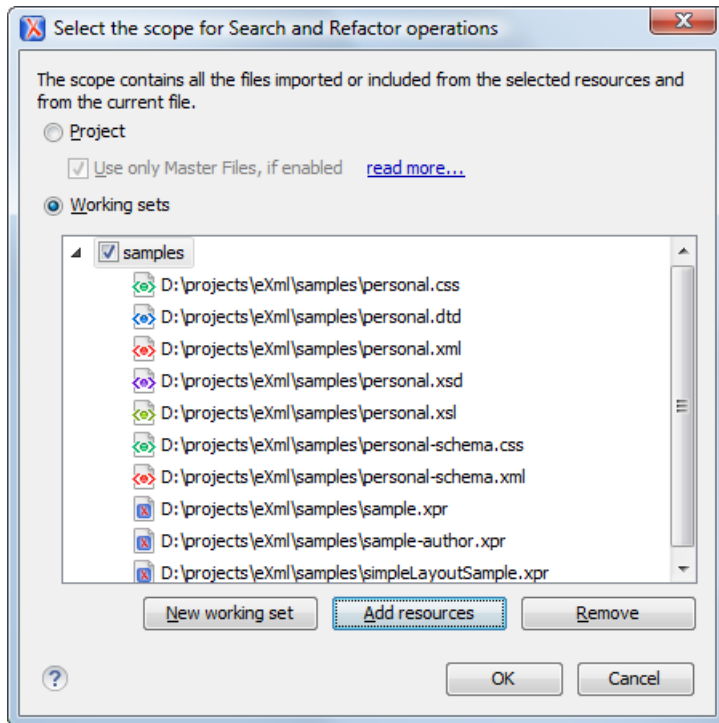


Figure 146: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the working set structure.

WSDL Resource Hierarchy/Dependencies View in WSDL Documents

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a WSDL resource. To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**.



Note: The hierarchy of a WSDL resource includes the hierarchy of imported XML Schema resources. The dependencies of an XML Schema resource present the WSDL documents that import the schema.

To view the hierarchy of a WSDL document, select the document in the project view and choose **Resource Hierarchy** from the contextual menu.

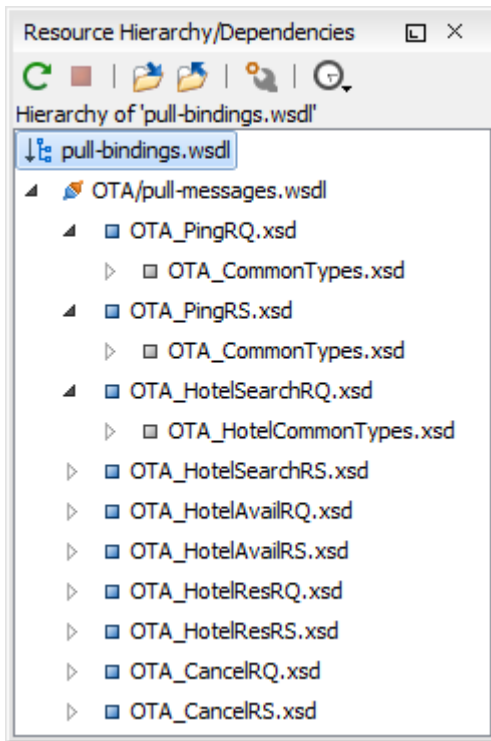


Figure 147: Resource Hierarchy/Dependencies View

If you want to see the dependencies of a WSDL document, select the document in the project view and choose **Resource Dependencies** from the contextual menu.

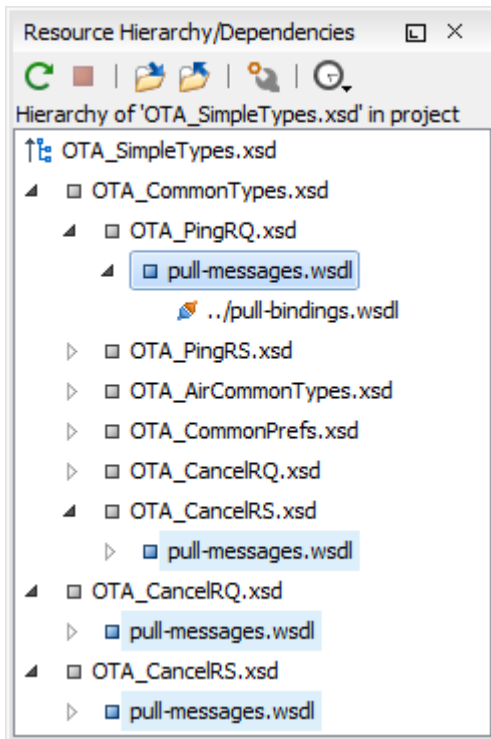


Figure 148: Resource Hierarchy/Dependencies View

The following actions are available in the **Resource Hierarchy/Dependencies** view:

**Refresh**

Refreshes the Hierarchy/Dependencies structure.

**Stop**

Stops the hierarchy/dependencies computing.

**Show Hierarchy**

Allows you to choose a resource to compute the hierarchy structure.

**Show Dependencies**

Allows you to choose a resource to compute the dependencies structure.

**Configure**

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

**History**

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

**Add to Master Files**

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .



Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Moving/Renaming WSDL Resources

You are able to move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Component Dependencies View in WSDL Documents

The **Component Dependencies** view allows you to view the dependencies for a selected WSDL component. To open the **Component Dependencies** view, go to **Window > Show View > Component Dependencies**.

To view the dependencies of an WSDL component, select the desired component in the editor and choose the **Component Dependencies** action from the contextual menu. This action is available for all WSDL components (messages, port types, operations, bindings and so on).

 **Note:** If you search for dependencies of XML Schema elements, the **Component Dependencies** view presents the references from WSDL documents.

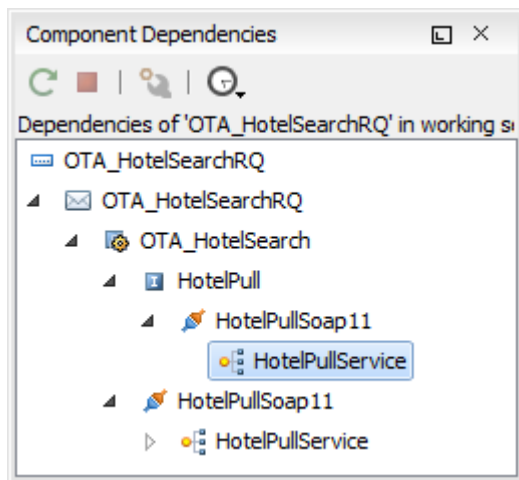


Figure 149: Component Dependencies View

The following actions are available in the toolbar of the **Component Dependencies** view:



Refresh

Refreshes the dependencies structure.



Stop

Stops the dependencies computing.



Configure

Allows you to configure a [search scope](#) to compute the dependencies structure. You can decide to use the defined scope for future operations automatically, by checking the corresponding check box.



History

Allows you to repeat a previous dependencies computation.

The following actions are available in the contextual menu of the **Component Dependencies** view:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Displays the definition of the current selected component in the dependencies tree.



Tip: If a component contains multiple references to another, a small table is displayed that contains all references. When a recursive reference is encountered, it is marked with a special icon

Highlight Component Occurrences in WSDL Documents

When you position your mouse cursor over a component in a WSDL document, Oxygen XML Developer searches for the component declaration and all its references and highlights them automatically.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected.

To change the default behavior of **Highlight Component Occurrences**, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File ()** action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Quick Assist Support in WSDL Documents

The *Quick Assist* feature is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb help marker placed on the cursor line, in the line number stripe on the left side of the editor. Also, you can invoke the quick assist menu by using the **Alt + 1** keys (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

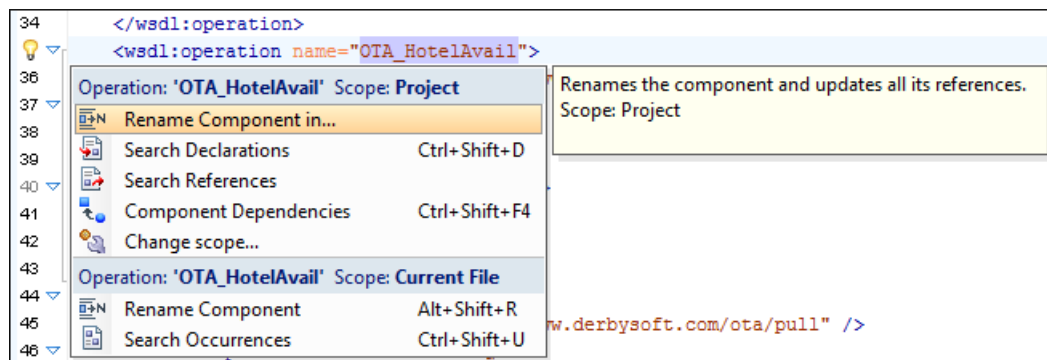


Figure 150: WSDL Quick Assist Support

The quick assist support offers direct access to the following actions:



Rename Component in

Renames the component and all its dependencies.



Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.



Search References

Searches all references of the component in a predefined scope.



Component Dependencies

Searches the component dependencies in a predefined scope.

**Change Scope**

Configures the scope that will be used for future search or refactor operations.

**Rename Component**

Allows you to rename the current component in-place.

**Search Occurrences**

Searches all occurrences of the component within the current file.

Generating Documentation for WSDL Documents

You can use Oxygen XML Developer to generate detailed documentation for the components of a WSDL document in HTML format. You can select the WSDL components to include in your output and the level of details to present for each of them. Also, the components are hyperlinked. You can also generate the documentation in a *custom output format* by using a custom stylesheet.



Note: The WSDL documentation includes the XML Schema components that belong to the internal or imported XML schemas.

To generate documentation for a WSDL document, select **WSDL Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project** view.

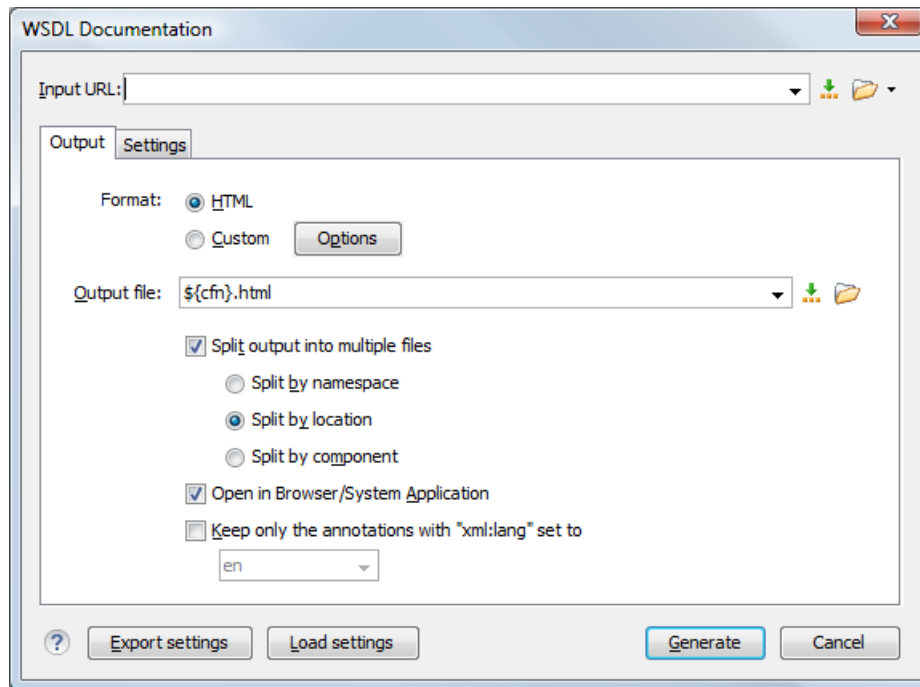


Figure 151: The WSDL Documentation Dialog Box

The **Input URL** field of the dialog box must contain the full path to the WSDL document that you want to generate documentation for. The WSDL document may be a local or a remote file. You can specify the path to the WSDL file by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.

The Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in *HTML output format*.

- **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
 - **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
 - **Split output into multiple files** - Instructs the application to split the output into multiple files. For large WSDL documents, choosing a different split criterion may generate smaller output files providing a faster documentation browsing. You can choose to split them by namespace, location, or component name.
 - **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.
-  **Note:** To set the browser or system application that will be used, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.
- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

The Setting Tab

When you generate documentation for a WSDL document, you can choose what components to include in the output and the details to be included in the documentation.

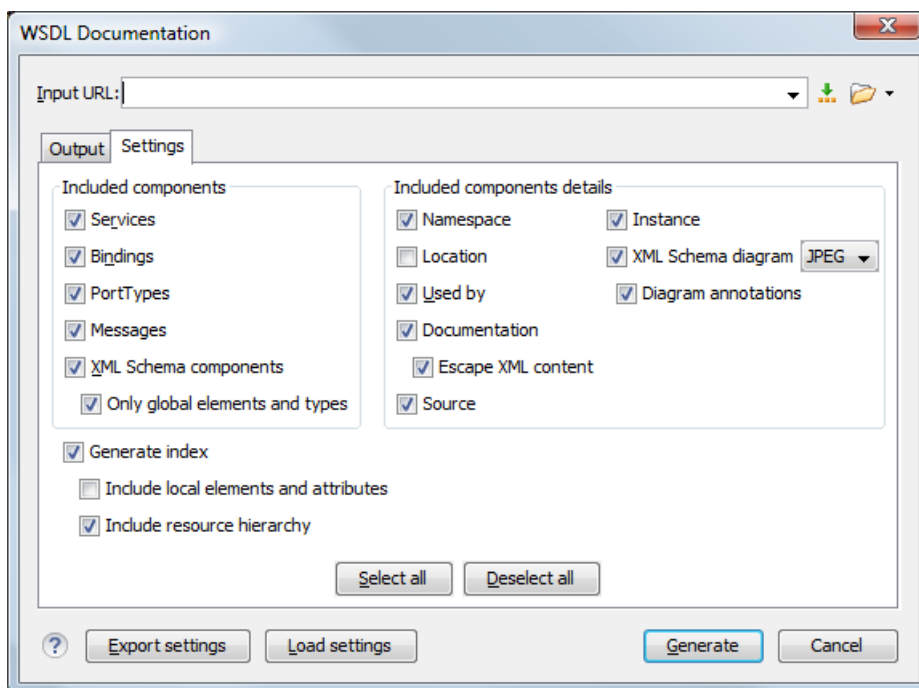


Figure 152: The Settings Tab of the WSDL Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following:

- **Components**
 - **Services** - Specifies whether the generated documentation includes the WSDL services.
 - **Bindings** - Specifies whether the generated documentation includes the WSDL bindings.
 - **Port Types** - Specifies whether the generated documentation includes the WSDL port types.
 - **Messages** - Specifies whether the generated documentation includes the WSDL messages.

- **XML Schema Components** - Specifies whether the generated documentation includes the XML Schema components.
 - **Only global elements and types** - Specifies whether the generated documentation includes only global elements and types.
- **Component Details**
 - **Namespace** - Presents the namespace information for WSDL or XML Schema components.
 - **Location** - Presents the location information for each WSDL or XML Schema component.
 - **Used by** - Presents the list of components that reference the current one.
 - **Documentation** - Presents the component documentation. If you choose **Escape XML Content**, the XML tags are presented in the documentation.
 - **Source** - Presents the XML fragment that defines the current component.
 - **Instance** - Generates a sample XML instance for the current component.

 **Note:** This option applies to the XML Schema components only.

 - **XML Schema Diagram** - Displays the diagram for each XML Schema component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section.
 - **Diagram annotations** - Specifies whether the annotations of the components presented in the diagram sections are included.
- **Generate index** - Displays an index with the components included in the documentation.
 - **Include local elements and attributes** - If checked, local elements and attributes are included in the documentation index.
 - **Include resource hierarchy** - Specifies whether the resource hierarchy for an XML Schema documentation is generated.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

Load settings - Reloads the settings from the exported file.

Generate - Use this button to generate the WSDL documentation.

Generating WSDL Documentation in HTML Format

The WSDL documentation generated in HTML format is presented in a visual diagram style with various sections, hyperlinks, and options.

Table of Contents

Components | Resource Hierarchy

Group by: Location

- stockquoteOperations.wsdl
 - Messages
 - tns:GetLastTradePriceInput
 - tns:GetLastTradePriceOutput
 - tns:GetTradePriceReportInput
 - tns:GetTradePriceReportOutput
 - Elements
 - s:TradePriceReportRequest
 - s:TradePriceReportResponse
 - s:TradePriceRequest
 - s:TradePriceResponse
- stockquote.xsd
 - Elements
 - sq:price
 - sq:tickerSymbol

Main WSDL stockQuoteService.wsdl

Showing:

- ☒ Ports
- ☒ Operations
- ☒ Documentation
- ☒ Source
- ☒ Used by

Service tns:StockQuoteService

Name	StockQuote
Namespace	http://example.com/stockquote/service
Documentation	Provides the last trade price for a stock.
Ports	StockQuotePort Binding: tns:StockQuoteSoap Extensibility: <code><soap:address location="http://example.com/stockquote"/></code>
Source	<pre> <wsdl:service name="StockQuoteService"> <wsdl:documentation>Provides the last trade price for a stock.</wsdl:documentation> <wsdl:port binding="tns:StockQuoteSoap" name="StockQuotePort"> <soap:address location="http://example.com /stockquote"/> </wsdl:port> </wsdl:service> </pre>

Figure 153: WSDL Documentation in HTML Format

The documentation of each component is presented in a separate section. The title of the section is composed of the component type and the component name. The component information (namespace, documentation, etc.) is presented in a tabular form.

If you choose to split the output into multiple files, the table of contents is displayed in the left frame and is divided in two tabs: **Components** and **Resource Hierarchy**.

The **Components** tab allows you to group the contents by namespace, location, or component type. The WSDL components from each group are sorted alphabetically. The **Resource Hierarchy** tab displays the dependencies between WSDL and XML Schema modules in a tree like fashion. The root of the tree is the WSDL document that you generate documentation for.

After the documentation is generated, you can collapse or expand details for some WSDL components by using the **Showing** options or the ☐ **Collapse** or ☐ **Expand** buttons.

Showing:

- ☒ Ports
- ☒ Operations
- ☒ Documentation
- ☒ Source
- ☒ Used by

Close

Figure 154: The Showing Options

Generating WSDL Documentation in a Custom Format

To obtain the default HTML documentation output from a WSDL document, Oxygen XML Developer uses an intermediary XML document to which it applies an XSLT stylesheet. To create a custom output from your WSDL document, edit the `wsdlDocHtml.xsl` XSLT stylesheet or create your own.



Note: The `wsdlDocHtml.xsl` stylesheet that is used to obtain the HTML documentation is located in the `[OXYGEN_DIR]/frameworks/wsdl_documentation/xsl` folder.



Note: The intermediary XML document complies with the `wsdlDocSchema.xsd` XML Schema. This schema is located in the `[OXYGEN_DIR]/frameworks/wsdl_documentation` folder.

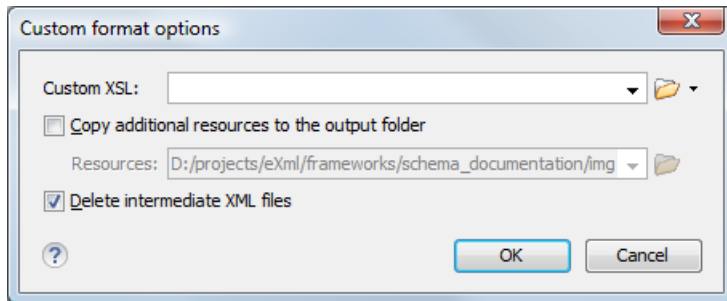


Figure 155: The Custom Format Options Dialog Box

When using a custom format, you can also copy additional resources into the output folder or choose to keep the intermediate XML files created during the documentation process.

Generating WSDL Documentation from the Command-Line Interface

To generate documentation for a WSDL document from the command line, open the **WSDL Documentation** dialog box and click **Export settings**. Using the exported settings file you can generate the same documentation from the command line by running the following scripts:

- `wsdlDocumentation.bat` on Windows.
- `wsdlDocumentation.sh` on Unix / Linux.
- `wsdlDocumentationMac.sh` on Mac OS X.

The scripts are located in the installation folder of Oxygen XML Developer. You can integrate the scripts in an external batch process launched from the command-line interface.

WSDL SOAP Analyzer

After you edit and validate your Web service descriptor against a mix of the XML Schemas for WSDL and SOAP, it is easy to check if the defined SOAP messages are accepted by the remote Web Services server using Oxygen XML Developer's **WSDL SOAP Analyzer** integrated tool (Available).

Composing a SOAP Request

WSDL SOAP Analyzer is a tool that helps you test if the messages defined in a Web Service Descriptor (WSDL) are accepted by a Web Services server.

Oxygen XML Developer provides two ways of testing, one for the currently edited WSDL document and another for the remote WSDL documents that are published on a web server. To open the **WSDL SOAP Analyzer** tool for the currently edited WSDL document do one of the following:

- Click the  **WSDL SOAP Analyzer** toolbar button.
- Use the  **WSDL SOAP Analyzer** action from the **Tools** menu.
- Go to **Open with >**  **WSDL SOAP Analyzer** in the contextual menu of the **Project** view.

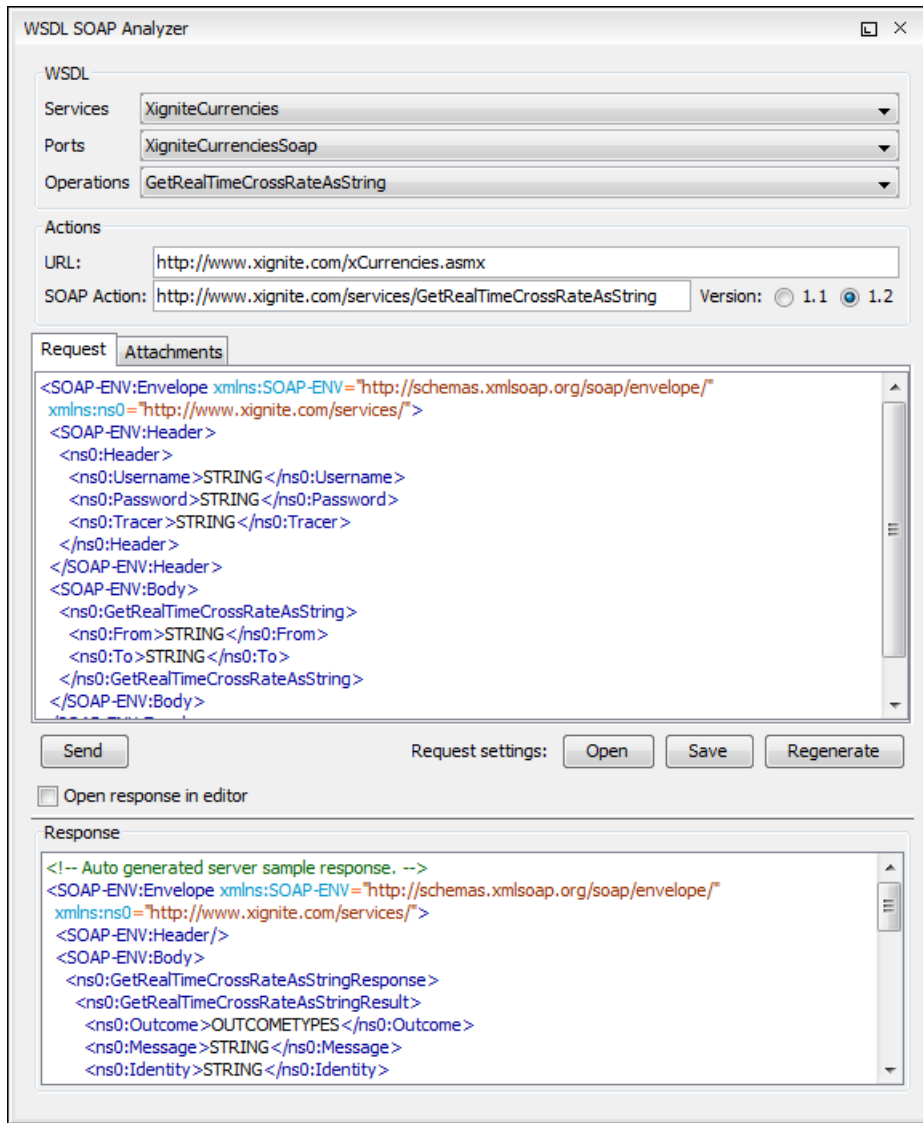


Figure 156: WSDL SOAP Analyzer Dialog Box

This tool contains a SOAP analyzer and sender for Web Services Description Language file types. The analyzer fields are as follows:

- **Services** - The list of services defined by the WSDL file.
- **Ports** - The ports for the selected service.
- **Operations** - The list of available operations for the selected service.
- **Action URL** - The script that serves the operation.
- **SOAP Action** - Identifies the action performed by the script.
- **Version** - Choose between 1.1 and 1.2. The SOAP version is selected automatically depending on the selected port.
- **Request Editor** - It allows you to compose the web service request. When an action is selected, Oxygen XML Developer tries to generate as much content as possible for the SOAP request. The envelope of the SOAP request has the correct namespace for the selected SOAP version, that is *http://schemas.xmlsoap.org/soap/envelope/* for SOAP 1.1 or *http://www.w3.org/2003/05/soap-envelope* for SOAP 1.2. Usually you just have to change few values in order for the request to be valid. The content completion assistant is available for this editor and is driven by the schema that defines the type of the current message. While selecting different operations, Oxygen XML Developer remembers the modified request for each one. You can press the **Regenerate** button in order to overwrite your modifications for the current request with the initial generated content.
- **Attachments List** - You can define a list of file URLs to be attached to the request.

- **Response Area** - Initially it displays an auto generated server sample response so you can have an idea about how the response looks like. After pressing the **Send** button, it presents the message received from the server in response to the Web Service request. It may show also error messages. If the response message contains attachments, Oxygen XML Developer prompts you to save them, then tries to open them with the associated system application.
- **Errors List** - There may be situations in which the WSDL file is respecting the WSDL XML Schema, but it fails to be valid for example in the case of a message that is defined by means of an element that is not found in the types section of the WSDL. In such a case, the errors are listed here. This list is presented only when there are errors.
- **Send Button** - Executes the request. A status dialog box is displayed when Oxygen XML Developer is connecting to the server.

The testing of a WSDL file is straight-forward: click the WSDL analysis button, then select the service, the port, and the operation. The editor generates the skeleton for the SOAP request. You can edit the request, eventually attach files to it and send it to the server. Watch the server response in the response area. You can find more details in the [Testing Remote WSDL Files](#) section.



Note: SOAP requests and responses are automatically validated in the **WSDL SOAP Analyzer** using the XML Schemas specified in the WSDL file.

Once defined, a request derived from a Web Service descriptor can be saved with the **Save** button to a Web Service SOAP Call (WSSC) file for later reuse. In this way, you save time in configuring the URLs and parameters.

You can open the result of a Web Service call in an editor panel using the **Open** button.

Testing Remote WSDL Files

To open and test a remote WSDL file the steps are the following:

1. Go to **Tools** >  **WSDL SOAP Analyzer**.
2. On the **WSDL File** tab enter the URL of the remote WSDL file.

You enter the URL:

- by typing
- by browsing the local file system
- by browsing a remote file system
- by browsing [a UDDI Registry](#)

3. Press the **OK** button.

This will open the **WSDL SOAP Analyzer** tool. In the **Saved SOAP Request** tab you can open directly a previously saved Web Service SOAP Call (WSSC) file thus skipping the analysis phase.

The UDDI Registry Browser

Pressing the  button in the **WSDL File Opener** dialog box (menu **Tools** > **WSDL SOAP Analyzer**) opens the **UDDI Registry Browser** dialog box.

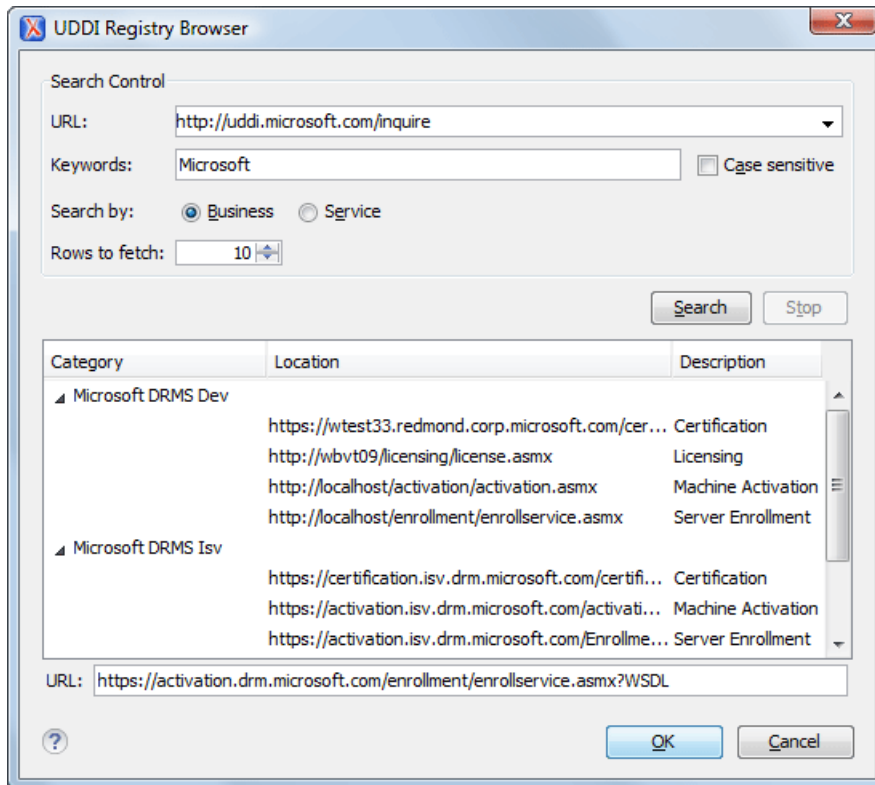


Figure 157: UDDI Registry Browser Dialog Box

The fields of the dialog box are as follows:

- **URL** - Type the URL of an UDDI registry or choose one from the default list.
- **Keywords** - Enter the string you want to be used when searching the selected UDDI registry for available Web services.
- **Rows to fetch** - The maximum number of rows to be displayed in the result list.
- **Search by** - You can choose to search either by company or by provided service.
- **Case sensitive** - When checked, the search takes into account the keyword case.
- **Search** - The WSDL files that matched the search criteria are added in the result list.

When you select a WSDL from the list and click the **OK** button, the **UDDI Registry Browser** dialog box is closed and you are returned to the **WSDL File Opener** dialog box.

Editing CSS Stylesheets

This section explains the features of the editor for CSS stylesheets and how these features should be used.

Validating CSS Stylesheets

Oxygen XML Developer includes a built-in *CSS Validator*, integrated with general validation support. This makes the *usual validation features* for presenting errors also available for CSS stylesheets.

When you edit a CSS document, you can access the *CSS validator options* by selecting  **Validation options** from the **Document > Validate** menu.

The CSS properties accepted by the validator are those included in the current CSS profile that is selected in *the CSS validation preferences*. The **CSS 3 with Oxygen extensions** profile includes all the CSS 3 standard properties and the CSS extensions specific for Oxygen. That means all Oxygen specific extensions are accepted in a CSS stylesheet by *the built-in CSS validator* when this profile is selected.

Specify Custom CSS Properties

Lists the steps required for specifying custom CSS properties.

To specify custom CSS properties, follow these steps:

1. Create a file named `CustomProperties.xml` that has the following structure:

```
<?xml version="1.0" encoding="UTF-8"?>
<css_keywords
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.oxygenxml.com/ns/css http://www.oxygenxml.com/ns/css/CssProperties.xsd"

  xmlns="http://www.oxygenxml.com/ns/css">
  <property name="custom">
    <summary>Description for custom property.</summary>
    <value name="customValue"/>
    <value name="anotherCustomValue"/>
  </property>
</css_keywords>
```

2. Go to your desktop and create the `builtin/css-validator/` folder structure.
3. Press and hold **Shift** and right-click anywhere on your desktop. From the contextual menu, select **Open Command Window Here**.
4. In the command line, run the `jar cvf custom_props.jar builtin/` command.
The `custom_props.jar` file is created.
5. Go to `[OXYGEN_DIR]/lib` and create the `endorsed` folder. Copy the `custom_props.jar` file to `[OXYGEN_DIR]/lib/endorsed`.

Content Completion in CSS Stylesheets

A **Content Completion Assistant**, similar to [the one available for XML documents](#) offers the CSS properties and the values available for each property. It is activated with the **Ctrl Space (Command Space on OS X)** shortcut and is context-sensitive when invoked for the value of a property. The **Content Completion Assistant** also includes [code templates that can be used to quickly insert code fragments](#) into CSS stylesheets. The code templates that are proposed include form controls, actions, and **Author** mode operations.

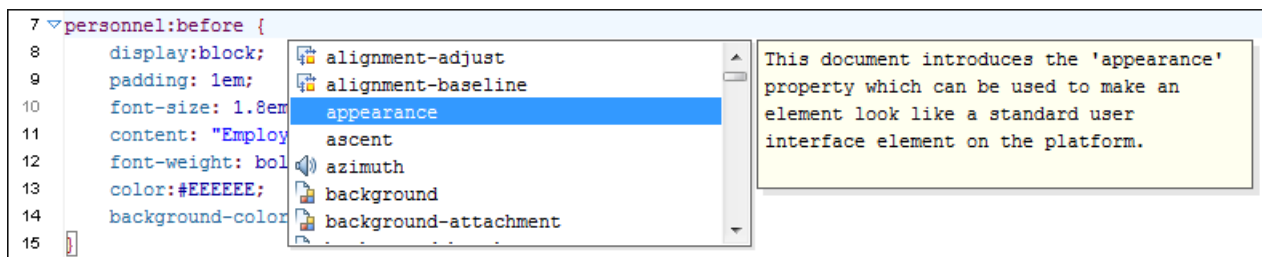


Figure 158: Content Completion in CSS Stylesheets

The properties and values available are dependent on the CSS Profile selected in the [CSS preferences](#). The CSS 2.1 set of properties and property values is used for most of the profiles. However, with CSS 1 and CSS 3 specific proposal sets are used.

CSS Outline View

The CSS **Outline** view presents the import declarations for other CSS stylesheet files and all the selectors defined in the current CSS document. The selector entries can be presented as follows:

- In the order they appear in the document.
- Sorted by the element name used in the selector.
- Sorted by the entire selector string representation.

You can synchronize the selection in the **Outline** view with the cursor moves or changes you make in the stylesheet document. When you select an entry from the **Outline** view, Oxygen XML Developer highlights the corresponding import or selector in the CSS editor.

To enable the **Outline** view, go to **Window > Show View > Outline**.

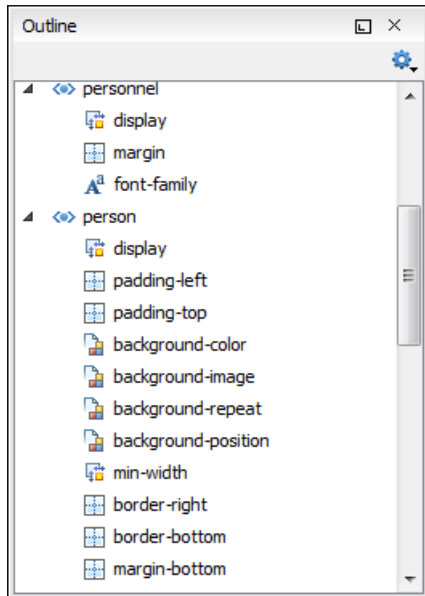


Figure 159: CSS Outline View

The selectors presented in this view can be found quickly using the key search field. When you press a sequence of character keys while the focus is in the view, the first selector that starts with that sequence is selected automatically.

Folding in CSS Stylesheets

In a large CSS stylesheet document, some styles can be collapsed so that only the styles that are needed remain in focus. The same [folding features available for XML documents](#) are also available in CSS stylesheets.



Note: To enhance your editing experience, you can select entire blocks (parts of text delimited by brackets) by double-clicking somewhere inside the brackets.

Formatting and Indenting CSS Stylesheets (Pretty Print)

If the edited CSS stylesheet becomes unreadable because of the bad alignment of the text lines, the [format and indent operation available for XML documents](#) is also available for CSS stylesheets. It works in the same way as for XML documents and is available as the same menu and toolbar action.

Minifying CSS Stylesheets

Minification (or *compression*) of a CSS document is the practice of removing unnecessary code without affecting the functionality of the stylesheet.

To minify a CSS, invoke the contextual menu anywhere in the edited document and choose the **Minify CSS** action. Oxygen XML Developer opens a dialog box that allows you to:

- Set the location of the resulting CSS.
- Place each style rule on a new line.

After pressing **OK**, Oxygen XML Developer performs the following actions:

- All spaces are normalized (all leading and trailing spaces are removed, while sequences of white spaces are replaced with single space characters).
- All comments are removed.



Note: The CSS minifier relies heavily upon the W3C CSS specification. If the content of the CSS file you are trying to minify does not conform with the specifications, an error dialog box will be displayed, listing all errors encountered during the processing.

The resulting CSS stylesheet gains a lot in terms of execution performance, but loses in terms of readability. The source CSS document is left unaffected.



Note: To restore the readability of a minified CSS, invoke the **Format and Indent** action from the **Document > Source** menu, the **Source** submenu from the contextual menu, or **Source** toolbar. However, this action will not recover any of the deleted comments.

Editing LESS CSS Stylesheets

Oxygen XML Developer provides support for stylesheets coded with the LESS dynamic stylesheet language. LESS extends the CSS language by adding features that allow mechanisms such as *variables*, *nesting*, *mixins*, *operators*, and *functions*. Oxygen XML Developer offers additional LESS features that include:

- Open LESS files - the LESS extension is recognized and thus can be opened by the editor
- Validation - presents errors in LESS files
- Content completion - offers properties and the values available for each property
- Compile to CSS - options are available to compile LESS files to CSS



Note: Oxygen XML Developer also support syntax highlighting in LESS files, although there may be some limitations in supporting all the LESS constructs.

For more information about LESS go to <http://lesscss.org/>.

Validating LESS Stylesheets

Oxygen XML Developer includes a built-in *LESS CSS Validator*, integrated with general validation support. The *usual validation features* for presenting errors also available for LESS stylesheets.

Oxygen XML Developer provides three validation methods:

- Automatic validation as you type - marks validation errors in the document as you are editing.
- Validation upon request, by pressing the  **Validate** button from the  ▾ **Validation** toolbar drop-down menu. An error list is presented in the message panel at the bottom of the editor.
- Validation scenarios, by selecting  **Configure Validation Scenario(s)** from the  ▾ **Validation** toolbar drop-down menu. Errors are presented in the message panel at the bottom of the editor. This is useful when you need to validate the current file as part of a larger LESS import hierarchy (for instance, you may change the URL of the file to validate to the root of the hierarchy).

Content Completion in LESS Stylesheets

A **Content Completion Assistant** offers the LESS properties and the values available for each property. It is activated with the **Ctrl Space (Command Space on OS X)** shortcut and is context-sensitive when invoked for the value of a property in a LESS file. The **Content Completion Assistant** also includes *code templates that can be used to quickly insert code fragments* into LESS stylesheets. The code templates that are proposed include form controls, actions, and **Author** mode operations.

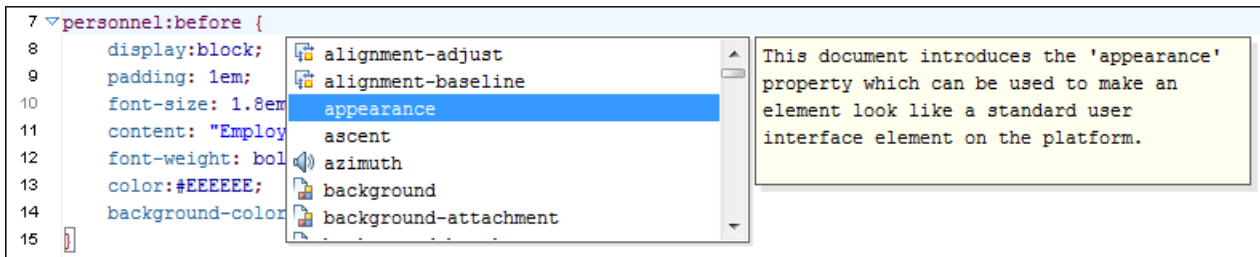


Figure 160: Content Completion in LESS Stylesheets

The properties and values available are dependent on the CSS Profile selected in the [CSS preferences](#).

Compiling LESS Stylesheets to CSS

When editing LESS files, you can compile the files into CSS. Oxygen XML Developer provides both manual and automatic options to compile LESS stylesheets into CSS.

Important: The LESS processor works well only with files having the *UTF-8* encoding. Thus, it is highly recommended that you always use the *utf-8* encoding when working with LESS files or the files they import (other LESS or CSS files). You can use the following directive at the beginning of your files:

```
@charset "utf-8";
```

You have two options for compiling LESS files to CSS:

1. Use the contextual menu in a LESS file and select **Compile to CSS (Ctrl Shift C (Meta Shift C on OS X))**.
2. Enable the option **Automatically compile LESS to CSS when saving** in the settings. To do so, [open the Preferences dialog box](#) and go to **Editor > Open > Save > Save hooks**. If enabled, when you save a LESS file it will automatically be compiled to CSS (this option is disabled by default).

Important: If this option is enabled, when you save a LESS file, the CSS file that has the same name as the LESS file is overwritten without warning. Make sure all your changes are made in the LESS file. Do not edit the CSS file directly, as your changes might be lost.

Editing Relax NG Schemas

Oxygen XML Developer provides a special type of editor for Relax NG schemas. This editor presents the usual text view of an XML document synchronized in real time with an outline view. The outline view has two display modes: the [standard outline](#) mode and the [components](#) mode.

Editing Relax NG Schema in the Master Files Context

Smaller interrelated modules that define a complex Relax NG Schema cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, an element defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main Relax NG document either using the [master files support from the Project view](#), or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger schema structure.
- **Content Completion Assistant** displays all the referable components valid in the current context. This include components defined in modules other than the currently edited one.
- The **Outline** displays the components collected from the entire schema structure;

Relax NG Schema Diagram

This section explains how to use the graphical diagram of a Relax NG schema.

Introduction to Relax NG Schema Diagram View

Oxygen XML Developer provides a simple, expressive, and easy to read **Schema Diagram** view for Relax NG schemas.

With this new feature you can easily develop complex schemas, print them on multiple pages or save them as JPEG, PNG, or BMP images. It helps both schema authors in developing the schema and content authors who are using the schema to understand it.

Oxygen XML Developer is the only XML editor to provide a side by side source and diagram presentation and have them real-time synchronized:

- The changes you make in the Editor are immediately visible in the Diagram (no background parsing).
- Changing the selected element in the diagram selects the underlying code in the source editor.

Full Model View

When you create a new schema document or open an existing one, the editor panel is divided in two sections: one containing the schema diagram and the second the source code. The **Diagram** view has two tabbed panes offering a **Full Model View** and a **Logical Model View**.

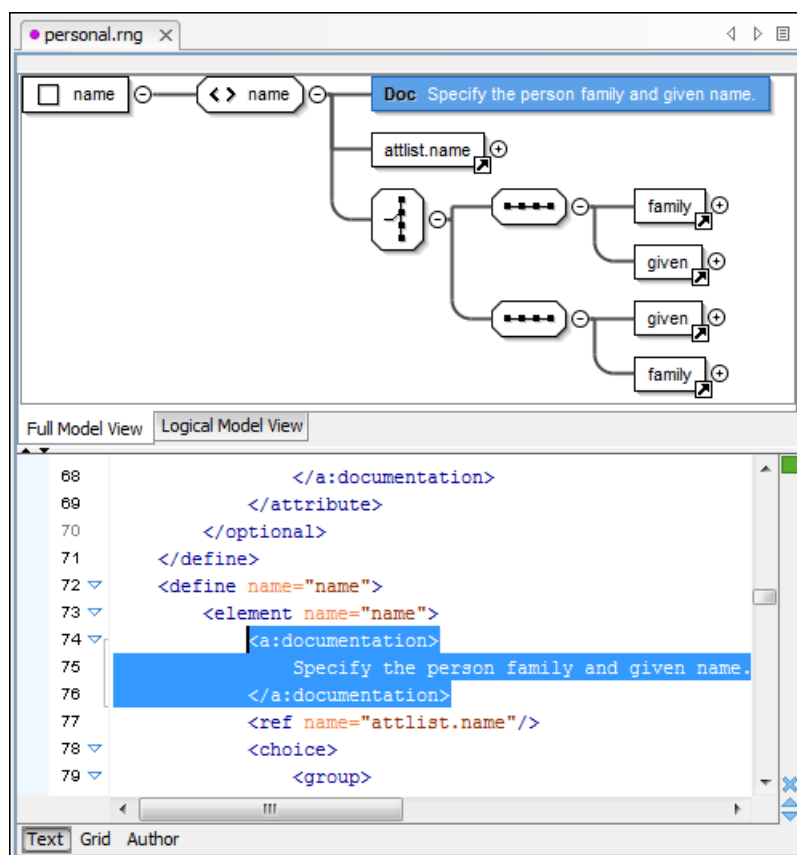








Figure 161: Relax NG Schema Editor - Full Model View

The following references can be expanded in place: patterns, includes, and external references. This expansion mechanism, coupled with the synchronization support, makes the schema navigation easy.

All the element and attribute names are editable: double-click any name to start editing it.

Symbols Used in the Schema Diagram

The **Full Model View** renders all the Relax NG Schema patterns with intuitive symbols:

-  - define pattern with the `name` attribute set to the value shown inside the rectangle (in this example `name`).
-  - define pattern with the `combine` attribute set to `interleave` and the `name` attribute set to the value shown inside the rectangle (in this example `attlist.person`).
-  - define pattern with the `combine` attribute set to `choice` and the `name` attribute set to the value shown inside the rectangle (in this example `attlist.person`).
-  - element pattern with the `name` attribute set to the value shown inside the rectangle (in this example `name`).
-  - attribute pattern with the `name` attribute set to the value shown inside the rectangle (in this case `note`).
-  - ref pattern with the `name` attribute set to the value shown inside the rectangle (in this case `family`).
-  - oneOrMore pattern.
-  - zeroOrMore pattern.
-  - optional pattern.
-  - choice pattern.
-  - value pattern, used for example inside a choice pattern.
-  - group pattern.
-  - pattern from the Relax NG Annotations namespace (<http://relaxng.org/ns/compatibility/annotations/1.0>) which is treated as a documentation element in a Relax NG schema.
-  - text pattern.
-  - empty pattern.

Logical Model View

The **Logical Model View** presents the compiled schema which is a single pattern. The patterns that form the element content are defined as top level patterns with generated names. These names are generated depending of the elements name class.

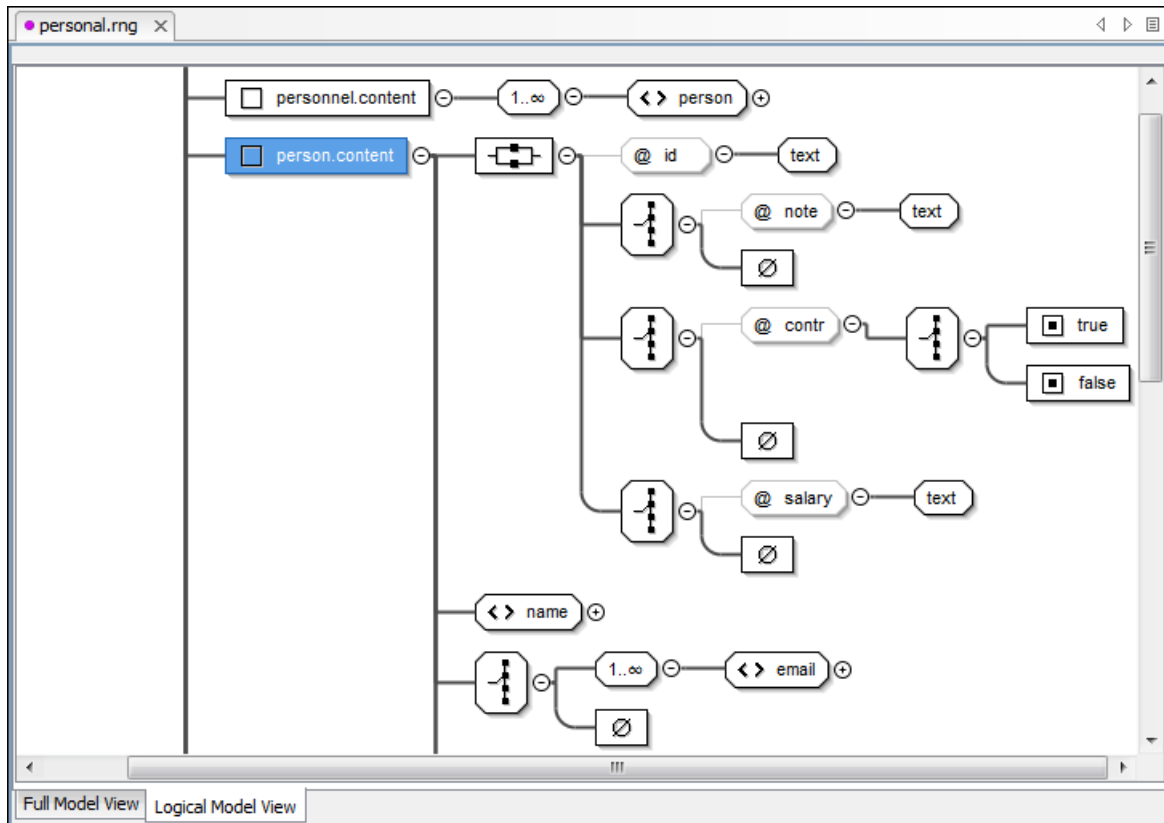


Figure 162: Logical Model View for a Relax NG Schema

Actions Available in the Schema Diagram View

When editing Relax NG schemas in **Full Model View**, the contextual menu offers the following actions:

Append child

Appends a child to the selected component.

Insert Before

Inserts a component before the selected component.

Insert After

Inserts a component after the selected component.

Edit attributes

Edits the attributes of the selected component.

Remove

Removes the selected component.

Show only the selected component

Depending on its state (selected/not selected), either the selected component or all the diagram components are shown.

Show Annotations

Depending on its state (selected/not selected), the documentation nodes are shown or hidden.

Auto expand to references

This option controls how the schema diagram is automatically expanded. If you select it and then edit a top-level element or you make a refresh, the diagram is expanded until it reaches referenced components. If this option is left unchecked, only the first level of the diagram is expanded, showing the top-level elements. For large schemas, the editor disables this option automatically.

Collapse Children

Collapses the children of the selected view.

Expand Children

Expands the children of the selected view.

Print Selection

Prints the selected view.

Save as Image

Saves the current selection as JPEG, BMP, SVG or PNG image.

**Refresh**

Refreshes the schema diagram according to the changes in your code. They represent changes in your imported documents or changes that are not reflected automatically in the compiled schema).

If the schema is not valid, you see only an error message in the **Logical Model View** instead of the diagram.

Relax NG Outline View

The Relax NG **Outline** view presents a list with the patterns that appear in the diagram in both the **Full Model View** and **Logical Model View** cases. It allows a quick access to a component by name. By default it is displayed on screen, but if you closed it you can reopen it from **Window > Show View > Outline**.

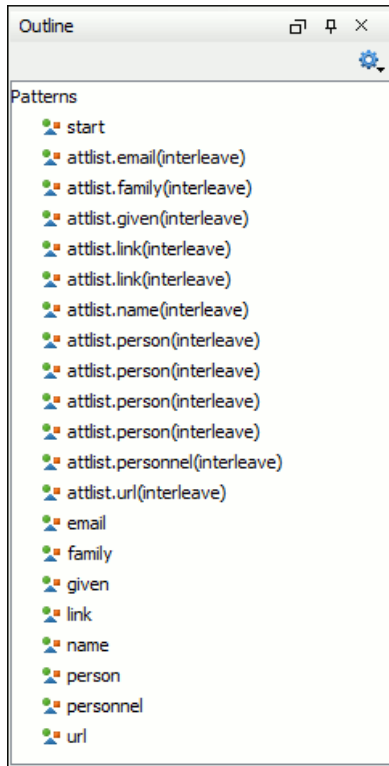


Figure 163: Relax NG Outline View

The tree shows the XML structure or the defined pattern (components) collected from the current document. By default, the **Outline** view presents the components.

When the  **Show components** option is selected in the  **Settings** menu on the **Outline** view toolbar, the following option is available:

**Show XML structure**

Shows the XML structure of the current document in a tree-like manner.

The following actions are available in the  **Settings** menu on the **Outline** view toolbar when the  **Show XML structure** option is selected:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.



Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram will be also selected in the **Outline** view.



Show components

Shows the defined pattern collected from the current document.



Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.



Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.



Show element name

Show/hide element name.



Show text

Show/hide additional text content for the displayed elements.



Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).



Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available in the **Outline** view when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.



Toggle Comment

Comments/uncomments the currently selected element.



Search references

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.



Component dependencies

Displays the dependencies of the currently selected component.

**Rename Component in**

Renames the currently selected component in the context of a scope that you define.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Expand More**

Expands the structure of a component in the **Outline** view.

**Collapse All**

Collapses the structure of all the component in the **Outline** view.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Searching and Refactoring Actions in RNG Schemas

Search Actions

The following search actions can be applied on named *defines* and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Show Definition** - Moves the cursor to the definition of the current element in the Relax NG (full syntax) schema.
 **Note:** You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on named *defines* and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position

are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.

-  **Rename Component in** - Opens the **Rename *component_type*** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

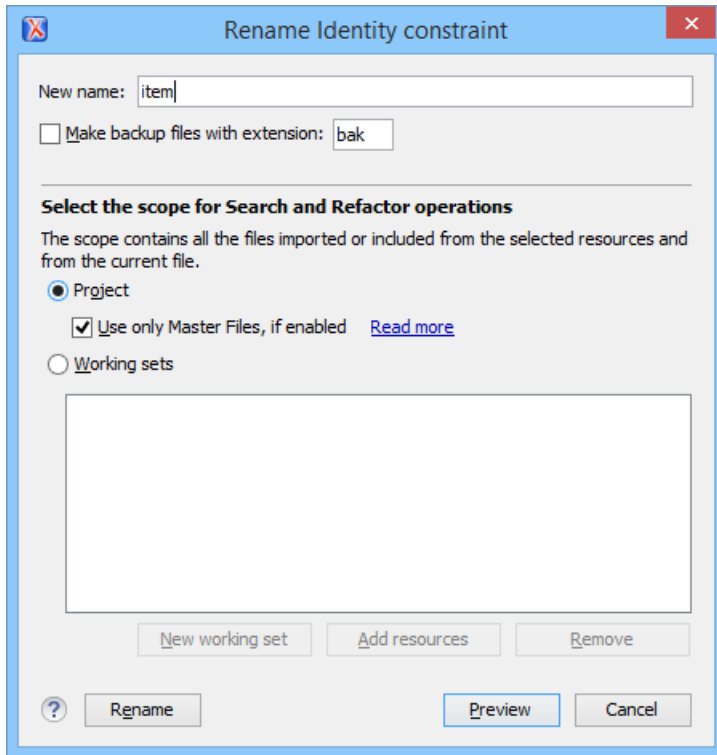


Figure 164: Rename Identity Constraint Dialog Box

RNG Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a schema. To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**.

If you want to see the hierarchy of a schema, select the desired schema in the project view and choose **Resource Hierarchy** from the contextual menu.

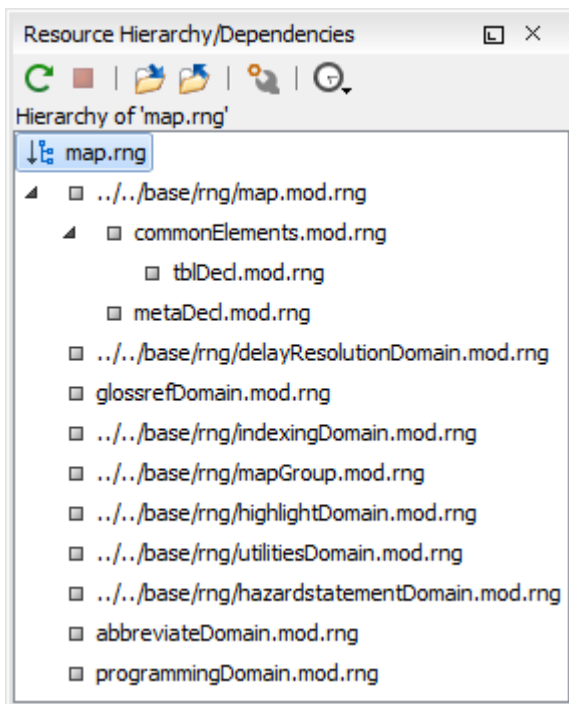


Figure 165: Resource Hierarchy/Dependencies View - hierarchy for map.rng

If you want to see the dependencies of a schema, select the desired schema in the project view and choose **Resource Dependencies** from the contextual menu.

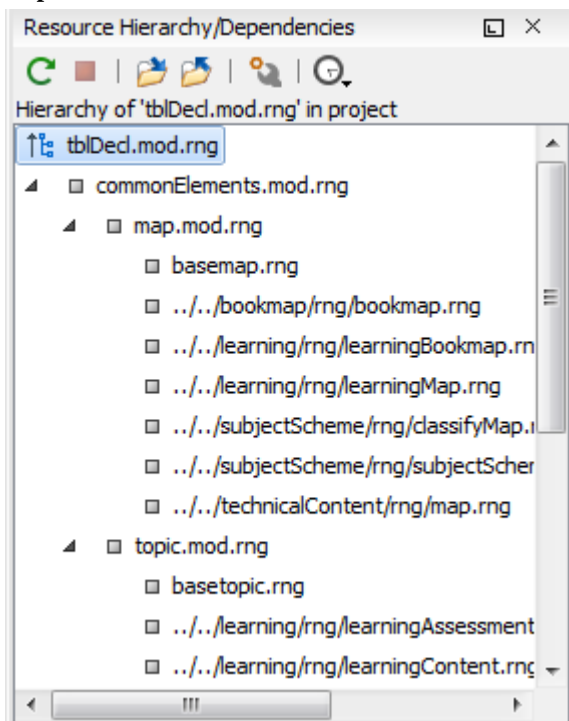


Figure 166: Resource Hierarchy/Dependencies View - Dependencies for tblDed.mod.rng

The following actions are available in the **Resource Hierarchy/Dependencies** view:



Refresh

Refreshes the Hierarchy/Dependencies structure.

**Stop**

Stops the hierarchy/dependencies computing.

**Show Hierarchy**

Allows you to choose a resource to compute the hierarchy structure.

**Show Dependencies**

Allows you to choose a resource to compute the dependencies structure.

**Configure**

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

**History**

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

**Add to Master Files**

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .



Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Moving/Renaming RNG Resources

You are able to move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.



Note: Updating the references of a resource that is resolved through a catalog is not supported. Also, the update references operation is not supported if the path to the renamed or moved resource contains entities.

Component Dependencies View for RelaxNG Schemas

The **Component Dependencies** view allows you to see the dependencies for a selected Relax NG component. You can open the view from **Window > Show View > Component Dependencies**.

If you want to see the dependencies of a RelaxNG component, select the desired component in the editor and choose the **Component Dependencies** action from the contextual menu. The action is available for all named defines.

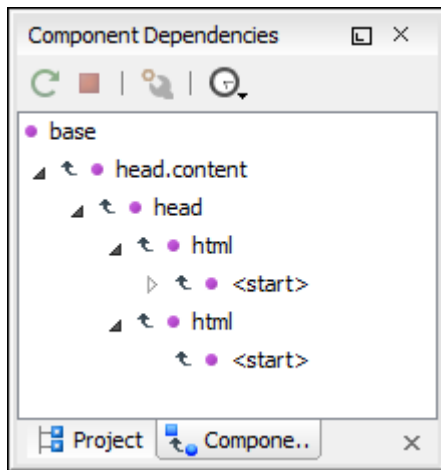


Figure 167: Component Dependencies View - Hierarchy for base.rng

In the Component Dependencies view you have several actions in the toolbar:



Refresh

Refreshes the dependencies structure.



Stop

Stops the dependencies computing.



Configure

Allows you to configure a search scope to compute the dependencies structure. You can decide to use automatically the defined scope for future operations by checking the corresponding checkbox.



History

Allows you to repeat a previous dependencies computation.

The following actions are available on the contextual menu:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Shows the definition of the current selected component in the dependencies tree.



Tip: If a component contains multiple references to another components, a small table is displayed that contains all references. When a recursive reference is encountered, it is marked with a special icon.

RNG Quick Assist Support

The *Quick Assist* support improves the development work flow, offering fast access to the most commonly used actions when you edit XML Schema documents.

The *Quick Assist* feature is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb help marker placed on the cursor line, in the line number stripe on the left side of the editor. Also, you can invoke the quick assist menu by using the **Alt + 1** keys (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

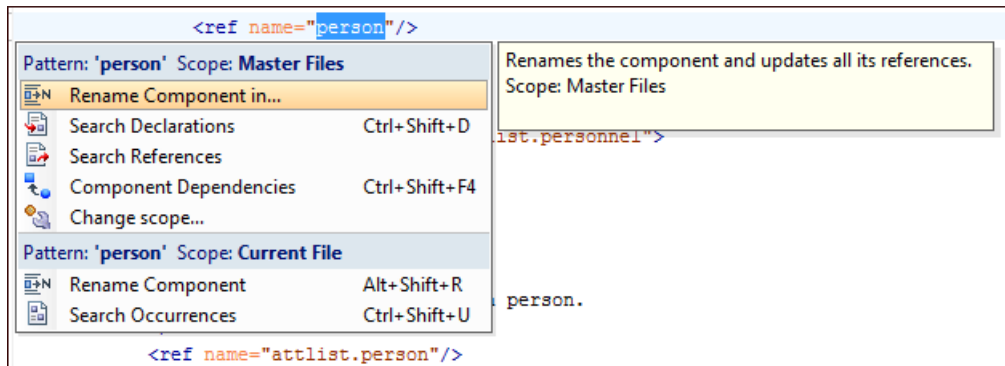


Figure 168: RNG Quick Assist Support

The quick assist support offers direct access to the following actions:



Rename Component in

Renames the component and all its dependencies.



Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.



Search References

Searches all references of the component in a predefined scope.



Component Dependencies

Searches the component dependencies in a predefined scope.



Change Scope

Configures the scope that will be used for future search or refactor operations.



Rename Component

Allows you to rename the current component in-place.



Search Occurrences

Searches all occurrences of the component within the current file.

Configuring a Custom Datatype Library for a RELAX NG Schema

A RELAX NG schema can declare a custom datatype library for the values of elements found in XML document instances. The datatype library must be developed in Java and it must implement the interface [specified on the www.thaiopensource.com website](http://www.thaiopensource.com).

The jar file containing the custom library and any other dependent jar file must be added to the classpath of the application, that is the jar files must be added to the folder `[OXYGEN_DIR]/lib`.

To load the custom library, restart Oxygen XML Developer.

Editing NVDL Schemas

Some complex XML documents are composed by combining elements and attributes from different namespaces. More, the schemas that define these namespaces are not even developed in the same schema language. In such cases, it is difficult to specify in the document all the schemas which must be taken into account for validation of the XML document or for content completion. An NVDL (Namespace Validation Definition Language) schema can be used. This schema allows the application to combine and interleave multiple schemas of different types (W3C XML Schema, RELAX NG schema, Schematron schema) in the same XML document.

Oxygen XML Developer provides a special type of editor for NVDL schemas. This editor presents the usual text view of an XML document synchronized in real time with an outline view. The outline view has two display modes: the *standard outline* mode and the *components* mode.

NVDL Schema Diagram

This section explains how to use the graphical diagram of a NVDL schema.

Introduction to NVDL Schema Diagram View

Oxygen XML Developer provides a simple, expressive, and easy to read **Schema Diagram** view for NVDL schemas.

With this new feature you can easily develop complex schemas, print them on multiple pages or save them as JPEG, PNG, and BMP images. It helps both schema authors in developing the schema and content authors that are using the schema to understand it.

Oxygen XML Developer is the only XML Editor to provide a side by side source and diagram presentation and have them real-time synchronized:

- The changes you make in the Editor are immediately visible in the Diagram (no background parsing).
- Changing the selected element in the diagram, selects the underlying code in the source editor.

Full Model View

When you create a schema document or open an existing one, the editor panel is divided in two sections: one containing the schema diagram and the second the source code. The diagram view has two tabbed panes offering a **Full Model View** and a **Logical Model View**.

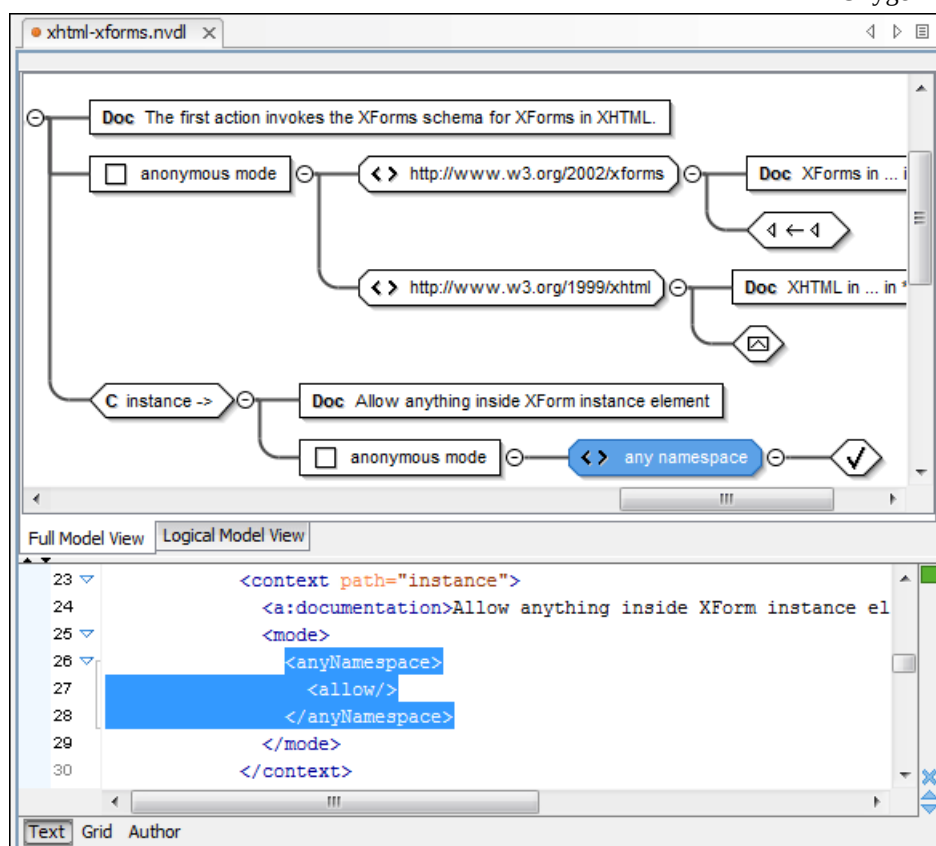


Figure 169: NVDL Schema Editor - Full Model View

The **Full Model View** renders all the NVDL elements with intuitive icons. This representation coupled with the synchronization support makes the schema navigation easy.

Double-click any diagram component in order to edit its properties.

Actions Available in the Diagram View

The contextual menu offers the following actions:

Show only the selected component

Depending on its state (selected/not selected), either the selected component or all the diagram components are shown.

Show Annotations

Depending on its state (selected/not selected), the documentation nodes are shown or hidden.

Auto expand to references

This option controls how the schema diagram is automatically expanded. For instance, if you select it and then edit a top-level element or you trigger a diagram refresh, the diagram will be expanded until it reaches the referenced components. If this option is left unchecked, only the first level of the diagram is expanded, showing the top-level elements. For large schemas, the editor disables this option automatically.

Collapse Children

Collapses the children of the selected view.

Expand Children

Expands the children of the selected view.

Print Selection

Prints the selected view.

Save as Image

Saves the current selection as image, in JPEG, BMP, SVG or PNG format.

Refresh

Refreshes the schema diagram according to the changes in your code (changes in your imported documents or those that are not reflected automatically in the compiled schema).

If the schema is not valid, you see only an error message in the **Logical Model View** instead of the diagram.

NVDL Outline View

The NVDL **Outline** view presents a list with the named or anonymous rules that appear in the diagram. It allows a quick access to a rule by name. It can be opened from the **Window > Show View > Outline** menu.

Searching and Refactoring Actions in NVDL Schemas

Search Actions

The following search actions can be applied on `name`, `useMode`, and `startMode` attributes and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Show Definition** - Moves the cursor to its definition in the schema used by NVDL in order to validate it.



Note: You can also use the **Ctrl Single-Click (Command Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on `name`, `useMode`, and `startMode` attributes and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename component_type** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

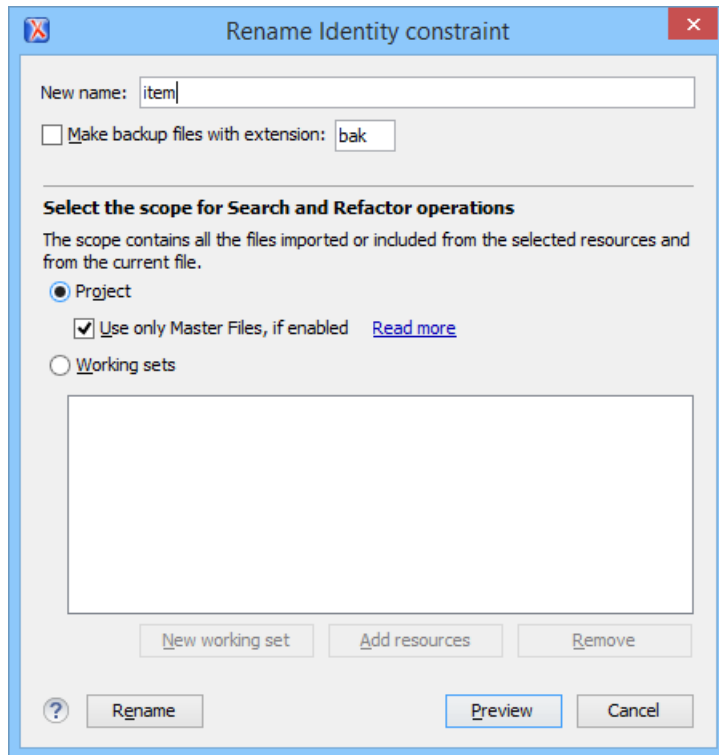


Figure 170: Rename Identity Constraint Dialog Box

Component Dependencies View for NVDL Schemas

The **Component Dependencies** view allows you to see the dependencies for a selected NVDL named mode. You can open the view from **Window > Show View > Component Dependencies**.

If you want to see the dependencies of an NVDL mode, select the desired component in the editor and choose the **Component Dependencies** action from the contextual menu. The action is available for all named modes.

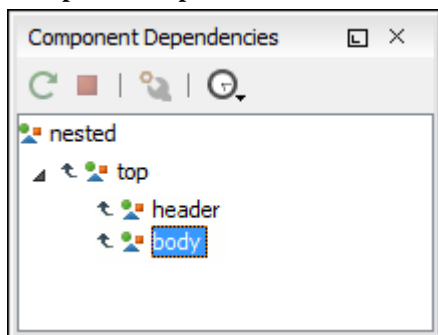


Figure 171: Component Dependencies View - Hierarchy for test.nvdl

In the **Component Dependencies** the following actions are available on the toolbar:



Refresh

Refreshes the dependencies structure.



Stop

Allows you to stop the dependencies computing.

**Configure**

Allows you to configure a search scope to compute the dependencies structure. If you decide to set the application to use automatically the defined scope for future operations, select the corresponding checkbox.

**History**

Repeats a previous dependencies computation.

The following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the referenced component from the current selected component in the dependencies tree.

Go to Component

Shows the definition of the current selected component in the dependencies tree.



Tip: If a component contains multiple references to another component, a small table containing all references is displayed. When a recursive reference is encountered it is marked with a special icon

Editing JSON Documents

This section explains the features of the Oxygen XML Developer JSON Editor and how to use them.

Editing JSON Documents in Text Mode

The **Text Mode** of the JSON editor provides the usual actions specific for a plain text editor: undo / redo, copy / paste, find / replace, drag and drop, and other editor actions like [validation](#) and [formatting and indenting \(pretty print\) document](#).

You can use the two **Text** and **Grid** buttons available at the bottom of the editor panel if you want to switch between the editor **Text Mode** and **Grid Mode**.

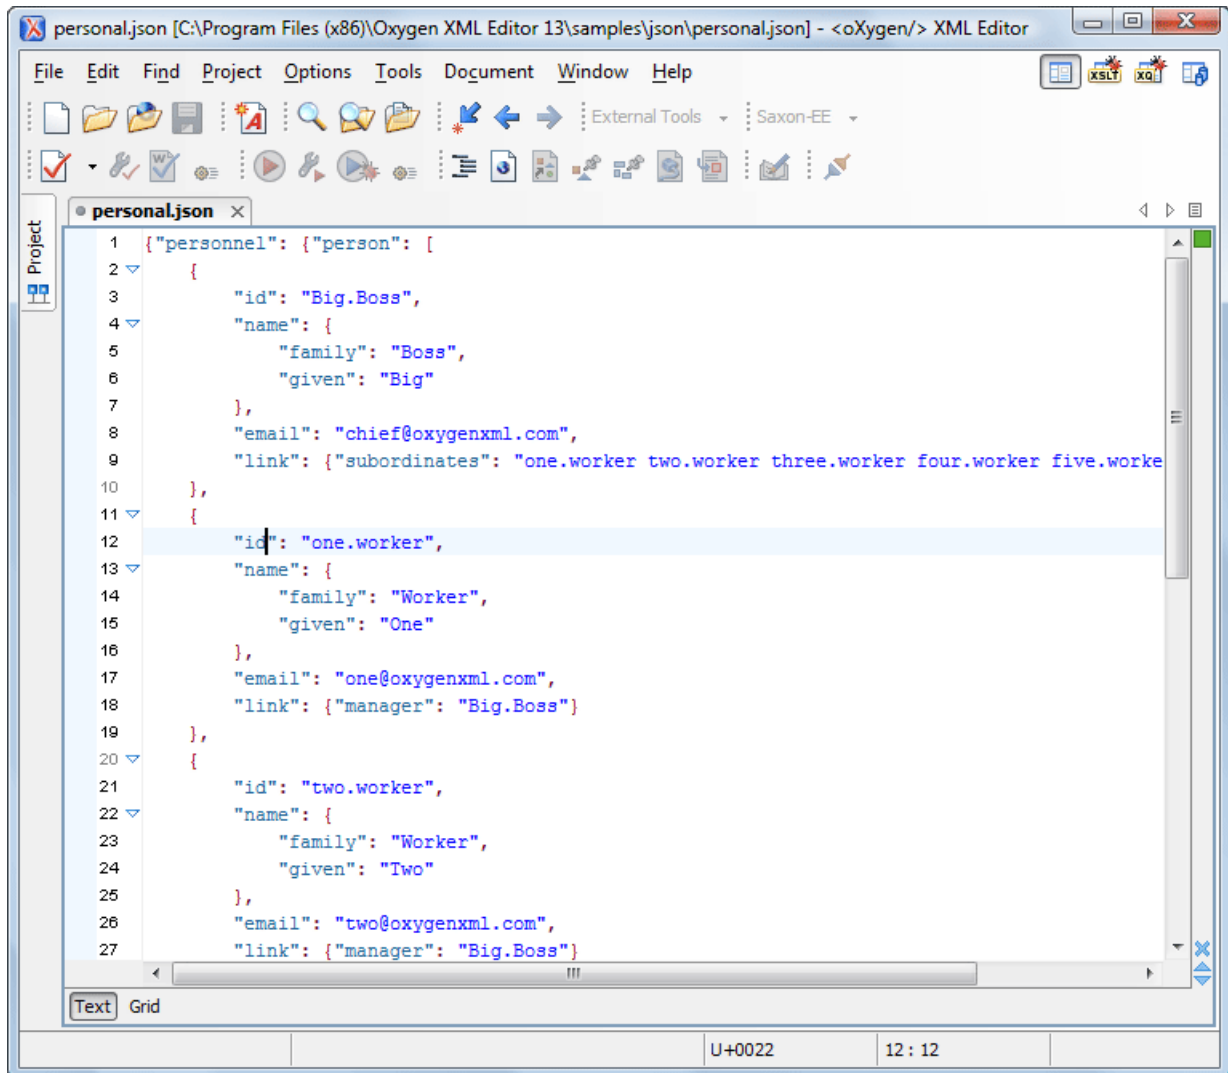


Figure 172: JSON Editor Text Mode

Syntax Highlight in JSON Documents

Oxygen XML Developer supports *Syntax Highlight* for JavaScript / JSON editors and provides default configurations for the JSON set of tokens. You can customize the foreground color, background color and the font style for each JSON token type.

Folding in JSON

In a large JSON document, the data enclosed in the '{' and '}' characters can be collapsed so that only the needed data remain in focus. The *folding features available for XML documents* are available in JSON documents.

Editing JSON Documents in Grid Mode

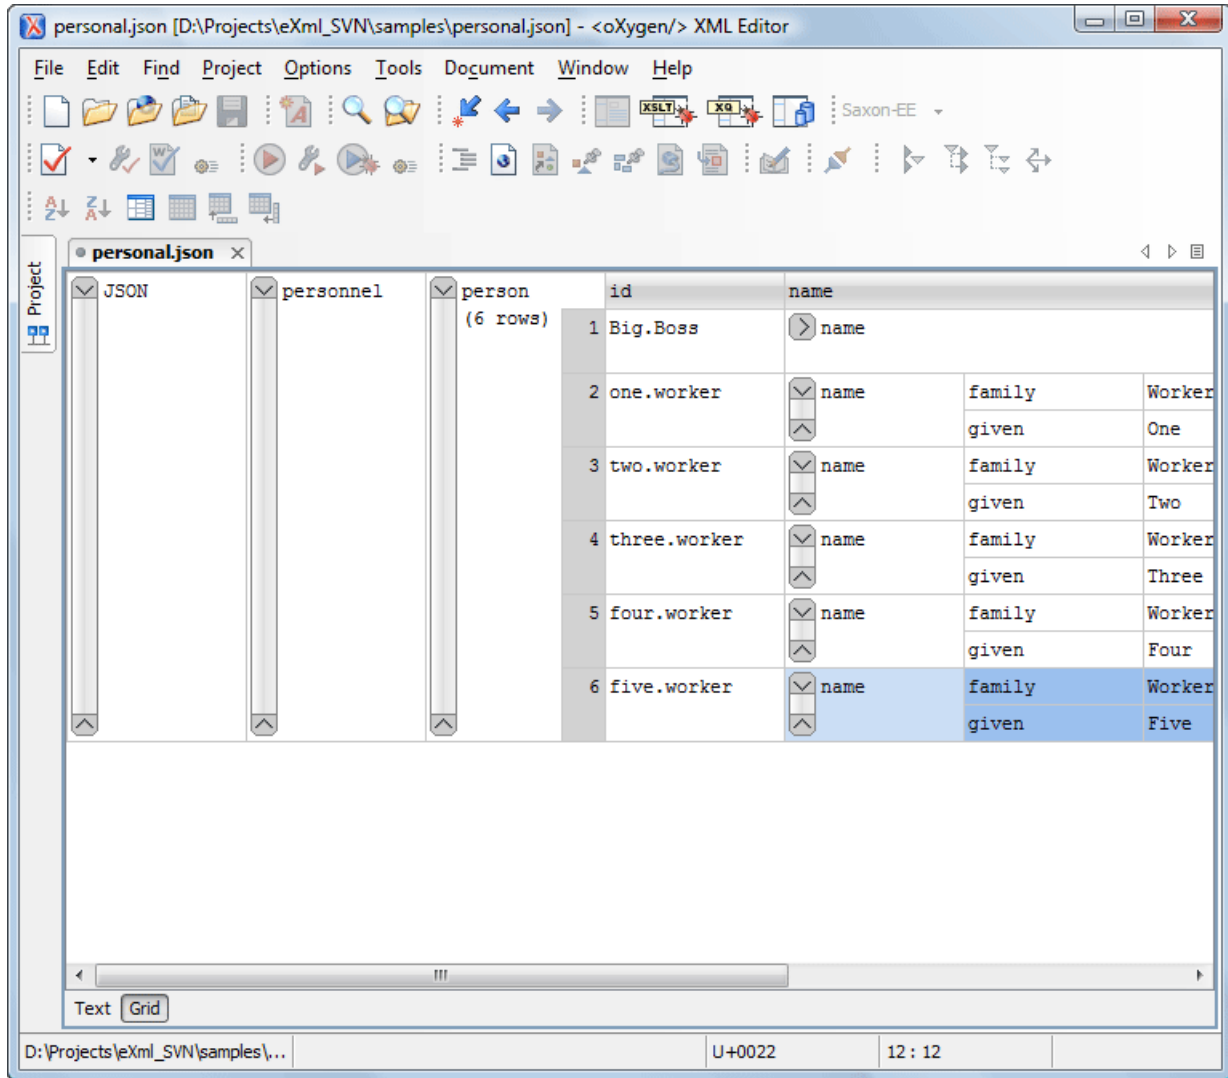


Figure 173: JSON Editor Grid Mode

Oxygen XML Developer allows you to view and edit the JSON documents in the [Grid Mode](#). The JSON is represented in **Grid** mode as a compound layout of nested tables in which the JSON data and structure can be easily manipulated with table-specific operations or drag and drop operations on the grid components. You can also use the following JSON-specific contextual actions:

Array

Useful when you want to convert a JSON *value* to *array*.

Insert value before

Inserts a value before the currently selected one.

Insert value after

Inserts a value after the currently selected one.

Append value as child

Appends a value as a child of the currently selected value.

You can [customize the JSON grid appearance](#) according to your needs. For instance you can change the font, the cell background, foreground, or even the colors from the table header gradients. The default width of the columns can also be changed.

JSON Outline View

The JSON **Outline** view displays the list of all the components of the JSON document you are editing. To enable the JSON **Outline** view, go to **Window > Show view > Outline**.

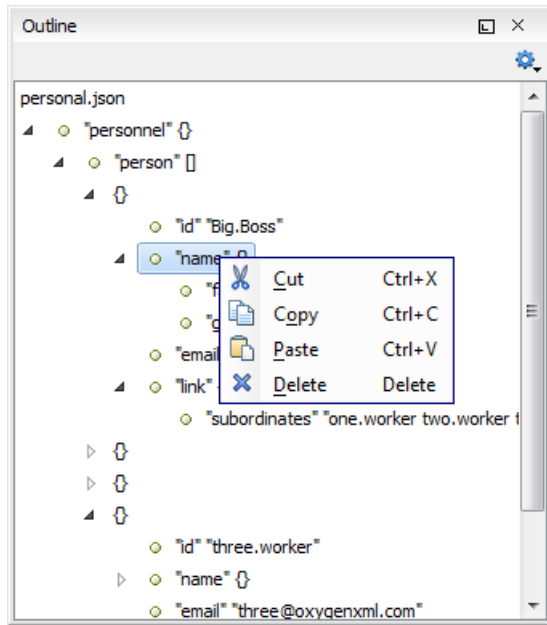


Figure 174: The JSON Outline View

The following actions are available in the contextual menu of the JSON **Outline** view:

-  **Cut**
-  **Copy**
-  **Paste**
-  **Delete**

The  **Settings** menu on the JSON **Outline** view toolbar allows you to enable  **Selection update on cursor move**. This option controls the synchronization between the **Outline** view and source the document. Oxygen XML Developer synchronizes the selection in the **Outline** view with the cursor moves or the changes you make in the JSON editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.


Validating JSON Documents

Oxygen XML Developer includes a built-in JSON validator (based on the free JAVA source code available on www.json.org), integrated with the general validation support.

Convert XML to JSON


The steps for converting an XML document to JSON are the following:

1. Select the **XML to JSON** action from the **Tools** menu.
The **XML to JSON** dialog box is displayed:

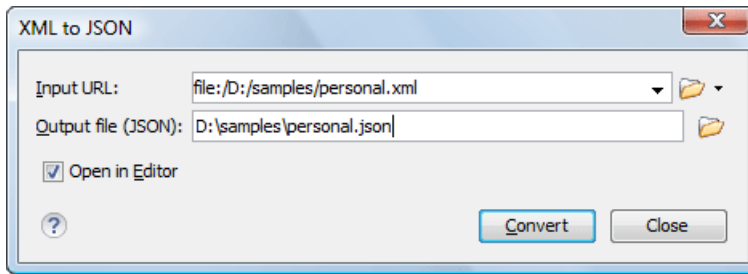

2. Choose or enter the **Input URL** of the XML document.
3. Choose the **Output file** that will contain the conversion JSON result.
4. Check the **Open in Editor** option to open the JSON result of the conversion in the Oxygen XML Developer JSON Editor
5. Click the **OK** button.

The operation result will be a document containing the JSON conversion of the input XML URL.

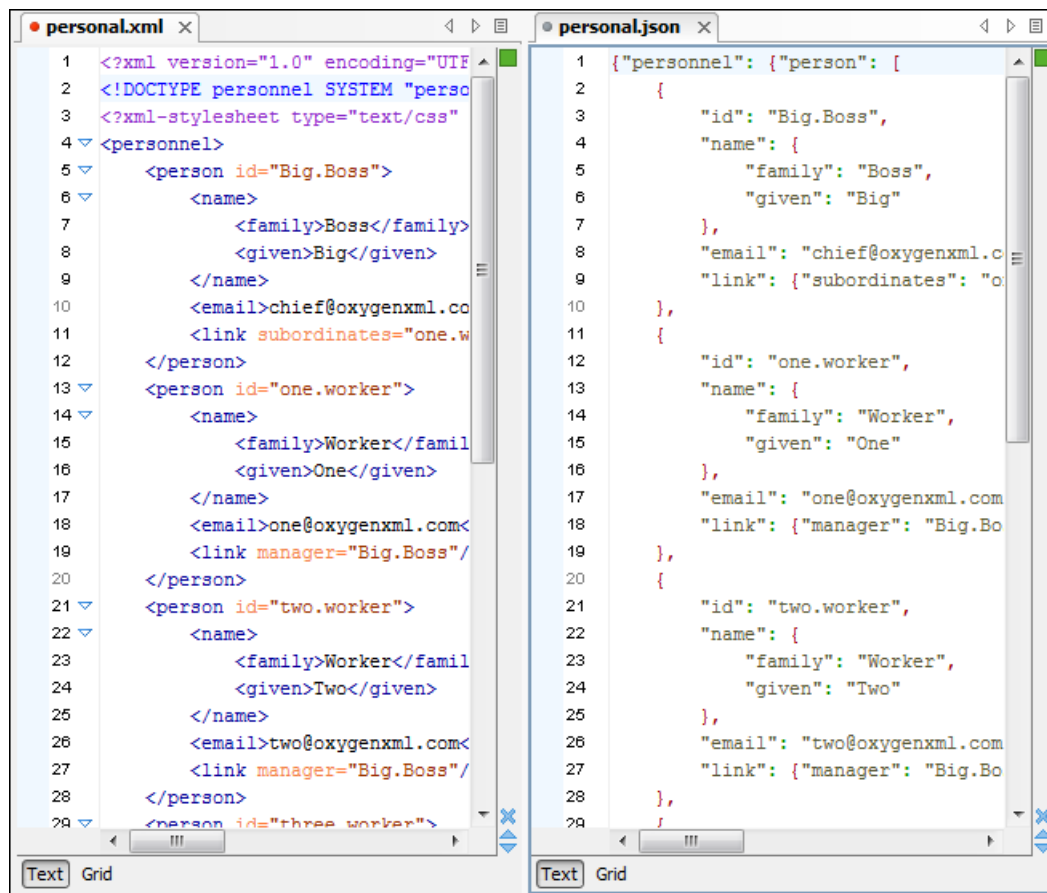

Editing StratML Documents

Strategy Markup Language (StratML) is an XML vocabulary and schema for strategic plans. Oxygen XML Developer supports StratML Part 1 (Strategic Plan) and StratML Part 2 (Performance Plans and Reports) and provides templates for the following documents:

- **Strategic Plan** (StratML Part 1)
- **Performance Plan** (StratML Part 2)
- **Performance Report** - (StratML Part 2)

- **Strategic Plan** - (StratML Part 2)

You can view the components of a StratML document in the **Outline** view. Oxygen XML Developer implements a default XML with XSLT transformation scenario for this document type, called StratML to HTML.

Editing XLIFF Documents

XLIFF (*XML Localisation Interchange File Format*) is an XML-based format that was designed to standardize the way multilingual data is passed between tools during a localization process. Oxygen XML Developer provides the following support for editing XLIFF documents:

XLIFF Version 1.2 and 2.0 Support:

- New file templates for XLIFF documents.
- A default CSS file (`xliff.css`) used for rendering XLIFF content in **Author** mode is stored in `[OXYGEN_DIR]/frameworks/xliff/css/`.
- Validation and content completion support using local catalogs. The default catalog (`catalog.xml`) for version 1.2 is stored in `[OXYGEN_DIR]/frameworks/xliff/xsd/1.2`, and for version 2.0 in `[OXYGEN_DIR]/frameworks/xliff/xsd/2.0`.

XLIFF Version 2.0 Enhanced Support:

- Support for validating XLIFF 2.0 documents using modules. The default modules are stored in `[OXYGEN_DIR]/frameworks/xliff/xsd/2.0/modules`.

Editing JavaScript Documents

This section explains the features of the Oxygen XML Developer JavaScript Editor and how you can use them.

JavaScript Editor Text Mode

Oxygen XML Developer allows you to create and edit JavaScript files and assists you with useful features such as syntax highlight, content completion, and outline view. To enhance your editing experience, you can select entire blocks (parts of text delimited by brackets) by double-clicking somewhere inside the brackets.

```

12 function newPage(filename, overlay) {
13     divs = document.getElementsByTagName("div");
14
15     if (divs) {
16         var xdiv = divs[0];
17
18         if (xdiv) {
19             var xid = xdiv.getAttribute("id");
20
21             var mytoc = window.top.frames[0];
22             if (mytoc.lastUnderlined) {
23                 mytoc.lastUnderlined.style.textDecoration = "none";
24             }
25
26             var tdiv = xbGetElementById(xid, mytoc);
27
28             if (tdiv) {
29                 var ta = tdiv.getElementsByTagName("a").item(0);
30                 ta.style.textDecoration = "underline";
31                 mytoc.lastUnderlined = ta;
32             }
33         }
34     }
35
36     if (overlay != 0) {
37         overlaySetup('lc');
38     }

```

Figure 175: JavaScript Editor Text Mode

The contextual menu of the **JavaScript** editor offers the following actions:



Cut

Allows you to cut fragments of text from the editing area.



Copy

Allows you to copy fragments of text from the editing area.



Paste

Allows you to paste fragments of text in the editing area.



Toggle Comment

Allows you to comment a line or a fragment of the JavaScript document you are editing. This option inserts a single comment for the entire fragment you want to comment.



Toggle Line Comment

Allows you to comment a line or a fragment of the JavaScript document you are editing. This option inserts a comment for each line of the fragment you want to comment.

Go to Matching Bracket

Use this option to find the closing, or opening bracket, matching the bracket at the cursor position. When you select this option, Oxygen XML Developer moves the cursor to the matching bracket, highlights its row, and decorates the initial bracket with a rectangle.



Note: A rectangle decorates the opening, or closing bracket which matches the current one at all times.

Source

Allows you to select one of the following actions:

To Lower Case

Converts the selection content to lower case characters.

To Upper Case

Converts the selection content to upper case characters.

Capitalize Lines

Converts to upper case the first character of every selected line.

Join and Normalize Lines

Joins all the rows you select to one row and normalizes the content.

Insert new line after

Inserts a new line after the line at the cursor position.

Modify all matches

Use this option to modify (in-place) all the occurrences of the selected content. When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Open

Allows you to select one of the following actions:

- **Open File at Cursor** - select this action to open the source of the file located at the cursor position
- **Open File at Cursor in System Application** - select this action to open the source of the file located at the cursor position with the application that the system associates with the file

Compare

Select this option to open the **Diff Files** dialog box and compare the file you are editing with a file you choose in the dialog box.

Folding

When you invoke the contextual menu from the folding stripe on the left side of the editor, the following actions are available:

 Collapse Other Folds (Ctrl NumPad / (Meta NumPad / on OS X))

Folds all the elements except the current element.

 Collapse Child Folds (Ctrl NumPad . (Meta NumPad . on OS X))

Folds the elements indented with one level inside the current element.

 Expand Child Folds

Unfolds all child elements of the currently selected element.

 Expand All (Ctrl NumPad * (Meta NumPad * on OS X))

Unfolds all elements in the current document.

Content Completion in JavaScript Files

When you edit a JavaScript document, the **Content Completion Assistant** presents you a list of the elements you can insert at the cursor position. For an enhanced assistance, JQuery methods are also presented. The following icons decorate the elements in the content completion list of proposals depending on their type:

-  - function
-  - variable
-  - object
-  - property
-  - method



Note: These icons decorate both the elements from the content completion list of proposals and from the **Outline** view.

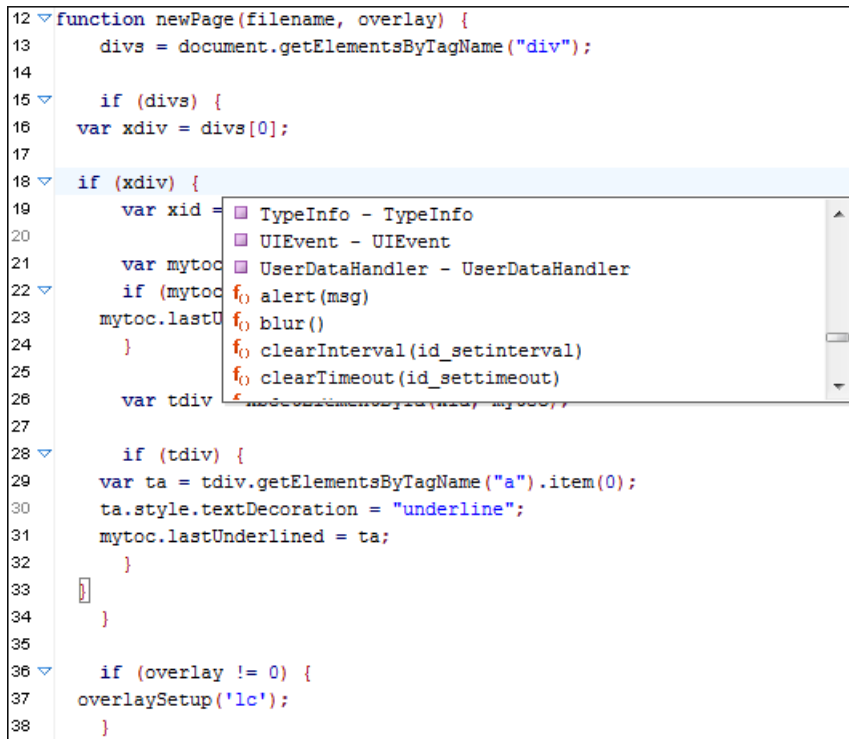


Figure 176: JavaScript Content Completion Assistant

The **Content Completion Assistant** collects:

- Method names from the current file and from the library files.
- Functions and variables defined in the current file.

If you edit the content of a function, the content completion list of proposals contains all the local variables defined in the current function, or in the functions that contain the current one.

JavaScript Outline View

Oxygen XML Developer present a list of all the components of the JavaScript document you are editing in the **Outline** view. To open the **Outline** view, go to **Window > Show View > Outline**.

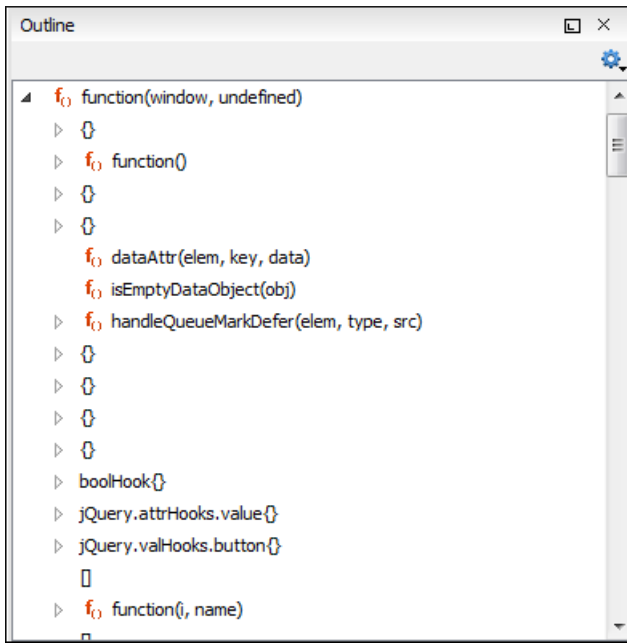


Figure 177: The JavaScript Outline View

The following icons decorate the elements in the **Outline** view depending on their type:

-  - function
-  - variable
-  - object
-  - property
-  - method

The contextual menu of the JavaScript **Outline** view contains the usual  **Cut**,  **Copy**,  **Paste**, and  **Delete** actions. From the settings menu, you can enable the Update selection on cursor move option to synchronize the **Outline** view with the editing area.

Validating JavaScript Files

You have the possibility to validate the JavaScript document you are editing. Oxygen XML Developer uses the Mozilla Rhino library for validation. For more information about this library, go to <http://www.mozilla.org/rhino/doc.html>. The JavaScript validation process checks for errors in the syntax. Calling a function that is not defined is not treated as an error by the validation process. The interpreter discovers this error when executing the faulted line. Oxygen XML Developer can validate a JavaScript document both on-request and automatically.

Editing XProc Scripts

An XProc script is edited as an XML document that is validated against a RELAX NG schema. If the script has an associated transformation scenario, then the XProc engine from the scenario is invoked as validating engine. The default engine for XProc scenarios is the Calabash engine which comes bundled with Oxygen XML Developer version 17.1.

The content completion inside the element `input/inline` from the XProc namespace <http://www.w3.org/ns/xproc> offers elements from the following schemas depending both on the `port` attribute and the parent of the `input` element. When invoking the content completion inside the XProc element `inline`, the **Content Completion Assistant**'s proposals list is populated as follows:

- If the value of the `port` attribute is `stylesheet` and the `xslt` element is the parent of the `input` elements, the **Content Completion Assistant** offers XSLT elements.

- If the value of the `port` attribute is `schema` and the `validate-with-relax-ng` element is the parent of the `input` element, the **Content Completion Assistant** offers RELAX NG schema elements.
- If the value of the `port` attribute is `schema` and the `validate-with-xml-schema` element is the parent of the `input` element, the **Content Completion Assistant** offers XML Schema schema elements.
- If the value of the `port` attribute is `schema` and the `validate-with-schematron` element is the parent of the `input` element, the **Content Completion Assistant** offers either ISO Schematron elements or Schematron 1.5 schema elements.
- If the above cases do not apply, then the **Content Completion Assistant** offers elements from all the schemas from the above cases.

The XProc editor assists you in writing XPath expressions by offering a **Content Completion Assistant** and dedicated coloring schemes. To customize the coloring schemes, [open the Preferences dialog box](#) and go to **Editor > Syntax Highlight**.

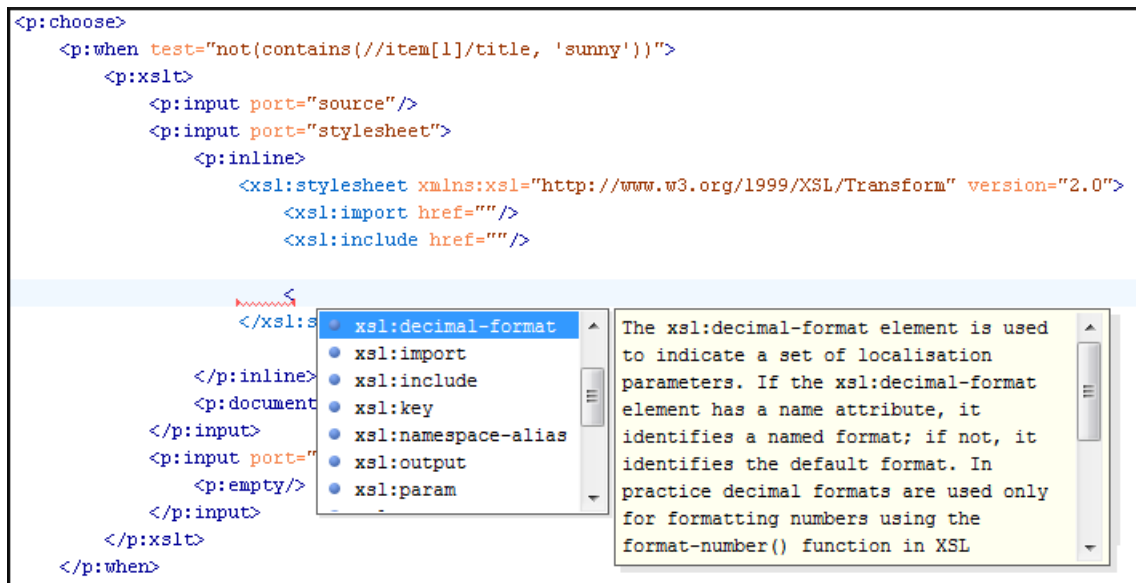


Figure 178: XProc Content Completion

Editing Schematron Schemas

Schematron is a simple and powerful Structural Schema Language for making assertions about patterns found in XML documents. It relies almost entirely on XPath query patterns for defining rules and checks. Schematron validation rules allow you to specify a meaningful error message. This error message is provided to you if an error is encountered during the validation stage.

The Skeleton XSLT processor is used for validation and conforms with ISO Schematron or Schematron 1.5. It allows you to validate XML documents against Schematron schemas or against combined RELAX NG / W3C XML Schema and Schematron.

Oxygen XML Developer assists you in editing Schematron documents with schema-based content completion, syntax highlight, search and refactor actions, and dedicated icons for the **Outline** view. You can create a new Schematron schema using one of the Schematron templates available in the New Document wizard.

You can specify the query language binding to be used in the Schematron schema by doing the following:

- For embedded ISO schematron, [open the Preferences dialog box](#), go to **XML > XML Parser > Schematron**, and select it in the **Embedded rules query language binding** option.
- For standalone ISO Schematron, specify the version by setting the query language to be used in a `queryBinding` attribute on the schema root element. For more information see the [Query Language Binding section of the Schematron specifications](#).

- For Schematron 1.5 (standalone and embedded), [open the Preferences dialog box](#), go to **XML > XML Parser > Schematron**, and select the version in the **XPath Version** option.

The Schematron editor renders the XPath expressions with dedicated coloring schemes. To customize the coloring schemes, [open the Preferences dialog box](#) and go to **Editor > Syntax Highlight**.

To watch our video demonstration about the Schematron support in Oxygen XML Developer, go to http://www.oxygenxml.com/demo/Schematron_Validation.html, and to http://www.oxygenxml.com/demo/Editing_Schematron_Schemas/Editing_Schematron_Schemas.html.



Note: When you create a Schematron document, Oxygen XML Developer provides a built-in transformation scenario. You are able to use this scenario to obtain the XSLT style-sheet corresponding to the Schematron schema. You can apply this XSLT stylesheet to XML documents to obtain the Schematron validation results.

Validate an XML Document Against Schematron

To validate an XML document against a Schematron schema, select the **Validate** action from the **Validation** toolbar drop-down menu, or the **Document > Validate** menu, or from the **Validate** menu when invoking the contextual menu in the **Project** view.

If you would like to add a persistence association between your Schematron rules and the current edited XML document, use the **Associate Schema** action from the **Document > Schema** menu or the **Document** toolbar. A custom processing instruction is added into the document and the validation process will take into account the Schematron rules:

PI Added by the Associate Schema Action

```
<?xml-model href="percent.sch" type="application/xml"
schematypens="http://purl.oclc.org/dsdl/schematron"?>
```

The possible errors that might occur during the validation process are presented in the **Errors** panel at the bottom area of the Oxygen XML Developer window. Each error is flagged with a severity level that can be one of *warning*, *error*, *fatal* or *info*.

To set a severity level, Oxygen XML Developer looks for the following information:

- The **role** attribute, which can have one of the following values:
 - warn** or **warning**, to set the severity level to *warning*
 - error**, to set the severity level to *error*
 - fatal**, to set the severity level to *fatal*
 - info** or **information**, to set the severity level to *info*
- The start of the message, after trimming leading white-spaces. Oxygen XML Developer looks to match the following exact string of characters (case sensitive):
 - Warning:**, to set the severity level to *warning*
 - Error:**, to set the severity level to *error*
 - Fatal:**, to set the severity level to *fatal*
 - Info:**, to set the severity level to *info*



Note: Displayed message does not contain the matched prefix.

- If none of the previous rules match, Oxygen XML Developer sets the severity level to *error*.

Validating Schematron Documents

By default, a Schematron schema is validated as you type. To change this, [open the Preferences dialog box](#), go to **Editor > Document Checking**, and disable the **Enable automatic validation** option.

To validate your Schematron document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document** > **Validate** menu. When Oxygen XML Developer validates a Schematron schema, it expands all the included modules so the entire schema hierarchy is validated. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Oxygen XML Developer offers an error management mechanism capable of pinpointing errors in XPath expressions and in the included schema modules.

Content Completion in Schematron Documents

Oxygen XML Developer helps you edit a Schematron schema, offering, through the Content Completion Assistant, items that are valid at the cursor position. When you edit the value of an attribute that refers a component, the proposed components are collected from the entire schema hierarchy. For example, if the editing context is `phase/active/@pattern`, the Content Completion Assistant proposes all the defined patterns.

 **Note:** For Schematron resources, the Content Completion Assistant collects its components starting from the master files. The master files can be defined in the project or in the associated validation scenario. For further details about the **Master Files** support go to [Defining Master Files at Project Level](#).

If the editing context is an attribute value that is an XPath expression (like `assert/@test` or `report/@test`), the Content Completion Assistant offers the names of XPath functions, the XPath axes, and user-defined variables.

The **Content Completion Assistant** displays XSLT 1.0 functions and optionally XSLT 2.0 / 3.0 functions in the attributes *path*, *select*, *context*, *subject*, *test* depending on [the Schematron options](#) that are set in Preferences pages. If the Saxon 6.5.5 namespace (`xmlns:saxon="http://icl.com/saxon"`) or the Saxon 9.6.0.7 namespace is declared in the Schematron schema (`xmlns:saxon="http://saxon.sf.net/"`) the content completion also displays the XSLT Saxon extension functions as in the following figure:

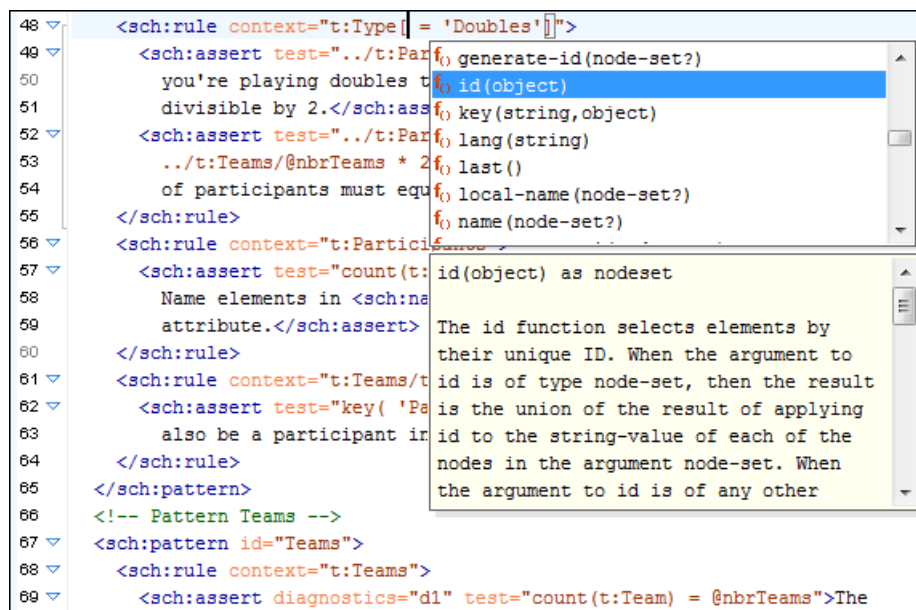


Figure 179: XSLT extension functions in Schematron schemas documents

The **Content Completion Assistant** also includes [code templates that can be used to quickly insert code fragments](#) into Schematron documents.

RELAX NG/XML Schema with Embedded Schematron Rules

Schematron rules can be embedded into an XML Schema through annotations (using the `appinfo` element), or in any element on any level of a RELAX NG Schema (taking into account that the RELAX NG validator ignores all elements that are not in the RELAX NG namespace).

Oxygen XML Developer accepts such documents as Schematron validation schemas and it is able to extract and use the embedded rules. To validate an XML document with both RELAX NG schema and its embedded Schematron rules, you need to associate the document with both schemas. For example:

```
<?xml-model href="percent.rng" type="application/xml"
schematypens="http://relaxng.org/ns/structure/1.0"?>
<?xml-model href="percent.rng" type="application/xml"
schematypens="http://purl.oclc.org/dsdl/schematron"?>
```

The second association validates your document with Schematron rules extracted from the RELAX NG Schema. Similarly, you can specify an XML Schema having the embedded Schematron rules.

```
<?xml-model href="percent.xsd" type="application/xml" schematypens="http://purl.oclc.org/dsdl/schematron"?>
```



Note: When you work with XML Schema or Relax NG documents that have embedded Schematron rules Oxygen XML Developer provides two built-in validation scenarios: **Validate XML Schema with embedded Schematron** for XML schema, and **Validate Relax NG with embedded Schematron** for Relax NG. You can use one of these scenarios to validate the embedded Schematron rules.

Editing Schematron Schema in the Master Files Context

Smaller interrelated modules that define a complex Schematron cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, a diagnostic defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main Schematron document either using the [master files support from the Project view](#), or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger schema structure.
- **Content Completion Assistant** displays all the referable components valid in the current context. This includes components defined in modules other than the currently edited one.

Schematron Outline View

The Schematron **Outline** view presents a list of components in a tree-like structure. It allows a quick access to a component by name. By default it is displayed on screen, but if you closed it you can reopen it from **Window > Show View > Outline**.

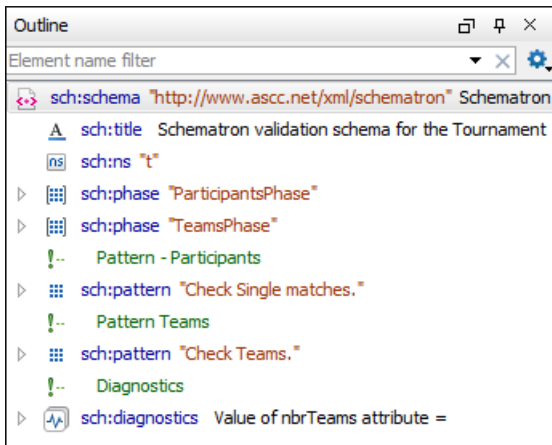


Figure 180: Schematron Outline View

The following actions are available in the **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.



Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.



Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.



Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.



Show element name

Show/hide element name.



Show text

Show/hide additional text content for the displayed elements.



Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).



Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available in the **Outline** view:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Comments/uncomments the currently selected element.

**Cut**

Cuts the currently selected component.

**Copy**

Copies the currently selected component.

**Delete**

Deletes the currently selected component.

**Expand More**

Expands the structure of a component in the **Outline** view.

**Collapse All**

Collapses the structure of all the component in the **Outline** view.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Schematron Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a Schematron schema. To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**.

If you want to see the hierarchy of a schema, select the desired schema in the project view and choose **Resource Hierarchy** from the contextual menu.

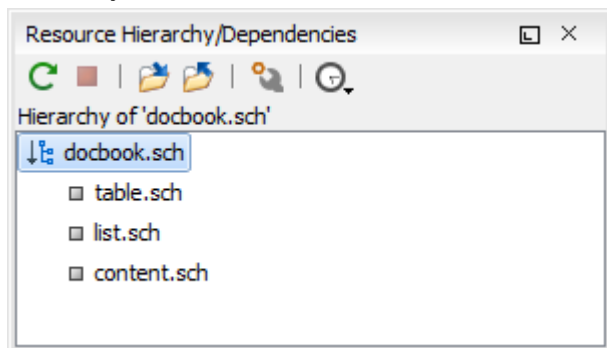


Figure 181: Resource Hierarchy/Dependencies View

If you want to see the dependencies of a schema, select the desired schema in the project view and choose **Resource Dependencies** from the contextual menu.

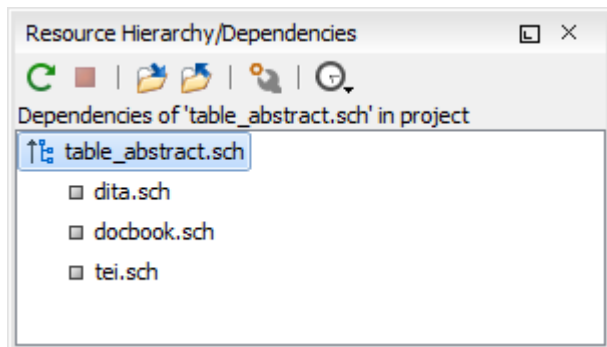


Figure 182: Resource Hierarchy/Dependencies View - Dependencies for table_abstract.sch

The following actions are available in the **Resource Hierarchy/Dependencies** view:



Refresh

Refreshes the Hierarchy/Dependencies structure.



Stop

Stops the hierarchy/dependencies computing.



Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.



Show Dependencies

Allows you to choose a resource to compute the dependencies structure.



Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.



History

Provides access to the list of previously computed dependencies. Use the **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.



Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .



Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Moving/Renaming Schematron Resources

You are able to move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Enable this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Enable this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is enabled, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Highlight Component Occurrences in Schematron Documents

When you position your mouse cursor over a component in a Schematron document, Oxygen XML Developer searches for the component declaration and all its references and highlights them automatically.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected.

To change the default behavior of **Highlight Component Occurrences**, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File Ctrl Shift U (Meta Shift U on OS X)** action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Searching and Refactoring Operations in Schematron Documents

Search Actions

The following search actions can be applied on **pattern**, **phase**, or **diagnostic** types and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

Refactoring Actions

The following refactoring actions can be applied on **pattern**, **phase**, or **diagnostic** types and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.

-  **Rename Component in** - Opens the **Rename *component_type*** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

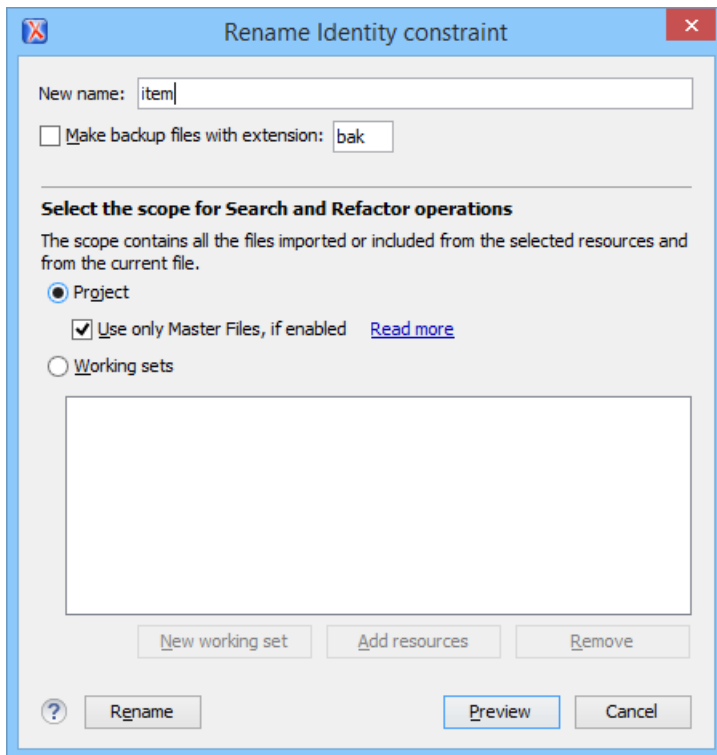


Figure 183: Rename Identity Constraint Dialog Box

Searching and Refactoring Operations Scope in Schematron Documents

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the Quick Assist action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple working sets. The **Use only Master Files, if enabled** check-box allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the [Master Files support](#).

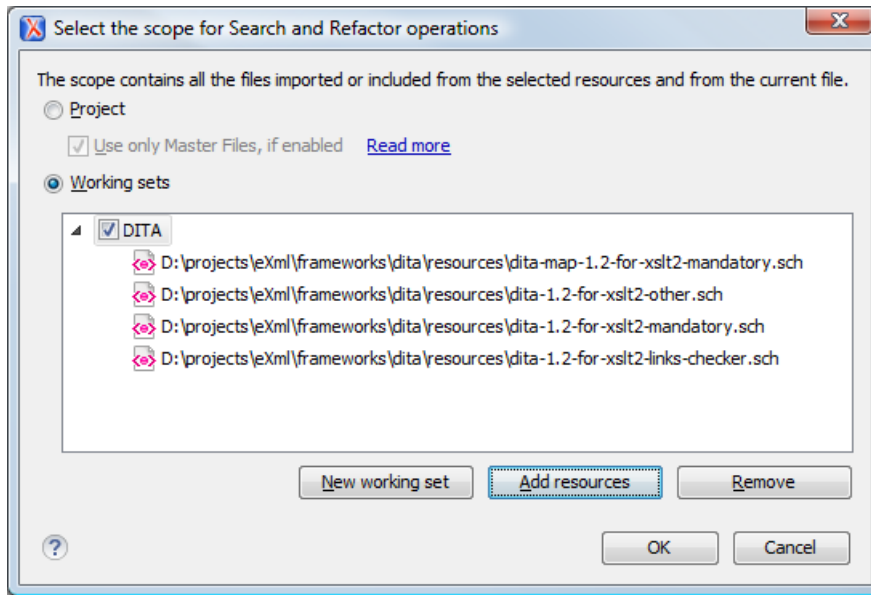


Figure 184: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the working set structure.

Quick Assist Support in Schematron Documents

The *Quick Assist* feature is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb help marker placed on the cursor line, in the line number stripe on the left side of the editor. Also, you can invoke the quick assist menu by using the **Alt + 1** keys (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

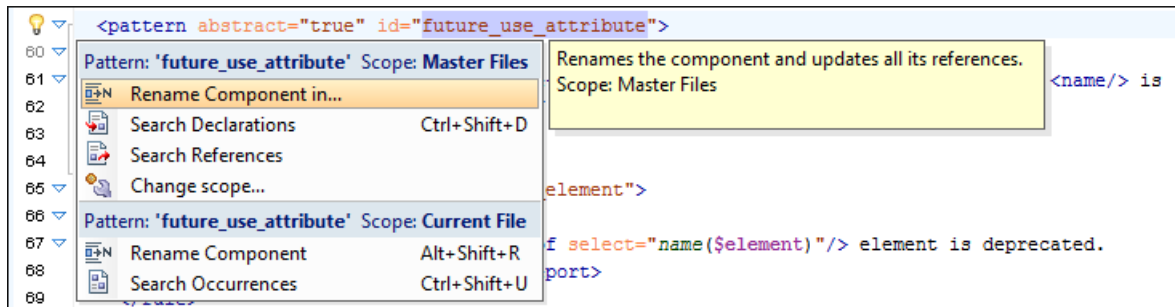


Figure 185: Schematron Quick Assist Support

The quick assist support offers direct access to the following actions:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

**Change Scope**

Configures the scope that will be used for future search or refactor operations.

**Rename Component**

Allows you to rename the current component in-place.

**Search Occurrences**

Searches all occurrences of the component within the current file.

Editing Schematron Quick Fixes

Oxygen XML Developer provides support for editing the *Schematron Quick Fixes*. You can define a library of quick fixes by editing them directly in the current Schematron file or in a separate file. Oxygen XML Developer assists you in editing Schematron Quick Fixes with schema-based content completion, syntax highlighting, and validation as you type.

This section includes details about the Schematron Quick Fixes feature and how to customize them.


Customizing Schematron Quick Fixes

You can customize Schematron Quick Fixes by editing them directly in the current Schematron file or in a separate file. The Schematron Quick Fixes are an extension of the Schematron language and they allow you to define fixes for Schematron error messages. You can refer the quick fixes from the `assert` or `report` elements in the values of the `sqf:fix` attributes.

Defining a Schematron Quick Fix

The basics of a Schematron Quick Fix is defined by an ID, name, description, and the operations to be executed.

- **ID** - Defined by the `id` attribute from the `fix` element and must be unique in the current context. It is used to refer the quick fix from a `report` or `assert` element.
- **Name** - The name of the quick fix is defined by the `title` element.
- **Description** - Defined by the text in the paragraphs (p) of the `description` element.
- **Operations** - The following types of operations are supported:
 - `<sqf:add>` - To add a new node or fragment in the document.
 - `<sqf:delete>` - To remove a node from the document.
 - `<sqf:replace>` - To replace a node with another node or fragment.
 - `<sqf:stringReplace>` - To replace text content with other text or a fragment.

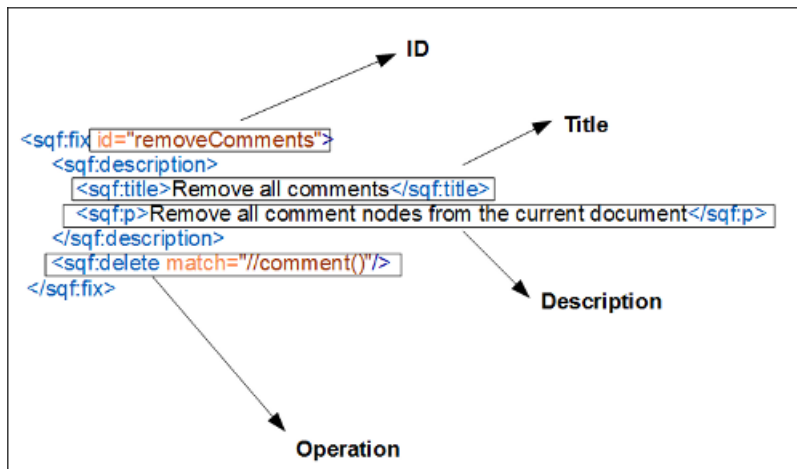

The assertion message that generates the quick fix is added as the **description** of the problem to be fixed. The **title** is presented as the name of the quick fix. The content of the paragraphs (p) within the **description** element are presented in the tooltip message when the quick fix is selected.

Schematron Quick Fix Operations

Add

The `<sqf:add>` element allows you to add a node to the instance. An anchor node is required to select the position for the new node. The anchor node can be selected by the **match** attribute. Otherwise, it is selected by the **context** attribute of the rule.

The **target** attribute defines the name of the node to be added. It is required if the value of the **node-type** attribute is set to anything other than "comment".

The `<sqf:add>` element has a **position** attribute and it determines the position relative to the anchor node. The new node could be specified as the first child of the anchor node, the last child of the anchor node, before the anchor node, or after the anchor node (**first-child** is the default value). If you want to add an attribute to the anchor node, do not use the **position** attribute.



Note: If you insert an element and its content is empty, Oxygen XML Developer will insert the required element content.

An Example of the `<sqf:add>` Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process" queryBinding="xslt2">
  <pattern>
    <rule context="head">
      <assert test="title" sqf:fix="addTitle">title element is missing.</assert>
      <sqf:fix id="addTitle">
        <sqf:description>
          <sqf:title>Insert title element.</sqf:title>
        </sqf:description>
        <sqf:add target="title" node-type="element">Title text</sqf:add>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Specific Add Operations:

- **Insert Element** - To insert an element, use the `<sqf:add>` element, set the value of the **node-type** to "element", and specify the element *QName* with the **target** attribute. If the element has a prefix, it must be defined in the Schematron using a namespace declaration (`<ns uri="namespace" prefix="prefix"/>`).
- **Insert Attribute** - To insert an attribute, use the `<sqf:add>` element, set the value of the **node-type** to "attribute", and specify the attribute *QName* with the **target** attribute. If the attribute has a prefix, it must be defined in the Schematron using a namespace declaration (`<ns uri="namespace" prefix="prefix"/>`).
- **Insert Fragment** - If the **node-type** is not specified, the `<sqf:add>` element will insert an XML fragment. The XML fragment must be well formed. You can specify the fragment in the **add** element or by using the **select** attribute.
- **Insert Comment** - To insert a comment, use the `<sqf:add>` element and set the value of the **node-type** to "comment".
- **Insert Processing Instruction** - To insert a processing instruction, use the `<sqf:add>` element, set the value of the **node-type** to "pi" or "processing-instruction", and specify the name of the processing instruction in the **target** attribute.

Delete

The `<sqf:delete>` element allows you to remove any type of node (such as elements, attributes, text, comments, or processing instructions). To specify nodes for deletion the `<sqf:delete>` element can include a **match** attribute that is an XPath expression (the default value is `.`). If the **match** attribute is not included, it deletes the context node of the Schematron rule.

An Example of the <sqf:delete> Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron" queryBinding="xslt2"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process">
  <pattern>
    <rule context="*[@xml:lang]">
      <report test="@xml:lang" sqf:fix="remove_lang">
        The attribute "xml:lang" is forbidden.</report>
      <sqf:fix id="remove_lang">
        <sqf:description>
          <sqf:title>Remove "xml:lang" attribute</sqf:title>
        </sqf:description>
        <sqf:delete match="@xml:lang"/>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Replace

The <sqf:replace> element allows you to replace nodes. Similar to the <sqf:delete> element, it can include a match attribute. Otherwise, it replaces the context node of the rule. The <sqf:replace> element has three tasks. It identifies the nodes to be replaced, defines the replacing nodes, and defines their content.

An Example of the <sqf:replace> Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process" queryBinding="xslt2">
  <pattern>
    <rule context="title">
      <report test="exists(ph)" sqf:fix="resolvePh" role="warn">
        ph element is not allowed in title.</report>
      <sqf:fix id="resolvePh">
        <sqf:description>
          <sqf:title>Change the ph element into text</sqf:title>
        </sqf:description>
        <sqf:replace match="ph">
          <value-of select="."/>
        </sqf:replace>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Other Attributes for Replace Operations:

- **node-type** - Determines the type of the replacing node. The permitted values include:
 - keep - Keeps the node type of the node to be replaced.
 - element - Replaces the node with an element.
 - attribute - Replaces the node with an attribute.
 - pi - Replaces the node with a processing instruction.
 - comment - Replaces the node with a comment.
- **target** - By using a *QName* it gives the replacing node a name. This is necessary when the value of the node-type attribute is anything other than "comment".
- **select** - Allows you to choose the content of the replacing nodes. You can use XPath expressions with the select attribute. If the select attribute is not specified then the content of the <sqf:replace> element is used instead.

String Replace

The <sqf:stringReplace> element is different from the others. It can be used to find a sub-string of text content and replace it with nodes or other strings.

Attributes for the String Replace Operation:

- **match** - Allows you to select text nodes that contain the sub-strings you want to replace.
- **select** - Allows you to select the replacing fragment, in case you do not want to set it in the content of the stringReplace element.
- **regex** - Matches the sub-strings using a regular expression.



Note: Regular expressions in the `<sqf:stringReplace>` element always has the *dot matches all* flag set to "true". Therefore, the line terminator will also be matched by the regular expression.



Attention: The context of the content within the `<sqf:stringReplace>` element is set to the whole text node, rather than the current sub-string.

An Example of the `<sqf:stringReplace>` Element:

```
<?xml version="1.0" encoding="UTF-8"?>
<sch:schema xmlns:sch="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process" queryBinding="xslt2">
  <sch:pattern>
    <sch:rule context="text()">
      <sch:report test="matches(., '[oO][xX]ygen')" sqf:fix="changeWord">The oXygen word is not
allowed</sch:report>
      <sqf:fix id="changeWord">
        <sqf:description>
          <sqf:title>Replace word with product</sqf:title>
        </sqf:description>
        <sqf:stringReplace regex="[oO][xX]ygen">ph keyref="product"/></sqf:stringReplace>
      </sqf:fix>
    </sch:rule>
  </sch:pattern>
</sch:schema>
```

Formatting and Indenting Inserted Content

The content that is inserted by the **Add**, **Replace**, or **String Replace** operations is automatically indented unless you set the value of the `xml:space` attribute to `preserve` on the operation element. There are several methods available to format the content that is inserted:

- **xsl:text** - You can use an `xsl:text` element to format the inserted content and keep the automatic indentation, as in the following example:

```
<sqf:add position="last-child">
  <row><xsl:text>
    </xsl:text>
    <entry>First column</entry><xsl:text>
    </xsl:text>
    <entry>Second column</entry><xsl:text>
    </xsl:text>
  </row><xsl:text>
</xsl:text>
</sqf:add>
```

- **xml:space** - Use the `xml:space` attribute and set its value to `preserve` to format the content and specify the spacing between elements, as in the following example:

```
<sqf:add node-type="element" target="codeblock" xml:space="preserve">
/* a long sample program */
Do forever
  Say "Hello, World"
End</sqf:add>
```

The Use-When Condition

To restrict a quick fix or a specific operation to only be available if certain conditions are met, the `use-when` attribute can be included in the `<sqf:fix>` element or any of the SQF operation elements. The condition of the `use-when` attribute is an XPath expression and the fix or operation will be performed only if the condition is satisfied. In the following example, the `use-when` condition is applied to the `<sqf:fix>` element:

```
<sqf:fix id="last" use-when="$colWidthSummarized - 100 lt $lastWidth" role="replace">
  <sqf:description>
    <sqf:title>Subtract the excessive width from the last element.</sqf:title>
  </sqf:description>
  <let name="delta" value="$colWidthSummarized - 100"/>
  <sqf:add match="html:col[last()]" target="width" node-type="attribute">
    <let name="newWidth" value="number(substring-before(@width,'%')) - $delta"/>
    <value-of select="concat($newWidth,'%')"/>
  </sqf:add>
</sqf:fix>
```

Executing Schematron Quick Fixes in Documents Other than the Current One

You can apply Schematron Quick Fixes over the nodes from referred documents (referred using XInclude or external entities), and you can access them as nodes in your current document.

Also, you can apply the quick fixes over other documents using the `doc()` function in the value of the `match` attribute. For example, you can add a new key in the `keylist.xml` file using the following operation:

```
<sqf:add match="doc('keylist.xml')/KeyList" target="Key" node-type="element" select="Key2">
```

Additional Elements Supported in the Schematron Quick Fixes

<sqf:call-fix>

This element calls another quick fix within a quick fix. The called quick fix must be defined globally or in the same Schematron rule as the calling quick fix. A calling quick fix adopts the activity elements of the called quick fix and should not include other activity elements. You can also specify which parameters are sent by using the `<sqf:with-param>` child element.

<sqf:group>

Allows you to group multiple quick fixes and refer them from an `assert` or `report` element.

<sqf:fixes>

Is defined globally and contains global fixes and groups of fixes.

<sqf:keep>

Used to copy the selected nodes that are specified by the `select` attribute.



Note: In Oxygen XML Developer the copied nodes cannot be manipulated by the current or other activity elements.

<sqf:param>

Defines a parameter for a quick fix. If the parameter is defined as `abstract` then the `type` and default value should not be specified and the fix can be called from an abstract pattern that defines this parameter.

<sqf:user-entry>

Allows you to specify a value that will be inserted after the user selects the quick fix. If multiple `user-entry` elements are defined, Oxygen XML Developer will display a dialog box for each one, in which the user can insert values.

Other SQF Notes



Note: The `sqf:defaultFix` attribute is ignored in Oxygen XML Developer.

For more details on editing Schematron Quick Fixes, go to: [Schematron Quick Fix Specifications](#)

Validating Schematron Quick Fixes

By default, Schematron Quick Fixes are validated as you edit them within the Schematron file or while editing them in a separate file. To change this, [open the Preferences dialog box](#), go to **Editor > Document Checking**, and disable the **Enable automatic validation** option.

To validate Schematron Quick Fixes manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Content Completion in SQF

Oxygen XML Developer helps you edit Schematron Quick Fixes embedded in a Schematron document, offering, through the Content Completion Assistant, items that are valid at the cursor position. When you edit the value of an attribute that references a quick fix `id`, the `ids` are collected from the entire definition scope. For example, if the editing context is `assert/@sqf:fix`, the Content Completion Assistant proposes all fixes defined locally and globally.

If the editing context is an attribute value that is an XPath expression (such as `sqf:add/@match` or `replace/@select`), the Content Completion Assistant offers the names of XPath functions, the XPath axes, and user-defined variables and parameters.

The **Content Completion Assistant** displays XSLT 1.0 functions (and optionally XSLT 2.0 / 3.0 functions) in the attributes *path*, *select*, *context*, *subject*, and *test*, depending on [the Schematron options](#) that are set in Preferences pages. If the Saxon 6.5.5 namespace (`xmlns:saxon="http://icl.com/saxon"`) or the Saxon 9.6.0.7 namespace is declared in the Schematron schema (`xmlns:saxon="http://saxon.sf.net/"`) the content completion also displays the XSLT Saxon extension functions.

Highlight Quick Fix Occurrences in SQF

When you position your mouse cursor over a quick fix id in a Schematron document, Oxygen XML Developer searches for the quick fix declaration and all its references and highlights them automatically.

Customizable colors are used: one for the quick fix definition and another one for its references. Occurrences are displayed until another quick fix is selected.

To change the default behavior of **Highlight Component Occurrences**, [open the Preferences dialog box](#) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File (Ctrl Shift U (Meta Shift U on OS X))** action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Searching and Refactoring Operations in SQF

Search Actions

The following search actions can be applied on quick fix ids and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

Refactoring Actions

The following refactoring actions can be applied on quick fix ids and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component in-place. The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens the **Rename component_type** dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files affected by the **Rename Component** action.

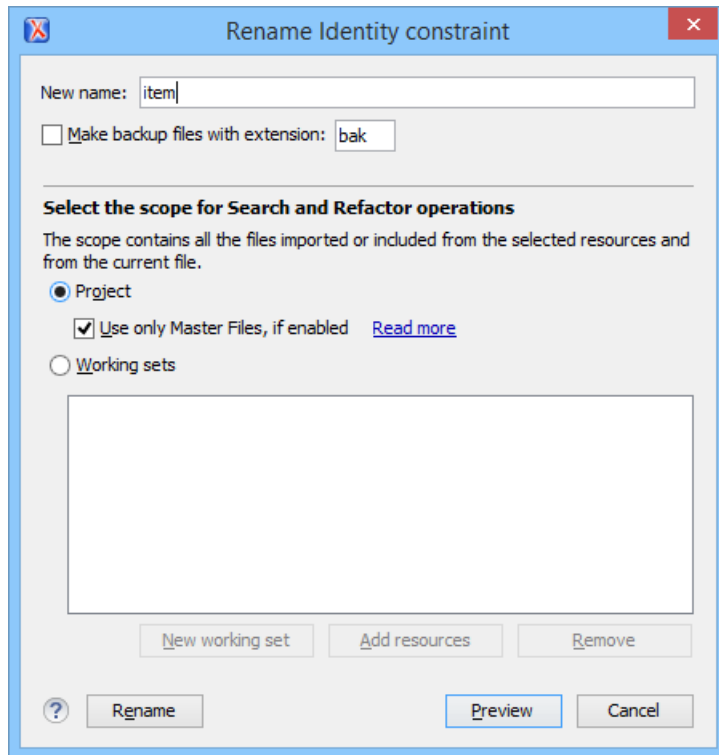


Figure 186: Rename Identity Constraint Dialog Box

Embed Schematron Quick Fixes in Relax NG or XML Schema

Schematron Quick Fixes can be embedded into a Relax NG or XML Schema within the Schematron rules from annotations (using the `appinfo` element), or in any Schematron rule of a RELAX NG Schema.

Oxygen XML Developer is able to extract and use the embedded Schematron Quick Fixes. To make the Schematron Quick Fixes available, validate the document with both the RELAX NG schema and its embedded Schematron rules.

Editing SVG Documents

SVG (Scalable Vector Graphics) is a platform for two-dimensional graphics. It has two parts: an XML-based file format and a programming API for graphical applications. Some of the key features include support for shapes, text, and embedded raster graphics with many painting styles, scripting through languages such as *ECMAScript*, and support for animation.

SVG is a vendor-neutral, open standard that has important industry support. Companies such as Adobe, Apple, and IBM have contributed to its W3C specifications. Many documentation frameworks (including DocBook) have support for SVG by defining the graphics directly in the document.

Oxygen XML Developer adds SVG support by using the [Batik distribution](#) package (an open source project developed by the Apache Software Foundation) and the [default XML catalog](#) resolves the SVG DTD.



Note: Batik partially supports SVG 1.1. For a detailed list of supported elements, attributes, and properties, see the [Batik Implementation Status](#) page.

How to Render SVG Images that Use Java Scripting

1. Copy the `js.jar` library from the [Batik distribution](#) into the Oxygen XML Developer `lib` folder.
2. Restart the application.

The Standalone SVG Viewer

Oxygen XML Developer includes a simple *SVG Viewer* that allows you to work with SVG images.

To open the viewer, select **SVG Viewer** from the **Tools** menu.

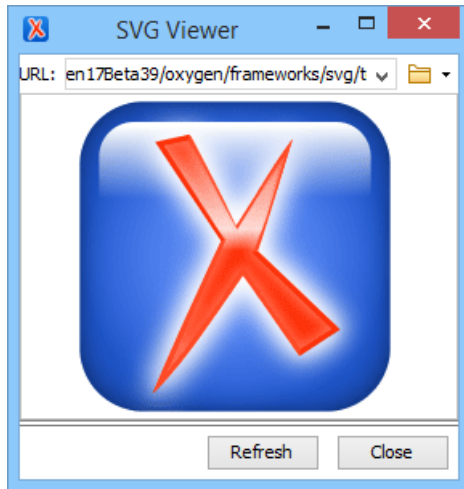


Figure 187: SVG Viewer

You can browse for and open any SVG file that has the `.svg` or `.svgz` extension.

If the file is included in the current project, you can open it in the viewer by right-clicking the image file in the **Project** view and selecting **Open with > SVG Viewer**.

Actions Available in the SVG Viewer

The following actions are available in the **SVG Viewer**:

Zoom in

To zoom in on an image, use any of the following methods:

- Scroll **up** with the mouse wheel.
- Select **Zoom in** from the contextual menu.
- Use the **Ctrl + I (Command I on OS X)** keyboard shortcut.

Zoom out

To zoom in on an image, use any of the following methods:

- Scroll **down** with the mouse wheel.
- Use the **Ctrl + O (Command O on OS X)** keyboard shortcut.
- Select **Zoom out** from the contextual menu.

Rotate

To rotate an image, use either of the following methods:

- Use the **Ctrl + Right-Click + Drag (Command + Right-Click + Drag on OS X)** shortcut.
- Select **Rotate** from the contextual menu. This rotates the image exactly 90 degrees clockwise.

Refresh

To refresh (or reset) an image, use either of the following methods:

- Use the **Ctrl + T (Command + T on OS X)** keyboard shortcut.
- Select **Refresh** from the contextual menu.

Move

To move an image, use either of the following methods:

- Use the **Arrow Keys** on your keyboard.
- Use the **Shift + Left-Click + Drag** shortcut.

Pan

To pan an image, **click and drag** the image with your mouse.

Integrated SVG Viewer in the Results Panel

For types of *transformation scenarios that utilize XSLT stylesheets*, Oxygen XML Developer includes an integrated SVG Viewer in the results panel at the bottom of the editor. This is useful for XSL stylesheets that have the capability of producing rich SVG graphics.

To enable this feature, select **Show in results view as > SVG** in the *Output tab of the XSLT transformation scenario configuration dialog box*. When you run the transformation, the SVG result is then rendered in an integrated SVG viewer in the results panel.



Figure 188: Integrated SVG Viewer

Example of a Use-Case

Suppose you have an XML document that describes the evolution of your sales over a time period and you want to create a graphic for it. You could use the following steps to accomplish this task:

1. Start with a static SVG image, written directly in Oxygen XML Developer or exported from an external graphics tool.
2. Extract the parts that are dependent on the data from the XML document.
3. Create XSL templates to be applied on the XML document.
4. Create an *XML transformation with XSLT scenario*.
5. While configuring the transformation scenario, select *Show in results view as > SVG in the Output tab* of the configuration dialog box.
6. Run the transformation.

The SVG image is rendered in an integrated SVG viewer in the results panel at the bottom of the editor.

Editing XHTML Documents

XHTML documents with embedded CSS, JS, PHP, and JSP scripts are rendered with dedicated coloring schemes. To customize them, *open the Preferences dialog box* and go to **Editor > Syntax Highlight**.

Spell Checking

Oxygen XML Developer includes an *automatic (as-you-type) spell checking feature*, as well as a manual spell checking action to opens a **Spelling** dialog box that offers a variety of options. To open this dialog box, use the  **Check Spelling** action on the toolbar or from the **Edit** menu.

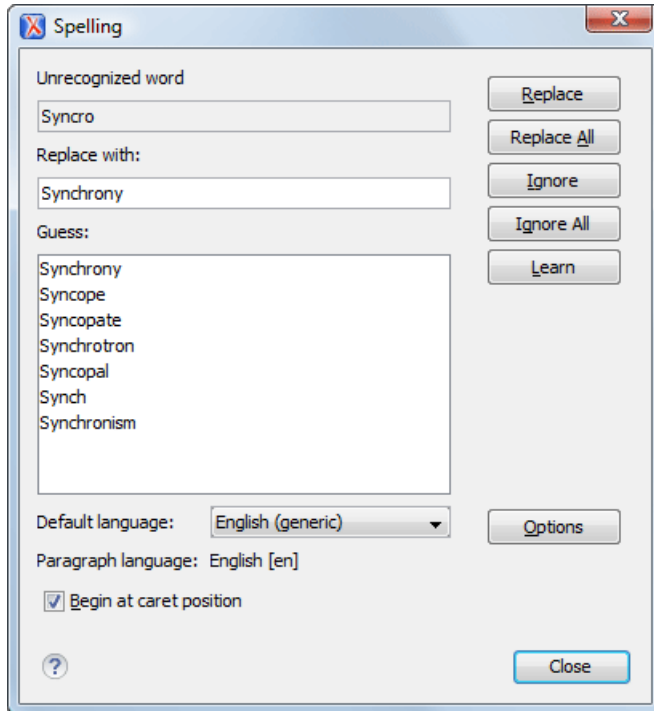


Figure 189: The Check Spelling Dialog Box

The **Spelling** dialog box contains the following fields:

- **Unrecognized word** - Contains the word that cannot be found in the selected dictionary. The word is also highlighted in the XML document.
- **Replace with** - The character string which is suggested to replace the unrecognized word.
- **Guess** - Displays a list of words suggested to replace the unknown word. Double click a word to automatically insert it in the document and resume the spell checking process.
- **Default language** - Allows you to select the default dictionary used by the spelling engine.
- **Paragraph language** - In an XML document you can mix content written in different languages. To tell the spell checker engine what language was used to write a specific section, you need to set the language code in the `lang` or `xml:lang` attribute to that section. Oxygen XML Developer automatically detects such sections and instructs the spell checker engine to apply the appropriate dictionary.
- **Replace** - Replaces the currently highlighted word in the XML document, with the selected word in the **Replace with** field.
- **Replace All** - Replaces all occurrences of the currently highlighted word in the XML document, with the selected word in the **Replace with** field.
- **Ignore** - Ignores the first occurrence of the unrecognized word and allows you to continue checking the document. Oxygen XML Developer skips the content of the XML elements *marked as ignorable*.
- **Ignore All** - Ignores all instances of the unknown word in the current document.
- **Learn** - Includes the unrecognized word in the list of valid words.
- **Options** - Sets the configuration options of the spell checker.
- **Begin at cursor position** - Instructs the spell checker to begin checking the document starting from the current cursor position.

- **Close** - Closes the dialog box.

Spell Checking Dictionaries

There are two spell checking engines available in Oxygen XML Developer: **Hunspell** checker (default setting) and **Java** checker. You can set the spell check engine in the [Spell checking engine](#) preferences page. The dictionaries used by the two engines differ in format, so you need to follow specific procedures in order to add another dictionary to your installation of Oxygen XML Developer.

Dictionaries for the Hunspell Checker

The Hunspell spell checker is open source and has LGPL license. The format of the Hunspell spell dictionary is supported by Mozilla, OpenOffice and the Chrome browser. Oxygen XML Developer comes with the following built-in dictionaries for the Hunspell checker:

- English (US)
- English (UK)
- French
- German
- Spanish.

Each language-country variant combination has its specific dictionary. If you cannot find a Hunspell dictionary that is already built for your language, you can build the dictionary you need. To build a dictionary from this list follow [these instructions](#).

Add Dictionaries and Term Lists for the Hunspell Checker

To add new spelling dictionaries to Oxygen XML Developer, or to replace an existing one, follow these steps:

1. [Download the files](#) you need for your language dictionary.
2. The downloaded .`oxt` file is a `zip` archive. If you are creating a new dictionary, copy the `.aff` and `.dic` files from this archive in the `spell` subfolder of the Oxygen XML Developer preferences folder.

The Oxygen XML Developer preferences folder is

>[APPLICATION-DATA-FOLDER]/com.oxygenxml.developer, where [APPLICATION-DATA-FOLDER] is:

- C:\Users\[USER-NAME]\AppData\Roaming on Windows Vista/7/8/10
- [USER-HOME-FOLDER]/Library/Preferences on OS X
- [USER-HOME-FOLDER] on Linux

3. If you are updating an existing dictionary, copy the `.aff` and `.dic` files into the folder [OXYGEN_DIR]/dicts/spell.
4. Restart the application after copying the dictionary files.



Note: You can specify that Oxygen XML Developer includes dictionaries and term lists from a custom location by selecting the **Include dictionaries and term list from** option and specifying its path in [the Dictionaries preferences page](#).

Dictionaries for the Java Checker

A Java spell checker dictionary has the form of a `.dar` file located in the directory [OXYGEN_DIR]/dicts. Oxygen XML Developer comes with the following built-in dictionaries for the Java checker:

- English (US)
- English (UK)
- English (Canada)
- French (France)
- French (Belgium)
- French (Canada)

- French (Switzerland)
- German (old orthography)
- German (new orthography)
- Spanish

A pre-built dictionary can be added by copying the corresponding `.dar` file to the folder `[OXYGEN_DIR]/dicts` and restarting Oxygen XML Developer. There is one dictionary for each language-country variant combination.

Learned Words

Spell checker engines rely on dictionary to decide that a word is correctly spelled. To tell the spell checker engine that an unknown word is actually correctly spelled, you need to add that word to its dictionary. There are two ways to do this:

- Press the **Learn** button from the [Spelling dialog box](#).
- Invoke the contextual menu on an unknown word, then press **Learn word**.

Learned words are stored into a persistent dictionary file. Its name is composed of the currently checked language code and the `.tdi` extension, for example `en_US.tdi`. It is located in the:

- `[HOME_DIR]/AppData/Roaming/com.oxygenxml.developer/spell` folder on Windows Vista/7/8/10.
- `[HOME_DIR]/Application Data/com.oxygenxml.developer/spell` folder on Windows XP.
- `[HOME_DIR]/Library/Preferences/com.oxygenxml.developer/spell` folder on OS X.
- `[HOME_DIR]/com.oxygenxml.developer/spell` folder on Linux.



Note: To change this folder go to the [Editor > Spell Check > Dictionaries preferences page](#).



Note: To delete items from the list of learned words, press **Delete learned words** in the [Editor > Spell Check > Dictionaries preferences page](#).

Ignored Words (Elements)

The content of some XML elements like `programlisting`, `codeblock`, or `screen` should always be skipped by the spell checking process. The skipping can be done manually, word by word by the user using the **Ignore** button of [the Spelling dialog box](#), or automatically by maintaining a set of known element names that should never be checked. You maintain this set of element names [in the user preferences](#) as a list of XPath expressions that match the elements.

Only a small subset of XPath expressions is supported, that is only the `'/'` and `('//')` separators and the `'*'` wildcard. Two examples of supported expressions are `/a/*/b` and `//c/d/*`.

Automatic Spell Check

Oxygen XML Developer includes an option to automatically check the spelling as you type. This feature is disabled by default, but can be enabled and configured in the [Spell Check preferences page](#). When the option is enabled, unknown words are highlighted and they offer a contextual menu that includes the following actions:

Delete Repeated Word

Allows you to delete repeated words.

Learn Word

Allows you to add the current unknown word to the persistent dictionary.

Spell check options

Opens the [Spell Check preferences page](#).

Also, a list of words suggested by the spell checking engine as possible replacements of the unknown word is offered in the contextual menu.

Spell Checking in Multiple Files

The  **Check Spelling in Files** action allows you to check the spelling on multiple local or remote documents. This action is available in the following locations:

- The **Edit** menu.
- The contextual menu of the **Project** view.

The spelling corrections are displayed in [the Results view](#), that allows you to group the reported errors as a tree with two levels.

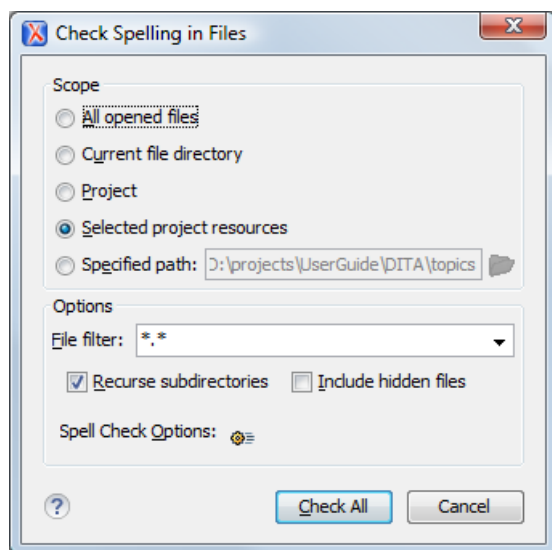


Figure 190: Check Spelling in Files Dialog Box

The following scopes are available:

- **All opened files** - The spell check is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - Checks the spelling in the files located at a path that you specify.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When enabled, the spell check is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When enabled, the spell check is also performed in the hidden files.
- **Spell Check Options** - The spell check processor uses the options available in the [Spell Check preferences panel](#).

Loading Large Documents

When you open a document with a file size larger than the limit configured in [Open/Save preferences](#), Oxygen XML Developer prompts you to choose whether you want to optimize the loading of the document for large files or for huge files.

If your file has a size smaller than 300 MB, the recommended approach is [Optimize loading for large files](#). For documents that exceed 300 MB the recommended approach is [Optimize loading for huge files](#).

File Sizes Smaller than 300 MB

For editing large documents (file size up to 300 Megabytes), a special memory optimization is implemented on loading such a file so that the total memory allocated for the application is not exceeded.

A temporary buffer file is created on disk so you have to make sure that the available free disk space is at least double the size of the large file that you want to edit. For example, Oxygen XML Developer can load a 200-Megabytes file using a minimum memory setting of 512 Megabytes and at least 400-Megabytes free disk space.

The increase of the maximum size of editable files comes with the following restrictions:

- A file larger than the value of the above option is edited only in **Text** mode.
- The [automatic validation](#) is not available when editing a very large file.
- The XPath filter is disabled in [the Find/Replace dialog box](#).
- The bidirectional Unicode support (right-to-left writing) is disabled.
- [The option Format and indent the document on open](#) is disabled for non-XML documents. For XML documents, it is done optimizing the memory usage but without respecting the options set in [the Format preferences page](#).
- Less precise localizations for the results of an [XPath expression](#).

File Sizes Greater than 300 MB

Files tend to become larger and larger mostly because they are frequently used as a format for database export or for porting between different database formats. Traditional text editors simply cannot handle opening these huge export files, some having sizes exceeding one gigabyte, because all the file content must be loaded in memory before the user can actually view it.

The file is split in multiple pages (each having about 1MB in size). Each page is individually loaded (and edited) in the **Text** mode by using the special horizontal slider located at the top of the editing area. The loading operation is very fast and has no upper limit for the size of the loaded file.

The increase of the maximum size of editable files comes with the following restrictions:

- For XML files, only the UTF-8, UTF-16, and ASCII encodings are handled; for all non-XML files, the content is considered to be UTF-8.
- Files can be edited in Text edit mode only.
- The [automatic validation](#) is disabled.
- The XPath filter is disabled in [the Find/Replace dialog box](#).
- The bidirectional Unicode support (right-to-left writing) is disabled.
- [The Format and indent the document on open option](#) is disabled for non-XML documents. For XML documents, the format and indent operation it is done optimizing the memory usage, but it ignores the options set in [the Format preferences page](#).
- The **Outline** view is not supported.
- The file content is soft wrapped by default.
- The **Find/Replace** dialog box only supports the **Find** action.
- Saving changes is possible if **Safe save** is activated.
- The **undo** operation is not available if you go to other pages and come back to the modified page. the Undo operation loses its previous states if the back and forth between

Scratch Buffer

A handy addition to the document editing is the **Scratch Buffer** view used for storing fragments of arbitrary text during the editing process. It can be used to drop bits of paragraphs (including arbitrary XML markup fragments) while rearranging and editing the document and also to drag and drop fragments of text from the scratch buffer to the editor

panel. The **Scratch Buffer** is basically a text area offering XML syntax highlight. The view contextual menu contains basic edit actions like **Cut**, **Copy**, and **Paste**.

Handling Read-Only Files

If a file marked as read-only is opened in Oxygen XML Developer you can by default perform modifications to it. This behavior is controlled by the [Can edit read only files](#) option. When attempting to save such files you will be prompted to save them to another location.

You can check out the read-only state of the file by looking in the [Properties view](#). If you modify the file properties from the operating system and the file becomes writable, you are able to modify it on the spot without having to reopen it.

The read-only state is marked with a lock decoration which appears in the editor tab and specified in the tooltip for a certain tab.

Editing Documents with Long Lines

The documents containing long lines can affect performance when opened in the **Text** mode. If you choose to present the document with line wrap, some features are affected:

- The editor uses the **Monospaced** font.
- You cannot set font styles.
- Automatic validation is disabled.
- Automatic spell checking is disabled.
- **XPath** field is disabled in the **Find/Replace** dialog box.
- Less precise localization for executed XPath. The XPath executions use SAX sources for smaller memory footprint. We recommend using XPath 2.0 instead of XPath 1.0 because it features an increased execution speed and uses a smaller memory footprint. Running an XPath expression requires additional memory about 2 or 3 times the size of the document on disk.

The last two restrictions are valid only for XML documents.

Associating a File Extension with Oxygen XML Developer

To associate a file extension with Oxygen XML Developer on Windows:

- Go to the **Start** menu and click **Control Panel**.
- Go to **Default Programs**.
- Click **Associate a file type or protocol with a program**.
- Click the file extension you want to associate with Oxygen XML Developer, then click **Change program**.
- In the **Open With** dialog box, click **Browse** and select Oxygen XML Developer.

To associate a file extension with Oxygen XML Developer on Mac OS:

- In **Finder**, right click a file and from the contextual menu select **Get Info**.
- In the **Open With** subsection, select **Other** from the application combo and browse to Oxygen XML Developer.
- With Oxygen XML Developer selected, click **Change All**.

Chapter 7

Document Types (Frameworks)

Topics:

- [Predefined Document Types \(Frameworks\)](#)

A *document type* or *framework* is associated to an XML file according to a set of rules. It also includes a variety of settings that improve editing capabilities in the **Author** mode for its particular file type. These settings include:

- A default grammar used for validation and content completion in **Text** mode.
- Predefined scenarios used for transformations for the class of XML documents defined by the document type.
- XML catalogs.
- Directories with file templates.

Oxygen XML Developer comes with built-in support for many common document types. Each document type is defined in a framework. You can create new frameworks or make changes to existing frameworks to suit your individual requirements.

To see a video on configuring a framework in Oxygen XML Developer, go to <http://oxygenxml.com/demo/FrameworkConfiguration.html>.

Predefined Document Types (Frameworks)

Predefined Document Types

The following predefined document types (frameworks) are fully supported in Oxygen XML Developer and each of these document types include built-in transformation scenarios, validation, content completion and file templates:

- [DocBook 4](#) - A document type standard for books, articles, and other prose documents (particularly technical documentation).
- [DocBook 5](#) - An enhanced (version 5) document type standard designed for a variety of documents (particularly technical documentation).
- [DITA](#) - An XML-based architecture designed for authoring, producing, and delivering technical information.
- [DITA Map](#) - A document type that collects and organizes references to DITA topics or other maps.
- [XHTML](#) - Extensible HyperText Markup Language includes the same depth of expression as HTML, but also conforms to XML syntax.
- [TEI ODD](#) - Text Encoding Initiative One Document Does it all is an XML-conformant specification that allows you to create TEI P5 schema in a literate programming style.
- [TEI P4](#) - The Text Encoding Initiative guidelines is a standard for the academic community that collectively define an XML format for text that is primarily semantic rather than presentational.
- [TEI P5](#) - The Text Encoding Initiative guidelines is a standard for the academic community that collectively define an XML format for text that is primarily semantic rather than presentational.
- [JATS](#) - The NISO Journal Article Tag Suite is a technical standard that defines an XML format for scientific literature.

Other Document Types

Oxygen XML Developer also provides limited support (including file templates) for a variety of other document types, including:

- [EPUB \(NCX, OCF, OPF 2.0 & 3.0\)](#) - A standard for e-book files.
- [DocBook Targetset](#) - For resolving cross-references when using *olinks*.
- [Ant Build Scripts](#) - A tool for automating software build processes, written in Java and primarily intended for use with Java.
- [XSLT Stylesheets](#) - A document type that provides a visual mode for editing XSLT stylesheets.
- [WSDL](#) - Web Services Description Language is an XML language for describing the functionality offered by a web service.
- [Schematron](#) - For making assertions about the presence or absence of patterns in XML documents. This document type applies to the ISO Schematron version.
- [Schematron Quick Fixes \(SQF\)](#) - An extension of the ISO standard Schematron, allows developers to define *QuickFixes* for Schematron errors.
- [StratML \(Part 1 & 2\)](#) - Part 1 and 2 of the Strategy Markup Language specification.
- [XProc](#) - A document type for processing XProc script files.
- [XML Schema](#) - Documents that provide support for editing annotations.
- [SVG](#) - Scalable Vector Graphics is a language for describing two-dimensional graphics in XML.
- [XLIFF \(1.2 & 2.0\)](#) - XML Localization Interchange File Format is a standard for passing data between tools during a localization process.
- [XQuery](#) - The common query language for XML.
- [CSS](#) - Cascading Style Sheets is a language used for describing the look and formatting of a document.
- [LESS](#) - A dynamic style sheet language that can be compiled into CSS.
- [Relax NG Schema](#) - A schema language that specifies a pattern for the structure and content of an XML document.
- [NVDL Schema](#) - Namespace Validation Dispatching Language allows you to specify sections of XML documents to be validated against various schemas.
- [JSON](#) - JavaScript Object Notation is a lightweight data-interchange format.
- [JavaScript](#) - Programming language of HTML and the Web.
- [XML Spec](#) - A markup language for W3C specifications and other technical reports.

- DITAVAL - DITA conditional processing profile to identify the values you want to conditionally process for a particular output, build, or other purpose.
- Daisy - A technical standard for digital audio books, periodicals, and computerized text. It is designed to be an audio substitute for print material.
- EAD - Encoded Archival Description is an XML standard for encoding archival finding aids.
- KML - Keyhole Markup Language is an XML notation for expressing geographic visualization in maps and browsers.
- Maven Project & Settings - Project or settings file for Maven build automation tool that is primarily used for Java projects.
- Oasis XML Catalog - A document that describes a mapping between external entity references and locally-cached equivalents.

The DocBook 4 Document Type

DocBook is a very popular set of tags for describing books, articles, and other prose documents, particularly technical documentation.

A file is considered to be a *DocBook 4* document when one of the following conditions are true:

- The root element name is `book` or `article`.
- The PUBLIC ID of the document contains the string `-//OASIS//DTD DocBook XML`.

The default schema that is used if one is not detected in the DocBook 4 file is `docbookxi.dtd` and it is stored in `[OXYGEN_DIR]/frameworks/docbook/4.5/dtd/`.

The default XML catalog, `catalog.xml`, is stored in `[OXYGEN_DIR]/frameworks/docbook/`.

DocBook 4 Transformation Scenarios

Default transformation scenarios allow you to convert DocBook 4 to DocBook 5 documents and transform DocBook documents to WebHelp, PDF, HTML, HTML Chunk, XHTML, XHTML Chunk, EPUB and EPUB 3.

DocBook4 to WebHelp Output

DocBook 4 documents can be transformed into WebHelp systems, such as:

WebHelp Output

To publish DocBook 4 to WebHelp, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
2. Select the **DocBook WebHelp** scenario from the **DocBook 4** section.
3. Click **Apply associated**.

When the **DocBook WebHelp** transformation is complete, the output is automatically opened in your default browser.

WebHelp With Feedback Output

To publish DocBook 4 to WebHelp With Feedback, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp with Feedback** scenario from the **DocBook 4** section.
3. Click **Apply associated**.
4. Enter the documentation product ID and the documentation version.

When the **DocBook WebHelp with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output.

For further information about all the DocBook transformation parameters, go to

<http://docbook.sourceforge.net/release/xsl/current/doc/fo/index.html>.

To watch our video demonstration about the feedback-enabled WebHelp system, go to

http://oxygenxml.com/demo/Feedback_Enabled_WebHelp.html.

WebHelp Mobile Output

To generate a mobile WebHelp system from your DocBook 4 document, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp - Mobile** scenario from the **DocBook 4** section.
3. Click **Apply associated**.

When the **DocBook WebHelp - Mobile** transformation is complete, the output is automatically opened in your default browser.

To further customize these out-of-the-box transformation, you can edit the following most commonly used parameters:

webhelp.copyright

Adds a small copyright text that appears at the end of the *Table of Contents* pane.

webhelp.footer.file

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate `div` or `span` element, and the code for each `script` element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
  <div id="fb-root"/>
  <script>
    <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0]; if (d.getElementById(id))
    return;
      js = d.createElement(s); js.id = id; js.src =
    '//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0';
    fjs.parentNode.insertBefore(js, fjs); }(document, 'script', 'facebook-jssdk')); -->
  </script>
  <div data-share="true" data-show-faces="true" data-action="like" data-layout="standard" class="fb-like"/>
</div>
```

webhelp.footer.include

Specifies whether or not to include footer in each WebHelp page. Possible values: yes, no. If set to no, no footer is added to the WebHelp pages. If set to yes and the `webhelp.footer.file` parameter has a value, then the content of that file is used as footer. If the `webhelp.footer.file` has no value then the default Oxygen XML Developer footer is inserted in each WebHelp page.

webhelp.logo.image (not available for the WebHelp Mobile transformation)

Specifies a path to an image displayed as a logo in the left side of the output header.

webhelp.logo.image.target.url (not available for the WebHelp Mobile transformation)

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

webhelp.search.ranking (not available for the WebHelp Mobile transformation)

If this parameter is set to `false` then the *5-star rating mechanism* is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

webhelp.search.japanese.dictionary

The file path of the dictionary that will be used by the *Kuromoji* morphological engine that Oxygen XML Developer uses for indexing Japanese content in the WebHelp pages. This indexer does not come bundled with Oxygen XML Developer or the Oxygen XML WebHelp plugin. To use it, you need to download it from <http://mvnrepository.com/artifact/org.apache.lucene/lucene-analyzers-kuromoji/4.0.0> and add it in the `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/lib` directory.

use.stemming

Controls whether or not you want to include stemming search algorithms into the published output (default setting is `false`).

clean.output

Deletes all files from the output folder before the transformation is performed (only `no` and `yes` values are valid and the default value is `no`).

args.default.language

This parameter is used if the language is not detected in the DITA map. The default value is `en-us`.

l10n.gentext.default.language

This parameter is used to identify the correct stemmer that differs from language to language. For example, for English the value of this parameter is `en` or for French it is `fr`, and so on.

webhelp.product.id (available only for the WebHelp with Feedback transformation)

This parameter specifies a short name for the documentation target, or product (for example, `mobile-phone-user-guide`, `hvac-installation-guide`).



Note: You can deploy documentation for multiple products on the same server.



Note: The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

webhelp.product.version (available only for the WebHelp with Feedback transformation)

Specifies the documentation version number (for example, `1.0`, `2.5`, etc.). New user comments are bound to this version.



Note: Multiple documentation versions can be deployed on the same server.



Note: The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

webhelp.skin.css (not available for the WebHelp Mobile transformation)

Path to a CSS file that sets the style theme in the output WebHelp pages. It can be one of the predefined skin CSS from the `OXYGEN_INSTALL_DIR\frameworks\docbook\xsl\com.oxygenxml.webhelp\predefined-skins` directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

DocBook to PDF Output Customization

Main steps for customization of PDF output generated from DocBook XML documents.

When the default layout and output look of the DocBook to PDF transformation need to be customized, the following main steps should be followed. In this example a company logo image is added to the front matter of a book. Other types of customizations should follow some similar steps.

1. Create a custom version of the DocBook title spec file.

You should start from a copy of the file

`[OXYGEN_DIR]/frameworks/docbook/xsl/fo/titlepage.templates.xml` and customize it. The instructions for the spec file can be found [here](#).

An example of spec file:

```
<t:titlepage-content t:side="recto">
  <mediaobject/>
  <title
    t:named-template="book.verso.title"
    font-size="&hsize2;"
    font-weight="bold"
    font-family="{&title.font.family}"/>
  <corpauthor/>
```

```
...
</t:titlepage-content>
```

2. Generate a new XSLT stylesheet from the title spec file from the previous step.
Apply [OXYGEN_DIR]/frameworks/docbook/xsl/template/titlepage.xsl to the title spec file.
The result is an XSLT stylesheet (for example, mytitlepages.xsl).
3. Import mytitlepages.xsl in a [DocBook customization layer](#).
The customization layer is the stylesheet that will be applied to the XML document. The mytitlepages.xsl should be imported with an element like:

```
<xsl:import href="dir-name/mytitlepages.xsl"/>
```

4. Insert logo image in the XML document.
The path to the logo image must be inserted in the book/info/mediaobject element of the XML document.
5. Apply the customization layer to the XML document.
A quick way is duplicating the transformation scenario **DocBook PDF** that comes with Oxygen XML Developer and set the customization layer in [the XSL URL property of the scenario](#).

DocBook to EPUB Transformation

The EPUB specification recommends the use of *OpenType* fonts (recognized by their .otf file extension) when possible. To use a specific font, follow these steps:

1. Declare it in your CSS file, as in the following example:

```
@font-face {
  font-family: "MyFont";
  font-weight: bold;
  font-style: normal;
  src: url(fonts/MyFont.otf);
}
```

2. In the CSS, specify where this font is used. To set it as default for h1 elements, use the font-family rule, as in the following example:

```
h1 {
  font-size: 20pt;
  margin-bottom: 20px;
  font-weight: bold;
  font-family: "MyFont";
  text-align: center;
}
```

3. In your DocBook to EPUB transformation, set the epub.embedded.fonts parameter to fonts/MyFont.otf.
If you need to provide more files, use commas to separate their file paths.



Note: The html.stylesheet parameter allows you to include a custom CSS in the output EPUB.

DocBook 4 Templates

Default templates are available in the *New File* wizard. You can use them to create a skeletal form of a DocBook 4 book or article. These templates are stored in the [OXYGEN_DIR]/frameworks/docbook/templates/DocBook 4 folder.

Here are some of the DocBook 4 templates available when creating [new documents from templates](#):

- **Article**
- **Article with MathML**
- **Article with SVG**
- **Article with XInclude**
- **Book**
- **Book with XInclude**

- Chapter
- Section
- Set of Books

Inserting an oLink in DocBook Documents

An oLink is a type of link between two DocBook XML documents.

The oLink element is used for linking outside the current DocBook document. It has the attribute `targetdoc` for the document ID that contains the target element and the attribute `targetptr` for the ID (the value of an `id` or `xml:id` attribute) of the target element. The combination of those two attributes provides a unique identifier to locate cross references.

For example, a *Mail Administrator Guide* with the document ID `MailAdminGuide` might contain a chapter about user accounts, like this:

```
<chapter id="user_accounts">
<title>Administering User Accounts</title>
<para>blah blah</para>
...
```

You can form a cross reference to that chapter by adding an oLink, as in the following example:

```
You may need to update your
<olink targetdoc="MailAdminGuide" targetptr="user_accounts">user accounts
</olink>
when you get a new machine.
```

To use an oLink to create links between documents, follow these steps:

1. Decide what documents are to be included in the domain for cross referencing.

A unique ID must be assigned to each document that will be referenced with an oLink. It is usually added as an `id` (or `xml:id` for DocBook5) attribute to the root element of the document.

2. Decide on your output hierarchy.

For creating links between documents, the relative locations of the output documents must be known. Before going further you must decide the names and locations of the output directories for all the documents from the domain. Each directory will be represented by an element `<dir name="directory_name">` in the target database document.

3. Create the target database document.

Each collection of documents has a master target database document that is used to resolve all oLinks from that collection. The target database document is an XML file that is created once. It provides a framework that pulls in the target data for each document. The database document is static and all the document data is pulled in dynamically.

The following is an example target database document. It structures the documents in the collection into a `sitemap` element that provides the relative locations of the outputs (HTML in this example). Then it pulls in the individual target data using system entity references to target data files that will be created in the next step.

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE targetset [
<!ENTITY ugtargets SYSTEM "file:///doc/userguide/target.db">
<!ENTITY agttargets SYSTEM "file:///doc/adminguide/target.db">
<!ENTITY reftargets SYSTEM "file:///doc/man/target.db">
]>
<targetset>
  <targetsetinfo>
    Description of this target database document,
    which is for the examples in oLink doc.
  </targetsetinfo>

  <!-- Site map for generating relative paths between documents -->
  <sitemap>
    <dir name="documentation">
      <dir name="guides">
        <dir name="mailuser">
          <document targetdoc="MailUserGuide"
            baseuri="userguide.html">
            &ugtargets;
          </document>
        </dir>
        <dir name="mailadmin">
          <document targetdoc="MailAdminGuide">
            &agttargets;
          </document>
        </dir>
      </dir>
    </dir>
  </sitemap>
</targetset>
```

```

        </document>
      </dir>
    </dir>
    <dir name="reference">
      <dir name="mailref">
        <document targetdoc="MailReference">
          &reftargets;
        </document>
      </dir>
    </dir>
  </dir>
</sitemap>
</targetset>

```

4. Generate the target data files by executing a DocBook transformation scenario.

Before applying the transformation, you need to edit the transformation scenario, go to **Parameters**, and make sure the value of the `collect.xref.targets` parameter is set to **yes**. The default name of a target data file is `target.db`, but it can be changed by setting an absolute file path in the `targets.filename` parameter.

An example of a `target.db` file:

```

<div element="book" href="#MailAdminGuide" number="1" targetptr="user_accounts">
  <ttml>Administering User Accounts</ttml>
  <xref>How to administer user accounts</xref>
  <div element="part" href="#d5e4" number="I">
    <ttml>First Part</ttml>
    <xref>Part I, "First Part"</xref>
    <div element="chapter" href="#d5e6" number="1">
      <ttml>Chapter Title</ttml>
      <xref>Chapter 1, Chapter Title</xref>
      <div element="sect1" href="#src_chapter" number="1"
targetptr="src_chapter">
        <ttml>Section1 Title</ttml>
        <xref>xreflabel_here</xref>
      </div>
    </div>
  </div>
</div>

```

5. Insert o link elements in the DocBook documents.

When editing a DocBook XML document in **Author** mode, the **Insert OLink** action is available in the  **Link** drop-down menu from the toolbar. This action opens the **Insert OLink** dialog box that allows you to select the target of an o link from the list of all possible targets from a specified target database document (specified in the **Targetset URL** field). Once a **Targetset URL** is selected, the structure of the target documents is presented. For each target document (`targetdoc`), its content is displayed allowing you to easily identify the appropriate `targetptr`. You can also use the search fields to quickly identify a target. If you already know the values for the `targetdoc` and `targetptr`, you can insert them directly in the corresponding fields.

In the following image, the target database document is called `target.xml`, `dbadmin` is selected for the target document (`targetdoc`), and `bldinit` is selected as the value for the `targetptr` attribute. Notice that you can also add XREF text into the o link by using the `xref` field.

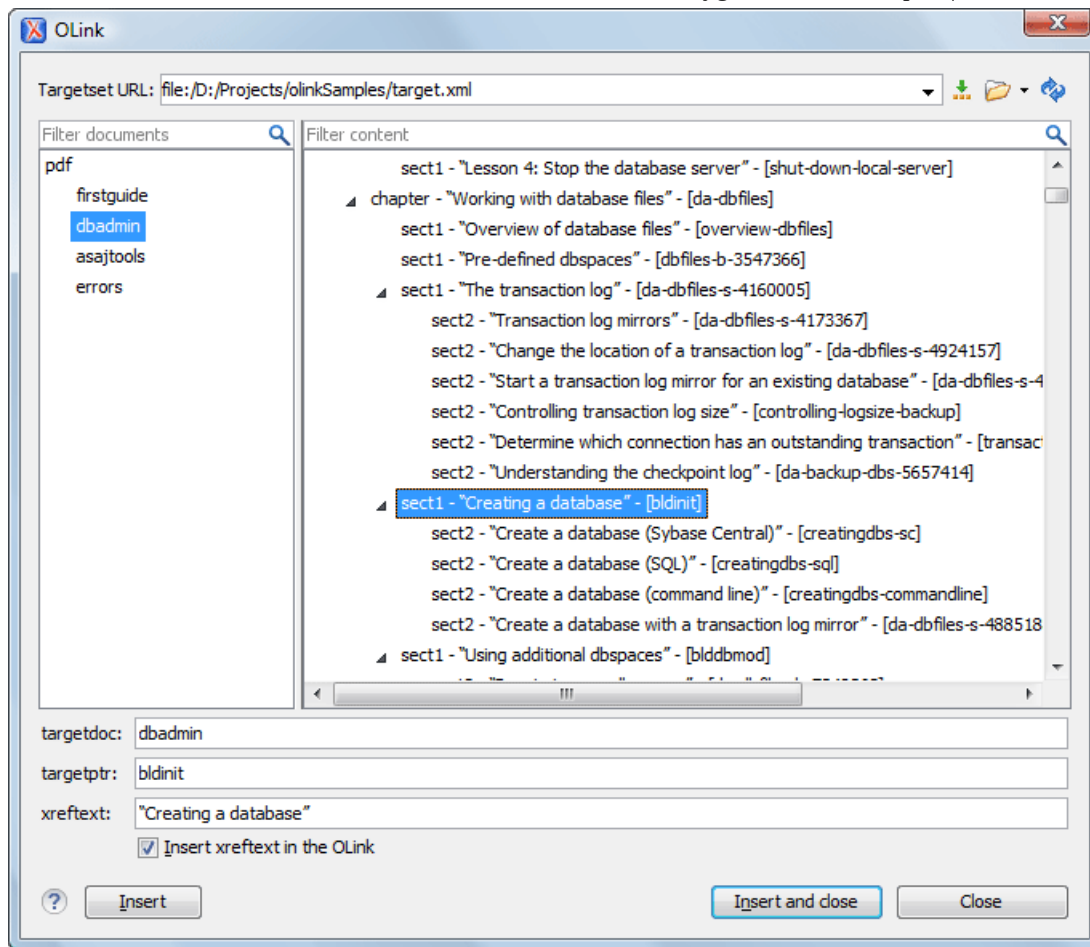


Figure 191: Insert OLink Dialog Box

6. Process a DocBook transformation each document to generate its output.
 - a) Edit the transformation scenario and set the value of the `target.database.document` parameter to be the URL of the target database document.
 - b) Apply the transformation scenario.

The DocBook 5 Document Type

A file is considered to be a DocBook 5 document when the namespace is *http://docbook.org/ns/docbook*.

The default schema that is used if one is not detected in the DocBook 5 file is `docbookx1.rng` and it is stored in `[OXYGEN_DIR]/frameworks/docbook/5.0/rng/`. Other types of schemas are also located in various folders inside the `[OXYGEN_DIR]/frameworks/docbook/5.0/` directory (for example, XML Schema files are located in the `xsd` folder).

The default XML catalog, `catalog.xml`, is stored in `[OXYGEN_DIR]/frameworks/docbook/5.0/`.



Note: A default XML catalog and schema files for experimental DocBook 5.1 documents are also available in the `[OXYGEN_DIR]/frameworks/docbook/5.1/` directory.

DocBook 5 Transformation Scenarios

Default transformation scenarios allow you to transform DocBook 5 documents to WebHelp, PDF, HTML, HTML Chunk, XHTML, XHTML Chunk, EPUB, and EPUB 3.

DocBook 5 to WebHelp Output

DocBook 5 documents can be transformed into WebHelp systems, such as:

WebHelp Output

To publish DocBook 5 to WebHelp, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
2. Select the **DocBook WebHelp** scenario from the **DocBook 5** section.
3. Click **Apply associated**.

When the **DocBook WebHelp** transformation is complete, the output is automatically opened in your default browser.

WebHelp With Feedback Output

To publish DocBook 5 to WebHelp With Feedback, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp with Feedback** scenario from the **DocBook 5** section.
3. Click **Apply associated**.
4. Enter the documentation product ID and the documentation version.

When the **DocBook WebHelp with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output.

For further information about all the DocBook transformation parameters, go to

<http://docbook.sourceforge.net/release/xsl/current/doc/fo/index.html>.

To watch our video demonstration about the feedback-enabled WebHelp system, go to

http://oxygenxml.com/demo/Feedback_Enabled_WebHelp.html.

WebHelp Mobile Output

To generate a mobile WebHelp system from your DocBook 5 document, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp - Mobile** scenario from the **DocBook 5** section.
3. Click **Apply associated**.

When the **DocBook WebHelp - Mobile** transformation is complete, the output is automatically opened in your default browser.

To further customize these out-of-the-box transformation, you can edit the following most commonly used parameters:

webhelp.copyright

Adds a small copyright text that appears at the end of the *Table of Contents* pane.

webhelp.footer.file

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate `div` or `span` element, and the code for each `script` element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
  <div id="fb-root"/>
  <script>
    <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0]; if (d.getElementById(id))
    return;
    </script>
```

```

        js = d.createElement(s); js.id = id; js.src =
        "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
        fjs.parentNode.insertBefore(js, fjs); }(document, 'script', 'facebook-jssdk')); -->
    </script>
    <div data-share="true" data-show-faces="true" data-action="like" data-layout="standard" class="fb-like"/>
</div>

```

webhelp.footer.include

Specifies whether or not to include footer in each WebHelp page. Possible values: **yes**, **no**. If set to **no**, no footer is added to the WebHelp pages. If set to **yes** and the **webhelp.footer.file** parameter has a value, then the content of that file is used as footer. If the **webhelp.footer.file** has no value then the default Oxygen XML Developer footer is inserted in each WebHelp page.

webhelp.logo.image (not available for the WebHelp Mobile transformation)

Specifies a path to an image displayed as a logo in the left side of the output header.

webhelp.logo.image.target.url (not available for the WebHelp Mobile transformation)

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

webhelp.search.ranking (not available for the WebHelp Mobile transformation)

If this parameter is set to **false** then the *5-star rating mechanism* is no longer included in the search results that are displayed on the **Search** tab (default setting is **true**).

webhelp.search.japanese.dictionary

The file path of the dictionary that will be used by the *Kuromoji* morphological engine that Oxygen XML Developer uses for indexing Japanese content in the WebHelp pages. This indexer does not come bundled with Oxygen XML Developer or the Oxygen XML WebHelp plugin. To use it, you need to download it from <http://mvnrepository.com/artifact/org.apache.lucene/lucene-analyzers-kuromoji/4.0.0> and add it in the *DITA_OT_DIR/plugins/com.oxygenxml.webhelp/lib* directory.

use.stemming

Controls whether or not you want to include stemming search algorithms into the published output (default setting is **false**).

clean.output

Deletes all files from the output folder before the transformation is performed (only **no** and **yes** values are valid and the default value is **no**).

args.default.language

This parameter is used if the language is not detected in the DITA map. The default value is **en-us**.

l10n.gentext.default.language

This parameter is used to identify the correct stemmer that differs from language to language. For example, for English the value of this parameter is **en** or for French it is **fr**, and so on.

webhelp.product.id (available only for the WebHelp with Feedback transformation)

This parameter specifies a short name for the documentation target, or product (for example, *mobile-phone-user-guide*, *hvac-installation-guide*).



Note: You can deploy documentation for multiple products on the same server.



Note: The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

webhelp.product.version (available only for the WebHelp with Feedback transformation)

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.



Note: Multiple documentation versions can be deployed on the same server.



Note: The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { }`
`= ; * % + &.`

webhelp.skin.css (not available for the WebHelp Mobile transformation)

Path to a CSS file that sets the style theme in the output WebHelp pages. It can be one of the predefined skin CSS from the
 OXYGEN_INSTALL_DIR\frameworks\docbook\xsl\com.oxygenxml.webhelp\predefined-skins
 directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

DocBook to PDF Output Customization

Main steps for customization of PDF output generated from DocBook XML documents.

When the default layout and output look of the DocBook to PDF transformation need to be customized, the following main steps should be followed. In this example a company logo image is added to the front matter of a book. Other types of customizations should follow some similar steps.

1. Create a custom version of the DocBook title spec file.

You should start from a copy of the file
 [OXYGEN_DIR]/frameworks/docbook/xsl/fo/titlepage.templates.xml and customize it. The instructions for the spec file can be found [here](#).

An example of spec file:

```
<t:titlepage-content t:side="recto">
  <mediaobject/>
  <title
    t:named-template="book.verso.title"
    font-size="&hsize2;"
    font-weight="bold"
    font-family="{ $title.font.family }"/>
  <corpauthor/>
  ...
</t:titlepage-content>
```

2. Generate a new XSLT stylesheet from the title spec file from the previous step.

Apply [OXYGEN_DIR]/frameworks/docbook/xsl/template/titlepage.xsl to the title spec file. The result is an XSLT stylesheet (for example, mytitlepages.xsl).

3. Import mytitlepages.xsl in a [DocBook customization layer](#).

The customization layer is the stylesheet that will be applied to the XML document. The mytitlepages.xsl should be imported with an element like:

```
<xsl:import href="dir-name/mytitlepages.xsl"/>
```

4. Insert logo image in the XML document.

The path to the logo image must be inserted in the book/info/mediaobject element of the XML document.

5. Apply the customization layer to the XML document.

A quick way is duplicating the transformation scenario **DocBook PDF** that comes with Oxygen XML Developer and set the customization layer in [the XSL URL property of the scenario](#).

DocBook to EPUB Transformation

The EPUB specification recommends the use of *OpenType* fonts (recognized by their .otf file extension) when possible. To use a specific font, follow these steps:

1. Declare it in your CSS file, as in the following example:

```
@font-face {
  font-family: "MyFont";
  font-weight: bold;
  font-style: normal;
  src: url(fonts/MyFont.otf);
}
```

2. In the CSS, specify where this font is used. To set it as default for `h1` elements, use the `font-family` rule, as in the following example:

```
h1 {
  font-size: 20pt;
  margin-bottom: 20px;
  font-weight: bold;
  font-family: "MyFont";
  text-align: center;
}
```

3. In your DocBook to EPUB transformation, set the `epub.embedded.fonts` parameter to `fonts/MyFont.otf`. If you need to provide more files, use commas to separate their file paths.



Note: The `html.stylesheet` parameter allows you to include a custom CSS in the output EPUB.

DocBook 5 Templates

Default templates are available in the *New File wizard* and can be used for easily creating a skeletal form of a DocBook 5 book or article. These templates are stored in the `[OXYGEN_DIR]/frameworks/docbook/templates/DocBook 5` folder.

Here are some of the DocBook 5 templates available when creating *new documents from templates*:

- **Article**
- **Article with MathML**
- **Article with SVG**
- **Article with XInclude**
- **Book**
- **Book with XInclude**
- **Chapter**
- **Section**
- **Set of Books**

Some experimental DocBook 5.1 templates are also available and are stored in the `[OXYGEN_DIR]/frameworks/docbook/templates/DocBook 5.1 (Experimental)` folder. They include the following:

- **Assembly**
- **Topic**

Inserting an oLink in DocBook Documents

An `oLink` is a type of link between two DocBook XML documents.

The `oLink` element is used for linking outside the current DocBook document. It has the attribute `targetdoc` for the document ID that contains the target element and the attribute `targetptr` for the ID (the value of an `id` or `xml:id` attribute) of the target element. The combination of those two attributes provides a unique identifier to locate cross references.

For example, a *Mail Administrator Guide* with the document ID `MailAdminGuide` might contain a chapter about user accounts, like this:

```
<chapter id="user_accounts">
<title>Administering User Accounts</title>
<para>blah blah</para>
...
```

You can form a cross reference to that chapter by adding an `oLink`, as in the following example:

```
You may need to update your
<olink targetdoc="MailAdminGuide" targetptr="user_accounts">user accounts
</olink>
when you get a new machine.
```

To use an `oLink` to create links between documents, follow these steps:

1. Decide what documents are to be included in the domain for cross referencing.

A unique ID must be assigned to each document that will be referenced with an `oLink`. It is usually added as an `id` (or `xml:id` for DocBook5) attribute to the root element of the document.

2. Decide on your output hierarchy.

For creating links between documents, the relative locations of the output documents must be known. Before going further you must decide the names and locations of the output directories for all the documents from the domain. Each directory will be represented by an element `<dir name="directory_name">` in the target database document.

3. Create the target database document.

Each collection of documents has a master target database document that is used to resolve all `oLinks` from that collection. The target database document is an XML file that is created once. It provides a framework that pulls in the target data for each document. The database document is static and all the document data is pulled in dynamically.

The following is an example target database document. It structures the documents in the collection into a `sitemap` element that provides the relative locations of the outputs (HTML in this example). Then it pulls in the individual target data using system entity references to target data files that will be created in the next step.

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE targetset [
<ENTITY ugtargets SYSTEM "file:///doc/userguide/target.db">
<ENTITY agtargets SYSTEM "file:///doc/adminguide/target.db">
<ENTITY reftargets SYSTEM "file:///doc/man/target.db">
]>
<targetset>
  <targetsetinfo>
    Description of this target database document,
    which is for the examples in olink doc.
  </targetsetinfo>

  <!-- Site map for generating relative paths between documents -->
  <sitemap>
    <dir name="documentation">
      <dir name="guides">
        <dir name="mailuser">
          <document targetdoc="MailUserGuide"
            baseuri="userguide.html">
            &ugtargets;
          </document>
        </dir>
        <dir name="mailadmin">
          <document targetdoc="MailAdminGuide">
            &agtargets;
          </document>
        </dir>
      </dir>
      <dir name="reference">
        <dir name="mailref">
          <document targetdoc="MailReference">
            &reftargets;
          </document>
        </dir>
      </dir>
    </dir>
  </sitemap>
</targetset>
```

4. Generate the target data files by executing a DocBook transformation scenario.

Before applying the transformation, you need to edit the transformation scenario, go to **Parameters**, and make sure the value of the `collect.xref.targets` parameter is set to **yes**. The default name of a target data file is `target.db`, but it can be changed by setting an absolute file path in the `targets.filename` parameter.

An example of a `target.db` file:

```
<div element="book" href="#MailAdminGuide" number="1" targetptr="user_accounts">
  <ttitle>Administering User Accounts</ttitle>
  <xref text="How to administer user accounts"/>
  <div element="part" href="#d5e4" number="I">
    <ttitle>First Part</ttitle>
    <xref text="Part I, 'First Part'"/>
    <div element="chapter" href="#d5e6" number="1">
      <ttitle>Chapter Title</ttitle>
```



```

<xref text="Chapter 1, Chapter Title" />
<div element="sect1" href="#src_chapter" number="1"
targetptr="src_chapter">
  <ttl>Section1 Title</ttl>
  <xref text="xreflabel_here" />
</div>
</div>
</div>
</div>

```

5. Insert olink elements in the DocBook documents.

When editing a DocBook XML document in **Author** mode, the **Insert OLink** action is available in the  **Link** drop-down menu from the toolbar. This action opens the **Insert OLink** dialog box that allows you to select the target of an olink from the list of all possible targets from a specified target database document (specified in the **Targetset URL** field). Once a **Targetset URL** is selected, the structure of the target documents is presented. For each target document (**targetdoc**), its content is displayed allowing you to easily identify the appropriate **targetptr**. You can also use the search fields to quickly identify a target. If you already know the values for the **targetdoc** and **targetptr**, you can insert them directly in the corresponding fields.

In the following image, the target database document is called **target.xml**, **dbadmin** is selected for the target document (**targetdoc**), and **bldinit** is selected as the value for the **targetptr** attribute. Notice that you can also add XREF text into the olink by using the **xref text** field.

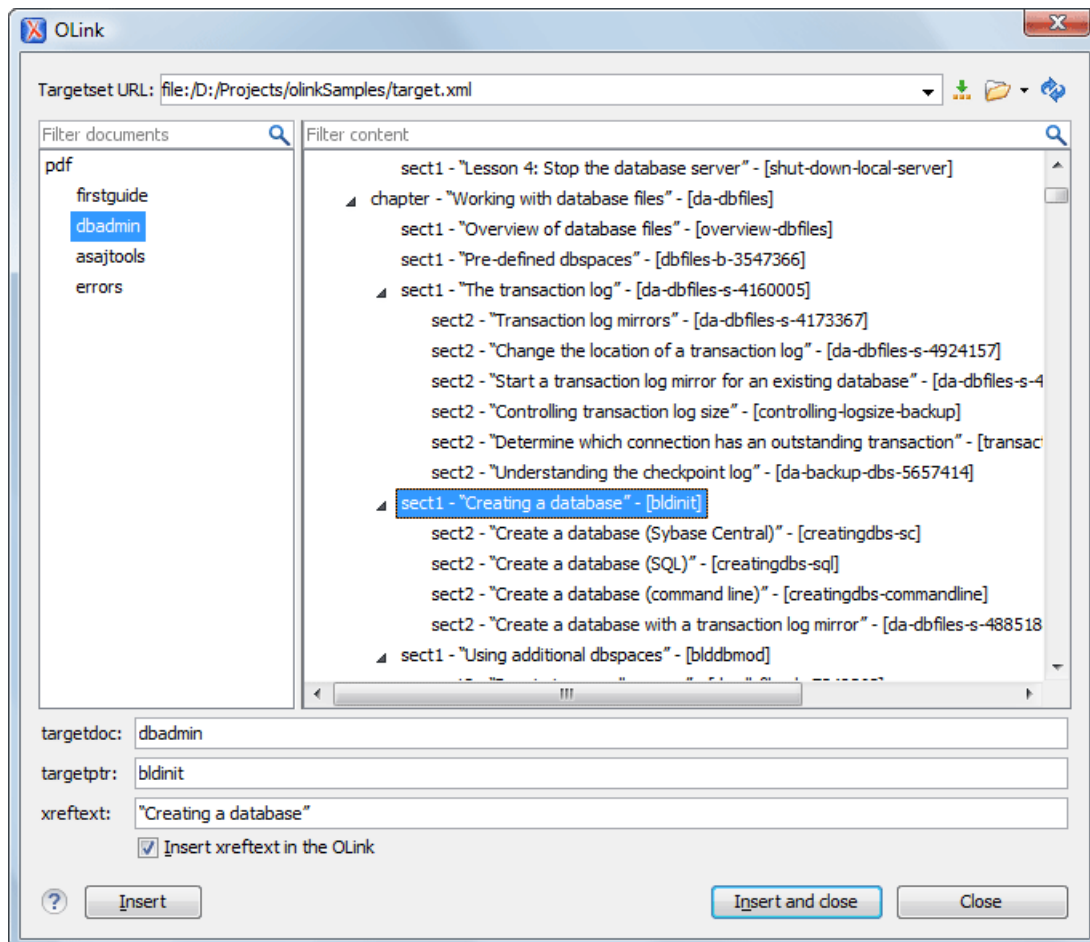


Figure 192: Insert OLink Dialog Box

6. Process a DocBook transformation each document to generate its output.

- a) Edit the transformation scenario and set the value of the **target.database.document** parameter to be the URL of the target database document.

- b) Apply the transformation scenario.

The DITA Topics Document Type

The Darwin Information Typing Architecture (DITA) is an XML-based architecture oriented to authoring, producing, and delivering technical information. It divides content into small, self-contained topics that you can reuse in various deliverables. The extensibility of DITA permits organizations to define specific information structures while still using standard tools to work with them. Oxygen XML Developer provides schema-driven (DTD, RNG, XSD) templates for DITA documents.

A file is considered to be a DITA topic document when one of the following conditions are true:

- The root element name is one of the following: **concept**, **task**, **reference**, **dita**, or **topic**.
- The PUBLIC ID of the document is a PUBLIC ID for the elements listed above.
- The root element of the file has an attribute named **DITAArchVersion** for the “http://dita.oasis-open.org/architecture/2005/” namespace. This enhanced case of matching is only applied when the **Enable DTD/XML Schema processing in document type detection** option is enabled from the [Document Type Association preferences page](#).

Default schemas that are used if one is not detected in the DITA documents are stored in the various folders inside [OXYGEN_DIR]/frameworks/dita/DITA-OT/dtd/ or [OXYGEN_DIR]/frameworks/dita/DITA-OT/schema/ (or if you are using DITA 2.x, inside [OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/dtd/ or [OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/schema/).

The default catalogs for the DITA topic document type are as follows:

- [OXYGEN_DIR]/frameworks/dita/catalog.xml
- [OXYGEN_DIR]/frameworks/dita/DITA-OT/catalog-dita.xml (or if you are using DITA 2.x, [OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/catalog-dita.xml)
- [OXYGEN_DIR]/frameworks/dita/plugin/catalog.xml
- [OXYGEN_DIR]/frameworks/dita/styleguide/catalog.xml

DITA Transformation Scenarios

The following default transformation scenarios are available for DITA Topics:

- **DITA XHTML** - Transforms a DITA topic to XHTML using DITA Open Toolkit.
- **DITA PDF** - Transforms a DITA topic to PDF using the DITA Open Toolkit and the Apache FOP engine.

DITA Templates

The default templates available for DITA topics are stored in various sub-folders inside the [OXYGEN_DIR]/frameworks/dita/templates/ folder. They can be used for easily creating a DITA concept, reference, task, topic, or other DITA documents.

Here are some of the DITA templates available when creating [new documents from templates](#):

- **Composite** - New DITA Composite
- **Concept** - New DITA Concept
- **General Task** - New DITA Task
- **Glossentry** - New DITA Glossentry
- **Glossgroup** - New DITA Glossgroup
- **Machinery Task** - New DITA Machinery Task
- **Reference** - New DITA Reference
- **Task** - New DITA Task
- **Topic** - New DITA Topic
- **Learning Assessment** - New DITA Learning Assessment (learning specialization in DITA 1.2)
- **Learning Content** - New DITA Learning Content (learning specialization in DITA 1.2)

- **Learning Summary** - New DITA Learning Summary (learning specialization in DITA 1.2)
- **Learning Overview** - New DITA Learning Overview (learning specialization in DITA 1.2)
- **Learning Plan** - New DITA Learning Plan (learning specialization in DITA 1.2)
- **Troubleshooting** - Experimental DITA 1.3 troubleshooting specialization

DITA for Publishers topic specialization templates (available when using the [built-in DITA-OT 1.8 version](#)):

- **D4P Article** - New DITA for Publishers article
- **D4P Chapter** - New DITA for Publishers chapter
- **D4P Concept** - New DITA for Publishers concept
- **D4P Conversion Configuration** - New DITA for Publishers conversion configuration
- **D4P Cover** - New DITA for Publishers cover
- **D4P Part** - New DITA for Publishers part
- **D4P Sidebar** - New DITA for Publishers sidebar
- **D4P Subsection** - New DITA for Publishers subsection
- **D4P Topic** - New DITA for Publishers topic



Note: If you select the [built-in DITA-OT 2.x \(with experimental DITA 1.3 support\)](#) option in the [DITA Preferences Page](#), you will also have access to some experimental templates for DITA 1.3.

The DITA Map Document Type

DITA maps are documents that collect and organize references to DITA topics to indicate the relationships among the topics. They can also serve as outlines or tables of contents for DITA deliverables and as build manifests for DITA projects.

Maps allow scalable reuse of content across multiple contexts. They can be used by information architects, authors, and publishers to plan, develop, and deliver content.

A file is considered to be a DITA map document when either of the following is true:

- The root element name is one of the following: `map`, `bookmap`.
- The public id of the document is `-//OASIS//DTD DITA Map` or `-//OASIS//DTD DITA BookMap`.
- The root element of the file has an attribute named `class` which contains the value `map/map` and a `DITAArchVersion` attribute from the <http://dita.oasis-open.org/architecture/2005/> namespace. This enhanced case of matching is only applied when the **Enable DTD processing** option from the [Document Type Association preferences page](#) is enabled.

Default schemas that are used if one is not detected in the DITA map document are stored in the various folders inside `[OXYGEN_DIR]/frameworks/dita/DITA-OT/dtd/` or `[OXYGEN_DIR]/frameworks/dita/DITA-OT/schema/` (or if you are using DITA 2.x, inside `[OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/dtd/` or `[OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/schema/`).

The default catalogs for the *DITA Map* document type are as follows:

- `[OXYGEN_DIR]/frameworks/dita/catalog.xml`
- `[OXYGEN_DIR]/frameworks/dita/DITA-OT/catalog-dita.xml` (or if you are using DITA 2.x, `[OXYGEN_DIR]/frameworks/dita/DITA-OT2.x/catalog-dita.xml`)

DITA Map Transformation Scenarios

The following default transformations are available:

- Predefined transformation scenarios allow you to transform a DITA map to PDF, ODF, XHTML, WebHelp, EPUB, and CHM files.
- **Run DITA-OT Integrator** - Use this transformation scenario if you want to integrate a DITA-OT plugin. This scenario runs an Ant task that integrates all the plug-ins from the `DITA-OT/plugins` directory.

- **DITA Map Metrics Report** - Use this transformation scenario if you want to generate a DITA map statistics report containing information such as:
 - The number of processed maps and topics.
 - Content reuse percentage.
 - Number of elements, attributes, words, and characters used in the entire DITA map structure.
 - DITA conditional processing attributes used in the DITA maps.
 - Words count.
 - Information types such as number of containing maps, bookmaps, or topics.

Many more output formats are available by clicking the **New** button. The transformation process relies on the DITA Open Toolkit.

DITA Map to WebHelp Output

DITA maps can be transformed into WebHelp systems.

WebHelp Output

To publish a DITA map to WebHelp, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
2. Select the **DITA Map WebHelp** scenario from the **DITA Map** section.
3. Click **Apply associated**.

When the **DITA Map WebHelp** transformation is complete, the output is automatically opened in your default browser.

WebHelp With Feedback Output

To publish a DITA map as WebHelp with Feedback:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DITA Map WebHelp with Feedback** scenario from the **DITA Map** section.
3. Click **Apply associated**.
4. Enter the documentation product ID and the documentation version.

When the **DITA Map WebHelp with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output.

To watch our video demonstration about the feedback-enabled WebHelp system, go to http://oxygenxml.com/demo/Feedback_Enabled_WebHelp.html.

WebHelp Mobile Output

To generate a mobile WebHelp system from your DITA map:

1. From the **DITA Maps Manager** view click  **Configure Transformation Scenarios**.
2. Select the **DITA Map WebHelp - Mobile** transformation scenario.
3. Click **Apply associated**.

When the **DITA Map WebHelp - Mobile** transformation is complete, the output is automatically opened in your default browser.

Once Oxygen XML Developer finishes the transformation process, the output is automatically opened in your default browser.

To further customize these out-of-the-box transformation, you can edit the following most commonly used parameters:

webhelp.sitemap.base.url

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the DITA map, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

webhelp.sitemap.change.frequency

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq` element is not added in `sitemap.xml`. Allowed values: <empty string> (default), `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, `never`.

webhelp.sitemap.priority

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority), such as: 0.3, 0.5, 0.8, etc. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

webhelp.copyright

Adds a small copyright text that appears at the end of the *Table of Contents* pane.

webhelp.footer.file

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate `div` or `span` element, and the code for each `script` element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
  <div id="fb-root"/>
  <script>
    <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0]; if (d.getElementById(id))
      return;
      js = d.createElement(s); js.id = id; js.src =
      "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
      fjs.parentNode.insertBefore(js, fjs); }(document, 'script', 'facebook-jssdk')); -->
    </script>
    <div data-share="true" data-show-faces="true" data-action="like" data-layout="standard" class="fb-like"/>
  </div>
```

webhelp.footer.include

Specifies whether or not to include footer in each WebHelp page. Possible values: `yes`, `no`. If set to `no`, no footer is added to the WebHelp pages. If set to `yes` and the `webhelp.footer.file` parameter has a value, then the content of that file is used as footer. If the `webhelp.footer.file` has no value then the default Oxygen XML Developer footer is inserted in each WebHelp page.

webhelp.logo.image (not available for the WebHelp Mobile transformation)

Specifies a path to an image displayed as a logo in the left side of the output header.

webhelp.logo.image.target.url (not available for the WebHelp Mobile transformation)

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

webhelp.search.ranking (not available for the WebHelp Mobile transformation)

If this parameter is set to `false` then the *5-star rating mechanism* is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

webhelp.search.japanese.dictionary

The file path of the dictionary that will be used by the *Kuromoji* morphological engine that Oxygen XML Developer uses for indexing Japanese content in the WebHelp pages. This indexer does not come bundled with Oxygen XML Developer or the Oxygen XML WebHelp plugin. To use it, you need to download it from <http://mvnrepository.com/artifact/org.apache.lucene/lucene-analyzers-kuromoji/4.0.0> and add it in the `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/lib` directory.

webhelp.google.search.script

Specifies the location of a well-formed XHTML file containing the Custom Search Engine script from Google. The value must be an URL.

webhelp.google.search.results

URL value that specifies the location of a well-formed XHTML file containing the Google Custom Search Engine element `gcse:searchresults-only`. You can use all supported attributes for this element. It is recommend to set the `linkTarget` attribute to `frm` for frameless (*iframe*) version of WebHelp or to `contentwin` for the frameset version of WebHelp. The default value for this attribute is `_blank` and the search results will be loaded in a new window. If this parameter is not specified, the following code will be used

```
<gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>
```

use.stemming

Controls whether or not you want to include stemming search algorithms into the published output (default setting is `false`).

clean.output

Deletes all files from the output folder before the transformation is performed (only `no` and `yes` values are valid and the default value is `no`).

args.default.language

This parameter is used if the language is not detected in the DITA map. The default value is `en-us`.

webhelp.head.script

URL value that specifies the location of a well-formed XHTML file containing the custom script that will be copied in the `<head>` section of every WebHelp page.

webhelp.body.script

URL value that specifies the location of a well-formed XHTML file containing the custom script that will be copied in the `<body>` section of every WebHelp page.

fix.external.refs.com.oxygenxml (Only supported when the DITA OT transformation process is started from Oxygen XML Developer)

The DITA Open Toolkit usually has problems processing references that point to locations outside of the directory of the processed DITA map. This parameter is used to specify whether or not the application should try to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references. The fix has no impact on your edited DITA content. Allowed values: `true` or `false` (default).

Support for Right-to-Left (RTL) Oriented Languages

To activate support for RTL languages in WebHelp output, edit the DITA map and set the `xml:lang` attribute on its root element (`map`). The corresponding attribute value can be set for following RTL languages:

- `ar-eg` - Arabic
- `he-il` - Hebrew
- `ur-pk` - Urdu

WebHelp Search Engine Optimization

A **DITA Map WebHelp** transformation scenario can be configured to produce a `sitemap.xml` file that is used by search engines to aid crawling and indexing mechanisms. A *sitemap* lists all pages of a WebHelp system and allows webmasters to provide additional information about each page, such as the date it was last updated, change frequency, and importance of each page in relation to other pages in your WebHelp deployment.

The structure of the `sitemap.xml` file looks like this:

```
<urlset xmlns="http://www.sitemaps.org/schemas/sitemap/0.9">
  <url>
    <loc>http://www.example.com/topics/introduction.html</loc>
    <lastmod>2014-10-24</lastmod>
    <changefreq>weekly</changefreq>
    <priority>0.5</priority>
  </url>
  <url>
    <loc>http://www.example.com/topics/care.html#care</loc>
```

```
<lastmod>2014-10-24</lastmod>
<changefreq>weekly</changefreq>
<priority>0.5</priority>
</url>
</urlset>
```

Each page has a `<url>` element structure containing additional information, such as:

- **loc** - the URL of the page. This URL must begin with the protocol (such as `http`), if required by your web server. It is constructed from the value of the `webhelp.sitemap.base.url` parameter from the transformation scenario and the relative path to the page (collected from the `href` attribute of a `topicref` element in the DITA map).



Note: The value must have less than 2,048 characters.

- **lastmod** - the date when the page was last modified. The date format is `YYYY-MM-DD`.
- **changefreq** - indicates how frequently the page is likely to change. This value provides general information to assist search engines, but may not correlate exactly to how often they crawl the page. Valid values are: `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, and `never`. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.change.frequency` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.



Note: The value `always` should be used to describe documents that change each time they are accessed. The value `never` should be used to describe archived URLs.

- **priority** - the priority of this page relative to other pages on your site. Valid values range from 0.0 to 1.0. This value does not affect how your pages are compared to pages on other sites. It only lets the search engines know which pages you deem most important for the crawlers. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.priority` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.



Note: `lastmod`, `changefreq`, and `priority` are optional elements.

Creating and Editing the `sitemap.xml` File

Follow these steps to produce a `sitemap.xml` file for your WebHelp system, which can then be edited to fine-tune search engine optimization:

1. **Edit** the transformation scenario you currently use for obtaining your WebHelp output. This opens the **Edit DITA Scenario** dialog box.
 2. Open the **Parameters** tab and set a value for the following parameters:
 - `webhelp.sitemap.base.url` - the URL of the location where your WebHelp system is deployed
-
- Note:** This parameter is required in order for Oxygen XML Developer to generate the `sitemap.xml` file.
- `webhelp.sitemap.change.frequency` - how frequently the WebHelp pages are likely to change (accepted values are: `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, and `never`)
 - `webhelp.sitemap.priority` - the priority of each page (value ranging from 0.0 to 1.0)
 3. Run the transformation scenario.
 4. Look for the `sitemap.xml` file in the transformation's output folder. Edit the file to fine-tune the parameters of each page, according to your needs.

Indexing Japanese Content in WebHelp Pages

To optimize the indexing of Japanese content in WebHelp pages generated from DITA map transformations, the Kuromoji analyzer can be used. This analyzer is not included in the Oxygen XML Developer installation kit and must be downloaded and added.

To use the Kuromoji analyzer to index Japanese content in your WebHelp system, follow these steps:

1. Download the analyzer jar file from <http://mvnrepository.com/artifact/org.apache.lucene/lucene-analyzers-kuromoji/4.0.0>.
2. Place the Kuromoji analyzer jar file in the following directory:
`DITA_OT_DIR/plugins/com.oxygenxml.webhelp/lib.`
3. For the analyzer to work properly, search terms that are entered into your WebHelp pages must be separated by spaces.

Optionally a Japanese user dictionary can be set with [the `webhelp.search.japanese.dictionary` parameter](#).

Compiled HTML Help (CHM) Output Format

To perform a **Compiled HTML Help (CHM)** transformation Oxygen XML Developer needs Microsoft HTML Help Workshop to be installed on your computer. Oxygen XML Developer automatically detects HTML Help Workshop and uses it.



Note: HTML Help Workshop might fail if the files used for transformation contain accents in their names, due to different encodings used when writing the `.hhp` and `.hhc` files. If the transformation fails to produce the CHM output but the `.hhp` (HTML Help Project) file is already generated, you can manually try to build the CHM output using HTML Help Workshop.

Changing the Output Encoding

Oxygen XML Developer uses the `htmlhelp.locale` parameter to correctly display specific characters of different languages in the output of the **Compiled HTML Help (CHM)** transformation. The **Compiled HTML Help (CHM)** default scenario that comes bundled with Oxygen XML Developer has the `htmlhelp.locale` parameter set to `en-US`.

The default value of the `htmlhelp.locale` is `en-US`. To customize this parameter, go to **Configure**

Transformation Scenarios and click the **Edit** button. In the parameter tab search for the `htmlhelp.locale` parameter and change its value to the desired language tag.

The format of the `htmlhelp.locale` parameter is `LL-CC`, where `LL` represents the language code (`en` for example) and `CC` represents the country code (`US` for example). The language codes are contained in the ISO 639-1 standard and the country codes are contained in the ISO 3166-1 standard. For further details about language tags, go to <http://www.rfc-editor.org/rfc/rfc5646.txt>.

Kindle Output Format

Oxygen XML Developer requires KindleGen to generate Kindle output from DITA maps. To install KindleGen for use by Oxygen XML Developer, follow these steps:

1. Go to www.amazon.com/kindleformat/kindlegen and download the zip file that matches your operating system.
2. Unzip the file on your local disk.
3. Start Oxygen XML Developer and open a DITA map in the **DITA Maps Manager** view.
4. In the **DITA Maps Manager** view, open the **Configure Transformation Scenario(s)** dialog box.
5. Select the **DITA Map Kindle** transformation and press the **Edit** button to edit it.
6. Go to **Parameters** tab and set the `kindlegen.executable` parameter as the path to the *KindleGen* directory.
7. Accept the changes.

Migrating OOXML Documents to DITA

Oxygen XML Developer integrates the entire DITA for Publishers plugins suite, enabling you to migrate content from Open Office XML documents to DITA:

- Open an OOXML document in Oxygen XML Developer. The document is opened in the **Archive Browser** view.
- From the **Archive Browser**, open document.xml.



Note: document.xml holds the content of the document.

- Click  **Configure Transformation Scenario(s)** on the toolbar and apply the **DOCX DITA** scenario. If you encounter any issues with the transformation, click the link below for further details about the Word to DITA Transformation Framework.

DITA Map Templates

The default templates available for DITA maps are stored in `[OXYGEN_DIR]/frameworks/dita/templates/map` folder.

Here are some of the DITA map templates available when creating *new documents from templates*:

- **DITA Map - Bookmark** - New DITA Bookmark.
- **DITA Map - Map** - New DITA map.
- **DITA Map - Learning Map** - New DITA learning and training content specialization map.
- **DITA Map - Learning Bookmark** - New DITA learning and training content specialization bookmark.
- **DITA Map - Eclipse Map** - IBM specialization of DITA map used for producing Eclipse Help plugins.

DITA for Publishers Map specialization templates:

- **D4P Map** - New DITA for Publishers map.
- **D4P Pub-component-map** - New DITA for Publishers pub-component-map.
- **D4P Pubmap** - New DITA for Publishers pubmap.

The XHTML Document Type

The Extensible HyperText Markup Language (XHTML), is a markup language that has the same depth of expression as HTML, but also conforms to XML syntax.

A file is considered to be a XHTML document when the root element name is `html`.

Default schemas that are used if one is not detected in the XHTML file are stored in the following locations:

- XHTML 1.0 - `[OXYGEN_DIR]/frameworks/xhtml/dtd/` or `[OXYGEN_DIR]/frameworks/xhtml/nvdl/`.
- XHTML 1.1 - `[OXYGEN_DIR]/frameworks/xhtml11/dtd/` or `[OXYGEN_DIR]/frameworks/xhtml11/schema/`.
- XHTML 5 - `[OXYGEN_DIR]/frameworks/xhtml/xhtml5 (epub3)/`.

The default catalogs for the XHTML document type are as follows:

- `[OXYGEN_DIR]/frameworks/xhtml/dtd/xhtmlcatalog.xml`
- `[OXYGEN_DIR]/frameworks/relaxng/catalog.xml`
- `[OXYGEN_DIR]/frameworks/nvdl/catalog.xml`
- `[OXYGEN_DIR]/frameworks/xhtml11/dtd/xhtmlcatalog.xml`
- `[OXYGEN_DIR]/frameworks/xhtml11/schema/xhtmlcatalog.xml`
- `[OXYGEN_DIR]/xhtml5 (epub3)/catalog-compatible.xml`

XHTML Transformation Scenarios

The following default transformation scenarios are available for XHTML:

- **XHTML to DITA concept** - Converts an XHTML document to a DITA concept document.
- **XHTML to DITA reference** - Converts an XHTML document to a DITA reference document.
- **XHTML to DITA task** - Converts an XHTML document to a DITA task document.
- **XHTML to DITA topic** - Converts an XHTML document to a DITA topic document.

XHTML Templates

Default templates are available for XHTML. They are stored in `[OXYGEN_DIR]/frameworks/xhtml/templates` folder and they can be used for easily creating basic XHTML documents.

Here are some of the XHTML templates available when creating [new documents from templates](#).

- **XHTML - 1.0 Strict** - New Strict XHTML 1.0
- **XHTML - 1.0 Transitional** - New Transitional XHTML 1.0
- **XHTML - 1.1 DTD Based** - New DTD based XHTML 1.1
- **XHTML - 1.1 DTD Based + MathML 2.0 + SVG 1.1** - New XHTML 1.1 with MathML and SVG insertions
- **XHTML - 1.1 Schema based** - New XHTML 1.1 XML Schema based

The TEI ODD Document Type

The **Text Encoding Initiative - One Document Does it all (TEI ODD)** is a TEI XML-conformant specification format that allows you to create a custom TEI P5 schema in a literate programming fashion. A system of XSLT stylesheets called [Roma](#) was created by the TEI Consortium for manipulating the ODD files.

A file is considered to be a TEI ODD document when the following conditions are true:

- The file extension is `.odd`.
- The document namespace is `http://www.tei-c.org/ns/1.0`.

The default schema that is used if one is not detected in the TEI ODD document is `tei_odds.rng` and it is stored in `[OXYGEN_DIR]/frameworks/tei/xml/tei/custom/schema/relaxng/`.

The default catalogs for the TEI ODD document type are as follows:

- `[OXYGEN_DIR]/frameworks/tei/xml/tei/custom/schema/catalog.xml`
- `[OXYGEN_DIR]/frameworks/tei/xml/tei/schema/catalog.xml`

TEI ODD Transformation Scenarios

The following default transformations are available:

- **TEI ODD XHTML** - Transforms a TEI ODD document into an XHTML document
- **TEI ODD PDF** - Transforms a TEI ODD document into a PDF document using the Apache FOP engine
- **TEI ODD EPUB** - Transforms a TEI ODD document into an EPUB document
- **TEI ODD DOCX** - Transforms a TEI ODD document into a DOCX document
- **TEI ODD ODT** - Transforms a TEI ODD document into an ODT document
- **TEI ODD RelaxNG XML** - Transforms a TEI ODD document into a RelaxNG XML document
- **TEI ODD to DTD** - Transforms a TEI ODD document into a DTD document
- **TEI ODD to XML Schema** - Transforms a TEI ODD document into an XML Schema document
- **TEI ODD to RelaxNG Compact** - Transforms a TEI ODD document into an RelaxNG Compact document

TEI ODD Templates

There is only one default template which is stored in the `[OXYGEN_DIR]/frameworks/tei/templates/TEI ODD` folder and can be used for easily creating a basic TEI ODD document. This template is available when creating [new documents from templates](#).

- **TEI ODD** - New TEI ODD document

The TEI P4 Document Type

The **Text Encoding Initiative (TEI) Guidelines** is an international and interdisciplinary standard that enables libraries, museums, publishers, and individual scholars to represent a variety of literary and linguistic texts for online research, teaching, and preservation.

A file is considered to be a TEI P4 document when one of the following conditions are true:

- The local name of the root is `TEI . 2`.
- The public id of the document is `-//TEI P4`.

The default schema that is used if one is not detected in the TEI P4 document is `tei2.dtd` and it is stored in `[OXYGEN_DIR]/frameworks/tei/xml/teip4/schema/dtd/`.

The default catalogs for the TEI P4 document type are as follows:

- [OXYGEN_DIR]/frameworks/tei/xml/teip4/schema/dtd/catalog.xml
- [OXYGEN_DIR]/frameworks/tei/xml/teip4/custom/schema/dtd/catalog.xml
- [OXYGEN_DIR]/frameworks/tei/xml/teip4/stylesheet/catalog.xml

TEI P4 Transformation Scenarios

The following default transformations are available:

- **TEI HTML** - Transforms a TEI document into a HTML document;
- **TEI P4 -> TEI P5 Conversion** - Convert a TEI P4 document into a TEI P5 document;
- **TEI PDF** - Transforms a TEI document into a PDF document using the Apache FOP engine.

TEI P4 Templates

The default templates are stored in [OXYGEN_DIR]/frameworks/tei/templates/TEI P4 folder and they can be used for easily creating basic TEI P4 documents. These templates are available when creating [new documents from templates](#).

- **TEI P4 - Lite** - New TEI P4 Lite
- **TEI P4 - New Document** - New TEI P4 standard document

The TEI P5 Document Type

The **Text Encoding Initiative (TEI) Guidelines** is an international and interdisciplinary standard that enables libraries, museums, publishers, and individual scholars to represent a variety of literary and linguistic texts for online research, teaching, and preservation.

A file is considered to be a TEI P5 document when one of the following conditions are true:

- The document namespace is *http://www.tei-c.org/ns/1.0*.
- The public id of the document is *-//TEI P5*.

The default schema that is used if one is not detected in the TEI P5 document is `tei_all.rng` and it is stored in [OXYGEN_DIR]/frameworks/tei/xml/tei/custom/schema/relaxng/.

The default catalogs for the TEI P5 document type are as follows:

- [OXYGEN_DIR]/frameworks/tei/xml/tei/schema/dtd/catalog.xml
- [OXYGEN_DIR]/frameworks/tei/xml/tei/custom/schema/dtd/catalog.xml
- [OXYGEN_DIR]/frameworks/tei/xml/tei/stylesheet/catalog.xml

To watch our video demonstration about TEI editing, go to http://oxygenxml.com/demo/WYSIWYG_TEI_Editing.html.

TEI P5 Transformation Scenarios

The following default transformations are available:

- **TEI P5 XHTML** - transforms a TEI P5 document into a XHTML document;
- **TEI P5 PDF** - transforms a TEI P5 document into a PDF document using the Apache FOP engine;
- **TEI EPUB** - transforms a TEI P5 document into an EPUB output. The EPUB output will contain any images referenced in the TEI XML document;
- **TEI DOCX** - transforms a TEI P5 document into a DOCX (OOXML) document. The DOCX document will contain any images referenced in the TEI XML document;
- **TEI ODT** - transforms a TEI P5 document into an ODT (ODF) document. The ODT document will contain any images referenced in the TEI XML document.

TEI P5 Templates

The default templates are stored in `[OXYGEN_DIR]/frameworks/tei/templates/TEI P5` folder and they can be used for easily creating basic TEI P5 documents. These templates are available when creating *new documents from templates*:

- **TEI P5 - All** - New TEI P5 All.
- **TEI P5 - Bare** - New TEI P5 Bare.
- **TEI P5 - Lite** - New TEI P5 Lite.
- **TEI P5 - Math** - New TEI P5 Math.
- **TEI P5 - Speech** - New TEI P5 Speech.
- **TEI P5 - SVG** - New TEI P5 with SVG extensions.
- **TEI P5 - XInclude** - New TEI P5 XInclude aware.

Customization of TEI Frameworks Using the Compiled Sources

The following procedure describes how to update to the latest stable version of TEI Schema and TEI XSL, already integrated in the TEI framework for Oxygen XML Developer.

1. Go to <https://code.google.com/p/oxygen-tei/>;
2. Go to **Downloads**;
3. Download the latest uploaded .zip file;
4. Unpack the .zip file and copy its content in the Oxygen XML Developer `frameworks` folder.

The JATS Document Type

The JATS (NISO Journal Article Tag Suite) document type is a technical standard that defines an XML format for scientific literature.

A file is considered to be a JATS document when the PUBLIC ID of the document contains the string `-//NLM//DTD`.

Default schemas that are used if one is not detected in the JATS document are stored in `[OXYGEN_DIR]/frameworks/jats/02-DTD/`.

The default XML catalog, `JATS-catalog-02.xml`, is stored in `[OXYGEN_DIR]/frameworks/02-DTD/`.

JATS Transformation Scenarios

The following default transformation scenario is available for JATS documents:

- **JATS Preview (simple HTML)** - Converts a JATS document to a simple HTML document.

JATS Templates

Default templates are available for JATS documents. They are stored in `[OXYGEN_DIR]/frameworks/jats/templates` folder and they can be used for easily creating basic JATS documents.

The default JATS templates that are available when creating *new documents from templates* are as follows:

- **Archiving** - JATS archiving tag set version 1.0.
- **Authoring** - JATS authoring tag set version 1.0.
- **Book** - JATS book tag set version 1.0.
- **Publishing** - JATS publishing tag set version 1.0.

The EPUB Document Type

Three distinct frameworks are supported for the EPUB document type:

- **NCX** - A declarative global navigation definition.
- **OCF** - The Open Container Format (OCF) defines a mechanism by which all components of an Open Publication Structure (OPS) can be combined into a single file system entity.

- **OPF** - The Open Packaging Format (OPF) defines the mechanism by which all components of a published work that conforms to the Open Publication Structure (OPS) standard (including metadata, reading order, and navigational information) are packaged in an OPS Publication.



Note: Oxygen XML Developer supports both OPF 2.0 and OPF 3.0.

Document Templates

The default templates for the *NCX* and *OCF* document types are located in the `[OXYGEN_DIR]/frameworks/docbook/templates` folder.

The default template for the *OPF 2.0* document type is located in the `[OXYGEN_DIR]/frameworks/docbook/templates/2.0` folder.

The default template for the *OPF 3.0* document type is located in the `[OXYGEN_DIR]/frameworks/docbook/templates/3.0` folder.

The following EPUB templates are available when creating *new documents from templates*:

- **NCX - Toc** - New table of contents.
- **OCF - Container** - New container based OCF.
- **OCF - Encryption** - New encryption based OCF.
- **OCF - Signatures** - New signature based OCF.
- **OPF 2.0 - Content (2.0)** - New OPF 2.0 content.
- **OPF 3.0 - Content (3.0)** - New OPF 3.0 content.

The DocBook Targetset Document Type

DocBook *Targetset* documents are used to resolve cross references with the DocBook olink.

A file is considered to be a *Targetset* when the root name is `targetset`.

The default schema, `targetdatabase.dtd`, for this type of document is stored in `[OXYGEN_DIR]/frameworks/docbook/xsl/common/`.

Document Templates

The default template for DocBook *Targetset* documents is located in the `[OXYGEN_DIR]/frameworks/docbook/templates/Targetset` folder.

The following DocBook *Targetset* template is available when creating *new document from templates*:

- **DocBook Targetset - Map** - New Targetset map.

Chapter

8

Transforming Documents

Topics:

- [Transformation Scenarios](#)
- [Output Formats](#)

XML documents can be transformed into a variety of user-friendly output formats that can be viewed by other users. This process is known as a *transformation*.

Transformation Scenarios

A transformation scenario is a set of complex operations and settings that gives you the possibility to obtain outputs of multiple types (XML, HTML, PDF, EPUB, etc.) from the same source of XML files and stylesheets.

Executing a transformation scenario implies multiple actions, such as:

- Validating the input file.
- Obtaining intermediate output files (for example, formatting objects for the XML to PDF transformation).
- Using transformation engines to produce the output.

Before transforming an XML document in Oxygen XML Developer, you need to define a transformation scenario to apply to that document. A scenario is a set of values for various parameters that define a transformation. It is not related to a particular document, but rather to a document type. Types of transformation scenarios include:

- **Scenarios that Apply to XML Files** - This type of scenario contains the location of an XSLT stylesheet that is applied on the edited XML document, as well as other transformation parameters.
- **Scenarios that Apply to XSLT Files** - This type of scenario contains the location of an XML document, on which the edited XSLT stylesheet is applied, as well as other transform parameters.
- **Scenarios that Apply to XQuery Files** - This type of scenario contains the location of an XML source, on which the edited XQuery file is applied, as well as other transform parameters. When the XML source is a native XML database, the XML source field of the scenario is empty because the XML data is read with XQuery-specific functions, such as `document ( )`. When the XML source is a local XML file, the URL of the file is specified in the XML input field of the scenario.
- **Scenarios that Apply to SQL Files** - This type of scenario specifies a database connection for the database server that runs the SQL file that is associated with the scenario. The data processed by the SQL script is located in the database.
- **Scenarios that Apply to XProc Files** - This type of scenario contains the location of an XProc script, as well as other transform parameters.
- **DITA-OT Scenarios** - This type of scenario provides the parameters for an Ant transformation that executes a DITA-OT build script. Oxygen XML Developer comes with a built-in version of Ant and a built-in version of DITA-OT, although you can also set other versions in the scenario.
- **ANT Scenarios** - This type of scenario contains the location of an Ant build script, as well as other transform parameters.



Note:

Status messages generated during the transformation process are displayed in the [Information view](#).

Defining a New Transformation Scenario

Defining a transformation scenario is the first step in the process of transforming a document. The following types of scenarios are available:

- **[XML Transformation with XSLT](#)** - Specifies the transformation parameters and location of an XSLT stylesheet that is applied to the edited XML document. This scenario is useful when you develop an XML document and the XSLT document is in its final form.
- **[XML Transformation with XQuery](#)** - Specifies the transform parameters and location of an XQuery file that is applied to the edited XML document.
- **[DITA-OT Transformation](#)** - Specifies the parameters for an Ant transformation that executes a DITA-OT build script. Oxygen XML Developer comes with a built-in version of Ant and a built-in version of DITA-OT but different versions can be set in the scenario.
- **[ANT Transformation](#)** - Allows you to configure the options and parameters of an Ant build script.
- **[XSLT Transformation](#)** - Specifies the transformation parameters and location of an XML document to which the edited XSLT stylesheet is applied. This scenario is useful when you develop an XSLT document and the XML document is in its final form.
- **[XProc Transformation](#)** - Specified the transformation parameters and location of an XProc script.

- **XQuery Transformation** - Specifies the transformation parameters and location of an XML source to which the edited XQuery file is applied. When the XML source is a native XML database, the XML source field of the scenario is empty because the XML data is read with XQuery-specific functions, such as `document()`. When the XML source is a local XML file, the URL of the file is specified in the XML input field of the scenario.
- **SQL Transformation** - Specifies a database connection for the database server that runs the SQL file associated with the scenario. The data processed by the SQL script is located in the database.

XML Transformation with XSLT

To create an **XML transformation with XSLT** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **XML transformation with XSLT**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XSLT**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XSLT**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- **XSLT**.
- **FO Processors**.
- **Output**.

The XSLT Tab

The **XSLT** tab contains the following options:

- **XML URL** - Specifies the source XML file. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.



Note: If the transformer engine is Saxon 9 and a custom URI resolver is configured in **Preferences** for Saxon 9, the XML input of the transformation is passed to that URI resolver.



Note: If the transformer engine is one of the built-in XSLT 2.0 / 3.0 engines and *the name of an initial template* is specified in the scenario, the **XML URL** field can be empty. The **XML URL** field can also be empty if you use *external XSLT processors*. Otherwise, a value is mandatory in the **XML URL** field.

- **XSL URL** - Specifies the source XSL file that the transformation will use. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

You can use the following browsing buttons to enter values in the **XML URL** and **XSL URL** fields:

 Insert Editor Variables

Opens a pop-up menu allowing you to introduce special *Oxygen XML Developer editor variables* or *custom editor variables* in the XML URL field.

 Browse for local file

Opens a local file browser dialog box allowing you to select a local file.

 Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.

 Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.

 Browse Data Source Explorer

Opens the *Data Source Explorer* window.

 Search for file

Allows you to find a file in the current project.

 Open in editor

Opens the file in an editor panel with the path that is specified in the **XML URL** text box.

The rest of the options available in the **XSLT** tab allow you to further customize the transformation scenario:

- **Use "xml-stylesheet" declaration** - Use the stylesheet declared with an `xml-stylesheet` declaration instead of the stylesheet specified in the **XSL URL** field. By default, this checkbox is not selected and the transformation applies the XSLT stylesheet that is specified in the **XSL URL** field. If it is checked, the scenario applies the stylesheet specified explicitly in the XML document with the `xml-stylesheet` processing instruction.
- **Transformer** - This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These are the built-in engines and *the external engines defined in the Custom Engines preferences page*. The engine you choose in this dialog box is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).
 -  **Advanced options** - Allows you to configure the advanced options of the Saxon HE / PE / EE engine for the current transformation scenario. To configure the same options globally, go to the *Saxon-HE/PE/EE preferences page*. For the current transformation scenario, these **Advanced options** override the options configured in the *Saxon-HE/PE/EE preferences page*. The **Initial mode and template** option is only available in the **Advanced options**. It is a Saxon-specific option that sets the name of the first XSLT template that starts the XSLT transformation or the initial mode of the transformation.
- **Parameters** - Opens *the Configure parameters dialog box*, allowing you to configure the XSLT parameters used in the current transformation. In this dialog box, you can also configure the parameters of additional stylesheets by using the **Additional XSLT stylesheets** button. If the XSLT transformation engine is custom-defined, you can not use this dialog box to configure the parameters sent to the custom engine. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XSLT engine to include the necessary parameters in the command line that starts the transformation process.
- **Extensions** - Opens *the dialog box for configuring the XSLT/XQuery extension jars or classes* that define extension Java functions or extension XSLT elements used in the transformation.
- **Additional XSLT stylesheets** - Opens *the dialog box for adding XSLT stylesheets* that are applied on the main stylesheet that is specified in the **XSL URL** field. This is useful when a chain of XSLT stylesheets must be applied to the input XML document.

Configure XSLT Parameters

The global parameters of the XSLT stylesheet used in a transformation scenario can be configured by using the **Parameters** button in the **XSLT** tab of a new or edited transformation scenario dialog box.

The table displays all the parameters of the current XSLT stylesheet, all imported and included stylesheets, and all [additional stylesheets](#), along with their descriptions and current values. You can also add, edit, and remove parameters. Use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with the name in bold.

If the **XPath** column is checked, the parameter value is evaluated as an XPath expression before starting the XSLT transformation.

For example, you can use expressions such as:

```
doc('test.xml')//entry
//person[@atr='val']
```



Note:

1. The **doc** function solves the argument relative to the XSL stylesheet location. You can use full paths or editor variables (such as `${cfdu}` [current file directory]) to specify other locations:
`doc('${cfdu}/test.xml')//*`
2. You cannot use XSLT Functions. Only XPath functions are allowed.

The following actions are available for managing the parameters:

New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the **Insert Editor Variables** button. If the **Evaluate as XPath** option is enabled, the parameter will be evaluated as an XPath expression.

Edit

Opens the **Edit Parameter** dialog box that allows you to edit the selected parameter. An [editor variable](#) can be inserted in the text box using the **Insert Editor Variables** button. If the **Evaluate as XPath** option is enabled, the parameter will be evaluated as an XPath expression.

Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

Delete

Removes the selected parameter from the list. It is enabled only for new parameters that have been added to the list.

The bottom panel presents the following:

- The default value of the parameter selected in the table.
- A description of the parameter, if available.
- The system ID of the stylesheet that declares it.

XSLT/XQuery Extensions

The **Libraries** dialog box is used to specify the jars and classes that contain extension functions called from the XSLT or XQuery file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

An extension function called from the XSLT or XQuery file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the **Move up** or **Move down** buttons.

The FO Processor Tab

The **FO Processor** tab contains the following options:

- **Perform FO Processing** - Specifies whether an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.

- **XSLT result as input** - The FO processor is applied to the result of the XSLT transformation that is defined in the **XSLT** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.
- **Method** - The output format of the FO processing. Available options depend on the selected processor type.
- **Processor** - Specifies the FO processor. It can be the built-in Apache FOP processor or an [external processor](#).

The Output Tab

The **Output** tab contains the following options:

- **Prompt for file** - At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.
- **Save As** - The path of the file where the result of the transformation is stored.
- **Open in Browser/System Application** - If enabled, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, .pdf files are usually opened in the *Acrobat Reader* application).



Note: To set the web browser that is used for displaying HTML/XHTML pages, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field.

- **Saved file** - When **Open in Browser/System Application** is selected, this button can be used to specify that Oxygen XML Developer automatically opens the file specified in the **Save As** text field at the end of the transformation.
 - **Other location** - When **Open in System Application** is selected, this option can be used to specify that Oxygen XML Developer opens the file specified here.
- **Open in editor** - When this is enabled, the transformation result specified in the **Save As** field is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).
- **Show in results view as**
 - **XHTML** - Can only be enabled if **Open in Browser/System Application** is disabled. If this is checked, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.
- **Important:** When transforming very large documents, you should be aware that enabling this feature results in a very long processing time, necessary for rendering the transformation result in the XHTML result viewer panel. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by checking the **Open in browser** option.
- **XML** - If this is checked, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#), specific for XML documents.
 - **SVG** - If this is checked, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **Image URLs are relative to** - If **Show in results view as XHTML** is checked, this text field specifies the path used to resolve image paths contained in the transformation result.

Additional XSLT Stylesheets

The list of additional XSLT stylesheets can be edited in the dialog box opened by the **Additional XSLT Stylesheets** button in the **XSLT** tab of a new or edited transformation scenario dialog box. The following actions are available:

Add

Adds a stylesheet in the **Additional XSLT stylesheets** list using a file browser dialog box. You can type an [editor variable](#) in the file name field of the browser dialog box. The name of the stylesheet will be added in the list after the current selection.

Remove

Deletes the selected stylesheet from the **Additional XSLT stylesheets** list.

Open

Opens the selected stylesheet in a separate view.

Up

Moves the selected stylesheet up in the list.

Down

Moves the selected stylesheet down in the list.

XML Transformation with XQuery

Use the **XML transformation with XQuery** scenario to apply a transformation in which an XQuery file queries an XML file for the output results.

To create an **XML transformation with XQuery** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **XML transformation with XQuery**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XQuery**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XQuery**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- [XQuery](#).
- [FO Processor](#).
- [Output](#).

The XQuery Tab

The **XQuery** tab contains the following options:

- **XML URL** - Specifies the source XML file. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.



Note: If the transformer engine is Saxon 9 and a custom URI resolver is configured in **Preferences** for Saxon 9, the XML input of the transformation is passed to that URI resolver.

- **XQuery URL** - specifies the source XQuery file that the transformation will use. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

You can use the following browsing buttons to enter values in the **XML URL** and **XQuery URL** fields:

 Insert Editor Variables

Opens a pop-up menu allowing you to introduce special *Oxygen XML Developer editor variables* or *custom editor variables* in the XML URL field.

 Browse for local file

Opens a local file browser dialog box allowing you to select a local file.

 Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.

 Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.

 Browse Data Source Explorer

Opens the *Data Source Explorer* window.

 Search for file

Allows you to find a file in the current project.

 Open in editor

Opens the file in an editor panel with the path that is specified in the **XML URL** text box.

The rest of the options available in the **XQuery** tab allow you to further customize the transformation scenario:

- **Transformer** - This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These are the built-in engines and *the external engines defined in the Custom Engines preferences page*. The engine you choose in this dialog box is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support);
-  **Advanced options** - *configure advanced options specific for the Saxon HE / PE / EE engine.*
- **Parameters** - Opens the **Configure parameters** dialog box for configuring the XQuery parameters. You can use buttons in this dialog box you can add, edit, or remove parameters. If the XQuery transformation engine is custom-defined you can not use this dialog box to set parameters. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XQuery engine to include the necessary parameters in the command line that starts the transformation process.

 **Note:** Use the **Filter** text box to search for a specific term in the entire parameters collection.

- **Extensions** - Opens *the dialog box for configuring the XSLT/XQuery extension jars or classes* that define extension Java functions or extension XSLT elements used in the transformation.

XSLT/XQuery Extensions

The **Libraries** dialog box is used to specify the jars and classes that contain extension functions called from the XSLT or XQuery file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

An extension function called from the XSLT or XQuery file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the  **Move up** or  **Move down** buttons.

The FO Processor Tab

The **FO Processor** tab contains the following options:

- **Perform FO Processing** - Specifies whether an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.
- **XQuery result as input** - the FO processor is applied to the result of the XQuery transformation defined in the **XQuery** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.
- **Method** - The output format of the FO processing. Available options depend on the selected processor type.
- **Processor** - Specifies the FO processor. It can be the built-in Apache FOP processor or an [external processor](#).

The Output Tab

The **Output** tab contains the following options:

- **Present as a sequence** - Enabling this option will reduce the time necessary to fetch the full result, as it will only fetch the first chunk of the result.
- **Prompt for file** - At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.
- **Save As** - The path of the file where the result of the transformation is stored.
- **Open in Browser/System Application** - If enabled, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, .pdf files are usually opened in the *Acrobat Reader* application).



Note: To set the web browser that is used for displaying HTML/XHTML pages, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field.

- **Saved file** - When **Open in Browser/System Application** is selected, this button can be used to specify that Oxygen XML Developer automatically opens the file specified in the **Save As** text field at the end of the transformation.
 - **Other location** - When **Open in System Application** is selected, this option can be used to specify that Oxygen XML Developer opens the file specified here.
- **Open in editor** - When this is enabled, the transformation result specified in the **Save As** field is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).
- **Show in results view as**
 - **XHTML** - Can only be enabled if **Open in Browser/System Application** is disabled. If this is checked, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.
- **Important:** When transforming very large documents, you should be aware that enabling this feature results in a very long processing time, necessary for rendering the transformation result in the XHTML result viewer panel. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by checking the **Open in browser** option.
- **XML** - If this is checked, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#), specific for XML documents.
- **SVG** - If this is checked, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **Image URLs are relative to** - If **Show in results view as XHTML** is checked, this text field specifies the path used to resolve image paths contained in the transformation result.

DITA OT Transformation

To create a **DITA OT Transformation** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **DITA OT Transformation**.

- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **DITA OT Transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **DITA OT Transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **DITA Transformation Type** dialog box that presents the list of possible outputs.

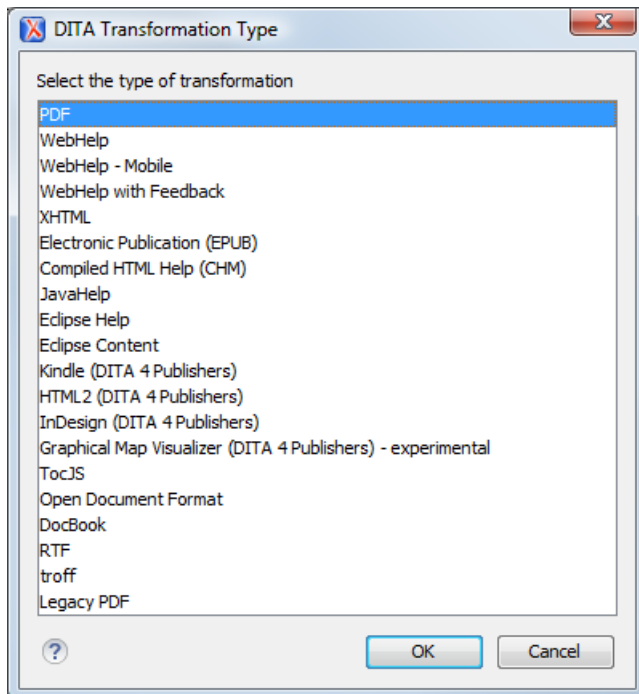


Figure 193: DITA Transformation Type Dialog Box

Select the desired type of output and click **OK**. This opens the **New Scenario** dialog box, which allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs (only those that are appropriate for the chosen output type will be displayed):

- **Skins** (Available for **WebHelp** and **WebHelp with Feedback** output types).
- **FO Processor** (Available for PDF output types).
- **Parameters**
- **Filters**

- **Advanced**
- **Output**

The Skins Tab

A *skin* is a collection of CSS properties that can alter the look of the output by changing colors, font types, borders, margins, and paddings. This allows you to rapidly adapt the look and feel of the output for your organization.

Oxygen XML Developer provides a set of predefined *skins* for the **DITA Map WebHelp** and **DITA Map WebHelp with Feedback** transformation scenarios.

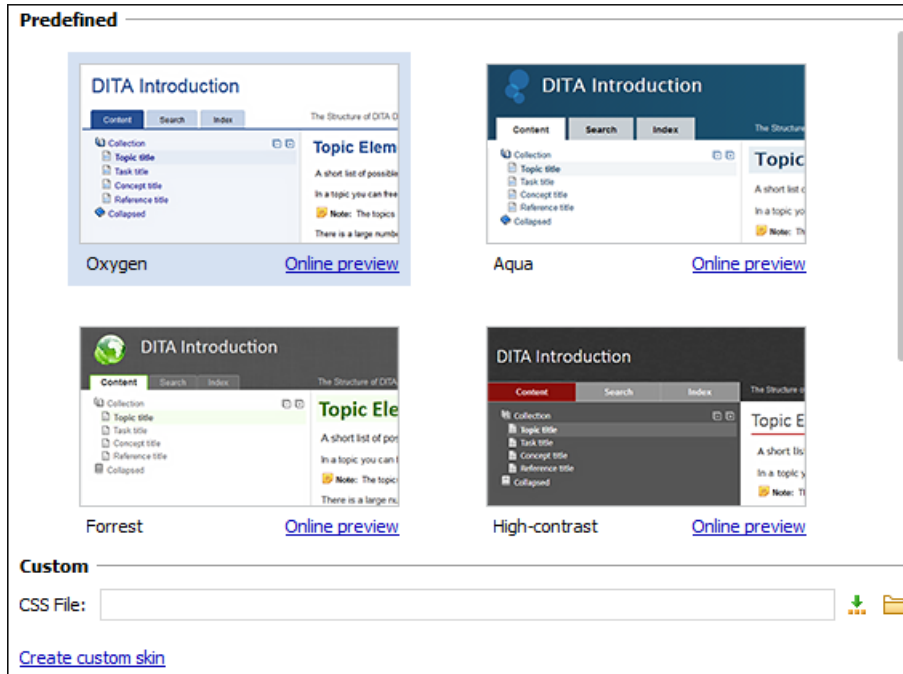


Figure 194: The Skins Tab

The predefined skins cover a wide range of chromatic themes, ranging from a very light one to a high-contrast variant. By default, the *Oxygen* skin is selected (notice the light blue border around the skin preview). If you want to obtain an output without any customization, deselect the currently selected skin.

To see how the *skin* looks when applied on a sample documentation project that is stored on the Oxygen XML Developer website, press the **Online preview** link.

 **Note:** Press the **Create custom skin** link to open the [WebHelp Skin Builder](#) tool.

To further customize the look of the output, set the **CSS File** field to point to your custom CSS stylesheet or to a customized skin.

 **Note:** A custom CSS file will overwrite a skin selection.

 **Note:** The output can also be styled by setting the `args.css` parameter in the **Parameters tab**. The properties taken from the stylesheet referenced in this parameter take precedence over the properties declared in the skin set in the **Skins tab**.

The FO Processor Tab

This tab allows you to select an FO Processor, when you choose to generate PDF output.

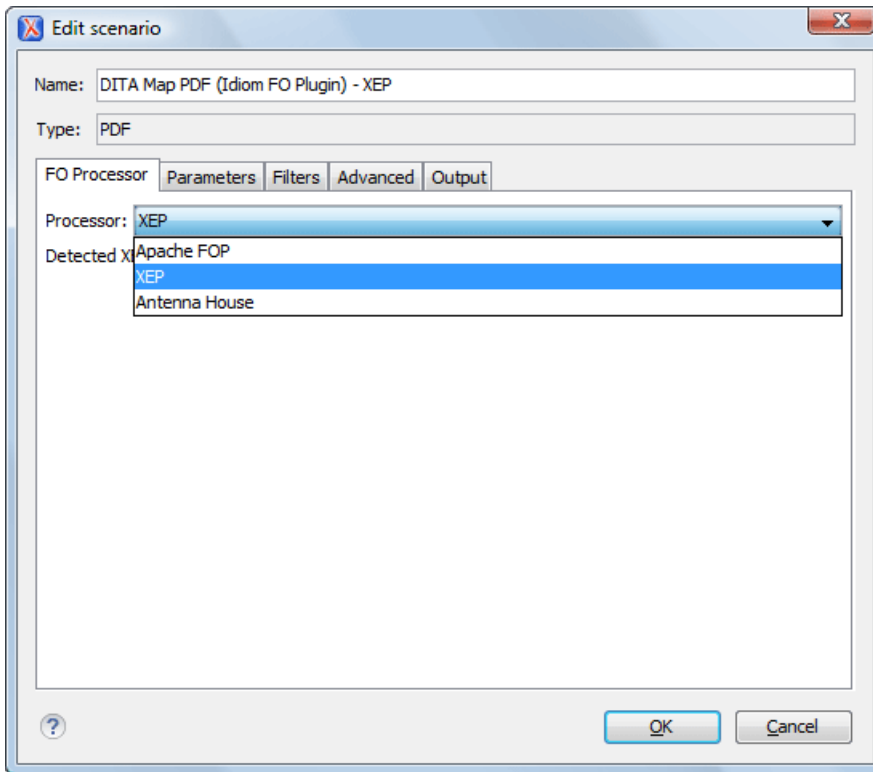


Figure 195: FO Processor Configuration Tab

You can choose the following processors:

- **Apache FOP** - The default processor that comes bundled with .
- **XEP** - The [RenderX](#) XEP processor.

If XEP is already installed, displays the detected installation path under the drop-down menu.

XEP is considered installed if it was detected in one of the following sources:

- XEP was configured as an external FO Processor in the [FO Processors option page](#).
- The system property `com.oxygenxml.xep.location` was set to point to the XEP executable file for the platform (for example: `xep.bat` on Windows).
- XEP was installed in the `/plugins/org.dita.pdf2/lib` directory of the installation directory.
- **Antenna House** - The [Antenna House](#) (AH Formatter) processor.

If Antenna House is already installed, displays the detected installation path under the drop-down menu.

Antenna House is considered installed if it was detected in one of the following sources:

- Environment variable set by Antenna House installation (the newest installation version will be used).
- Antenna House was added as an external FO Processor in the preferences pages.

To further customize the PDF output obtained from the Antenna House processor:

- **Edit** the transformation scenario.
- Open the [Parameters tab](#).
- Add the `env.AXF_OPT` parameter and point to Antenna House configuration file.

The Parameters Tab

The **Parameterstab** allows you to configure the parameters sent to the DITA-OT build file.

The table displays all the parameters that the DITA-OT documentation specifies as available for each chosen type of transformation (for example: XHTML or PDF), along with their description and current values. You can find more information about each parameter in the [DITA OT Documentation](#). You can also add, edit, and remove parameters. Use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with the name in bold.

Depending on the type of a parameter, its value can be one of the following:

- A simple text field for simple parameter values.
- A combo box with some predefined values.
- A file chooser and an [editor variable](#) selector to simplify setting a file path as the value of a parameter.



Note: To input parameter values at runtime, use the [ask editor variable](#) in the **Value** column.

The following actions are available for managing parameters:

New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button.

Edit

Opens the **Edit Parameter** dialog box that allows you to change the value of the selected parameter by selecting it from a list of allowed values.

Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

Delete

Removes the selected parameter from the list. It is enabled only for new parameters that have been added to the list.

The Filters Tab

The **Filters** tab allows you to add filters to remove certain content elements from the generated output.

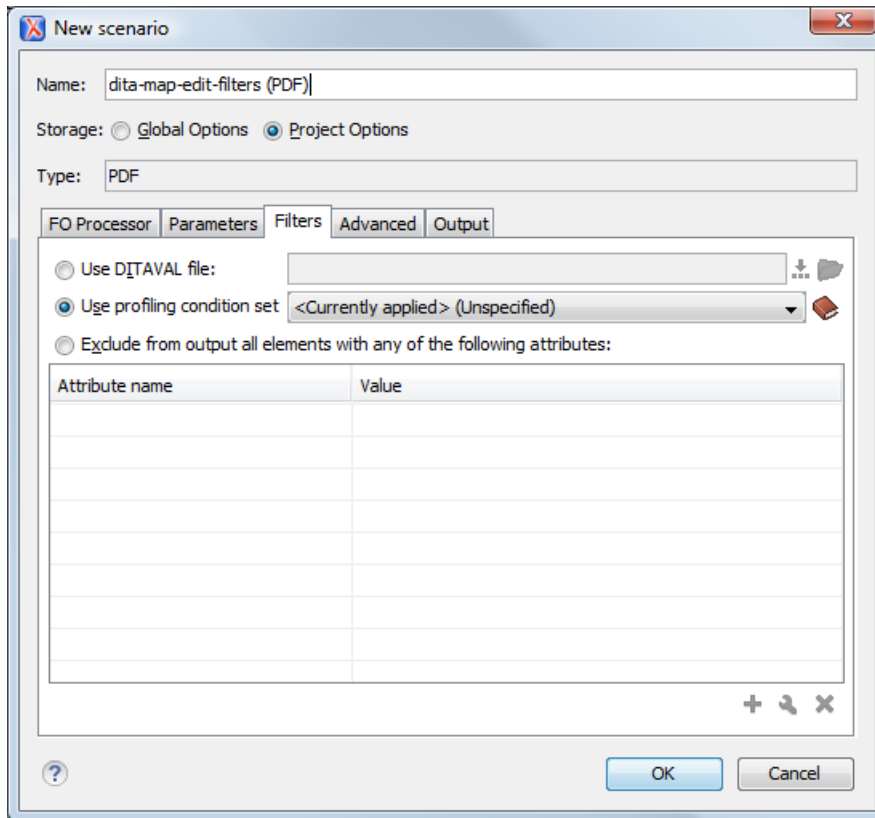


Figure 196: Edit Filters Tab

There are three ways to define filters:

- **Use DITAVAL file** - If you already have a DITAVAL file associated with the DITA map, you can specify the file to be used when filtering content. An *editor variable* can be inserted for the file path by using the  **Insert Editor Variables** button. You can find out more about constructing a DITAVAL file in the [DITA OT Documentation](#).
- **Exclude from output all elements with any of the following attributes** - By using the  **New**,  **Edit**, or  **Delete** buttons at the bottom of the pane, you can configure a list of attributes (name and value) to exclude all elements that contain any of these attributes from the output.

The Advanced Tab

The **Advanced** tab allows you to specify advanced options for the transformation scenario.

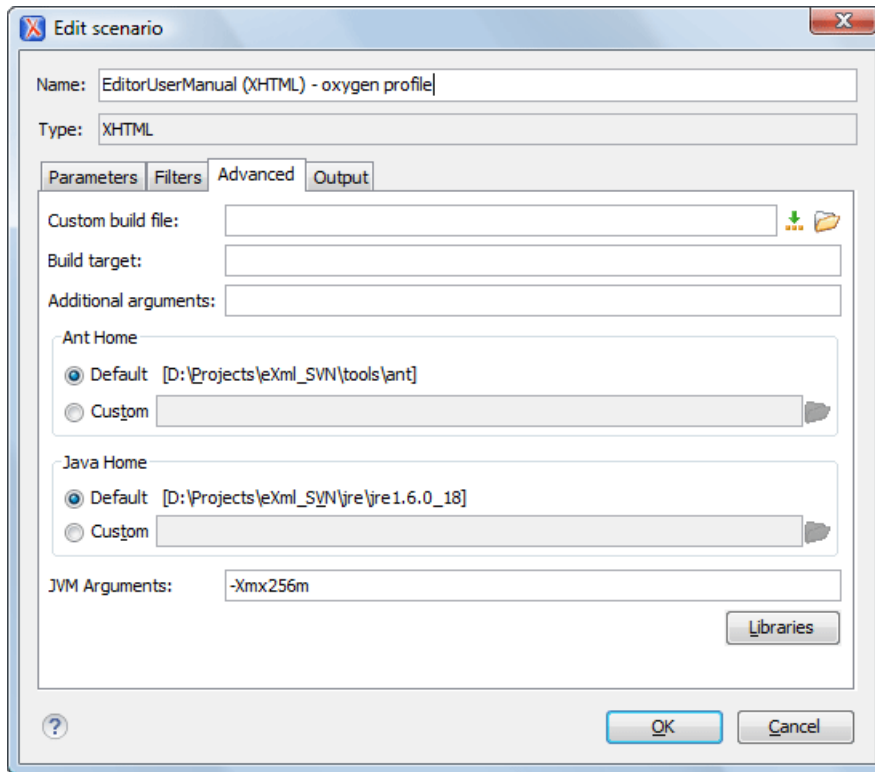


Figure 197: Advanced Settings Tab

You can specify the following parameters:

- **Custom build file** - If you use a custom DITA-OT build file, you can specify the path to the customized build file. If empty, the `build.xml` file from the `dita.dir` parameter that is configured in the **Parameters** tab is used. An [editor variable](#) can be inserted for the file path by using the  **Insert Editor Variables** button.
- **Build target** - Optionally, you can specify a build target for the build file. If no target is specified, the default `init` target is used.
- **Additional arguments** - You can specify additional command-line arguments to be passed to the Ant transformation (such as `-verbose`).
- **Ant Home** - You can choose between the default or custom Ant installation to run the transformation. The default path can be configured in the [Ant preferences page](#).
- **Java Home** - You can choose between the default or custom Java installation to run the transformation. The default path is the Java installation that is used by Oxygen XML Developer.



Note: It may be possible that the used Java version is incompatible with the DITA Open Toolkit engine. For example, DITA OT 1.8.5 and older requires Java 1.6 or later, while DITA OT 2.0 and newer requires Java 1.7 or newer. Thus, if you encounter related errors running the publishing, consider installing a Java VM that is supported by the DITA OT publishing engine and using it in the **Java Home** text field.

- **JVM Arguments** - This parameter allows you to set specific parameters for the Java Virtual Machine used by Ant. For example, if it is set to `-Xmx384m`, the transformation process is allowed to use 384 megabytes of memory. When performing a large transformation, you may want to increase the memory allocated to the Java Virtual Machine. This will help avoid Out of Memory error messages (**OutOfMemoryError**).
- **Libraries** - By default, Oxygen XML Developer adds (as high priority) libraries that are not transformation-dependent and also patches for certain DITA Open Toolkit bugs. You can use this button to specify additional libraries (jar files or additional class paths) to be used by the Ant transformer.

The Output Tab

The **Output** tab allows you to configure options that are related to the location where the output is generated.

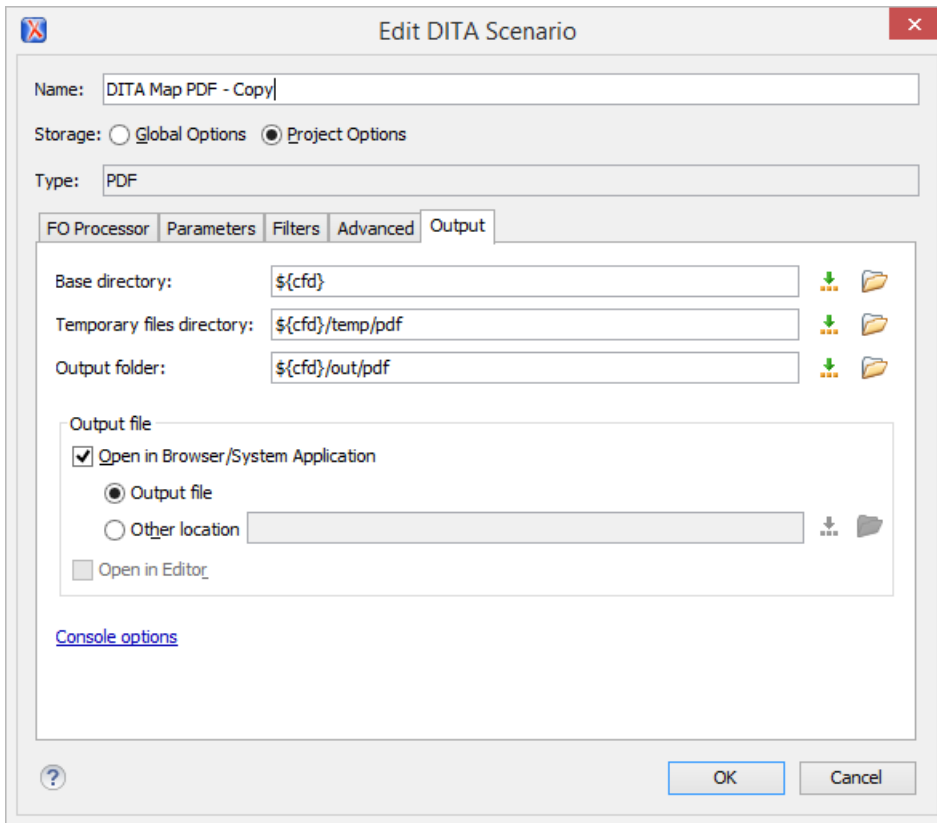


Figure 198: Output Settings Tab

You can specify the following parameters:

- **Base directory** - All the relative paths that appear as values in parameters are considered relative to the base directory. The default value is the directory where the transformed map is located. An [editor variable](#) can be inserted for the path by using the **Insert Editor Variables** button.
- **Temporary files directory** - This directory is used to store pre-processed temporary files until the final output is obtained. An [editor variable](#) can be inserted for the path by using the **Insert Editor Variables** button.
- **Output folder** - The folder where the content of the final output is stored. An [editor variable](#) can be inserted for the path by using the **Insert Editor Variables** button.



Note: If the DITA map or topic is opened from a remote location or a ZIP file, the parameters must specify absolute paths.

- **Open in Browser/System Application** - If enabled, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, .pdf files are usually opened in the *Acrobat Reader* application).



Note: To set the web browser that is used for displaying HTML/XHTML pages, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field.

- **Saved file** - When **Open in Browser/System Application** is selected, this button can be used to specify that Oxygen XML Developer automatically opens the file specified in the **Save As** text field at the end of the transformation.
- **Other location** - When **Open in System Application** is selected, this option can be used to specify that Oxygen XML Developer opens the file specified here.

Troubleshooting DITA Transformation Errors

If a DITA transformation results in errors or warnings, the information is displayed in the message panel at the bottom of the editor. The information includes the severity, description of the problem, the name of the resource, and the path of the resource.

To help prevent and solve DITA transformation problems, follow these steps:

1. Validate your DITA documents by using the  **Validate** action from the  ▾ **Validation** toolbar drop-down menu, the **Document** > **Validate** menu, or from the **Validate** menu when invoking the contextual menu in the **Project** view.
2. If this action results in validation errors, solve them prior to executing the transformation. Also, you should pay attention to the warning messages because they may identify problems in the transformation.
3. [Run the DITA transformation scenario.](#)
4. If the transformation results in errors or warnings, they are displayed in the **Transformation problems** message panel at the bottom of the editor. The following information is presented to help you troubleshoot the problems:
 - **Severity** - The first column displays the following icons that indicate the severity of the problem:
 - **Informational** - The transformation encountered a condition of which you should be aware.
 -  **Warning** - The transformation encountered a problem that should be corrected.
 -  **Error** - The transformation encountered a more severe problem, and the output is affected or cannot be generated.
 - **Info** - You can click the  **See More** icon to open a web page that contains details about DITA-OT error messages.
 - **Description** - A description of the problem.
 - **Resource** - The name of the transformation resource.
 - **System ID** - The path of the transformation resource.
5. Use this information or other resources from the online DITA-OT community to solve the transformation problems before re-executing the transformation scenario.

ANT Transformation

An Ant transformation scenario is usually associated with an Ant build script. Oxygen XML Developer runs an Ant transformation scenario as an external process that executes the Ant build script with the built-in Ant distribution (Apache Ant version 1.8.2) that comes with the application, or optionally with a custom Ant distribution configured in the scenario.

To create an Ant transformation scenario, use one of the following methods:

- Go to **Window** > **Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **ANT transformation**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document** > **Transformation** menu. Then click the **New** button and select **ANT transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document** > **Transformation** menu. Then click the **New** button and select **ANT transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- [The Options tab](#).
- [The Parameters tab](#).
- [The Output tab](#).

The Options Tab

The **Options** tab allows you to specify the following options:

- **Working directory** - The path of the current directory of the Ant external process. An [editor variable](#) can be inserted for the file path by using the  **Insert Editor Variables** button.
- **Build file** - The Ant script file that is the input of the Ant external process. An [editor variable](#) can be inserted for the file path by using the  **Insert Editor Variables** button.
- **Build target** - Optionally, you can specify a build target for the Ant script file. If no target is specified, the Ant target that is specified as the default in the Ant script file is used.
- **Additional arguments** - You can specify additional command-line arguments to be passed to the Ant transformation (such as `-verbose`).
- **Ant Home** - You can choose between the default or custom Ant installation to run the transformation. The default path can be configured in the [Ant preferences page](#).
- **Java Home** - You can choose between the default or custom Java installation to run the transformation. The default path is the Java installation that is used by Oxygen XML Developer.
- **JVM Arguments** - This parameter allows you to set specific parameters for the Java Virtual Machine used by Ant. For example, if it is set to `-Xmx384m`, the transformation process is allowed to use 384 megabytes of memory. When performing a large transformation, you may want to increase the memory allocated to the Java Virtual Machine. This will help avoid Out of Memory error messages (**OutOfMemoryError**).
- **Libraries** - By default, Oxygen XML Developer adds (as high priority) libraries that are not transformation-dependent and also patches for certain DITA Open Toolkit bugs. You can use this button to specify additional libraries (jar files or additional class paths) to be used by the Ant transformer.

The Parameters Tab

The **Parameters** tab allows you to configure the parameters that are accessible as Ant properties in the Ant build script.

The table displays all the parameters that are available in the Ant build script, along with their description and current values. You can also add, edit, and remove parameters. Use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with the name in bold.

Depending on the type of a parameter, its value can be one of the following:

- A simple text field for simple parameter values.
- A combo box with some predefined values.
- A file chooser and an [editor variable](#) selector to simplify setting a file path as the value of a parameter.



Note: To input parameter values at runtime, use the [ask editor variable](#) in the **Value** column.

The following actions are available for managing parameters:

New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button.

Edit

Opens the **Edit Parameter** dialog box that allows you to change the value of the selected parameter by selecting it from a list of allowed values.

Delete

Removes the selected parameter from the list. It is enabled only for new parameters that have been added to the list.

These parameters are also available for the built-in validation processor and the **Content Completion Assistant**.

The Output Tab

The **Output** tab contains the following options:

- **Open** - Allows you to specify the file to open automatically when the transformation is finished. Usually, this is the output file of the Ant process. An *editor variable* can be inserted for the path by using the  **Insert Editor Variables** button.
 - **In System Application** - The file specified in the **Open** text box is opened in the system application that is set in the operating system as the default application for that type of file (for example, .pdf files are usually opened in the *Acrobat Reader* application).
 - **In Editor** - The file specified in the **Open** text box is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor).
- The **Show console output** option allows you to specify when to display the console output log. The following options are available:
 - **When build fails** - displays the console output log if the build fails.
 - **Always** - displays the console output log, regardless of whether or not the build fails.

XSLT Transformation

To create an **XSLT transformation** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **XSLT transformation**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XSLT transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XSLT transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- [XSLT](#)
- [FO Processors](#)
- [Output](#)

The XSLT Tab

The **XSLT** tab contains the following options:

- **XML URL** - Specifies the source XML file. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.



Note: If the transformer engine is Saxon 9 and a custom URI resolver is configured in **Preferences** for Saxon 9, the XML input of the transformation is passed to that URI resolver.



Note: If the transformer engine is one of the built-in XSLT 2.0 / 3.0 engines and [the name of an initial template](#) is specified in the scenario, the **XML URL** field can be empty. The **XML URL** field can also be empty if you use [external XSLT processors](#). Otherwise, a value is mandatory in the **XML URL** field.

- **XSL URL** - Specifies the source XSL file that the transformation will use. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

You can use the following browsing buttons to enter values in the **XML URL** and **XSL URL** fields:



Insert Editor Variables

Opens a pop-up menu allowing you to introduce special [Oxygen XML Developer editor variables](#) or [custom editor variables](#) in the XML URL field.



Browse for local file

Opens a local file browser dialog box allowing you to select a local file.



Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.



Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.



Browse Data Source Explorer

Opens the [Data Source Explorer](#) window.



Search for file

Allows you to find a file in the current project.



Open in editor

Opens the file in an editor panel with the path that is specified in the **XML URL** text box.

The rest of the options available in the **XSLT** tab allow you to further customize the transformation scenario:

- **Use "xml-stylesheet" declaration** - Use the stylesheet declared with an `xml-stylesheet` declaration instead of the stylesheet specified in the **XSL URL** field. By default, this checkbox is not selected and the transformation applies the XSLT stylesheet that is specified in the **XSL URL** field. If it is checked, the scenario applies the stylesheet specified explicitly in the XML document with the `xml-stylesheet` processing instruction.
- **Transformer** - This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These are the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose in this dialog box is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).
-  **Advanced options** - Allows you to configure the advanced options of the Saxon HE / PE / EE engine for the current transformation scenario. To configure the same options globally, go to the [Saxon-HE/PE/EE preferences page](#). For the current transformation scenario, these **Advanced options** override the options configured in the [Saxon-HE/PE/EE preferences page](#). The **Initial mode and template** option is only available in the **Advanced**

options. It is a Saxon-specific option that sets the name of the first XSLT template that starts the XSLT transformation or the initial mode of the transformation.

- **Parameters** - Opens [the Configure parameters dialog box](#), allowing you to configure the XSLT parameters used in the current transformation. In this dialog box, you can also configure the parameters of additional stylesheets by using the **Additional XSLT stylesheets** button. If the XSLT transformation engine is custom-defined, you can not use this dialog box to configure the parameters sent to the custom engine. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XSLT engine to include the necessary parameters in the command line that starts the transformation process.
- **Extensions** - Opens [the dialog box for configuring the XSLT/XQuery extension jars or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.
- **Additional XSLT stylesheets** - Opens [the dialog box for adding XSLT stylesheets](#) that are applied on the main stylesheet that is specified in the **XSL URL** field. This is useful when a chain of XSLT stylesheets must be applied to the input XML document.

The FO Processor Tab

The **FO Processor** tab contains the following options:

- **Perform FO Processing** - Specifies whether an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.
- **XSLT result as input** - The FO processor is applied to the result of the XSLT transformation that is defined in the **XSLT** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.
- **Method** - The output format of the FO processing. Available options depend on the selected processor type.
- **Processor** - Specifies the FO processor. It can be the built-in Apache FOP processor or an [external processor](#).

The Output Tab

The **Output** tab contains the following options:

- **Prompt for file** - At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.
- **Save As** - The path of the file where the result of the transformation is stored.
- **Open in Browser/System Application** - If enabled, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, .pdf files are usually opened in the *Acrobat Reader* application).



Note: To set the web browser that is used for displaying HTML/XHTML pages, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field.

- **Saved file** - When **Open in Browser/System Application** is selected, this button can be used to specify that Oxygen XML Developer automatically opens the file specified in the **Save As** text field at the end of the transformation.
- **Other location** - When **Open in System Application** is selected, this option can be used to specify that Oxygen XML Developer opens the file specified here.
- **Open in editor** - When this is enabled, the transformation result specified in the **Save As** field is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).
- **Show in results view as**
 - **XHTML** - Can only be enabled if **Open in Browser/System Application** is disabled. If this is checked, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.



Important: When transforming very large documents, you should be aware that enabling this feature results in a very long processing time, necessary for rendering the transformation result in the XHTML result viewer panel. This drawback is due to the built-in Java XHTML browser implementation. To avoid

delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by checking the **Open in browser** option.

- **XML** - If this is checked, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with *syntax highlighting*, specific for XML documents.
- **SVG** - If this is checked, Oxygen XML Developer displays the transformation result in an *integrated SVG viewer in the results panel* at the bottom of the application window and renders the result as an SVG image.
- **Image URLs are relative to** - If **Show in results view as XHTML** is checked, this text field specifies the path used to resolve image paths contained in the transformation result.

XProc Transformation

A sequence of transformations described by an XProc script can be executed with an XProc transformation scenario. To create an **XProc transformation** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **XProc transformation**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XProc transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XProc transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- [XProc](#)
- [Inputs](#)
- [Parameters](#)
- [Outputs](#)
- [Options](#)

The XProc Tab

The **XProc** tab contains the following options:

- **XProc URL** - Specifies the source XSL file that the transformation will use. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

You can use the following browsing buttons to enter value in the **XProc URL**:

 Insert Editor Variables

Opens a pop-up menu allowing you to introduce special *Oxygen XML Developer editor variables* or *custom editor variables* in the XML URL field.

 Browse for local file

Opens a local file browser dialog box allowing you to select a local file.

 Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.

 Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.

 Browse Data Source Explorer

Opens the *Data Source Explorer* window.

 Search for file

Allows you to find a file in the current project.

- **Processor** - Allows you to select the XProc engine. You can select the built-in *Calabash* engine or a custom engine that is *configured in the Preferences dialog box*.

The Inputs Tab

The **Inputs** tab contains a list with the ports that the XProc script uses to read input data. Use the **Filter** text box to search for a specific term in the entire ports collection.

Each input port has an assigned name in the XProc script. The XProc engine reads data from the URL specified in the **URL** column. The *built-in editor variables* and *custom editor variables* can be used to specify the URL.

The following actions are available for managing the input ports:

New

Opens an **Edit** dialog box that allows you to add a new port and its URL.

Edit

Opens an **Edit** dialog box that allows you to modify the selected port and its URL.

Delete

Removes the selected port from the list. It is enabled only for new ports that have been added to the list.

The Parameters Tab

The **Parameters** tab presents a list of ports and parameters collected from the XProc script. The tab is divided into three sections:

- *List of Ports* - In this section you can use the **New** and **Delete** buttons to add or remove ports.
- *List of Parameters* - This section presents a list of parameters for each port and includes columns for the parameter name, namespace URI, and its value. Use the **Filter** text box to search for a specific term in the entire parameters collection. You can use the **New** and **Delete** buttons to add or remove parameters. You can edit the value of each cell in this table by double-clicking the cell. You can also sort the parameters by clicking the column headers.
- *Editor Variable Information* - The *built-in editor variables* and *custom editor variables* can be used for specifying the URI. The message pane at the bottom of the dialog box provides more information about the editor variables that can be used.

The Outputs Tab

The **Outputs** tab displays a list of output ports (along with the URL) collected from the XProc script. Use the **Filter** text box to search for a specific term in the entire ports collection. You can also sort the columns by clicking the column headers.

The following actions are available for managing the output ports:

New

Opens an **Edit** dialog box that allows you to add a new output port and its URL. An *editor variable* can be inserted for the URL by using the  **Insert Editor Variables** button. There is also a **Show in transformation results view** option that allows you to select whether or not the results will be displayed in the output results view.

Edit

Opens an **Edit** dialog box that allows you to edit an existing output port and its URL. An *editor variable* can be inserted for the URL by using the  **Insert Editor Variables** button. There is also a **Show in transformation results view** option that allows you to select whether or not the results will be displayed in the output results view.

Delete

Removes the selected output port from the list. It is enabled only for new ports that have been added to the list.

Additional options that are available at the bottom of this tab include:

Open in Editor

If this option is selected, the XProc transformation result is automatically opened in an editor panel.

Open in Browser/System Application

If this option is selected, you can specify a file to be opened at the end of the XProc transformation in the browser or system application that is associated with the file type. An *editor variable* can be inserted for the path by using the  **Insert Editor Variables** button.

Results

The result of the XProc transformation can be displayed as a sequence in an output view with two sections:

- A list with the output ports on the left side.
- The content that correspond to the selected output port on the right side.

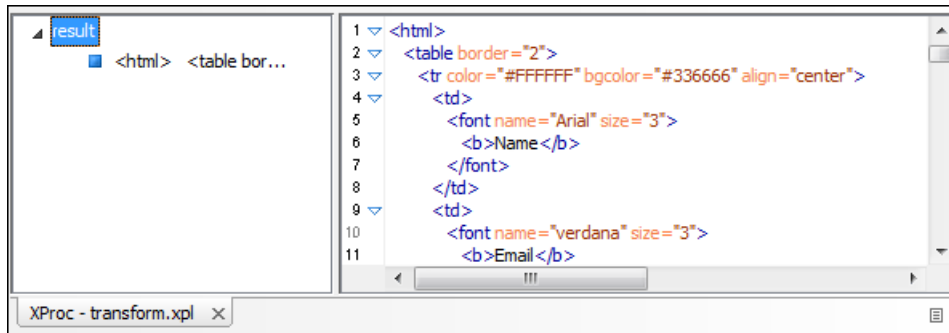


Figure 199: XProc Transformation Results View

The Options Tab

The **Options** tab displays a list of the options collected from the XProc script. The tab is divided into two sections:

- *List of Options* - This section presents a list of options and includes columns for the option name, namespace URI, and its value. Use the **Filter** text box to search for a specific term in the entire options collection. You can use the **New** and **Delete** buttons to add or remove options. You can edit the value of each cell in this table by double-clicking the cell. You can also sort the parameters by clicking the column headers. The names of edited options are displayed in bold.
- *Editor Variable Information* - The *built-in editor variables* and *custom editor variables* can be used for specifying the URI. This section provides more information about the editor variables that can be used.

Configuring Calabash with XEP

To generate PDF output from your XProc pipeline (when using the Calabash XProc processor), follow these steps:

1. Open the [OXYGEN INSTALLATION DIRECTORY]/lib/xproc/calabash/engine.xml file.
2. Uncomment the `<system-property name="com.xmlcalabash.fo-processor" value="com.xmlcalabash.util.FoXEP"/>` system property.

3. Uncomment the `<system-property name="com.renderx.xep.CONFIG" file="../../tools/xep/xep.xml"/>` system property. Edit the `file` attribute to point to the configuration file that is usually located in the XEP installation folder.
4. Uncomment the references to the XEP libraries. Edit them to point to the matching library names from the XEP installation directory.
5. Restart Oxygen XML Developer.

Integration of an External XProc Engine

The Javadoc documentation of the XProc API is available for download from the application website as a zip file [xprocAPI.zip](#). To create an XProc integration project, follow these steps:

1. Move the `oxygen.jar` file from `[OXYGEN_DIR]/lib` to the `lib` folder of your project.
2. Implement the `ro.sync.xml.transformer.xproc.api.XProcTransformerInterface` interface.
3. Create a Java archive (jar) from the classes you created.
4. Create a `engine.xml` file according with the `engine.dtd` file. The attributes of the `engine` element are as follows:
 1. `name` - The name of the XProc engine.
 2. `description` - A short description of the XProc engine.
 3. `class` - The complete name of the class that implements `ro.sync.xml.transformer.xproc.api.XProcTransformerInterface`.
 4. `version` - The version of the integration.
 5. `engineVersion` - The version of the integrated engine.
 6. `vendor` - The name of the vendor / implementer.
 7. `supportsValidation` - `true` if the engine supports validation, `false` otherwise.

The `engine` element has only one child, `runtime`. The `runtime` element contains several `library` elements with the `name` attribute containing the relative or absolute location of the libraries necessary to run this integration.

5. Create a folder with the name of the integration in the `[OXYGEN_DIR]/lib/xproc`.
6. Place the `engine.xml` and all the libraries necessary to run the new integration in that folder.

XQuery Transformation

To create an **XQuery transformation** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **XQuery transformation**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XQuery transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XQuery transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the options that control the transformation.

The upper part of the dialog box contains the **Name** field and **Storage** options:

- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.

The lower part of the dialog box contains the following tabs:

- [XQuery](#)
- [FO Processor](#)
- [Output](#)

The XQuery Tab

The **XQuery** tab contains the following options:

- **XML URL** - Specifies the source XML file. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.
 **Note:** If the transformer engine is Saxon 9 and a custom URI resolver is configured in **Preferences** for Saxon 9, the XML input of the transformation is passed to that URI resolver.
- **XQuery URL** - specifies the source XQuery file that the transformation will use. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

You can use the following browsing buttons to enter values in the **XML URL** and **XQuery URL** fields:

Insert Editor Variables

Opens a pop-up menu allowing you to introduce special [Oxygen XML Developer editor variables](#) or [custom editor variables](#) in the XML URL field.

Browse for local file

Opens a local file browser dialog box allowing you to select a local file.

Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.

Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.

Browse Data Source Explorer

Opens the [Data Source Explorer](#) window.

Search for file

Allows you to find a file in the current project.

Open in editor

Opens the file in an editor panel with the path that is specified in the **XML URL** text box.

The rest of the options available in the **XQuery** tab allow you to further customize the transformation scenario:

- **Transformer** - This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These are the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose in this dialog box is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support);
 -  **Advanced options** - [configure advanced options specific for the Saxon HE / PE / EE engine](#).
- **Parameters** - Opens the **Configure parameters** dialog box for configuring the XQuery parameters. You can use buttons in this dialog box you can add, edit, or remove parameters. If the XQuery transformation engine is custom-defined you can not use this dialog box to set parameters. Instead, you can copy all parameters from the

dialog box using contextual menu actions and edit the custom XQuery engine to include the necessary parameters in the command line that starts the transformation process.



Note: Use the **Filter** text box to search for a specific term in the entire parameters collection.

- **Extensions** - Opens [the dialog box for configuring the XSLT/XQuery extension jars or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.

The FO Processor Tab

The **FO Processor** tab contains the following options:

- **Perform FO Processing** - Specifies whether an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.
- **XQuery result as input** - the FO processor is applied to the result of the XQuery transformation defined in the **XQuery** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.
- **Method** - The output format of the FO processing. Available options depend on the selected processor type.
- **Processor** - Specifies the FO processor. It can be the built-in Apache FOP processor or an [external processor](#).

The Output Tab

The **Output** tab contains the following options:

- **Present as a sequence** - Enabling this option will reduce the time necessary to fetch the full result, as it will only fetch the first chunk of the result.
- **Prompt for file** - At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.
- **Save As** - The path of the file where the result of the transformation is stored.
- **Open in Browser/System Application** - If enabled, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, .pdf files are usually opened in the *Acrobat Reader* application).



Note: To set the web browser that is used for displaying HTML/XHTML pages, [open the Preferences dialog box](#), then go to **Global** and set it in the **Default Internet browser** field.

- **Saved file** - When **Open in Browser/System Application** is selected, this button can be used to specify that Oxygen XML Developer automatically opens the file specified in the **Save As** text field at the end of the transformation.
 - **Other location** - When **Open in System Application** is selected, this option can be used to specify that Oxygen XML Developer opens the file specified here.
- **Open in editor** - When this is enabled, the transformation result specified in the **Save As** field is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).
- **Show in results view as**
 - **XHTML** - Can only be enabled if **Open in Browser/System Application** is disabled. If this is checked, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.



Important: When transforming very large documents, you should be aware that enabling this feature results in a very long processing time, necessary for rendering the transformation result in the XHTML result viewer panel. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by checking the **Open in browser** option.

- **XML** - If this is checked, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#), specific for XML documents.

- **SVG** - If this is checked, Oxygen XML Developer displays the transformation result in an *integrated SVG viewer in the results panel* at the bottom of the application window and renders the result as an SVG image.
- **Image URLs are relative to** - If **Show in results view as XHTML** is checked, this text field specifies the path used to resolve image paths contained in the transformation result.

SQL Transformation

To create an **SQL transformation** scenario, use one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Click the **New** button and select **SQL transformation**.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **SQL transformation**.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then click the **New** button and select **SQL transformation**.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

All three methods open the **New Scenario** dialog box. This dialog box allows you to configure the following options that control the transformation:

- **Name** - The unique name of the SQL transformation scenario.
- **Storage** - Allows you to select one of the following storage options:
 - **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.
 - **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **SQL URL** - Allows you to specify the URL of the SQL script. You can use the following browsing buttons to enter value in this field:



Insert Editor Variables

Opens a pop-up menu allowing you to introduce special *Oxygen XML Developer editor variables* or *custom editor variables* in the XML URL field.



Browse for local file

Opens a local file browser dialog box allowing you to select a local file.



Browse for remote file

Opens an URL browser dialog box allowing you to select a remote file.



Browse for archived file

Opens a zip archive browser dialog box allowing you to select a file from a zip archive.



Browse Data Source Explorer

Opens the *Data Source Explorer* window.



Search for file

Allows you to find a file in the current project.

Open in editor

Opens the file in an editor panel with the path that is specified in the **XML URL** text box.

- **Connection** - Allows you to select a connection from a drop-down list. To configure a connection, use the  **Advanced options** button to open the [data source preferences page](#).
- **Parameters** - Allows you to configure the parameters of the transformation.

Configure Transformation Scenario(s) Dialog Box

You can use the **Configure Transformation Scenarios(s)** dialog box to manage both the [built-in transformation scenarios](#) and the ones you create.

To open this dialog box, use the  **Configure Transformation Scenario(s)** (**Ctrl Shift C** (**Meta Shift C** on OS X)) action from the **Transformation** toolbar or the **Document > Transformation** menu.

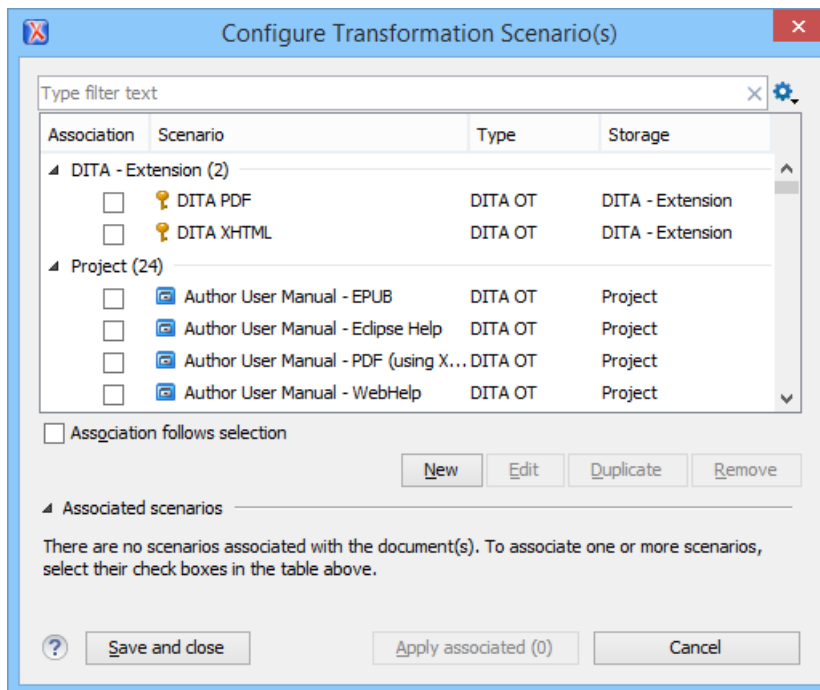


Figure 200: Configure Transformation Scenario(s) Dialog Box

The top section of the dialog box contains a filter that allows you to search through the scenarios list. The  **Settings** button allows you to configure the following options:

- **Show all scenarios** - Select this option to display all the available scenarios, regardless of the document they are associated with.
- **Show only the scenarios available for the editor** - Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.
- **Show associated scenarios** - Select this option to only display the scenarios associated with the document you are editing.
-  **Import scenarios** - This option opens the **Import scenarios** dialog box that allows you to select the **scenarios** file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:
 - Keep or replace the existing scenario.
 - Keep both scenarios.



Note: When you keep both scenarios, Oxygen XML Developer adds **imported** to the name of the imported scenario.

-  **Export selected scenarios** - Use this option to export transformation and validation scenarios individually. Oxygen XML Developer creates a `scenarios` file that contains the scenarios that you export.

The middle section of the dialog box displays the scenarios that you can apply to the current document. You can view both the scenarios associated with the current document type and the scenarios defined at project level. The following columns are used to display the transformation scenarios:

- **Association** - The check-boxes in this column mark whether a transformation scenario is associated with the current document.
- **Scenario** - This column presents the names of the transformation scenarios.
- **Type** - Displays the type of the transformation scenario. For further details about the different types of transformation scenarios available in Oxygen XML Developer see the [Defining a New Transformation Scenario](#) section.
- **Storage** - Displays where a transformation scenario is stored (the **Show Storage** option must be enabled.)

To sort each column you can left-click its header. The contextual menu of each header allows you to do the following:

- **Show Type** - Use this option to display the transformation type of each scenario.
- **Show Storage** - Use this option to display the storage location of the scenarios.
- **Group by Association** - Select this option to group the scenarios depending on whether or not they are associated with the current document.
- **Group by Type** - Select this option to group the scenarios by their type.
- **Group by Storage** - Select this option to group the scenarios by their storage location.
-  **Ungroup all** - Select this option to ungroup all the scenarios.
- **Reset Layout** - Select this option to restore the default settings of the layout.

The bottom section of the dialog box contains the following actions:

- **Association follows selection** - Enable this check-box to automatically associate selected transformation scenarios with the current document. This option can also be used for multiple selections.



Note: When this option is enabled, the **Association** column is hidden.

- **New** - This button allows you to create a new transformation scenario, *depending upon its type*.
- **Edit** - This button opens the **Edit Scenario** dialog box that allows you to configure the options of the transformations scenario.



Note: If you try to edit a transformation scenario associated with a defined document type, Oxygen XML Developer displays a warning message to inform you that this is not possible and gives you the option to create a *duplicate transformation scenario* to edit instead.

- **Duplicate** - Use this button to create a *duplicate transformation scenario*.
- **Remove** - Use this button to remove transformation scenarios.



Note: Removing scenarios associated with a defined document type is not allowed.

The **Edit**, **Duplicate**, **Remove**,  **Import scenarios**, and  **Export selected scenarios** actions are also available in the contextual menu of the transformation scenarios listed in the middle section of the dialog box.

This contextual menu also contains a **Change storage** action that allows you to change the storage location of a transformation scenario to **Global Options** or **Project Options**. You are also able to keep the original storage location and make a copy of the selected scenario in the new storage location.

Duplicating a Transformation Scenario

Use the following procedure to duplicate a transformation scenario. This is useful for creating a scenario that is similar to an existing one.

1. Open the **Configure Transformation** dialog by using the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu.
2. Create a copy of a scenario by selecting the scenario and clicking the **Duplicate** button.
3. Enter a new name in the **Name** field.
 - a) You can choose to save the scenarios at project level by selecting the **Project Options** setting.
4. Click **OK** to save the scenario.

Editing a Transformation Scenario

Editing a transformation scenario is useful if you need to configure some of its parameters.

Oxygen XML Developer allows you to configure existing transformation scenarios by using one of the following methods:

- Go to **Window > Show View** and select  **Transformation Scenarios** to display this view. Then select the scenario and click the  **Edit** button.
- Use the  **Configure Transformation Scenario(s) (Ctrl Shift C (Meta Shift C on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then select the scenario and click the **Edit** button.
- Use the  **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document > Transformation** menu. Then select the scenario and click the **Edit** button.



Note: If a scenario is already associated with the edited document, selecting  **Apply Transformation Scenario(s)** runs the associated scenario automatically. You can check whether transformation scenarios are associated with the edited document by hovering your cursor over the  **Apply Transformation Scenario** button.

You can edit transformation scenarios that are defined at project level only. To edit a transformation scenario that is associated with a defined document type, duplicate it and edit the duplicated scenario.

Apply Batch Transformations

A transformation action can be applied on a batch of selected files *from the contextual menu of the **Project** view* without having to open the files involved in the transformation. You can apply the same scenario to a batch of files or multiple scenarios to a single file or batch of files.

1. (Optional, but recommended) Organize the files you want to transform in logical folders.
 - a) Create a logical folder in the **Project** view by using the **New > Logical Folder** action from the contextual menu of the root file.
 - b) Add files you want to transform to the logical folder by using the  **Add Files** or  **Add Edited File** actions from the contextual menu of the logical folder.



Note: You can skip this step if the files are already in a dedicated folder that does not include any additional files or folders. You can also manually select the individual files in the **Project** view each time you want to transform them, but this can be tedious.

2. Right-click the newly created logical folder and select **Transform >  Configure Transformation Scenario(s)** to select one or more transformation scenarios to be applied on all the files in the logical folder.



Note: These types of transformation scenarios must be configured with the current file (`${cf}`) or current file URL (`${currentFileURL}`) editor variables for the input file. This ensures that each file becomes the current file when its turn arrives in the batch transformation process. Edit the transformation scenario to make sure the appropriate editor variable is assigned for the input file. For example, for a DocBook PDF transformation make sure the **XML URL** input box is set to the `${currentFileURL}` editor variable. For a DITA PDF transformation make sure the `args.input` parameter is set to the `${cf}` editor variable.

- Now that logical folder has been associated with one or more transformation scenarios, whenever you want to apply the same batch transformation you can select **Transform** > **Transform with** from the contextual menu and the same previously associated scenario(s) will be applied.
- If you want a different type of transformation to be applied to each file inside the logical folder, associate individual scenarios for each file and select **Transform** > **Apply Transformation Scenario(s)** from the contextual menu of the logical folder.

Built-in Transformation Scenarios

Oxygen XML Developer included preconfigured built-in transformation scenarios that are used for common transformations. To obtain the desired output, use the **Apply Transformation Scenario(s) (Ctrl Shift T (Meta Shift T on OS X))** action from the **Transformation** toolbar or the **Document** > **Transformation** menu and choose one of the built-in scenarios for the current document.

You can use the **Apply Transformation Scenario(s)** action even if the current document is not associated with a transformation scenario.

If the document contains an `xml-stylesheet` processing instruction that refers to an XSLT stylesheet (commonly used to display the document in web browsers), Oxygen XML Developer prompts you to associate the document with a built-in transformation scenario.

The default transformation scenario is suggested based on the processing instruction from the edited document. The **XSL URL** field of the default transformation scenario contains the URL from the `href` attribute of the processing instruction. By default, the **Use xml-stylesheet declaration** check-box is enabled, Saxon is used as the transformation engine, and no FO processing is performed. The result of the transformation is store in a file with the same URL as the edited document, but the extension is changed to `html`. The name and path are preserved because the output file name is specified with the help of two *editor variables*: `${cfd}` and `${cfn}`.

Sharing the Transformation Scenarios

The transformation scenarios and their settings can be shared with other users by saving them at project level or by *exporting them to a specialized scenarios file* that can then be imported. When you create a new transformation scenario or edit an existing one, there is a **Storage** option to control whether the scenarios are stored in **Global Options** or **Project Options**.



Selecting **Global Options** stores the scenario in the global options that are stored in the user home directory.

Selecting **Project Options** stores the scenario in the project file and can be shared with other users that have access to the project. If your project is saved on a source versioning system (CVS, SVN, Source Safe, etc.) then your team will have access to the scenarios that you define. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

You can also change the storage options on existing transformation scenarios by using the *Change storage action* from the contextual menu of the list of scenarios.

Transformation Scenarios View

You can manage the transformation scenarios by using the **Transformation Scenarios** view. To open this view, go to **Window** > **Show View** > **Transformation Scenarios**.

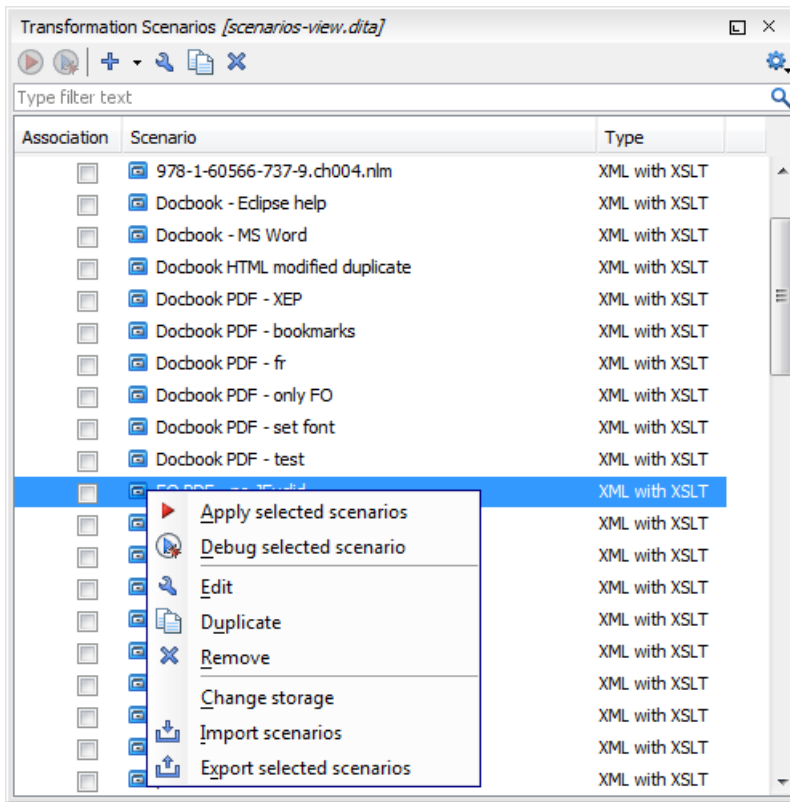


Figure 201: The Scenarios view

The following options are available in the contextual menu of the **Transformation Scenarios** view:

 Apply selected scenarios

Select this option to run the current transformation scenario.

 Debug selected scenario

Select this option to switch to the **Debugger** perspective and initialize it with the parameters from the scenario (the XML, XSLT, or XQuery input, the transformation engine, the XSLT parameters).

 Duplicate

Adds a new scenario to the list that is a duplicate of the current scenario. It is useful for creating a scenario that is similar to an existing one.

 Edit

Opens the dialog box for editing the parameters of a transformation scenario.

 Remove

Removes the current scenario from the list. This action is also available by using the **Delete** key.

Change storage

Use this option to change the storage location of the selected scenario. You are also able to keep the original storage location and make a copy of the selected scenario in the target storage location.

 Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the `scenarios` file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.

- Keep both scenarios.



Note: When you keep both scenarios, Oxygen XML Developer adds **imported** to the name of the imported scenario.



Export selected scenarios

Use this option to export transformation and validation scenarios individually. Oxygen XML Developer creates a **scenarios** file that contains the scenarios that you export.

Along with the options available in the contextual menu, the **Transformation Scenarios** view toolbar contains a  **New** drop-down button that contains a list of the scenarios you can create. Oxygen XML Developer determines the most appropriate scenarios for the current type of file and displays them at the beginning of the list, followed by the rest of the scenarios.

The  **Settings** drop-down menu allows you to configure the following options:

- **Show all scenarios** - Select this option to display all the available scenarios, regardless of the document they are associated with.
- **Show only the scenarios available for the editor** - Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.
- **Show associated scenarios** - Select this option to only display the scenarios associated with the document you are editing.
- **Change storage** - Use this option to change the storage location of the selected scenario to **Global Options** or **Project Options**. You are also able to keep the original storage location and make a copy of the selected scenario in the new storage location.
-  **Import scenarios** - This option opens the **Import scenarios** dialog box that allows you to select the **scenarios** file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:
 - Keep or replace the existing scenario.
 - Keep both scenarios.



Note: When you keep both scenarios, Oxygen XML Developer adds **imported** to the name of the imported scenario.

-  **Export selected scenarios** - Use this option to export transformation and validation scenarios individually. Oxygen XML Developer creates a **scenarios** file that contains the scenarios that you export.
- **Show Type** - Use this option to display the transformation type of each scenario.
- **Show Storage** - Use this option to display the storage location of the scenarios.
- **Group by Association** - Select this option to group the scenarios depending on whether or not they are associated with the current document.
- **Group by Type** - Select this option to group the scenarios by their type.
- **Group by Storage** - Select this option to group the scenarios by their storage location.
-  **Ungroup all** - Select this option to ungroup all the scenarios.
- **Reset Layout** - Select this option to restore the default settings of the layout.

Oxygen XML Developer supports multiple scenarios association. To associate multiple scenarios with a document, enable the check-boxes in front of each scenario. You can also associate multiple scenarios with a document from the **Configure Transformation Scenario(s)** or **Configure Validation Scenario(s)** dialog boxes.

The **Transformation Scenarios** presents both global scenarios and project scenarios. By default, Oxygen XML Developer presents the items in the **Transformation Scenarios** in the following order: scenarios matching the current framework, scenarios matching the current project, scenarios matching other frameworks. You can group the scenarios depending

on the columns in the **Transformation Scenarios** view. Right click the name of a column to choose how to group the scenarios. The following grouping options are available:

- **Group by Association** - Select this option to group the scenarios depending on whether or not they are associated with the current document.
- **Group by Type** - Select this option to group the scenarios by their type.
- **Group by Storage** - Select this option to group the scenarios by their storage location.

Debugging PDF Transformations

To debug a DITA PDF transformation scenario using the XSLT Debugger follow these steps:

1. [Open the Preferences dialog box](#), go to **XML > XML Catalog**, click **Add**, and select the file located at `DITA_OT_DIR\plugins\org.dita.pdf2\cfg\catalog.xml`.
2. Open the map in the **DITA Maps Manager** and create a **DITA Map PDF** transformation scenario.
3. Edit the scenario, go to the **Parameters** tab and change the value of the **clean.temp** parameter to **no**.
4. Run the transformation scenario.
5. Open the **stage1.xml** file located in the temporary directory and [format and indent](#) it.
6. Create a transformation scenario for this XML file by associating the `topic2fo_shell_fop.xsl` stylesheet located at `DITA_OT_DIR\plugins\org.dita.pdf2\xsl\fo\topic2fo_shell_fop.xsl`. If you are specifically using the RenderX XEP or Antenna House FO processors to build the PDF output, you should use the XSL stylesheets `topic2fo_shell_xep.xsl` or `topic2fo_shell_axf.xsl` located in the same folder.
7. In the transformation scenario edit the XSLT Processor combo box choose the Saxon EE XSLT processor (the same processor used when the DITA OT transformation is executed).
8. In the transformation scenario edit the **Parameters** list and set the parameter *locale* with the value *en_GB* and the parameter *customizationDir.url* to point either to your customization directory or to the default DITA OT customization directory. Its value should have an URL syntax like: `file:///c:/path/to/DITA_OT_DIR/plugins/org.dita.pdf2/cfg`.
9. Debug the transformation scenario.

XSLT Processors

This section explains how to configure an XSLT processor and extensions for such a processor in Oxygen XML Developer.

Supported XSLT Processors

Oxygen XML Developer includes the following XSLT processors:

- **Xalan 2.7.1** - [Xalan-Java](#) is an XSLT processor for transforming XML documents into HTML, text, or other XML document types. It implements XSL Transformations (XSLT) Version 1.0 and XML Path Language (XPath) Version 1.0.
- **Saxon 6.5.5** - [Saxon 6.5.5](#) is an XSLT processor that implements the Version 1.0 XSLT and XPath with a number of powerful extensions. This version of Saxon also includes many of the new features that were first defined in the XSLT 1.1 working draft, but for conformance and portability reasons these are not available if the stylesheet header specifies `version="1.0"`.
- **Saxon 9.6.0.7 Home Edition (HE), Professional Edition (PE)** - [Saxon-HE/PE](#) implements the basic conformance level for XSLT 2.0 / 3.0 and XQuery 1.0. The term *basic XSLT 2.0 / 3.0 processor* is defined in the draft XSLT 2.0 / 3.0 specifications. It is a conformance level that requires support for all features of the language other than those that involve schema processing. The HE product remains open source, but removes some of the more advanced features that are present in Saxon-PE.
- **Saxon 9.6.0.7 Enterprise Edition (EE)** - [Saxon EE](#) is the schema-aware edition of Saxon and it is one of the built-in processors included in Oxygen XML Developer. Saxon EE includes an XML Schema processor, and schema-aware XSLT, XQuery, and XPath processors.

The validation in schema aware transformations is done according to the W3C XML Schema 1.0 or 1.1. This can be [configured in Preferences](#).



Note: Oxygen XML Developer implements a Saxon framework that allows you to create Saxon configuration files. Two templates are available: **Saxon collection catalog** and **Saxon configuration**. Both of these templates support content completion, element annotation, and attribute annotation.



Note: Saxon can use the *ICU-J localization library* (`saxon9-icu.jar`) to add support for sorting and date/number formatting in a wide variety of languages. This library is not included in the Oxygen XML Developer installation kit. However, Saxon will use the default collation and localization support available in the currently used JRE. To enable this capability follow these steps:

1. Download Saxon 9.6.0.7 Professional Edition (PE) or Enterprise Edition (EE) from <http://www.saxonica.com>.
2. Unpack the downloaded archive.
3. Create a new XSLT transformation scenario (or edit an existing one). In the **XSLT** tab, click the **Extensions** button to open the list of additional libraries used by the transformation process.
4. Click **Add** and browse to the folder where you unpacked the downloaded archive and choose the `saxon9-icu.jar` file.

Note that the `saxon9-icu.jar` should NOT be added to the application library folder because it will conflict with another version of the ICU-J library that comes bundled with Oxygen XML Developer.

- **Saxon-CE (Client Edition)** is Saxonica's implementation of XSLT 2.0 for use on web browsers. Oxygen XML Developer provides support for editing stylesheets that contain Saxon-CE extension functions and instructions. This support improves the validation, content completion, and syntax highlighting.



Note: Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).



Note: A specific template, named **Saxon-CE stylesheet**, is available in the [New Document wizard](#).

- **Xsltproc (libxslt) - Libxslt** is the XSLT C library developed for the Gnome project. `Libxslt` is based on `libxml2`, the XML C library developed for the Gnome project. It also implements most of the EXSLT set of processor-portable extensions, functions, and some of Saxon's evaluate and expression extensions. The `libxml2` version included in Oxygen XML Developer is 2.7.6 and the `Libxslt` version is 1.1.26.

Oxygen XML Developer uses `Libxslt` through its command line tool (`Xsltproc`). The XSLT processor is included in the distribution kit of the stand-alone version for Windows and Mac OS X. Since there are differences between various Linux distributions, on Linux you must install `Libxslt` on your machine as a separate application and set the `PATH` variable to contain the `Xsltproc` executable.



Note: The `Xsltproc` processor can be configured from the [XSLTPROC options page](#).



Caution: Known problem: file paths containing spaces are not handled correctly in the LIBXML processor. For example, the built-in XML catalog files of the predefined document types (DocBook, TEI, DITA, etc) are not handled properly by LIBXML if Oxygen XML Developer is installed in the default location on Windows (C:\Program Files). This is because the built-in XML catalog files are stored in the `[OXYGEN_DIR]/frameworks` subdirectory of the installation directory, which in this case contains at least a space character.

- **MSXML 4.0 - MSXML 4.0** is available only on Windows platforms. It can be used for [transformation](#) and [validation of XSLT stylesheets](#).

Oxygen XML Developer uses the Microsoft XML parser through its command line tool `msxsl.exe`.

Since `msxsl.exe` is only a wrapper, Microsoft Core XML Services (MSXML) must be installed on the computer. Otherwise, you will get a corresponding warning. You can get the latest Microsoft XML parser from [Microsoft web-site](#).

- **MSXML .NET** - *MSXML .NET* is available only on Windows platforms. It can be used for *transformation* and *validation of XSLT stylesheets*.

Oxygen XML Developer performs XSLT transformations and validations using .NET Framework's XSLT implementation (`System.Xml.Xsl.XslTransform` class) through the **nxslt** command line utility. The **nxslt** version included in Oxygen XML Developer is 1.6.

You should have the .NET Framework version 1.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed.
Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 1.0** - A transformer based on the `System.Xml` 1.0 library available in the .NET 1.0 and .NET 1.1 frameworks from Microsoft (<http://msdn.microsoft.com/xml/>). It is available only on Windows.

You should have the .NET Framework version 1.0 or 1.1 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed.
Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 2.0** - A transformer based on the `System.Xml` 2.0 library available in the .NET 2.0 framework from [Microsoft](#). It is available only on Windows.

You should have the .NET Framework version 2.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 2.0 to be installed.
Exit code: 128.

You can get the .NET Framework version 2.0 from the [Microsoft website](#).

For information about configuring the XSLT preferences, see the *XSLT options* section.

Configuring Custom XSLT Processors

You can configure and run XSLT and XQuery transformations with processors other than *the ones which come with the Oxygen XML Developer distribution*.



Note:

The output messages of a custom processor are displayed in an output view at the bottom of the application window. If an output message follows *the format of an Oxygen XML Developer linked message*, clicking it highlights the location of the message in an editor panel containing the file referenced in the message.

Configuring the XSLT Processor Extensions Paths

The Xalan and Saxon processors support the use of extension elements and extension functions. Unlike a literal result element, which the stylesheet simply transfers to the result tree, an extension element performs an action. The extension is usually used because the XSLT stylesheet fails in providing adequate functions for accomplishing a more complex task.

The DocBook extensions for Xalan and Saxon are included in the `[OXYGEN_DIR]\frameworks\docbook\xsl\extensions` folder.

For more information about how to use extensions, see the following links:

- **Xalan** - <http://xml.apache.org/xalan-j/extensions.html>
- **Saxon 6.5.5** - <http://saxon.sourceforge.net/saxon6.5.5/extensions.html>
- **Saxon 9.6.0.7** - <http://www.saxonica.com/documentation9.5/index.html#!extensibility>

To set an XSLT processor extension (a directory or a jar file), use *the Extensions button* in the **Edit scenario** dialog box.



Note: The old way of setting an extension (using the parameter `-Dcom.oxygenxml.additional.classpath`) was deprecated, and instead you should use the extension mechanism of the XSLT transformation scenario.

XSL-FO Processors

This section explains how to apply XSL-FO processors when transforming XML documents to various output formats in Oxygen XML Developer.

The Built-in XSL-FO Processor

The Oxygen XML Developer installation package is distributed with the [Apache FOP](#) that is a Formatting Objects processor for rendering your XML documents to PDF. *FOP* is a print and output independent formatter driven by XSL Formatting Objects. *FOP* is implemented as a Java application that reads a formatting object tree and renders the resulting pages to a specified output.

Other FO processors can be configured in [the Preferences dialog box](#).

Add a Font to the Built-in FO Processor - The Simple Version

If the font that must be set to Apache FOP is one of the fonts that are installed in the operating system you should follow the next steps for creating and setting a FOP configuration file that looks for the font that it needs in the system fonts. It is a simplified version of [the procedure for setting a custom font in Apache FOP](#).

1. Register the font in FOP configuration. (This is not necessary for DITA PDF transformations, skip to the next step)
 - a) Create a FOP configuration file that specifies that FOP should look for fonts in the installed fonts of the operating system.

```
<fop version="1.0">
  <renderers>
    <renderer mime="application/pdf">
      <fonts>
        <auto-detect/>
      </fonts>
    </renderer>
  </renderers>
</fop>
```

- b) [Open the Preferences dialog box](#), go to **XML > XSLT/FO/XQuery > FO Processors**, and enter the path of the FOP configuration file in the **Configuration file** text field.
2. Set the font on the document content.

This is done usually with XSLT stylesheet parameters and depends on the document type processed by the stylesheet.

- For DocBook documents you can start with the predefined scenario called **DocBook PDF**, [edit the XSLT parameters](#) and set the font name (in our example the font family name is **Arial Unicode MS**) to the parameters `body.font.family` and `title.font.family`.
- For TEI documents you can start with the predefined scenario called **TEI PDF**, [edit the XSLT parameters](#) and set the font name (in our example **Arial Unicode MS**) to the parameters `bodyFont` and `sansFont`.
- For DITA transformations to PDF using DITA-OT you should modify the following two files:
 - `DITA_OT_DIR/plugins/org.dita.pdf2/cfg/fo/font-mappings.xml` - the `font-face` element included in each element `physical-font` having the attribute `char-set="default"` must contain the name of the font (**Arial Unicode MS** in our example)
 - `DITA_OT_DIR/plugins/org.dita.pdf2/fop/conf/fop.xconf` - an element `auto-detect` must be inserted in the element `fonts` which is inside the element `renderer` having the attribute `mime="application/pdf"`:

```
<renderer mime="application/pdf">
  .
  <fonts>
    <auto-detect/>
  </fonts>
  .
</renderer>
```

Add a Font to the Built-in FO Processor

If an XML document is transformed to PDF using the built-in Apache FOP processor but it contains some Unicode characters that cannot be rendered by the default PDF fonts, then a special font that is capable to render these characters must be configured and embedded in the PDF result.



Important: If this special font is installed in the operating system, there is a simple way of telling FOP to look for it. See [the simplified procedure for adding a font to FOP](#).

1. Locate the font.

First, find out the name of a font that has the glyphs for the special characters you used. One font that covers most characters, including Japanese, Cyrillic, and Greek, is Arial Unicode MS.

On Windows the fonts are located into the `C:\Windows\Fonts` directory. On Mac, they are placed in `/Library/Fonts`. To install a new font on your system, is enough to copy it in the `Fonts` directory.

2. Generate a font metrics file from the font file.

- a) Open a terminal.
- b) Change the working directory to the Oxygen XML Developer install directory.
- c) Create the following script file in the Oxygen XML Developer installation directory.

For OS X and Linux create a file `ttfConvert.sh`:

```
#!/bin/sh

export LIB=lib
export CP=$LIB/fop.jar
export CP=$CP:$LIB/avalon-framework-4.2.0.jar
export CP=$CP:$LIB/xercesImpl.jar
export CP=$CP:$LIB/commons-logging-1.1.1.jar
export CP=$CP:$LIB/commons-io-1.3.1.jar
export CP=$CP:$LIB/xmlgraphics-commons-1.5.jar
export CP=$CP:$LIB/xml-apis.jar
export CMD="java -cp $CP org.apache.fop.fonts.apps.TTFReader"
export FONT_DIR='.'

$CMD $FONT_DIR/Arialuni.ttf Arialuni.xml
```

For Windows create a file `ttfConvert.bat`:

```
@echo off
set LIB=lib
set CP=%LIB%\fop.jar
set CP=%CP%;%LIB%\avalon-framework-4.2.0.jar
set CP=%CP%;%LIB%\xercesImpl.jar
set CP=%CP%;%LIB%\commons-logging-1.1.1.jar
set CP=%CP%;%LIB%\commons-io-1.3.1.jar
set CP=%CP%;%LIB%\xmlgraphics-commons-1.5.jar
set CP=%CP%;%LIB%\xml-apis.jar
set CMD=java -cp "%CP%" org.apache.fop.fonts.apps.TTFReader
set FONT_DIR=C:\Windows\Fonts
%CMD% %FONT_DIR%\Arialuni.ttf Arialuni.xml
```

The paths specified in the file are relative to the Oxygen XML Developer installation directory. If you decide to create it in other directory, change the file paths accordingly.

The `FONT_DIR` can be different on your system. Check that it points to the correct font directory. If the Java executable is not in the `PATH`, specify the full path of the executable.

If the font has bold and italic variants, convert them too by adding two more lines to the script file:

- for OS X and Linux:

```
$CMD $FONT_DIR/Arialuni-Bold.ttf Arialuni-Bold.xml
$CMD $FONT_DIR/Arialuni-Italic.ttf Arialuni-Italic.xml
```

- for Windows:

```
%CMD% %FONT_DIR%\Arialuni-Bold.ttf Arialuni-Bold.xml
%CMD% %FONT_DIR%\Arialuni-Italic.ttf Arialuni-Italic.xml
```

d) Run the script.

On Linux and OS X, run the command `sh ttfConvert.sh` from the command line. On Windows, run the command `ttfConvert.bat` from the command line or double-click the file `ttfConvert.bat`.

3. Register the font in FOP configuration. (This is not necessary for DITA PDF transformations, skip to the next step)

a) Create a FOP configuration file that specifies the font metrics file for your font.

```
<fop version="1.0">
  <base>./</base>
  <font-base>file:/C:/path/to/FOP/font/metrics/files/</font-base>
  <source-resolution>72</source-resolution>
  <target-resolution>72</target-resolution>
  <default-page-settings height="11in" width="8.26in"/>
  <renderers>
    <renderer mime="application/pdf">
      <filterList>
        <value>flate</value>
      </filterList>
      <font>
        <font metrics-url="Arialuni.xml" kerning="yes"
          embed-url="file:/Library/Fonts/Arialuni.ttf">
          <font-triplet name="Arialuni" style="normal"
            weight="normal"/>
        </font>
      </font>
    </renderer>
  </renderers>
</fop>
```

The `embed-url` attribute points to the font file to be embedded. Specify it using the URL convention. The `metrics-url` attribute points to the font metrics file with a path relative to the `base` element. The triplet refers to the unique combination of name, weight, and style (italic) for each variation of the font. In our case is just one triplet, but if the font had variants, you would have to specify one for each variant. Here is an example for Arial Unicode if it had italic and bold variants:

```
<fop version="1.0">
  ...
  <font>
    <font metrics-url="Arialuni.xml" kerning="yes"
      embed-url="file:/Library/Fonts/Arialuni.ttf">
      <font-triplet name="Arialuni" style="normal"
        weight="normal"/>
    </font>
    <font metrics-url="Arialuni-Bold.xml" kerning="yes"
      embed-url="file:/Library/Fonts/Arialuni-Bold.ttf">
      <font-triplet name="Arialuni" style="normal"
        weight="bold"/>
    </font>
    <font metrics-url="Arialuni-Italic.xml" kerning="yes"
      embed-url="file:/Library/Fonts/Arialuni-Italic.ttf">
      <font-triplet name="Arialuni" style="italic"
        weight="normal"/>
    </font>
  </font>
  ...
</fop>
```

More details about the FOP configuration file are available on the FOP website.

b) *Open the Preferences dialog box*, go to **XML > XSLT/FO/XQuery > FO Processors**, and enter the path of the FOP configuration file in the **Configuration file** text field.

4. Set the font on the document content.

This is usually done with XSLT stylesheet parameters and depends on the document type processed by the stylesheet. For DocBook documents, you can start with the predefined scenario called **DocBook PDF**, *edit the XSLT parameters*, and set the font name (in our example **Arialuni**) to the parameters `body.font.family` and `title.font.family`. For TEI documents, you can start with the predefined scenario called **TEI PDF**, *edit the XSLT parameters*, and set the font name (in our example **Arialuni**) to the parameters `bodyFont` and `sansFont`. For DITA to PDF transformations using DITA-OT modify the following two files:

- `DITA_OT_DIR/plugins/org.dita.pdf2/cfg/fo/font-mappings.xml` - the `font-face` element included in each element `physical-font` having the attribute `char-set="default"` must contain the name of the font (*Arialuni* in our example)
- `DITA_OT_DIR/plugins/org.dita.pdf2/fop/conf/fop.xconf` - an element `font` must be inserted in the element `fonts` which is inside the element `renderer` having the attribute `mime="application/pdf"`:

```
<renderer mime="application/pdf">
  .
  .
  .
  <font>
    <font metrics-url="Arialuni.xml" kerning="yes"
          embed-url="file:/Library/Fonts/Arialuni.ttf">
      <font-triplet name="Arialuni" style="normal"
                  weight="normal"/>
    </font>
  </font>
</renderer>
```

Adding Libraries to the Built-in FO Processor (XML with XSLT and FO)

Adding Hyphenation Support for XML with XSLT Transformation Scenarios

You can extend the functionality of the built-in FO processor by dropping additional libraries in the `[OXYGEN_DIR]/lib/fop` directory. To add support for hyphenation:

1. Download the pre-compiled JAR from [OFFO](#).
2. Copy the `fop-hyph.jar` file into the `[OXYGEN_DIR]/lib/fop` folder.
3. Restart Oxygen XML Developer.

Adding Support for PDF Images

1. Download the [fop-pdf-images](#) JAR libraries.
2. Copy the libraries into the `[OXYGEN_DIR]/lib` folder.
3. Restart Oxygen XML Developer.

Adding Libraries to the Built-in FO Processor (DITA-OT)

To use additional libraries with the DITA-OT publishing engine, you need to edit the transformation scenario and add the path to the new libraries in the **Libraries** section of the **Advanced** tab.

Adding Hyphenation Support for DITA-OT Transformation Scenarios

1. Download the pre-compiled JAR from [OFFO](#).
2. Edit the DITA-OT transformation scenario and switch to the **Advanced** tab. Click the **Libraries** button and add the path to the `fop-hyph.jar` library.

Adding Support for PDF Images

1. Download the [fop-pdf-images](#) JAR libraries.
2. Edit the DITA-OT transformation scenario and switch to the **Advanced** tab. Click the **Libraries** button and add the path to the libraries.

Output Formats

Oxygen XML Developer allows you to use transformation scenarios to publish XML content in various output formats (such as WebHelp, PDF, CHM, EPUB, JavaHelp, Eclipse Help, XHTML, etc.)

For transformations that are not included in your installed version of Oxygen XML Developer, simply install the tool chain required to perform the specific transformation and process the files in accordance with the processor instructions.

A multitude of target formats are possible. The basic condition for transformation to any format is that your source document is well-formed.



Note: You need to use the appropriate stylesheet according to the source definition and the desired output. For example, if you want to transform into an HTML format using a DocBook stylesheet, your source XML document should conform with the DocBook DTD.

For more information, see the [Transformation Scenarios](#) on page 404 section.

WebHelp System Output

Oxygen XML Developer allows you to obtain WebHelp output from DocBook and DITA documents. This section contains information about the WebHelp system, its variants, and ways to customize it to better fit your specific needs.

WebHelp System Description

WebHelp is a form of online help that consists of a series of web pages (XHTML format). Its advantages include platform independence and continuous content update, since it can be viewed using a regular web browser.

Layout

The layout of the WebHelp system is comprised of two parts:

- The left section that contains separate tabs for **Content**, **Search**, and **Index**.



Note: If your documents contain no `indexterm` elements, the **Index** tab is not generated.



Note: You can enhance the appearance of the selected item in the Table of Contents. See the [Customizing WebHelp chapter](#) for more details.

- The right section where help pages are displayed.

You can navigate through the content of your output using the arrows in the upper-right part of the page. These arrows allow you to move to the parent, previous, and next topic. The parents of the currently opened topic are also presented at the top of the page.



Note: You can edit the `args.hide.parent.link` parameter to hide the **Parent**, **Next**, and **Previous** links.

You can use the  **Collapse all** button that is displayed in the **Content** tab to collapse all the topics presented in the Table of Contents.

The top-right corner of the page contains the following options:

- **With Frames** - Displays the output using HTML frames to render two separate sections (a section that displays the Table of Contents in the left side and a section that displays the content of a topic in the right side).
- **Print this page** - Opens a dialog box with various printing options and a print preview.

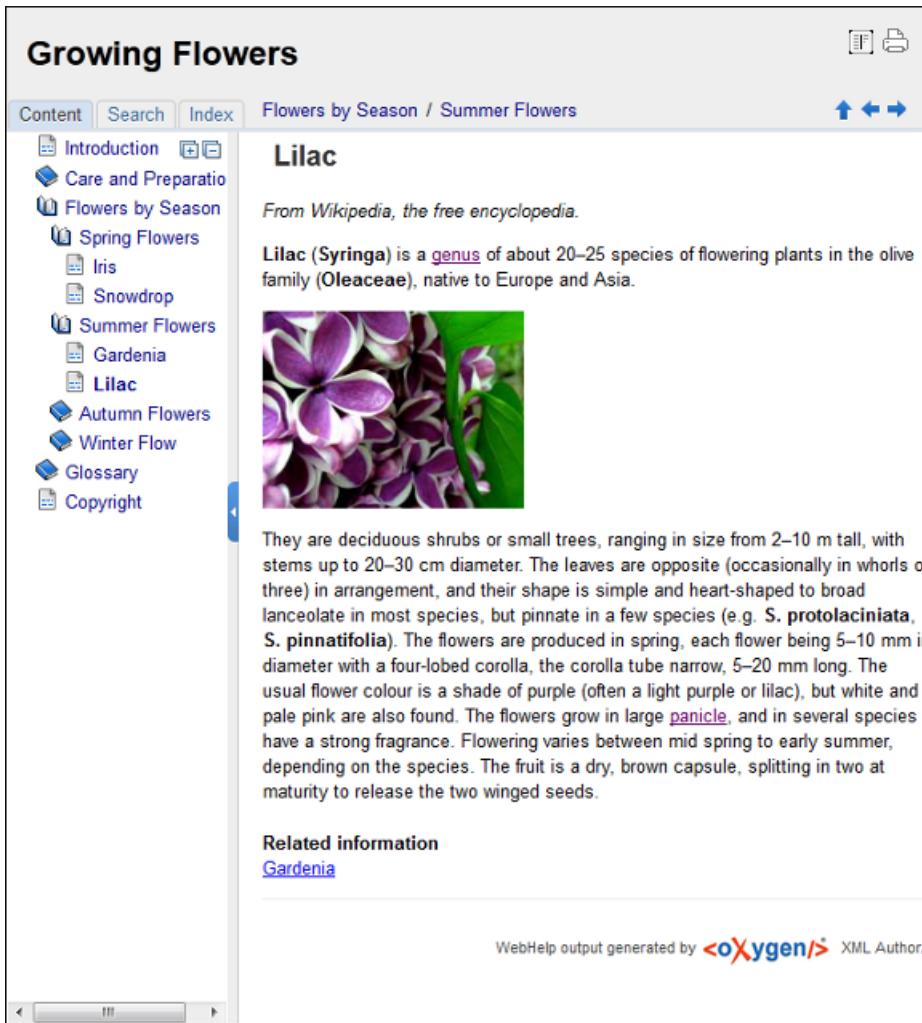


Figure 202: WebHelp Output

Search Feature

The **Search** feature is enhanced with a rating mechanism that computes scores for every page that matches the search criteria. These scores are then translated into a 5-star rating scheme. The search results are sorted depending on the following:

- The number of keywords found in a single page (the higher the number, the better).
- The context (for example, a word found in a title scores better than a word found in unformatted text). The search ranking order, sorted by relevance is as follows:
 - The search phrase is included in a meta keyword
 - The search phrase is in the title of the page
 - The search phrase is in bold text in a paragraph
 - The search phrase is in normal text in a paragraph

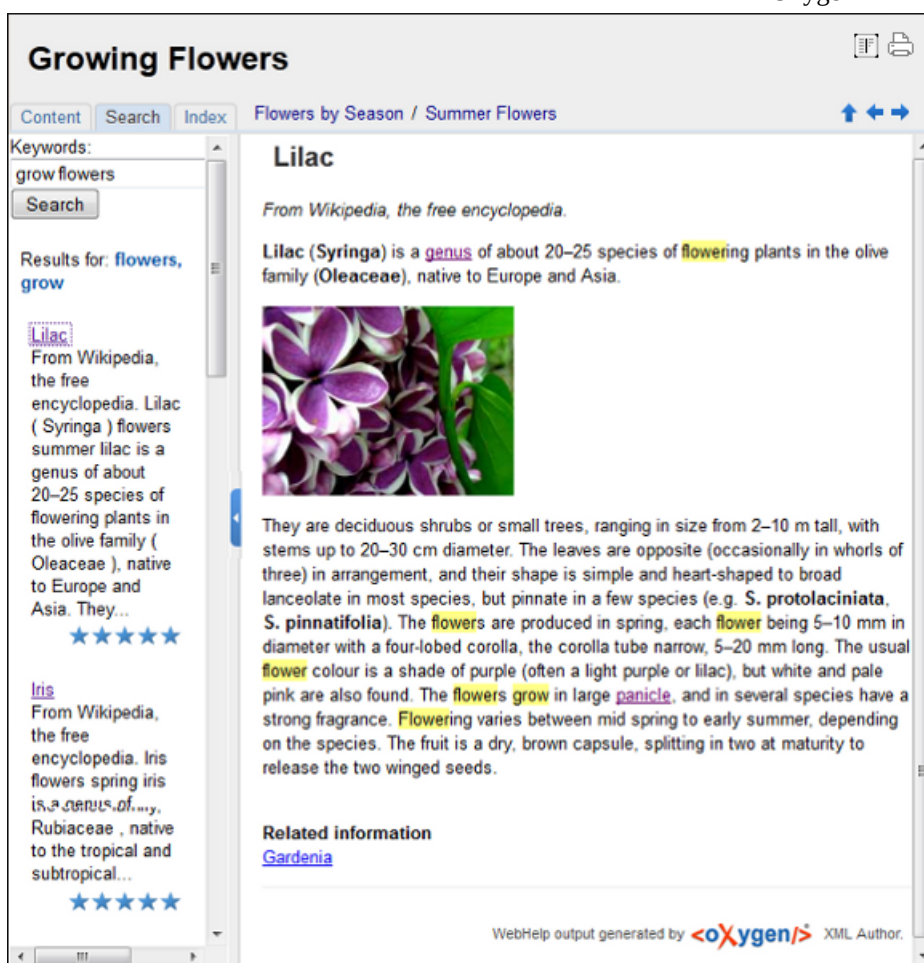


Figure 203: WebHelp Search with Stemming Enabled

Rules that are applied during a search include:

- Boolean searches are supported using the following operators: *and*, *or*, *not*. When there are two adjacent search terms without an operator, *or* is used as the default search operator (for example, *grow flowers* is the same as *grow or flowers*).
- The space character separates keywords (an expression such as *grow flowers* counts as two separate keywords: *grow* and *flowers*).
- Do not use quotes to perform an exact search for multiple word expressions (an expression such as "*grow flowers*", returns no results since it searches for two separate words).
- `indexterm` and `keywords` DITA elements are an effective way to increase the ranking of a page (for example, content inside `keywords` elements weighs twice as much as content inside an `H1` HTML element).
- Words composed by merging two or more words with colon (":"), minus ("-"), underline ("_"), or dot (".") characters count as a single word.
- Always search for words containing three or more characters (shorter words, such as *to* or *of* are ignored). This rule does not apply to CJK (Chinese, Japanese, Korean) languages.

HTML tag elements are also assigned a scoring value and these values are evaluated for the search results. For information about editing these values, see the [Editing Scoring Values of Tag Elements in Search Results](#) on page 468 topic.

This output format is compatible with most of the most recent versions of the following common browsers:

- Internet Explorer (IE 8 or newer)
- Chrome
- Firefox

- Safari
- Opera



Important: Due to some security restrictions in Google Chrome, WebHelp pages loaded from the local system (through URLs of the `file:///...` format) may not work properly. We recommend that you load WebHelp pages in Google Chrome only from a web server (with a URL such as `http://your.server.com/webhelp/index.html` or `http://localhost/web_pages/index.html`).



Warning: Due to some restrictions in web browsers in regards to JavaScript code, the *frameless* version (`index.html` start page) of the WebHelp system should only be loaded from a web server (with a URL such as `http://your.server.com/webhelp/index.html` or `http://localhost/web_pages/index.html`). When loading WebHelp pages from the local file system, the *frameset* version (`index_frames.html` start page) of the WebHelp system should be used instead (`file:///...`).

WebHelp with Feedback System Description

WebHelp with Feedback is a form of online help system that consists of a series of web pages (XHTML format). Its advantages include platform independence, continuous content update, and a feedback mechanism that allows your authors and audience to interact with one another through comments.

Layout

The layout of the feedback-enabled WebHelp system is similar to the layout of the basic WebHelp and the left section is identical. However, the bottom of the right section contains a **comments** bar. You can click on the **Log in** button on the right side of this bar to be authenticated as a user for the WebHelp system and your user name will be included in any comments that you add. If you do not have a user name, you can click on the **Sign Up** button to create a new user. Under the **comments** bar, you can click the **Add New Comment** button to add a comment, regardless of whether or not you are logged in.



Note: You can enhance the appearance of the selected item in the Table of Contents. See the [Customizing WebHelp chapter](#) for more details.

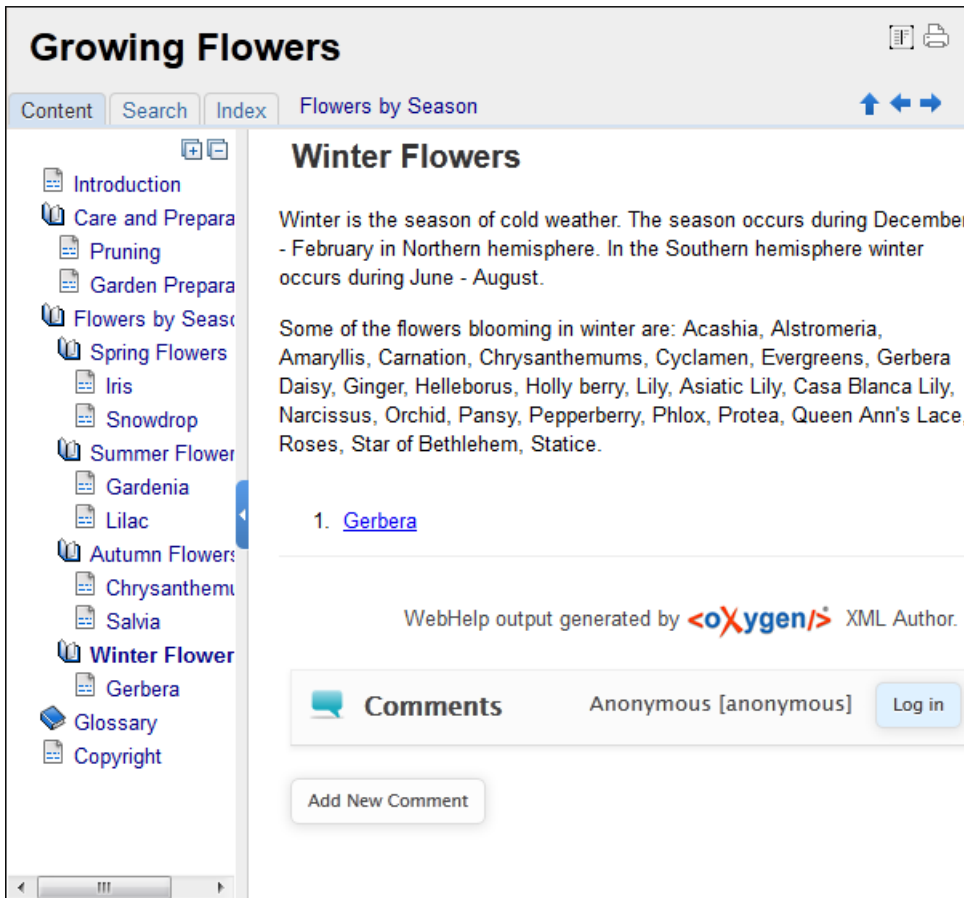


Figure 204: The Layout of the Feedback-Enabled WebHelp System

After you log in, your name and user name are displayed in the **Comments** bar together with the **Log off** and **Edit** buttons. Click the **Edit** button to open the **User Profile** dialog box. In this dialog box, you can customize the following options:

- **Your Name** - You can use this field to edit the initial name that you used to create your user profile.
- **Your email address** - You can use this field to edit the initial email address that you used to create your profile.
- You can choose to receive an email in the following situations:
 - When a comment is left on a page that you commented on.
 - When a comment is left on any topic in the WebHelp system.
 - When a reply is left to one of my comments.
- **New Password** - Allows you to enter a new password for your user account.



Note: The **Current Password** field from the top of the **User Profile** is mandatory if you want to save the changes you make.

Search Feature

The **Search** feature is enhanced with a rating mechanism that computes scores for every page that matches the search criteria. These scores are then translated into a 5-star rating scheme. The search results are sorted depending on the following:

- The number of keywords found in a single page (the higher the number, the better).
- The context (for example, a word found in a title scores better than a word found in unformatted text). The search ranking order, sorted by relevance is as follows:

This output format is compatible with most of the most recent versions of the following common browsers:

- Internet Explorer (IE 8 or newer)
- Chrome
- Firefox
- Safari
- Opera

Deployment of the WebHelp With Feedback System

System Requirements

The feedback-enabled WebHelp system of Oxygen XML Developer requires a standard server deployment. You can request this from your server admin and it needs the following system components:

- A Web server (such as *Apache Web Server*)
- A *MySQL* or *MariaDB* database server
- A database admin tool (such as *phpMyAdmin*)
- PHP Version 5.1.6 or later

Oxygen XML WebHelp system supports most of the recent versions of the following browsers: Chrome, Firefox, Internet Explorer, Safari, Opera.

Create WebHelp with Feedback Database

The WebHelp system needs a database to store user details and the actual feedback, and a user added to it with all privileges. After this is created, you should have the following information:

- Database name
- Username
- Password

Exactly how you create the database and user depends on your web host and your particular needs.

For example, the following procedure uses *phpMyAdmin* to create a MySQL database for the feedback system and a MySQL user with privileges for that database. The feedback system uses these credentials to connect to the database.

Using *phpMyAdmin* to create a database:

1. Type *localhost* in your browser.
2. In the left area, select: *phpMyAdmin*.
3. Click *Databases* (in the right frame) and then create a *database*. You can give it any name you want (for example *comments*).
4. Create a user with connection privileges for this database.
5. Under *localhost*, in the right frame, click *Privileges* and then at the bottom of the page click the **reload the privileges** link.

Deploying the WebHelp output

If you have a web server configured with PHP and MySQL, you can deploy the WebHelp output by following these steps:

1. Connect to your server using an FTP client.
2. Locate the home directory (from now on, referred to as *DOCUMENT_ROOT*) of your server.
3. Copy the transformation output folder into the *DOCUMENT_ROOT* folder.
4. Rename it to something relevant, for example, *myProductWebHelp*.

5. Open the output folder (for example, `http://[YOUR_SERVER]/myProductWebHelp/`). You are redirected to the WebHelp installation wizard. Proceed with the installation as follows:
 - a. Verify that the prerequisites are met.
 - b. Press **Start Installation**.
 - c. Configure the **Deployment Settings** section. Default values are provided, but you should adjust them as needed.



Tip: You can change some of the options later. The installation creates a `config.php` file in `[OXYGEN_WEBHELP]/resources/php/config/config.php` where all your configuration options are stored.

- d. Configure the **MySQL Database Connection Settings** section. Use the information (database name, username, password) from the [Create WebHelp with Feedback Database section](#) to fill-in the appropriate text boxes.



Warning: Checking the **Create new database structure** option will overwrite any existing data in the selected database, if it already exists. Therefore, it is useful the first time you install the WebHelp with Feedback system, but you do not want to select this option on subsequent deployments.
- e. If you are using a domain (such as *OpenLDAP* or *Active Directory*) to manage users in your organization, check the **Enable LDAP Authentication** option. This will allow you to configure the LDAP server, which will provide information and credentials for users who will access the WebHelp system. Also, this will allow you to choose which of the domain users will have administrator privileges.
- f. If the **Create new database structure** option is checked, the **Create WebHelp Administrator Account** section becomes available. Here you can set the administrator account data. The administrator is able to moderate new posts and manage WebHelp users.

The same database can be used to store comments for different WebHelp deployments. If a topic is available in more than one WebHelp deployments and there are comments associated with it, you can choose to display the comments in all deployments that share the database. To do this, enable the **Display comments from other products** option. In the **Display comments from** section, a list with the deployments sharing the same database is displayed. Select the deployments allowed to share common feedback.



Note: You can restrict the displayed comments of a product depending on its version. If you have two products that use the same database and you restrict one of them to display comments starting from a certain version, the comments of the other product are also displayed from the specified version onwards.

- g. Press **Next Step**.
- h. Remove the installation folder from your web server.



Important: When you publish subsequent iterations of your WebHelp system, you will not upload the `/install` folder in the output, as you only need it uploaded the first time you create the installation. On subsequent uploads, you will just upload the other output files.

- i. In your Web browser, go to your WebHelp system main page.

Testing Your WebHelp with Feedback System

To test your system, create a user and post a comment. Check to see if the notification emails are delivered to your email inbox.



Note: To read debug messages generated by the system:

1. Enable *JavaScript* logging by doing one of the following:
 - Open the `log.js` file, locate the `var log= new Log(Level.NONE);` line, and change the logging level to: `Level.INFO`, `Level.DEBUG`, `Level.WARN`, or `Level.ERROR`.
 - Append `?log=true` to the WebHelp URL.
2. Inspect the PHP and Apache server log files.

Documentation Product ID and Version

When you run a WebHelp with Feedback transformation scenario, by default you are prompted for a documentation product ID and version number. This is needed when multiple WebHelp systems are deployed on the same server. Think of your WebHelp output as a *product*. If you have 3 different WebHelp outputs, you have 3 different *products* (each with their own unique documentation product ID). This identifier is included in a configuration file so that comments are tied to a particular output (product ID and version number).



Note: The WebHelp with Feedback installation includes a configuration option **Display comments from other products** that allows you to choose to have comments be visible in other specified *products*.

Refreshing the Content of a WebHelp with Feedback Installation

It is common to update the content of an existing installation of a WebHelp with Feedback system on a regular basis. In this case, reinstalling the whole system is not a viable option since it might result in the loss of the comments associated with your topics. Also, reconfiguring the system every time you want to refresh it may be time consuming.

However, you can refresh just the content without losing the comments or the initial system configuration, by following these steps:

1. Execute the transformation scenario that produces the WebHelp with Feedback output directory.
2. Locate the `oxygen-webhelp\resources\php\config\config.php` file and delete it.
3. Locate the `oxygen-webhelp\install` directory and delete it.
4. Copy the remaining structure of the output folder and paste it into your WebHelp with Feedback system installation directory, overwriting the existing content.

Managing Users and Comments in a WebHelp with Feedback System

When you installed the WebHelp with Feedback system the first time (assuming the [Create new database structure option](#) was enabled), you should have been prompted to create an administrator account (or a user named `administrator` was created by default). As an administrator, you have access to manage comments posted in your feedback-enabled WebHelp system. You can also manage the user information (such as role, status, or notification options).

To manage comments and user information, follow these steps:

1. At the bottom of each specific topic there is a **Comments** navigation bar and on the right side there is a **Log in** button. Click this button and log in with your administrator credentials. This gives you access to an **Admin Panel** button.
2. Click the **Admin Panel** button to display an administration panel inside the topic.

User Name	Name	Level	Company	E-Mail	Date	WebHelp Notification	Reply Notification	Page Notification	Status	admin.user.type
admin	Administrator	admin	NA	admin@sync.ro	2015-08-04 08:56:55	yes	no	no	validated	Local User
user	user	user	noCompany	user@sync.ro	2015-08-04 08:57:46	no	yes	yes	validated	Local User

Figure 206: The Administrative Page

3. Use this panel to manage the following options:

Delete Orphaned Comments

Allows you to delete comments that are no longer associated with a topic in your WebHelp system.

Delete Pending Users

Allows you to delete user accounts that you do not wish to activate.

View All Posts

Allows you to view all the comments that are associated with topics in your WebHelp system.

Export Comments

Allows you to export all posts associated with topics in your WebHelp system into an XML file.

Set Version

Use this action to display comments starting with a particular version.

Manage User Information

To edit the details for a user, click on the corresponding row. This opens a window that allows you to customize the following information associated with the user:

Name

The full name of the user.

Level

Use this field to modify the privilege level (role) for the selected user. You can choose from the following:

- **User** - Regular user, able to post comments and receive e-mail notifications.
- **Moderator** - In addition to the regular **User** rights, this type of user has access to the **Admin Panel** where a moderator can view, delete, export comments, and set the version of the feedback-enabled WebHelp system.
- **Admin** - Full administrative privileges. Can manage WebHelp-specific settings, users, and their comments.

Company

The name of the organization associated with the user.

E-Mail

The contact email address for the user. This is also the address where the WebHelp system sends notifications.

WebHelp Notification

When enabled, the user receives notifications when comments are posted anywhere in your feedback-enabled WebHelp system.

Reply Notification

When enabled, the user receives notifications when comments are posted as a reply to one of their comments.

Page Notification

When enabled, the user receives notifications when comments are posted on a topic where they previously posted a comment.

Date

The date the user registered is displayed.

Status

Use this drop-down list to change the status of the user. You can choose from the following:

- **Created** - The user is created but does not yet have any rights for the feedback-enabled WebHelp system.
- **Validated** - The user is able to use the feedback-enabled WebHelp system.
- **Suspended** - The user has no rights for the feedback-enabled WebHelp system.



Warning: The key used for identifying the page a comment is attached to is the relative file path to the output page. Since the output file and folder names mirror the source, any change to the file name (or its folder) in the source will affect the comments associated with that WebHelp page. If you change the file name or path, the comment history for that topic will become orphaned (a change to the topic ID does not affect the comment history).

WebHelp Mobile System Description

To further improve its ability to create online documentation, Oxygen XML Developer offers support to transform DocBook And DITA documents into *Mobile WebHelp* systems. This feature generates an output that works on multiple platforms (Android, iOS, BlackBerry, Windows Mobile) and is specially designed for mobile devices. All the specific

touch screen gestures are supported. The functionality of the desktop WebHelp layout is preserved, is organized in an intuitive layout, and offers table of contents, search capabilities, and index navigation.



Figure 207: Mobile WebHelp

Context-Sensitive WebHelp System

Context-sensitive help systems assist users by providing specific informational topics for certain components of a user interface, such as a button or window. This mechanism works based on mappings between a unique ID defined in the topic and a corresponding HTML page.

When WebHelp output is generated by Oxygen XML Developer, the transformation process produces an XML mapping file called `context-help-map.xml` and copies it in the output folder of the transformation. This XML file maps an ID to a corresponding HTML page, as in the following example:

```
<map productId="oxy-webhelp" productVersion="1.1">
  <appContext helpID="annotations-view" path="topics/annotations-view.html"/>
  <appContext helpID="button-editor" path="concepts/button-editor.html"/>
</map>
```

- `helpID` - Unique ID provided by a topic from two possible sources:
 - The `resourceid` element set to it in the `prolog` section:

```
<prolog>
  <resourceid id="context-sensitive-help-system"/>
</prolog>
```



Note: If you need different parts of the application (for instance, dialog boxes, views, or editing modes) to open the same contextual help topic, all of the context ID values should be included in the same DITA topic file. For example, if you need both a dialog box and a view to open the same WebHelp page, you can assign different resource IDs in the same DITA topic.

```
<prolog>
  <resourceid id="dialog1"/>
  <resourceid id="view1"/>
</prolog>
```

- The `id` attribute set on the topic root element.



Important: You should ensure that these defined IDs are unique in the context of the entire DITA project. If the IDs are not unique, the transformation scenario will display warning messages in the transformation console output. In this case, the help system will not work properly.

- **path** - Path to a corresponding WebHelp page. This path is relative to the location of the `context-help-map.xml` mapping file.
- **productID** - ID of the product for which you are writing documentation. Applicable only if you are using **WebHelp with Feedback** transformations.
- **productVersion** - Version of the product for which you are writing documentation. Applicable only if you are using **WebHelp with Feedback** transformations.

There are two ways of implementing context-sensitive help in your system:

- The XML mapping file can be loaded by a PHP script on the server side. The script receives the `contextId` value and will look it up in the XML file.
- Invoke one of the WebHelp system files `index.html` or `index_frames.html` and pass the `contextId` parameter with a specific value. The WebHelp system will automatically open the help page associated with the value of the `contextId` parameter.

The following example will open a *frameless* version of the WebHelp system showing the page associated with the id `dialog1ID`:

```
index.html?contextId=dialog1ID
```

The following example will open a *frameset* version of the WebHelp system showing the page associated with the id `view1ID`:

```
index_frames.html?contextId=view1ID
```

Customizing WebHelp Systems

To change the overall appearance of the WebHelp output, you can use the visual [WebHelp Skin Builder tool](#), which does not require knowledge of CSS language.

If you are familiar with CSS and coding, this section includes topics that explain how you can customize your WebHelp system, such as how to improve the appearance of the Table of Contents, add logo images in the title area, remove the navigation buttons, and add custom headers and footers.

WebHelp Skin Builder

The **WebHelp Skin Builder** is a simple, easy-to-use tool, specially designed to assist users to visually customize the look and feel of the WebHelp output. It is implemented as an online tool hosted on the Oxygen XML Developer website and allows you to experiment with different styles and colors over an inert documentation sample.

To be able to use the **Skin Builder**, you need:

- An Internet connection and unrestricted access to Oxygen XML Developer website.
- A late version web browser.

To start the **Skin Builder**, do one of the following:

- For DocBook or DITA WebHelp systems, use a web browser to go to <http://www.oxygenxml.com/webhelp-skin-builder>.
- For DITA WebHelp systems, you can click the **Online preview** link in the **Skins tab** of a DITA OT transformation scenario. In the upper section of the preview, click the **Select Skin** button, then choose **Customize Skin**.

The Skin Builder Layout

The left side panel of the *Skin Builder* is divided into 3 sections:

- **Actions** - Contains the following two buttons:

- **Import** - Opens an **Import CSS** dialog box that allows you to load a CSS stylesheet and apply it over the documentation sample.
- **Export** - Saves all properties as a CSS file.
- **Settings** - Includes a **Highlight selection** option that helps you identify the areas affected by a particular element customization.
 - When hovering an item in the customizable elements menu, the affected sample area is highlighted with a dotted blue border.
 - When an item in the customizable elements menu is selected, the affected sample area is highlighted with a solid red border.
- **Customize** - Provides a series of customizable elements organized under four main categories:
 - Header
 - TOC Area
 - Vertical Splitter
 - Content

For each customizable element, you can alter properties such as background color or font face. Any alteration made in the customizable elements menu is applied in real time over the sample area.

Create a Customization Skin

1. The starting point can be either one of the predefined skins or a CSS stylesheet applied over the sample using the **Import** button.
2. Use the elements in the **Customize** section to set properties that modify the look of the skin. By default, all customizable elements display a single property, but you can make more visible by clicking the **+ Add** button and choosing from the available properties.



Note: If you want to revert a particular property to its initial value, press the  **Reset** button.

3. When you are happy with the skin customizations you have made, press the **Export** button. All settings will be saved in a CSS file.

Apply a Customization Skin to a DITA Map to WebHelp Transformation Scenario

1. Start Oxygen XML Developer.
2. Load the DITA map you want to produce as a WebHelp output.
3. Edit a *DITA Map to WebHelp*-type transformation scenario. Set the previously exported CSS file in the **Custom** section of the **Skins** tab.
4. Run the transformation to obtain the WebHelp output.

Apply a Customization Skin to a DocBook to WebHelp Transformation Scenario

1. Start Oxygen XML Developer.
2. Load the DocBook file you want to produce as a WebHelp output.
3. In the **Parameters** tab, set the `webhelp.skin.css` parameter to point to the previously exported CSS.
4. To customize the logo, use the following parameters: `webhelp.logo.image` (not available for the WebHelp Mobile transformation) and `webhelp.logo.image.target.url` (not available for the WebHelp Mobile transformation).
5. Run the transformation to obtain the WebHelp output.

Customizing WebHelp Output with a Custom CSS

By creating your own custom CSS stylesheet, you can customize the look and style of WebHelp output to fit your specific needs.

To use a custom CSS in WebHelp output, follow these steps:

1. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.
 - a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
 - b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
2. Run the transformation scenario.

Changing the Style of WebHelp Mobile Pages

You can change the style for your WebHelp Mobile pages by setting a custom theme created with a third-party tool.

To create a custom theme for WebHelp Mobile pages, use the following procedure:

1. Create a custom theme (the result will be a CSS stylesheet). Use a designer tool, such as the [ThemeRoller for jQuery Mobile](#), to create your own custom theme and then download the resulting CSS stylesheet.



Tip: If you are using ThemeRoller for jQuery Mobile, make sure you use a type C swatch.

2. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.
 - a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
 - b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
3. Make sure that the output folder is empty.
4. Run the transformation scenario.

Integrating Social Media and Google Tools in WebHelp Output

Oxygen XML Developer includes support for integrating some of the most popular social media sites in WebHelp output.

How to Add a Facebook Like Button in WebHelp Output

See how you can add a Facebook widget into your WebHelp output.

To add a Facebook™ *Like* widget to your WebHelp output, follow these steps:

1. Go to the [Facebook Developers](#) website.
2. Fill-in the displayed form, then click the **Get Code** button.
A dialog box that contains code snippets is displayed.
3. Copy the two code snippets and paste them into a `<div>` element inside an XML file called `facebook-widget.xml`.

Make sure you follow these rules:

- The file must be well-formed.
- The code for each `script` element must be included in an XML comment.
- The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="facebook">
  <div id="fb-root"/>
  <script>
    <!--
      (function(d, s, id) {
        var js, fjs = d.getElementsByTagName(s)[0];
        if (d.getElementById(id)) return;
        js = d.createElement(s); js.id = id;
        js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
        fjs.parentNode.insertBefore(js, fjs);
        }(document, 'script', 'facebook-jssdk'));
      -->
    </script>
    <div class="fb-like" data-layout="standard" data-action="like" data-show-faces="true"
```

```
</div> data-share="true"/>
```

4. In Oxygen XML Developer, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp transformation scenario (depending on your needs, it may be with or without feedback, or the mobile variant) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `facebook-widget.xml` file that you created earlier.
7. Click **Ok**.
8. Run the transformation scenario.

How to Add Tweet Button in WebHelp Output

See how you can add a Twitter widget into your WebHelp output.

To add a Twitter™ *Tweet* widget to your WebHelp output, follow these steps:

1. Go to the [Tweet button generator](#) page.
2. Fill-in the displayed form.
The **Preview and code** area displays the code.
3. Copy the code snippet displayed in the **Preview and code** area and paste it into a `div` element inside an XML file called `tweet-button.xml`.

Make sure you follow these rules:

- The file must be well-formed.
- The code for each `script` element must be included in an XML comment.
- The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="twitter">
  <a href="https://twitter.com/share" class="twitter-share-button">Tweet</a>
  <script>
    <!--
      !function (d, s, id) {
        var
          js, fjs = d.getElementsByTagName(s)[0], p = /^http:/.test(d.location) ? 'http': 'https';
        if (! d.getElementById(id)) {
          js = d.createElement(s);
          js.id = id;
          js.src = p + '://platform.twitter.com/widgets.js';
          fjs.parentNode.insertBefore(js, fjs);
        }
      }(document,
        'script', 'twitter-wjs');
    -->
  </script>
</div>
```

4. In Oxygen XML Developer, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp transformation scenario (depending on your needs, it may be with or without feedback, or the mobile variant) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `tweet-button.xml` file that you created earlier.
7. Click **Ok**.
8. Run the transformation scenario.

How to Add a Google+ Button in WebHelp Output

See how you can add a Google+ widget into your WebHelp output.

To add a Google+ widget to your WebHelp output, follow these steps:

1. Go to the [Google Developers](#) website.
2. Fill-in the displayed form.
The preview area on the right side displays the code and a preview of the widget.
3. Copy the code snippet displayed in the preview area and paste it into a `div` element inside an XML file called `google-plus-button.xml`.

Make sure that the content of the file is well-formed.

The content of the XML file should look like this:

```
<div id="google-plus">
  <!-- Place this tag in your head or just before your close body tag. -->
  <script src="https://apis.google.com/js/platform.js" async defer></script>

  <!-- Place this tag where you want the +1 button to render. -->
  <div class="g-plusone" data-annotation="inline" data-width="300"></div>
</div>
```

4. In Oxygen XML Developer, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp transformation scenario (depending on your needs, it may be with or without feedback, or the mobile variant) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `google-plus-button.xml` file that you created earlier.
7. Click **Ok**.
8. Run the transformation scenario.

How to Integrate Google Search in WebHelp Output

See how you can integrate a Google Custom Search Engine into WebHelp output.

You can integrate Google Search into your WebHelp output.

To enable your WebHelp system to use Google Search, follow these steps:

1. Go to the Google Custom Search Engine page using your Google account.
2. Press the **Create a custom search engine** button.
3. Follow the on-screen instructions to create a search engine for your site. At the end of this process you should obtain a code snippet.

A Google Search script looks like this:

```
<script>
(function() {
  var cx =
    '000888210889775888983:8mn4x_mf-yg';
  var gcse = document.createElement('script');
  gcse.type = 'text/javascript';
  gcse.async = true;
  gcse.src = (document.location.protocol == 'https:' ?
    'https:' : 'http:') + '//www.google.com/cse/cse.js?cx=' + cx;
  var s = document.getElementsByTagName('script')[0];
  s.parentNode.insertBefore(gcse, s);
})();
</script>
```

4. Save the script into a well-formed HTML file called `googlecse.html`.
5. In Oxygen XML Developer, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
6. Select an existing WebHelp transformation scenario (depending on your needs, it may be with or without feedback, or the mobile variant) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
7. Switch to the **Parameters** tab and edit the `webhelp.google.search.script` parameter to reference the `googlecse.html` file that you created earlier.

8. You can also use the `webhelp.google.search.results` parameter to choose where to display the search results.
 - a) Create an HTML file that contains the Google Custom Search Engine element `gcse:searchresults-only`. It is recommended that you set the `linkTarget` attribute value to `frm` for *frameless* versions of the WebHelp system or to `contentWin` for *frameset* versions of WebHelp. The default value is `_blank` and if you do not specify a value the search results will be loaded in a new window.
 - b) Set the value of the `webhelp.google.search.results` parameter to the location of the file you just created. If this parameter is not specified the following code is used: `<gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>`.
9. Click **Ok**.
10. Run the transformation scenario.

How to Integrate Google Analytics in WebHelp Output

See how you can integrate Google Analytics into WebHelp output.

To enable your WebHelp system to benefit from Google Analytics reports, follow these steps:

1. Create a new Google Analytics account (if you do not already have one) and log on.
2. Choose the Analytics solution that fits the needs of your website.
3. Follow the on-screen instructions to obtain a *Tracking Code* that contains your *Tracking ID*.

A Tracking Code looks like this:

```
<script>
(function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||function(){
(i[r].q=i[r].q||[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
})(window,document,'script','//www.google-analytics.com/analytics.js','ga');

ga('create', 'UA-XXXXXXX-X', 'auto');
ga('send', 'pageview');
</script>
```

4. Save the Tracking Code (obtained in the previous step) in a new HTML file called `googleAnalytics.html`.
5. In Oxygen XML Developer, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
6. Select an existing WebHelp transformation scenario (depending on your needs, it may be with or without feedback, or the mobile variant) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
7. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `googleAnalytics.html` file that you created earlier.
8. Click **Ok**.
9. Run the transformation scenario.

Localizing the Interface of WebHelp Output

You can localize the interface of WebHelp output for DITA or DocBook transformations.

How to Localize the Interface of WebHelp Output (for DITA Map Transformations)

Static labels that are used in the WebHelp output are kept in translation files in the `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization` folder. Translation files have the `strings-lang1-lang2.xml` name format, where *lang1* and *lang2* are ISO language codes. For example, the US English text is kept in the `strings-en-us.xml` file.

To localize the interface of the WebHelp output for DITA map transformations, follow these steps:

1. Look for the `strings-[lang1]-[lang2].xml` file in `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization` directory (for example, the Canadian French file would be: `strings-fr-ca.xml`). If it does not exist, create one starting from the `strings-en-us.xml` file.

2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. Make sure that the new XML file that you created in the previous two steps is listed in the file `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization/strings.xml`. In our example for the Canadian French file, it should be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
4. Edit any of the **DITA Map to WebHelp** transformation scenarios (with or without feedback, or the mobile version) and set the `args.default.language` parameter to the code of the language you want to localize (for example, *fr-ca* for Canadian French).
5. Run the transformation scenario to produce the WebHelp output.

How to Localize the Interface of WebHelp Output (for DocBook Transformations)

Static labels that are used in the WebHelp output are kept in translation files in the `[OXYGEN_DIR]/frameworks/docbook/xsl/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization` folder. Translation files have the *strings-lang1-lang2.xml* name format, where *lang1* and *lang2* are ISO language codes. For example, the US English text is kept in the *strings-en-us.xml* file.

To localize the interface of the WebHelp output for DocBook transformations, follow these steps:

1. Look for the *strings-[lang1]-[lang2].xml* file in `[OXYGEN_DIR]/frameworks/docbook/xsl/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization` directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, create one starting from the *strings-en-us.xml* file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. Make sure that the new XML file that you created in the previous two steps is listed in the file `[OXYGEN_DIR]/frameworks/docbook/xsl/com.oxygenxml.webhelp/oxygen-webhelp/resources/localization/strings.xml`. In our example for the Canadian French file, it should be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
4. Edit any of the DocBook to WebHelp transformation scenarios (with or without feedback, or the mobile version) and set the `l10n.gentext.default.language` parameter to the code of the language you want to localize (for example, *fr-ca* for Canadian French).
5. Run the transformation scenario to produce the WebHelp output.

Using the Oxygen XML WebHelp Plugin to Automate Output

Oxygen XML WebHelp plugin allows you to use a command line interface script to obtain WebHelp output from DITA and DocBook documents. Note that the Oxygen XML WebHelp plugin is a standalone product with its own licensing terms and cannot be used with a Oxygen XML Developer license.

The WebHelp output files created with the Oxygen XML WebHelp plugin are the same as the output files produced when you run DITA or DocBook to WebHelp transformation scenarios from within Oxygen XML Developer.

When an automated process is required due to the amount of output needed, do the following:

1. Install the Oxygen XML WebHelp plugin.
2. Acquire a Oxygen XML WebHelp license from http://www.oxygenxml.com/buy_webhelp.html.
3. Integrate the Oxygen XML WebHelp plugin with *DITA* or *DocBook*.

Oxygen XML WebHelp Plugin for DITA

To transform DITA documents using the Oxygen XML WebHelp plugin, first integrate the plugin with the DITA Open Toolkit. The purpose of the integration is to add the following transformation types to the DITA Open Toolkit:

- **webhelp** - The transformation that produces *WebHelp* output for desktop.
- **webhelp-feedback** - The transformation that produces feedback-enabled *WebHelp* for desktop.
- **webhelp-mobile** - The transformations that produces *WebHelp* output for mobile devices.

Integrating the Oxygen XML WebHelp Plugin with the DITA Open Toolkit

This topic includes the procedure for integrating the Oxygen XML WebHelp plugin with the DITA Open Toolkit.

The requirements of the Oxygen XML WebHelp plugin for the DITA Open Toolkit are as follows:

- Java Virtual Machine 1.6 or later
- DITA Open toolkit 1.6.x, 1.7.x, 1.8, or 2.0 (Full Easy Install, includes Saxon 9.1.0.8 libraries)
- Saxon 9.1.0.8

To integrate the Oxygen XML WebHelp plugin with the DITA Open Toolkit, follow these steps:

1. Download and install a [Java Virtual Machine](#) 1.6 or later.
2. Download and install [DITA Open Toolkit](#) 1.6.x, 1.7.x, 1.8.x, or 2.x.
3. Go to [Oxygen XML WebHelp website](#), download the latest installation kit, and unzip it.
4. Copy the `com.oxygenxml.webhelp` and `com.oxygenxml.highlight` directories inside the `plugins` directory of the DITA OT distribution. The `com.oxygenxml.highlight` directory adds syntax highlight capabilities to your WebHelp output for codeblock sections that contain source code snippets (XML, Java, JavaScript etc.).
5. If you are using DITA-OT version 2.x, the WebHelp plugin contains a `plugin_2.x.xml` which needs to be renamed to `plugin.xml`.
6. In the home directory of the DITA Open Toolkit, run `ant -f integrator.xml`.
7. Go to <http://sourceforge.net/projects/saxon/files/Saxon-B/9.1.0.8/>, download the `processor.saxonb9-1-0-8j.zip` file (contains the Saxon 9.1.0.8), and unzip it to a destination of your choosing.

Licensing the Oxygen XML WebHelp Plugin for DITA OT

This topic explains how to register the license for the Oxygen XML WebHelp plugin for the DITA Open Toolkit.

To register the license for the Oxygen XML WebHelp plugin for the DITA Open Toolkit, follow these steps:

1. Open the `[OXYGEN_DIR]/frameworks/dita/DIT-OT/plugins/com.oxygenxml.webhelp` directory and create a file called `licensekey.txt`.
2. In this file, copy your license key which you purchased for your Oxygen XML WebHelp plugin.
The WebHelp transformation process reads the Oxygen XML Developer license key from this file. In case the file does not exist, or it contains an invalid license, an error message will be displayed.

Upgrading the Oxygen XML WebHelp Plugin for DITA OT

This topic describes the procedure for upgrading a Oxygen XML WebHelp plugin for the DITA Open Toolkit.

To upgrade your Oxygen XML WebHelp plugin for the DITA Open Toolkit, follow these steps:

1. Navigate to the `plugins` directory of your DITA OT distribution and delete the old Oxygen XML WebHelp plugin files (`oxygen_custom.xml`, `oxygen_custom_html.xml`) and directories (`com.oxygenxml.highlight`, `com.oxygenxml.webhelp`).
2. Go to [Oxygen XML WebHelp website](#), download the latest installation kit, and unzip it.
3. Copy the `com.oxygenxml.webhelp` and `com.oxygenxml.highlight` directories inside the `plugins` directory of the DITA OT distribution. The `com.oxygenxml.highlight` directory adds syntax highlight capabilities to your WebHelp output for codeblock sections that contain source code snippets (XML, Java, JavaScript etc.).
4. If you are using DITA-OT version 2.x, the WebHelp plugin contains a `plugin_2.x.xml` which needs to be renamed to `plugin.xml`.
5. In the home directory of the DITA Open Toolkit, run `ant -f integrator.xml`.

Running an External DITA Transformation Using the Oxygen XML WebHelp Plugin

This topic explains how to run an external DITA to WebHelp transformation using the Oxygen XML WebHelp plugin.

To run a DITA to WebHelp (**webhelp**, **webhelp-feedback**, **webhelp-mobile**) transformation using the Oxygen XML WebHelp plugin, use:

- The `dita.bat` script file for Windows based systems.

- The `dita.sh` script file for Unix/Linux based systems.



Note: You can call these files in an automated process or from the command line.



Warning: You can also invoke the DITA OT WebHelp publishing using a startup script but you will lose certain small fixes and patches that Oxygen XML Developer added to the automated DITA OT processing.

The `dita.bat` and the `dita.sh` files are located in the home directory of the Oxygen XML WebHelp Plugin. Before using them to generate a WebHelp system, customize them to match the paths to the JVM, DITA Open Toolkit, and Saxon engine, and also to set the transformation type. To do this, open the script file and edit the following variables and parameters:

- `JVM_INSTALL_DIR` - Specifies the path to the Java Virtual Machine installation directory on your disk.
- `DITA_OT_INSTALL_DIR` - Specifies the path to DITA Open Toolkit installation directory on your disk.



Note: The `dita.bat` and `dita.sh` scripts reference the `dost-patches-DITA-1.8.jar` JAR file containing DITA OT 1.8-specific patches. If you use DITA OT 1.7, update that reference to `dost-patches-DITA-1.7.jar`. If you use DITA OT 2.0, no patches are needed, so just remove the reference.

- `SAXON_9_DIR` - Specifies the path to the directory on your disk where you unzipped the Saxon 9 archive files.



Note: If you are integrating the WebHelp plugin in a DITA OT distribution that comes with the included Saxon libraries, you can point directly to the Saxon libraries in the DITA OT distribution like this:

```
set SAXON_9_DIR=C:\path\to\DITA-OT1.8.5\lib\saxon
```

Otherwise, you can download the Saxon 9.1 JAR files from

<https://sourceforge.net/projects/saxon/files/Saxon-B/9.1.0.8/saxonb9-1-0-8j.zip/download>.

- `TRANSTYPE` - Specifies the type of the transformation you want to apply. You can set it to `webhelp`, `webhelp-feedback` and `webhelp-mobile`.
- `DITA_MAP_BASE_DIR` - Specifies the path to the directory where the input DITA map file is located.
- `DITAMAP_FILE` - Specifies the input DITA map file.
- `DITAVAL_FILE` - Specifies the `.ditaval` input filter that the transformation process applies to the input DITA map file.
- `DITAVAL_DIR` - Specifies the path to the directory where the `.ditaval` file is located.
- `-Doutput.dir` - Specifies the output directory of the transformation.

The optional parameter `-Dargs.filter` can be used to specify a filter file to be used to include, exclude, or flag content.

Additional Oxygen XML WebHelp Plugin Parameters for DITA

You are able to append the following parameters to the command line that runs the transformation:

-Dwebhelp.sitemap.base.url

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the DITA map, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

-Dwebhelp.sitemap.change.frequency

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq` element is not added in `sitemap.xml`. Allowed values: `<empty string>` (default), `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, `never`.

-Dwebhelp.sitemap.priority

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority), such as: 0.3, 0.5, 0.8, etc. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

-Dwebhelp.copyright

Adds a small copyright text that appears at the end of the *Table of Contents* pane.

-Dwebhelp.footer.file

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate `div` or `span` element, and the code for each `script` element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
  <div id="fb-root"/>
  <script>
    <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0]; if (d.getElementById(id))
    return;
    js = d.createElement(s); js.id = id; js.src =
    "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
    fjs.parentNode.insertBefore(js, fjs); }(document, 'script', 'facebook-jssdk')); -->
  </script>
  <div data-share="true" data-show-faces="true" data-action="like" data-layout="standard" class="fb-like"/>
</div>
```

-Dwebhelp.footer.include

Specifies whether or not to include footer in each WebHelp page. Possible values: `yes`, `no`. If set to `no`, no footer is added to the WebHelp pages. If set to `yes` and the `webhelp.footer.file` parameter has a value, then the content of that file is used as footer. If the `webhelp.footer.file` has no value then the default Oxygen XML Developer footer is inserted in each WebHelp page.

-Dwebhelp.logo.image (not available for the WebHelp Mobile transformation)

Specifies a path to an image displayed as a logo in the left side of the output header.

-Dwebhelp.logo.image.target.url (not available for the WebHelp Mobile transformation)

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

-Dwebhelp.search.ranking (not available for the WebHelp Mobile transformation)

If this parameter is set to `false` then the *5-star rating mechanism* is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

-Dwebhelp.search.japanese.dictionary

The file path of the dictionary that will be used by the *Kuromoji* morphological engine that Oxygen XML Developer uses for indexing Japanese content in the WebHelp pages. This indexer does not come bundled with Oxygen XML Developer or the Oxygen XML WebHelp plugin. To use it, you need to download it from <http://mvnrepository.com/artifact/org.apache.lucene/lucene-analyzers-kuromoji/4.0.0> and add it in the `DITA_OT_DIR/plugins/com.oxygenxml.webhelp/lib` directory.

-Dwebhelp.google.search.script

Specifies the location of a well-formed XHTML file containing the Custom Search Engine script from Google. The value must be an URL.

-Dwebhelp.google.search.results

URL value that specifies the location of a well-formed XHTML file containing the Google Custom Search Engine element `gcse:searchresults-only`. You can use all supported attributes for this element. It is recommend to set the `linkTarget` attribute to `frm` for frameless (*iframe*) version of WebHelp or to `contentWin` for the frameset version of WebHelp. The default value for this attribute is `_blank` and the search results will be loaded in a new window. If this parameter is not specified, the following code will be used

```
<gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>
```

-Dwebhelp.product.id (available only for the WebHelp with Feedback transformation)

This parameter specifies a short name for the documentation target, or product (for example, mobile-phone-user-guide, hvac-installation-guide).

 **Note:** You can deploy documentation for multiple products on the same server.

 **Note:** The following characters are not allowed in the value of this parameter: < > / \ ' () { } = ; * % + &.

-Dwebhelp.product.version (available only for the WebHelp with Feedback transformation)

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.

 **Note:** Multiple documentation versions can be deployed on the same server.

 **Note:** The following characters are not allowed in the value of this parameter: < > / \ ' () { } = ; * % + &.

-Dwebhelp.skin.css (not available for the WebHelp Mobile transformation)

Path to a CSS file that sets the style theme in the output WebHelp pages. It can be one of the predefined skin CSS from the OXYGEN_INSTALL_DIR\frameworks\docbook\xsl\com.oxygenxml.webhelp\predefined-skins directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

 **Note:** Note that the fix.external.refs.com.oxygenxml parameter is not supported in Oxygen XML WebHelp plugin.

If you need to further customize the transformation process, you are able to append other DITA-OT parameters as well. Any parameter that you want to append must follow the -D model of the above parameters. For example, to append the args.hdr parameter, use:

```
-Dargs.hdr=[HEADER_FILE_DIR]
```

where [HEADER_FILE_DIR] is the location of the directory that contains the header file.

Database Configuration for DITA WebHelp with Feedback

This topic explains where to find instructions for configuring the database that contains the user comments for a DITA WebHelp with Feedback system.

If you run the **webhelp-feedback** transformation using the WebHelp plugin, you need to configure the database that holds the user comments. The instructions for configuring the database are presented in the `installation.html` file, located at [DITA_MAP_BASE_DIR]/out/[TRANSFORM_TYPE]/oxygen-webhelp/resources. The `installation.html` file is created by the transformation process.

Oxygen XML WebHelp Plugin for DocBook

To transform DocBook documents using the Oxygen XML WebHelp plugin, first integrate the plugin with the DocBook XSL distribution. The purpose of the integration is to add the following transformation types to the DocBook XSL distribution:

- **webhelp** - The transformation that produces *WebHelp* output for desktop.
- **webhelp-feedback** - The transformation that produces feedback-enabled *WebHelp* for desktop.
- **webhelp-mobile** - The transformations that produces *WebHelp* output for mobile devices.

Integrating the Oxygen XML WebHelp Plugin with the DocBook XSL Distribution

This topic includes the procedure for integrating the Oxygen XML WebHelp plugin with the DocBook XSL Distribution.

The WebHelp plugin transformations run as an Ant build script. The requirements are:

- Ant 1.8 or later

- Java Virtual Machine 1.6 later
- DocBook XSL 1.78.1 later
- Saxon 6.5.5
- Saxon 9.1.0.8

To integrate the Oxygen XML WebHelp plugin with the DocBook XSL distribution, follow these steps:

1. Download and install a [Java Virtual Machine](#) 1.6 or later.
2. Download and install [Ant 8.0](#) or later.
3. Download and unzip on your computer the DocBook XSL distribution.
4. Unzip the Oxygen XML WebHelp distribution package in the DocBook XSL installation directory.
The DocBook XSL directory now contains a new subdirectory named `com.oxygenxml.webhelp` and two new files, `oxygen_custom.xsl` and `oxygen_custom_html.xsl`.
5. Download and unzip [saxon6-5-5.zip](#) on your computer.
6. Download and unzip [saxonb9-1-0-8j.zip](#) on your computer.

Licensing the Oxygen XML WebHelp Plugin for DocBook

This topic explains how to register the license for the Oxygen XML WebHelp plugin for the DocBook XSL distribution.

To register the license for the Oxygen XML WebHelp plugin for the DocBook XSL distribution, follow these steps:

1. Create a `.txt` file named `license` in the `com.oxygenxml.webhelp` subdirectory of the DocBook XSL directory.
2. In this file, copy the license key, which you purchased for your Oxygen XML WebHelp plugin.
The WebHelp transformation process reads the Oxygen XML Developer license key from this file. If the file does not exist, or it contains an invalid license, an error message is displayed.

Upgrading the Oxygen XML WebHelp Plugin for DocBook

This topic describes the procedure for upgrading a Oxygen XML WebHelp plugin for DocBook.

To upgrade your Oxygen XML WebHelp plugin for DocBook, follow these steps:

1. Navigate to the `[OXYGEN_DIR]/frameworks/docbook/xsl` directory and delete the old Oxygen XML WebHelp plugin files (`oxygen_custom.xsl`, `oxygen_custom_html.xsl`) and directory (`com.oxygenxml.webhelp`).
2. Go to [Oxygen XML WebHelp website](#), download the latest installation kit, and unzip it.
3. Copy the `com.oxygenxml.webhelp` directory in `[OXYGEN_DIR]/frameworks/docbook/xsl`.

Running an External DocBook Transformation Using the WebHelp Plugin

This topic explains how to run an external DocBook to WebHelp transformation using the Oxygen XML WebHelp plugin.

To run a DocBook to WebHelp (**webhelp**, **webhelp-feedback**, **webhelp-mobile**) transformation using the Oxygen XML WebHelp plugin, use:

- The `docbook.bat` script file for Windows based systems.
- The `docbook.sh` script file for Unix/Linux based systems.



Note: You can call these files in an automated process or from the command line.

The `docbook.bat` and the `docbook.sh` files are located in the home directory of the Oxygen XML WebHelp Plugin. Before using them to generate an WebHelp system, customize them to match the paths to the JVM, DocBook XSL distribution and Saxon engine, and also to set the transformation type. To do this, open a script file and edit the following variables:

- `JVM_INSTALL_DIR` - Specifies the path to the Java Virtual Machine installation directory on your disk.
- `ANT_INSTALL_DIR` - Specifies the path to the installation directory of Ant.
- `SAXON_6_DIR` - Specifies the path to the installation directory of Saxon 6.5.5.
- `SAXON_9_DIR` - Specifies the path to the installation directory of Saxon 9.1.0.8.

- `DOCB00K_XSL_DIR` - Specifies the path to the installation directory of the DocBook XSL distribution.
- `TRANSTYPE` - Specifies the type of the transformation you want to apply. You can set it to `webhelp`, `webhelp-feedback` and `webhelp-mobile`.
- `INPUT_DIR` - Specifies the path to the input directory, containing the input XML file.
- `XML_INPUT_FILE` - Specifies the name of the input XML file.
- `OUTPUT_DIR` - Specifies the path to the output directory where the transformation output is generated.
- `DOCB00K_XSL_DIR_URL` - Specifies the path to the directory of the DocBook XSL distribution in URL format.

Additional Oxygen XML WebHelp Plugin Parameters for DocBook

You are able to append the following parameters to the command line that runs the transformation:

- `-Dwebhelp.copyright` - the copyright note (a text string value) that is added in the footer of the table of contents frame (the left side frame of the WebHelp output).
- `-Dwebhelp.footer.file` - specifies the location of a well-formed XHTML file containing your custom footer for the document body. Corresponds to the `WEBHELP_FOOTER_FILE` XSLT parameter. The fragment must be an well-formed XHTML, with a single root element. As a common practice, place all the content inside a `<div>` element.
- `-Dwebhelp.footer.include` - specifies whether the content of file set in the `-Dwebhelp.footer.file` is used as footer in the WebHelp pages. Its values can be `yes`, or `no`.
- `-Dwebhelp.product.id` - the value of this parameter is a text string, that the **webhelp-feedback** transformation requires. It represents a short name of the documentation target (product). All the user comments that are posted in the WebHelp output pages and are added in the comments database are bound to this product ID.



Note: You can deploy documentation for multiple products on the same server.

- `-Dwebhelp.product.version` - the value of this parameter is a text string, that the **webhelp-feedback** transformation requires. It specifies the documentation version number (for example, 1.0, 2.5, etc.) New user comments are bound to this version.



Note: Multiple documentation versions can be deployed on the same server.

If you need to further customize your transformation, other DocBook XSL parameters can be appended. Any parameter that you want to append must follow the `-D` model of the above parameters. For example, you can append the `html.stylesheet` parameter in the following form:

```
-Dhtml.stylesheet=/path/to/directory/of/stylesheets.css
```

Database Configuration for DocBook WebHelp with Feedback

This topic explains where to find instructions for configuring the database that contains the user comments for a DocBook WebHelp with Feedback system.

If you run the **webhelp-feedback** transformation using the WebHelp plugin, you need to configure the database that holds the user comments. The instructions for configuring the database are presented in the `installation.html` file, located at `[OUTPUT_DIR]/oxygen-webhelp/resources/installation.html`. The `installation.html` file is created by the transformation process.

Localizing the Email Notifications of the WebHelp with Feedback System

The WebHelp with Feedback system uses emails to notify users when comments are posted. These emails are based on templates stored in the WebHelp directory. The default messages are in English, French, German, and Japanese. These messages are copied into the WebHelp system deployment directory during the execution of the corresponding transformation scenario.

Suppose that you want to localize the emails into Dutch (*nl*). Follow these steps:

DocBook to WebHelp with Feedback

1. Create the following directory:

[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\nl

2. Copy all English template files from
[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\en
and paste them into the directory you just created.
3. Edit the HTML files from the
[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\nl
directory and translate the content into Dutch.
4. Start Oxygen XML Developer and edit the *WebHelp with Feedback* transformation scenario.
5. In the **Parameters** tab, look for the `l10n.gentext.default.language` parameter and set its value to the appropriate language code. In our example, use the value `nl` for Dutch.



Note: If you set the parameter to a value such as `LanguageCode - CountryCode` (for example, `en-us`), the transformation scenario will only use the language code

6. Run the transformation scenario to obtain the *WebHelp with Feedback* output.

DITA to WebHelp with Feedback

1. Create the following directory:

`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\nl`

2. Copy all English template files from
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\en`
and paste them into the directory you just created.
3. Edit the HTML files from the
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\php\templates\nl`
directory and translate the content into Dutch.
4. Start Oxygen XML Developer and edit the *WebHelp with Feedback* transformation scenario.
5. In the **Parameters** tab, look for the `args.default.language` parameter and set its value to the appropriate language code. In our example, use the value `nl` for Dutch.



Note: If you set the parameter to a value such as `LanguageCode - CountryCode` (for example, `en-us`), the transformation scenario will only use the language code

6. Run the transformation scenario to obtain the *WebHelp with Feedback* output.

Editing Scoring Values of Tag Elements in Search Results

The WebHelp **Search** feature is enhanced with a rating mechanism that computes scores for every page that matches the search criteria. HTML tag elements are assigned a scoring value and these values are evaluated for the search results. Oxygen XML Developer includes a properties file that defines the scoring values for tag elements and this file can be edited to customize the values according to your needs.

To edit the scoring values of HTML tag element for enhancing WebHelp search results, follow these steps:

1. Edit the scoring properties file for DITA or DocBook WebHelp systems. The properties file includes instructions and examples to help you with your customization.
 - a) For DITA WebHelp systems, edit the following file:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\indexer\scoring.properties`.
 - b) For DocBook WebHelp system, edit the following file:
`[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\indexer\scoring.properties`.

The values that can be edited in the `scoring.properties` file:

```
h1 = 10
h2 = 9
h3 = 8
h4 = 7
h5 = 6
h6 = 5
```



```

b = 5
strong = 5
em = 3
i=3
u=3
div.toc=-10
title=20
div.ignore=ignored
meta_keywords = 20
meta_indexterms = 20
meta_description = 25
shortdesc=25

```

2. Save your changes to the file.
3. Re-run your WebHelp system transformation scenario.

Adding Videos in the Output

Videos can be included and played in all HTML5-based output formats (such as *WebHelp*). For example, to add a YouTube video in the WebHelp output generated from DITA or DocBook documents, follow the procedures below.

Adding Videos to WebHelp Generated from DITA Maps

1. Edit the DITA topic to reference the video using an `object` element, as in the following example:

```

<object outputclass="video">
  <param name="src" value="http://www.youtube.com/watch/v/VideoName"/>
</object>

```

2. Apply a *WebHelp* or *WebHelp with Feedback* transformation scenario to obtain the output.

Adding Videos to WebHelp Generated from DocBook

1. Edit the DocBook document and reference the video using an `mediaobject` element, as in the following example:

```

<mediaobject>
  <videoobject>
    <videodata fileref="http://www.youtube.com/watch/v/VideoName"/>
  </videoobject>
</mediaobject>

```

2. Apply a *WebHelp* or *WebHelp with Feedback* transformation scenario to obtain the output.

Changing the Icons in a WebHelp Table of Contents

You can change the icons that appear in a WebHelp table of contents by assigning new image files in a custom CSS file. By default, the icons for the WebHelp table of contents are defined with the following CSS codes (the first example is the icon that appears for a collapsed menu and the second for an expanded menu):

```

.hasSubMenuClosed{
  background: url('../img/book_closed16.png') no-repeat;
  padding-left: 16px;
  cursor: pointer;
}

```

```

.hasSubMenuOpened{
  background: url('../img/book_opened16.png') no-repeat;
  padding-left: 16px;
  cursor: pointer;
}

```

To assign different icons use the following procedure:

1. Create a custom CSS file that assigns your desired icons to the `.hasSubMenuClosed` and `.hasSubMenuOpened` properties.

```
.hasSubMenuClosed{
  background: url('TOC-my-closed-button.png') no-repeat;
}
```

```
.hasSubMenuOpened{
  background: url('TOC-my-opened-button.png') no-repeat;
}
```

2. It is recommended that you store the image files in the same directory as the default icons.
 - a) For DITA transformations:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\img\.`
 - b) For DocBook transformations:
`[OXYGEN_INSTALL_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\img\.`
3. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.
 - a) For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
 - b) For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
4. Run the transformation scenario.

Customize the Appearance of Selected Items in the Table of Contents

The appearance of selected items in the Table of Contents can be enhanced.

For example, to highlight the background of the selected item, follow these steps:

1. Locate the `toc.css` file in the following directory:
 - a. For DITA transformations:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\css.`
 - b. For DocBook transformations:
`[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\css.`
2. Edit that CSS file, find the `menuItemSelected` class, and change the value of the `background` property.



Note: You can also overwrite the same value from your own custom CSS and then specify the path to your CSS in the transformation scenario (see step 3 in the [Changing the Icons in a WebHelp Table of Contents](#) topic).

Adding a Logo Image in the Title Area

You can customize the title area of your WebHelp output by using a custom CSS.

For example, to add a logo image before the title, you could use the following code:

```
#header h1:before {
  display:inline;
  content:url('oxygen-webhelp/resources/img/myLogoImage.gif');
}
```

In the example above, **myLogoImage.gif** is an image file that you need to store in an images directory from which it will be copied automatically by the WebHelp transformation to the output directory.

It is recommended that you store the image files in the same directory as the default icons.

- For DITA transformations:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\oxygen-webhelp\resources\img\.`
- For DocBook transformations:
`[OXYGEN_INSTALL_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\oxygen-webhelp\resources\img\.`

Then you need to specify the path of your custom CSS in the transformation scenario.

[Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.

- For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.

Removing the *Previous/Next* Links from WebHelp Pages

The **Previous** and **Next** links that are created at the top area of each WebHelp page can be hidden with a CSS code.

To remove these links from WebHelp pages, follow these steps:

1. Add the following CSS code in a custom CSS stylesheet:

```
.navparent, .navprev, .navnext {
    visibility:hidden;
}
```

2. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.

- a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.

3. Run the transformation scenario.

Customizing the Header and Footer

In the transformation scenario, you can use the `args.hdr` and `args.ftr` parameters to point to resources that contain your custom HTML `<div>` blocks. These are included in the header and footer of each generated topic.

As a practical example, to hide the horizontal separator line between the content and footer, follow these steps:

1. Create a custom CSS file that contains the following snippet:

```
.footer_separator {
    display:none;
}
```

2. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.

- a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.

3. Run the transformation scenario.

Adding a *Favicon* in WebHelp Systems

You can add a custom *favicon* to your WebHelp system by simply editing a template in an XSL file. To add a *favicon*, follow these steps:

1. Edit the following XSL file for DITA or DocBook WebHelp systems:
 - a) For DITA WebHelp systems, edit the following file:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\xsl\createMainFiles.xsl`.
 - b) For DocBook WebHelp system, edit the following file:
`[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\xsl\createMainFiles.xsl`.
2. Locate the following template in the XSL file: `<xsl:template name="create-toc-common-file">`.
3. Add two `link` elements inside the `head` element, as in the following example:

```
<link rel="icon" href="/favicon.ico" type="image/x-icon" />
<link rel="shortcut icon" href="/favicon.ico" type="image/x-icon" />
```

4. Save your changes to the file.
5. Re-run your WebHelp system transformation scenario.

Change Numbering Styles for Ordered Lists

Ordered lists (`ol`) are usually numbered in XHTML output using numerals. If you want to change the numbering to alphabetical, follow these steps:

1. Define a custom `outputclass` value and set it as an attribute of the ordered list, as in the following example:

```
<ol outputclass="number-alpha">
  <li>A</li>
  <li>B</li>
  <li>C</li>
</ol>
```

2. Add the following code snippet in a custom CSS file:

```
ol.number-alpha{
  list-style-type: lower-alpha;
}
```

3. [Edit the WebHelp transformation scenario](#) and open the **Parameters** tab.
 - a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
 - b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
4. Run the transformation scenario.

WebHelp Runtime Additional Parameters

A deployed WebHelp system can accept the following GET parameters:

- `log` - The value can be `true` or `false` (default value). When set to `true`, it enables JavaScript debugging.
- `contextId` - The WebHelp JavaScript engine will look up the value of this parameter in the mapping file and load the corresponding HTML help page. For more information, see the [Context-Sensitive WebHelp System](#) topic.



Note: You can use an *anchor* in the `contextId` parameter to jump to a specific section in a document. For example, `contextId=topicID#anchor`.

- `toc.visible` - The value can be `true` (default value) or `false`. When set to `false`, the table of contents will be collapsed when you load the WebHelp page.
- `searchQuery` - You can use this parameter to perform a search operation when WebHelp is loaded. For example, if you want to open WebHelp showing all search results for *growing flowers*, the URL should look like this:
`http://localhost/webhelp/index.html?searchQuery=growing%20flowers`.

Disable Caching in WebHelp Pages

Sometimes, a set of WebHelp pages needs to be updated often in order to deliver the latest version of the documentation to your users. In such cases, a WebHelp page should always be requested from the server upon re-loading it in a Web browser on the client side, rather than re-using an outdated *cached* version in the browser.

To disable caching in WebHelp pages, follow this procedure:

1. Edit the following XSL file for DITA or DocBook WebHelp systems:
 - For DITA WebHelp systems, edit the following file:
`DITA_OT_DIR\plugins\com.oxygenxml.webhelp\xsl\createMainFiles.xsl`.
 - For DocBook WebHelp system, edit the following file:
`[OXYGEN_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp\xsl\createMainFiles.xsl`.

2. Locate the following template in the XSL file: `<xsl:template name="create-toc-common-file">` and add the following code snippet:

```
<meta http-equiv="Pragma" content="no-cache" />
<meta http-equiv="Expires" content="-1" />
```



Note: The code should look like this:

```
<html>
<head>
  <xsl:if test="$withFrames">
    <base target="contentwin"/>
  </xsl:if>
  <meta http-equiv="Content-Type" content="text/html; charset=utf-8"/>

  <!-- Disable caching of WebHelp pages in web browser. -->

  <meta http-equiv="Pragma" content="no-cache" />
  <meta http-equiv="Expires" content="-1" />
....
```

3. Save your changes to the file.
4. Re-run your WebHelp system transformation scenario.

Adding a Button in Code Snippet Areas

This task will get you started on how to add an action (such as a button or link) in code snippet areas that are displayed in WebHelp output. You can then attach your code that does the actual processing for the action.

Follow these steps:

1. Open the `DITA_OT_DIR\plugins\org.dita.xhtml\xsl\xslhtml\dita2htmlImpl.xsl` file.
2. Locate the `<xsl:template match="*[contains(@class, ' topic/pre ')]" mode="pre-fmt">` template to check the default behavior of this template.
3. Open the `DITA_OT_DIR\plugins\com.oxygenxml.webhelp\xsl\dita\desktop\fixup.xsl` file.
4. Create a `<xsl:template match="*[contains(@class, ' topic/pre ')]" mode="pre-fmt">` template to override the default processing.
5. This new template will include your code for creating the button, which will have the action code that does the actual processing attached to it (this can be written in JavaScript, for example).

Example of a *Select all* button:

```
<xsl:template match="*[contains(@class, ' topic/pre ')]" mode="pre-fmt">
  <button onclick="SelectText(element)">Select all</button>
  <script>
    function SelectText(element) {
      var text = document.getElementById(element);
      var range = document.body.createTextRange();
      range.moveToElementText(text);
      range.select();
    }
  </script>
</xsl:template>
```

Flag DITA Content

Flagging content involves defining a set of images that will be used for marking content across your information set.

To flag DITA content, you need to create a filter file that defines properties that will be applied on elements to be flagged. Generally, flagging is supported for block-level elements (such as paragraphs), but not for phrase-level elements within a paragraph. This ensures that the images that will flag the content are easily scanned by the reader, instead of being buried in text.

Follow this procedure:

1. Create a DITA filter file in the directory where you want to add the file. Give the file a descriptive name, such as `audience-flag-build.ditaval`.

2. Define the property of the element you want to be flagged. For example, if you want to flag elements that have the **audience** attribute set to **programmer**, the content of the DITAVAL file should look like in the following example:

```
<?xml version="1.0" encoding="UTF-8"?>
<val>
  <prop att="audience" val="programmer" action="flag" img="D:\resource\delta.gif" alt="sample alt text"/>
</val>
```

Note that for an element to be flagged, at least one attribute-value pair needs to have a property declared in the DITAVAL file.

3. Specify the DITAVAL file in the **Filters** tab of the transformation scenario.
4. Run the transformation scenario.

Chapter

9

Querying Documents

Topics:

- [Running XPath Expressions](#)
- [Working with XQuery](#)

This chapter shows how to query XML documents in Oxygen XML Developer with XPath expressions and the XQuery language.

Running XPath Expressions

This section covers the views, toolbars, and dialog boxes in Oxygen XML Developer that are dedicated to running XPath expressions.

What is XPath

XPath is a language for addressing specific parts of an XML document. XPath, like the Document Object Model (DOM), models an XML document as a tree of nodes. An XPath expression is a mechanism for navigating through and selecting nodes from the XML document. An XPath expression is, in a way, analogous to an SQL query used to select records from a database.

There are different types of nodes, including element nodes, attribute nodes and text nodes. XPath defines a way to compute a string-value for each type of node.

XPath defines a library of standard functions for working with strings, numbers and boolean expressions.

- `child::*` - Selects all children of the root node.
- `./name` - Selects all elements having the name "name", descendants of the current node.
- `/catalog/cd[price>10.80]` - Selects all the `cd` elements that have a price element with a value larger than 10.80.

To find out more about XPath, go to <http://www.w3.org/TR/xpath>.

Oxygen XML Developer XPath Toolbar

XPath is a query language for selecting nodes from an XML document. To use XPath expressions effectively, you need a good understanding of [the XPath Core Function Library](#).

The XPath Toolbar

Oxygen XML Developer provides an XPath toolbar to let you query XML documents fast and easy using XPath expressions.



Figure 208: The XPath Toolbar

You can choose the XPath version from the drop-down menu available in the left side of the toolbar. Available options include XPath 1.0, XPath 2.0, XPath 2.0 SA, XPath 3.0, XPath 3.0 SA.



Note: XPath 2.0 SA and XPath 3.0 SA use the Saxon EE [XML Schema version](#) option.



Note: The results returned by XPath 2.0 SA and XPath 3.0 SA have a location limited to the line number of the start element (there are no column information and no end specified).



Note: Oxygen XML Developer uses Saxon to execute XPath 3.0 expressions, but implements a part of the 3.0 functions. When using a function that is not implemented, Oxygen XML Developer can return a compilation error.

XPath scope menu - Oxygen XML Developer allows you to define a scope on which the XPath operation will be executed. You can choose where the XPath expression will be executed:

-  **Current file** - Current selected file only.
-  **Project** - All the files in the project.
-  **Selected project resources** - The files selected in the project.

-  **All opened files** - All files opened in the application.
-  **Opened archive** - Files open in the [Archive Browser](#) view.
-  **Working sets** - The selected working sets.

At the bottom of the scope menu there are available the following scope configuration actions:

-  **Configure XPath working sets** - Allows you to configure and manage collections of files and folders, encapsulated in logical containers called *working sets*.
-  **XPath file filter** - You can filter the files from the selected scope on which the XPath expression will be executed. By default the XPath expression will be executed only on XML files, but you can also define a set of patterns that will filter out files from the current scope. If you select the **Include archive** option, the XPath expression will be also executed on the files in any archive (including EPUB and DocX) found at the current scope.

The following actions are available in the **Settings** menu:

-  **Update on caret move** - When enabled and you navigate through a document, the XPath expression corresponding to the XML node at the current cursor position is displayed.
-  **Evaluate as you type** - When you select this option, the XPath expression you are composing is evaluated in real time.

 **Note:** The  **Evaluate as you type** option and the automatic validation are disabled when you edit [huge documents](#) or when the scope is other than **Current file**.

-  **Options** - Opens the Preferences page of the currently selected processing engine.

 **Note:** During the execution of an XPath expression, the XPath toolbar displays a stop button . Press this button to stop the XPath execution.

When you type expressions longer than 60 characters, a dialog box opens that offers you the possibility to switch to the [XPath builder](#) view.

The XPath/XQuery Builder View

The **XPath/XQuery Builder** view allows you to compose complex XPath and XQuery expressions and execute them over the currently edited XML document. For XPath 2.0 / 3.0, or XQuery expressions, you are able to use the `doc()` function to specify the source file over which the expressions are executed. When you connect to a database, the expressions are executed over that database. If you are using the **XPath/XQuery Builder** view and the current file is an XSLT document, Oxygen XML Developer executes the expressions over the XML document in the associated scenario.

To open the **XPath/XQuery Builder** view, go to **Window > Show View > XPath/XQuery Builder**.

The upper part of the view contains the following actions:

- A drop-down menu that allows you to select the type of the expression you want to execute. You can choose between:
 - XPath 1.0 (Xerces-driven)
 - XPath 2.0, XPath 2.0SA, XPath 3.0, XPath 3.0SA, XQuery 1.0, XQuery 3.0, Saxon-HE XQuery, Saxon-PE XQuery, or Saxon-EE XQuery (all of them are Saxon-driven)
 - Custom connection to XML databases that can execute XQuery expressions

 **Note:** The results returned by XPath 2.0 SA and XPath 3.0 SA have a location limited to the line number of the start element (there are no column information and no end specified).

 **Note:** Oxygen XML Developer uses Saxon to execute XPath 3.0 expressions. Since Saxon implements a part of the 3.0 functions, when using a function that is not implemented, Oxygen XML Developer returns a compilation error.

-  **Execute XPath** button - Press this button to start the execution of the XPath or XQuery expression you are editing. The result of the execution is displayed in the [Results view](#) in a separate tab
- **Favorites** button - Allows you to save certain expressions that you can later reuse. To add an expression as favorite, press the star button and enter a name under which the expression is saved. The star turns yellow to confirm that the expression was saved. Expand the drop-down menu next to the star button to see all your favorites. Oxygen XML Developer automatically groups favorites in folders named after the method of execution
-  **History** drop-down menu - Keeps a list of the last 15 executed XPath or XQuery expressions. Use the  **Clear history** action from the bottom of the list to remove them
-  **Settings** drop-down menu - Contains the following three options:
 -  **Update on caret move** - When enabled and you navigate through a document, the XPath expression corresponding to the XML node at the current cursor position is displayed.
 -  **Evaluate as you type** - When you select this option, the XPath expression you are composing is evaluated in real time.



Note: The  **Evaluate as you type** option and the automatic validation are disabled when you edit [huge documents](#) or when the scope is other than **Current file**.

-  **Options** - Opens the Preferences page of the currently selected processing engine.
- **XPath scope** menu - Oxygen XML Developer allows you to define a scope on which the XPath operation will be executed. You can choose where the XPath expression will be executed:
 -  **Current file** - Current selected file only.
 -  **Project** - All the files in the project.
 -  **Selected project resources** - The files selected in the project.
 -  **All opened files** - All files opened in the application.
 -  **Opened archive** - Files open in the [Archive Browser](#) view.
 -  **Working sets** - The selected working sets.

At the bottom of the scope menu there are available the following scope configuration actions:

-  **Configure XPath working sets** - Allows you to configure and manage collections of files and folders, encapsulated in logical containers called *working sets*.
-  **XPath file filter** - You can filter the files from the selected scope on which the XPath expression will be executed. By default the XPath expression will be executed only on XML files, but you can also define a set of patterns that will filter out files from the current scope. If you select the **Include archive** option, the XPath expression will be also executed on the files in any archive (including EPUB and DocX) found at the current scope.

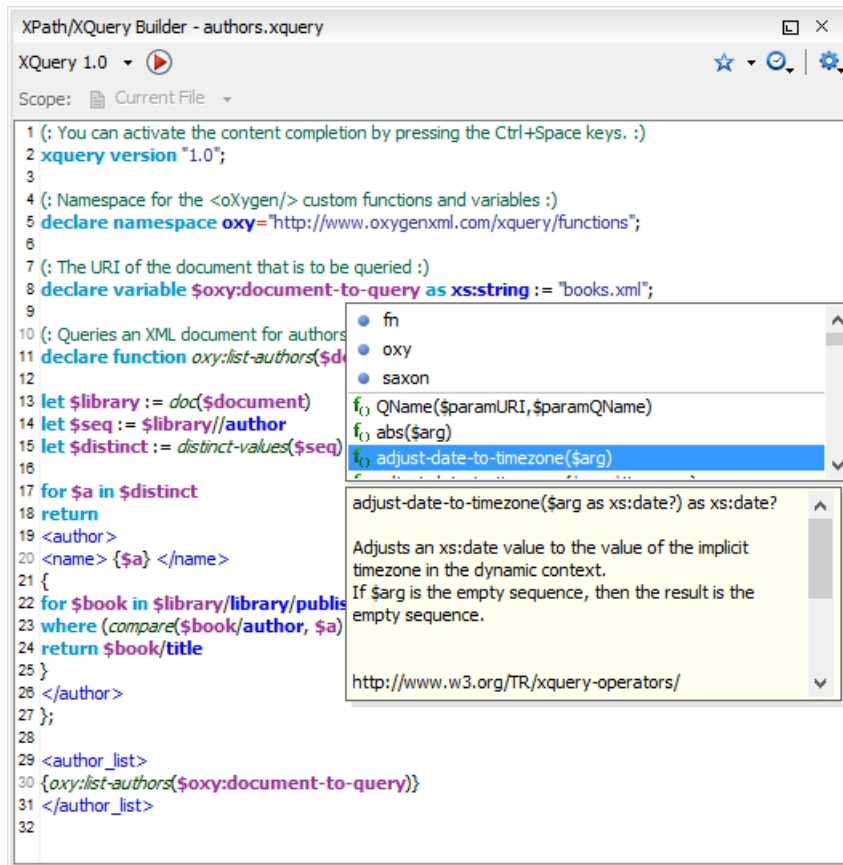


Figure 209: The XPath/XQuery Builder View

While you edit an XPath or XQuery expression, Oxygen XML Developer assists you with the following features:

- **Content Completion Assistant** - It offers context-dependent proposals and takes into account the cursor position in the document you are editing. The set of functions proposed by the **Content Completion Assistant** also depends on the engine version. Select the engine version from the drop-down menu available in the toolbar.
- **Syntax Highlight** - Allows you to identify the components of an expression. To customize the colors of the components of the expression, *open the Preferences dialog box* and go to **Editor > Syntax Highlight**.
- **Automatic validation of the expression as you type.**



Note: When you type invalid syntax a red serrated line underlines the invalid fragments.

- **Function signature and documentation balloon**, when the cursor is located inside a function.

The *usual edit actions* **Cut**, **Copy**, **Paste**, **Select All**, **Undo**, **Redo** are available in the contextual menu of the top editable part of the view.

XPath Expression Results

When you run an XPath expression, Oxygen XML Developer displays the results of its execution in the **Results view**.

This view contains the following columns:

- **Description** - Holds the result that Oxygen XML Developer displays when you run an XPath expression.
- **Resource** - Holds the name of the document on which you run the XPath expression.
- **Location** - Holds the location of the result in the document.

To arrange the results depending on a column, click its header. To group the results by their resource, or by their system id, right click the header of any column in the results view and select **Group by "Resource"** or **Group by "System"**

ID". If no information regarding location is available, Oxygen XML Developer displays **Not available** in the **Location** column. Oxygen XML Developer displays the results in a valid XPath expression format.

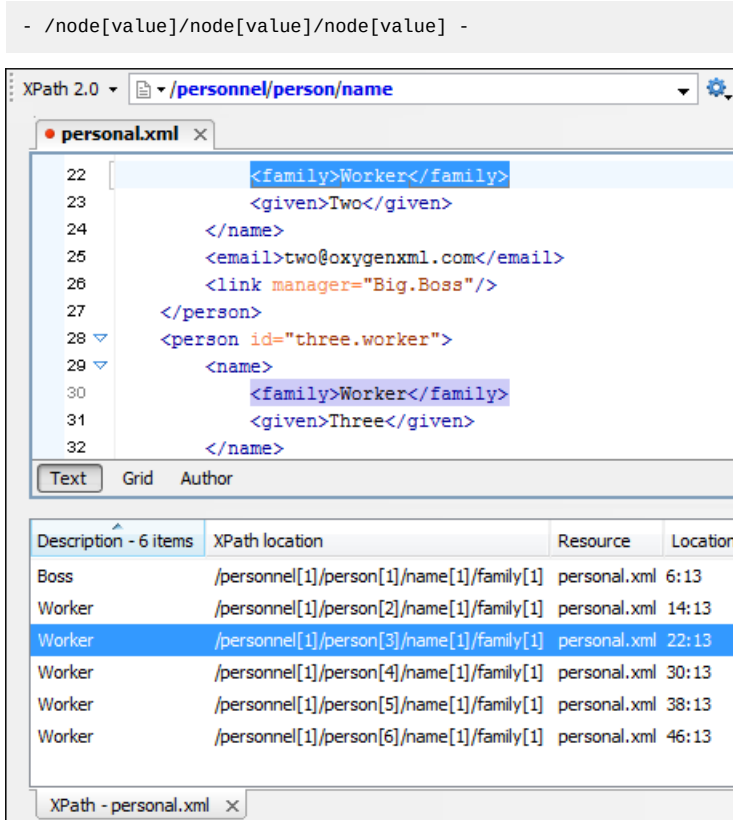


Figure 210: XPath results highlighted in editor panel with character precision

The following snippets are taken from a DocBook book based on the DocBook XML DTD. The book contains a number of chapters. To return all the chapter nodes of the book, enter `//chapter` in the XPath expression field and press **(Enter)**. This action returns all the `chapter` nodes of the DocBook book in the **Results View**. Click a record in the **Results View** to locate and highlight its corresponding chapter element and all its children nodes in the document you are editing.

To find all `example` nodes contained in the `sect2` nodes of a DocBook XML document, use the following XPath expression: `//chapter/sect1/sect2/example`. Oxygen XML Developer adds a result in the **Results View** for each `example` node found in any `sect2` node.

For example, if the result of the above XPath expression is:

```
- /chapter[1]/sect1[3]/sect2[7]/example[1]
```

it means that in the edited file the `example` node is located in the first chapter, third section level one, seventh section level 2.

Catalogs

The evaluation of the XPath expression tries to resolve the locations of documents referenced in the expression through the *XML catalogs*. These catalogs are *configured in the Preferences* pages and *the current XInclude preferences*.

As an example, consider the evaluation of the `collection(URIofCollection)` function (XPath 2.0). To resolve the references from the files returned by the `collection()` function with an XML

catalog, specify the class name of the XML catalog enabled parser for parsing these collection files. The class name is `ro.sync.xml.parser.CatalogEnabledXMLReader`. Specify it as it follows:

```
let $docs := collection(iri-to-uri(
  "file:///D:/temp/test/XQuery-catalog/mydocsdire?recurse=yes;select=*.xml;
  parser=ro.sync.xml.parser.CatalogEnabledXMLReader"))
```

XPath Prefix Mapping

To define default mappings between prefixes (that you can use in the XPath toolbar) and namespace URIs [go to !\[\]\(e2376d476d06eb31946dc01a69a4403a_img.jpg\) XPath Options preferences panel](#) and enter the mappings in the **Default prefix-namespace mappings** table. The same preferences panel allows you to configure the default namespace used in XPath 2.0 expressions.



Important: If you define a default namespace, Oxygen XML Developer binds this namespace to the first free prefix from the list: `default`, `default1`, `default2`, and so on. For example, if you define the default namespace `xmlns="something"` and the prefix `default` is not associated with another namespace, you can match tags without prefix in an XPath expression typed in the XPath toolbar by using the prefix `default`. To find all the `level` elements when you define a default namespace in the root element, use this expression: `//default:level` in the XPath toolbar.

Working with XQuery

This section explains how to edit and run XQuery queries in Oxygen XML Developer.

What is XQuery

XQuery is the query language for XML and is officially defined by [a W3C Recommendation document](#). The many benefits of XQuery include:

- XQuery allows you to work in one common model no matter what type of data you're working with: relational, XML, or object data.
- XQuery is ideal for queries that must represent results as XML, to query XML stored inside or outside the database, and to span relational and XML sources.
- XQuery allows you to create many different types of XML representations of the same data.
- XQuery allows you to query both relational sources and XML sources, and create one XML result.

Syntax Highlight and Content Completion

To [create an XQuery document](#), select **File > New (Ctrl (Meta on Mac OS)+N)** and when the **New** document wizard appears, select XQuery entry.

Oxygen XML Developer provides syntax highlight for keywords and all known XQuery functions and operators. A content completion assistant is also available and can be activated with the **(Ctrl (Meta on Mac OS)+Space)** shortcut. The functions and operators are presented together with a description of the parameters and functionality. For some supported database engines like eXist and Berkeley DB, the content completion list offers the specific XQuery functions implemented by that engine. This feature is available when the XQuery file has an associated transformation scenario which uses one of these database engines or the XQuery validation engine is set to one of them via a validation scenario or in the [XQuery Preferences](#) page.

The extension functions built in the Saxon product are available on content completion if one of the following conditions are true:

- The edited file has a transformation scenario associated that uses as transformation engine Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE.
- The edited file has a validation scenario associated that use as validation engine Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE.

- The validation engine specified in [Preferences](#) is Saxon 9.6.0.7 PE or Saxon 9.6.0.7 EE.

If the Saxon namespace (<http://saxon.sf.net>) is mapped to a prefix the functions are presented using this prefix, the default prefix for the Saxon namespace (**saxon**) is used otherwise.

If you want to use a function from a namespace mapped to a prefix, just type that prefix and the content completion displays all the XQuery functions from that namespace. When the default namespace is mapped to a prefix the XQuery functions from this namespace offered by content completion are also prefixed, only the function name being used otherwise.

The content completion popup window presents all the variables and functions from both the edited XQuery file and its imports.

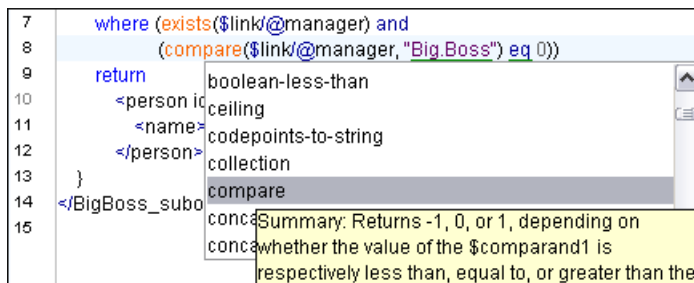


Figure 211: XQuery Content Completion

XQuery Outline View

The XQuery document structure is presented in the XQuery **Outline** view. The outline tree presents the list of all the components (namespaces, imports, variables, and functions) from both the edited XQuery file and its imports. It allows quick access to components and can be opened from **Window > Show View > Outline**.

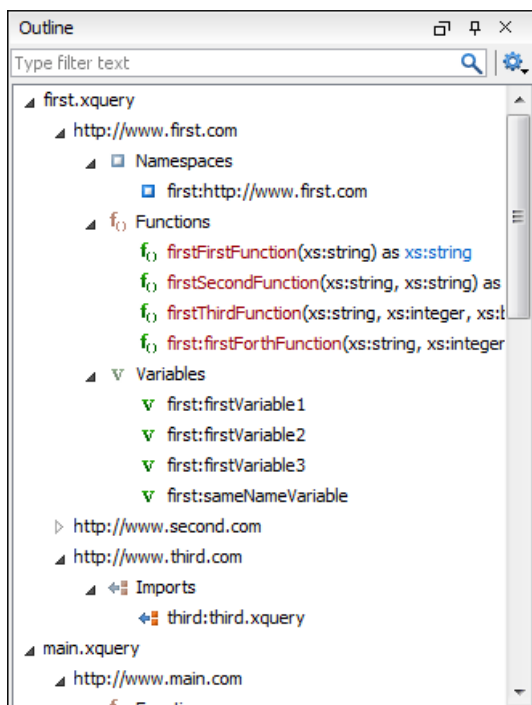


Figure 212: XQuery Outline View

The following actions are available in the  **Settings** menu on the **Outline** view toolbar:

Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes performed in the XQuery editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

Sort

Allows you to alphabetically sort the XQuery components.

Show all components

Displays all collected components starting from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

Allows you to group the components by location, namespace, and type. When grouping by namespace, the main XQuery module namespace is presented first in the **Outline** view.

If you know the component name, you can search it in the **Outline** view by typing its name in the filter text field from the top of the view or directly on the tree structure. When you type the component name in the filter text field you can switch to the tree structure using the arrow keys of the keyboard, **(Enter)**, **(Tab)**, **(Shift-Tab)**. To switch from tree structure to the filter text field, you can use **(Tab)**, **(Shift-Tab)**.



Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match (like *textToFind*).

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

The XQuery Input View

You are able to drag and drop a node in the editing area to insert XQuery expressions quickly.

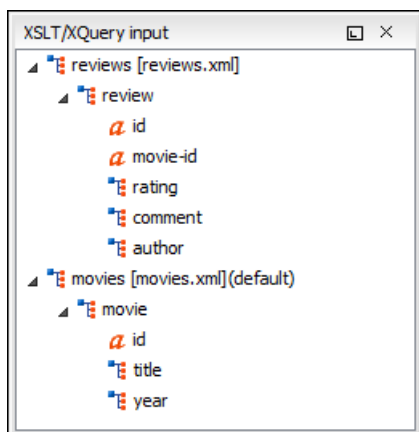


Figure 213: XQuery Input Vview

Create FLWOR by Drag and Drop

For the following XML documents:

```
<movies>
  <movie id="1">
    <title>The Green Mile</title>
    <year>1999</year>
  </movie>
  <movie id="2">
    <title>Taxi Driver</title>
    <year>1976</year>
  </movie>
</movies>
```

and

```
<reviews>
  <review id="100" movie-id="1">
    <rating>5</rating>
    <comment>It is made after a great Stephen King book.
  </comment>
    <author>Paul</author>
  </review>
  <review id="101" movie-id="1">
    <rating>3</rating>
    <comment>Tom Hanks does a really nice acting.</comment>
    <author>Beatrice</author>
  </review>
  <review id="104" movie-id="2">
    <rating>4</rating>
    <comment>Robert De Niro is my favorite actor.</comment>
    <author>Maria</author>
  </review>
</reviews>
```

and the following XQuery:

```
let $review := doc("reviews.xml")
for $movie in doc("movies.xml")/movies/movie
let $movie-id := $movie/@id
return
  <movie id="{ $movie/@id }">
    { $movie/title }
    { $movie/year }
    <maxRating>
      {
      }
    </maxRating>
  </movie>
```

if you drag the **review** element and drop it between the braces, a pop-up menu will be displayed.

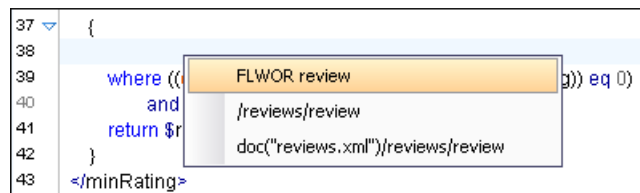


Figure 214: XQuery Input Drag and Drop Pop-up Menu

Select **FLWOR rating** and the result document will be:


```

37 {
38   for $review in doc("reviews.xml")/reviews/review
39   return
40   where ((compare($rewrating/text(), string($minRating)) eq 0)
41         and ($rev/@movie-id = $movie/@id))
42   return $rew/author
43 }
44 </minRating>

```

Figure 215: XQuery Input Drag and Drop Result

XQuery Validation

With Oxygen XML Developer, you can validate your documents before using them in your transformation scenarios. The validation uses the Saxon 9.6.0.7 PE processor or the 9.6.0.7 EE, IBM DB2, eXist, Berkeley DB XML, Documentum xDb (X-Hive/DB) 10, or MarkLogic (version 5 or newer) if you installed them. Any other XQuery processor that offers an [XQJ API implementation](#) can also be used. This is in conformance with [the XQuery Working Draft](#). The processor is used in two cases: validation of the expression and execution. Although the execution implies a validation, it is faster to check the expression syntactically, without executing it. The errors that occurred in the document are presented in the messages view at the bottom of editor window, with a full description message. As with all error messages, if you click an entry, the line where the error appeared is highlighted.

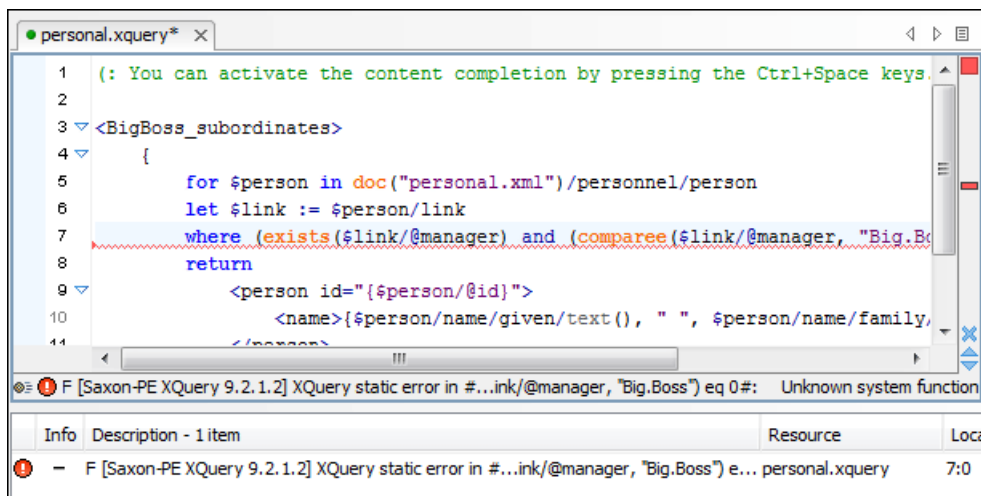


Figure 216: XQuery Validation



Note: If you choose a processor that does not support XQuery validation, Oxygen XML Developer displays a warning when trying to validate.

The **Validation options** button, available in the **Document > Validate** menu, allows quick access to the [XQuery options](#) in the Oxygen XML Developer preferences.

When you open an XQuery document from a connection that supports validation (for example MarkLogic, or eXist), by default Oxygen XML Developer uses this connection for validation. If you open an XQuery file using a MarkLogic connection, the validation better resolves imports.

Transforming XML Documents Using XQuery

XQueries are similar with the XSL stylesheets, both being capable of transforming an XML input into another format. You specify the input URL when you [define the transformation scenario](#). The result can be saved and opened in the associated application. You can even run a [FO processor](#) on the output of an XQuery. The transformation scenarios may be shared between many XQuery files, are [exported](#) together with the XSLT scenarios and can be managed in [the Configure Transformation Scenario dialog box](#), or in [the Scenarios view](#). The transformation can be performed on the

XML document specified in the **XML URL** field, or, if this field is empty, the documents referenced from the query expression. The parameters of XQuery transforms must be set in [the Parameters dialog box](#). Parameters that are in a namespace must be specified using the qualified name, for example a `param` parameter in the `http://www.oxygenxml.com/ns` namespace must be set with the name `{http://www.oxygenxml.com/ns}param`.

The transformation uses one of the Saxon 9.6.0.7 HE, Saxon 9.6.0.7 PE, Saxon 9.6.0.7 EE processors, a database connection (details can be found in the [Working with Databases](#) chapter - in the [XQuery transformation](#) section) or any XQuery processor that provides an XQJ API implementation.

The Saxon 9.6.0.7 EE processor supports also XQuery 3.0 transformations.

XQJ Transformers

This section describes the necessary procedures before running an XQJ transformation.

How to Configure an XQJ Data Source

Any transformer that offers an XQJ API implementation can be used when validating XQuery or transforming XML documents. An example of an XQuery engine that implements the XQJ API is [Zorba](#).

1. If your XQJ Implementation is native, make sure the directory containing the native libraries of the engine is added to your system environment variables: to `PATH` - on Windows, to `LD_LIBRARY_PATH` - on Linux, or to `DYLD_LIBRARY_PATH` - on OS X. Restart Oxygen XML Developer after configuring the environment variables.
2. [Open the Preferences dialog box](#) and go to **Data Sources**.
3. Click the **New** button in the **Data Sources** panel.
4. Enter a unique name for the data source.
5. Select **XQuery API for Java(XQJ)** in the **Type** combo box.
6. Press the **Add** button to add XQJ API-specific files.

You can manage the driver files using the **Add**, **Remove**, **Detect**, and **Stop** buttons.

Oxygen XML Developer detects any implementation of `javax.xml.xquery.XQDataSource` and presents it in **Driver class** field.

7. Select the most suited driver in the **Driver class** combo box.
8. Click the **OK** button to finish the data source configuration.

How to Configure an XQJ Connection

The steps for configuring an XQJ connection are the following:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Connections** panel.
3. Enter a unique name for this connection.
4. Select one of the previously configured [XQJ data sources](#) in the **Data Source** combo box.
5. Fill-in the connection details.

The properties presented in the connection details table are automatically detected depending on the selected data source.

6. Click the **OK** button.

Display Result in Sequence View

The result of an XQuery executed on a database can be very large and sometimes only a part of the full result is needed. To avoid the long time necessary for fetching the full result, select the **Present as a sequence** option in the **Output** tab of the **Edit scenario** dialog box. This option fetches only the first chunk of the result. Clicking the **More results available** label that is displayed at the bottom of the **Sequence** view fetches the next chunk of results.

The size of a chunk can be [set with the option Size limit of Sequence view](#). The  **XQuery options** button from the **More results available** label provides a quick access to this option by opening [the XQuery panel of the Preferences dialog box](#) where the option can be modified.

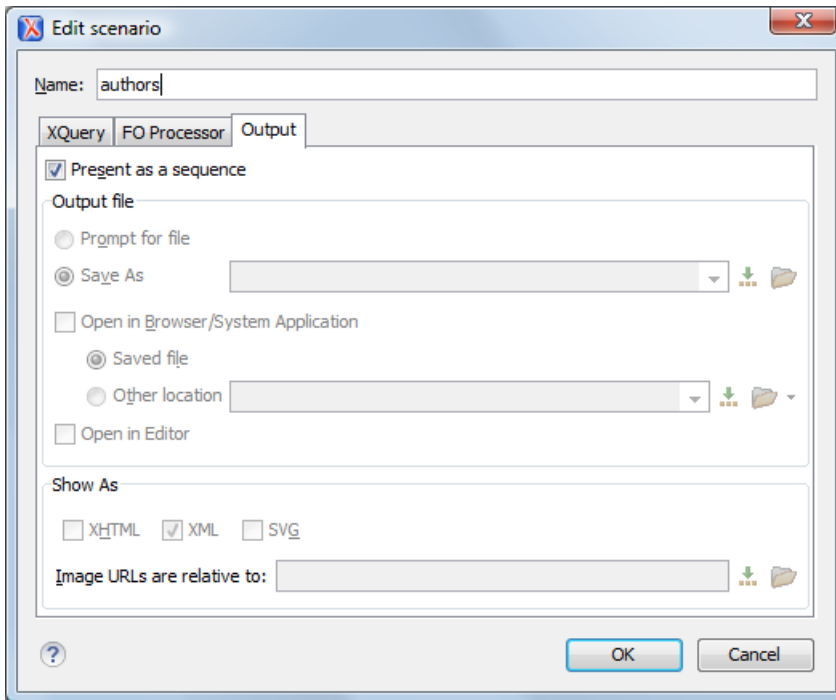


Figure 217: The XQuery transformation result displayed in Sequence view

A chunk of the XQuery transformation result is displayed in the **Sequence** view.

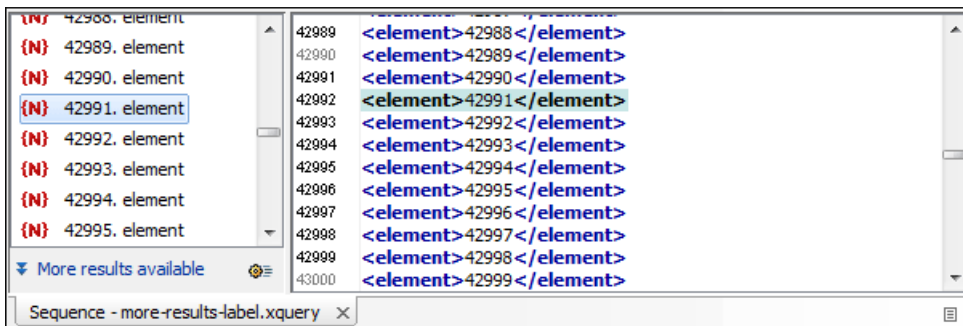


Figure 218: The XQuery transformation result displayed in Sequence view

Advanced Saxon HE/PE/EE XQuery Transformation Options

The XQuery transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options as [the values set in the user preferences](#) but they are configured as a specific set of transformation options for each transformation scenario.

The advanced options for Saxon 9.6.0.7 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

- **Recoverable errors ("-warnings")**- Allows you to choose how dynamic errors are handled. The following options can be selected:
 - **recover silently ("silent")** - Continues processing without reporting the error.
 - **recover with warnings ("recover")** - Issues a warning but continues processing.
 - **signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.
- **Strip whitespaces ("-strip")** - Can have one of the following values:
 - **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.

- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.
- **Optimization level ("-opt")** - This option allows optimization to be suppressed when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.
- **Use linked tree model ("-tree:linked")** - This option activates the linked tree model.
- **Enable XQuery 3.0 support ("-qversion:(1.0|3.0)")** - If checked, Saxon runs the XQuery transformation with the XQuery 3.0 support (this option is enabled by default).
- **Initializer class** - Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the `net.sf.saxon.lib.Initializer` interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from the command line, but the same code may be invoked to perform initialization when running user application code.



Important: The *advanced Saxon-HE/PE/EE options configured in a transformation scenario* override the Saxon-HE/PE/EE options defined globally.

The following advanced options are specific for Saxon 9.6.0.7 Professional Edition (PE) and Enterprise Edition (EE) only:

- **Use a configuration file ("-config")** - Sets a Saxon 9 configuration file that is used for XQuery transformation and validation
- **Allow calls on extension functions ("-ext")** - If checked, calls on external functions are allowed. Checking this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

The advanced options that are specific for Saxon 9.6.0.7 Enterprise Edition (EE) are as follows:

- **Validation of the source file ("-val")** - Requests schema-based validation of the source file and of any files read using the `document()` or similar functions. It can have the following values:
 - **Schema validation ("strict")** - This mode requires an XML Schema and enables parsing the source documents with strict schema-validation enabled.
 - **Lax schema validation ("lax")** - If an XML Schema is provided, this mode enables parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
 - **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.
- **Validation errors in the results tree treated as warnings ("-outval")** - Normally, if validation of result documents is requested, a validation error is fatal. Enabling this option causes such validation failures to be treated as warnings.
- **Generate bytecode ("--generateByteCode:(on|off)")** - If you enable this option, Saxon-EE attempts to generate Java bytecode for evaluation of parts of a query or stylesheet that are amenable to such an action. For further details regarding this option, go to <http://www.saxonica.com/documentation9.5/index.html#!javadoc>.
- **Enable XQuery update ("-update:(on|off)")** - This option controls whether or not XQuery update syntax is accepted. The default value is off.
- **Backup files updated by XQuery ("-backup:(on|off)")** - If checked, backup versions for any XML files updated with XQuery Update are generated. This option is available when the **Enable XQuery update** option is enabled.

Updating XML Documents using XQuery

Using the bundled Saxon 9.6.0.7 EE XQuery processor Oxygen XML Developer offers support for XQuery Update 1.0. The XQuery Update Facility provides expressions that can be used to make persistent changes to instances of the XQuery

1.0 and XPath 2.0 Data Model. Thus, besides querying XML documents, you can modify them using the various insert/delete/modify/create methods available in the [XQuery Update 1.0](#) standard.

Choose Saxon 9.6.0.7 EE as a transformer in the scenario associated with the XQuery files containing update statements and Oxygen XML Developer will notify you if the update was successful.

Using XQuery Update to modify a tag name in an XML file

```
rename node doc("books.xml")//publisher[1]//book[1] as "firstBook"
```

Chapter 10

Debugging XSLT Stylesheets and XQuery Documents

Topics:

- [*XSLT/XQuery Debugging Overview*](#)
- [*Layout*](#)
- [*Working with the XSLT / XQuery Debugger*](#)
- [*Debugging Java Extensions*](#)
- [*Supported Processors for XSLT / XQuery Debugging*](#)

This chapter explains the user interface and how to use the debugger with XSLT and XQuery transformations.

XSLT/XQuery Debugging Overview

The **XSLT Debugger** and **XQuery Debugger** perspectives enable you to test and debug XSLT 1.0 / 2.0 / 3.0 stylesheets and XQuery 1.0 / 3.0 documents including complex XPath 2.0 / 3.0 expressions. The interface presents simultaneous views of the source XML document, the XSLT/XQuery document and the result document. As you go step by step through the XSLT/XQuery document the corresponding output is generated step by step, and the corresponding position in the XML file is highlighted. At the same time, special views provide various types of debugging information and events useful to understand the transformation process.

The following set of features allow you to test and solve XSLT/XQuery problems:

- Support for XSLT 1.0 stylesheets (using Saxon 6.5.5 and Xalan XSLT engines), XSLT 2.0 / 3.0 stylesheets and XPath 2.0 / 3.0 expressions that are included in the stylesheets (using Saxon 9.6.0.7 XSLT engine) and XQuery 1.0 / 3.0 (using Saxon 9.6.0.7 XQuery engine).
- Stepping capabilities: step in, step over, step out, run, run to cursor, run to end, pause, stop.
- Output to source mapping between every line of output and the instruction element / source context that generated it.
- Breakpoints on both source and XSLT/XQuery documents.
- Call stack on both source and XSLT/XQuery documents.
- Trace history on both source and XSLT/XQuery documents.
- Support for XPath expression evaluation during debugging.
- Step into imported/included stylesheets as well as included source entities.
- Available templates and hits count.
- Variables view.
- Dynamic output generation.

Layout

The XML and XSL files are displayed in *Text mode*. The *Grid mode* is available only in *the Editor perspective*.

The debugger perspective contains four sections:

- **Source document view (XML)** - Displays and allows the editing of XML files (documents).
- **XSLT/XQuery document view (XSLT/XQuery)** - Displays and allows the editing of XSL files(stylesheets) or XQuery documents.
- **Output document view** - Displays the output that results from inputting a document (XML) and a stylesheet (XSL) or XQuery document in the transformer. The transformation result is written dynamically while the transformation is processed. There are two types of output views: a text view (with XML syntax highlight) and an XHTML view. For large outputs, the XHTML view can be disabled (see *Debugger Settings*).
- **Control view** - The control view is used to configure and control the debugging operations. It also provides a set of *Information views* types. This pane has two sections:
 - *Control toolbar*
 - *Information views*

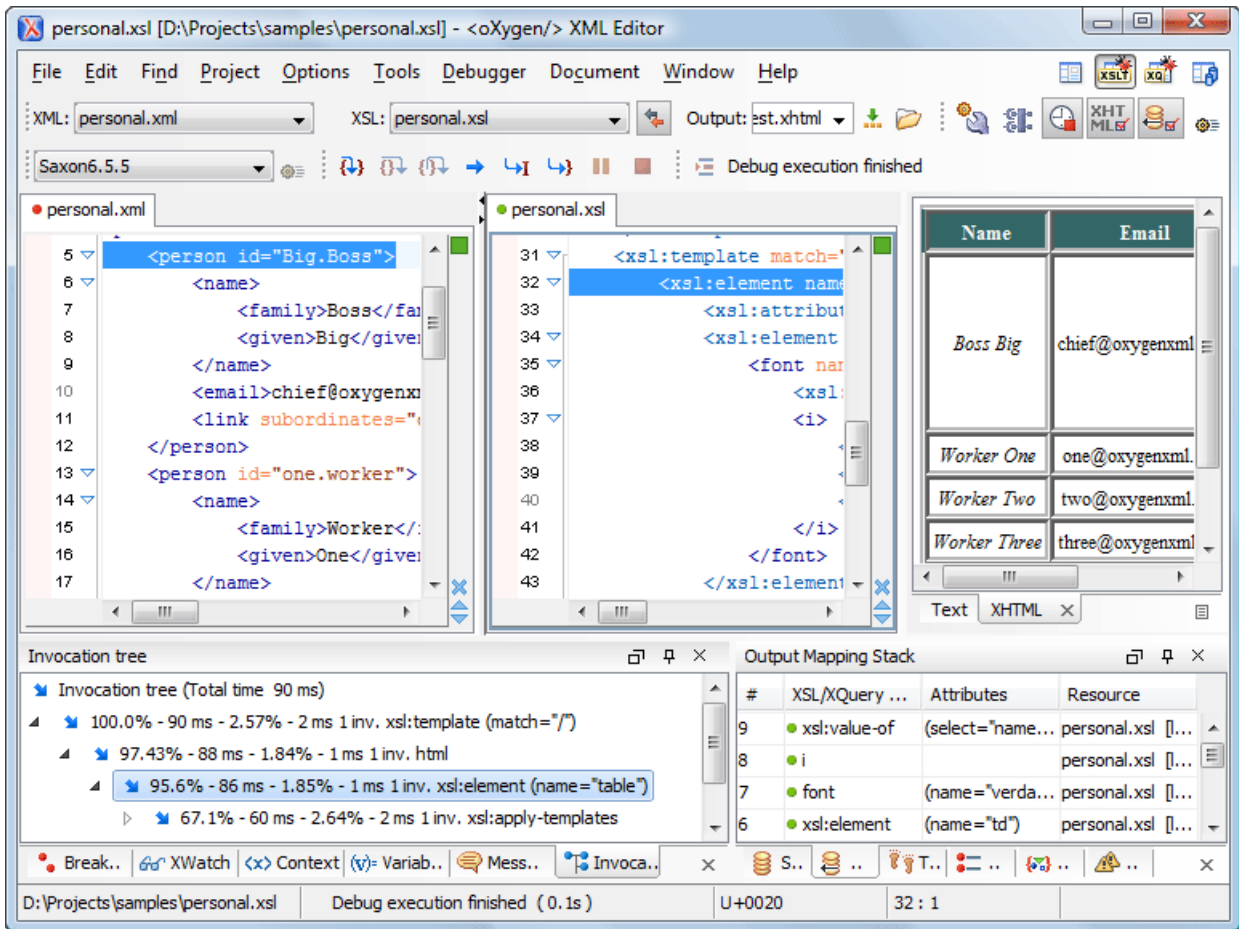


Figure 219: Debugger Mode Interface

XML documents and XSL stylesheets or XQuery documents that were opened in the Editor perspective are automatically sorted into the first two panes. When multiple files of each type are opened, the individual documents and stylesheets are separated using the familiar tab management system of the Editor perspective. Selecting a tab brings the document or stylesheet into focus and enables editing without the need to go back to the Editor perspective.

When editing in the Editor perspective the editor toolbar is displayed. In Debugger mode this toolbar is not available, however the functions are still accessible from [the Document menu](#) and [the editors contextual menus](#).

Bookmarks are replaced in the Debugger perspective by breakpoints.

During debugging, the current execution node is highlighted in both document (XML) and XSLT/XQuery views.

Control Toolbar

The **Control** toolbar contains all the actions that you need to configure and control the debugging process. The following actions are described as they appear in the toolbar from left to right.




Figure 220: Control Toolbar

XML source selector

The current selection represents the source document used as input by the transformation engine. The selection list contains all opened files (XML files being emphasized). This option allows you to use other file types also as source

documents. In an XQuery debugging session this selection field can be set to the default value **NONE**, because usually XQuery documents do not require an input source.

XSL / XQuery selector

The current selection represents the stylesheet or XQuery document to be used by the transformation engine. The selection list contains all opened files (XSLT / XQuery files being emphasized).



Link with editor

When enabled, the XML and XSLT/XQuery selectors display the names of the files opened in the central editor panels. This button is disabled by default.

Output selector

The selection represents the output file specified in the associated transformation scenario.



XSLT / XQuery parameters

XSLT / XQuery parameters to be used by the transformation.



Libraries

Add and remove the Java classes and jars used as XSLT extensions.



Turn on profiling

Enables / Disables current transformation profiling.



Enable XHTML output

Enables the rendering of the output in the XHTML output view during the transformation process. For performance issues, disable XHTML output when working with very large files. Note that only XHTML conformant documents can be rendered by this view. In order to view the output result of other formats, such as HTML, save the **Text output** area to a file and use an external browser for viewing.

When starting a debug session from the editor perspective using the **Debug Scenario** action, the state of this toolbar button reflects the state of the **Show as XHTML** output option from the scenario.



Turn on/off output to source mapping

Enables or disables the output to source mapping between every line of output and the instruction element / source context that generated it.



Debugger preferences

Quick link to [Debugger preferences page](#).

XSLT / XQuery engine selector

Lists the [processors available for debugging XSLT and XQuery transformations](#).



XSLT / XQuery engine advanced options

Advanced options available for Saxon 9.6.0.7.



Step into

Starts the debugging process and runs until the next instruction is encountered.



Step over

Run until the current instruction and its sub-instructions are over. Usually this will advance to the next sibling instruction.



Figure 221: Step over

Step out

Run until the parent of the current instruction is over. Usually this will advance to the next sibling of the parent instruction.

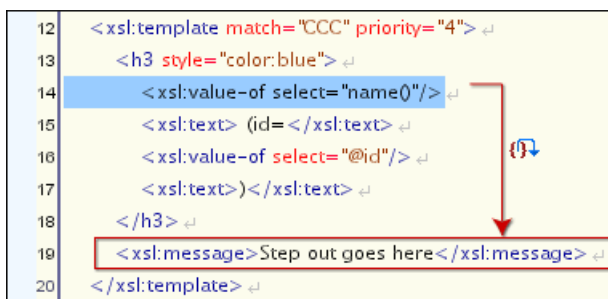


Figure 222: Step out

Run

Starts the debugging process. The execution of the process is paused when a *breakpoint* is encountered or the transformation ends.

Run to cursor

Starts the debugging process and runs until one of the following conditions occur: the line of cursor is reached, a valid breakpoint is reached or the execution ends.

Run to end

Runs the transformation until the end, without taking into account enabled breakpoints, if any.

Pause

Request to pause the current transformation as soon as possible.

Stop

Request to stop the current transformation without completing its execution.

Show current execution nodes

Reveals the current debugger context showing both the current instruction and the current node in the XML source. Possible displayed states:

- Entering (→) or leaving (←) an XML execution node.
- Entering (→) or leaving (←) an XSL execution node.
- Entering (→) or leaving (←) an XPath execution node.



Note: When you set a MarkLogic server as a processor, the **Show current execution nodes** button is named **Refresh current session context from server**. Click this button to refresh the information in all the views.



Note: For some of the XSLT processors (Saxon-HE/PE/EE) the debugger could be configured to step into the XPath expressions affecting the behavior of the following debugger actions: **Step into**, **Step over** or **Step Out**.

Debugging Information Views

The information views at the bottom of the editor is comprised of two panes that are used to display various types of information used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This enables the developer to obtain a clear view of the transformation progress. Using the debug controls developers can easily isolate parts of stylesheet therefore they may be understood and modified. The information types include the following:

Left side information views

- [Context node view](#)
- [XWatch view](#)
- [Breakpoints view](#)
- [Messages view](#) (XSLT only)
- [Variables view](#)
- [Invocation Tree view](#)

Right side information views

- [Stack view](#)
- [Output Mapping Stack view](#)
- [Trace view](#)
- [Templates view](#) (XSLT only)
- [Nodes/Values Set view](#)
- [Hotspots view](#)

Context Node View

The context node is valid only for XSLT debugging sessions and is a source node corresponding to the XSL expression that is evaluated. It is also called the context of execution. The context node implicitly changes as the processor hits various steps (at the point where XPath expressions are evaluated). This node has the same value as evaluating '.' (dot) XPath expression in [XWatch view](#). The value of the context node is presented as a tree in the view.

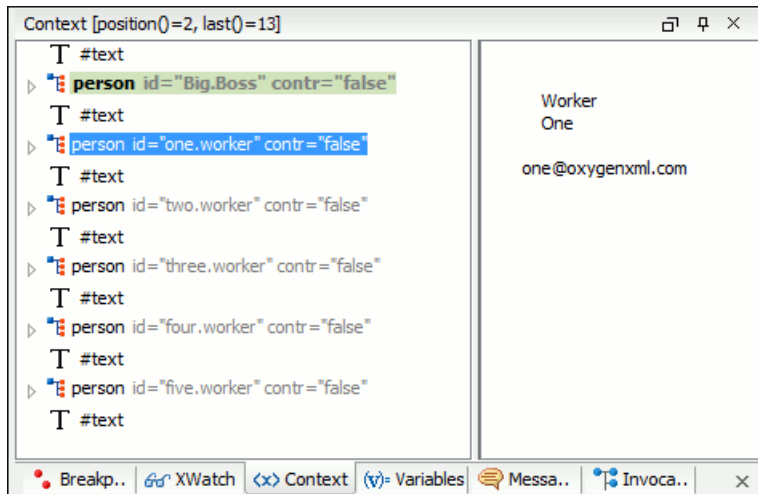


Figure 223: The Context node view

The context node is presented in a tree-like fashion. Nodes from a defined namespace bound to a prefix are displayed using the qualified name. If the namespace is not bound to a prefix, the namespace URI is presented before the node name. The value of the selected attribute or node is displayed in the right side panel. The **Context** view also presents the current mode of the XSLT processor if this mode differs from the default one.

The title bar displays the current element index and the number of elements that compose the current context (this information is not available if you choose Xalan or Saxon 6 as processing engine).

XPath Watch (XWatch) View

The **XWatch** view shows XPath expressions evaluated during the debugging process. Expressions are evaluated dynamically as the processor changes its source context.

When you type an XPath expression in the **Expression** column, Oxygen XML Developer supports you with syntax highlight and *content completion assistance*.

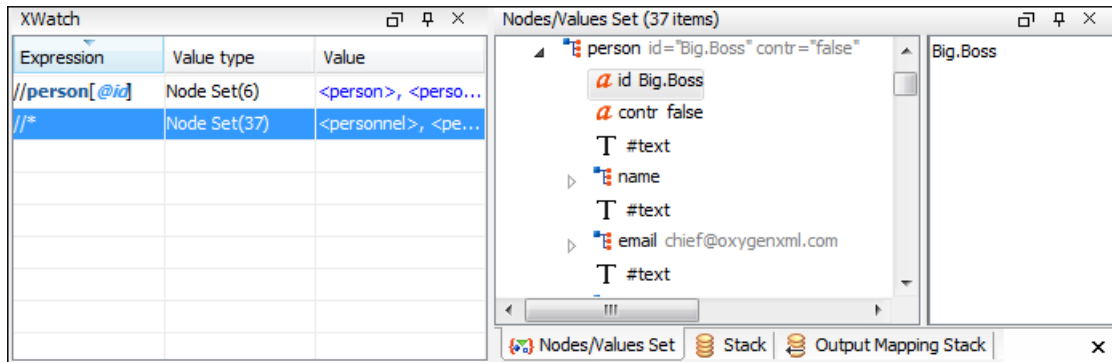


Figure 224: The XPath watch view

Table 5: XWatch columns

Column	Description
Expression	XPath expression to be evaluated (XPath 1.0 or 2.0 / 3.0 compliant).
Value	Result of XPath expression evaluation. Value has a type (see the possible values in the section Variables View on page 503). For <i>Node Set</i> results, the number of nodes in the set is shown in parenthesis.



Important: Remarks about working with the **XWatch** view:

- Expressions that reference variable names are not evaluated.
- The expression list is not deleted at the end of the transformation (it is preserved between debugging sessions).
- To insert a new expression, click the first empty line of the **Expression** column and start typing. As an alternative, right click and select the **Add** action. Press **(Enter)** on the cell to add and evaluate.
- To delete an expression, click its **Expression** column and delete its content. As an alternative, right click and select the **Remove** action. Press **(Enter)** on the cell to commit changes.
- If the expression result type is a *Node Set*, click it (**Value** column) and its value is displayed in the [Nodes/Values Set view](#).
- The **Copy**, **Add**, **Remove** and **Remove All** actions are available in every row's contextual menu.

Breakpoints View

This view lists all breakpoints that are set on opened documents. Once you [insert a breakpoint](#) it is automatically added in this list. Breakpoints can be set in XSLT/XQuery documents and XML documents in XSLT/XQuery debugging sessions. A breakpoint can have an associated break condition that represents an XPath expression evaluated in the current debugger context. In order to be processed, their evaluation result should be a boolean value. A breakpoint with an associated condition only stops the execution of the Debugger if the breakpoint condition is evaluated as **true**.

Enabled	Resource	Condition
☒	(conditional only)	count(preceding::person)=2
☒	personal.xml [line:16]	local-name()="person"
☒	personal.xml [line:22]	position() >= Last evaluated as: false
☒	personal.xml [line:34]	(no condition)
☒	personal.xml [line:44]	(no condition)
☒	personal.xml [line:50]	(no condition)

Breakpoints XWatch Context Variables Messages Invocation tree

Figure 225: The Breakpoints View

The **Breakpoints** view contains the following columns:

- **Enabled** - If checked, the current condition is evaluated and taken into account.
- **Resource** - Resource file and number of the line where the breakpoint is set. The Entire path of resource file is available as tooltip.
- **Condition** - XSLT/XQuery expression to be evaluated during debugging. The expression will be evaluated at every debug step.

Clicking a record highlights the breakpoint line in the document.



Note: The breakpoints list is not deleted at the end of a transformation (it is preserved between debugging sessions).

The following actions are available in the contextual menu of the table:

Go to

Moves the cursor to the source of the breakpoint.

Enable

Enables the breakpoint.

Disable

Disables the breakpoint. A disabled breakpoint will not be evaluated by the Debugger.

Add

Allows you to add a new breakpoint and breakpoint condition.

Edit

Allows you to edit an existing breakpoint.

Remove

Deletes the selected breakpoint.

Enable all

Enables all breakpoints.

Disable all

Disables all breakpoints.

Remove all

Removes all breakpoints.

Messages View

`xsl:message` instructions are one way to signal special situations encountered during transformation as well as a raw way of doing the debugging. This view is available only for XSLT debugging sessions and shows all `xsl:message` calls executed by the XSLT processor during transformation.

Message	Terminate	Resource
Message 1	no	personal.xml [line: 8]
Message 2	no	personal.xml [line: 12]
Message 3	no	personal.xml [line: 29]

Figure 226: The Messages View**Table 6: Messages columns**

Column	Description
Message	Message content.
Terminate	Signals if processor terminates the transformation or not once it encounters the message (yes/no respectively).
Resource	Resource file where <code>xsl:message</code> instruction is defined and the message line number. The complete path of the resource is available as tooltip.

The following actions are available in the contextual menu:

Go to

Highlight the XSL fragment that generated the message.

Copy

Copies to clipboard message details (system ID, severity info, description, start location, terminate state).

**Important:** Remarks

- Clicking a record from the table highlights the `xsl:message` declaration line.
- Message table values can be sorted by clicking the corresponding column header. Clicking the column header switches the sorting order between: ascending, descending, no sort.

Stack View

This view shows the current execution stack of both source and XSLT/XQuery nodes. During transformation two stacks are managed: one of source nodes being processed and the other for XSLT/XQuery nodes being processed. Oxygen XML Developer shows both node types into one common stack. The source (XML) nodes are preceded by a red color icon while XSLT/XQuery nodes are preceded by a green color icon. The advantage of this approach is that you can always see the source scope on which a XSLT/XQuery instruction is executed (the last red color node on the stack). The stack is oriented upside down.

#	XML/XSL/XQuery Node	Attributes	Resource
4	xsl:message		personal.xml
3	xsl:element	(name="table")	personal.xml
2	html		personal.xml
1	xsl:template	(match="/")	personal.xml
0	#document		personal.xml

Figure 227: The Stack View

The contextual menu contains one action: **Go to**, which moves the selection in the editor panel to the line containing the XSLT element that is displayed on the selected line from the view.

Table 7: Stack columns

Column	Description
#	Order number, represents the depth of the node (0 is the stack base).
XML/XSLT/XQuery Node	Node from source or stylesheet document currently being processed. One particular stack node is the document root, noted as #document .
Attributes	Attributes of the node (a list of <code>id="value"</code> pairs).
Resource	Resource file where the node is located. The entire path is available as tooltip.

**Important:** Remarks:

- Clicking a record from the stack highlights that node's location inside resource.
- Using Saxon, the stylesheet elements are qualified with XSL proxy, while using Xalan you only see their names. (example: `xsl:template` using Saxon and `template` using Xalan).
- Only the Saxon processor shows element attributes.
- The Xalan processor shows also the built-in rules.

Output Mapping Stack View

The **Output Mapping Stack** view displays [context data](#) and presents the XSLT templates/XQuery elements that generated specific areas of the output.

#	XML/XSL/XQuery Node	Attributes	Resource
8	xsl:value-of	(select="."/link/@manager")	personal.xml
7	font	(color="black") (name="verdana") (size="3")	personal.xml
6	xsl:element	(name="td")	personal.xml
5	xsl:element	(name="tr")	personal.xml
4	xsl:template	(match="//person")	personal.xml
3	xsl:apply-templates		personal.xml
2	xsl:element	(name="table")	personal.xml
1	html		personal.xml
0	xsl:template	(match="/")	personal.xml

Figure 228: The Output Mapping Stack view

The **Go to** action of the contextual menu takes you in the editor panel at the line containing the XSLT element displayed in the **Output Mapping Stack** view.

Table 8: Output Mapping Stack columns

Column	Description
#	The order number in the stack of XSLT templates/XQuery elements. Number 0 corresponds to the bottom of the stack in the status of the XSLT/XQuery processor. The highest number corresponds to the top of the stack.
XSL/XQuery Node	The name of an XSLT template/XQuery element that participated in the generation of the selected output area.
Attributes	The attributes of the XSLT template/XQuery node.

Column	Description
Resource	The name of the file containing the XSLT template/XQuery element.



Important: Remarks:

- Clicking a record highlights that XSLT template definition/XQuery element inside the resource (XSLT stylesheet file/XQuery file).
- Saxon only shows the applied XSLT templates having at least one hit from the processor. Xalan shows all defined XSLT templates, with or without hits.
- The table can be sorted by clicking the corresponding column header. When clicking a column header the sorting order switches between: ascending, descending, no sort.
- Xalan shows also the built-in XSLT rules.

Trace History View

Usually the XSLT/XQuery processors signal the following events during transformation:

- - Entering a source (XML) node.
- - Leaving a source (XML) node.
- - Entering a XSLT/XQuery node.
- - Leaving a XSLT/XQuery node.

The trace history catches all these events, so you can see how the process evolved. The red icon lines denote source nodes while the green icon lines denote XSLT/XQuery nodes.

It is possible to save the element trace in a structured XML document. The action is available on the contextual menu of the view. In this way you have the possibility to compare the trace results from different debug sessions.

Depth	XML/XSL/XQuery Node	Attributes	Resource
0	#document		personal.xml
1	xsl:template	(match="/")	personal.xsl
2	html		personal.xsl
3	xsl:element	(name="table")	personal.xsl
4	xsl:message		personal.xsl
4	xsl:message		personal.xsl
4	xsl:message		personal.xsl

Figure 229: The Trace History View

The contextual menu contains the following actions:

Go to

Moves the selection in the editor panel to the line containing the XSLT element or XML element that is displayed on the selected line from the view;

Export to XML

Saves the entire trace list into XML format.

Table 9: Trace History columns

Column	Description
Depth	Shows you how deep the node is nested in the XML or stylesheet structure. The bigger the number, the more nested the node is. A depth 0 node is the document root.
XML/XSLT/XQuery Node	Represents the node from the processed source or stylesheet document. One particular node is the document root, noted as <code>#document</code> . Every node is preceded by an arrow that represents what action was performed on it (entering or leaving the node).
Attributes	Attributes of the node (a list of <code>id="value"</code> pairs).
Resource	Resource file where the node is located. The complete path of the resource file is provided as tooltip.

**Important:** Remarks:

- Clicking a record highlights that node's location inside the resource.
- Only the Saxon processor shows the element attributes.
- The Xalan processor shows also the built-in rules.

Templates View

The `xsl:template` is the basic element for stylesheets transformation. This view is only available during XSLT debugging sessions and shows all `xsl:template` instructions used by the transformation. Being able to see the number of *hits* for each of the templates allows you to get an idea of the stylesheet coverage by template rules with respect to the input source.

Match	Hits	Priority	Mode	Name	Resource
//person	6				personal.xml
/	1				personal.xml

Figure 230: The Templates view

The contextual menu contains one action: **Go to**, which moves the selection in the editor panel to the line containing the XSLT template that is displayed on the selected line from the view.

Table 10: Templates columns

Column	Description
Match	The <code>match</code> attribute of the <code>xsl:template</code> .
Hits	The number of hits for the <code>xsl:template</code> . Shows how many times the XSLT processor used this particular template.
Priority	The template priority as established by XSLT processor.
Mode	The <code>mode</code> attribute of the <code>xsl:template</code> .
Name	The <code>name</code> attribute of the <code>xsl:template</code> .

Column	Description
Resource	The resource file where the template is located. The complete path of the resource file is available as tooltip.



Important: Remarks:

- Clicking a record highlights that template definition inside the resource.
- Saxon only shows the applied templates having at least one hit from the processor. Xalan shows all defined templates, with or without hits.
- Template table values can be sorted by clicking the corresponding column header. When clicking a column header the sorting order switches between: ascending, descending, no sort.
- Xalan shows also the built-in rules.

Nodes/Values Set View

This view is always used in relation with [The Variables view](#) and [the XWatch view](#)1. It shows an XSLT node set value in a tree form. The node set view is updated as response to the following events:

- You click a variable having a node set value in one of the above 2 views.
- You click a tree fragment in one of the above 2 views.
- You click an XPath expression evaluated to a node set in one of the above 2 views.

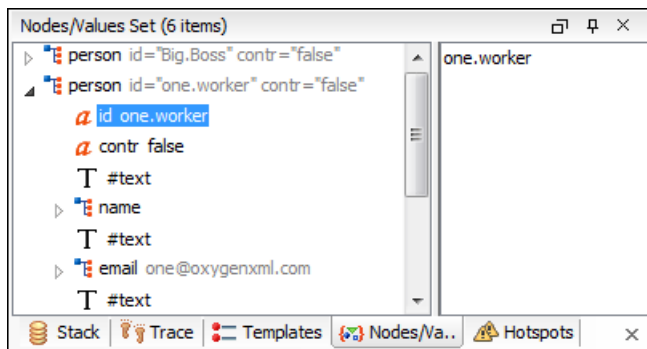


Figure 231: The Node Set view

The nodes / values set is presented in a tree-like fashion. The total number of items is presented in the title bar. Nodes from a defined namespace bound to a prefix are displayed using the qualified name. If the namespace is not bound to a prefix the namespace URI is presented before the node name. The value of the selected attribute or node is displayed in the right side panel.



Important: Remarks:

- For longer values in the right side panel, the interface displays it with an ellipsis (...) at the end. A more detailed value is available as a tooltip when hovering over it.
- Clicking a record highlights the location of that node in the source or stylesheet view.

Variables View

Variables and parameters play an important role during an XSLT/XQuery transformation. Oxygen XML Developer uses the following icons to differentiate variables and parameters:

- **V** - Global variable.
- **{V}** - Local variable.
- **P** - Global parameter.
- **{P}** - Local parameter.

The following value types are available:

- **Boolean**
- **String**
- **Date** - XSLT 2.0 / 3.0 only.
- **Number**
- **Set**
- **Object**
- **Fragment** - Tree fragment.
- **Any**
- **Undefined** - The value was not yet set, or it is not accessible.

**Note:**

When Saxon 6.5 is used, if the value is unavailable, then the following message is displayed in the **Value** field: "The variable value is unavailable".

When Saxon 9 is used:

- If the variable is not used, the **Value** field displays "The variable is declared but never used".
- If the variable value cannot be evaluated, the **Value** field displays "The variable value is unavailable".

- **Document**
- **Element**
- **Attribute**
- **ProcessingInstruction**
- **Comment**
- **Text**
- **Namespace**
- **Evaluating** - Value under evaluation.
- **Not Known** - Unknown types.

	Name	Value type	Value
{V}	val	String	
{P}	rowval	String	1,2
V	trans	String	
P	level	String	1,2
P	image-path	String	Images/

Figure 232: The Variables View

Table 11: Variables columns

Column	Description
Name	Name of variable / parameter.
Value type	Type of variable/parameter.
Value	Current value of variable / parameter.

The value of a variable (the **Value** column) can be copied to the clipboard for pasting it to other editor area with the action **Copy value** from the contextual menu of the table from the view. This is useful in case of long and complex values which are not easy to remember by looking at them once.

**Important:** Remarks:

- Local variables and parameters are the first entries presented in the table.
- Clicking a record highlights the variable definition line.
- Variable values could differ depending on the transformation engine used or stylesheet version set.
- If the value of the variable is a node set or a tree fragment, clicking it causes the [Node Set view](#) to be shown with the corresponding set of values.
- Variable table values can be sorted by clicking the corresponding column header. Clicking the column header switches between the orders: ascending, descending, no sort.

Multiple Output Documents in XSLT 2.0 and XSLT 3.0

For XSLT 2.0 and XSLT 3.0 stylesheets that store the output in more than one file by using the `xsl:result-document` instruction the content of the file created in this way is displayed dynamically while the transformation is running in an output view. There is one view for each `xsl:result-document` instruction so that the output of different instructions is not mixed but is presented in different views.

Working with the XSLT / XQuery Debugger

This section describes how to work with the debugger in the most common use cases.

To watch our video demonstration about how you can use the **XSLT Debugger**, go to http://oxygenxml.com/demo/XSLT_Debugger.html.

Steps in a Typical Debug Process

To debug a stylesheet or XQuery document follow the procedure:

1. [Open the source XML document](#) and [the XSLT/XQuery document](#).
2. If you are in the Editor perspective switch to the XSLT Debugger perspective or XQuery Debugger perspective with one of the actions (here explained for XSLT):
 - Menu **Window** > **Open perspective** > **XSLT Debugger** or the toolbar button **XSLT Debugger**
 - Menu **Document** > **XML Document** > **Debug Scenario** or the toolbar button **Debug Scenario**. This action initializes the Debugger perspective with the parameters of the transformation scenario. Any modification applied to the scenario parameters (the transformer engine, the XSLT parameters, the transformer extensions, etc.) will be saved back in the scenario when exiting from the Debugger perspective.
3. Select the source XML document in the XML source selector of [the Control toolbar](#). In the case of XQuery debugging, if your XQuery document has no implicit source, set the source selector value to **NONE**.
4. Select the XSLT/XQuery document in the XSLT/XQuery selector of [the Control toolbar](#).
5. Set XSLT/XQuery parameters from the button available on [the Control toolbar](#).
6. [Set one or more breakpoints](#).
7. Step through the stylesheet using the buttons available on [the Control toolbar](#):
 - **Step into**
 - **Step over**
 - **Step out**
 - **Run**
 - **Run to cursor**
 - **Run to end**
 - **Pause**
 - **Stop**

- Examine the information in the Information views to find the bug in the transformation process.

You may find [the procedure for determining the XSLT template/XQuery element that generated an output section](#) useful for fixing bugs in the transformation.


Using Breakpoints

The Oxygen XML Developer XSLT/XQuery Debugger allows you to interrupt XSLT/XQuery processing to gather information about variables and processor execution at particular points. To ensure breakpoints are persistent between work sessions, they are saved at project level. You can set a maximum of 100 breakpoints per project.

Inserting Breakpoints

To insert a breakpoint, follow these steps:

- Click the line where you want to insert the breakpoint in the XML source document or the XSLT/XQuery document. You can only set breakpoints on the XML source in XSLT or XQuery debugging sessions. Breakpoints are automatically created on the ending line of a start tag, even if you click a different line.
- Click the vertical stripe on the left side of the editor panel or select  **Create Breakpoint (Shift+F7)** from the **Edit > Breakpoints** menu.

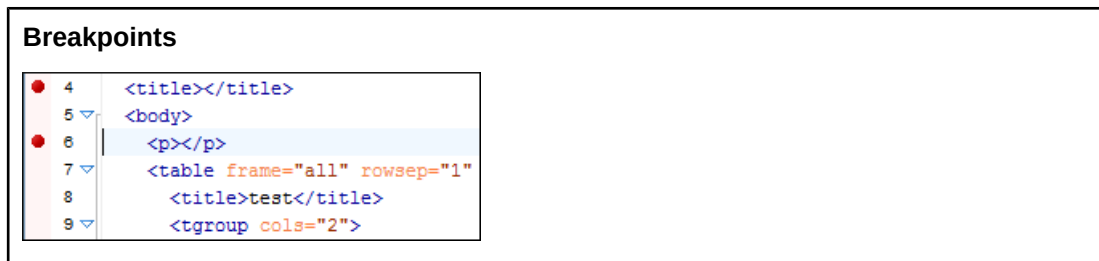

Removing Breakpoints

Only one action is required to remove a breakpoint:

Click the breakpoint icon in the vertical stripe on the left side of the editor panel or select **Remove all** from the **Edit > Breakpoints** menu.

Determining What XSLT / XQuery Expression Generated Particular Output


In order to quickly spot the XSLT templates or XQuery expressions with problems it is important to know what XSLT template in the XSLT stylesheet or XQuery expression in the XQuery document and what element in the source XML document generated a specified area in the output.

Some of the debugging capabilities, for example *Step in* can be used for this purpose. Using *Step in* you can see how output is generated and link it with the XSLT/XQuery element being executed in the current source context. However, this can become difficult on complex XSLT stylesheets or XQuery documents that generate a large output.

You can click the text from the **Text** output view or **XHTML** output view and the editor will select the XML source context and the XSLT template/XQuery element that generated the text. Also inspecting the whole stack of XSLT templates/XQuery elements that determined the state of the XSLT/XQuery processor at the moment of generating the specified output area speeds up the debugging process.

- Switch to the XSLT Debugger perspective or the XQuery Debugger perspective with one of the actions (here explained for XSLT):
 - Go to **Window > Open perspective > XSLT Debugger** or the toolbar button  **XSLT Debugger**
 - Go to **Document > XML Document > Debug scenario** or the toolbar button  **Debug scenario**. This action initializes the Debugger perspective with the parameters of the transformation scenario. Any modification applied to the scenario parameters (the transformer engine, XSLT parameters, transformer extensions, etc.) will be saved back in the scenario when exiting from the Debugger perspective.

2. Select the source XML document in the XML source selector of *the Control toolbar*. In the case of XQuery debugging without an implicit source choose the NONE value.
3. Select the XSLT / XQuery document in the XSLT / XQuery selector of *the Control toolbar*.
4. Select the XSLT / XQuery engine in the XSLT / XQuery engine selector of *the Control toolbar*.
5. Set XSLT / XQuery parameters from the button available on *the Control toolbar*.
6. Apply the XSLT stylesheet or XQuery transformation using the  **Run to end** button that is available on *the Control toolbar*.
7. Inspect the mapping by clicking a section of the output from the **Text** view tab or from the **XHTML** view tab of the *Output document view*.

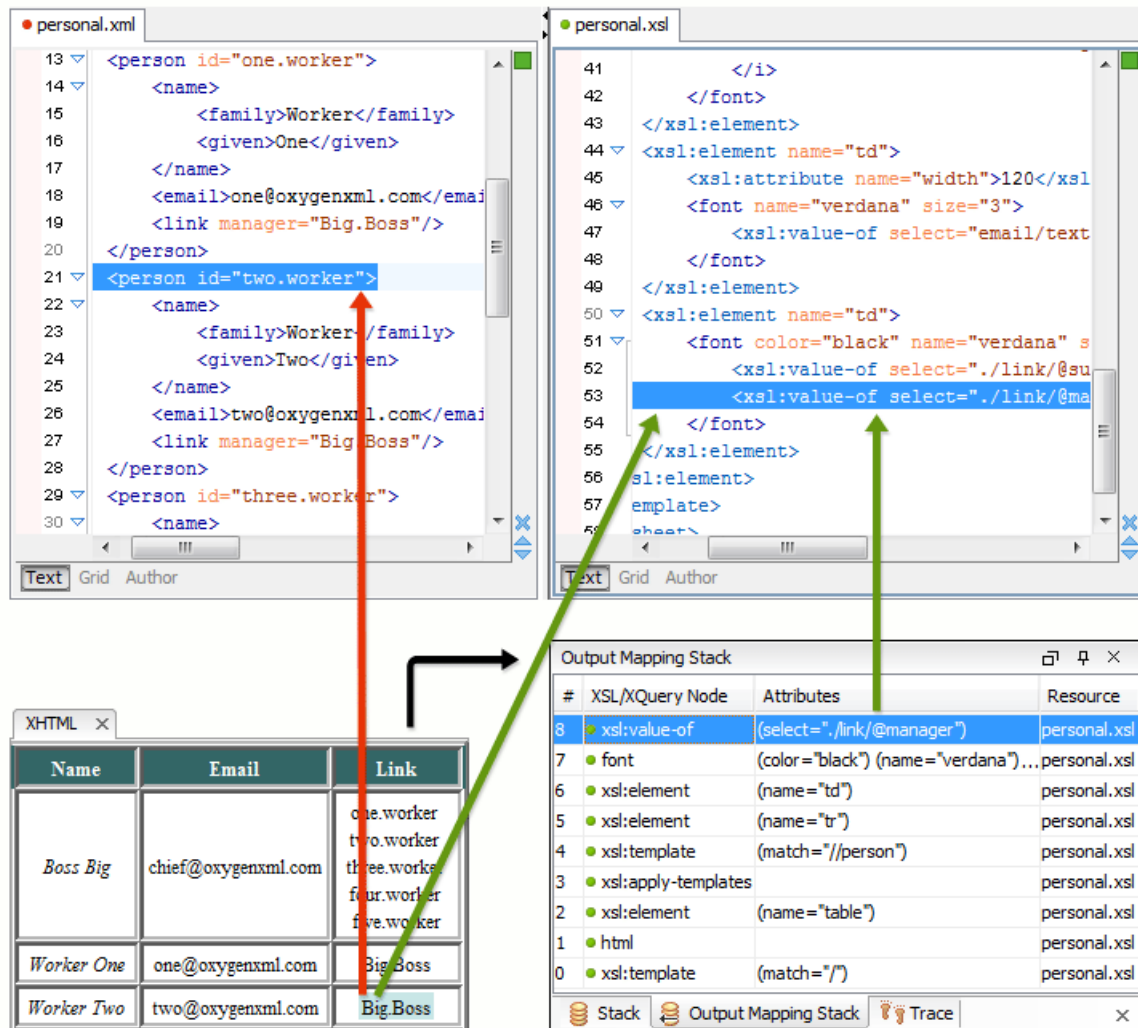

The screenshot illustrates the mapping between the source XML, the XSLT transformation code, and the resulting XHTML output. A red arrow points from the selected XML element in the source view to the corresponding row in the XHTML table. A green arrow points from the selected XSLT code snippet to the corresponding row in the Output Mapping Stack.

Source XML (personal.xml):

```

13 <person id="one.worker">
14   <name>
15     <family>Worker</family>
16     <given>One</given>
17   </name>
18   <email>one@oxygenxml.com</email>
19   <link manager="Big.Boss"/>
20 </person>
21 <person id="two.worker">
22   <name>
23     <family>Worker</family>
24     <given>Two</given>
25   </name>
26   <email>two@oxygenxml.com</email>
27   <link manager="Big.Boss"/>
28 </person>
29 <person id="three.worker">
30   <name>

```

XSLT Code (personal.xsl):

```

41   </i>
42   </font>
43 </xsl:element>
44 <xsl:element name="td">
45   <xsl:attribute name="width">120</xsl:attribute>
46   <font name="verdana" size="3">
47     <xsl:value-of select="email/text">
48   </font>
49 </xsl:element>
50 <xsl:element name="td">
51   <font color="black" name="verdana" size="3">
52     <xsl:value-of select="link/@manager">
53   </font>
54 </xsl:element>
55 </xsl:element>
56 </xsl:element>
57 </xsl:element>
58 </xsl:element>
59 </xsl:element>
60 </xsl:element>
61 </xsl:element>
62 </xsl:element>
63 </xsl:element>
64 </xsl:element>
65 </xsl:element>
66 </xsl:element>
67 </xsl:element>
68 </xsl:element>
69 </xsl:element>
70 </xsl:element>
71 </xsl:element>
72 </xsl:element>
73 </xsl:element>
74 </xsl:element>
75 </xsl:element>
76 </xsl:element>
77 </xsl:element>
78 </xsl:element>
79 </xsl:element>
80 </xsl:element>
81 </xsl:element>
82 </xsl:element>
83 </xsl:element>
84 </xsl:element>
85 </xsl:element>
86 </xsl:element>
87 </xsl:element>
88 </xsl:element>
89 </xsl:element>
90 </xsl:element>
91 </xsl:element>
92 </xsl:element>
93 </xsl:element>
94 </xsl:element>
95 </xsl:element>
96 </xsl:element>
97 </xsl:element>
98 </xsl:element>
99 </xsl:element>
100 </xsl:element>

```

XHTML Output:

Name	Email	Link
one.worker	one@oxygenxml.com	Big.Boss
two.worker	two@oxygenxml.com	Big.Boss
three.worker	three@oxygenxml.com	Big.Boss
four.worker	four@oxygenxml.com	Big.Boss
five.worker	five@oxygenxml.com	Big.Boss

Output Mapping Stack:

#	XSL/XQuery Node	Attributes	Resource
8	xsl:value-of	(select="link/@manager")	personal.xml
7	font	(color="black") (name="verdana")...	personal.xml
6	xsl:element	(name="td")	personal.xml
5	xsl:element	(name="tr")	personal.xml
4	xsl:template	(match="//person")	personal.xml
3	xsl:apply-templates		personal.xml
2	xsl:element	(name="table")	personal.xml
1	html		personal.xml
0	xsl:template	(match="/")	personal.xml

Figure 233: XHTML Output to Source Mapping

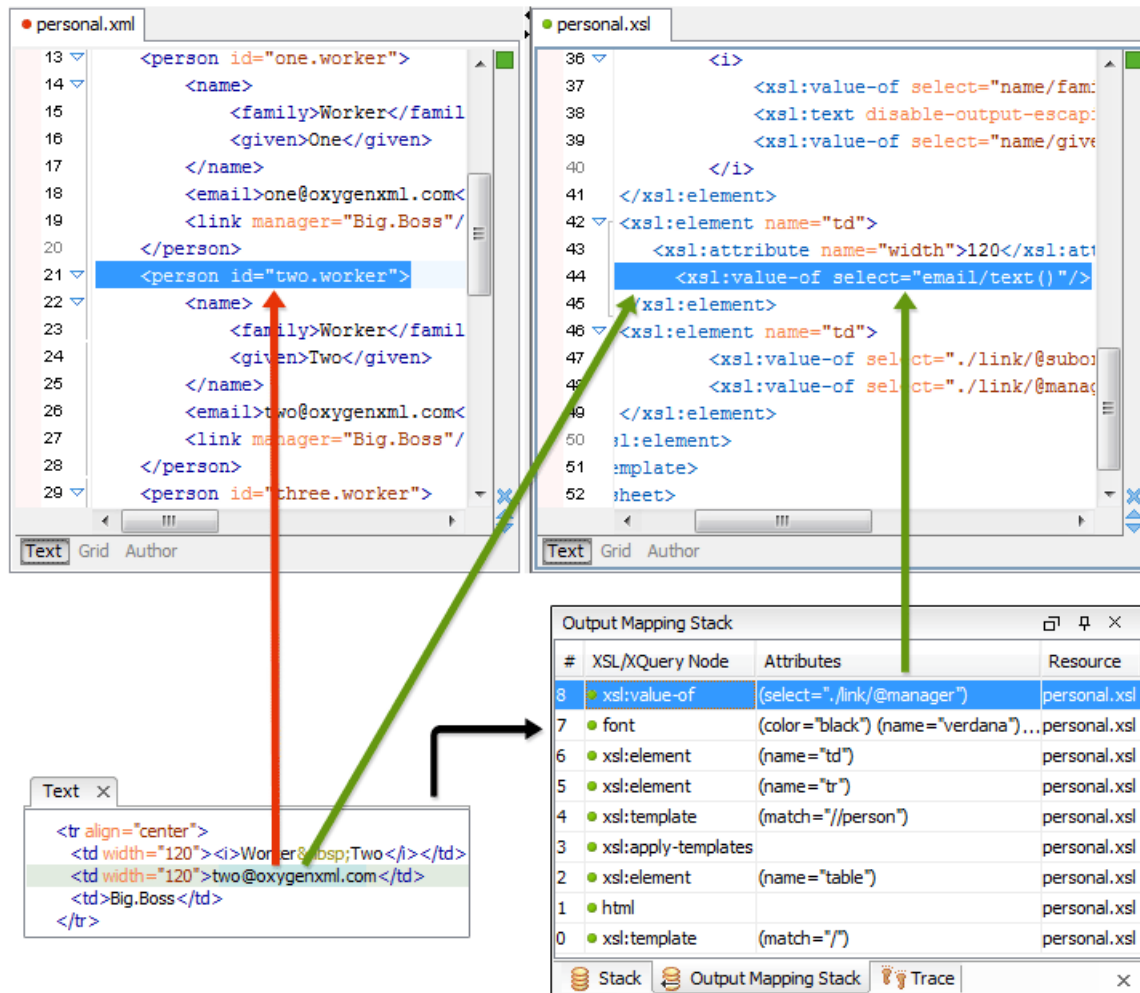


Figure 234: Text Output to Source Mapping

This action will highlight the XSLT / XQuery element and the XML source context. This XSLT template/XQuery element that is highlighted in the XSLT/XQuery editor represents only the top of the stack of XSLT templates/XQuery elements that determined the state of the XSLT/XQuery processor at the moment of generating the clicked output section. In the case of complex transformations inspecting the whole stack of XSLT templates/XQuery elements speeds up the debugging process. This stack is available in [the Output Mapping Stack view](#).

Debugging Java Extensions

The XSLT/XQuery debugger does not step into Java classes that are configured as XSLT/XQuery extensions of the transformation. To step into Java classes, inspect variable values and set breakpoints in Java methods, set up a Java debug configuration in an IDE like the Eclipse SDK as described in the following steps:

1. Create a debug configuration.
 - a) Set at least 256 MB as heap memory for the Java virtual machine (recommended 512 MB) by setting the `-Xmx` parameter in the debug configuration, for example `"-Xmx512m"`.
 - b) Make sure the `[OXYGEN_DIR]/lib/oxygen.jar` file and your Java extension classes are on the Java classpath.

The Java extension classes should be the same classes that were [set as an extension](#) of the XSLT/XQuery transformation in the debugging perspective.

c) Set the class `ro.sync.xml.Oxygen` as the main Java class of the configuration.

The main Java class `ro.sync.xml.Oxygen` is located in the `oxygen.jar` file.

2. Start the debug configuration.

Now you can set breakpoints and inspect Java variables as in any Java debugging process executed in the selected IDE (Eclipse SDK, and so on.).

Supported Processors for XSLT / XQuery Debugging

The following built-in XSLT processors are integrated in the debugger and can be selected in the [Control Toolbar](#):

- Saxon 9.6.0.7 HE (Home Edition) - a limited version of the Saxon 9 processor, capable of running XSLT 1.0, XSLT 2.0 / 3.0 basic and XQuery 1.0 transformations, available in both the XSLT debugger and the XQuery one,
- Saxon 9.6.0.7 PE (Professional Edition) - capable of running XSLT 1.0 transformations, XSLT 2.0 basic ones and XQuery 1.0 ones, available in both the XSLT debugger and the XQuery one,
- Saxon 9.6.0.7 EE (Enterprise Edition) - a schema aware processor, capable of running XSLT 1.0 transformations, XSLT 2.0 / 3.0 basic ones, XSLT 2.0 / 3.0 schema aware ones and XQuery 1.0 / 3.0 ones, available in both the XSLT debugger and the XQuery debugger,
- Saxon 6.5.5 - capable of running only XSLT 1.0 transformations, available only in the XSLT debugger,
- Xalan 2.7.1 - capable of running only XSLT 1.0 transformations, available only in the XSLT debugger.

Chapter 11

Performance Profiling of XSLT Stylesheets and XQuery Documents

Topics:

- [*XSLT/XQuery Performance Profiling Overview*](#)
- [*Viewing Profiling Information*](#)
- [*Working with XSLT/XQuery Profiler*](#)

This chapter explains the user interface and how to use the profiler for finding performance problems in XSLT transformations and XQuery ones.

XSLT/XQuery Performance Profiling Overview

Whether you are trying to identify a performance issue that is causing your production XSLT/XQuery transformation to not meet customer expectations or you are trying to proactively identify issues prior to deploying your XSLT/XQuery transformation, using the XSLT/XQuery profiler feature is essential to helping you save time and ultimately ensure a better performing, more scalable XSLT/XQuery transformation.

The XSLT/XQuery profiling feature can use any available XSLT/XQuery processors that could be used for debugging and it is available from the debugging perspective.

Enabling and disabling the profiler is controlled by the  [Profiler button](#) from the [debugger control toolbar](#). The XSLT/XQuery profiler is off by default. This option is not available during a debugger session so you should set it before starting the transformation.

Viewing Profiling Information

This section explains the views that display the profiling data collected by the profiles during the transformation.

Invocation Tree View

The **Invocation Tree** view shows a top-down call tree that represents how XSLT instructions or XQuery expressions are processed.

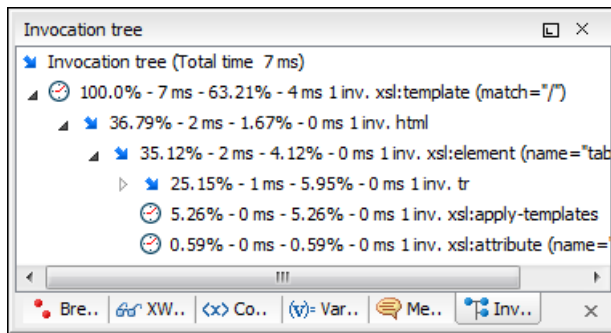


Figure 235: Invocation Tree View

The entries in the invocation tree include a few possible icons that indicate the following:

-  - Points to a call whose inherent time is insignificant compared to its total time.
-  - Points to a call whose inherent time is significant compared to its total time (greater than 1/3rd of its total time).

Every entry in the invocation tree includes textual information that depends on the [XSLT/XQuery profiler settings](#):

- A percentage number of the total time that is calculated with respect to either the root of the tree or the calling instruction.
- A total time measurement in milliseconds or microseconds. This is the total execution time that includes calls into other instructions.
- A percentage number of the inherent time that is calculated with respect to either the root of the tree or the calling instruction.
- An inherent time measurement in milliseconds or microseconds. This is the inherent execution time of the instruction.
- An invocation count that shows how often the instruction has been invoked on this call-path.
- An instruction name that contains also the attributes description.

Hotspots View

The **Hotspots** view displays a list of all instruction calls that lie above the threshold defined in the [XSLT/XQuery profiler settings](#).

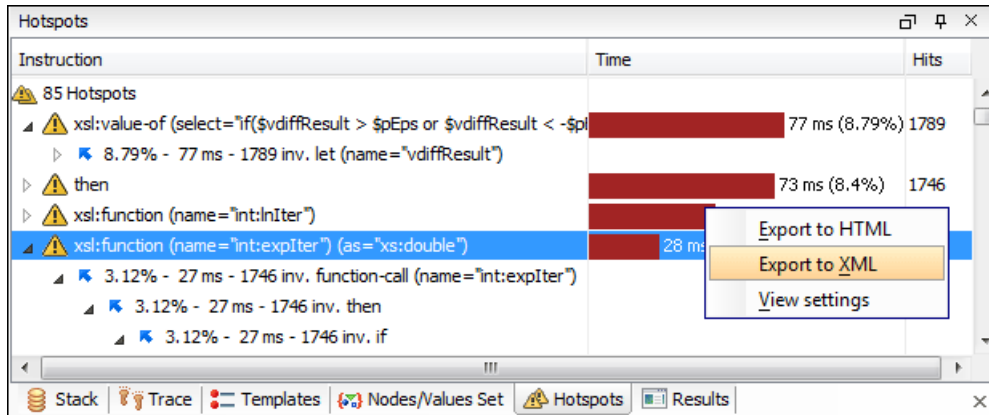


Figure 236: Hotspots View

By opening a hotspot instruction entry, the tree of back-traces leading to that instruction call are calculated and shown.

Every hotspot is described by the values from the following columns:

- **Instruction** - The name of the instruction.
- **Time** - The inherent time in milliseconds or microseconds of how much time has been spent in the hotspot, along with a bar whose length is proportional to this value. All calls into this instruction are summed up regardless of the particular call sequence.
- **Hits** - The invocation count of the hotspot entry.

If you click the  handle on the left side of a hotspot, a tree of back-traces will be shown.

Every entry in the backtrace tree has textual information attached to it that depends on the [XSLT/XQuery profiler settings](#):

- A percentage number that is calculated with respect to either the total time or the called instruction.
- A time measured in milliseconds or microseconds of how much time has been contributed to the parent hotspot on this call-path.
- An invocation count that shows how often the hotspot has been invoked on this call-path.

 **Note:** This is not the number of invocations of this instruction.

- An instruction name that also contains its attributes.

Working with XSLT/XQuery Profiler

Profiling activity is linked with debugging activity, so the first step in order to profile is to switch to debugging perspective and follow the corresponding procedure for debugging (see [Working with XSLT Debugger](#)).

Immediately after turning the profiler on two new information views are added to the current debugger [information views](#):

- [Invocation tree view](#) on left side
- [Hotspots view](#) on right side

Profiling data is available only after the transformation ends successfully.

Looking to the right side (**Hotspots view**), you can immediately spot the time the processor spent in each instruction. As an instruction usually calls other instructions the used time of the called instruction is extracted from the duration time of the caller (the hotspot only presents the inherent time of the instruction).

Looking to the left side (**Invocation tree view**), you can examine how style instructions are processed. This result view is also named call-tree, as it represents the order of style processing. The profiling result shows the duration time for each of the style-instruction including the time needed for its called children.

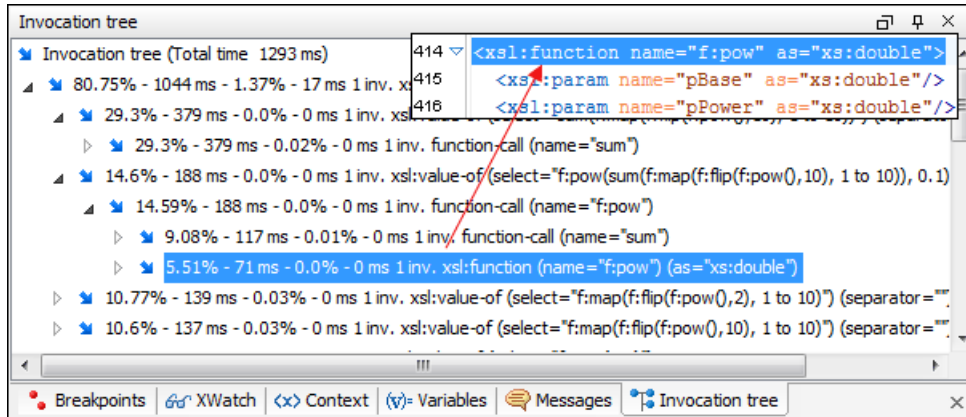


Figure 237: Source backmapping

In any of the above views you can use the backmapping feature in order to find the XSLT stylesheet or XQuery expression definition. Clicking the selected item cause Oxygen XML Developer to highlight the XSLT stylesheet or XQuery expression source line where the instruction is defined.

When navigating through the trees by opening instruction calls, Oxygen XML Developer automatically expands instructions which are only called by one other instruction themselves.

The profiling data can be saved into XML and HTML format. On any of the above views, use the contextual menu and select the corresponding choice. Basically saving HTML means saving XML and applying an XSLT stylesheet to render the report as XML. These stylesheets are included in the Oxygen XML Developer distribution (see the subfolder [OXYGEN_DIR]/frameworks/profiler/) so you can make your own report based on the profiling raw data.

If you want to change the *XSLT/XQuery profiler settings*, use the contextual menu and choose the corresponding **View settings** entry.



Caution: Profiling exhaustive transformation may run into an OutOfMemory error due to the large amount of information being collected. If this is the case you can close unused projects when running the profiling or use high values for Java VM options -Xms and -Xmx. If this does not help you can shorten your source XML file and try again.

To watch our video demonstration about the XSLT/XQuery Profiler, go to http://oxygenxml.com/demo/XSLT_Profiling.html.

Chapter 12

Working with Archives

Topics:

- [Browsing and Modifying Archives](#)
- [Working with EPUB](#)
- [Editing Files From Archives](#)

Oxygen XML Developer offers the means to manipulate files directly from ZIP type archives. By manipulation one should understand opening and saving files directly in archives, browsing and modifying archive structures. The archive support is available for all ZIP-type archives, which includes:

- ZIP archives
- EPUB books
- JAR archives
- Office Open XML (OOXML) files
- Open Document Format (ODF) files
- IDML files

This means that you can modify, transform, validate files directly from OOXML or ODF packages. The structure and content of an EPUB book, OOXML file or ODF file *can be opened, edited and saved* as for any other ZIP archive.

You can transform, validate and perform many other operations on files directly from an archive. When selecting an URL for a specific operation like transformation or validation you can click the  **Browse for archived file** button to navigate and choose the file from a certain archive.

Browsing and Modifying Archives

You can open an archive in the **Archive Browser** view doing one of the following:

- Open an archive from the [Project view](#).
- Choose an archive in the Oxygen XML Developer file chooser dialog box.
- Drag an archive from the file explorer and drop it in the **Archives Browser** view.

When displaying an archive, the **Archive Browser** view locks the archive file. It is then automatically unlocked when the **Archive Browser** view is closed.

 **Important:** If a file is not recognized by Oxygen XML Developer as a supported archive type, you can add it from the [Archive preferences page](#).

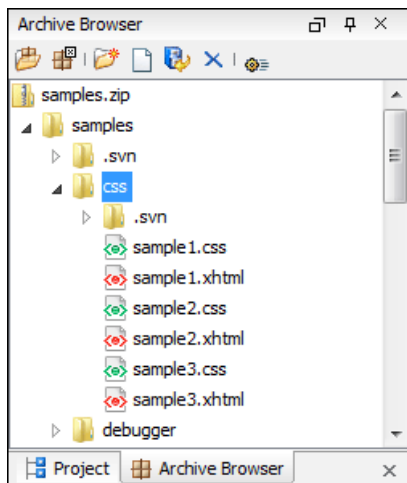


Figure 238: Browsing an Archive

Archive Browser Toolbar

The following actions are available on the **Archive Browser** toolbar:

Reopen

You can use this drop-down to reopen recently edited archives. Apart from the history of the recently edited archives, the drop-down also contains the **Clear history** and  **Open Archive** actions.

New folder

Creates a folder as child of the selected folder in the browsed archive.

New file

Creates a file as child of the selected folder in the browsed archive.

Add files

Adds existing files as children of the selected folder in the browsed archive.

 **Note:** You can also add files in the archive by dragging them from the file browser or **Project view** and dropping them in the **Archive Browser** view.

Delete

Deletes the selected resource in the browsed archive.

Archive Options

Opens the [Archive preferences page](#).

The following additional operations are available from the **Archive Browser** contextual menu:

 Open

Opens a resource from the archive in the editor.

 New folder

Creates a folder as child of the selected folder in the browsed archive.

 New file

Creates a file as child of the selected folder in the browsed archive.

Add files

Adds existing files as children of the selected folder in the browsed archive.



Note: On OS X, there is also available the **Add file** action, which allows you to add one file at a time.

 Find/Replace in Files

Allows you to search for and replace specific pieces of text inside the archive.

Cut

Cut the selected archive resource.

Copy

Copy the selected archive resource.

Paste

Paste a file or folder into the archive.



Note: You can add files in the archive by copying the files from the **Project view** and paste them into the **Archive view**.

Delete

Remove a file or folder from archive.

Copy location

Copies the URL location of the selected resource.



Refresh

Refreshes the selected resource.

Properties

Views properties for the selected resource.

Working with EPUB

EPUB is a free and open electronic book standard by the International Digital Publishing Forum (IDPF). It was designed for *reflowable content*, meaning that the text display can be optimized for the particular display device used by the reader of the EPUB-formatted book. Oxygen XML Developer supports both EPUB 2.0 and EPUB 3.0.

EPUB files are opened in the **Archive Browser** view, exposing all their internal components:

- Document content (XHTML and image files).
- Packaging files.
- Container files.

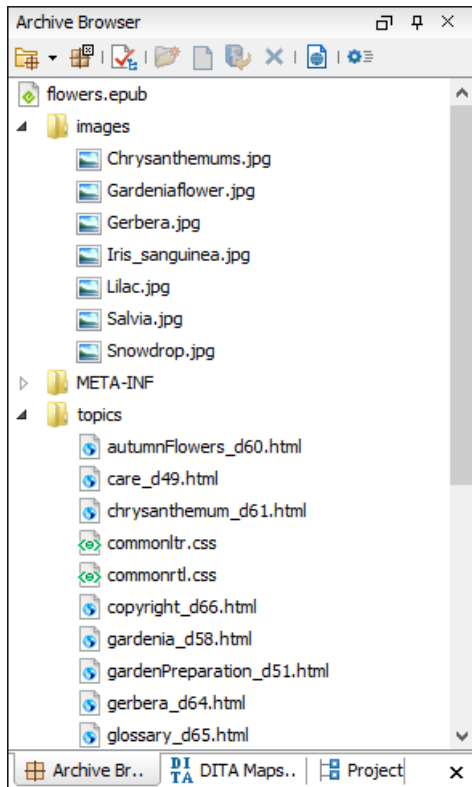


Figure 239: EPUB file displayed in the Archive Browser view

Here you can edit, delete and add files that compose the EPUB structure. To check that the EPUB file you are editing is valid, invoke the  **Validate and Check for Completeness** action. Oxygen XML Developer uses the open-source EpubCheck validator to perform the validation. This validator detects many types of errors, including OCF container structure, OPF and OPS mark-up, as well as internal reference consistency. All errors found during validation are displayed in a separate tab in the **Errors** view.



Note: Invoke the  **Open in System Application** action to see how the EPUB is rendered in your system default EPUB reader application.



Note: All changes made to the structure of an EPUB, or to the contents of the files inside an EPUB are immediately saved.

To watch our video demonstration about the EPUB support in Oxygen XML Developer, go to <http://oxygenxml.com/demo/Epub.html>.

Create an EPUB

To begin writing an EPUB file from scratch, do the following:

1. Go to **File > New**, press **Ctrl N (Meta N on OS X)** on your keyboard. or click  **New** on the main toolbar.
2. Choose **EPUB Book** template. Click **Create**. Choose the name and location of the file. Click **Save**.
A skeleton EPUB file is saved on disk and open in the **Archive Browser** view.
3. Use the **Archive Browser** view specific actions to edit, add and remove resources from the archive.
4. Use the  **Validate and Check for Completeness** action to verify the integrity of the EPUB archive.

Publish to EPUB

Oxygen XML Developer comes with built-in support for publishing DocBook and DITA XML documents directly to EPUB.

1. Open the **Configure Transformation Scenario(s)** dialog box and select a predefined transformation scenario. To publish from DITA, select the **DITA Map EPUB** transformation scenario. To publish from DocBook select the **DocBook EPUB** transformation scenario.
2. Click **Apply associated** to run the transformation scenario.

Editing Files From Archives

You can open and edit files directly from an archive using the **Archive Browser** view. When saving the file back to archive, you are prompted to choose if you want the application to make a backup copy of the archive before saving the new content. If you choose **Never ask me again**, you will not be asked again to make backup copies. You can re-enable the pop-up message from the [Messages preferences page](#).



Note: All changes made to the structure of an archive, or to the contents of the files inside an archive are immediately saved.

Chapter

13

Working with Databases

Topics:

- [*Relational Database Support*](#)
- [*Native XML Database \(NXD\) Support*](#)
- [*XQuery and Databases*](#)
- [*WebDAV Connection*](#)
- [*BaseX Support*](#)

XML is a storage and interchange format for structured data and is supported by all major database systems. Oxygen XML Developer offers the means for managing the interaction with some of the most commonly used databases (both relational and Native XML Databases). Through this interaction, Oxygen XML Developer helps users to understand browsing, querying, SQL execution support, content editing, importing from databases, and generating XML Schema from database structure.

Relational Database Support

Relational databases use a relational model and are based on tables linked by a common key. Oxygen XML Developer offers support for the following relational databases: IBM DB2, MySQL, Microsoft SQL Server, and Oracle 11g.

The following actions are allowed:

- Browsing the tables of these types of databases in the **Data Source Explorer** view
- Executing SQL queries against them
- Calling stored procedures with input and output parameters

Oxygen XML Developer offers generic support (table browsing and execution of SQL queries) for any JDBC-compliant database (for example, *MariaDB*).

To watch our video demonstration about the integration between the relational databases and Oxygen XML Developer, go to http://www.oxygenxml.com/demo/Author_Database_Integration.html.

Configuring Relational Database Data Sources

This section describes the procedures for configuring the data sources for relational databases:

- [IBM DB2](#)
- [Microsoft SQL Server](#)
- [Generic JDBC](#)
- [MySQL](#)
- [Oracle 11g](#)
- [PostgreSQL 8.3](#)

Configuring Database Connections

This section describes the procedures for configuring the connections for relational databases:

- [IBM DB2](#)
- [Microsoft SQL Server](#)
- [JDBC-ODBC](#)
- [MySQL](#)
- [Generic ODBC](#)
- [Oracle 11g](#)
- [PostgreSQL 8.3](#)

How to Configure Support For Relational Databases

This section contains procedures about configuring the support for various relational databases.

How to Configure IBM DB2 Support

To configure the support for the IBM DB2 database follow this procedure:

1. Go to the [IBM website](#) and in the *DB2 Clients and Development Tools* category select the *DB2 Driver for JDBC and SQLJ* download link. Fill out the download form and download the zip file. Unzip the zip file and use the `db2jcc.jar` and `db2jcc_license_cu.jar` files in Oxygen XML Developer for [configuring a DB2 data source](#).
2. [Configure a IBM DB2 Data Source driver.](#)
3. [Configure a IBM DB2 Server Connection.](#)
4. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure an IBM DB2 Data Source

Available in the Enterprise edition only.

The steps for configuring a data source for connecting to an IBM DB2 server are as follows:

1. Open the **Preferences** dialog box and go to **Data Sources**.
2. Click the **+** **New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

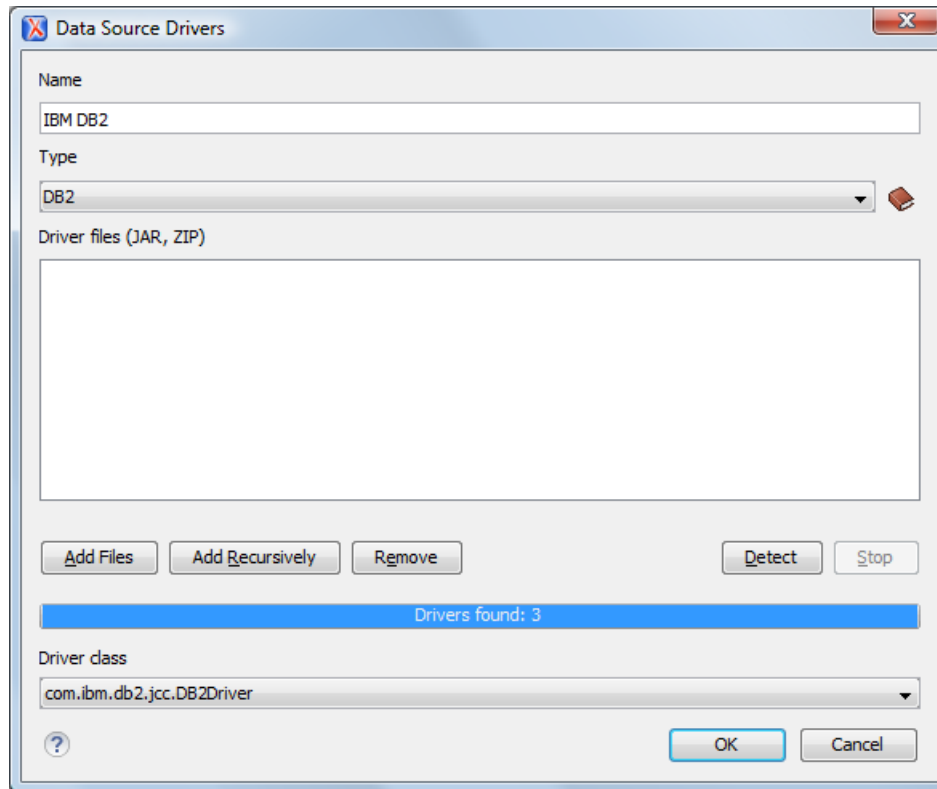


Figure 240: Data Source Drivers Configuration Dialog Box

3. Enter a unique name for the data source.
4. Select **DB2** in the driver **Type** drop-down menu.
5. Add the driver files for IBM DB2 using the **Add Files** button.

The IBM DB2 driver files are:

- db2jcc.jar
- db2jcc_license_cisuz.jar
- db2jcc_license_cu.jar

The **Driver files** section lists [download links for database drivers](#) that are necessary for accessing IBM DB2 databases in Oxygen XML Developer.

6. Select the most appropriate **Driver class**.
7. Click the **OK** button to finish the data source configuration.

To watch our video demonstration about running XQuery against an IBM DB2 Pure XML database, go to <http://www.oxygenxml.com/demo/DB2.html>.

How to Configure an IBM DB2 Connection

The support to create an IBM DB2 connection is available in the Enterprise edition only.

To configure a connection to an IBM DB2 server, follow these steps:

1. *Open the **Preferences** dialog box* and go to **Data Sources**.
2. In the **Connections** panel, click the **+** **New** button.

The dialog box for configuring a database connection is displayed.

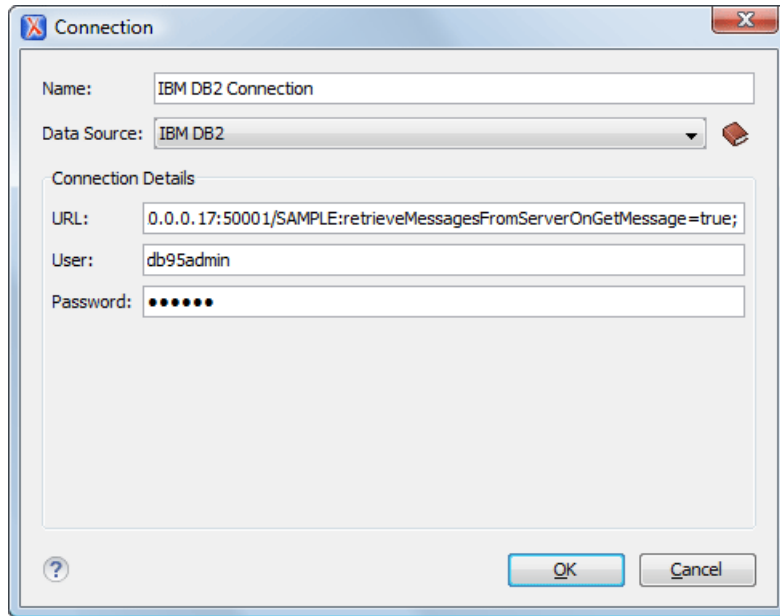


Figure 241: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select an *IBM DB2* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Enter the URL to the installed IBM DB2 engine.
 - b) Enter the user name to access the IBM DB2 engine.
 - c) Enter the password to access the IBM DB2 engine.
6. Click the **OK** button to finish the configuration of the database connection.

To watch our video demonstration about running XQuery against an IBM DB2 Pure XML database, go to <http://www.oxygenxml.com/demo/DB2.html>.

How to Configure Microsoft SQL Server Support

To configure the support for Microsoft SQL Server database follow this procedure:

1. Download the appropriate MS SQL JDBC driver from the Microsoft website. For SQL Server 2008 R2 and older go to <http://www.microsoft.com/en-us/download/details.aspx?id=21599>. For SQL Server 2012 and 2014 go to <http://www.microsoft.com/en-us/download/details.aspx?id=11774>.
2. *Configure a MS SQL Server Data Source driver.*
3. *Configure a MS SQL Server Connection.*
4. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a Microsoft SQL Server Data Source

Available in the Enterprise edition only.

The steps for configuring a data source for connecting to a Microsoft SQL server are as follows:

1. *Open the **Preferences** dialog box* and go to **Data Sources**.

2. Click the **+** **New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

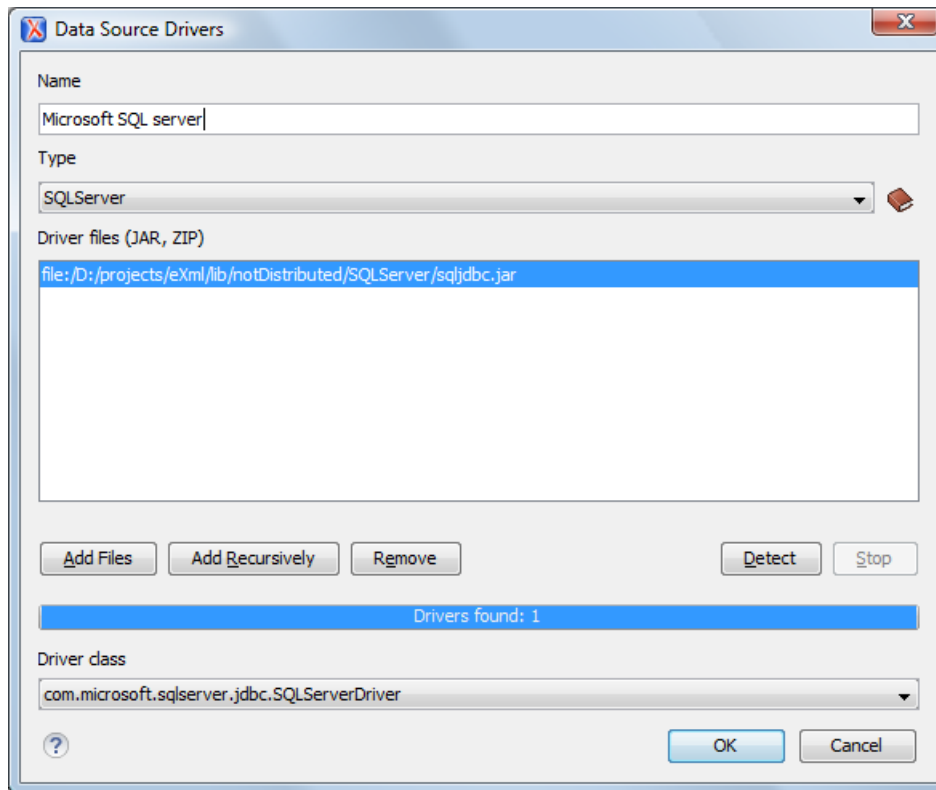


Figure 242: Data Source Drivers Configuration Dialog Box

3. Enter a unique name for the data source.
4. Select *SQLServer* in the driver **Type** drop-down menu.
5. Add the Microsoft SQL Server driver file using the **Add Files** button.

The SQL Server driver file is called `sqljdbc.jar`. In the **Driver files** section lists [download links for database drivers](#) that are necessary for accessing Microsoft SQL Server databases in Oxygen XML Developer.

6. Select the most appropriate **Driver class**.
7. Click the **OK** button to finish the data source configuration.

How to Configure a Microsoft SQL Server Connection

The support to configure a Microsoft SQL Server connection is available in the Enterprise edition only.

To configure a connection to a Microsoft SQL Server, follow these steps:

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. In the **Connections** panel, click the **+** **New** button.

The dialog box for configuring a database connection is displayed.

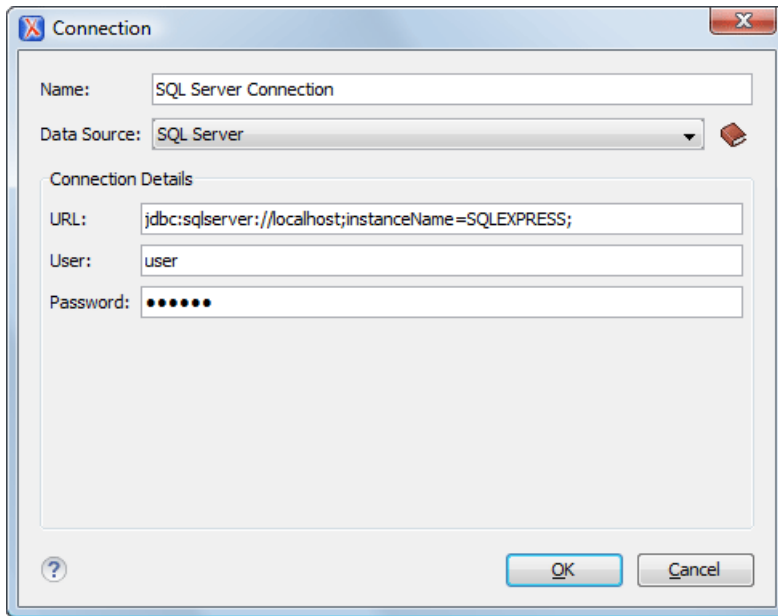


Figure 243: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select the *SQL Server* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Enter the URL of the SQL Server server.
If you want to connect to the server using Windows integrated authentication, you must add `;integratedSecurity=true` to the end of the URL. The URL will look like this:

```
jdbc:sqlserver://localhost;instanceName=SQLEXPRESS;integratedSecurity=true;
```



Note: For integrated authentication, leave the **User** and **Password** fields empty.

- b) Enter the user name for the connection to the SQL Server.
 - c) Enter the password for the connection to the SQL Server.
6. Click the **OK** button to finish the configuration of the database connection.

How to Configure Generic JDBC Support

To configure the support for a generic JDBC database follow this procedure:

1. [Configure a Generic JDBC Data Source driver.](#)
2. [Configure a Generic JDBC Connection.](#)
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a Generic JDBC Data Source

Starting with version 17, Oxygen XML Developer comes bundled with Java 8, which does not provide built-in access to JDBC-ODBC data sources. To access such sources, you need to find an alternative JDBC-ODBC bridge or use a platform-independent distribution of Oxygen XML Developer along with a Java VM version 7 or 6. The following procedure shows you how to configure a generic JDBC data source:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **+** **New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.

4. Select *Generic JDBC* in the driver **Type** drop-down list.
5. Add the driver file(s) using the **Add Files** button.
6. Select the most appropriate **Driver class**.
7. Click the **OK** button to finish the data source configuration.

How to Configure a Generic JDBC Connection

To configure a connection to a generic JDBC database, follow these steps:

1. Open the *Preferences dialog box* and go to **Data Sources**.
2. In the **Connections** panel, click the  **New** button.
3. Enter a unique name for the connection.
4. Select the *Generic JDBC* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Enter the URL of the generic JDBC database, with the following format: `jdbc: <subprotocol>: <subname>`.
 - b) Enter the user name for the connection to the generic JDBC database.
 - c) Enter the password for the connection to the generic JDBC database.
6. Click the **OK** button to finish the configuration of the database connection.

How to Configure MySQL Support

To configure the support for a MySQL database follow this procedure:

1. *Configure a MySQL Data Source driver.*
2. *Configure a MySQL Connection.*
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a MySQL Data Source

To connect to a MySQL server, create a data source of a generic JDBC type, based on *the MySQL JDBC driver available on the MySQL website*. The following steps describe how you can configure such a data source:

1. Open the *Preferences dialog box* and go to **Data Sources**.
2. Click the  **New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

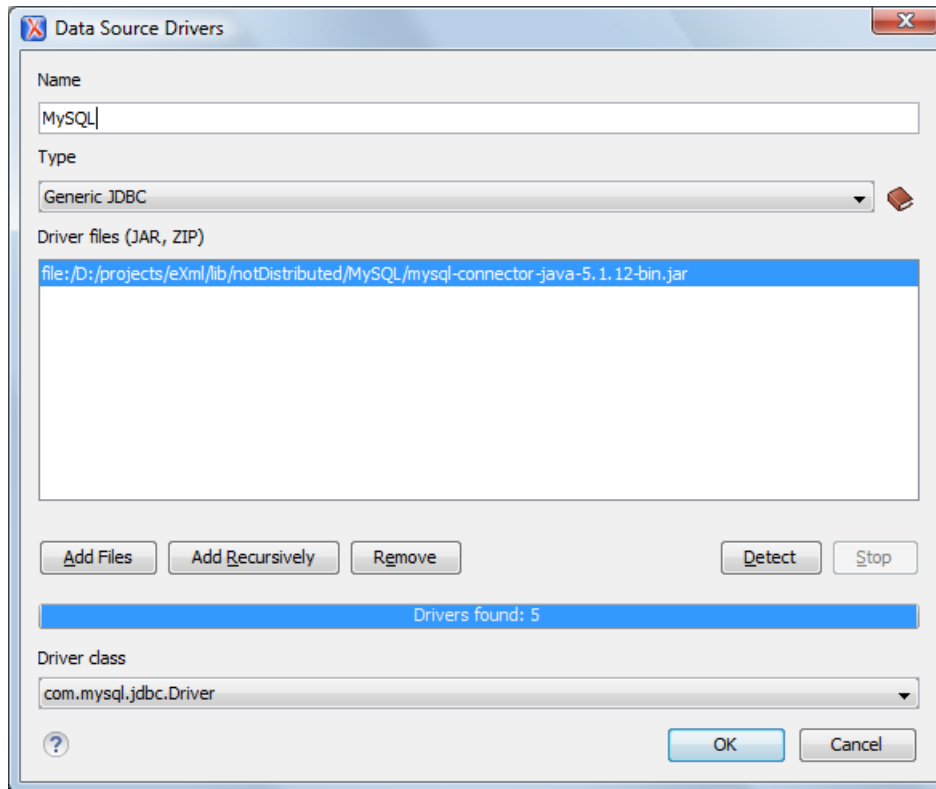


Figure 244: Data Source Drivers Configuration Dialog Box

3. Enter a unique name for the data source.
4. Select *Generic JDBC* in the driver **Type** drop-down list.
5. Add the MySQL driver files using the **Add Files** button.

The driver file for the MySQL server is called `mysql-com.jar`. The **Driver files** section lists [download links for database drivers](#) that are necessary for accessing MySQL databases in Oxygen XML Developer.

6. Select the most appropriate **Driver class**.
7. Click the **OK** button to finish the data source configuration.

How to Configure a MySQL Connection

To configure a connection to a MySQL server, follow these steps:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. In the **Connections** panel, click the **+ New** button.

The dialog box for configuring a database connection is displayed.

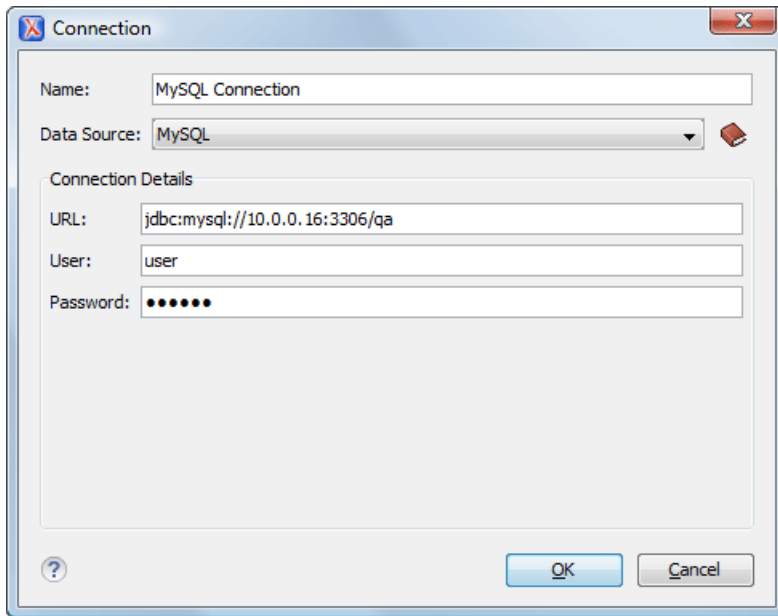


Figure 245: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select the *MySQL* data source in the **Data Source** drop-down list.
5. Enter the connection details.
 - a) Enter the URL of the MySQL server.
 - b) Enter the user name for the connection to the MySQL server.
 - c) Enter the password for the connection to the MySQL server.
6. Click the **OK** button to finish the configuration of the database connection.

How to Oracle 11g Support

To configure the support for a Oracle 11g database follow this procedure:

1. Go to the [Oracle website](#) and download the Oracle 11g JDBC driver called `ojdbc6.jar`.
2. [Configure a Oracle 11g Data Source driver](#).
3. [Configure a Oracle 11g Connection](#).
4. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure an Oracle 11g Data Source

Available in the Enterprise edition only.

The steps for configuring a data source for connecting to an Oracle 11g server are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **+** **New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

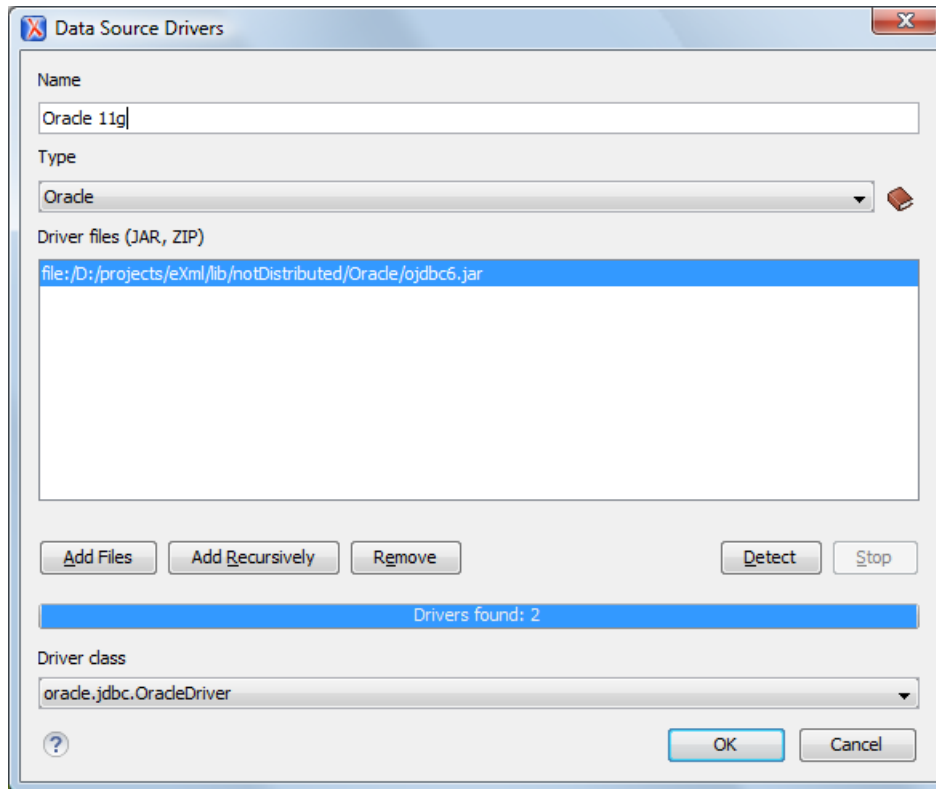


Figure 246: Data Source Drivers Configuration Dialog Box

3. Enter a unique name for the data source.
4. Select *Oracle* in the driver **Type** drop-down menu.
5. Add the Oracle driver file using the **Add Files** button.

The Oracle driver file is called `ojdbc5.jar`. The **Driver files** section lists [download links for database drivers](#) that are necessary for accessing Oracle databases in Oxygen XML Developer.

6. Select the most appropriate **Driver class**.
7. Click the **OK** button to finish the data source configuration.

How to Configure an Oracle 11g Connection

Available in the Enterprise edition only.

The steps for configuring a connection to an Oracle 11g server are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. In the **Connections** panel, click the **+ New** button.

The dialog box for configuring a database connection is displayed.

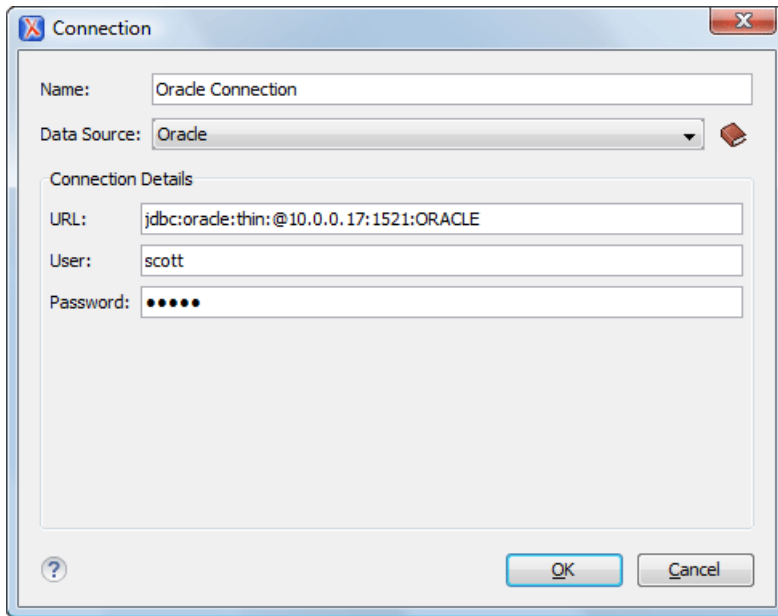


Figure 247: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select the *Oracle 11g* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Enter the URL of the Oracle server.
 - b) Enter the user name for the connection to the Oracle server.
 - c) Enter the password for the connection to the Oracle server.
6. Click the **OK** button to finish the configuration of the database connection.

How to Configure PostgreSQL Support

To configure the support for a PostgreSQL database follow this procedure:

1. Go to the [PostgreSQL website](#) and download the PostgreSQL 8.3 JDBC driver called `postgresql-8.3-603.jdbc3.jar`.
2. [Configure a PostgreSQL Data Source driver.](#)
3. [Configure a PostgreSQL Connection.](#)
4. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a PostgreSQL 8.3 Data Source

The steps for configuring a data source for connecting to a PostgreSQL server are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **+** **New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

3. Enter a unique name for the data source.
4. Select *PostgreSQL* in the driver **Type** drop-down list.
5. Add the PostgreSQL driver file using the **Add Files** button.

The PostgreSQL driver file is called `postgresql-8.3-603.jdbc3.jar`. The **Driver files** section lists [download links for database drivers](#) that are necessary for accessing PostgreSQL databases in Oxygen XML Developer.

6. Select the most appropriate **Driver class**.

7. Click the **OK** button to finish the data source configuration.

How to Configure a PostgreSQL 8.3 Connection

The steps for configuring a connection to a PostgreSQL 8.3 server are as follows:

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. In the **Connections** panel, click the **+** **New** button.

The dialog box for configuring a database connection is displayed.

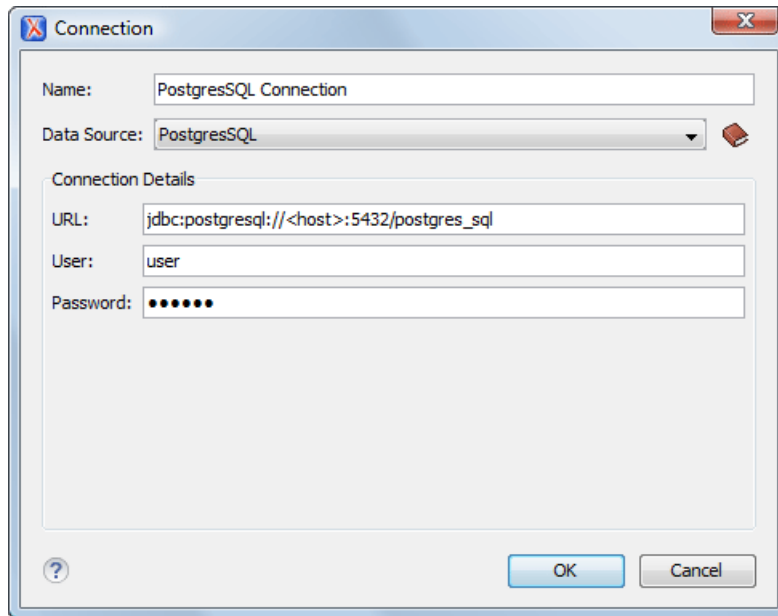


Figure 248: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select the *PostgreSQL 8.3* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Enter the URL of the PostgreSQL 8.3 server.
 - b) Enter the user name for the connection to the PostgreSQL 8.3 server.
 - c) Enter the password for the connection to the PostgreSQL 8.3 server.
6. Click the **OK** button to finish the configuration of the database connection.

How to Configure JDBC-ODBC Support

To configure the support for a JDBC-ODBC database follow this procedure:

1. Configure a JDBC-ODBC *Data Source* driver.
2. *Configure a JDBC-ODBC Connection.*
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a JDBC-ODBC Connection

Starting with version 17, Oxygen XML Developer comes bundled with Java 8, which does not provide built-in access to JDBC-ODBC data sources. To access such sources, you need to find an alternative JDBC-ODBC bridge or use a platform-independent distribution of Oxygen XML Developer along with a Java VM version 7 or 6. To configure a connection to an ODBC data source, follow these steps:

1. *Open the Preferences dialog box* and go to **Data Sources**.

2. In the **Connections** panel, click the **+** **New** button.

The dialog box for configuring a database connection is displayed.

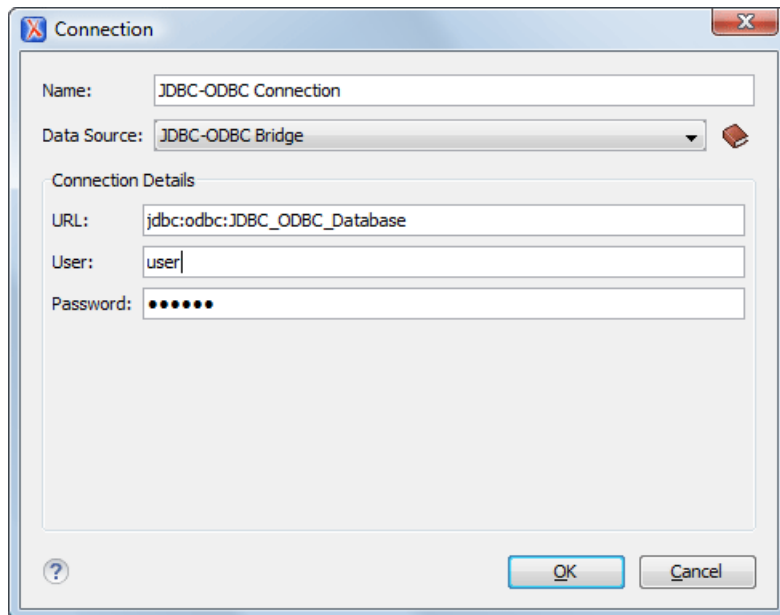


Figure 249: The Connection Configuration Dialog Box

3. Enter a unique name for the connection.
4. Select *JDBC-ODBC Bridge* in the **Data Source** drop-down list.
5. Enter the connection details.
 - a) Enter the URL of the ODBC source.
 - b) Enter the user name of the ODBC source.
 - c) Enter the password of the ODBC source.
6. Click the **OK** button to finish the configuration of the database connection.

Resource Management

This section explains resource management actions for relational databases.

Data Source Explorer View

The **Data Source Explorer** view displays your database connections. You can connect to a database simply by expanding the connection node. The database structure can be expanded to the column level. Oxygen XML Developer supports multiple simultaneous database connections and the connection tree provides an easy method for browsing them.

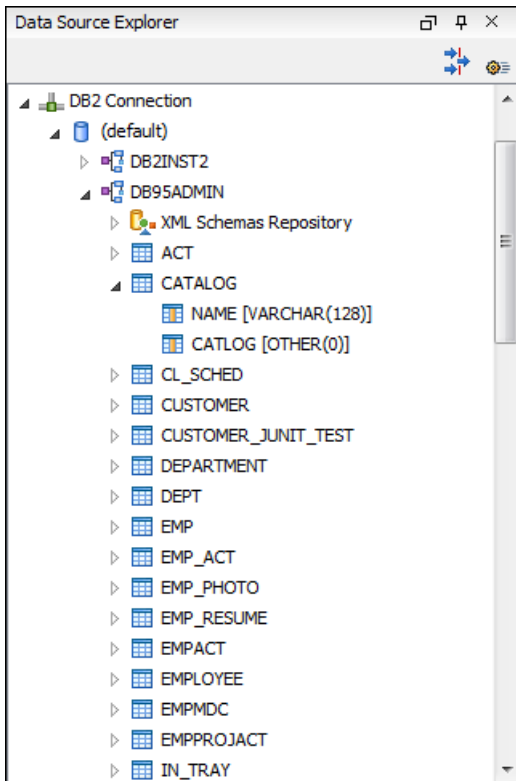


Figure 250: Data Source Explorer View

The following objects are displayed in the **Data Source Explorer** view:

- **Connection**
- **Collection (Catalog)**
- **XML Schema Repository**
- **XML Schema Component**
- **Schema**
- **Table**
- **System Table**
- **Table Column**

A **Collection** (called *catalog* in some databases) is a hierarchical container for resources and sub-collections. There are two types of resources:

- **XML resource** - An XML document or document fragment, selected by a previously executed XPath query.
- **non-XML resource** - Any resource that is not recognized as XML.

Note: For some connections you can add or move resources into a container by dragging them from:

- The **Project view**.
- The default file system application (for example, Windows Explorer in Windows or Finder in Mac OS X).
- Another database container.

The following actions are available in the toolbar of this view:

Filters

Opens the **Data Sources / Table Filters** [Preferences page](#), allowing you to decide which table types are displayed in the **Data Source Explorer** view.

Configure Database Sources

Opens the **Data Sources** [preferences page](#) where you can configure both data sources and connections.

Actions Available at Connection Level in Data Source Explorer View

The contextual menu of a  **Connection** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Disconnect

Closes the current database connection. If a table is already open, you are warned to close it before proceeding.

Configure Database Sources

Opens the **Data Sources** [preferences page](#) where you can configure both data sources and connections.

Actions Available at Catalog Level in Data Source Explorer View

The contextual menu of a  **Catalog** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Actions Available at Schema Level in Data Source Explorer View

The contextual menu of a  **Schema** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Actions Available at Table Level in Data Source Explorer View

The contextual menu of a  **Table** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Edit

Opens the selected table in the **Table Explorer** view.

Export to XML

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from Database](#) chapter).

XML Schema Repository Level

This section explains the actions available at the XML Schema Repository level.

Oracle XML Schema Repository Level

The Oracle database supports XML schema repository (XSR) in the database catalogs. The contextual menu of a  **XML Schema Repository** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Register

Opens a dialog box for adding a new schema file in the XML repository. To add an XML Schema, enter the schema URI and location on your file system. *Local* scope means that the schema is visible only to the user who registers it. *Global* scope means that the schema is public.



Note: Registering a schema may involve dropping/creating types. Hence you need type-related privileges such as DROP TYPE, CREATE TYPE, and ALTER TYPE. You need privileges to delete and register the XML schemas involved in the registering process. You need all privileges on XMLType tables that conform to the registered schemas. For XMLType columns, the ALTER TABLE privilege is needed on corresponding tables. If there are schema-based XMLType tables or columns in other database schemas, you need privileges such as the following:

- CREATE ANY TABLE
- CREATE ANY INDEX
- SELECT ANY TABLE
- UPDATE ANY TABLE
- INSERT ANY TABLE
- DELETE ANY TABLE
- DROP ANY TABLE
- ALTER ANY TABLE
- DROP ANY INDEX

To avoid having to grant all these privileges to the schema owner, Oracle recommends that the registration be performed by a DBA if there are XML schema-based XMLType table or columns in other user database schemas.

IBM DB2 XML Schema Repository Level

The contextual menu of a **XML Schema Repository** node in the tree from the **Data Source Explorer** view contains the following actions:



Refresh

Performs a refresh for the sub-tree of the selected node.

Register

Opens a dialog box for adding a new schema file in the XML Schema repository. In this dialog box, the following fields can be set:

- **XML schema file** - Location on your file system.
- **XSR name** - Schema name.
- **Comment** - Short comment (optional).
- **Schema location** - Primary schema name (optional).

Decomposition means that parts of the XML documents are stored in relational tables. Which parts map to which tables and columns are specified in the schema annotations. Schema dependencies management is done by using the **Add** and **Remove** buttons.

The actions available at **Schema** level are as follows:



Refresh

Performs a refresh of the selected node (and its sub-tree).

Unregister

Removes the selected schema from the XML Schema Repository.



View

Opens the selected schema in Oxygen XML Developer.

Microsoft SQL Server XML Schema Repository Level

The contextual menu of a  **XML Schema Repository** node in the tree from the **Data Source Explorer** view contains the following actions:

Refresh

Performs a refresh for the sub-tree of the selected node.

Register

Opens a dialog box for adding a new schema file in the DB XML repository. In this dialog box, you enter a collection name and the necessary schema files. XML Schema files management is done by using the **Add** and **Remove** buttons.

The actions available at  **Schema** level are as follows:

Refresh

Performs a refresh of the selected node (and its sub-tree).

Add

Adds a new schema to the XML Schema files.

Unregister


Removes the selected schema from the XML Schema Repository.

View

Opens the selected schema in Oxygen XML Developer.

Table Explorer View

Every table from the **Data Source Explorer** view can be displayed and edited in the **Table Explorer** view by pressing the **Edit** button from the contextual menu or by double-clicking one of its fields. To modify the content of a cell, double-click it and start typing. When editing is complete, Oxygen XML Developer attempts to update the database with the new cell content.

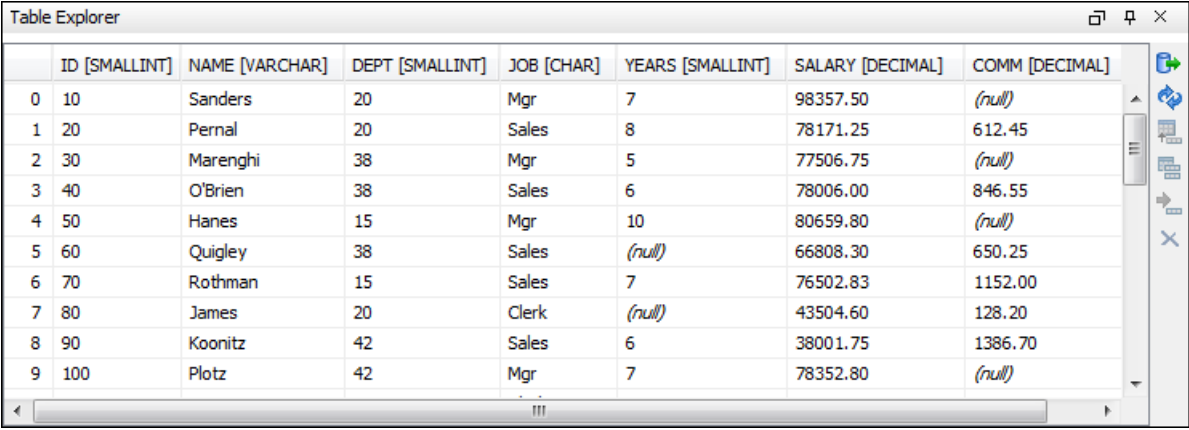

	ID [SMALLINT]	NAME [VARCHAR]	DEPT [SMALLINT]	JOB [CHAR]	YEARS [SMALLINT]	SALARY [DECIMAL]	COMM [DECIMAL]
0	10	Sanders	20	Mgr	7	98357.50	(null)
1	20	Pernal	20	Sales	8	78171.25	612.45
2	30	Marengi	38	Mgr	5	77506.75	(null)
3	40	O'Brien	38	Sales	6	78006.00	846.55
4	50	Hanes	15	Mgr	10	80659.80	(null)
5	60	Quigley	38	Sales	(null)	66808.30	650.25
6	70	Rothman	15	Sales	7	76502.83	1152.00
7	80	James	20	Clerk	(null)	43504.60	128.20
8	90	Koonitz	42	Sales	6	38001.75	1386.70
9	100	Plotz	42	Mgr	7	78352.80	(null)

Figure 251: The Table Explorer View

You can sort the content of a table by one of its columns by clicking its column header.


Note the following:

- The first column is an index (not part of the table structure)
- Every column header contains the field name and its data type
- The primary key columns are marked with this symbol: 
- Multiple tables are presented in a tabbed manner

For performance issues, you can set the maximum number of cells that are displayed in the **Table Explorer** view (using the **Limit the number of cells** field from the [Data Sources](#) Preferences page). If a table that has more cells than the value set in the options is displayed in the **Table Explorer** view, a warning dialog box informs you that the table is only partially shown.

You are notified if the value you have entered in a cell is not valid (and thus cannot be updated).


- If the content of the edited cell does not belong to the data type of the column, the cell is marked by a red square and remains in an editing state until a correct value is inserted. For example, in the following figure **propID** contains **LONG** values. If a character or string is inserted, the cell will look like this:

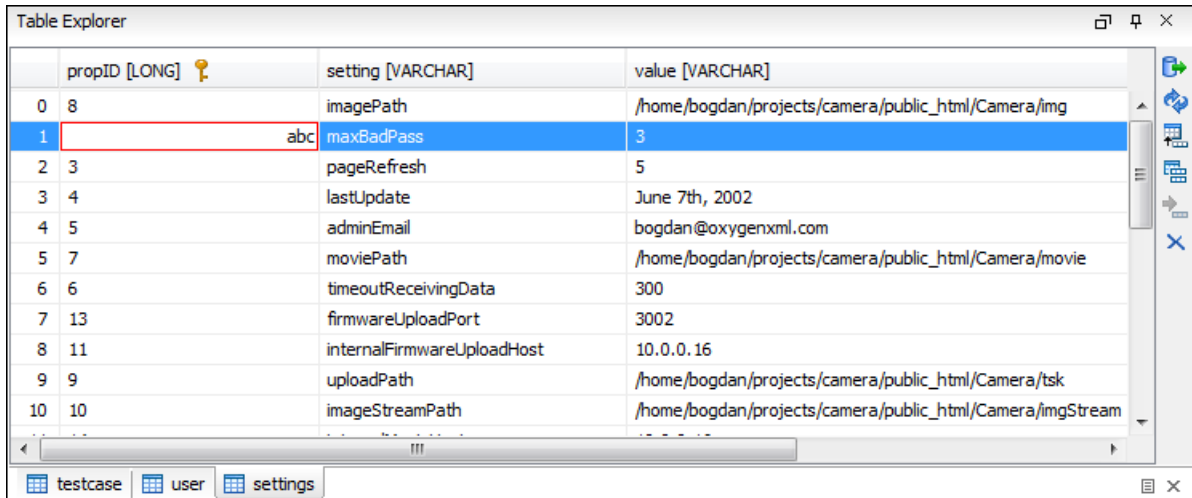

	propID [LONG]	setting [VARCHAR]	value [VARCHAR]
0	8	imagePath	/home/bogdan/projects/camera/public_html/Camera/img
1	abc	maxBadPass	3
2	3	pageRefresh	5
3	4	lastUpdate	June 7th, 2002
4	5	adminEmail	bogdan@oxygenxml.com
5	7	moviePath	/home/bogdan/projects/camera/public_html/Camera/movie
6	6	timeoutReceivingData	300
7	13	firmwareUploadPort	3002
8	11	internalFirmwareUploadHost	10.0.0.16
9	9	uploadPath	/home/bogdan/projects/camera/public_html/Camera/tsk
10	10	imageStreamPath	/home/bogdan/projects/camera/public_html/Camera/imgStream

Figure 252: Cell Containing an Invalid Value

- If the constraints of the database are not met (for instance, primary key constraints), an information dialog box will appear, notifying you of the reason the database has not been updated. For example, in the table below, trying to set the second record in the primary key **propID** column to 8, results in a duplicate entry error since that value has already been used in the first record:

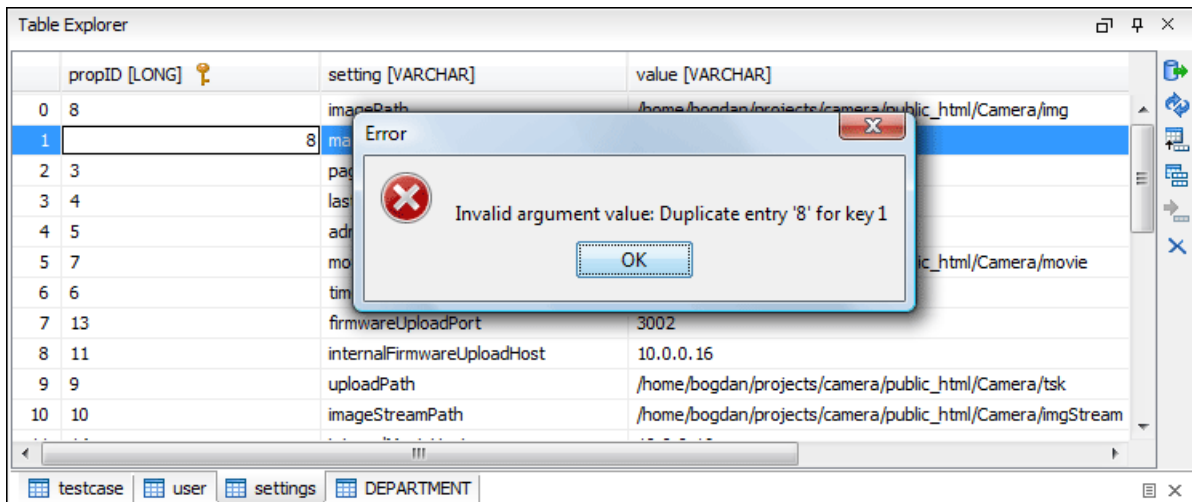

	propID [LONG]	setting [VARCHAR]	value [VARCHAR]
0	8	imagePath	/home/bogdan/projects/camera/public_html/Camera/img
1	8	maxBadPass	3
2	3	pageRefresh	5
3	4	lastUpdate	June 7th, 2002
4	5	adminEmail	bogdan@oxygenxml.com
5	7	moviePath	/home/bogdan/projects/camera/public_html/Camera/movie
6	6	timeoutReceivingData	300
7	13	firmwareUploadPort	3002
8	11	internalFirmwareUploadHost	10.0.0.16
9	9	uploadPath	/home/bogdan/projects/camera/public_html/Camera/tsk
10	10	imageStreamPath	/home/bogdan/projects/camera/public_html/Camera/imgStream

Figure 253: Duplicate Entry for Primary Key

Common edit actions (**Cut**, **Copy**, **Paste**, **Select All**, **Undo**, **Redo**) are available in the contextual menu of an edited cell.

The contextual menu, available on every cell, also has the following actions:

Set NULL

Sets the content of the cell to *null*. This action is disabled for columns that cannot have a value of *null*.

**Insert row**

Inserts an empty row in the table.

**Duplicate row**

Makes a copy of the selected row and adds it in the **Table Explorer** view. Note that the new row will not be inserted in the database table until all conflicts are resolved.

**Commit row**

Commits the selected row.

**Delete row**

Deletes the selected row.

**Copy**

Copies the content of the cell.

**Paste**

Pastes copied content into the selected cell.

The **Table Explorer** toolbar also includes the following actions:

**Export to XML**

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from database](#) chapter) .

**Refresh**

Performs a refresh for the sub-tree of the selected node.

**Insert row**

Inserts an empty row in the table.

**Duplicate row**

Makes a copy of the selected row and adds it in the **Table Explorer** view. Note that the new row will not be inserted in the database table until all conflicts are resolved.

**Commit row**

Commits the selected row.

**Delete row**

Deletes the selected row.

SQL Execution Support

Oxygen XML Developer's support for writing SQL statements includes syntax highlighting, folding, and dragging and dropping from the **Data Source Explorer** view. It also includes transformation scenarios for executing the statements, and the results are displayed in the **Table Explorer** view.

Drag and Drop from Data Source Explorer View

Drag and drop operations from the **Data Source Explorer** view to the SQL Editor allows you to create SQL statements quickly by inserting the names of tables and columns in the SQL statements.

1. Configure a database connection ([see the specific procedure for your database server](#)).
2. Browse to the table you will use in your statement.
3. Drag the table or a column of the table into the editor where a SQL file is open.

Drag and drop actions are available both on the table and on its fields. A pop-up menu is displayed in the SQL editor.

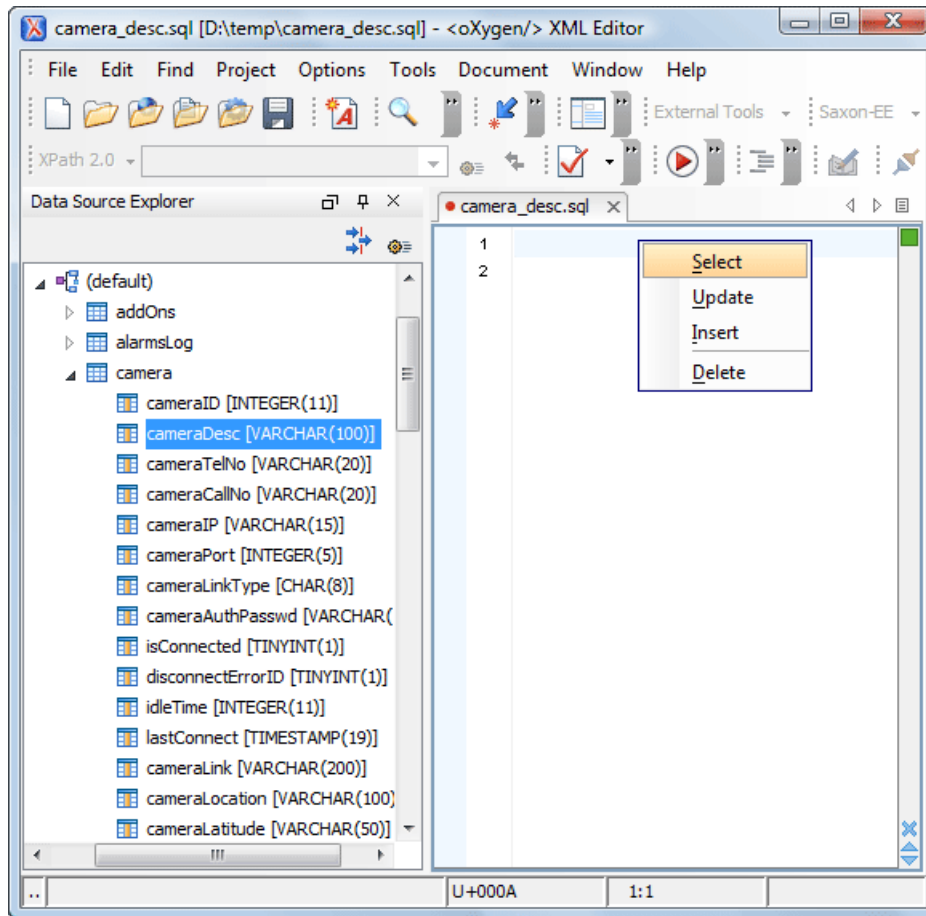


Figure 254: SQL Statement Editing with Drag and Drop

4. Select the type of statement from the pop-up menu.

Depending on your choice, dragging a table results in one of the following statements being inserted into the document:

- `SELECT `field1`,`field2`, ... FROM `catalog`.`table`` (for example: `SELECT `DEPT`,`DEPTNAME`,`LOCATION` FROM `camera`.`cameraDesc``)
- `UPDATE `catalog`.`table` SET `field1`=,`field2`=,...` (for example: `UPDATE `camera`.`cameraDesc` SET `DEPT`=, `DEPTNAME`=, `LOCATION`=`)
- `INSERT INTO `catalog`.`table` ( `field1`,`field2`, ...) VALUES (, , )` (for example: `INSERT INTO `camera`.`cameraDesc` ( `DEPT`,`DEPTNAME`,`LOCATION`) VALUES (, , )`)
- `DELETE FROM `catalog`.`table`` (for example: `DELETE FROM `camera`.`cameraDesc``)

Depending on your choice, dragging a column results in one of the following statements being inserted into the document:

- `SELECT `field` FROM `catalog`.`table`` (for example: `SELECT `DEPT` FROM `camera`.`cameraDesc``)
- `UPDATE `catalog`.`table` SET `field`=` (for example: `UPDATE `camera`.`cameraDesc` SET `DEPT`=`)
- `INSERT INTO `catalog`.`table` ( `field1`) VALUES ()` (for example: `INSERT INTO `camera`.`cameraDesc` ( `DEPT`) VALUES ()`)
- `DELETE FROM `catalog`.`table`` (for example: `DELETE FROM `camera`.`cameraDesc` WHERE `DEPT`=`)

SQL Validation

SQL validation support is offered for IBM DB2. Note that if you choose a connection that does not support SQL validation, you will receive a warning when trying to validate. The SQL document is validated using the connection from the associated transformation scenario.

Executing SQL Statements

The steps for executing an SQL statement on a relational database are as follows:

1. Configure a [transformation scenario](#) using the  **Configure Transformation Scenario(s)** action from the **Transformation** toolbar or the **Document > Transformation** menu.
A SQL transformation scenario needs a database connection. You can configure a connection using the  **Preferences** button from the SQL transformation dialog box.
The dialog box contains the list of existing scenarios that apply to SQL documents.
2. Set parameter values for SQL placeholders using the **Parameters** button from the SQL transformation dialog box. For example, in `SELECT * FROM `test`.`department` where DEPT = ? or DEPTNAME = ?` the two parameters can be configured for the place holders (?) in the transformation scenario.
When the SQL statement is executed, the first placeholder is replaced with the value set for the first parameter in the scenario, the second placeholder is replaced by the second parameter value, and so on.
 **Restriction:** When a stored procedure is called in an SQL statement executed on an SQL Server database, mixing in-line parameter values with values specified using the **Parameters** button of the scenario dialog box is not recommended. This is due to a limitation of the SQL Server driver for Java applications. An example of stored procedure that is not recommended: `call dbo.Test(22, ?)`.
3. Execute the SQL scenario by clicking the **OK** or **Apply associated** button.
The result of a SQL transformation is [displayed in a view](#) at the bottom of the Oxygen XML Developer window.
4. View more complex return values of the SQL transformation in a separate editor panel.
A more complex value returned by the SQL query (for example, an *XMLTYPE* or *CLOB* value) cannot be displayed entirely in the result table.
 - a) Right-click the cell containing the complex value.
 - b) Select the action **Copy cell** from the contextual menu.
The action copies the value in the clipboard.
 - c) Paste the value into an appropriate editor.
For example, you can paste the value in an opened XQuery editor panel of Oxygen XML Developer.

Native XML Database (NXD) Support

Native XML databases have an XML-based internal model and their fundamental unit of storage is XML. Oxygen XML Developer offers support for the following native XML databases:

- Berkeley DB XML
- eXist
- MarkLogic
- Documentum xDb (X-Hive/DB) 10
- Oracle XML DB

To watch our video demonstration about the integration between the XML native databases and Oxygen XML Developer, go to http://www.oxygenxml.com/demo/Author_Database_XML_Native.html.

Configuring Native XML Database Data Sources

This section describes the procedures for configuring the following native database data sources:

- [Berkeley DB XML](#)
- [eXist](#)
- [MarkLogic](#)
- [Documentul xDB \(X-Hive/DB\) 10](#)

Configuring Database Connections

This section describes the procedures for configuring the connections for the following native databases:

- [Berkeley DB XML](#)
- [eXist](#)
- [MarkLogic](#)
- [Documentum xDb \(X-Hive/DB\) 10](#)

How to Configure Support for Native XML Databases

This section contains procedures about configuring the support for various native XML databases.

How to Configure Berkeley DB XML Support

Follow this procedure to configure the support for a Berkeley DB XML database:

1. [Configure a Berkeley DB XML Data Source driver.](#)
2. [Configure a Berkeley DB XML Connection.](#)
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a Berkeley DB XML Data Source

Oxygen XML Developer supports Berkeley DB XML versions 2.3.10, 2.4.13, 2.4.16 & 2.5.16. The steps for configuring a data source for a Berkeley DB XML database are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *Berkeley DBXML* from the driver **Type** drop-down menu.
5. Click the **Add** button to add the Berkeley DB driver files.

The driver files for the Berkeley DB database are the following:

- `db.jar` (check for it in `[DBXML_DIR]/lib` or `[DBXML_DIR]/jar`)
- `dbxml.jar` (check for it in `[DBXML_DIR]/lib` or `[DBXML_DIR]/jar`)

Where `[DBXML_DIR]` is the Berkeley DB XML database root directory. For example, in Windows it is: `C:\Program Files\Oracle\Berkeley DB XML <version>`.

6. Click the **OK** button to finish the data source configuration.

How to Configure a Berkeley DB XML Connection

Oxygen XML Developer supports Berkeley DB XML versions 2.3.10, 2.4.13, 2.4.16 & 2.5.16. The steps for configuring a connection to a Berkeley DB XML database are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the previously configured data sources from the **Data Source** drop-down menu.
5. Enter the connection details.

- a) Set the path to the Berkeley DB XML database directory in the **Environment home directory field**. Use a directory with write access. DO NOT use the installation directory where Berkeley DB XML is installed if you do not have write access to that directory.
- b) Select the **Verbosity** level: *DEBUG*, *INFO*, *WARNING*, or *ERROR*.
- c) Optionally, you can select the check-box **Join existing environment**.
If checked, an attempt is made to join an existing environment in the specified home directory and all the original environment settings are preserved. If that fails, try reconfiguring the connection with this option unchecked.

6. Click the **OK** button to finish the connection configuration.

How to Configure eXist Support

Follow this procedure to configure the support for an eXist database:

1. [Configure a eXist Data Source driver](#).
2. [Configure a eXist Connection](#).
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure an eXist Data Source

Oxygen XML Developer supports eXist database server versions up to and including version 2.2. The steps for configuring a data source for an eXist database are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *eXist* from the driver **Type** drop-down menu.
5. Click the **Add** button to add the eXist driver files.

The following driver files should be added in the dialog box for setting up the eXist datasource. They are found in the installation directory of the eXist database server. Make sure you copy the files from the installation of the eXist server where you want to connect from Oxygen XML Developer.

- exist.jar
- lib/core/xmlldb.jar
- lib/core/xmlrpc-client-3.1.x.jar
- lib/core/xmlrpc-common-3.1.x.jar
- lib/core/ws-commons-util-1.0.x.jar
- lib/core/slf4j-api-1.x.x.jar (if available)
- lib/core/slf4j-log4j12-1.x.x.jar (if available)

The version number from the driver file names may be different for your eXist server installation.

6. Click the **OK** button to finish the connection configuration.

To watch our video demonstration about running XQuery against an eXist XML database, go to http://www.oxygenxml.com/demo/eXist_Database.html.

How to Configure an eXist Connection

The steps for configuring a connection to an eXist database are as follows:

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the previously configured data sources from the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) Set the URI to the installed eXist engine in the **XML DB URI** field.

- b) Set the user name in the **User** field.
- c) Set the password in the **Password** field.
- d) Enter the start collection in the **Collection** field.

eXist organizes all documents in hierarchical collections. Collections are like directories. They are used to group related documents together. This text field allows the user to set the default collection name.

6. Click the **OK** button to finish the connection configuration.

To watch our video demonstration about running XQuery against an eXist XML database, go to http://www.oxygenxml.com/demo/eXist_Database.html.

The Create eXist-db XML Connection Dialog Box

A quick way to create an eXist connection is to use the dedicated **Create eXist-db XML connection** dialog box. *Open the Preferences dialog box*, go to **Data Sources** and click the **Create eXist-db XML connection** link. After you fill in the fields, click **OK** and go to **Window > Show View > Data Source Explorer** to view your connection.

To create an eXist connection using this dialog box, Oxygen XML Developer expects the `exist/webstart/exist.jnlp` path to be accessible at the provided **Host** and **Port**.

How to Configure MarkLogic Support

Follow this procedure to configure the support for a MarkLogic database:

1. Download the MarkLogic driver from [MarkLogic Community site](#).
2. *Configure a MarkLogic Data Source driver.*
3. *Configure a MarkLogic Connection.*
4. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a MarkLogic Data Source

Available in the Enterprise edition only.



Note: Oxygen XML Developer supports MarkLogic version 4.0 or later.

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. Click the **New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *MarkLogic* from the driver **Type** drop-down list.
5. Click the **Add** button to add the MarkLogic driver file (`marklogic-xcc-{server_version}`, where `{server_version}` is the MarkLogic server version.)

You can download the driver file from: <http://community.marklogic.com/download>.

6. Click the **OK** button to finish the data source configuration.

How to Configure a MarkLogic Connection

Available in the Enterprise edition only.



Note: Oxygen XML Developer supports MarkLogic version 4.0 or later.

The steps for configuring a connection to a MarkLogic database are as follows:

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. Click the **New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the previously configured data sources from the **Data Source** drop-down menu.
5. Enter the connection details.
 - a) The host name or IP address of the installed MarkLogic engine in the **XDBC Host** field.

Oxygen XML Developer uses XCC connector to interact with MarkLogic XDBC server and requires the basic authentication schema to be set. Starting with version MarkLogic 4.0 the default authentication method when you create a HTTP or WebDAV Server is *digest*, so make sure to change it to *basic*.

- b) Set the port number of the MarkLogic engine in the **Port** field. A MarkLogic XDBC application server must be configured on the server on this port. This XDBC server will be used to process XQuery expressions against the server. Later, if you want to change the XDBC server, instead of editing the configuration just use the [Use it to execute queries](#) action from Data Source Explorer.
- c) Set the user name to access the MarkLogic engine in the **User** field.
- d) Set the password to access the MarkLogic engine in the **Password** field.
- e) Optionally set the URL used for browsing the MarkLogic database in the **Data Source Explorer** view in the **WebDAV URL** field.

The **Database** field specifies the database over which the XQuery expressions are executed. If you set this option to default, the database associated to the application server of the configured port is used.

6. Click the **OK** button to finish the connection configuration.

How to Configure Documentum xDb (X-Hive/DB) 10 Support

Follow this procedure to configure the support for a Documentum xDb (X-Hive/DB) 10 database:

1. [Configure a Documentum xDb Data Source driver.](#)
2. [Configure a Documentum xDb Connection.](#)
3. Use the **Data Source Explorer** view from the **Window > Show View > Data Source Explorer** menu or switch to the **Database Perspective** (available from **Window > Open Perspective > Database**).

How to Configure a Documentum xDb (X-Hive/DB) 10 Data Source

Available in the Enterprise edition only.

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *XHive* from the driver **Type** drop-down menu.
5. Click the **Add** button to add the XHive driver files.

The driver files for the Documentum xDb (X-Hive/DB) 10 database are found in the Documentum xDb (X-Hive/DB) 10 lib directory from the server installation folder:

- antlr-runtime.jar
- aspectjrt.jar
- icu4j.jar
- xhive.jar
- google-collect.jar

6. Click the **OK** button to finish the data source configuration.

How to Configure an Documentum xDb (X-Hive/DB) 10 Connection

The steps for configuring a connection to a Documentum xDb (X-Hive/DB) 10 database are as follows:



Note: The bootstrap type of X-Hive/DB connections is not supported in Oxygen XML Developer. The following procedure explains the `xhive://` protocol connection type.

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. Click the **New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the previously configured data sources from the **Data Source** drop-down menu.
5. Enter the connection details.

- a) Set the URL property of the connection in the **URL** field.
If the property is a URL of the form *xhive://host:port*, the Documentum xDb (X-Hive/DB) 10 connection will attempt to connect to a Documentum xDb (X-Hive/DB) 10 server running behind the specified TCP/IP port.
- b) Set the user name to access the Documentum xDb (X-Hive/DB) 10 engine in the **User** field.
- c) Set the password to access the Documentum xDb (X-Hive/DB) 10 engine in the **Password** field.
- d) Set the name of the database to access from the Documentum xDb (X-Hive/DB) 10 engine in the **Database** field.
- e) Check the **Run XQuery in read / write session (with committing)** checkbox if you want to end the session with a commit. Otherwise, the session ends with a rollback.

6. Click the **OK** button to finish the connection configuration.

Data Source Explorer View

The **Data Source Explorer** view displays your database connections. You can connect to a database simply by expanding the connection node. The database structure can be expanded to the column level. supports multiple simultaneous database connections and the connection tree provides an easy method for browsing them.

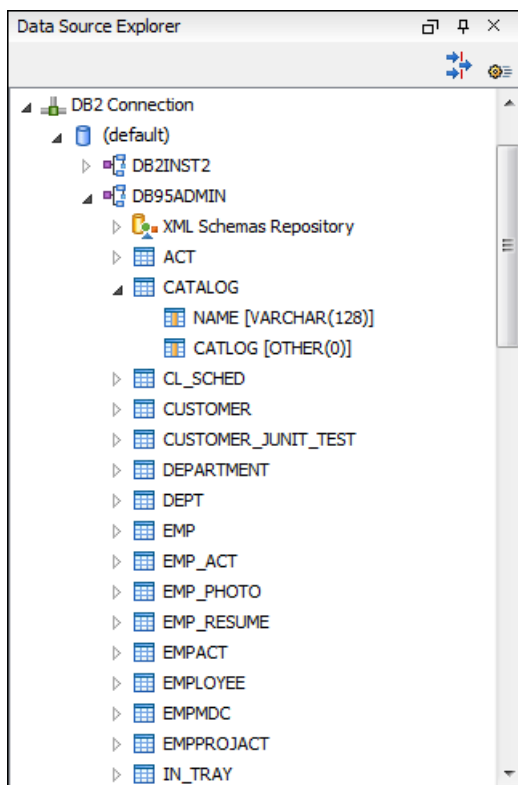


Figure 255: Data Source Explorer View

The following objects are displayed in the **Data Source Explorer** view:

-  **Connection**
-  **Collection (Catalog)**
-  **XML Schema Repository**
-  **XML Schema Component**
-  **Schema**
-  **Table**
-  **System Table**
-  **Table Column**

A  **Collection** (called *catalog* in some databases) is a hierarchical container for resources and sub-collections. There are two types of resources:

-  **XML resource** - An XML document or document fragment, selected by a previously executed XPath query.
-  **non-XML resource** -Any resource that is not recognized as XML.

 **Note:** For some connections you can add or move resources into a container by dragging them from:

- The **Project view**.
- The default file system application (for example, Windows Explorer in Windows or Finder in Mac OS X).
- Another database container.

The following actions are available in the toolbar of this view:

Filters

Opens the **Data Sources / Table Filters** [Preferences page](#), allowing you to decide which table types are displayed in the **Data Source Explorer** view.

Configure Database Sources

Opens the **Data Sources** [preferences page](#) where you can configure both data sources and connections.

Oracle XML DB Browser

Oracle XML DB is a feature of the Oracle database. It provides a high-performance, native XML storage and retrieval technology. Oxygen XML Developer allows you to browse the native Oracle XML Repository and perform various operations on the resources in the repository.

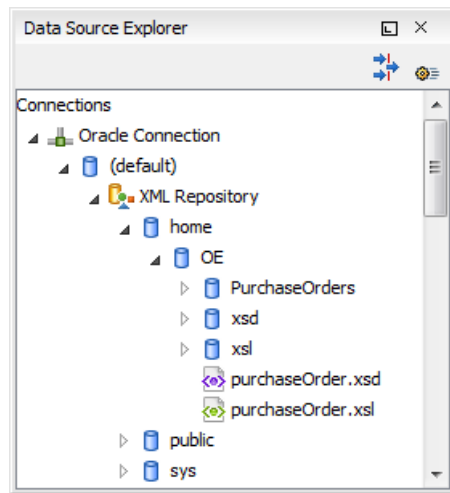


Figure 256: Browsing the Oracle XML DB Repository

The actions available at XML Repository level are as follows:

Refresh

Performs a refresh of the XML Repository.

Add container

Adds a new child container to the XML Repository.

Add resource

Adds a new resource to the XML Repository.

The actions available at container level are as follows:

**Refresh**

Performs a refresh of the selected container.

Add container

Adds a new child container to the current one.

**Add resource**

Adds a new resource to the folder.

Delete

Deletes the current container.

Properties

Shows various properties of the current container.

The actions available at resource level are as follows:

**Refresh**

Performs a refresh of the selected resource.

Open

Opens the selected resource in the editor.

Rename

Renames the current resource

Move

Moves the current resource to a new container (also available through drag and drop).

Delete

Deletes the current resource.

Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

Properties

Shows various properties of the current resource.

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

For running an XQuery transformation on collections from the XML Repository, see [a tutorial from Oracle](#).

PostgreSQL Connection

Oxygen XML Developer allows you to browse the structure of the PostgreSQL database in the **Data Source Explorer** view and open the tables in the **Table Explorer** view.

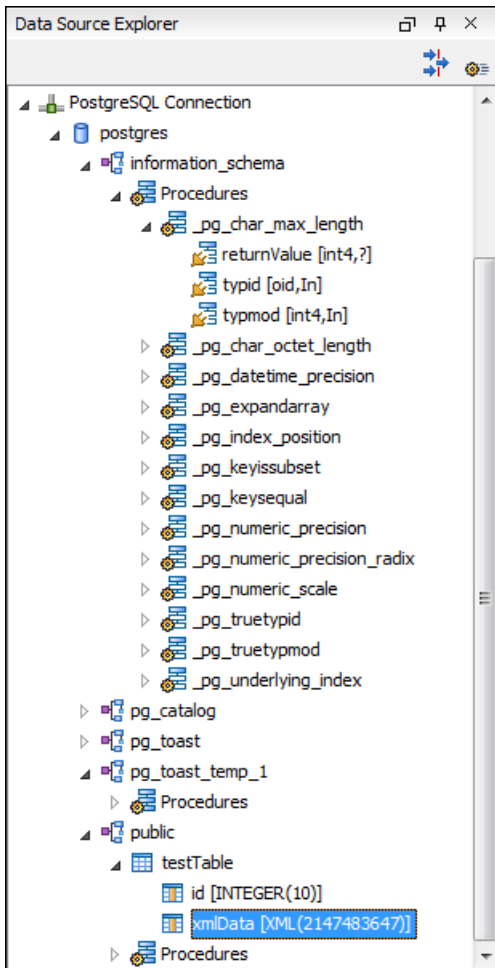


Figure 257: Browsing a PostgreSQL repository

The actions available at container level are as follows:



Refresh

Performs a refresh of the selected container.

The actions available at resource level are as follows:



Refresh

Performs a refresh of the selected database table.



Edit

Opens the selected database table in the **Table Explorer** view.



Export to XML

Exports the content of the selected database table as an XML file using [the dialog box from importing data from a database](#).

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

Berkeley DB XML Connection

This section explains the actions that are available on a Berkeley DB XML connection.

Actions Available at Connection Level

In a Berkeley DB XML repository, the actions available at connection level in the **Data Source Explorer** view are as follows:

Refresh

Performs a refresh for the sub-tree of the selected node.

Disconnect

Closes the current database connection.

Configure Database Sources

Opens [the Data Sources preferences page](#) where you can configure both data sources and connections.

Add container

Adds a new container in the repository with the following attributes:

- **Name** - The name of the new container.
- **Container type** - At creation time, every container must have a type defined for it. This container type identifies how XML documents are stored in the container. As such, the container type can only be determined at container creation time. You cannot change it when subsequent container opens. Containers can have one of the following types specified for them:
 - **Node container** - XML documents are stored as individual nodes in the container. Each record in the underlying database contains a single leaf node, its attributes and attribute values (if any), and its text nodes (if any). Berkeley DB XML also keeps the information it requires to reassemble the document from the individual nodes stored in the underlying databases. This is the default, and preferred, container type.
 - **Whole document container** - The container contains entire documents. The documents are stored without any manipulation of line breaks or whitespace.
- **Allow validation** - If checked, it causes documents to be validated when they are loaded into the container. The default behavior is to not validate documents.
- **Index nodes** - If checked, it causes indices for the container to return nodes rather than documents. The default is to index at the document level. This property has no meaning if the container type is **Whole document container**.

Properties

Displays a dialog box that contains a list of the Berkeley connection properties (*version, home location, default container type, compression algorithm, etc.*)

Actions Available at Container Level

In a Berkeley DB XML repository, the actions available at container level in the **Data Source Explorer** view are as follows:

Add Resource

Adds a new XML resource to the selected container.

Rename

Allows you to specify a new name for the selected container.

Delete

Removes the selected container from the database tree.

Edit indices

Allows you to edit the indices for the selected container.

Refresh

Performs a refresh for the sub-tree of the selected node.

Properties

Displays a dialog box with a list of properties of the Berkeley container (such as *container type*, *auto indexing*, *page size*, *validate on load*, *compression algorithm*, *number of documents*, etc.)

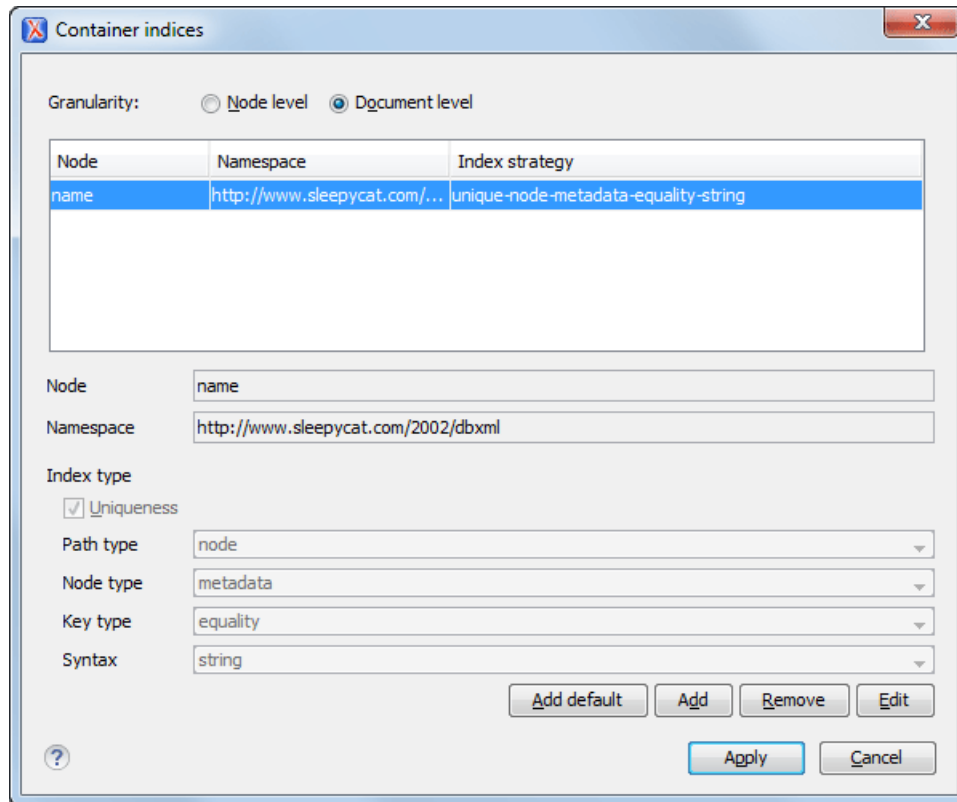


Figure 258: Container indices

The fields of the dialog box are as follows:

- Granularity:
 - **Document level** - Good option for retrieving large documents.
 - **Node level** - Good option for retrieving nodes from within documents.
- Add / Edit indices:
 - **Node** - The node name.
 - **Namespace** - The index namespace.
 - Index strategy:
 - **Index type:**
 - **Uniqueness** - Indicates whether the indexed value must be unique within the container.
 - **Path type:**
 - **node** - Indicates that you want to index a single node in the path.
 - **edge** - Indicates that you want to index the portion of the path where two nodes meet.
 - **Node type:**
 - **element** - An element node in the document content.
 - **attribute** - An attribute node in the document content.
 - **metadata** - A node found only in the metadata content of a document.
 - **Key type:**

- **equality** - Improves the performances of tests that look for nodes with a specific value.
 - **presence** - Improves the performances of tests that look for the existence of a node regardless of its value.
 - **substring** - Improves the performance of tests that look for a node whose value contains a given sub-string.
- **Syntax types** - The syntax describes the type of data the index contains and is mostly used to determine how indexed values are compared.

Actions Available at Resource Level

In a Berkeley DB XML repository, the actions available at resource level in the **Data Source Explorer** view are as follows:



Refresh

Performs a refresh of the selected resource.

Open

Opens the selected resource in the editor.

Rename

Allows you to change the name of the selected resource.

Move

Allows you to move the selected resource in a different container in the database tree (also available through drag and drop).



Delete

Removes the selected resource from the container.

Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

eXist Connection

This section explains the actions that are available on an eXist connection.

Actions Available at Connection Level

For an eXist database, the actions available at connection level in the **Data Source Explorer** view are as follows:



Configure Database Sources

Opens the **Data Sources** [preferences page](#) where you can configure both data sources and connections.

Disconnect

Closes the current database connection.



Refresh

Performs a refresh for the sub-tree of the selected node.

Actions Available at Container Level

For an eXist database, the actions available at container level in the **Data Source Explorer** view are as follows:

New File

Creates a file in the selected container.

New Collection

Creates a collection.

Import Folders

Adds the content of specified folders from the local file system.

 Import Files

Adds a set of XML resources from the local file system.

Cut

Cuts the selected containers.

Copy

Copies the selected containers.



Note: You can add or move resources into the container by dragging them from the **Project** view, the default file management application (for example, Windows Explorer on Windows or Finder on OS X), or from another database container.

Paste

Paste resources into the selected container.

Rename

Allows you to change the name of the selected collection.

 Delete

Removes the selected collection.

 Refresh

Performs a refresh of the selected container.

Properties

Allows you to view various useful properties associated with the container, such as *name*, *creation date*, *owner*, *group*, or *permissions*.

Actions Available at Resource Level

For an eXist database, the actions available at resource level in the **Data Source Explorer** view are as follows:

 Refresh

Performs a refresh of the selected resource.

Open

Opens the selected resource in the editor.

Rename

Allows you to change the name of the selected resource.

Cut

Cuts the selected resources.

Copy

Copies the selected resources.



Note: You can add or move resources into the container by dragging them from the **Project** view, the default file management application (for example, Windows Explorer on Windows or Finder on OS X), or from another database container.

Paste

Pastes the copied resources.

 Delete

Removes the selected resource from the collection.

Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

Properties

Allows you to view various useful properties associated with the resource.

Save As

Allows you to save the name of the selected binary resource as a file on disk.

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

MarkLogic Connection

Once you configure a MarkLogic connection, you can use the **Data Source Explorer** view to display all the application servers that are configured on the server. You can expand each application server and view all the modules that it is configured to use. The **Data Source Explorer** view allows you to open and edit these modules.



Note: To browse modules located in a database, directory properties must be associated with them. These directory properties are generated automatically if the *directory creation* property of the database is set to automatic. If this property is set to *manual* or *manual-enforced*, add the directory properties of the modules manually, using the XQuery function `xdmp:directory-create()`. For example, for two documents with the `/code/modules/main.xqy` and `/code/modules/imports/import.xqy` IDs, run this query: `(xdmp:directory-create('/code/modules/'), xdmp:directory-create('/code/modules/imports/'))`.

For further information about directory properties go to: <http://blakeley.com/blogofile/2012/03/19/directory-assistance/>.

When you execute or debug XQuery files opened from this view, the imported modules are better identified by the MarkLogic server. In a module, you are also able to add breakpoints that the debugger takes into account.



Note: Add breakpoints in the modules of the application server that executes the debugging.



Note: Open XQuery modules from the application server involved in the debugging or execution process.

In the **Requests** container of each application server, Oxygen XML Developer displays both the queries that are stopped for debugging purposes and the queries that are still running. To clean up the entire **Requests** container at the end of your session, right-click it and use the **Cancel all running requests** action.

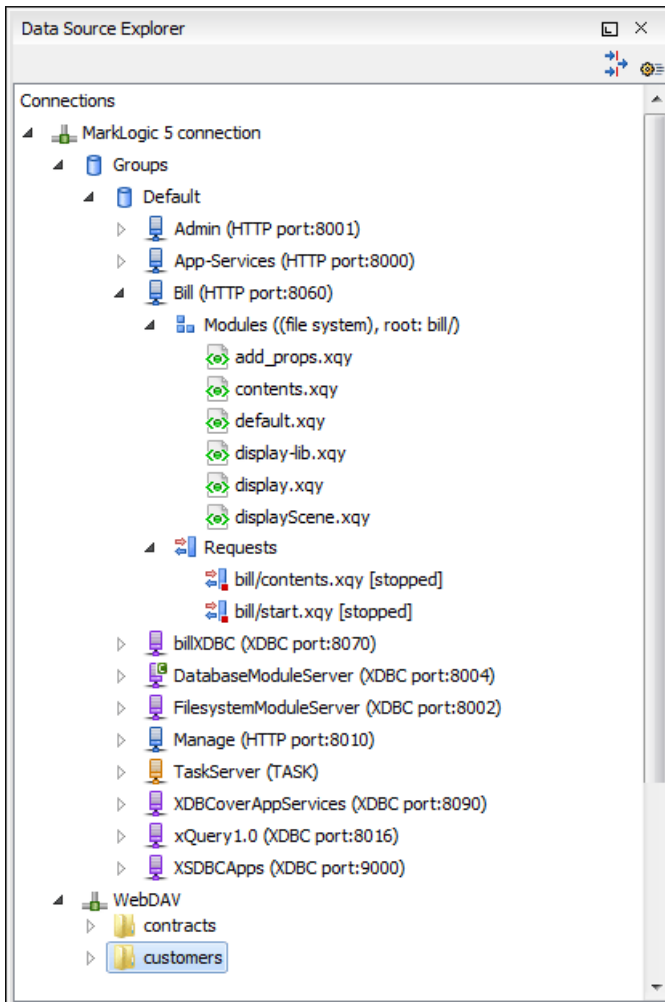


Figure 259: MarkLogic Connection in Data Source Explorer

The **Data Source Explorer** view displays all the application servers available on the MarkLogic server. To change the XDBC application server that Oxygen XML Developer uses to process XQuery expressions, select the **Use it to execute queries** option from its contextual menu.

To manage resources for a MarkLogic database through WebDAV, configure a WebDAV URL in [the MarkLogic connection](#).

The following actions are available in the contextual menu of the WebDAV connection:

- Connection level actions:

 Configure Database Sources

Opens the **Data Sources preferences page**. Here you can configure both data sources and connections.

New Folder

Creates a new folder on the server.

 Import Files

Allows you to add a new file on the server.

 Refresh

Performs a refresh of the connection.

 Find/Replace in Files

Allows you to find and replace text in multiple files from the server.

- Folder level actions:

New File

Creates a new file on the server in the current folder.

New Folder

Creates a new folder on the server.

Import Folders

Imports folders on the server.

Import Files

Allows you to add a new file on the server in the current folder.



Cut

Removes the current selection and places it in the clipboard.



Copy

Copies the current selection into the clipboard.

Rename

Allows you to change the name of the selected folder.



Delete

Removes the selected folder.



Refresh

Refreshes the sub-tree of the selected node.



Find/Replace in Files

Allows you to find and replace text in multiple files from the server.

- File level actions:



Open

Allows you to open the selected file in the editor.



Cut

Removes the current selection and places it in the clipboard.



Copy

Copies the current selection into the clipboard.

Copy Location

Copies an application-specific URL for the selected resource into the clipboard. You can use this URL for various actions, such as opening or transforming the resources.

Rename

Allows you to change the name of the selected file.



Delete

Removes the selected file.



Refresh

Performs a refresh of the selected node.



Properties

Displays the properties of the current file in a **Properties** dialog box.



Find/Replace in Files

Allows you to find and replace text in multiple files from the server.

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

Documentum xDb (X-Hive/DB) Connection

This section explains the actions that are available on a Documentum xDb (X-Hive/DB) 10 connection.

Actions Available at Connection Level

For a Documentum xDb (X-Hive/DB) 10 database, the actions available at connection level in the **Data Source Explorer** view are as follows:

**Refresh**

Performs a refresh for the sub-tree of the selected node.

Disconnect

Closes the current database connection.

**Configure Database Sources**

Opens the **Data Sources** [preferences page](#) where you can configure both data sources and connections.

Add library

Allows you to add a new library.

**Insert XML Instance**

Allows you to add a new XML resource directly into the database root. See [Documentum xDb \(X-Hive/DB\) 10 Parser Configuration](#) for more details.

**Insert non-XML Instance**

Allows you to add a new non-XML resource directly in the database root.

Properties

Displays the connection properties.

Actions Available at Catalog Level

For a Documentum xDb (X-Hive/DB) 10 database, the actions available at catalog level in the **Data Source Explorer** view are as follows:

**Refresh**

Performs a refresh of the selected catalog.

Add as models

Allows you to add a new abstract schema model to the selected catalog.

Set default schema

Allows you to set a default DTD to be used for parsing. It is not possible to set a default XML Schema.

Clear default schema

Allows you to clear the default DTD. The action is available only if there is a DTD set as default.

Properties

Displays the catalog properties.

Actions Available at Schema Resource Level

For a Documentum xDb (X-Hive/DB) 10 database, the actions available at schema resource level in the **Data Source Explorer** view are as follows:

**Refresh**

Performs a refresh of the selected schema resource.

**Open**

Opens the selected schema resource in the editor.

Rename

Allows you to change the name of the selected schema resource.

Save As

Allows you to save the selected schema resource as a file on disk.

 Delete

Removes the selected schema resource from the catalog.

Copy location

Allows you to copy the URL of the selected schema resource to the clipboard.

Set default schema

Allows you to set the selected DTD to be used as default for parsing. The action is available only for DTD.

Clear default schema

Allows you to unset the selected DTD. The action is available only if the selected DTD is the current default to be used for parsing.

Actions Available at Library Level

For a Documentum xDb (X-Hive/DB) 10 database, the actions available at library level in the **Data Source Explorer** view are as follows:

 Refresh

Performs a refresh of the selected library.

Add library

Adds a new library as a child of the selected library.

Add local catalog

Adds a catalog to the selected library. By default, only the root-library has a catalog, and all models are stored there.

 Insert XML Instance

Allows you to add a new XML resource to the selected library. See [Documentum xDb \(X-Hive/DB\) 10 Parser Configuration](#) for more details.

 Insert non-XML Instance

Allows you to add a new non-XML resource to the selected library.

Rename

Allows you to specify a new name for the selected library.

Move

Allows you to move the selected library to a different one (also available through drag and drop).

 Delete

Removes the selected library.

Properties

Displays the library properties.

Actions Available at Resource Level

When an XML instance document is added for a Documentum xDb (X-Hive/DB) 10 database, the actions available at resource level in the **Data Source Explorer** view are as follows:

 Refresh

Performs a refresh of the selected resource.

Open

Opens the selected resource in the editor.

Rename

Allows you to change the name of the selected resource.

Move

Allows you to move the selected resource into a different library in the database tree (also available through drag and drop).



Note: You can copy or move resources by dragging them from another database catalog.

Save As

Allows you to save the selected binary resource as a file on disk.

✕ Delete

Removes the selected resource from the library.

Copy location

Allows you to copy the URL of the selected resource to the clipboard.

Add AS model

Allows you to add an XML schema to the selected XML resource.

Set AS model

Allows you to set an active AS model for the selected XML resource.

Clear AS model

Allows you to clear the active AS model of the selected XML resource.

Properties

Displays the resource properties. Available only for XML resources.

Compare

Compares the resources using Diff Files (this action is available in the contextual menu of two selected resources).

Validation of an XML resource stored in an Documentum xDb (X-Hive/DB) 10 database is done against the schema associated with the resource in the database.

Documentum xDb (X-Hive/DB) 10 Parser Configuration for Adding XML Instances

When an XML instance document is added to a Documentum xDb (X-Hive/DB) 10 connection or library, it is parsed with an internal XML parser of the database server. The following options are available for configuring this parser:

- DOM Level 3 parser configuration parameters. More about each parameter can be found here: [DOM Level 3 Configuration](#).
- Documentum xDb (X-Hive/DB) 10 specific parser parameters (for more information, consult the Documentum xDb (X-Hive/DB) 10 manual):
 - **xhive-store-schema** - If checked, the corresponding DTD or XML schemas are stored in the catalog during validated parsing.
 - **xhive-store-schema-only-internal-subset** - Stores only the internal sub-set of the document (not an external sub-set). This option modifies the **xhive-store-schema** (only has a function when that parameter is set to true, and when a DTD is involved). Select this option if you only want to store the internal sub-set of the document (not the external sub-set).
 - **xhive-ignore-catalog** - Ignores the corresponding DTD and XML schemas in the catalog during validated parsing.
 - **xhive-psvi** - Stores **psvi** information about elements and attributes. Documents parsed with this feature turned on give access to **psvi** information and enable support of data types by XQuery queries.
 - **xhive-sync-features** - With this convenience setting turned on, parameter settings of `XhiveDocumentIf` are synchronized with the parameter settings of `LSParser`. Note that parameter settings **xhive-psvi** and **schema-location** are always synchronized.

Troubleshooting Documentum xDB

Cannot save the file. DTD factory class org.apache.xerces.impl.dv.dtd.DTDDVFactoryImpl does not extend from DTDDVFactory

I am able to access my XML Database in the Data Source Explorer and open files for reading but when I try to save changes to a file back into the database, I receive the following error: "Cannot save the file. DTD factory class org.apache.xerces.impl.dv.dtd.DTDDVFactoryImpl does not extend from DTDDVFactory." How can I fix this?

Answer:

xhive.jar contains a MANIFEST.MF with a classpath:

```
Class-Path: core/antlr-runtime.jar core/aspectjrt.jar core/fastutil-shrunked.jar
            core/google-collect.jar core/icu4j.jar core/lucene-regex.jar core/lucene.jar
            core/serializer.jar core/xalan.jar core/xercesImpl.jar
```

Since the driver was configured to use xhive.jar directly from the xDB installation (where many other jars are located), core/xercesImpl.jar from the xDB installation directory is loaded even though it is not specified in the list of jars from the data source driver configuration (it is in the classpath from xhive.jar's MANIFEST.MF). A simple workaround for this issue is to copy **ONLY** the jar files used in the driver configuration to a separate folder and configure the data source driver to use them from there.

XQuery and Databases

XQuery is a native XML query language that is useful for querying XML views of relational data to create XML results. It also provides the mechanism to efficiently and easily extract information from Native XML Databases (NXD) and relational data. The following database systems supported in Oxygen XML Developer offer XQuery support:

- *Native XML Databases:*
 - Berkeley DB XML
 - eXist
 - MarkLogic (validation support available starting with version 5)
 - Documentum xDb (X-Hive/DB) 10
- *Relational Databases:*
 - IBM DB2
 - Microsoft SQL Server (validation support not available)
 - Oracle (validation support not available)

Build Queries with Drag and Drop from the Data Source Explorer View

When a query is edited in the XQuery editor, the XPath expressions can be composed quickly by dragging them from the **Data Source Explorer** view and dropping them into the editor panel.

1. [Configure the data source](#) to the relational database.
2. [Configure the connection](#) to the relational database.
3. Browse the connection in the **Data Source Explorer** view, expanded to the table or column that you want to insert in the query.
4. Drag the table or column name to the XQuery editor panel.
5. Drop the table or column name where the XPath expression is needed.

An XPath expression that selects the dragged name is inserted in the XQuery document at the cursor position.

XQuery Transformation

XQuery is designed to retrieve and interpret XML data from any source, whether it is a database or document. Data is stored in relational databases but it is often required that the data be extracted and transformed as XML when interfacing to other components and services. Also, it is an XPath-based querying language supported by most NXD vendors. To perform a query, you need an XQuery transformation scenario.


1. Configure a data source for the database.

The data source can be *relational* or *XML native*.

2. Configure an XQuery transformation scenario.

- a) Click the  **Configure Transformation Scenario** toolbar button or go to menu **Document > Transformation > Configure Transformation Scenario**.

The **Configure Transformation Scenario** dialog box is opened.

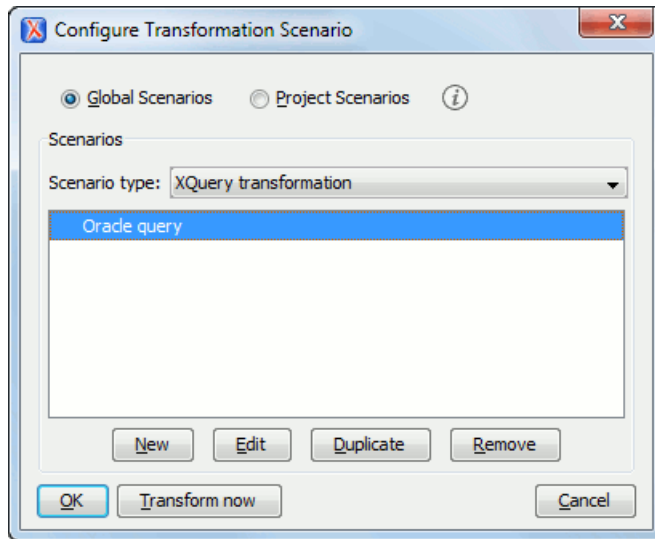

- b) Click the **New** button in the dialog box.

The dialog box for editing an XQuery scenario is opened.

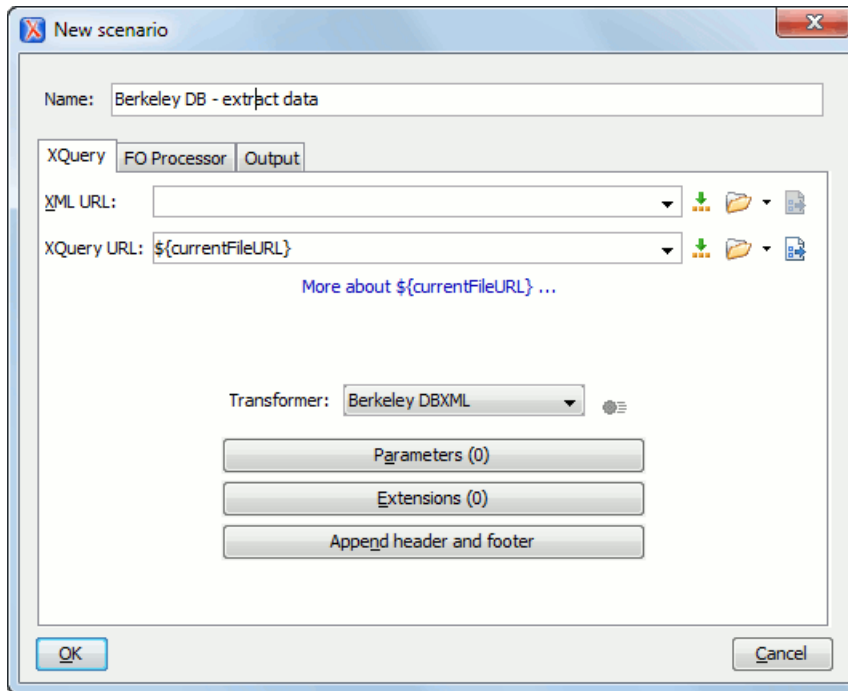


Figure 260: Edit Scenario Dialog Box

- c) Insert the scenario name in the dialog box for editing the scenario.
- d) Choose the database connection in the **Transformer** drop-down list.
- e) Configure any other parameters as needed.

For an XQuery transformation, the output tab has an option called **Sequence** that allows you to run an XQuery in lazy mode. The amount of data extracted from the database is controlled from the option [Size limit on Sequence view](#). If you choose **Perform FO Processing** in the **FO Processor** tab, the **Sequence** option is ignored.

- f) Click the **OK** button to finish editing the scenario.

Once the scenario is associated with the XQuery file, the query can include calls to specific XQuery functions that are implemented by that engine. The available functions depend on the target database engine selected in the scenario. For example, for eXist and Berkeley DB XML, [the Content Completion Assistant](#) lists the functions supported by that database engine. This is useful for only inserting calls to the supported functions (standard XQuery functions or extension ones) into the query .



Note: An XQuery transformation is executed against a Berkeley DB XML server as a transaction using the query transaction support of the server.

3. Run the scenario.

To view a more complex value returned by the query that cannot be entirely displayed in the XQuery query result table at the bottom of the Oxygen XML Developer window (for example, an XMLTYPE or CLOB value), do the following:

- Right-click that table cell.
- Select the **Copy cell** action from the contextual menu to copy the value into the clipboard.
- Paste the value wherever you need it (for example, in an opened XQuery editor panel of Oxygen XML Developer).

XQuery Database Debugging

This section describes the procedures for debugging XQuery transformations that are executed against MarkLogic and Berkeley DB XML databases.

Debugging with MarkLogic

To start a debug session against the MarkLogic engine, configure a [MarkLogic data source](#) and a [MarkLogic connection](#). Make sure that the debugging support is enabled in the MarkLogic server that Oxygen XML Developer accesses. On the server side, debugging must be activated in the XDBC server and in the *Task Server* section of the server control console (the switch *debug allow*). If the debugging is not activated, the MarkLogic server reports the DBG-TASKDEBUGALLOW error.

The MarkLogic XQuery debugger integrates seamlessly into the [XQuery Debugger perspective](#). If you have a MarkLogic scenario configured for the XQuery file, you can choose to [debug the scenario](#) directly. If not, switch to the XQuery Debugger perspective, open the XQuery file in the editor, and select the MarkLogic connection in the XQuery engine selector from the [debug control toolbar](#). For general information about how a debugging session is started and controlled see the [Working with the Debugger](#) section.

If you want to debug an XQuery file stored on the MarkLogic server, we recommend you to use the **Data Source Explorer** view to open the module and start the debugging session. This improves the resolving of any imported modules.

Oxygen XML Developer supports collaborative debugging. This feature allows multiple users to participate in the same debugging session. You can start a debugging session and at a certain point another user can continue it.

In a MarkLogic debugging session, when you add a breakpoint on a line where the debugger never stops, Oxygen XML Developer displays a warning message. These warnings are displayed for breakpoints you add either in the main XQuery (which you can open locally or from the server), or for breakpoints you add in any XQuery that is opened from the connection that participates in the debugging session.

Remote Debugging with MarkLogic

The HTTP and the XDBC servers involved in the debugging session must have the same modules configuration.

To watch our video demonstration about the XQuery debugger for MarkLogic, go to <http://oxygenxml.com/demo/XQueryDebuggerforMarkLogic.html>.

Peculiarities and Limitations of the MarkLogic Debugger

MarkLogic debugger has the following peculiarities and limitations:

- Debugging support is available only for MarkLogic server versions 4.0 or newer.
- For MarkLogic server versions 4.0 or newer, there are three XQuery syntaxes that are supported: '0.9-ml' (inherited from MarkLogic 3.2), '1.0-ml', and '1.0'.
- The local debugger user interface presents all the debugging steps that the MarkLogic server executes and the results or possible errors of each step.
- All declared variables are presented as strings. The **Value** column of the **Variables** view contains the expression from the variable declaration. It can be evaluated by copying the expression with the **Copy value** action from the contextual menu of [the Variables view](#) and pasting it in [the XWatch view](#).
- There is no support for [Output to Source Mapping](#).
- There is no support for [showing the trace](#).
- You can set [Breakpoints](#) in imported modules in one of the following cases:
 - When you open the module from the context of the application server involved in the debugging, using the **data source explorer**.
 - When the debugger automatically opens the modules in the Editor.
- No breakpoints are set in modules from the same server that are not involved in the current debugging session.
- No support for [profiling](#) when an XQuery transformation is executed in the debugger.

Debugging Queries Which Import Modules

When debugging queries on a MarkLogic database that imports modules stored in the database, the recommended steps for placing a *breakpoint* in a module are as follows:

1. Start the debugging session with the action  **Debug Scenario** from the **Transformation** toolbar or the  **XQuery Debugger** toolbar button.

2. Click  **Step into** repeatedly until reaching the desired module.
3. Add the module to the current *project* for easy access.
4. Set breakpoints in the module as needed.
5. *Continue debugging* the query.

When starting a new debugging session, make sure that the modules that you will debug are already opened in the editor. This is necessary so that the breakpoints in the modules will be considered. Also, make sure that there are no other opened modules that are not involved in the current debugging session.

Debugging with Berkeley DB XML

The Berkeley DB XML database added a debugging interface starting with version 2.5. The current version is supported in the Oxygen XML Developer XQuery Debugger. *The same restrictions and peculiarities* apply for the Berkeley debugger as for the MarkLogic debugger.

WebDAV Connection

This section explains how to work with a WebDAV connection in the **Data Source Explorer** view.

How to Configure a WebDAV Connection

By default, Oxygen XML Developer is configured to contain a WebDAV data source connection called **WebDAV (S)FTP**. Based on this data source, you can create a WebDAV connection for browsing and editing data from a database that provides a WebDAV interface. The connection is available in *the Data Source Explorer view*. The steps for configuring a WebDAV connection are as follows:

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. In the **Connections** panel, click the **New** button.
3. Enter a unique name for the connection.
4. Select one of the WebDAV data sources in the **Data Source** drop-down menu.
5. Enter the connection details:
 - a) Set the URL to the WebDAV repository in the field **WebDAV URL**.
 - b) Set the user name that is used to access the WebDAV repository in the **User** field.
 - c) Set the password that is used to access the WebDAV repository in the **Password** field.
6. Click the **OK** button.

To watch our video demonstration about the WebDAV support in Oxygen XML Developer, go to http://www.oxygenxml.com/demo/WebDAV_Support.html.

WebDAV Connection Actions

This section explains the actions that are available for a WebDAV connection in the **Data Source Explorer** view.

Actions Available at Connection Level

The contextual menu of a WebDAV connection in the **Data Source Explorer** view contains the following actions:

Configure Database Sources

Opens the **Data Sources preferences page**. Here you can configure both data sources and connections.

Disconnect

Stops the connection.

Import Files

Allows you to add a new file on the server.

New Folder

Creates a new folder on the server.

**Refresh**

Performs a refresh of the connection.

**Find/Replace in Files**

Allows you to find and replace text in multiple files from the server.

Actions Available at Folder Level

The contextual menu of a folder node in a WebDAV connection in the **Data Source Explorer** view contains the following actions:

New File

Creates a new file on the server in the current folder.

New Folder

Creates a new folder on the server.

Import Folders

Imports folders on the server.

**Import Files**

Allows you to add a new file on the server in the current folder.

**Cut**

Removes the current selection and places it in the clipboard.

**Copy**

Copies the current selection into the clipboard.

**Paste**

Pastes the copied selection.

Rename

Allows you to change the name of the selected folder.

**Delete**

Removes the selected folder.

**Refresh**

Refreshes the sub-tree of the selected node.

**Find/Replace in Files**

Allows you to find and replace text in multiple files from the server.

Actions Available at File Level

The contextual menu of a file node in a WebDAV connection in the **Data Source Explorer** view contains the following actions:

**Open**

Allows you to open the selected file in the editor.

**Cut**

Removes the current selection and places it in the clipboard.

**Copy**

Copies the current selection into the clipboard.

Copy Location

Copies an application-specific URL for the selected resource into the clipboard. You can use this URL for various actions, such as opening or transforming the resources.

Rename

Allows you to change the name of the selected file.

**Delete**

Removes the selected file.

**Refresh**

Performs a refresh of the selected node.

**Properties**

Displays the properties of the current file in a **Properties** dialog box.

**Find/Replace in Files**

Allows you to find and replace text in multiple files from the server.

BaseX Support

This section explains how to configure the BaseX XML database support. The BaseX support is composed of two parts:

- Resource management in the **Data Source Explorer** view.
- XQuery execution.

Resource Management

Resource management is available by creating a WebDAV connection to the BaseX server.

First of all, make sure the BaseX HTTP Server is started. For details about starting the BaseX HTTP server, go to http://docs.basex.org/wiki/Startup#BaseX_HTTP_Server. The configuration file for the HTTP server is named `.basex` and is located in the BaseX installation directory. This file helps you to find out the port on which the HTTP server is running. The default port for BaseX WebDAV is 8984.

To ensure that everything is functioning, open a WebDAV URL inside a browser and check to see if it works. For example, the following URL retrieves a document from a database named TEST:

`http://localhost:8984/webdav/TEST/etc/factbook.xml`.

Once you are sure that the BaseX WebDAV service is working, you can configure the WebDAV connection in Oxygen XML Developer as described in [How to Configure a WebDAV Connection](#) on page 564. The WebDAV URL should resemble this: `http://{hostname}:{port}/webdav/`. If the BaseX server is running on your own machine and it has the default configuration, the data required by the WebDAV connection is:

- WebDAV URL: `http://localhost:8984/webdav`
- User: `admin`
- Password: `admin`

Once the WebDAV connection is created, you can start browsing using [the Data Source Explorer view](#).

XQuery Execution

XQuery execution is possible through an XQJ connection.

BaseX XQJ Data Source

First of all, create an XQJ data source as described in [How to Configure an XQJ Data Source](#) on page 486. The BaseX XQJ API-specific files that must be added in the configuration dialog box are `xqj-api-1.0.jar`, `xqj2-0.1.0.jar` and `basex-xqj-1.2.3.jar` (the version names of the JAR file may differ). These libraries can be downloaded from xqj.net/basex/basex-xqj-1.2.3.zip. As an alternative, you can also find the libraries in the BaseX installation directory, in the **lib** sub-directory.

BaseX XQJ Connection

The next step is to create an XQJ connection as described in [How to Configure an XQJ Connection](#) on page 486.

For a default BaseX configuration, the following connection details apply (you can modify them when necessary):

- *Port*: 1984
- *serverName*: localhost
- *user*: admin
- *password*: admin

XQuery Execution

Now that the XQJ connection is configured, open the XQuery file you want to execute in Oxygen XML Developer and create a *Transformation Scenario* as described in [XQuery Transformation](#) on page 427. In the **Transformer** drop-down menu, select the name of the XQJ connection you created. Apply the transformation scenario and the XQuery will be executed.

Chapter

14

Importing Data

Topics:

- [*Import from Text Files*](#)
- [*Import from MS Excel Files*](#)
- [*Import Database Data as an XML Document*](#)
- [*Import from HTML Files*](#)
- [*Import Content Dynamically*](#)

Computer systems and databases contain data in incompatible formats and one of the most time-consuming activities has been to exchange data between these systems. Converting the data to XML can greatly reduce complexity and create data that can be read by different types of applications.

Oxygen XML Developer offers support for importing text files, MS Excel files, Database Data, and HTML files into XML documents. The XML documents can be further converted into other formats using the [*Transform features*](#).

Import from Text Files

To import a text file into an XML file, follow these steps:

1. Go to **File > Import > Text File**.
The **Select text file** dialog box is displayed.
2. Select the URL of the text file.
3. Select the encoding of the text file.
4. Click the **Next** button.
The **Import Criteria** dialog box is displayed.

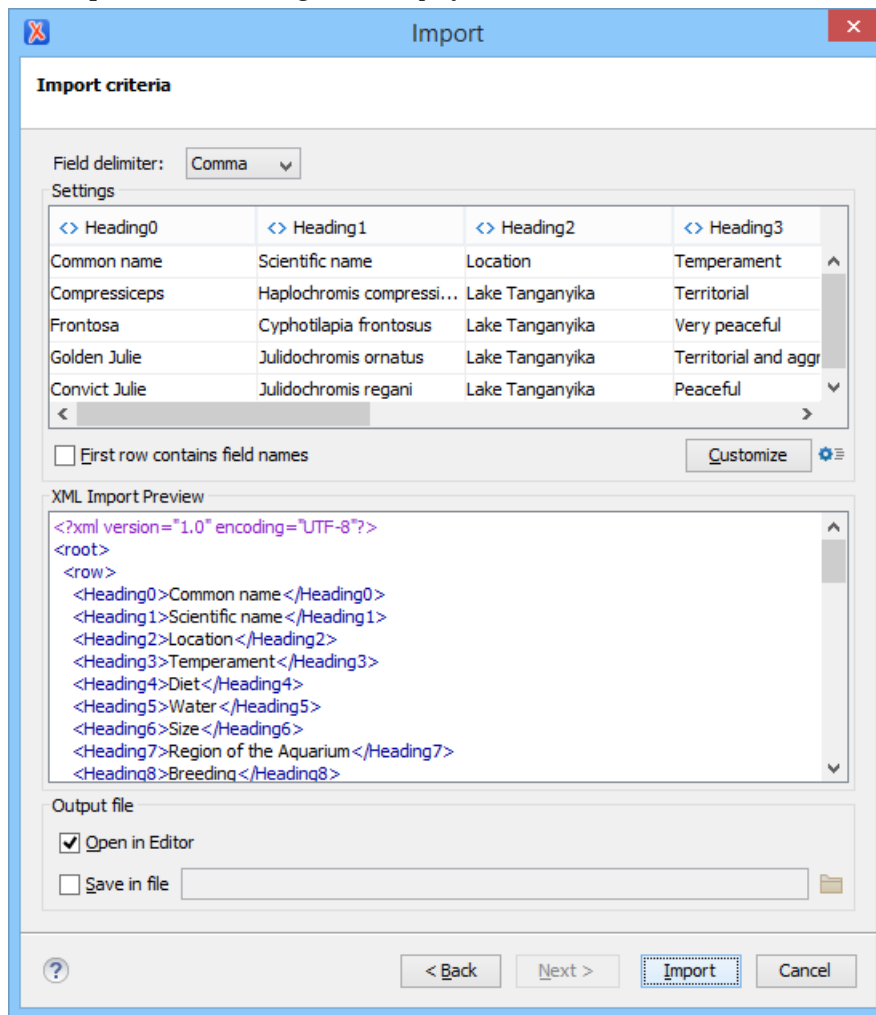


Figure 261: Import Criteria Dialog Box

5. Configure the settings for the conversion.
 - a) Select the **Field delimiter** for the import settings. You can choose between the following: Comma, Semicolon, Tab, Space, or Pipe.
 - b) The **Import settings** section presents the input data in a tabular form. By default, all data items are converted to element content (<> symbol), but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (× symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.

- c) **First row contains field names** - If this option is enabled, the default column headers are replaced (where such information is available) by the content of the first row. In other words, the first row is interpreted as containing the field names. The changes are also visible in the preview panel.
 - d) **Customize** - This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.
 - e)  **Import Settings** - Clicking this button opens the [Import Preferences](#) on page 787 page that allows you to configure more import options.
 - f) The **XML Import Preview** panel contains an example of what the generated XML document looks like.
 - g) **Open in editor** - If checked, the new XML document created from the imported text file is opened in the editor.
 - h) **Save in file** - If checked, the new XML document is saved in the specified path.
6. Click **Import** to generate the XML document.

Import from MS Excel Files

By default, importing Excel 97/2000/XP/2003 formats are supported out-of-the-box. To import spreadsheet data from Excel 2007 or newer, additional libraries are needed before using this procedure. See [Import Data from MS Excel 2007 or Newer](#) on page 573 for instructions on adding the additional libraries.

Oxygen XML Developer offers support for importing MS Excel Files.

To import an Excel file into an XML file, follow these steps:

1. Go to **File > Import > MS Excel file**.
2. Select the URL of the Excel file.

The sheets of the document you are importing are presented in the **Available Sheets** section of this dialog box.

3. Click the **Next** button.
Opens the **Import criteria** dialog box.

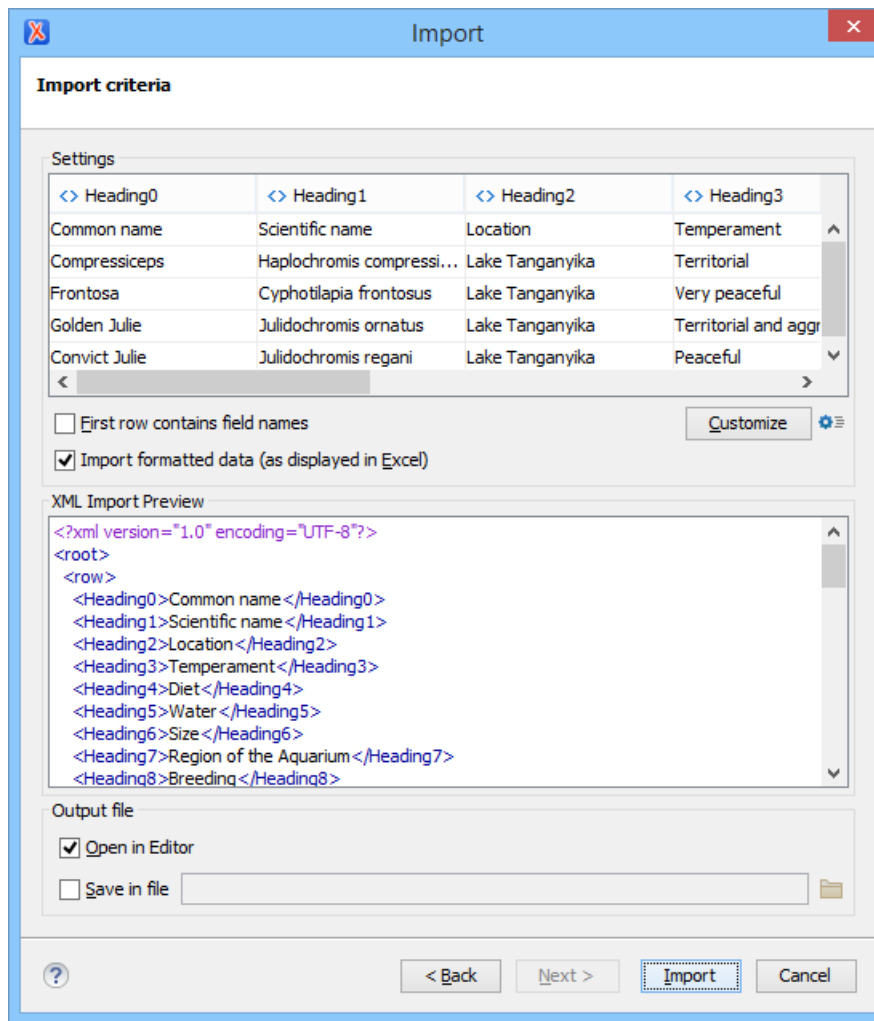


Figure 262: Import Criteria Dialog Box

4. Configure the settings for the conversion.
 - a) The **Import settings** section presents the input data in a tabular form. By default, all data items are converted to element content (<> symbol), but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (x symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.
 - b) **First row contains field names** - If this option is enabled, the default column headers are replaced (where such information is available) by the content of the first row. In other words, the first row is interpreted as containing the field names. The changes are also visible in the preview panel.
 - c) **Customize** - This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.
 - d) **Import Settings** - Clicking this button opens the *Import Preferences* on page 787 page that allows you to configure more import options.
 - e) **Import formatted data (as displayed in Excel)** - If this option is selected, the imported data retains the Excel styling. If deselected, the data formatting is not imported.
 - f) The **XML Import Preview** panel contains an example of what the generated XML document looks like.
 - g) **Open in editor** - If checked, the new XML document created from the imported file is opened in the editor.
 - h) **Save in file** - If checked, the new XML document is saved in the specified path.

5. Click **Import** to generate the XML document.

Import Data from MS Excel 2007 or Newer

To import spreadsheet data from Excel 2007 or newer (.xlsx), Oxygen XML Developer needs additional libraries from the release 3.10 of the Apache POI project.

To add the additional libraries, follow these steps:

1. Download version 3.10 of the Apache POI project from <http://archive.apache.org/dist/poi/release/bin/>. The specific ZIP file that you need is: poi-bin-3.10-FINAL-20140208.zip.
2. Unpack poi-bin-3.10-FINAL-20140208.zip.
3. Copy the following .jar files in the lib directory of the installation folder of Oxygen XML Developer :
 - dom4j-1.6.1.jar
 - poi-ooxml-3.10-FINAL-20140208.jar
 - poi-ooxml-schemas-3.10-FINAL-20140208.jar
 - xmlbeans-2.3.0.jar

Import Database Data as an XML Document

To import the data from a relational database table as an XML document, follow these steps:

1. Go to **File > Import > Database Data** to start the **Import** wizard.

This opens a **Select database table** dialog box that lists all the defined database connections:

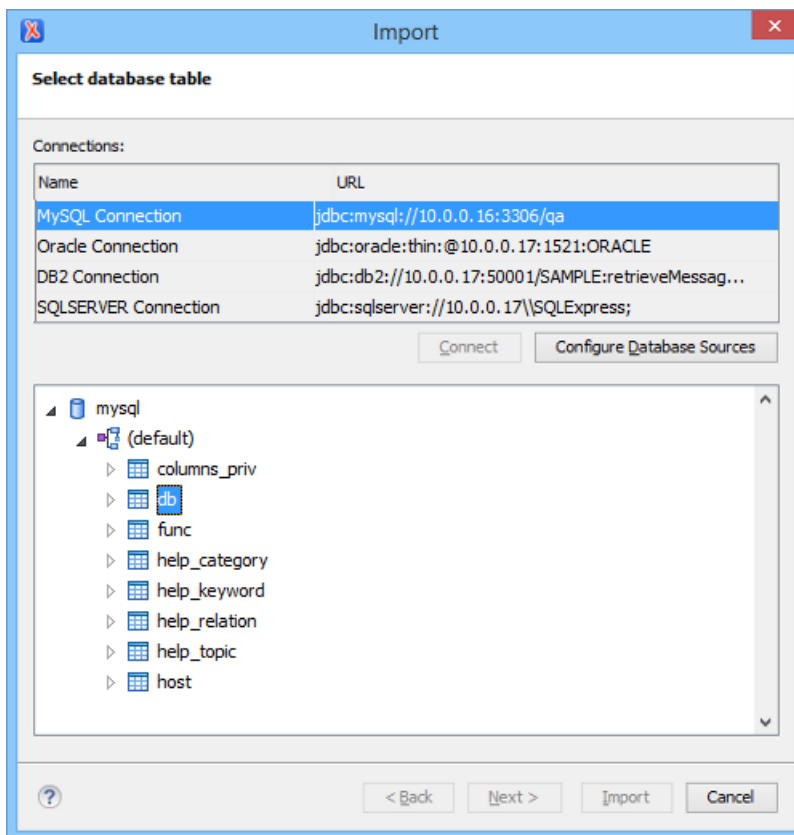


Figure 263: Select Database Table Dialog Box

2. Select the connection to the database that contains the appropriate data.
Only connections configured in relational data sources can be used to import data.
3. If you want to edit, delete, or add a data source or connection, click the **Configure Database Sources** button.
The **Preferences/Data Sources** option page is opened.
4. Click **Connect**.
5. In the list of sources, expand a schema and choose the required table.
6. Click the **Next** button.

The **Import Criteria** dialog box is opened with a default query string in the **SQL Query** pane.

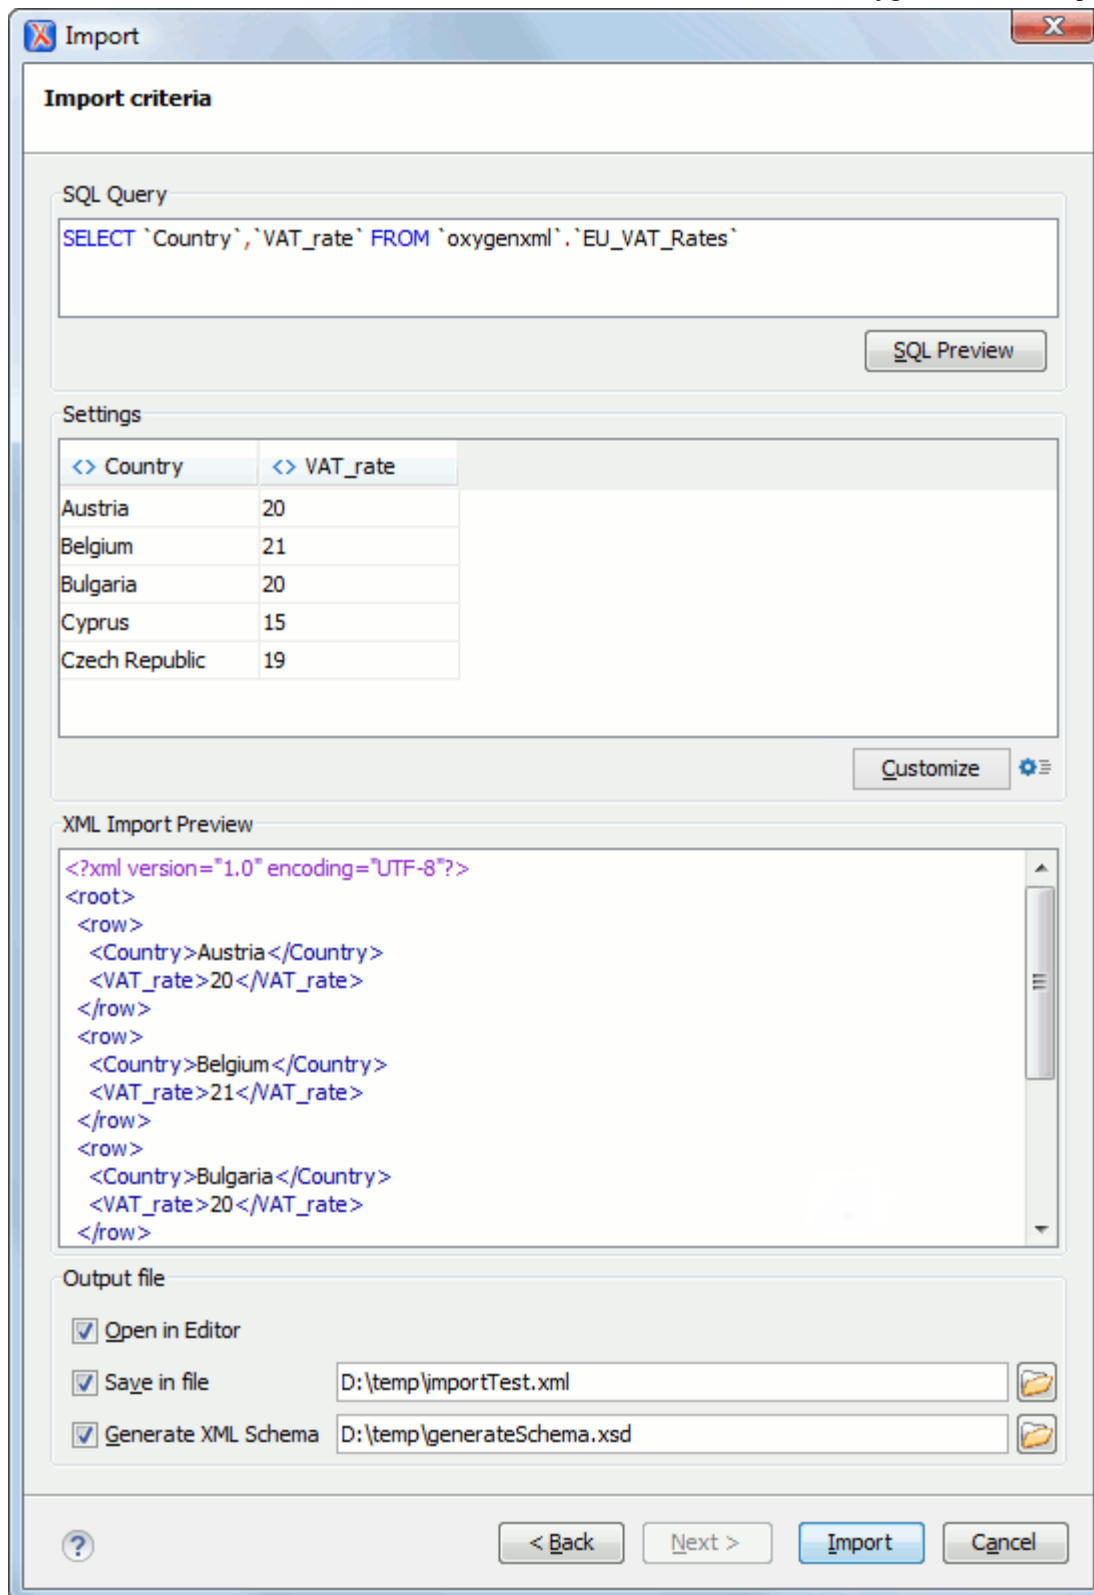


Figure 264: Import from Database Criteria Dialog Box

7. Configure the settings for the conversion.
 - a) **SQL Preview** - If this button is pressed, the **Settings** pane displays the labels that are used in the XML document and the first five lines from the database. By default, all data items are converted to element content (<> symbol),

but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (× symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.

- b) **Customize** - This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.
- c)  **Import Settings** - Clicking this button opens the *Import Preferences* on page 787 page that allows you to configure more import options.
- d) The **XML Import Preview** panel contains an example of what the generated XML document looks like.
- e) **Open in editor** - If checked, the new XML document created from the imported file is opened in the editor.
- f) **Save in file** - If checked, the new XML document is saved in the specified path.
- g) **Generate XML Schema** - Allows you to specify the path of the generated XML Schema file.

8. Click **Import** to generate the XML document.

Import from HTML Files

Oxygen XML Developer offers support for importing HTML files as an XML document.

To import from HTML files, follow these steps:

1. Go to **File > Import > HTML File**.
The **Import HTML** dialog box is displayed.
2. Enter the URL of the HTML document.
3. Select the type of the resulting XHTML document:
 - XHTML 1.0 Transitional
 - XHTML 1.0 Strict
4. Click the **OK** button.

The resulting document is an XHTML file containing a DOCTYPE declaration that references the XHTML DTD definition on the Web. The parsed content of the imported file is transformed to XHTML Transitional or XHTML Strict depending on the option you chose when performing the import operation.

Import Content Dynamically

Along with the built-in support for various useful URL protocols (such as HTTP or FTP), Oxygen XML Developer also provides special support for a *convert* protocol that can be used to chain predefined processors to import content from various sources dynamically.

A dynamic conversion URL chains various processors that can be applied in sequence on a target resource and has the following general syntax:

```
convert:/processor=xslt;ss=urn:processors:excel2d.xsl/processor=excel!/urn:files:sample.xls
```

The previous example first applies a processor called `excel` on a target identified by the identifier `urn:files:sample.xls` and converts the Excel™ resource to XML. The second applied processor (`xslt`) applies an XSLT stylesheet identified using the identifier `urn:processors:excel2d.xsl` over the content resulting from the first applied processor. These identifiers are all mapped to real resources on disk via an *XML catalog* that is configured in the application, as in the following example:

```
<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">
  <rewriteURI uriStartString="urn:files:" rewritePrefix="./resources/">
```

```
<rewriteURI uriStartString="urn:processors:" rewritePrefix="./processors/" />
</catalog>
```

This type of URL can be opened in the application by using the **Open URL** action from the **File** menu. It can also be referenced from existing XML resources via *xi:include* or from *DITA maps* as topic references.

A *GitHub* project that contains various dynamic conversion samples for producing DITA content from various sources (and then publishing it) can be found here: <https://github.com/oxygenxml/dita-glass>.

Conversion Processors

A set of predefined conversion processors is provided in Oxygen XML Developer out-of-the box. Each processor has its own parameters that can be set to control the behavior of the conversion process. All parameters that are resolved to resources are passed through the XML catalog mapping.

The following predefined conversion processors are included:

- **xslt Processor** - Converts an XML input using XSLT 2.0 processing. The **ss** parameter indicates the stylesheet resource to be loaded. All other specified parameters will be set as parameters to the XSLT transformation.

```
convert:/processor=xslt;ss=urn:processors:convert.xsl;p1=v1!/urn:files:sample.xml
```

- **xquery Processor** - Converts an XML input using XQuery processing. The **ss** parameter indicates the XQuery script to be loaded. All other specified parameters will be set as parameters to the XSLT transformation.

```
convert:/processor=xquery;ss=urn:processors:convert.xquery;p1=v1!/urn:files:sample.xml
```

- **excel Processor** - Converts an Excel™ input to an XML format that can be later converted by other piped processors. It has a single parameter **sn**, which indicates the name of the sheet that needs to be converted. If this parameter is missing, the XML will contain the combined content of all sheets included in the Excel™ document.

```
convert:/processor=excel;sn=test!/urn:files:sample.xls
```

- **java Processor** - Converts an input to another format by applying a specific Java method. The **jars** parameter is a comma separated list of JAR libraries or folders, from which libraries will be loaded. The **ccn** parameter is the fully qualified name of the conversion class that will be instantiated. The conversion class needs to have a method with the following signature:

```
public void convert(String systemID, String originalSourceSystemID, InputStream is,
    OutputStream os, LinkedHashMap<String, String> properties) throws IOException
```

```
convert:/processor=java;jars=libs;ccn=test.JavaToXML!/
urn:files:java/WSEditorBase.java
```

- **js Processor** - Converts an input to another format by applying a JavaScript method. The **js** parameter indicates the script that will be used. The **fn** parameter is the name of the method that will be called from the script. The method must take a string as an argument and return a string. If any of the parameters are missing, an error is thrown and the conversion stops.

```
convert:/processor=js;js=urn:processors:md.js;fn=convertExternal!/urn:files:sample.md
```

- **json Processor** - Converts a JSON input to XML. It has no parameters.

```
convert:/processor=json!/urn:files:personal.json
```

- **xhtml Processor** - Converts HTML content to well-formed XHTML. It has no parameters.

```
convert:/processor=xhtml!/urn:files:test.html
```

- **wrap Processor** - Wraps content in a tag name making it well-formed XML. The **rn** parameter indicates the name of the root tag to use. By default, it is **wrapper**. The **encoding** parameter specifies the encoding that should be used to read the content. By default, it is UTF8. As an example, this processor can be used if you want to process a

comma-separated values file with an XSLT stylesheet to produce XML content. The CSV file is first wrapped as well-formed XML, which is then processed with an `xslt` processor.

```
convert:/processor=wrap!/urn:files:test.csv
```

Reverse Conversion Processors

All processors defined above can also be used for saving content back to the target resource if they are defined in the URL as reverse processors. Reverse processors are evaluated right to left. These reverse processors allow *round-tripping* content to and from the target resource.

As an example, the following URL converts HTML to DITA when the URL is opened using the `h2d.xsl` stylesheet and converts DITA to HTML when the content is saved in the application using the `d2h.xsl` stylesheet.

```
convert:/processor=xslt;ss=h2d.xsl/rprocessor=xslt;ss=d2h.xsl!/urn:files:sample.html
```



Important: If you are publishing a DITA map that has such conversion URL references inside, you need to edit the transformation scenario and set the value of the parameter `fix.external.refs.com.oxygenxml` to `true`. This will instruct Oxygen XML Developer to resolve such references during a special pre-processing stage. Depending on the conversion, you may also require additional libraries to be added using the **Libraries** button in the **Advanced** tab of the transformation scenario.

Chapter 15

Content Management System (CMS) Integration

Topics:

- [*Integration with Documentum \(CMS\) \(deprecated\)*](#)
- [*Integration with Microsoft SharePoint*](#)

This chapter explains how you can use Oxygen XML Developer with Documentum CMS and Microsoft SharePoint. You can use the [*plugin support*](#) to develop your own integration with other content management systems..

All the major CMS vendors that are listed in the [*CMS Solution Partners section of our website*](#) also provide CMS integration with Oxygen XML Developer.

Integration with Documentum (CMS) (deprecated)



Important: Starting with version 17.0, the support for Documentum (CMS) is deprecated and will no longer be actively maintained.

Oxygen XML Developer provides support for browsing and managing Documentum repositories in the Data Source Explorer. You can easily create new resources on the repository, copy and move them using contextual actions or the drag and drop support, edit and transform the documents in the editor. The operations that can be performed on repository resources are described in the [Documentum \(CMS\) actions](#) section.

Oxygen XML Developer supports Documentum (CMS) version 6.5 and 6.6 with *Documentum Foundation Services 6.5 or 6.6* installed.



Attention:

It is recommended to use the latest 1.6.x Java version. It is possible that the Documentum (CMS) support will not work properly if you use other Java versions.

Configure Connection to Documentum Server

This section explains how to configure a connection to a Documentum server.

How to Configure a Documentum (CMS) Data Source

Available in the Enterprise edition only.

To configure a Documentum (CMS) data source you need the Documentum Foundation Services Software Development Kit (*DFS SDK*) corresponding to your server version. The *DFS SDK* can be found in the Documentum (CMS) server installation kit or it can be downloaded from [EMC Community Network](#).



Note: The *DFS SDK* can be found in the form of an archive named, for example, *emc-dfs-sdk-6.5.zip* for Documentum (CMS) 6.5.

1. [Open the Preferences dialog box](#) and go to **Data Sources**.
2. In the **Data Sources** panel click the **New** button.
3. Enter a unique name for the data source.
4. Select **Documentum (CMS)** from the driver type combo box.
5. Press the **Choose DFS SDK Folder** button.
6. Select the folder where you have unpacked the *DFS SDK* archive file.

If you have indicated the correct folder the following Java libraries (jar files) will be added to the list (some variation of the library names is possible in future versions of the *DFS SDK*):

- lib/java/emc-bpm-services-remote.jar
- lib/java/emc-ci-services-remote.jar
- lib/java/emc-collaboration-services-remote.jar
- lib/java/emc-dfs-rt-remote.jar
- lib/java/emc-dfs-services-remote.jar
- lib/java/emc-dfs-tools.jar
- lib/java/emc-search-services-remote.jar
- lib/java/ucf/client/ucf-installer.jar
- lib/java/commons/*.jar (multiple jar files)
- lib/java/jaxws/*.jar (multiple jar files)
- lib/java/utills/*.jar (multiple jar files)



Note: If for some reason the jar files are not found, you can add them manually by using the **Add Files** and **Add Recursively** buttons and navigating to the lib/java folder from the *DFS SDK*.

7. Click the **OK** button to finish the data source configuration.

How to Configure a Documentum (CMS) Connection

Available in the Enterprise edition only.

The steps for configuring a connection to a Documentum (CMS) server are the following:

1. *Open the **Preferences dialog box*** and go to **Data Sources**.
2. In the **Connections** panel click the **New** button.
3. Enter a unique name for the connection.
4. Select one of the previously configured Documentum (CMS) data sources in the **Data Source** combo box.
5. Fill-in the connection details:
 - **URL** - The URL to the Documentum (CMS) server: `http://<hostname>:<port>`
 - **User** - The user name to access the Documentum (CMS) repository.
 - **Password** - The password to access the Documentum (CMS) repository.
 - **Repository** - The name of the repository to log into.
6. Click the **OK** button to finish the configuration of the connection.

Known Issues

The following are known issues with the Documentum (CMS):

1. Note that there is a known problem in the UCF Client implementation for Mac OS X from Documentum 6.5 which prevents you from viewing or editing XML documents from the repository on Mac OS X. The UCF Client is the component responsible for file transfer between the repository and the local machine. This component is deployed automatically from the server. Documentum 6.6 does not exhibit this problem.



Note: This issue was reproduced with Documentum 6.5 SP1. In Documentum 6.6 this is no longer reproducing.

2. In order for the Documentum driver to work faster on Linux, you need to specify to the JVM to use a weaker random generator, instead of the very slow native implementation. This can be done by modifying in the Oxygen XML Developer startup scripts (or in the `*.vmoptions` file) the system property:

```
-Djava.security.egd=file:/dev/./urandom
```

Documentum (CMS) Actions in the Data Source Explorer View

Oxygen XML Developer allows you to browse the structure of a Documentum repository in the **Data Source Explorer** view and perform various operations on the repository resources.

You can drag and drop folders and resources to other folders to perform move or copy operations with ease. If the drag and drop is between resources (drag the child item to the parent item) you can create a relationship between the respective resources.

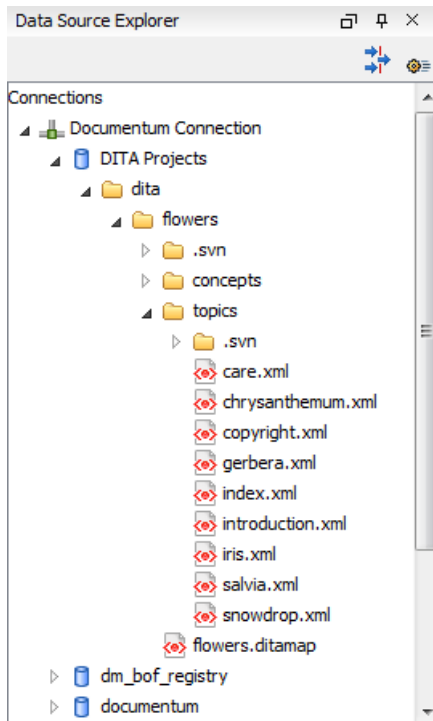


Figure 265: Browsing a Documentum repository

Actions Available on Connection

The contextual menu of a Documentum (CMS) connection in the **Data Source Explorer** view offers the following actions:

Configure Database Sources

Opens the *Data Sources [preferences page](#)* where you can configure both data sources and connections.

New Cabinet

Creates a new cabinet in the repository. The cabinet properties are:

- **Type** - The type of the new cabinet (default is **dm_cabinet**).
- **Name** - The name of the new cabinet.
- **Title** - The title property of the cabinet.
- **Subject** - The subject property of the cabinet.



Refresh

Refreshes the connection.

Actions Available on Cabinets / Folders

The actions available on a Documentum (CMS) cabinet in the **Data Source Explorer** view are the following:



New Folder

Creates a new folder in the current cabinet / folder. The folder properties are the following:

- **Path** - Shows the path where the new folder will be created.
- **Type** - The type of the new folder (default is **dm_folder**).
- **Name** - The name of the new folder.
- **Title** - The title property of the folder.
- **Subject** - The subject property of the folder.

 New Document

Creates a new document in the current cabinet / folder. The document properties are the following:

- **Path** - Shows the path where the new document will be created.
- **Name** - The name of the new document.
- **Type** - The type of the new document (default is **dm_document**).
- **Format** - The document content type format.

Import

Imports local files / folders in the selected cabinet / folder of the repository. Actions available when performing an import:

- **Add Files** - Opens a file browse dialog box and allows you to select files to add to the list.
- **Add Folders** - Opens a folder browse dialog box that allows you to select folders to add to the list. The subfolders will be added recursively.
- **Edit** - Opens a dialog box where you can change the properties of the selected file / folder from the list.
- **Remove** - Removes the selected files / folders from the list.

Rename

Changes the name of the selected cabinet / folder.

Copy

Copies the selected folder to a different location in the tree (available only upon folders). This action can also be performed with drag and drop while holding the **(Ctrl (Meta on Mac OS))** key pressed.

Move

Moves the selected folder to a different location in the tree (available only upon folders). This action can also be performed with drag and drop.

 Delete

Deletes the selected cabinet / folder from the repository. The following options are available:

- **Folder(s)** - Allows you to delete only the selected folder or to delete recursively the folder and all subfolders and objects.
- **Version(s)** - Allows you to specify what versions of the resources will be deleted.
- **Virtual document(s)** - Here you can specify what happens when virtual documents are encountered. They can be either deleted either by themselves or together with their descendants.

 Refresh

Performs a refresh of the selected node's sub-tree.

 Properties

Displays the list of properties of the selected cabinet / folder.

Actions Available on Resources

The actions available on a Documentum (CMS) resource in the **Data Source Explorer** view are the following:

 Edit

Checks out (if not already checked out) and opens the selected resource in the editor.

Edit with

Checks out (if not already checked out) and opens the selected resource in the specified editor / tool.

Open (Read-only)

Opens the selected resource in the editor. The resources are marked as read-only in the editor using a lock icon on the file tab. If you want to edit those resources, enable the *Can edit read only files* option.

Open with

Opens the selected resource in the specified editor / tool.

Check Out

Checks out the selected resource from the repository. The action is not available if the resource is already checked out.

Check In

Checks in the selected resource (commits changes) into the repository. The action is only available if the resource is checked out.

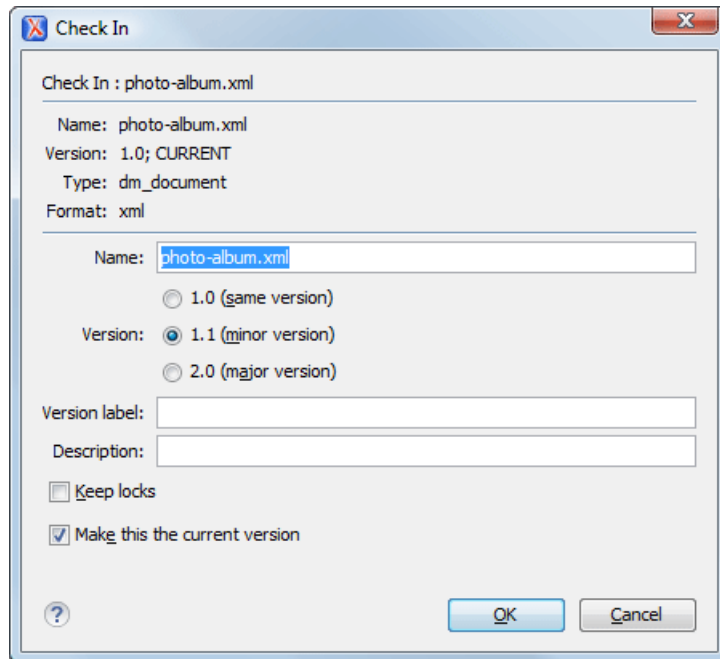


Figure 266: Check In Dialog Box

The following resource properties are available:

- **Name** - The resource name in the repository.
- **Version** - Allows you to choose what version the resource will have after being checked in.
- **Version label** - The label of the updated version.
- **Description** - An optional description of the resource.
- **Keep Locks** - When this option is enabled, the updated resource is checked into the repository but it also keeps it locked.
- **Make this the current version** - Makes the updated resource the current version (will have the *CURRENT* version label).

Cancel Checkout

Cancels the checkout process and loses all modifications since the checkout. Action is only available if the resource is checked out.

Export

Allows you to export the resource and save it locally.

Rename

Changes the name of the selected resource.

Copy

Copies the selected resource in a different location in the tree. Action is not available on virtual document descendants. This action can also be performed with drag and drop while holding the **Ctrl (Meta on OS X)** key pressed.

Move

Moves the selected resource in a different location in the tree. Action is not available on virtual document descendants and on checked out resources. This action can also be performed with drag and drop.

 Delete

Deletes the selected resource from the repository. Action is not available on virtual document descendants and on checked out resources.

Add Relationship

Adds a new relationship for the selected resource. This action can also be performed with drag and drop between resources.

Convert to Virtual Document

Allows you to convert a simple document to a virtual document. Action is available only if the resource is a simple document.

Convert to Simple Document

Allows you to convert a virtual document to a simple document. Action is available only if the resource is a virtual document with no descendants.

Copy location

Allows you to copy to clipboard an application-specific URL for the resource which can then be used for various actions like opening or transforming the resources.

 Refresh

Performs a refresh of the selected resource.

 Properties

Displays the list of properties of the selected resource.

Transformations on DITA Content from Documentum (CMS)

Oxygen XML Developer comes with the DITA Open Toolkit which is able to transform a DITA map to various output formats. However DITA Open Toolkit requires local DITA files so first you need to check out a local version of your DITA content.

Integration with Microsoft SharePoint

This section explains how to work with a SharePoint connection in the **Data Source Explorer** view.



Note: The SharePoint connection is available in the Enterprise edition.



Note: You can access documents stored on SharePoint Online for Office 365 sites that use as authentication method either *Cloud identity (default)* or *Federated identity (ADFS)*.

To watch our video demonstration about connecting to a repository located on a SharePoint server and using it, go to http://www.oxygenxml.com/demo/SharePoint_Support.html.

How to Configure a SharePoint Connection

By default Oxygen XML Developer contains a predefined **SharePoint** data source. Use this data source to create a connection to a SharePoint server which will be available in *the Data Source Explorer view*.

Follow these steps to configure a SharePoint connection:

1. *Open the Preferences dialog box* and go to **Data Sources**.
2. In the **Connections** panel click the **New** button.
3. Enter a unique name for the connection.
4. Select SharePoint in the **Data Source** combo box.
5. Fill-in the connection details:
 - a) Set the URL to the SharePoint repository in the field **SharePoint URL**.

- b) Set the server domain in the **Domain** field.
- c) Set the user name to access the SharePoint repository in the **User** field.
- d) Set the password to access the SharePoint repository in the **Password** field.

To watch our video demonstration about connecting to repository located on a SharePoint server, go to http://www.oxygenxml.com/demo/SharePoint_Support.html.

The SharePoint Browser View

To display the **SharePoint Browser** view, go to **Window > Show View > SharePoint Browser**. This view allows you to connect to a SharePoint repository and perform SharePoint-specific actions on the available resources.

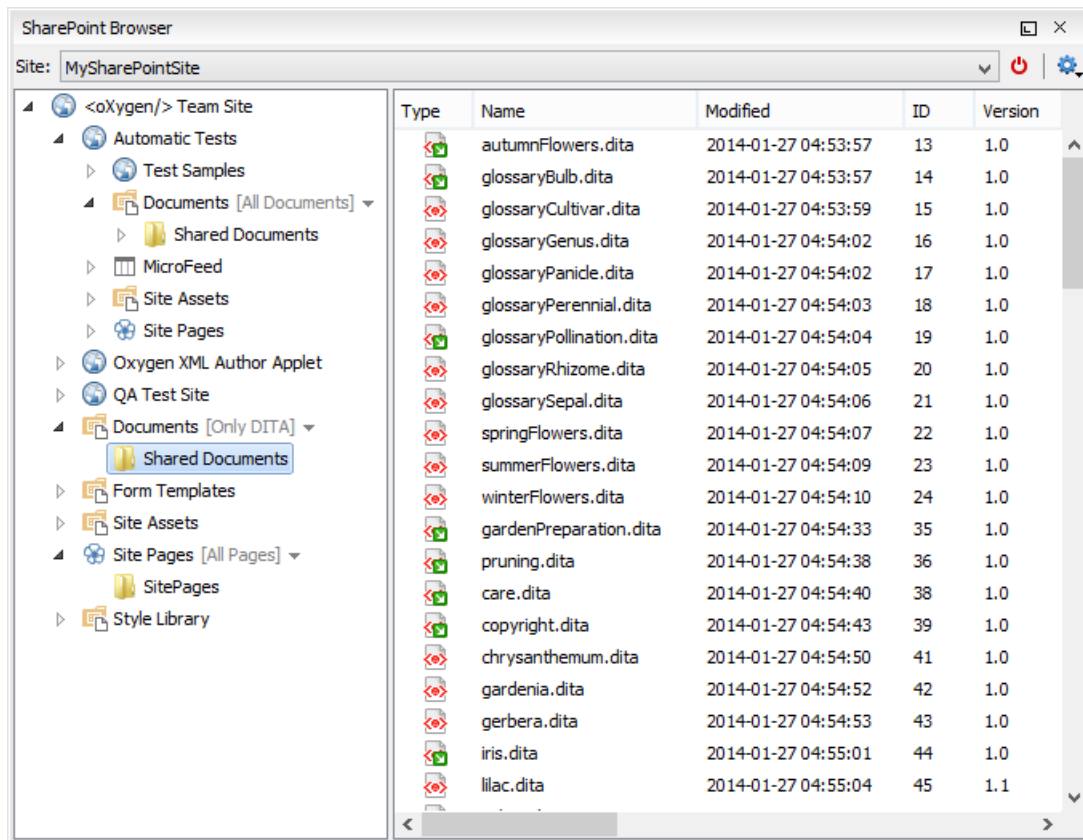


Figure 267: SharePoint Browser View

The view is split in several functional areas:

Connection Area

The following controls are available:

- The **Site** combo box allows you to select and connect to an already *defined SharePoint connection*.
- The  **Disconnect** action terminates the current connection.
- The  **Settings** drop-down menu contains actions that help you to quickly define a new connection or manage the existing ones from the **Data Source** options page: **New SharePoint Connection** and **Configure Database Sources**. Also, here you can choose one of the predefined view layouts.

SharePoint Site Navigation Area


If there is no connection selected in the **Site** combo box, this area is left blank and promotes the actions that allow you to quickly add SharePoint connections. Otherwise, the navigation area presents the SharePoint site structure in a tree-like fashion displaying the following node types: *sites* (🌐), *libraries*, and *folders*.

Depending on the type of node, a contextual menu offers customized actions that can be performed on that node. The contextual menu of a folder allows you to create new folders and documents, import folders and files, and to rename and delete the folder.



Note: The rename and delete actions are not available for library root folders (folders located at first level in a SharePoint library).

Each library node display next to its name a drop down box where you can select the current library *view*. This functionality is also available on the node's contextual menu, under the **Current View** submenu.



Folder Content Area


The content of a folder is displayed in a tabular form, where each row represents the properties of a folder or document. The list of columns and the way the documents and folders are organized depends on the currently selected view of the parent library.

Action	Description	Available for	
		folders	documents
Open	Displays the content of the currently selected folder. Opens the current document for editing.		
Rename	Renames the current node on server.		
Import	Import files or folders into the currently selected folder.		
Delete	Deletes the current node from the server.		
Copy Location	Copies to clipboard the URL of the current node.		
Check Out	Reserves the current document for your use so that other users cannot change it while you are editing it.		
Check In	Commits on the server the changes you made to the document, so that other users can see them. It also makes the document available for editing to other users.		
Discard Check Out	Discards the previous checkout operation, making the file available for editing to other users.		
Refresh	Queries the server in order to refresh the available properties of the current node.		

You can filter and sort the displayed items. To display the available filters of a column, click the filter widget located on the column's header. You can apply multiple filters at the same time.



Note: A column can be filtered or sorted only if it was configured this way on the server side.

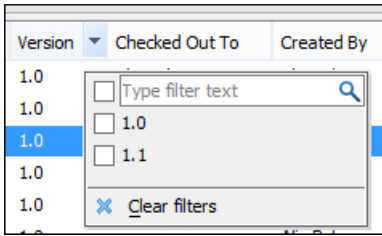

SharePoint Connection Actions

This section explains the actions that are available on a SharePoint connection in the **Data Source Explorer** view.

Actions Available at Connection Level

The contextual menu of a SharePoint connection in the **Data Source Explorer** view contains the following actions:

Configure Database Sources

Opens the **Data Sources** [preferences page](#). Here you can configure both data sources and connections.

Disconnect

Stops the connection.

New Folder

Creates a new folder on the server.

Import Files

Allows you to add a new file on the server.

Refresh

Performs a refresh of the connection.

Find/Replace in Files

Allows you to find and replace text in multiple files from the server.

Actions Available at Folder Level

The contextual menu of a folder node in a SharePoint connection in the **Data Source Explorer** view contains the following actions:

New File

Creates a new file on the server in the current folder.

New Folder

Creates a new folder on the server.

Import Folders

Imports folders on the server.

Import Files

Allows you to add a new file on the server in the current folder.

Cut

Removes the current selection and places it in the clipboard.

Copy

Copies the current selection.

Paste

Pastes the copied selection.

Rename

Allows you to change the name of the selected folder.

 Delete

Removes the selected folder.

 Refresh

Refreshes the sub-tree of the selected node.

 Find/Replace in Files

Allows you to find and replace text in multiple files from the server.

Actions Available at File Level

The contextual menu of a file node in a SharePoint connection in the **Data Source Explorer** view contains the following actions:

 Open

Allows you to open the selected file in the editor.

 Cut

Removes the current selection and places it in the clipboard.

 Copy

Copies the current selection into the clipboard.

Copy Location

Copies an application specific URL for the selected resource to the clipboard. You can use this URL for various actions like opening or transforming the resources.

Check Out

Checks out the selected document on the server.

Check In

Checks in the selected document on the server. This action opens the **Check In** dialog box. In this dialog box, the following options are available:

- **Minor Version** - Increments the minor version of the file on the server.
- **Major Version** - Increments the major version of the file on the server.
- **Overwrite** - Overwrites the latest version of the file on the server.
- **Comment** - Allows you to comment on a file that you check in.

Discard Check Out

Discards the previous checkout operation, making the file available for editing to other users.

Rename

Allows you to change the name of the selected file.

 Delete

Removes the selected file.

 Refresh

Performs a refresh of the selected node.

 Properties

Displays the properties of the current file in a **Properties** dialog box.

 Find/Replace in Files

Allows you to find and replace text in multiple files from the server.



Note: The **Check In**, **Check Out**, and **Discard Check Out** options are available in the Enterprise edition only.

Chapter 16

Extending Oxygen XML Developer Using the SDK

Topics:

- *[Extending Oxygen XML Developer with Plugins](#)*

Oxygen XML Developer has an SDK that can be used as a base to develop frameworks and plugins. The SDK is available on our website at http://www.oxygenxml.com/oxygen_sdk.html.

This chapter includes information about extending Oxygen XML Developer with plugins.

Extending Oxygen XML Developer with Plugins

A plugin is a software component which adds extra functionality to the standalone version of the application using a series of application-provided extension points.

This chapter explains how to write and install a plugin for the standalone version of Oxygen XML Developer. The [Plugins Development Kit](#) contains sample plugins (source and compiled Java code) and the Javadoc API necessary for developing custom plugins.

If you want to customize the Oxygen XML Developer Eclipse Plugin you can look at the [Eclipse IDE Integration Sample Project](#) to see how an Eclipse plugin can interact with the Oxygen XML Developer APIs.

Introduction to Plugins

A plugin can have multiple plugin extensions. The following plugin extensions are available (in the order of importance).

Plugins that are used in the entire workspace:

- [Workspace Access Plugin Extension](#) on page 594
- [JavaScript-based Workspace Access Plugin Extension](#) on page 595
- [Components Validation Plugin Extension](#) on page 596
- [Custom Protocol Plugin Extension](#) on page 597
- [Resource Locking Custom Protocol Plugin Extension](#) on page 598
- [Open Redirect Plugin Extension](#) on page 598

Plugins that work only in the **Text** editing mode:

- [General Plugin Extension](#) on page 600
- [Selection Plugin Extension](#) on page 601
- [Document Plugin Extension](#) on page 601

General Configuration of an Oxygen XML Developer Plugin

The Oxygen XML Developer functionality can be extended with plugins that implement a clearly specified API.

On the Oxygen XML Developer website there is an [SDK](#) with sample plugins (source and compiled Java code) and the Javadoc API necessary for developing custom plugins.

The minimal implementation of a plugin must provide:

- a Java class that extends the `ro.sync.xml.plugin.Plugin` class
- a Java class that implements the `ro.sync.xml.plugin.PluginExtension` interface
- a plugin descriptor file called `plugin.xml`

A `ro.sync.xml.plugin.PluginDescriptor` object is passed to the constructor of the subclass of the `ro.sync.xml.plugin.Plugin` class. It contains the following data items about the plugin:

- `basedir` - *File* object - the base directory of the plugin.
- `description` - *String* object - the description of the plugin.
- `name` - *String* object - the name of the plugin.
- `vendor` - *String* object - the vendor name of the plugin.
- `version` - *String* object - the plugin version.
- `id` - *String* object - an unique identifier.
- `classLoaderType` - a choice between `preferOxygenResources` (default value) and `preferReferencedResources`. When choosing `preferOxygenResources` the libraries which are referenced in the Oxygen XML Developer `lib` directory will have precedence over those referenced in the `plugin.xml` configuration file, if they have the same package names. When choosing `preferReferencedResources` the libraries which are referenced in the `plugin.xml` configuration file will have precedence over those found in the Oxygen XML Developer `lib` directory, if they have the same package names.

The plugin descriptor is an XML file that defines how the plugin is integrated in Oxygen XML Developer and what libraries are loaded. The structure of the plugin descriptor file is fully described in a DTD grammar located in [OXYGEN_DIR]/plugins/plugin.dtd. Here is a sample plugin descriptor used by the *Capitalize Lines* sample plugin:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
  name="Capitalize Lines"
  description="Capitalize the first character on each line"
  version="1.0.0"
  vendor="SyncRO"
  class="ro.sync.sample.plugin.caplines.CapLinesPlugin">
  <runtime>
    <library name="lib/caplines.jar"/>
  </runtime>
  <extension type="selectionProcessor"
    class="ro.sync.sample.plugin.caplines.CapLinesPluginExtension" keyboardShortcut="ctrl shift EQUALS"/>
</plugin>
```

If your plugin is of type *Selection*, *Document* or *General*, and thus contributes an action either to the contextual menu or to the main menu of the Text editing mode, then you can assign a keyboard shortcut for it. You can use the `keyboardShortcut` attribute for each `extension` element to specify the desired shortcut.



Tip: To compose string representations of the desired shortcut keys you can go to the Oxygen XML Developer **Menu Shortcut Keys** preferences page, press **Edit** on any action, press the desired key sequence and use the representation that appears in the **Edit** dialog box.

Referencing libraries

To reference libraries, use either of the following elements:

- `<library name="libraryName" scope="global"/>` to point to specific libraries.



Note: You can use the `${oxygenInstallDir}` editor variable as part of the value of the `name` attribute.

- `<librariesFolder name="libraryFolderPath" scope="global"/>` to point to multiple libraries located in the specified folder.

Both elements support the `scope` attribute that defines the loading priority. It can have one of the following three values:

- *local* - the library is loaded in the plugin's own class loader. This is the default behavior
- *global* - the library is loaded in the main application class loader as the last library in the list (as if it would be present in the application `lib` directory)
- *globalHighPriority* - the library is loaded in the main application class loader as the first library in the list (useful to patch certain resources located in other JARs of the application)

Installation

To install a plugin in Oxygen XML Developer, follow these steps:

1. Go to the Oxygen XML Developer installation directory and locate the `plugins` directory.
The `plugins` directory contains all the plugins available to Oxygen XML Developer.
2. In the `plugins` directory create a subfolder to store the plugin files.
3. In the new folder, place the plugin descriptor file (`plugin.xml`), the Java classes of the plugin and the other files that are referenced in the descriptor file.
4. Restart Oxygen XML Developer.

Alternatively, you can go to **Help > Manage Addons** and use the **Manage Add-ons** dialog box. This dialog allows you to install available plugins and manage the ones that are currently in use.

Types of plugin extensions

A plugin can have one or more defined plugin extensions which provide functionality to the application.

Workspace Access Plugin Extension

This plugin type allows you to contribute actions to the main menu and toolbars of Oxygen XML Developer, to create custom views and interact with the application workspace, make modifications to opened documents and add listeners for various events.

Many complex integrations (such as integrations with Content Management Systems) usually requires access to some workspace resources such as toolbars, menus, views, and editors. This type of plugin is also useful because it allows you to make modifications to the XML content of an opened editor.

The plugin must implement the [ro.sync.exml.plugin.workspace.WorkspaceAccessPluginExtension](#) interface. The callback method `applicationStarted` of this interface allows access to a parameter of the [ro.sync.exml.workspace.api.standalone.StandalonePluginWorkspace](#) type (allows for API access to the application workspace).

The `StandalonePluginWorkspace` interface has three methods that can be called to customize toolbars, menus, and views:

- `addToolbarComponentsCustomizer` - Contributes to or modifies existing toolbars. You can specify additional toolbar IDs in the associated `plugin.xml` descriptor using the following construct:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomWorkspaceAccess" .....>
  <runtime>
    .....
  </runtime>

  <extension type="WorkspaceAccess" ...../>
  .....
  <toolbar id="SampleWorkspaceAccessToolbarID" initialSide="NORTH" initialRow="1"/>
</plugin>
```

The `toolbar` element adds a toolbar in the Oxygen XML Developer interface and allows you to contribute your own plugin-specific actions. The following attributes are supported:

- `id` - Unique identifier for the plugin toolbar.
- `initialSide` - Specifies the place where the toolbar is initially displayed. The allowed values are `NORTH` and `SOUTH`.
- `initialRow` - Specifies the initial row on the specified side where the toolbar is displayed. For example, the first toolbar has an initial row of 0 and the next toolbar has an initial row of 1.

The [ro.sync.exml.workspace.api.standalone.ToolbarInfo](#) toolbar component information with the specified `id` will be provided to you by the customizer interface. Therefore, you will be able to provide Swing components that will appear on the toolbar when the application starts.

- `addViewComponentCustomizer` - Contributes to or modifies existing views, or contributes to the reserved custom view. You can specify additional view IDs in the associated `plugin.xml` descriptor using the following construct:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomWorkspaceAccess" .....>
  <runtime>
    .....
  </runtime>

  <extension type="WorkspaceAccess" ...../>
  .....
  <view id="SampleWorkspaceAccessID" initialSide="WEST" initialRow="0"/>
</plugin>
```

The `view` element adds a view in the Oxygen XML Developer interface and allows you to contribute your own plugin-specific UI components. The following attributes are supported:

- `id` - Unique identifier of the view component.
- `initialSide` - Specifies the place where the view is initially displayed. The allowed values are: `NORTH`, `SOUTH`, `EAST`, and `WEST`.

- `initialRow` - Specifies the initial row on the specified side where the view is displayed. For example, in Oxygen XML Developer, the **Project** view has an initial row of 0 and the **Outline** view has an initial row of 1. Both views are in the WEST part of the workbench.
- `initialState` - Specifies the initial state of the view. The allows values are: `hidden`, `docked`, `autohide`, and `floating`. By default, the view is visible and docked.

The `ro.sync.xml.workspace.api.standalone.ViewInfo` view component information with the specified id will be provided to you by the customizer interface. Therefore, you will be able to provide Swing components that will appear on the view when the application starts.

- `addMenuBarCustomizer` - Contributes to or modifies existing menu components.

Access to the opened editors can be done by first getting access to all URLs opened in the workspace using the `StandalonePluginWorkspace.getAllEditorLocations(int editingArea)` API method. Using the URL of an opened resource, you can gain access to it using the `StandalonePluginWorkspace.getEditorAccess(URL location, int editingArea)` API method. A `ro.sync.xml.workspace.api.editor.WSEditor` then allows access to the current editing page.

A special editing API is supported for the **Text** mode (`ro.sync.xml.workspace.api.editor.page.text.WSTextEditorPage`).

To be notified when editors are opened, selected, and closed, you can use the `StandalonePluginWorkspace.addEditorChangeListener` API method to add a listener.

JavaScript-based Workspace Access Plugin Extension

This is a JavaScript-based plugin extension that allows you to contribute actions to the main menu and toolbars of Oxygen XML Developer, create custom views, interact with the application workspace, make modifications to opened documents, and add listeners for various events.

This extension can use the same API as the [Workspace Access Plugin Extension](#) on page 594, but the implementation is JavaScript-based and uses the bundled [Rhyno](#) library to create and work with Java API from the JavaScript code.

The plugin descriptor file `plugin.xml` needs to point to a JavaScript file, as in the following example:

```
<!DOCTYPE plugin PUBLIC "-//Oxygen Plugin" "../plugin.dtd">
<plugin
  id="unique.id.value"
  name="Add Action To DITA Maps Manager popup-menu"
  description="Plugin adds contextual menu action to DITA Maps Manager pop-up menu."
  version="1.0"
  vendor="Syncro Soft"
  class="ro.sync.xml.plugin.Plugin"
  classLoaderType="preferReferencedResources">
  <extension type="WorkspaceAccessJS" href="wsAccess.js"/>
</plugin>
```

In the example above, the JavaScript file `wsAccess.js`, located in the plugin folder, will be called. This JavaScript file needs to have two JavaScript methods defined inside. Methods that will be called when the application starts and when it ends:

```
function applicationStarted(pluginWorkspaceAccess) {
  .....
}

function applicationClosing(pluginWorkspaceAccess) {
  .....
}
```

Below is a much larger example with a JavaScript Workspace Access plugin extension implementation that adds a new action in the contextual menu of the **DITA Maps Manager** view. The action starts the `notepad.exe` application and passes the reference to the currently selected `topicref` to it.

```
function applicationStarted(pluginWorkspaceAccess) {
  Packages.java.lang.System.err.println("Application started " + pluginWorkspaceAccess);
  edChangeListener = {
    /*Called when a DITA Map is opened*/
    editorOpened: function (editorLocation) {
      Packages.java.lang.System.err.println("\nrunning " + editorLocation);
    }
    /*Get the opened DITA Map*/
  }
}
```

```

editor = pluginWorkspaceAccess.getEditorAccess(editorLocation,
Packages.ro.sync.exml.workspace.api.PluginWorkspace.DITA_MAPS_EDITING_AREA);
ditaMapPage = editor.getCurrentPage();
/*Add listener called when right click is performed in the DITA Maps manager view*/
customizerObj = {
  customizePopupMenu: function (popUp, ditaMapDocumentController) {
    Packages.java.lang.System.err.println("RIGHT CLICK" + popUp);
    tree = ditaMapPage.getDITAMapTreeComponent();
    /*Selected tree path*/
    sel = tree.getSelectionPath();
    if (sel != null) {
      selectedElement = sel.getLastPathComponent();
      /*Reference attribute*/
      href = selectedElement.getAttribute("href");
      if (href != null) {
        try {
          /*Create absolute reference*/
          absoluteRef = new Packages.java.net.URL(selectedElement.getXMLBaseURL(), href.getValue());
          Packages.java.lang.System.err.println("Computed absolute reference " + absoluteRef);
          mi = new Packages.javafx.swing.JMenuItem("Run notepad");
          popUp.add(mi);
          actionPerfObj = {
            actionPerformed: function (e) {
              try {
                Packages.java.lang.Runtime.getRuntime().exec("notepad.exe " +
pluginWorkspaceAccess.getUtilAccess().locateFile(absoluteRef));
              }
              catch (e1) {
                e1.printStackTrace();
              }
            }
          };
          mi.addActionListener(new JavaAdapter(Packages.java.awt.event.ActionListener, actionPerfObj));
        }
        catch (e1) {
          Packages.java.lang.System.err.println(e1);
        }
      }
    }
  }
};

ditaMapPage.setPopupMenuCustomizer(new
Packages.ro.sync.exml.workspace.api.editor.page.ditamap.DITAMapPopupMenuCustomizer(customizerObj));
}
}
edChangeListener = new JavaAdapter(Packages.ro.sync.exml.workspace.api.listeners.WSEditorChangeListener,
edChangeListener);
pluginWorkspaceAccess.addEditorChangeListener(
edChangeListener,
Packages.ro.sync.exml.workspace.api.PluginWorkspace.DITA_MAPS_EDITING_AREA);
}

function applicationClosing(pluginWorkspaceAccess) {
  Packages.java.lang.System.err.println("Application closing " + pluginWorkspaceAccess);
}

```

Option Page Plugin Extension

This extension type allows developers to add custom preference pages to the application **Preferences** dialog box.

The extension must implement the `ro.sync.exml.plugin.option.OptionPagePluginExtension` interface. The provided callbacks allow the developer to create the custom Swing component which will be added to the page and to react to various calls in order to persistently save the page's settings using the `OptionsStorage` API.

All preferences pages which are contributed by a plugin appear listed in the **Preferences** dialog box in the **Plugins** category. The `plugin.xml` configuration file can specify one or more such extensions using constructs like:

```
<extension type="OptionPage" class="my.package.CustomOptionPagePluginExtension"/>
```

Components Validation Plugin Extension

This plugin type allows the developer to customize the editor menus, toolbars, and other components by allowing or filtering them from the user interface.

This plugin provides the following API:

- The interface `ComponentsValidatorPluginExtension` - There is one method that must be implemented:
 - `getComponentsValidator()` - Returns a `ro.sync.exml.ComponentsValidator` implementation class used for validating the menus, toolbars, and their actions.

- The `ComponentsValidator` interface provides methods to filter various features from being added to the GUI of Oxygen XML Developer:
 - `validateMenuOrTaggedAction(String[] menuOrActionPath)` - Checks if a menu or a tag action from a menu is allowed and returns a `boolean` value. A tag is used to uniquely identifying an action. The `String[]` argument is the tag of the menu / action and the tags of its parent menus if any.
 - `validateToolbarTaggedAction(String[] toolbarOrAction)` - Checks if an action from a toolbar is allowed and returns a `boolean` value. The `String[]` argument is the tag of the action from a toolbar and the tag of its parent toolbar if any.
 - `validateComponent(String key)` - Checks if the given component is allowed and returns a `boolean` value. The `String` argument is the tag identifying the component. You can remove toolbars entirely using this callback.
 - `validateAccelAction(String category, String tag)` - Checks if the given accelerator action is allowed to appear in the GUI and returns a `boolean` value. An accelerator action can be uniquely identified so it will be removed both from toolbars or menus. The first argument represents the action category, the second is the tag of the action.
 - `validateContentType(String contentType)` - Checks if the given content type is allowed and returns a `boolean` value. The `String` argument represents the content type. You can instruct Oxygen XML Developer to ignore content types like `text / xsl` or `text / xquery`.
 - `validateOptionPane(String optionPaneKey)` - Checks if the given options page can be added in the preferences option tree and returns a `boolean` value. The `String` argument is the option pane key.
 - `validateOption(String optionKey)` - Checks if the given option can be added in the option page and returns a `boolean` value. The `String` argument is the option key. This method is mostly used for internal use and it is not called for each option in a preferences page.
 - `validateLibrary(String library)` - Checks if the given library is allowed to appear listed in the **About** dialog box and returns a `boolean` value. The `String` argument is the library. This method is mostly for internal use.
 - `validateNewEditorTemplate(EditorTemplate editorTemplate)` - Checks if the given template for a new editor is allowed and returns a `boolean` value. The `EditorTemplate` argument is the editor template. An `EditorTemplate` is used to create an editor for a given extension. You can thus filter what appears in the list of the **New** dialog box.
 - `isDebuggerperspectiveAllowed()` - Check if the debugger perspective is allowed and returns a `boolean` value.
 - `validateSHMarker(String marker)` - Checks if the given marker is allowed and returns a `boolean` value. The `String` argument represents the syntax highlight marker to be checked. If you decide to filter certain content types, you can also filter the syntax highlight options so that the content type is no longer present in the Preferences options tree.
 - `validateToolbarComposite(String toolbarCompositeTag)` - Checks if the toolbar composite is available. A toolbar composite is a toolbar component such as a drop-down menu.



Tip: The best way to decide what to filter is to observe the values that Oxygen XML Developer passes when these callbacks are called. You have to create an implementation for this interface which lists in the console all values received by each function. Then you can decide on the values to filter and act accordingly.

Custom Protocol Plugin Extension

This type of plugin allows the developer to work with a custom designed protocol for retrieving and storing files.

It provides the following API:

- The interface `URLStreamHandlerPluginExtension` - There is one method that must be implemented:
 - `getURLStreamHandler(String protocol)` - It takes as an argument the name of the protocol and returns a `URLStreamHandler` object, or null if there is no URL handler for the specified protocol.

This type of plugin extension can be usually combined with a [Workspace Access Plugin Extension](#) on page 594 which can add a custom toolbar with custom actions for opening documents from a certain source.

As an alternative, two older plugin extensions can also be used to add a toolbar action for showing a custom URL chooser:

- With the help of the `URLChooserPluginExtension2` interface, it is possible to create your own dialog box that works with the custom protocol. This interface provides two methods:
 - `chooseURLs(StandalonePluginWorkspace workspaceAccess)` - Returns a `URL[]` object that contains the URLs the user decided to open with the custom protocol. You can invoke your own URL chooser dialog box here and then return the chosen URLs having your own custom protocol. You have access to the workspace of Oxygen XML Developer.
 - `getMenuName()` - Returns a `String` object that is the name of the entry added in the **File** menu.
- With the help of the `URLChooserToolBarExtension` interface, it is possible to provide a toolbar entry which is used for launching the custom URLs chooser from the `URLChooserPluginExtension` implementation. This interface provides two methods:
 - `getToolBarIcon()` - Returns the `javax.swing.Icon` image used on the toolbar.
 - `getToolBarTooltip()` - Returns a `String` that is the tooltip used on the toolbar button.

Resource Locking Custom Protocol Plugin Extension

This plugin type allows the developer to work with a custom designed protocol for retrieving and storing files. It can lock a resource on opening it in Oxygen XML Developer. This type of plugin extends the custom protocol plugin type with resource locking support.

Such a plugin provides the following API:

- The interface `URLStreamHandlerWithLockPluginExtension` - The plugin receives callbacks following the simple protocol for resource locking and unlocking imposed by Oxygen XML Developer.

There are two additional methods that must be implemented:

- `getLockHandler()` - Returns a `LockHandler` implementation class with the implementation of the lock specific methods from the plugin.
- `isLockingSupported(String protocol)` - Returns a `boolean` that is `true` if the plugin accepts to manage locking for a certain URL protocol scheme like `ftp`, `http`, `https`, or `customName`.

XML Refactoring Operations Plugin Extension

This plugin type allows the developer to specify one or more directories from which the XML Refactoring operation resources are loaded.

The `RefactoringOperationsProvider` extension can be used to specify the location where custom XML Refactoring operation resources (XQuery Update script or XSLT stylesheet and Operation Descriptor files) are stored. Oxygen XML Developer will scan the specified locations to load the custom operations when the XML Refactoring tool is opened, and allows you to share your custom refactoring operations.

Sample XML Refactoring Operations Plugin Extension

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin PUBLIC "-//Oxygen Plugin" "../plugin.dtd">

<plugin
  id="refactoring.operations"
  name="Refactoring operations plugin"
  description="Contains operation descriptors and related scripts"
  version="1.0">
  <extension type="RefactoringOperationsProvider">
    <folder path="customDir"/>
    <folder path="customDir2"/>
  </extension>
</plugin>
```

Open Redirect Plugin Extension

This type of plugin is useful for opening more than one file with only one open action.

For example when a zip archive or an ODF file or an OOXML file is open in the **Archive Browser** view a plugin of this type can decide to open a file also from the archive in an XML editor panel. This file can be the `document.xml` main file from an OOXML file archive or a specific XML file from a zip archive.

The plugin must implement the interface `OpenRedirectExtension`. It has only one callback: `redirect(URL)` that receives the URL of the file opened by the Oxygen XML Developer user. If the plugin decides to open also other files it must return an array of information objects (`OpenRedirectInformation[]`) that correspond to these files. Such an information object must contain the URL that is opened in a new editor panel and the content type, for example `text/xml`. The content type is used for determining the type of editor panel. A `null` content type allows auto-detection of the file type.

Targeted URL Stream Handler Plugin Extension

This type of plugin can be used when it is necessary to impose custom URL stream handlers for specific URLs.

This plugin extension can handle the following protocols: `http`, `https`, `ftp` or `sftp`, for which Oxygen XML Developer usually provides specific fixed URL stream handlers. If it is set to handle connections for a specific protocol, this extension will be asked to provide the URL stream handler for each opened connection of an URL having that protocol.

To use this type of plugin, you have to implement the `ro.sync.exml.plugin.urlstreamhandler.TargetedURLStreamHandlerPluginExtension` interface, that provides the following methods:

- `boolean canHandleProtocol(String protocol)`

This method checks if the plugin can handle a specific protocol. If this method returns `true` for a specific protocol, the `getURLStreamHandler(URL)` method will be called for each opened connection of an URL having this protocol.

- `URLStreamHandler getURLStreamHandler(URL url)`

This method provides the URL handler for the specified URL and it is called for each opened connection of an URL with a protocol for which the `canHandleProtocol(String)` method returns `true`.

If this method returns `null`, the default Oxygen XML Developer `URLStreamHandler` is used.

To use this type of extension in your plugin, create an extension of `TargetedURLHandler` type in your `plugin.xml` and specify the class that implements `TargetedURLStreamHandlerPluginExtension`:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomTargetedURLStreamHandlerPlugin" .....>
  <runtime>
    .....
  </runtime>

  <extension type="TargetedURLHandler" class="CustomTargetedURLStreamHandlerPluginExtension"/>
  .....
</plugin>
```

This extension can be useful in situations when connections opened from a specific host must be handled in a particular way. For example, the Oxygen XML Developer `HTTP URLStreamHandler` may not be compatible for sending and receiving SOAP using the SUN Web Services implementation. In this case you can override the stream handler set by Oxygen XML Developer for HTTP to use the default `SUN URLStreamHandler` which is more compatible with sending and receiving SOAP requests.

```
public class CustomTargetedURLStreamHandlerPluginExtension
    implements TargetedURLStreamHandlerPluginExtension {

    @Override
    public boolean canHandleProtocol(String protocol) {
        boolean handleProtocol = false;
        if ("http".equals(protocol) || "https".equals(protocol)) {
            // This extension handles both HTTP and HTTPS protocols
            handleProtocol = true;
        }
    }
}
```

```

    return handleProtocol();
}

@Override
public URLStreamHandler getURLStreamHandler(URL url) {
    // This method is called only for the URLs with a protocol
    // for which the canHandleProtocol(String) method returns true (HTTP and HTTPS)

    URLStreamHandler handler = null;

    String host = url.getHost();
    String protocol = url.getProtocol();
    if ("some_host".equals(host)) {
        // When there are connections opened from some_host, the SUN HTTP(S)
        // handlers are used
        if ("http".equals(protocol)) {
            handler = new sun.net.www.protocol.http.Handler();
        } else {
            handler = new sun.net.www.protocol.https.Handler();
        }
    }
    return handler;
}
}

```

Lock Handler Factory Plugin Extension

This type of extension is used for locking resources from a specific protocol.

It provides the following API:

- The interface `LockHandlerFactoryPluginExtension`.

You need to implement the following two methods:

- `LockHandler getLockHandler()`
Gets the lock handler for the current handled protocol. Might be null if not supported.
- `boolean isLockingSupported(String protocol)`
Checks if a lock handler can be provided for a specific protocol.

To use this type of extension in your plugin, create an extension of `LockHandlerFactory` type in your `plugin.xml` and specify the class implementing `LockHandlerFactoryPluginExtension`:

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomLockHandler" .....>
    <runtime>
        .....
    </runtime>

    <extension type="LockHandlerFactory" class="LockHandlerFactoryPluginExtensionImpl"/>
    .....
</plugin>

```

Plugin Extensions Designed to Work only in the Text Editing Mode

These plugin extensions operate only when editing documents in the **Text** mode. They are mounted automatically by the application on the contextual menu in the **Plugins** submenu.

General Plugin Extension

This plugin type allows the developer to invoke custom code and to interact with the workspace of Oxygen XML Developer.

This plugin is the most general plugin type. It provides a limited API:

- The interface `GeneralPluginExtension` - Intended for general-purpose plugins, kind of external tools but triggered from the **Plugins** menu. The implementing classes must provide the method `process(GeneralPluginContext)` which must provide the plugin processing. This method takes as a parameter a `GeneralPluginContext` object.

- The class `GeneralPluginContext` - Represents the context in which the general plugin extension does its processing. The `getPluginWorkspace()` method allows you access to the workspace of Oxygen XML Developer.

Selection Plugin Extension

A selection plugin can be applied to both an XML document and a non-XML document. It works as follows: the user makes a selection in the editor, displays the contextual menu, and selects the item corresponding to the plugin from the **Plugins** submenu.

This plugin type provides the following API:

- The interface `SelectionPluginExtension` - The context containing the selected text is passed to the extension and the processed result is going to replace the initial selection. The `process(GeneralPluginContext)` method must return a `SelectionPluginResult` object which contains the result of the processing. The `String` value returned by the `SelectionPluginResult` object can include editor variables such as `${caret}` and `${selection}`.
- The `SelectionPluginContext` object represents the context. It provides four methods:
 - `getSelection()` - Returns a `String` that is the current selection of text.
 - `getFrame()` - Returns a `Frame` that is the editing frame.
 - `getPluginWorkspace()` - Returns access to the workspace of Oxygen XML Developer.
 - `getDocumentURL()` - Returns the URL of the current edited document.

Document Plugin Extension

This plugin type can be applied only to an XML document. It can modify the current document which is received as callback parameter.

The plugin is started by selecting the corresponding menu item from the contextual menu of the XML editor (**Text** mode), **Plugins** submenu. It provides the following API:

- The interface `DocumentPluginExtension` - Receives the context object containing the current document in order to be processed. The `process(GeneralPluginContext)` method can return a `DocumentPluginResult` object containing a new document.
- The `DocumentPluginContext` object represents the context. It provides three methods:
 - `getDocument()` - Returns a `javax.swing.text.Document` object that represents the current document.
 - `getFrame()` - Returns a `java.awt.Frame` object that represents the editing frame.
 - `getPluginWorkspace()` - Returns access to the workspace of Oxygen XML Developer.

How to

Different tutorials about how to implement complex plugins.

How to Write a CMS Integration Plugin

In order to have a complete integration between Oxygen XML Developer and any CMS you usually have to write a plugin which combines two available plugin extensions:

- [Workspace Access](#)
- [Custom protocol](#)

The usual set of requirements for an integration between Oxygen XML Developer and the CMS are the following:


- Contribute to the Oxygen XML Developer toolbars and main menu with your custom **Check Out** and **Check In** actions:
 - **Check Out** triggers your custom dialog boxes that allow you to browse the remote CMS and choose the resources you want to open.
 - **Check In** allows you to send the modified content back to the server.

You can use the **Workspace Access** plugin extension (and provided sample Java code) for all these operations.

- When **Check Out** is called, use the Oxygen XML Developer API to open your custom URLs (URLs created using your custom protocol). It is important to implement and use a **Custom Protocol** extension in order to be notified when the files are opened and saved and to be able to provide the content for the relative references the files may contain to Oxygen XML Developer. Your custom `java.net.URLStreamHandler` implementation checks out the resource content from the server, stores it locally and provides its content. Sample **Check Out** implementation:

```
/**
 * Sample implementation for the "Check Out" method.
 *
 * @param pluginWorkspaceAccess The plugin workspace access (Workspace Access plugin).
 * @throws MalformedURLException
 */
private void checkOut(StandalonePluginWorkspace pluginWorkspaceAccess) throws MalformedURLException {
    //TODO Show the user a custom dialog box for browsing the CMS
    //TODO after the user selected the resource create an URL with a custom protocol
    // which will uniquely map to the resource on the CMS using the URLHandler
    //something like:
    URL customURL = new URL("mycms://host/path/to/file.xml");
    //Ask Oxygen to open the URL
    pluginWorkspaceAccess.open(customURL);
    //Oxygen will then use your custom protocol handler to provide the contents for the resource
    "mycms://host/path/to/file.xml"
    //Your custom protocol handler will check out the file in a temporary directory for example and provide
    the content from it.
    //Oxygen will also pass through your URLHandler if you have any relative references which need to be
    opened/obtained.
}
```

Here is a diagram of the **Check Out** process:

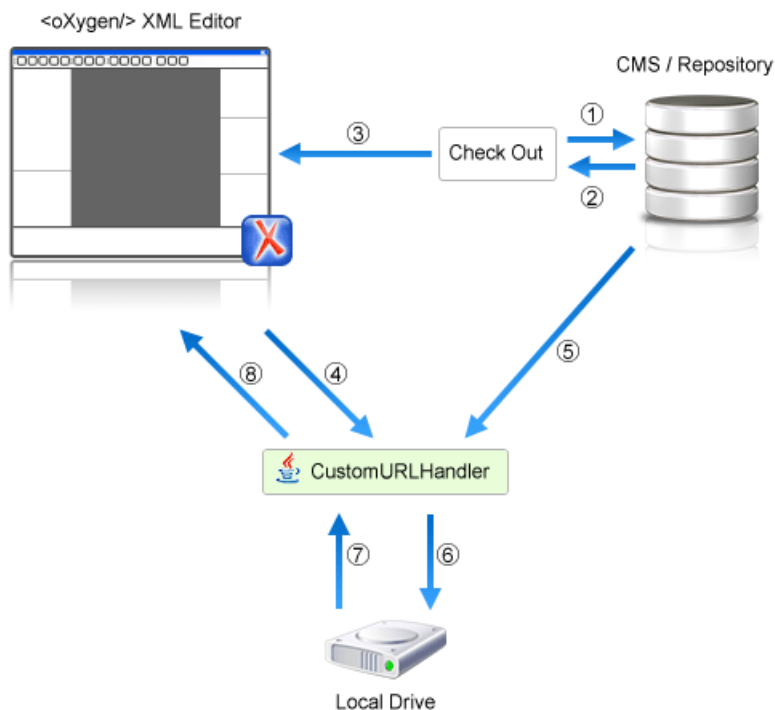

Each phase is described below:

1. Browse CMS repository
2. User chooses a resource
3. Use API to open custom URL: `mycms://path/to/file.xml`
4. Get content of URL: `mycms://path/to/file.xml`
5. Get content of resource
6. Store on disk for faster access
7. Retrieve content from disk if already checked out
8. Retrieved content

- Contribute a special **Browse CMS** action to every dialog box in Oxygen XML Developer where a URL can be chosen to perform a special action (such as the **Reuse Content** or **Insert Image** action). Sample code:

```
//Add an additional browse action to all dialog boxes/places where Oxygen allows selecting an URL.
pluginWorkspaceAccess.addInputURLChooserCustomizer(new InputURLChooserCustomizer() {
    public void customizeBrowseActions(List<Action> existingBrowseActions, final InputURLChooser chooser)
    {
        //IMPORTANT, you also need to set a custom icon on the action for situations when its text is not
        //used for display.
        Action browseCMS = new AbstractAction("CMS") {
            public void actionPerformed(ActionEvent e) {
                URL chosenResource = browseCMSAndChooseResource();
                if (chosenResource != null) {
                    try {
                        //Set the chosen resource in the combo box chooser.
                        chooser.urlChosen(chosenResource);
                    } catch (MalformedURLException e1) {
                        //
                    }
                }
            }
        };
        existingBrowseActions.add(browseCMS);
    }
});
```

When inserting references to other resources using the actions already implemented in Oxygen XML Developer, the reference to the resource is made by default relative to the absolute location of the edited XML file. You can gain control over the way in which the reference is made relative for a specific protocol like:

```
//Add a custom relative reference resolver for your custom protocol.
//Usually when inserting references from one URL to another Oxygen makes the inserted path relative.
//If your custom protocol needs special relativization techniques then it should set up a custom relative
//references resolver to be notified when resolving needs to be done.
pluginWorkspaceAccess.addRelativeReferencesResolver(
    //Your custom URL protocol for which you already have a custom URLStreamHandlerPluginExtension set
    up.
    "mycms",
    //The relative references resolver
    new RelativeReferenceResolver() {
        public String makeRelative(URL baseURL, URL childURL) {
            //Return the referenced path as absolute for example.
            //return childURL.toString();
            //Or return null for the default behavior.
            return null;
        }
    }
);
```

- Write the `plugin.xml` descriptor. Your plugin combines the two extensions using a single set of libraries. The descriptor would look like:

```
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
  name="CustomCMSAccess"
  description="Test"
  version="1.0.0"
  vendor="ACME"
  class="custom.cms.CMSAccessPlugin">
  <runtime>
    <library name="lib/cmsaccess.jar"/>
  </runtime>
  <!--Access to add actions to the main menu and toolbars or to add custom views.-->
  <!--See the "ro.sync.sample.plugin.workspace.CustomWorkspaceAccessPluginExtension" Java sample for more
  details-->
  <extension type="WorkspaceAccess"
    class="custom.cms.CustomWorkspaceAccessPluginExtension"/>
  <!--The custom URL handler which will communicate with the CMS implementation-->
  <!--See the "ro.sync.sample.plugin.workspace.customprotocol.CustomProtocolURLHandlerExtension" Java sample
  for more details-->
  <extension type="URLHandler"
    class="custom.cms.CustomProtocolURLHandlerExtension"/>
</plugin>
```

- Create a `cmsaccess.jar` JAR archive containing your implementation classes.
- Copy your new plugin directory in the `plugins` subfolder of the Oxygen XML Developer install folder and start Oxygen XML Developer.

Class Loading Issues

It is possible that the Java libraries you have specified in the plugin libraries list conflict with the ones already loaded by Oxygen XML Developer. In order to instruct the plugin to prefer its libraries over the ones used by Oxygen XML Developer, you can add the following attribute on the `<plugin>` root element: `classLoaderType="preferReferencedResources"` from the `plugin.xml` descriptor.

A **Late Delegation Class Loader** (the main class loader in Oxygen XML Developer) is a `java.net.URLClassLoader` extension which prefers to search classes in its own libraries list and only if a class is not found there to delegate to the parent class loader.

The main Oxygen XML Developer Class Loader uses as libraries all jars specified in the `[OXYGEN_DIR]\lib` directory. Its parent class loader is the default JVM Class loader. For each plugin instance, a separate class loader is created having as parent the Oxygen XML Developer Class Loader.

The plugin class loader can be either a standard `java.net.URLClassLoader` or a `LateDelegationClassLoader` (depending on the attribute `classLoaderType` in the `plugin.xml`). Its parent class loader is always the Oxygen XML Developer `LateDelegationClassLoader`.

If you experience additional problems like the following:

```
java.lang.LinkageError: ClassCastException: attempting to cast
jar:file:/C:/jdk1.6.0_06/jre/lib/rt.jar!/javax/xml/ws/spi/Provider.class to jar:file:/D:/Program
Files/Oxygen XML Editor
12/plugins/wspcaccess/.../xdocs/lib/jaxws/jaxws-api.jar!/javax/xml/ws/spi/Provider.class
at javax.xml.ws.spi.Provider.provider(Provider.java:94) at
javax.xml.ws.Service.<init>(Service.java:56)
.....
```

The cause could be the fact that some classes are instantiated using the context class loader of the current thread. The most straightforward fix is to write your code in a `try/finally` statement:

```
ClassLoader oldClassLoader = Thread.currentThread().getContextClassLoader();
try {
    //This is the implementation of the WorkspaceAccessPluginExtension plugin interface.
    Thread.currentThread().setContextClassLoader(
        CustomWorkspaceAccessPluginExtension.this.getClass().getClassLoader());
    //WRITE YOUR CODE HERE
} finally {
    Thread.currentThread().setContextClassLoader(oldClassLoader);
}
```

How to Write A Custom Protocol Plugin

For creating a custom protocol plugin, apply the following steps:

1. Write the handler class for your protocol that implements the `java.net.URLStreamHandler` interface. Be careful to provide ways to encode and decode the URLs of your files.
2. Write the plugin class by extending `ro.sync.exml.plugin.Plugin`.
3. Write the plugin extension class that implements the `ro.sync.exml.plugin.urlstreamhandler.URLStreamHandlerPluginExtension` interface.

It is necessary that the plugin extension for the custom protocol implements the `URLStreamHandlerPluginExtension` interface. Without it, you cannot use your plugin, because Oxygen XML Developer is not able to find the protocol handler.

You can choose also to implement the `URLChooserPluginExtension` interface. It allows you to write and display your own customized dialog box for selecting resources that are loaded with the custom protocol.

An implementation of the extension `URLHandlerReadOnlyCheckerExtension` allows you to:

- Mark a resource as read-only when it is opened.
- Switch between marking the resource as read-only and read-write while it is edited.

It is useful when opening and editing CMS resources.

4. Write the `plugin.xml` descriptor.

Remember to set the name of the plugin class to the one from the second step and the plugin extension class name with the one you have chosen at step 3.

5. Create a .jar archive with all these files.
6. Install your new plugin in the `plugins` subfolder of the Oxygen XML Developer install folder.

Pack and Deploy Plugins or Frameworks as Add-ons

Packing a Plugin or Framework as an Add-on

This procedure is suitable for developers who want a better control over the add-on package or those who want to automate some of the steps:

1. Pack the plugin or framework as a ZIP file or a *Java Archive (JAR)*. Note that you should pack the entire root directory not just its contents.
2. Digitally sign the package. Note that you can perform this step only if you have created a *JAR* at the previous step. You will need a certificate signed by a trusted authority. To sign the jar you can either use the `jarsigner` command line tool inside Oracle's Java Development Kit. (`[JDK_DIR]/bin/jarsigner.exe`) or, if you are working with *Apache Ant*, you can use the `signjar` task (which is just a front for the `jarsigner` command line tool).



Note: The benefit of having a signed add-on is that you can verify the integrity of the add-on issuer. If you do not have such a certificate you can generate one yourself using the *keytool* command line tool. This approach is mostly recommended for tests since anyone can create a self signed certificate.

3. Create a descriptor file. You can use a template that Oxygen XML Developer provides. To use this template, go to **File > New** and select the **Oxygen add-ons update site** template. Once deployed, this descriptor file is referenced as *update site*.

Alternatively, you can use the **Add-ons Packager** plugin by following this procedure:

1. Install the **Add-ons Packager** plugin from <http://www.oxygenxml.com/InstData/Addons/optional/updateSite.xml> as described in the *Installing Add-ons procedure*.
2. Restart Oxygen XML Developer. If the add-on is correctly installed, the **Add-ons packager** toolbar action is available.
3. Invoke the **Add-ons packager** toolbar action and input the required information in the displayed dialog box.
4. Press **OK** to complete the packaging process.

Deploying an Add-on

To deploy an add-on, copy the ZIP/JAR file and the descriptor file to an HTTP server. The URL to this location serves as the *Update Site URL*.

How to Share the Classloader Between a Framework and a Plugin

In some cases you may need to extend the functionality of Oxygen XML Developer both through a framework and through a plugin. Normally, a framework and a plugin both run in their own private classloader. If the framework and the plugin use the same JAVA extensions/classes, it is recommended that they share the same classloader. This way, the common classes are loaded by only one classloader and they will both use the same static objects and have the ability to cast objects between one another.

To do this, *open the Preferences dialog box*, go to **Document Type Association**, select the document type, go to the **Classpath** tab, and in the **Use parent classloader from plugin with ID** fields introduce the ID of the plugin. This ID is declared in the *configuration file of the plugin*.



Important: The shared classed must be specified only in the configuration files of the plugin, and not in the configuration file and the document type class path at the same time.

Example - A Selection Plugin

The following plugin is called `UppercasePlugin` and is an example of [selection plugin](#). It is used in Oxygen XML Developer for capitalizing the characters in the current selection. This example consists of two Java classes and the plugin descriptor:

- `UppercasePlugin.java`:

```
package ro.sync.sample.plugin.uppercase;

import ro.sync.exml.plugin.Plugin;
import ro.sync.exml.plugin.PluginDescriptor;

public class UppercasePlugin extends Plugin {
    /**
     * Plugin instance.
     */
    private static UppercasePlugin instance = null;

    /**
     * UppercasePlugin constructor.
     * @param descriptor Plugin descriptor object.
     */
    public UppercasePlugin(PluginDescriptor descriptor) {
        super(descriptor);

        if (instance != null) {
            throw new IllegalStateException("Already instantiated !");
        }
        instance = this;
    }

    /**
     * Get the plugin instance.
     * @return the shared plugin instance.
     */
    public static UppercasePlugin getInstance() {
        return instance;
    }
}
```

- `UppercasePluginExtension.java`:

```
package ro.sync.sample.plugin.uppercase;

import ro.sync.exml.plugin.selection.SelectionPluginContext;
import ro.sync.exml.plugin.selection.SelectionPluginExtension;
import ro.sync.exml.plugin.selection.SelectionPluginResult;
import ro.sync.exml.plugin.selection.SelectionPluginResultImpl;

public class UppercasePluginExtension implements SelectionPluginExtension {
    /**
     * Convert the text to uppercase.
     * @param context Selection context.
     * @return Uppercase plugin result.
     */
    public SelectionPluginResult process(SelectionPluginContext context) {
        return new SelectionPluginResultImpl(
            context.getSelection().toUpperCase());
    }
}
```

- `plugin.xml`:

```
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
    name="UpperCase"
    description="Convert the selection to uppercase"
    version="1.0.0"
    vendor="SyncRO"
    class="ro.sync.sample.plugin.uppercase.UppercasePlugin">
    <runtime>
        <library name="lib/uppercase.jar"/>
    </runtime>
    <extension type="selectionProcessor"
        class="ro.sync.sample.plugin.uppercase.UppercasePluginExtension"/>
</plugin>
```

Creating and Running Automated Tests

If you have developed complex custom plugins and/or document types the best way to test your implementation and insure that further changes will not interfere with the current behavior is to make automated tests for your customization.

An Oxygen XML Developer standalone installation comes with a main `oxygen.jar` library located in the `[OXYGEN_DIR]`. That JAR library contains a base class for testing developer customizations named `ro.sync.exml.workspace.api.PluginWorkspaceTCBase`.

To develop JUnit tests for your customizations using the **Eclipse** workbench, follow these steps:

1. Create a new Eclipse Java project and copy to it the entire contents of the `[OXYGEN_DIR]`.
2. Add to the **Java Build Path->Libraries** tab all JAR libraries present in the `[OXYGEN_DIR]/lib` directory. Make sure that the main JAR library `oxygen.jar` or `oxygenAuthor.jar` is the first one in the Java classpath by moving it up in the **Order and Export** tab.
3. Click **Add Library** and add the JUnit libraries.
4. Create a new Java class which extends `ro.sync.exml.workspace.api.PluginWorkspaceTCBase`.
5. Pass on to the constructor of the super class the following parameters:
 - File `frameworksFolder` The file path to the frameworks directory. It can point to a custom frameworks directory where the custom framework resides.
 - File `pluginsFolder` The file path to the plugins directory. It can point to a custom plugins directory where the custom plugins resides.
 - String `licenseKey` The license key used to license the test class.
6. Create test methods which use the API in the base class to open XML files and perform different actions on them. Your test class could look something like:

```
public class MyTestClass extends PluginWorkspaceTCBase {

    /**
     * Constructor.
     */
    public MyTestClass() throws Exception {
        super(new File("frameworks"), new File("plugins"),
            "-----START-LICENSE-KEY-----\n" +
                "\n" +
                "Registration_Name=Developer\n" +
                "\n" +
                "Company=\n" +
                "\n" +
                "Category=Enterprise\n" +
                "\n" +
                "Component=XML-Editor, XSLT-Debugger, Saxon-SA\n" +
                "\n" +
                "Version=14\n" +
                "\n" +
                "Number_of_Licenses=1\n" +
                "\n" +
                "Date=09-04-2012\n" +
                "\n" +
                "Trial=31\n" +
                "\n" +
                "SGN=MCwCFGNoEGJSeiC3XCyIyalvjzHhGhhqAhRNRdpEu8RIWb8icCJ07HqfVP4++A\\=\n" +
                "\n" +
                "-----END-LICENSE-KEY-----");
    }

    /**
     * <p><b>Description:</b> TC for opening a file and using the bold operation</p>
     * <p><b>Bug ID:</b> EXM-20417</p>
     *
     * @author radu_coravu
     *
     * @throws Exception
     */
    public void testOpenFileAndBoldEXM_20417() throws Exception {
        WSEditor ed = open(new File("D:/projects/exml/test/authorExtensions/dita/sampleSmall.xml").toURL());
        //Move caret
        moveCaretRelativeTo("Context", 1, false);

        //Insert <b>
        invokeAuthorExtensionActionForID("bold");
        assertEquals("<?xml version='1.0' encoding='utf-8'>\n" +
            "<!DOCTYPE task PUBLIC \"-//OASIS//DTD DITA Task//EN\" \n" +
            "\"http://docs.oasis-open.org/dita/v1.1/OS/dtd/task.dtd\">\n" +
```

```

    "<task id=\"taskId\">\n" +
    "    <title>Task <b>title</b></title>\n" +
    "    <prolog/>\n" +
    "    <taskbody>\n" +
    "        <context>\n" +
    "            <p>Context for the current task</p>\n" +
    "        </context>\n" +
    "        <steps>\n" +
    "            <step>\n" +
    "                <cmd>Task step.</cmd>\n" +
    "            </step>\n" +
    "        </steps>\n" +
    "    </taskbody>\n" +
    "</task>\n" +
    "", getCurrentEditorXMLContent());
}
}

```

Debugging a Plugin Using the Eclipse Workbench

To debug problems in the code of the plugin without having to re-bundle the Java classes of the plugin in a JAR library, follow these steps:

1. Download and unpack an [all platforms standalone version](#) of Oxygen XML Developer.



Note: The extracted folder name depends on which product variant you have downloaded. For the purpose of this procedure the folder will be referred to as [OXYGEN_DIR].

2. Set up the *oXygen SDK* following [this set of instructions](#).
3. Create an Eclipse Java Project (for example, MyPluginProject) from one of the sample plugins (the Workspace Access plugin for example).
4. In the MyPluginProject folder, create a folder called myPlugin. In this new folder copy the plugin.xml from the sample plugin. Modify the added plugin.xml to add a library reference to the directory where Eclipse copies the compiled output. To find out where this directory is located, invoke the contextual menu of the project (in the **Project** view), and go to **Build Path > Configure Build Path**. Then inspect the value of the **Default output folder** text box.

Example: If the compiled output folder is classes, then the you need to add in the plugin.xml the following library reference:

```
<library name="../classes"/>
```

5. Copy the plugin.dtd from the [OXYGEN_DIR]/plugins folder in the root MyPluginProject folder.
6. In the MyPluginProject's build path add external JAR references to all the JAR libraries in the [OXYGEN_DIR]/lib folder. Now your MyPluginProject should compile successfully.
7. In the Eclipse IDE, create a new *Java Application* configuration for debugging. Set the **Main class** box to ro.sync.exml.Oxygen. Click the **Arguments** tab and add the following code snippet in the **VM arguments** input box, making sure that the path to the plugins directory is the correct one:

```
-Dcom.oxygenxml.app.descriptor=ro.sync.exml.EditorFrameDescriptor -Xmx1024m
-XX:MaxPermSize=384m -Dcom.oxygenxml.editor.plugins.dir=D:\projects\MyPluginProject
```



Note: If you need to configure the plugin for Oxygen XML Developer, set the com.oxygenxml.app.descriptor to ro.sync.exml.AuthorFrameDescriptor or ro.sync.exml.DeveloperFrameDescriptor, respectively.

8. Add a break point in the source of one of your Java classes.
9. Debug the created configuration. When the code reaches your breakpoint, the debug perspective should take over.

Disabling a Plugin

To disable a plugin, use one of the following two methods:

- [Open the Preferences dialog box](#), go to **Plugins**, and deselect the plugin that you want to disable.

- Create an empty file called `plugin.disable` next to the plugin configuration file (`plugin.xml`). The plugin will be disabled and will no longer be loaded by the application on startup.



Note: This is useful if you want to temporarily stop work on a plugin and use the application without it.

Chapter 17

Tools

Topics:

- [*SVN Client*](#)
- [*Tree Editor*](#)
- [*Comparing and Merging Documents*](#)
- [*XML Digital Signatures*](#)
- [*Large File Viewer*](#)
- [*Hex Viewer*](#)
- [*The Standalone SVG Viewer*](#)
- [*Integrating External Tools*](#)

Oxygen XML Developer includes a variety of helpful tools to help you accomplish XML-related tasks. This section presents many of those tools.

SVN Client

The Syncro SVN Client is a client application for the Apache Subversion™ version control system, compatible with Subversion 1.6, 1.7 and 1.8 servers. It manages files and directories that change over time and are stored in a central repository. The version control repository is much like an ordinary file server, except that it remembers every change ever made to your files and directories. This allows you to access older versions of your files and examine the history of how and when your data changed.

To start Syncro SVN Client, go to **Tools > SVN Client**.

Main Window

This section explains the main window of Syncro SVN Client.

Views

The main window consists of the following views:

- **Repositories view** - Allows you to define and manage Apache Subversion™ repository locations.
- **Working Copy view** - Allows you to manage with ease the content of the working copy.
- **History view** - Displays information (author name, revision number, commit message) about the changes made to a resource during a specified period of time.
- **Editor view** - Allows you to edit different types of text files, with full syntax-highlight.
- **Annotations view** - Displays a list with information regarding the structure of a document (author and revision for each line of text).
- **Compare view** - Displays the differences between two revisions of a text file from the working copy.
- **Image Preview** - Allows you to preview standard image files supported by Syncro SVN Client: JPG, GIF and PNG.
- **Compare Images view** - Displays two images side by side.
- **Properties view** - Displays the SVN properties of a resource under version control.
- **Console view** - Displays information about the currently running operation, similar with the output of the Subversion command line client.
- **Help view** - Shows information about the currently selected view.

The main window's status bar presents in the left side the operation in progress or the final result of the last performed action. In the right side there is a progress bar for the running operation and a stop button to cancel the operation.

SVN Main Menu

The main menu of the Syncro SVN Client is composed of the following menus:

File Menu

New submenu:

New File

This operation creates a new file as a child of the selected folder from the **Repositories view** tree or the **Working Copy view** tree, depending on the view that was last used. Note that for the **Working Copy view**, the file is added to *version control* only if the selected folder is under *version control*.

New Folder (Ctrl (Command on OS X) + Shift + F)

This operation creates a new folder as a child of the selected folder from the **Repositories view** tree or the **Working Copy view** tree, depending on the view that was last used. Note that for the **Working Copy view**, the file is added to *version control* only if the selected folder is under *version control*.

New External Folder (Ctrl (Command on OS X) + Shift + W)

This operation allows you to add a new external definition on the selected folder. An external definition is a mapping of a local directory to *a URL of a versioned directory*, and ideally a particular revision, stored in the `svn:externals` property of the selected folder.



Tip: You can specify a particular revision of the external item by using a [peg revision](#) at the end of the URL (for example, `URL@rev1234`). You can also use peg revisions to access external items that were deleted, moved, or replaced.

The URL used in the external definition format can be relative. You can specify the repository URL that the external folder points to by using one of the following relative formats:

- `../` - Relative to the URL of the directory on which the `svn:externals` property is set.
- `^/` - Relative to the root of the repository in which the `svn:externals` property is versioned.
- `//` - Relative to the scheme of the URL of the directory on which the `svn:externals` property is set.
- `/` - Relative to the root URL of the server in which the `svn:externals` property is versioned.



Important: To change the target URL of an external definition, or to delete an external item, do the following:

1. Modify or delete the item definition found in the `svn:externals` property that is set on the parent folder.
2. For the change to take effect, use the **Update** operation on the parent folder of the external item.



Note: Syncro SVN Client does not support definitions of local relative external items.

Open (Ctrl (Command on OS X) + O)

This action opens the selected file in an editor where you can modify it. The action is active only when a single item is selected. The action opens a file with the internal editor or the external application associated with that file type. This action works on any file selection from the [Repositories view](#), [Working Copy view](#), [History view](#), or [Directory Change Set view](#), depending on the view that was last used to invoke it. In the case of a folder, the action opens the selected folder with the system application for folders (for example, Windows Explorer on Windows or Finder on OS X, etc). Note that opening folders is available only for folders selected in the [Working Copy view](#).

Open with (Ctrl (Command on OS X) + Shift + O)

Displays the **Open with** dialog box for specifying the editor in which the selected file is opened. If multiple files are selected only external applications can be used to open the files. This action works on any file selection from [Repositories view](#), [Working Copy view](#), [History view](#), or [Directory Change Set view](#), depending on the view that was last used to invoke it.

Show in Explorer/Show in Finder

Opens the parent directory of the selected working copy file and selects the file.



Save (Ctrl (Command on OS X) + S)

Saves the local file currently opened in the editor or the **Compare** view.

Save as

Saves any file selected in the **Repositories**, **History**, or **Directory Change Set** view.

Copy URL Location (Ctrl (Command on OS X) + Alt + U)

Copies the URL location of the resource currently selected in the **Repositories** view to clipboard.



Copy to

Copies the currently selected resource, either in **Repositories** or **Working copy** view, to a specified location.



Note: This action can also be used from **History** and **Directory Change Set** views to recover older versions of a repository item.

Move to (Ctrl (Command on OS X) + M)

Moves the currently selected resource, either in **Repositories** or **Working copy** view, to a specified location.

Rename (F2)

Renames the resource currently selected, either in **Repositories** or **Working copy** view.

✗ Delete (Delete)

Deletes the resource currently selected either, in **Repositories** or **Working copy** view.

Locking:

- **Scan for locks (Ctrl (Command on OS X) + L)** - Contacts the repository and recursively obtains the list of locks for the selected resources. A dialog box containing the locked files and the lock description will be displayed. This is only active for resources under *version control*. For more details see [Scanning for locks](#).
-  **Lock (Ctrl (Command on OS X) + K)** - Allows you to lock certain files that need exclusive access. You can write a comment describing the reason for the lock and you can also force (*steal*) the lock. This action is active only on files under *version control*. For more details on the use of this action see [Locking a file](#).
-  **Unlock (Ctrl (Command on OS X) + Alt + K)** - Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

 Show SVN Properties (Ctrl (Command on OS X) + P)

Opens the [Properties view](#) and displays the SVN properties for a selected resource from [Repositories view](#) or [Working Copy view](#), depending on the view that was last used to invoke it.

 Show SVN Information (Ctrl (Command on OS X) + I)

Provides additional information for a selected resource. For more details, go to [Obtain information for a resource](#).

Exit (Ctrl (Command on OS X) + Q)

Closes the application.

Edit Menu **Undo (Ctrl (Command on OS X) + Z)**

Undo edit changes in the local file that is currently opened in the editor or the **Compare** view.

 Redo (Ctrl (Command on OS X) + Y)

Redo edit changes in the local file that is currently opened in the editor or the **Compare** view.

 Cut (Ctrl (Command on OS X) + X)

Cut selection from the local file that is currently opened in the editor view or the **Compare** view to clipboard.

 Copy (Ctrl (Command on OS X) + C)

Copy selection from the local file that is currently opened in the editor or the **Compare** view to clipboard.

 Paste (Ctrl (Command on OS X) + V)

Paste selection from clipboard into the local file that is currently opened in editor or the **Compare** view.

 Find/Replace (Ctrl (Command on OS X) + F)

Perform find and replace operations in the local file that is currently opened in the editor or the **Compare** view.

 Find Next (F3)

Go to the next match using the same find options of the last find operation. This action runs in the editor panel and in any non-editable text area (for example, the **Console** view).

 Find Previous (Shift + F3)

Go to the previous match using the same find options of the last find operation. This action runs in the editor panel and in any non-editable text area (for example, the **Console** view).

Repository Menu **New Repository Location (Ctrl Alt N (Meta Alt N on OS X))**

Displays the **Add SVN Repository** dialog box. This dialog box allows you to define a new repository location.

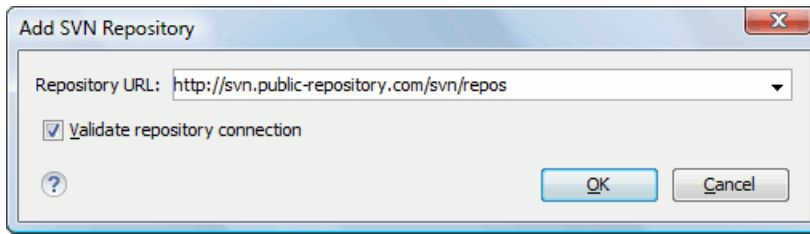


Figure 268: Add SVN Repository Dialog Box

If the **Validate repository connection** option is selected, the URL connection is validated before being added to the **Repositories** view.

Edit Repository Location (Ctrl Alt E (Meta Alt E on OS X))

Context-dependent action that allows you to edit the selected repository location using the **Edit SVN Repository** dialog box. It is active only when a repository location root is selected.

Change the Revision to Browse (Ctrl Alt B (Meta Alt B on OS X))

Context-dependent action that allows you to change the selected repository revision using the **Change the Revision to Browse** dialog box. It is active only when a repository location root is selected.

Remove Repository Location (Ctrl Alt R (Meta Alt R on OS X))

Allows you to remove the selected repository location from the view. It shows you a confirmation dialog box before removal. It is active only when a repository location root is selected.

Refresh (F5)

Refreshes the resource selected in the **Repositories** view.

Check out (Ctrl Alt O (Meta Alt O on OS X))

Allows you to create a working copy from a repository directory, on your local file system. To read more about this operation, see the section [Check out a working copy](#).

Export

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

Import:

Import folder (Ctrl Shift L (Meta Shift L on OS X))

Allows you to import the contents of a specified folder from the file system into the selected folder in a repository. To read more about this operation, see the section [Importing resources into a repository](#).

 **Note:** The difference between the **Import folder** and **Share project** actions is that the latter also converts the selected directory into a working copy.

Import Files (Ctrl Shift I (Meta Shift I on OS X))

Imports the files selected from the files system into the selected folder in the repository.

Working Copy Menu

(on OS X) Working Copies Manager

Opens a dialog box with a list of working copies that the Apache Subversion™ client is aware of. In this dialog box you can add existing working copies or remove those that are no longer needed.

Switch to

Selects one of the following view modes:  **All Files**,  **Modified**,  **Incoming**,  **Outgoing**, or  **Conflicts**.

Refresh (F5)

Refreshes the state of the selected resources or of the entire working copy (if there is no selection).

**Synchronize (Ctrl (Command on OS X) + Shift + S)**

Connects to the repository and determines the working copy and repository changes made to the selected resources. The application switches to **Modified** view mode if the *Always switch to 'Modified' mode* option is selected.

Update (Ctrl (Command on OS X) + U)

Updates all the selected resources that have incoming changes to the HEAD revision. If one of the selected resources is a directory then the update for that resource will be recursive.

Update to revision/depth

Allows you to update the selected resources from the working copy to an earlier revision from the repository. You can also select the update *depth* for the current folder. You can find out more about the *depth* term in the [sparse checkouts](#) section.

Commit

Collects the outgoing changes from the selected resources in the working copy and allows you to choose exactly what resources to commit. A directory will always be committed recursively. Unversioned resources will be deselected by default. In the **Commit** dialog box you can also enter a comment before sending your changes to the repository.

**Update all (Ctrl (Command on OS X) + Shift + U)**

Updates all resources from the working copy that have incoming changes. It performs a recursive update on the synchronized resources.

**Commit all**

Commits all the resources with outgoing changes. It is disabled when **Incoming** mode is selected or the synchronization result does not contain resources with outgoing changes. It performs a recursive commit on the synchronized resources.

**Revert (Ctrl (Command on OS X) + Shift + V)**

Undoes all local changes for the selected resources. It does not contact the repository and the files are obtained from Apache Subversion™ pristine copy. It is enabled only for modified resources. See [Revert your changes](#) for more information.

Edit conflict (Ctrl (Command on OS X) + E)

Opens the **Compare** editor, allowing you to modify the content of the currently conflicting resources. For more information about editing conflicts, see [Edit conflicts](#).

**Mark Resolved (Ctrl (Command on OS X) + Shift + R)**

Instructs the Subversion system that you resolved a conflicting resource. For more information, see [Merge conflicts](#).

**Mark as Merged (Ctrl (Command on OS X) + Shift + M)**

Instructs the Subversion system that you resolved the pseudo-conflict by merging the changes and you want to commit the resource. Read the [Merge conflicts](#) section for more information about how you can solve the pseudo-conflicts.

Override and Update

Drops any outgoing change and replaces the local resource with the HEAD revision. This action is available on resources with outgoing changes, including conflicting ones. See the [Revert your changes](#) section.

Override and Commit

Drops any incoming changes and sends your local version of the resource to the repository. This action is available on conflicting resources. For more information see [Drop incoming modifications](#).

Mark as copied

You can use this action to mark an item from the working copy as a copy of an other item under *version control*, when the copy operation was performed outside of an SVN client. The **Mark as copied** action is available when you select two items (both the new item and source item), and it depends on the state of the source item.

Mark as moved

You can use this action to mark an item from the working copy as being moved from another location of the working copy, when the move operation was performed outside of an SVN client. The **Mark as moved** action is available

when you select two items from different locations (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

Mark as renamed

You can use this action to mark an item from the working copy as being renamed outside of an SVN client. The **Mark as renamed** action is available when you select two items from the same directory (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

Add to "svn:ignore" (Ctrl (Command on OS X) + Alt + I)

Allows you to add files that should not participate in the *version control* operations inside your working copy. This action can only be performed on resources not under *version control*. It actually modifies the value of the `svn:ignore` property in the parent directory of the resource. Read more about this in the [Ignore Resources Not Under Version Control](#) section.



Add to version control (Ctrl (Command on OS X) + Alt + V)

Allows you to add resources that are not under *version control*. For further details, see [Add Resources to Version Control](#) section.

Remove from version control

Schedules selected items for deletion from repository upon the next commit. The items are not removed from the file system after committing.



Clean up (Ctrl (Command on OS X) + Shift + C)

Performs a maintenance cleanup operation on the selected resources from the working copy. This operation removes the Subversion maintenance locks that were left behind. This is useful when you already know where the problem originated and want to fix it as quickly as possible. It is only active for resources under *version control*.



Expand All (Ctrl (Command on OS X) + Alt + X)

Displays all descendants of the selected folder. The same behavior is obtained by double-clicking a collapsed folder.



Collapse all (Ctrl (Command on OS X) + Alt + Z)

Collapses all descendants of the selected folder. The same behavior is obtained by double-clicking a expanded folder.

Compare Menu



Perform Files Differencing

Performs a comparison between the source file and target file.



Next Block of Changes (Ctrl Period (Meta Period on OS X))

Jumps to the next block of changes. This action is disabled when the cursor is positioned on the last change block or when there are no changes.



Note: A change block groups one or more consecutive lines that contain at least one change.



Previous Block of Changes (Ctrl Comma (Meta Comma on OS X))

Jumps to the previous block of changes. This action is disabled when the cursor is positioned on the first change block or when there are no changes.



Next Change (Ctrl Shift Period (Meta Shift Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is disabled when the cursor is positioned on the last change or when there are no changes.



Previous Change (Ctrl Shift Comma (Meta Shift M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is disabled when the cursor is positioned on the first change or when there are no changes.

 Last Change (Ctrl E (Meta E on OS X))

Jumps to the last change.

 First Change (Ctrl B (Meta B on OS X))

Jumps to the first change.

 Copy All Non-Conflicting Changes from Right to Left

This action copies all non-conflicting changes from the right editor to the left editor. A non-conflicting change from the right editor is a change that does not overlap with a left editor change.

 Copy Change from Right to Left

This action copies the selected change from the right editor to the left editor.

 Show Word Level Details

Provides a word-level comparison of the selected change.

 Show Character Level Details

Provides a character-level comparison of the selected change.

 Format and Indent Both Files (Ctrl Shift P (Meta Shift P on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

 Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before the strings are compared they are first normalized and then the whitespace at the beginning and the end of the strings is trimmed.

History Menu

 Show History (Ctrl (Command on OS X) + H)

Displays the history for a SVN resource at a given revision. The resource can be one selected from the **Repositories** view, **Working Copy** view, or from the **Affected Paths** table from the **History** view, depending on which view was last focused when this action was invoked.

 Show Annotation (Ctrl Shift A (Meta Shift A on OS X))

Opens the **Show Annotation** dialog box that computes *the annotations for a file and displays them in the Annotations view*, along with the history of the file in the **History** view.

Repositories

This operation is available for any resource selected from view, **Working Copy** view, **History** view or **Directory Change Sets** view, depending on which view was last focused when this action was invoked.

 Revision Graph (Ctrl (Command on OS X) + G)

This action allows you to see the graphical representation of a resource's history. For more details about a resource's revision graph see the section *Revision Graph*. This operation is enabled for any resource selected into the **Repositories** view or **Working Copy** view.

Tools Menu

Share project

Allows you to *share a new project* using an SVN repository. The local project is automatically converted into an SVN working copy.

Branch / Tag

Allows you to copy the selected resource from the **Repositories** view or **Working Copy** view to a branch or tag into the repository. To read more about this operation, see the section *Creating a Branch / Tag*.

 Merge (Ctrl (Command on OS X) + J)

Allows you to merge the changes made on one branch back into the trunk, or vice versa, using the selected resource from the working copy. To read more about this operation, see the section [Merging](#).

Switch (Ctrl (Command on OS X) + Alt + W)

Allows you to change the repository location of a working copy, or only of a versioned item of the working copy, within the same repository. It is available when the selected item of the working copy is a versioned resource, except for *external* items. To read more about this action, see the [Switching the Repository Location](#) section.

Relocate

Allows you to change the base URL of the root folder of the working copy to a new URL when the base URL of the repository changed. For example, if the repository itself was moved to a different server. This operation is only available for the root item of the working copy. To read more about this operation, see the [Relocate a Working Copy](#) section.

 Create patch (Ctrl (Command on OS X) + Alt + P)

Allows you to create a file containing all the differences between two resources, based on the `svn diff` command. To read more about creating patches, see [the section about patches](#).

Working copy format

This submenu contains the following two operations:

 Upgrade

Upgrades the format of the currently loaded working copy to the newest one known by Syncro SVN Client. This allows you to benefit of all the new features of the client.

 Downgrade

Downgrades the format of the currently loaded working copy to SVN 1.7 format. This is useful if you want to use older SVN clients with the current working copy, or, by mistake, you have upgraded the format of an older working copy to SVN 1.8.



Note: SVN 1.7 working copies cannot be downgraded to older formats.

See the section [Working Copy Format](#) to read more about this subject.

Options Menu**Preferences**

Opens the **Preferences** dialog box.

Menu Shortcut Keys

Opens the **Preferences** dialog box directly on the **Menu Shortcut Keys** option page, where users can configure in one place the keyboard shortcuts available for menu items available in Syncro SVN Client.

Global Run-Time Configuration

Allows you to configure SVN general options, that should be used by all the SVN clients you may use:

- **Edit 'config' file** - In this file you can configure various SVN client-side behaviors.
- **Edit 'servers' file** - In this file you can configure various server-specific protocol parameters, including HTTP proxy information and HTTP timeout settings.

Export Options

Allows you to export the current options to an XML file.

Import Options

Allows you to import options you have previously exported.

Reset Options

Resets all your options to the default ones.

Reset Authentication

Resets the Subversion authentication information.

Window Menu**Show View**

Allows you to select the view you want to bring to front.

Show Toolbar

Allows you to select the toolbar you want to be visible.

Enable flexible layout

Toggles between a fixed and a flexible layout. When the flexible layout is enabled, you can move and dock the internal views to adapt the application to different viewing conditions and personal requirements.

Reset Layout

Resets all the views to their default position.

Help Menu**Help (F1)**

Opens the **Help** dialog box.

Use online help (Enabled by default)

If this option is enabled, when you select **Help** or press **F1** while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is disabled or an internet connection fails, the help documentation is opened in offline mode.

Show Dynamic Help view

Displays the **Dynamic Help** view.

Report Problem

Opens a dialog box that allows you to write the description of a problem that was encountered while using the application.

Support Center

Opens the Support Center web page in a browser.

About

Opens the **About** dialog box.

SVN Main Toolbar

The toolbar of the Syncro SVN Client SVN Repositories window contains the following actions:

**Check out**

Checks out a working copy from a repository. The repository URL and the working copy format must be specified.

**Synchronize**

Synchronizes the current working copy with the repository.

**Update All**

Updates all resources of the working copy that have an older revision than repository.

**Commit All**

Commits all resources of working copy that have a newer version compared to that of the repository.



Refresh

Refreshes the whole content of the current working copy from disk starting from the root folder. At the end of the operation, the modified files and folders that were not committed to repository yet, are displayed in the **Working Copy** view.



Compare

The selected resource is compared with:

- The *BASE* revision, when the selected resource is:
 - Locally modified and the **All Files** view mode is currently selected (no matter if there are incoming changes).
 - Locally modified and there are no incoming changes when any other view mode is selected.
- The remote version of the same resource, when remote information is available after a **Synchronize** operation (only when one of **Modified**, **Incoming**, **Outgoing** and **Conflicts** view modes is selected).
- The working copy revision, when the selected resource is from the **History** view.



Show History

Displays the history of the selected resource (from the **Working Copy** or **Repository** views) in the **History** view.



Show Annotation

Displays the annotations of the selected resource. The selected resource can be in the **Working Copy** or the **History** views.



Revision Graph

Displays the revision graph of the selected resource. The selected resource can be in the **Working Copy** or the **Repositories** views.



Enable/Disable flexible layout

Toggles between a fixed and a flexible layout. When the flexible layout is enabled, you can move and dock the internal views to adapt the application to different viewing conditions and personal requirements.

Status Bar

The status bar of the Syncro SVN Client window displays important details of the current status of the application. This information is available only in the **Working Copy** view.




Figure 269: Status bar

The status bar is composed of the following areas:

- The path of the currently processed file from the current working copy (during an operation like **Check out** or **Synchronize**) or the result of the last operation.
- The current status of the following working copy options:
 - Show ignored files (□).
 - Show deleted files (■).
 - Process svn:externals definitions (■).

The options for ignored and deleted files are switched on and off from *the Settings menu* of the **Working Copy** panel:

- The format of the currently loaded working copy.
- The current numbers of incoming changes (), outgoing changes () and conflicting changes ().
- A progress bar for the currently running SVN operation and a button () that allows you to stop it.

Getting Started

This section explains the basic operations that can be done in Syncro SVN Client.

SVN Repository Location

This section explains how to add and edit the repository locations in Syncro SVN Client.

Add / Edit / Remove Repository Locations

Usually, team members do all of their work separately, in their own working copy, and then must share their work by committing their changes. This is done using an Apache Subversion™ repository. Oxygen XML Developer supports versions 1.4, 1.5, 1.6, 1.7, and 1.8 of the SVN repository format.

Before you can begin working with a Subversion repository, you must define a repository location in the [Repositories view](#).

To create a repository location, use the  **New Repository Location** action that is available in the **Repository** menu, the **Repositories** view toolbar, and in the contextual menu. This action opens the **New Repository Location** dialog box, which prompts you for the [URL of the repository](#) you want to connect to. You can also [use peg revisions at the end of the URLs](#) (for example, URL@rev1234) to browse only that specific revision. No authentication information is requested at the time the location is defined. It is left to the Subversion client to request the user and password information when it is needed. The main benefit of allowing Subversion to manage your password is that it prompts you for a new password only when your password changes.

Once you enter the repository URL, Oxygen XML Developer tries to contact the server to get the content of the repository for displaying it in the [Repositories view](#). If the server does not respond in the timeout interval set in the preferences, an error is displayed. If you do not want to wait until the timeout expires, you can use the  **Stop** button from the toolbar of the view.

To edit a repository location, use the  **Edit Repository Location** action that is available in the **Repository** menu and in the contextual menu. This action opens the **Edit Repository Location** dialog box, which prompts you for the [URL of the repository](#) you want to connect to. You can also [use peg revisions at the end of the URLs](#) (for example, URL@rev1234) to browse only that specific revision.

To remove a repository location, use the  **Remove Repository Location** action that is available in the **Repository** menu and in the contextual menu. A confirmation dialog box is displayed to make sure that you do not accidentally remove the wrong locations.

The order of the repositories can be changed in the **Repositories** view at any time with the  **Up** arrow and  **Down** arrow buttons on the toolbar of the view. For example, pressing the up arrow once moves the selected repository in the list up one position.

To set the reference revision number of an SVN repository use the **Change the Revision to Browse** action that is available in the **Repository** menu and in the contextual menu. The revision number of the repository is used for displaying the contents of the repository when it is viewed in the [Repositories view](#). Only the files and folders that were present in the repository at the moment when this revision number was generated in the repository are displayed as contents of the repository tree. Also, this revision number is used for all the operations executed directly from the [Repositories view](#).

Authentication

Five protocols are supported: *HTTP*, *HTTPS*, *SVN*, *SVN + SSH* and *FILE*. If the repository that you are trying to access is password protected, the **Enter authentication data** dialog box requests a user name and a password. If the **Store authentication data** checkbox is checked, the credentials are stored in Apache Subversion™ default directory:

- Windows - %HOME%\Application Data\Subversion\auth. Example: C:\Documents and Settings\John\Application Data\Subversion\auth

- Linux and OS X - \$HOME/.subversion/auth. Example: /home/John/.subversion/auth

There is one file for each server that you access. If you want to make Subversion forget your credentials, you can use the **Reset authentication** command from the **Options** menu. This causes Subversion to forget all your credentials. When you reset the authentication data, restart Oxygen XML Developer for the change to take effect.

Tip: The *FILE* protocol is recommended if the SVN repository and Oxygen XML Developer are located on the same computer as it ensures faster access to the SVN repository compared with other protocols.

For HTTPS connections where client authentication is required by your SSL server, you must choose the certificate file and enter the corresponding certificate password which is used to protect your certificate.

When using a secure HTTP (HTTPS) protocol for accessing a repository, a **Certificate Information** dialog box is displayed and asks you whether you want to accept the certificate permanently, temporarily, or simply deny it.

If the repository has SVN+SSH protocol, the SSH authentication can also be made with a private key and a pass phrase.

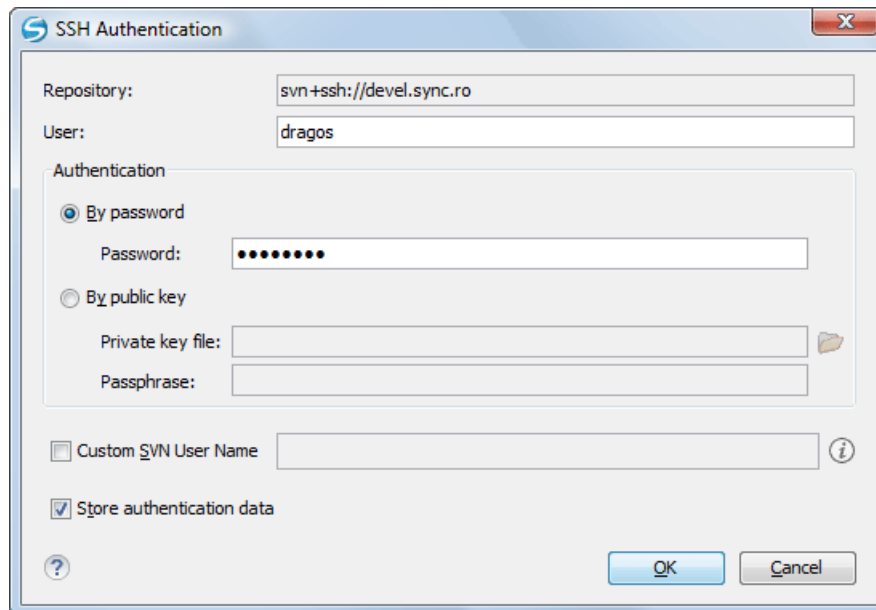


Figure 270: User & Private Key Authentication Dialog Box

After the SSH authentication dialog box, another dialog box appears for entering the SVN user name that accesses the SVN repository. The SVN user name is recorded as the *committer* in SVN operations.

When connecting for the first time to a Subversion repository through SVN+SSH protocol, you will be asked to confirm if you trust the SSH host. The same dialog box is also displayed when the server changed the SSH key or when the key was deleted from the local Subversion cache folder.

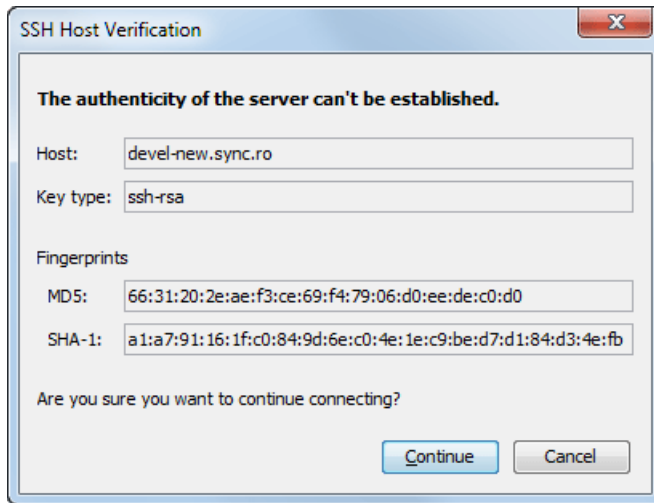


Figure 271: SSH server name and key fingerprint

Share a Project

Even if you start developing a new project, or you want to migrate an existing one to Subversion, the Syncro SVN Client allows you to easily share it with the rest of your team. The shared project directory is automatically converted to a working copy and added under Syncro SVN Client management. The **Share project** action is available in the **Tools** menu and the contextual menu of the **Repositories** view.

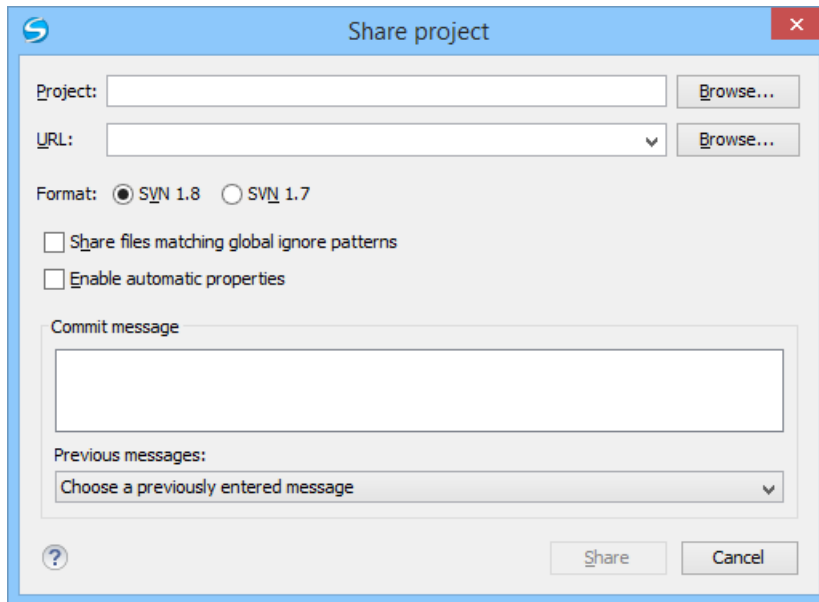


Figure 272: Share Project Dialog Box

The following options can be configured in the **Share project** dialog box:

Project

The location of the project folder on the local disk by using the text box or the **Browse** button. This folder should not be empty or already under version control.



Important: By default, the SVN system only imports the content of the specified folder, and not the root folder itself. Therefore, it is recommended to use the **Browse** button to select the project folder so that the client will automatically append the name of it to the specified URL.

URL

The new location of the project (inside the repository) that will be used to access it.



Note: *Peg revisions* have no effect for this operation since it is used to send information to the repository.



Attention: If the new location already exists, make sure that it is an empty directory to avoid mixing your project content with other files (if items exist with the same name, an error will occur and the operation will not proceed). Otherwise, if the address does not exist, it is created automatically.

Format

The SVN format of the working copy. You can choose between **SVN 1.8** or **SVN 1.7**.

Share files matching global ignore patterns

When enabled, the file names that match the patterns defined in either of the following locations are also imported into the repository:

- The `global-ignores` property in [the SVN configuration file](#).
- The [File name ignore patterns option](#) in the **SVN > Working Copy preferences page**.

Enable automatic properties/Disable automatic properties

Enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in [the SVN configuration file](#).



Note: This option is available only when there are defined properties to be applied automatically for newly added items under version control. You can define these properties in the SVN `config` file (in the `auto-props` section). Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

Defining a Working Copy

An Apache Subversion™ working copy is an ordinary directory tree on your local system, containing a collection of files. You can edit these files however you want, your working copy being your private work area. In order to make your own changes available to others or incorporate other people's changes, you must explicitly tell Subversion to do so. You can even have multiple working copies of the same project.

svnkit										
All Files Modified Incoming Outgoing Conflicts										
Name			Date	Revision	Author				Size	Type
E:\svnkit		●	May 15, 2011	7636	alex					File Folder
gradle			May 4, 2011	7623	alex					File Folder
wrapper			May 4, 2011	7623	alex					File Folder
gradle-wrapper.jar		●	May 4, 2011	7618	alex			🔒	12 KB	Executable ...
gradle-wrapper.properties		●	May 4, 2011	7623	alex			🔒	1 KB	PROPERTIE...
svnkit		●	May 15, 2011	7636	alex					File Folder
svnkit-cli		●	May 10, 2011	7630	alex					File Folder
.settings		●	May 4, 2011	7618	alex					File Folder
src			May 10, 2011	7630	alex					File Folder
main			May 10, 2011	7630	alex					File Folder
conf			May 4, 2011	7618	alex					File Folder
java			May 4, 2011	7622	alex					File Folder
resources			May 4, 2011	7618	alex					File Folder
scripts			May 10, 2011	7630	alex					File Folder
jsvn		●	May 4, 2011	7618	alex			🔒	2 KB	File
jsvn.bat		●	May 10, 2011	7630	alex			🔒	2 KB	Windows B...
jsvnsetup.openvms		●	May 4, 2011	7618	alex			🔒	1 KB	OPENVMS File
build.gradle		●	May 4, 2011	7618	alex			🔒	2 KB	GRADLE File
svnkit-dav		●	May 4, 2011	7620	alex			🔒		File Folder
svnkit-distribution		●	May 4, 2011	7623	alex					File Folder
svnkit-javahl16		●	May 4, 2011	7618	alex					File Folder
svnkit-osgi		●	May 4, 2011	7623	alex					File Folder
svnkit-test		●	May 12, 2011	7635	alex					File Folder
.settings		●	May 4, 2011	7618	alex					File Folder
configurations			May 4, 2011	7618	alex					File Folder

Figure 273: Working Copy View

A Subversion working copy also contains some extra files, created and maintained by Subversion, to help it keep track of your files. In particular, each directory in your working copy contains a subdirectory named `.svn`, also known as the working copy *administrative directory*. This administrative directory contains an unaltered copy of the last updated files from the repository. This copy is usually referred to as the *pristine copy* or the *BASE revision* of the working copy. These files help Subversion recognize which files contain unpublished changes, and which files are out-of-date with respect to others' work.

A typical Subversion repository often holds the files (or source code) for several projects. Usually each project is a subdirectory in the repository's file system tree. In this arrangement, a user's working copy usually corresponds to a particular sub-tree of the repository.

Check Out a Working Copy

Check out means to make a copy of a project from a repository to your local file system. This copy is called a *working copy*. An Apache Subversion™ working copy is a specially formatted directory structure that contains additional `.svn` directories, which store Subversion information, as well as a pristine copy of each item that is checked out.

To check out a working copy, locate and select the desired directory in the **Repositories** view and select the **Check out** action from the contextual menu, the toolbar, or the **Repository** menu.

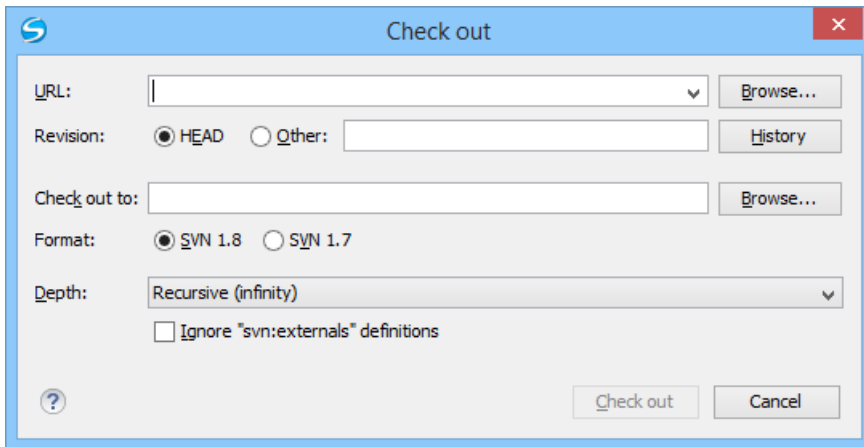


Figure 274: Check Out Dialog Box

The following options can be configured in the **Check out** dialog box:

URL

The location of the repository directory to be checked out.



Note: To check out an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a *peg revision* at the end (for example, URL@rev1234).

Revision

You can choose between the **HEAD** or **Other** revision. If you need to *check out* a specific revision, specify it in the **Other** text box or use the **History** button and choose a revision from *the History dialog box*.

Check out to

Specify *the location where you want to check out* the new working copy by typing the local path in the text box or by using the **Browse** button. If the specified local path does not point to an existing directory, it will automatically be created.



Important: By default, the SVN system only checks out the content of the directory specified by the URL, and not the directory itself. Therefore, it is recommended to use the **Browse** button to select the *check out* location so that the client will automatically append the name of the remote directory to the path of the selected directory.



Warning: The destination directory should be empty. If files exist, they are skipped (left unchanged) by the *check out* operation and *displayed as modified* after the operation has finished. Also, the destination directory must not already be under version control.

Format

The SVN format of the working copy. You can choose between **SVN 1.8** or **SVN 1.7**.

Depth

The depth is useful if you want to *check out* only a part of the selected repository directory and bring the rest of the files and subdirectories in a future update. You can find out more about the checkout depth in the *sparse checkouts* section. You can choose between the following depths:

- **Recursive (infinity)** - Checks out all the files and folders contained in the selected folder.
- **Immediate children (immediates)** - Checks out only the child files and folders without recursing subfolders.
- **File children only (files)** - Checks out only the child files.
- **This folder only (empty)** - Checks out only the selected folder (no child file or folder is included).

Ignore "svn:externals" definitions

When enabled, external items are ignored in the *check out* operation. This option is only available if you choose the **Recursive (infinity)** depth.

After a check out, the new working copy is added to the list in the *Working Copy view* and loaded automatically.

The History Dialog Box

The **History** dialog box presents a list of revisions for a resource. It is opened from the dialog boxes that require setting an SVN revision number, such as *the Check Out dialog box* or *the Branch / Tag dialog box*. It presents information about revision, commit date, author, and commit comment.

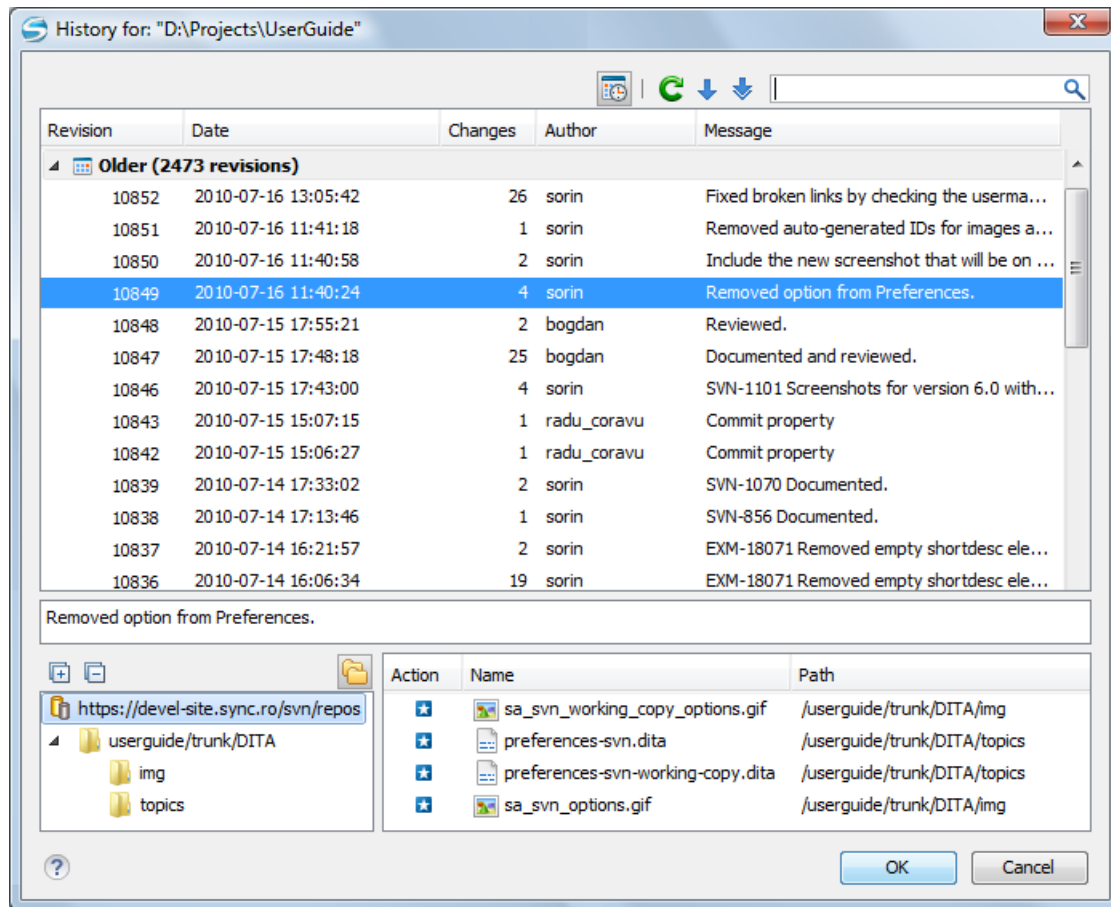


Figure 275: History Dialog Box

The initial number of entries in the list is 50. Additional revisions can be added to the list using the **Get next 50** and **Get all** buttons. The list of revisions can be refreshed at any time with the **Refresh** button. You can group revisions in predefined time frames (today, yesterday, this week, this month), by pressing the **Group by date** button from the toolbar.

The **Affected Paths** area displays all paths affected by the commit of the revision selected in history. You can see the changes between the selected revision and the file's previous state using the **Compare with previous version** action, available in the contextual menu.

Use an Existing Working Copy

Using an existing working copy is the process of taking a working copy that exists on your file system and connecting it to Apache Subversion™ repository. If you have a brand new project that you want to import into your repository, then see the section *Import resources into the repository*. The following procedure assumes that you have an existing valid working copy on your file system.

1. Click the **Working Copies Manager** toolbar button  (on Mac OS X) in the *Working Copy view*.

This action opens the **Working copies list** dialog box.

2. Press the **Add** button.
3. Select the working folder copy from the file system. The name is useful to differentiate between working copies located in folders with the same name. The default name is the name of the root folder of the working copy.



Note: For SVN 1.7 and newer working copies, all the internal information is kept only in the root directory. Thus, Syncro SVN Client needs to load the whole working copy.

4. Press the **OK** button.

The selected working copy is loaded and presented in the [Working Copy view](#).



Notice: You can add working copies older than SVN 1.7. However, to load any of them, Syncro SVN Client will require to upgrade the working copy to SVN 1.8 format.

Manage Working Copy Resources

This section explains how to work with the resources that are displayed in the **Working Copy** view.

Edit Files

You can edit files from the [Working Copy view](#) by double clicking them or by right clicking them and choosing **Open** from the contextual menu.

Note that only one file can be edited at a time. If you try to open another file, it is opened in the same editor window. The editor has syntax highlighting for known file types, meaning that a different color is used for each type of recognized token in the file. If the selected file is an image, then it is previewed in the editor, with no access to modifying it.

After modifying and saving a file from a working copy, a modified marker - an asterisk (*) - will be added to the file's icon in the [Working Copy view](#). The asterisk marks the files that have local modifications that were not committed to the repository.

Add Resources to Version Control

To share new files and folders (created in your working copy), add them to version control using the **Add to version control** option from the [Working Copy view](#).

You can easily spot resources not under version control by the  (*unversioned*) icon displayed in the  **Local file status** column. Resources scheduled for addition (*added*) are displayed with this icon  in the **Working Copy** view and are added in the repository after you commit them.



Note: Do not make a confusion between  and  icons. The former icon stands for resources that are actually copies of resources already committed in the repository, meaning they are *scheduled for addition with history*.

When you use the **Add to version control** option on a directory, its entire structure is scanned and all the resources that can be added under version control are presented.

Though it is not mandatory to add resources under version control explicitly, it is recommended. If you forgot to add a resource, when you [commit your changes](#), the resource is presented in the commit dialog box, but not selected. When you commit and *unversioned* resource, it is automatically added under version control before starting the commit operation.

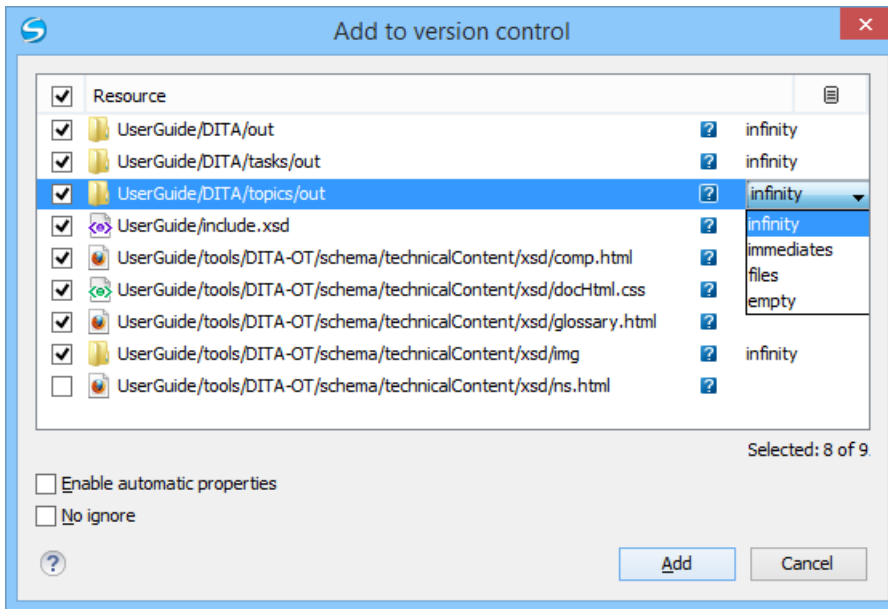


Figure 276: Add to Version Control Dialog Box

Note: Ignored (I) items can also be added under version control.

The **Depth** column is displayed only when directories are also presented in the dialog box. For any directory, you can use one of the available values to instruct Subversion to limit the scope of the operation to a particular tree depth.

Note: The initial value of the **Depth** field can have the following values, depending on the [listing mode of the items in the working copy view](#):

- *infinity* - When the working copy items are presented as a tree.
- *files* - When the working copy items are presented compressed.
- *empty* - When the working copy items are presented flat.

When you add unversioned or ignored directories, the initial value of the **Depth** field also depends on the state of the **Show unversioned directories content** and **Show ignored directories content** options. If these options are enabled, the value is based on the listing mode of the items in the working copy view. When they are disabled, the value is *empty*.

The following options are available in this dialog box:

- **Enable automatic properties** or **Disable automatic properties** - enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in the `config` file of the Subversion configuration directory.

Note: This option is available only when there are defined properties to be applied automatically for resources newly added under version control. You can define these properties in the `config` file of the Subversion configuration directory, in the `auto-props` section. Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

- **No ignore** - when you enable this option, file-name patterns defined to ignore *unversioned* resources do not apply. Resources that are located inside an *unversioned* directory selected for addition, and match these patterns, are also scheduled for addition in the repository.



Note: This option is available only when directories are also presented in the dialog box.

You can define file-name patterns to ignore *unversioned* resources in one of the following locations:

- In the `config` file of the Subversion configuration directory (the `global-ignores` option from the `miscellany` section).
- In the Oxygen XML Developer options ([open the Preferences dialog box](#) and go to **SVN > Working copy > Application global ignores**).

Each of the above two options is activated only when you select an item for which the option can be applied.

Ignore Resources Not Under Version Control

Some resources inside your working copy do not need to be subject to version control. These resources can be files created by the compiler, `*.obj`, `*.class`, `*.lst`, or output folders used to store temporary files. Whenever you [commit changes](#), Apache Subversion™ shows your modified files but also the unversioned files, which fill up the file list in the commit dialog box. Though the unversioned files are committed unless otherwise specified, it is difficult to see exactly what you are committing.

The best way to avoid these problems is to add the derived files to the Subversion ignore list. That way they are never displayed in the commit dialog box and only genuine unversioned files that must be committed are displayed.

You can choose to ignore a resource by using the **Add to svn:ignore** action in the contextual menu of the [Working Copy view](#).

In the **Add to svn:ignore** dialog box, you can specify the resource to be ignored by name or by a custom pattern. The custom pattern can contain the following wildcard characters:

- `*` - Matches any string of characters of any size, including the empty string.
- `?` - Matches any single character.

For example, you can choose to ignore all text documents by using the pattern: `*.txt`.

The action **Add to svn:ignore** adds a predefined Subversion property called `svn:ignore` to the parent directory of the specified resource. In this property, there are specified all the child resources of that directory that must be ignored. The result is visible in the **Working Copy** view. The ignored resources are represented with gray icons.

Delete Resources

The  **Delete** action is available in the contextual menu of the [Working Copy view](#). When you delete an item from the working copy, it is marked as *deleted* (scheduled for deletion from repository upon the next commit) and removed from the file system. Depending on the state of each item, you are prompted to confirm the operation.

If a resource is deleted from the file system without Subversion's knowledge, the resource is marked as *missing* () in your working copy. You can decide what you want to do with a *missing* item:

- In the case of a commit, any *missing* item is first automatically deleted and then committed.



Note: Not any *missing* item can be committed as *deleted*, and removed from the repository. For example, you cannot commit an item that no longer exists on the disk and that was scheduled for addition () previously, since this item does not exist in the repository, but you can use the **Delete** action instead.

- If you want to recover *missing* items, either [update](#) the items themselves or one of their parent directories. This fetches their latest version from the repository.

You can also delete conflicting items (file content conflicts, property conflicts, tree-conflicts) and Syncro SVN Client automatically marks them as resolved.



Note: It is recommended that you resolve conflicts manually to avoid losing any important remote modifications.

Finally, you can change your mind and [revert](#) the deleted items to their initial, pristine, state.

Copy Resources

You can copy several resources from different locations of the working copy. You select them in the [Working Copy view](#) and then use **Copy to** from the contextual menu. This is not a simple file system copy, but an Apache Subversion™ command. It will copy the resource and the copy will also have the original resource's history. This is one of Subversion's very important features, as you can keep track of where the copied resources originated.

Based on the selected items, the **Copy to** action is enabled only if it can be performed. Even if the operation would not normally be possible in SVN (due to some invalid local file states against copy), Oxygen XML Developer performs the copy operation as a simple file system operation. This means no SVN versioning meta-data is affected.



Note:

- If you copy an item to a directory that is [not under version control](#) (*unversioned* or *ignored*), the history of the item is not preserved. For example, when copying directories, all items inside them will also be copied without history.
- If you copy a directory that contains [external](#) items, these are not copied. This is specific for SVN 1.7 working copies only. To fetch the *external* items, use the **Update** operation on the copied directory.

In the **Copy to** dialog box, you can navigate through the working copy directories in order to choose a target directory, to copy inside it. If you try to copy a single resource you are also able to change that resource's name. For *versioned* items, you can select **Ignore resource history** to copy them without their history (similar to a simple file system copy).



Note: The **Copy to** dialog box only presents all the local directories that are a valid destination against the copy operation, based on their local file status. Also, the [working copy settings](#) are taken into account.

In the **Commit** dialog box, only the directory in question will appear without its children.

Move Resources

As in the case of the copy command, you can move several resources at once. Select the resources in the [Working Copy view](#) and choose the **Move to** action from the contextual menu. The move command actually behaves as if a copy followed by a delete command were issued. You will find the moved resources at the desired destination and also at their original location, but marked as *deleted*.



Note: *External* items cannot be moved using the **Move to** action, because they cannot be deleted. Instead, you should edit the `svn:externals` property defining the *external* item and use the **Update** operation on the item's parent folder for the change to take effect.



Attention: For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination, otherwise the commit operation will fail.

Rename Resources

The **Rename** action is available in the contextual menu of the [Working Copy view](#) and can be performed on a single resource. This action acts as a move command with the destination directory being the same as the original location of the resource. A copy of the original item is created with the new name, also keeping its history. The original item is marked as *deleted*.



Note: *External* items cannot be renamed using the **Rename** action because they cannot be deleted. Instead, you should edit the `svn:externals` property defining the *external* item, then use the **Update** operation on the item's parent folder for the change to take effect.



Attention: For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination, otherwise the commit operation will fail.

Lock / Unlock Resources

The idea of version control is based on the *copy-modify-merge* model of file sharing. This model states that each user contacts the repository and creates a local working copy (check out). Users can then work independently and modify their working copies according to their needs. When their goal has been accomplished, it is time for the users to share

their work with the others, to send them to the repository (commit). When a user has modified a file that has been also modified on the repository, the two files will have to be merged. The version control system assists the user with the merging as much as it can, but in the end the user is the one that must make sure it is done correctly.

The copy-modify-merge model only works when files are contextually mergeable: this is usually the case of line-based text files (such as source code). However this is not always possible with binary formats, such as images or sounds. In these situations, the users must each have exclusive access to the file, ending up with a *lock-modify-unlock* model. Without this, one or more users could end up wasting time on changes that cannot be merged.

An SVN lock is a piece of metadata which grants exclusive access to a user. This user is called the lock owner. A lock is uniquely identified by a lock token (a string of characters). If someone else attempts to commit the file (or delete a parent of the file), the repository demands two pieces of information:

- User authentication - the user performing the commit must be the lock owner
- Software authorization - the user's working copy must have the same lock token as the one from the repository, proving that it is the same working copy where the lock originated from.

Scanning for Locks

When starting to work on a file that is not contextually mergeable (usually a binary file), it is better to verify if someone else is not already working on that file. You can do this in the [Working Copy view](#) by selecting one or more resources, then right-clicking them and choosing the **Scan for Locks** action from the contextual menu.

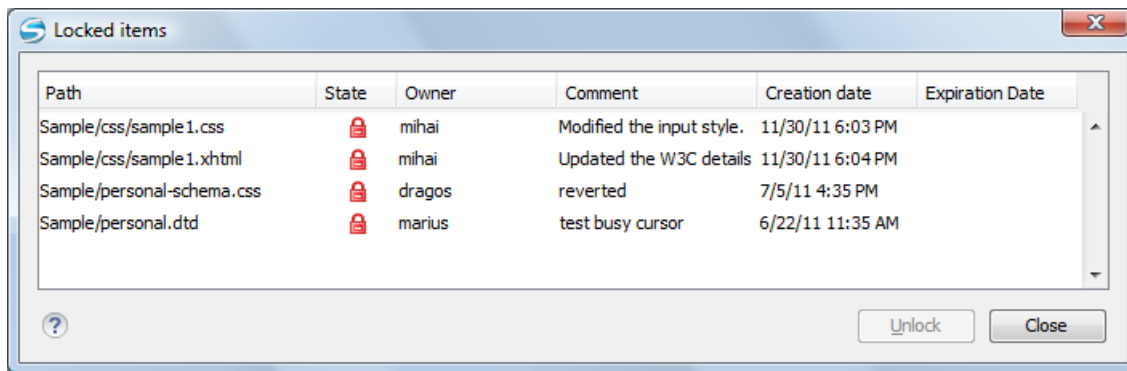


Figure 277: The locked Items Dialog Box

The **Locked items** dialog box contains a table with all the resources that were found locked on the repository. For each resource there are specified: resource path, state of the lock, owner of the lock, lock comment, creation and expiration date for the lock (if any).

The state of the lock can be one of the following:

- - Appears when one of the following conditions apply:
 - Another user has locked the file in the repository.
 - The file was locked by the same user from another working copy.
 - The file was locked from the **Repositories** view.
- - Displayed after you have locked a file from the current working copy.
- - A file already locked from your working copy is no longer locked in the repository (it was unlocked by another user).
- - A file already locked from your working copy is being locked by another user. Now the owner of the file lock is the user who stole the lock from you.

You can unlock a resource by selecting it and pressing the **Unlock** button.

Locking a File

By locking a file, you have exclusive write access to it in the repository.

You can lock a file from your working copy or directly from the **Repositories** view.



Note: You can only lock files (not directories). This is a restriction imposed by Apache Subversion™.

The **Lock** dialog box allows you to write a comment when you set a lock or when you *steal* an existing one. Note that you should *steal* a lock only after you made sure that the previous owner no longer needs it, otherwise you may cause an unsolvable conflict, which could be the reason the lock was put there in the first place. The Subversion server can have a policy concerning lock stealing, as it may not allow you to do this if certain conditions are not met.

The lock stays in place until you unlock the file or until someone breaks it. There is also the possibility that the lock expires after a period of time specified in the Subversion server policy.

Unlocking a File

A file can be unlocked from the contextual menu of the **Working Copy view**. A dialog box will prompt you to confirm the unlocking and it will also allow you to break the lock (unlock it by force).

Synchronize with Repository

In the work cycle you will need to incorporate other people's changes (update) and to make your own work available to others (commit). This is what the **Incoming** and **Outgoing** modes of *the Working Copy view* was designed for, to help you send and receive modifications from the repository.

The **Incoming** and **Outgoing** modes of this view focus on incoming and outgoing changes. The incoming changes are the changes that other users have committed in the repository since you last updated your working copy. The outgoing changes are the modifications you made to your working copy as a result of editing, removing or adding resources.

The view presents the status of the working copy resources against the BASE revision after a **Refresh** operation. You can view the state of the resources versus a repository HEAD revision by using the **Synchronize** action from *the Working Copy view*.

View Differences

One of the most common requirements in project development is to see what changes have been made to the files from your Working Copy or to the files from the repository. You can examine these changes after a synchronize operation with the repository, by using the **Open in compare editor** action from the contextual menu.

The text files are compared using a built-in **Compare view** which uses a line differencing algorithm or a specified external diff application if such an application is *set in the SVN preferences*. When a file with outgoing status is involved, the compare is performed between the file from the working copy and the BASE revision of the file. When a file with incoming or conflict status is involved, the differences are computed using a three-way algorithm which means that the local file and the repository file are each compared with the BASE revision of the file. The results are displayed in the same view. The differences obtained from the local file comparison are considered outgoing changes and the ones obtained from the repository file comparison are considered incoming changes. If any of the incoming changes overlap outgoing changes then they are in conflict.

A special case of difference is a *diff pseudo-conflict*. This is the case when the left and the right sections are identical but the BASE revision does not contain the changes in that section. By default this type of changes are ignored. If you want to change this you can go to *SVN Preferences* and change the corresponding option.

The right editor of the internal compare view presents either the BASE revision or a revision from the repository of the file so its content cannot be modified. By default when opening a synchronized file in the **Compare** view, a compare is automatically performed. After modifying and saving the content of the local file presented in the left editor, another compare is performed. You will also see the new refreshed status in the **Working Copy view**.

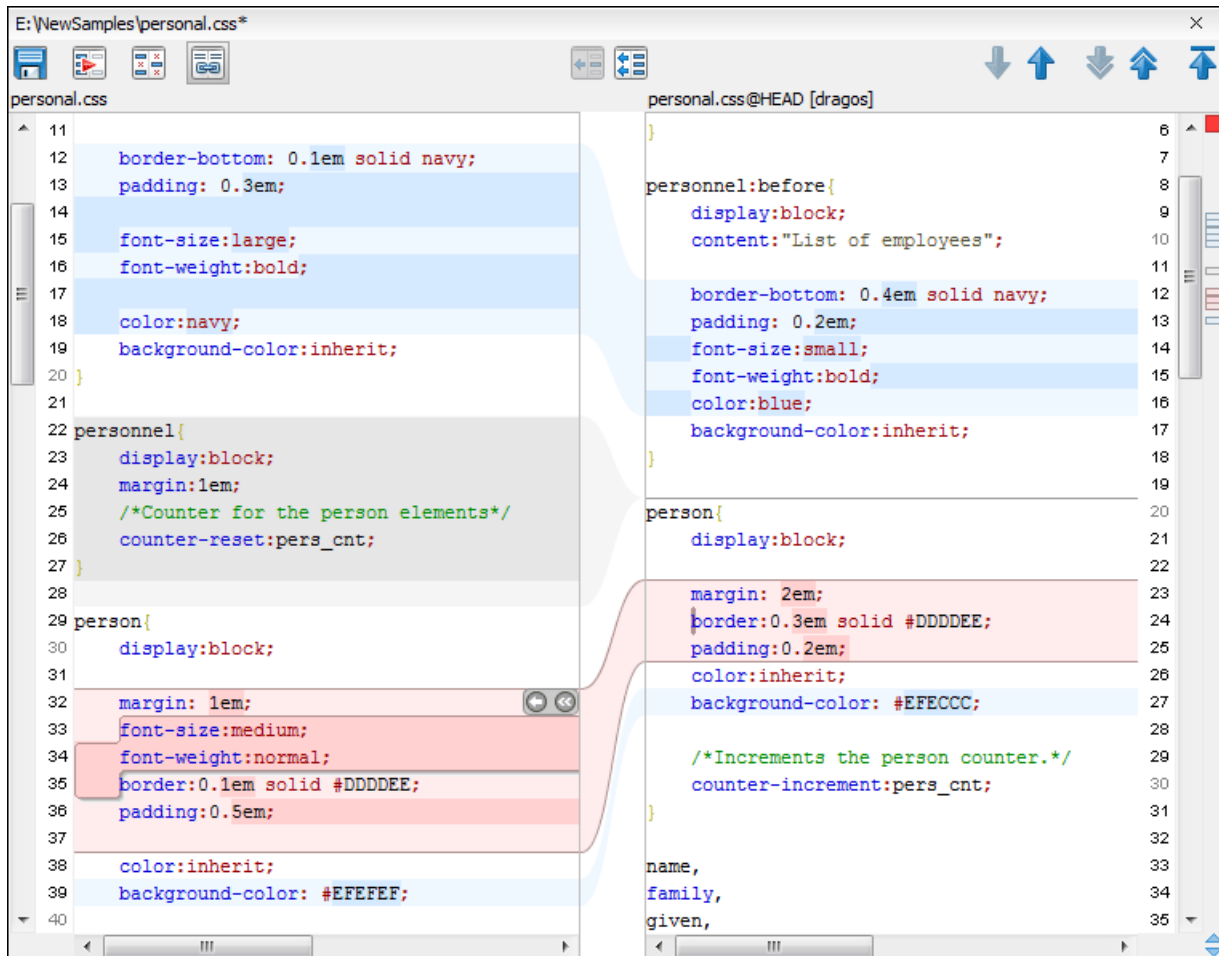


Figure 278: Compare View

At the top of each of the two editors, there are presented the name of the opened file, the corresponding SVN revision number (for remote resources) and the author who committed the associated revision.

There are three types of differences:

- Incoming changes - Changes committed by other users and not present yet in your working copy file. They are marked with a blue highlight and on the middle divider the arrows point from right to left.
- Outgoing changes - Changes you have done in the content of the working copy file. They are marked with a gray highlight and the arrows on the divider are pointing from left to right.
- Conflicting changes - This is the case when the same section of text which you already modified in the local file has been modified and committed by some other person. They are marked with a red highlight and red diamonds on the divider.

There are numerous actions and options available in the [Compare View toolbar](#) or in the **Compare** menu from the main menu. You can decide that some changes need adjusting or that new ones must be made. After you perform the adjustments, you may want to perform a new compare between the files. For this case there is an action called **Perform files differencing**. After each files differencing operation the first found change will be selected. You can navigate from one change to another by using the actions **Go to first**, **Go to previous**, **Go to next** and **Go to last modification**. If you decide that some incoming change needs to be present in your working file you can use the action **Copy change from right to left**. This is useful also when you want to override the outgoing modifications contained in a conflicting section. The action **Copy all non-conflicting changes from right to left** copies all incoming changes which are not contained inside a conflicting section in your local file.

Let us assume that only a few words or letters are changed. Considering that the differences are performed taking into account whole lines of text, the change will contain all the lines involved. To find exactly what words or letters have

changed, the **Word Details** and **Character Details** dialog boxes are available. They present a more detailed comparison result when you double-click the middle divider of a difference.

When you want to examine only the changes in the real text content of the files disregarding the changes in the number of white spaces between words or lines there is available an option in the [SVN Preferences](#) which allows you to enable or disable the white space ignoring feature of the compare algorithm.

Conflicts

A file conflict occurs when two or more developers have changed the same few lines of a file or the properties of the same file. As Subversion knows nothing of your project, it leaves resolving the conflicts to the developers. Whenever a conflict is reported, you should open the file in question, and try to analyse and resolve the conflicting situation.

Real Conflicts vs Mergeable Conflicts

There are two types of conflicts:

- *real conflict* ( decorator in *Name* column) - Syncro SVN Client considers the following resource states to be real conflicts:
 - *conflicted* state - a file reported by SVN as being in this state is obtained after it was updated/merged while having incoming and outgoing content or property changes at the same time, changes which could not be merged. A content conflict ( symbol in *Local file status* column) is reported when the modified file has binary content or it is a text file and both local and remote changes were found on the same line. A properties conflict ( symbol in *Local properties status* column) is reported when a property's value was modified both locally and remotely;
 - *tree conflicted* state ( symbol in *Local file status* column) - obtained after an update or merge operation, while having changes at the directory structure level (for example, file is locally modified and remotely deleted or locally scheduled for deletion and remotely modified);
 - *obstructed* state ( symbol in *Local file status* column) - obtained after a resource was versioned as one kind of object (file, directory, symbolic link), but has been replaced outside Syncro SVN Client by a different kind of object.
- *pseudo-conflict* ( decorator in *Name* column) - a file is considered to be in *pseudo-conflict* when it contains both incoming and outgoing changes. When incoming and outgoing changes do not intersect, an update operation may automatically merge the incoming file content into the existing locally one. In this case, the *pseudo-conflict* marker is removed. This marker is used only as a warning which should prevent you to run into a real conflict.



Note:

- A conflicting resource cannot be committed to repository. You have to resolve it first, by using **Mark Resolved** action (after manually editing/merging file contents) or by using **Mark as Merged** action (for pseudo-conflicts).
-  and  decorators are presented only when one of the following view modes is selected: **Modified**, **Incoming**, **Outgoing**, **Conflicts**.
- The  marker is used also for folders to signal that they contain a file in real conflict or pseudo-conflict state.

Content Conflicts vs Property Conflicts

A *Content conflict* appears in the content of a file. A merge occurs for every inbound change to a file which is also modified in the working copy. In some cases, if the local change and the incoming change intersect each other, Apache Subversion™ cannot merge these changes without intervention. So if the conflict is real when updating the file in question the conflicting area is marked like this:

```
<<<<<< filename
your changes
=====
code merged from repository
```



```
>>>>>> revision
```

Also, for every conflicted file Subversion places three additional temporary files in your directory:

- `filename.ext.mine` - This is your file as it existed in your working copy before you updated your working copy, that is without conflict markers. This file has your latest changes in it and nothing else.
- `filename.ext.rOLDREV` - This is the file that was the BASE revision before you updated your working copy, that is the file revision that you updated before you made your latest edits.
- `filename.ext.rNEWREV` - This is the file that Subversion client just received from the server when you updated your working copy. This file corresponds to the HEAD revision of the repository.

OLDREV and NEWREV are revision numbers. If you have conflicts with binary files, Subversion does not attempt to merge the files by itself. The local file remains unchanged (exactly as you last changed it) and you will get `filename.ext.r*` files also.

A *Property conflict* is obtained when two people modify the same property of the same file or folder. When updating such a resource a file named `filename.ext.prej` is created in your working copy containing the nature of the conflict. Your local file property that is in conflict will not be changed. After resolving the conflict you should use the **Mark resolved** action in order to be able to commit the file. Note that the **Mark resolved** action does not really resolve the conflict. It just removes the conflicted flag of the file and deletes the temporary files.

Edit Real Content Conflicts

The conflicts of a file in the conflicted state (a file with the red double arrow icon) can be edited visually with the **Compare** view (the built-in file diff tool) or with an [external diff application](#). Resolving the conflict means deciding for each conflict if the local version of the change will remain or the remote one instead of the special conflict markers inserted in the file by the SVN server.

The **Compare** view (or the external diff application [set in Preferences](#)) is opened with the action **Edit Conflict** which is available on the contextual menus of [the Working Copy view](#) and is enabled only for files in the conflicted state (an update operation was executed but the differences could not be merged without conflicts). The external diff application is called with 3 parameters because it is a 3-way diff operation between the local version of the file from the working copy and the HEAD version from the SVN repository with the BASE version from the working copy as common ancestor.

If [the option Show warning dialog when edit conflicts is enabled](#) you will be warned at the beginning of the operation that the operation will overwrite the conflict version of the file received from the SVN server (the version which contains the conflict markers <<<<<<, =====, >>>>>>) with the original local version of the file that preceded the update operation. If you press the OK button the visual conflict editing will proceed and a backup file of the conflict version received from the SVN server is created in the same working copy folder as the file with the edited conflicts. The name of the backup file is obtained by appending the extension `.sync.bak` to the file as stored on the SVN server. If you press the **Cancel** button the visual editing will be aborted.

The usual actions on the differences between two versions of a file are available on the toolbar of this view:



Save

Saves the modifications of the local version of the file displayed in the left side of the view.



Perform Files Differencing

Performs a comparison between the source file and target file.



Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



Synchronized scrolling

Synchronizes scrolling so that a selected difference can be seen on both sides of the application window. This action enables/disables the previously described behavior.

**Format and Indent Both Files (Ctrl Shift P (Meta Shift P on OS X))**

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Copy Change from Right to Left**

Copies the selected difference from the target file in the right side to the source file in the left side.

**Copy All Changes from Right to Left**

Copies all changes from the target file in the right side to the source file in the left side.

**Next Block of Changes (Ctrl Period (Meta Period on OS X))**

Jumps to the next block of changes. This action is disabled when the cursor is positioned on the last change block or when there are no changes.



Note: A change block groups one or more consecutive lines that contain at least one change.

**Previous Block of Changes (Ctrl Comma (Meta Comma on OS X))**

Jumps to the previous block of changes. This action is disabled when the cursor is positioned on the first change block or when there are no changes.

**Next Change (Ctrl Shift Period (Meta Shift Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is disabled when the cursor is positioned on the last change or when there are no changes.

**Previous Change (Ctrl Shift Comma (Meta Shift M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is disabled when the cursor is positioned on the first change or when there are no changes.

**First Change (Ctrl B (Meta B on OS X))**

Jumps to the first change.

The operation begins by overwriting the conflict version of the file received from the SVN server (the version which contains the conflict markers <<<<<<<, =====, >>>>>>>) with the original local version of the file before running the update action which created the conflict. After that the differences between this original local version and the repository version are displayed in the **Compare** view.

If you want to edit the conflict version of the file directly in a text editor instead of the visual editing offered by the **Compare** view you should work on the local working copy file after the update operation without running the action **Edit Conflict**. If you decide that you want to edit the conflict version directly after running the action **Edit Conflict** you have to work on the .sync.bak file.

If you did not finish editing the conflicts in a file at the first run of the action **Edit Conflict** you can run the action again and you will be prompted to choose between resuming the editing where the previous run left it and starting again from the conflict file received from the SVN server.

After the conflicts are edited and saved in the local version of the file you should run one of the following:

- The **Mark Resolved** action on the file so that the result of the conflict editing process can be committed to the SVN repository.
- The **Revert** action so that the repository version overwrites all the local modifications.

Both actions remove the backup file and other temporary files created with the conflict version of the local file.

Revert Your Changes

If you want to undo changes made in your working copy, since the last update, select the items you are interested in, right click to display the contextual menu and select **Revert**. A dialog box will open that shows you the files and folders

that you have changed and can be reverted. Select those you want to revert and click the **OK** button. Revert will undo only your local changes. It does not undo any changes which have already been committed. If you choose to revert a conflicting item to its pristine copy, then the eventual conflict is solved by losing your outgoing modifications. If you try to revert a resource not under version control, the resource will be deleted from the file system.



Note: By default, a directory will be recursively reverted (including any other modified item it contains). However, if the directory has only property changes, you need to explicitly choose if the operation will include any modified items found inside it.

If you want some of your outgoing changes to be overridden you must first open the file in [Compare view](#) and choose the sections to be replaced with ones from the repository file. This can be achieved either by editing directly the file or by using the action **Copy change from right to left** from the [Compare view toolbar](#). After editing the conflicting file you have to run the action **Mark as merged** before committing it.

If you want to drop all local changes and, at the same time, bring all incoming changes into your working copy resource, you can use the **Override and update** action which discards the changes in the local file and updates it from the repository. A dialog box will display the files that will be affected.

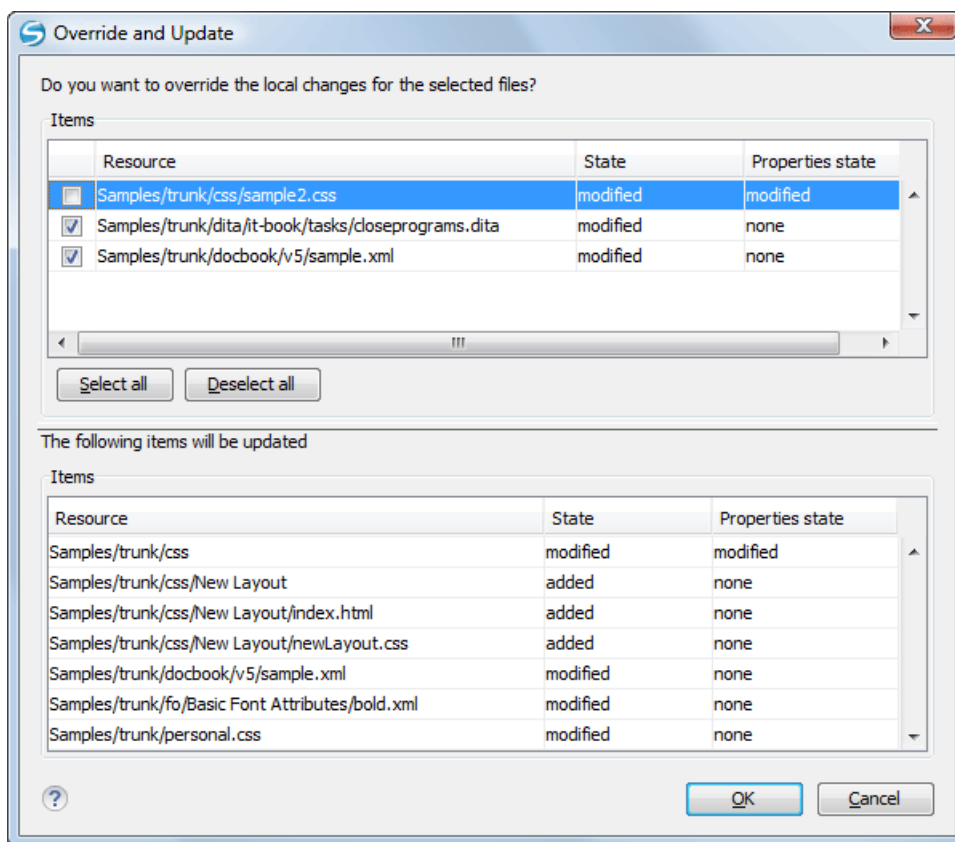


Figure 279: Override and Update Dialog Box

In the first table of the dialog box you will be able to see the resources that will be overridden. In the second table you will find the list of resources that will be updated. Only resources that have an incoming status are updated.



Tip: If you want to roll-back out of your working copy changes that have already been committed to the repository, see [Merge Revisions](#).

Merge Conflicted Resources

Before you can safely commit your changes to the repository you must first resolve all conflicts. In the case of pseudo-conflicts they can be resolved in most cases with an update operation which will merge the incoming modifications into your working copy resource. In the case of real conflicts, conflicts that persist after an update operation, it is necessary

to resolve the conflict using the built-in compare view and editor or, in the case of properties conflict, the [Properties view](#). Before you can commit you must *mark as resolved* the affected files.

Both pseudo and real conflicts can be resolved without an update. You should open the file in the compare editor and decide which incoming changes need to be copied locally and which outgoing changes must be overridden or modified. After saving your local file you have to use the *Mark as merged* action from the contextual menu before committing.

Drop Incoming Modifications

In the situation when your file is in conflict but you decide that your working copy file and its content is the correct one, you can decide to drop some or all of the incoming changes and commit afterwards. The action **Mark as merged** proves to be useful in this case too. After opening the conflicting files with [Compare view](#), [Editor](#) or editing their properties in the **Properties** view and deciding that your file can be committed in the repository replacing the existing one, you should use the **Mark as merged** action. When you want to override completely the remote file with the local file you should run the action **Override and commit** which drops any remote changes and commits your file.

In general it is much safer to analyze all incoming and outgoing changes using the **Compare** view and only after to update and commit.

Tree Conflicts

A *tree conflict* is a conflict at the directory tree structure level and occurs when the user runs an update action on a resource that has the following conditions:

- It is locally modified and the same resource was deleted from the repository (or deleted as a result of being renamed or moved).
- It was locally deleted (or deleted as a result of being renamed or moved) and the same resource is incoming as modified from the repository.

The same conflict situation can occur after a merge or a switch action. The action ends with an error and the folder containing the file that is now in the tree conflict state is also marked with a conflict icon.

Such a conflict can be resolved in one of the following ways which are available when the user double clicks on the conflicting resource or when running the **Edit conflict** action:

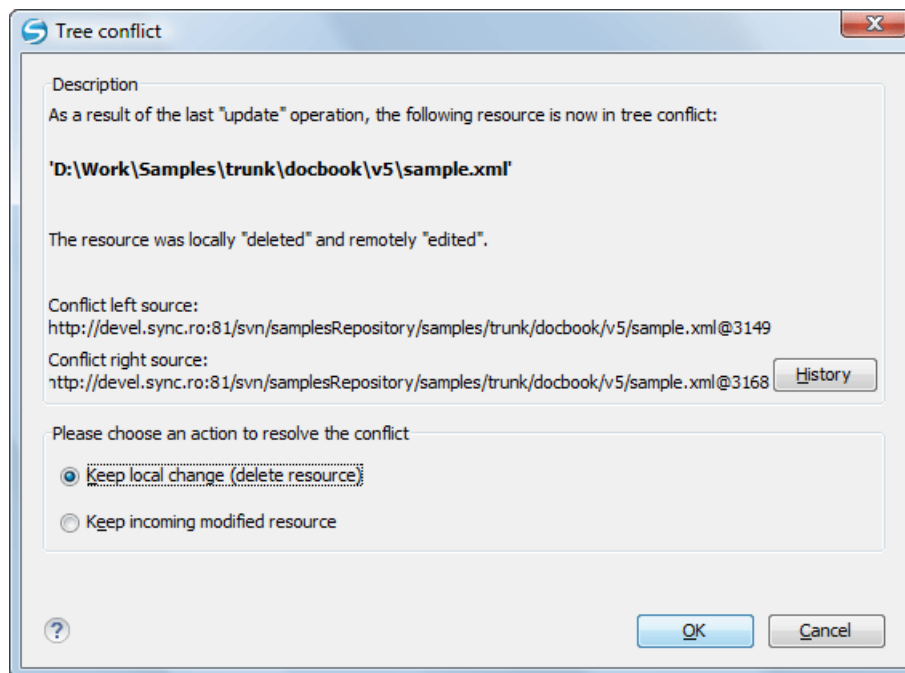


Figure 280: Resolve a tree conflict

- **Keep local change (delete resource)** - Keeps the incoming change that comes from the repository.

- **Keep incoming modified resource** - If there is a renamed version of the file committed by other user that will be added to the working copy too.

Update the Working Copy

While you are working on a project, other members of your team may be committing changes to the project repository. To get these changes, you have to *update* your working copy. Updating may be done on single files, a set of selected files, or recursively on entire directory hierarchies. The update operation can be performed from [Working Copy view](#). It updates the selected resources to the last synchronized revision (if remote information is available) or to the *HEAD* revision of the repository.

There are three different kinds of incoming changes:

- *Non-conflicting* - A non-conflicting change occurs when a file has been changed remotely but has not been modified locally.
- *Conflicting, but auto-mergeable* - An auto-mergeable conflicting change occurs when a text file has been changed both remotely and locally (for example, has non-committed local changes) but the changes are on different lines of text. Not applicable to binary resources (for example, multimedia files, PDFs, executable program files)
- *Conflicting* - A conflicting change occurs when one or more of the same lines of a text file have been changed both remotely and locally.

If the resource contains only incoming changes or the outgoing changes do not intersect with incoming ones then the update will end normally and the Subversion system will merge incoming changes into the local file. In the case of a conflicting situation the update will have as result a file with conflict status.

The Oxygen XML Developer allows you to update your working copy files to a specific revision, not only the most recent one. This can be done by using the **Update to revision/depth** action from the **Working Copy** view (**All Files** view mode) or the **Update to revision** action from the [History view](#) contextual menu.

If you select multiple files and folders and then you perform an **Update** operation, all of those files and folders are updated one by one. The Subversion client makes sure that all files and folders belonging to the same repository are updated to the exact same revision, even if between those updates another commit occurred.

When the update fails with a message saying that there is already a local file with the same name Subversion tried to check out a newly versioned file, and found that an unversioned file with the same name already exists in your working folder. Subversion will never overwrite an unversioned file unless you specifically do this with an **Override and update** action. If you get this error message, the solution is simply to rename the local unversioned file. After completing the update, you can check whether the renamed file is still needed.

Send Your Changes to the Repository

Sending the changes you made to your working copy is known as *committing* the changes. If your working copy is up-to-date and there are no conflicts, you are ready to commit your changes.

The **Commit** action sends the changes from your local working copy to the repository. The **Commit** dialog box presents all the items that you are able to commit.

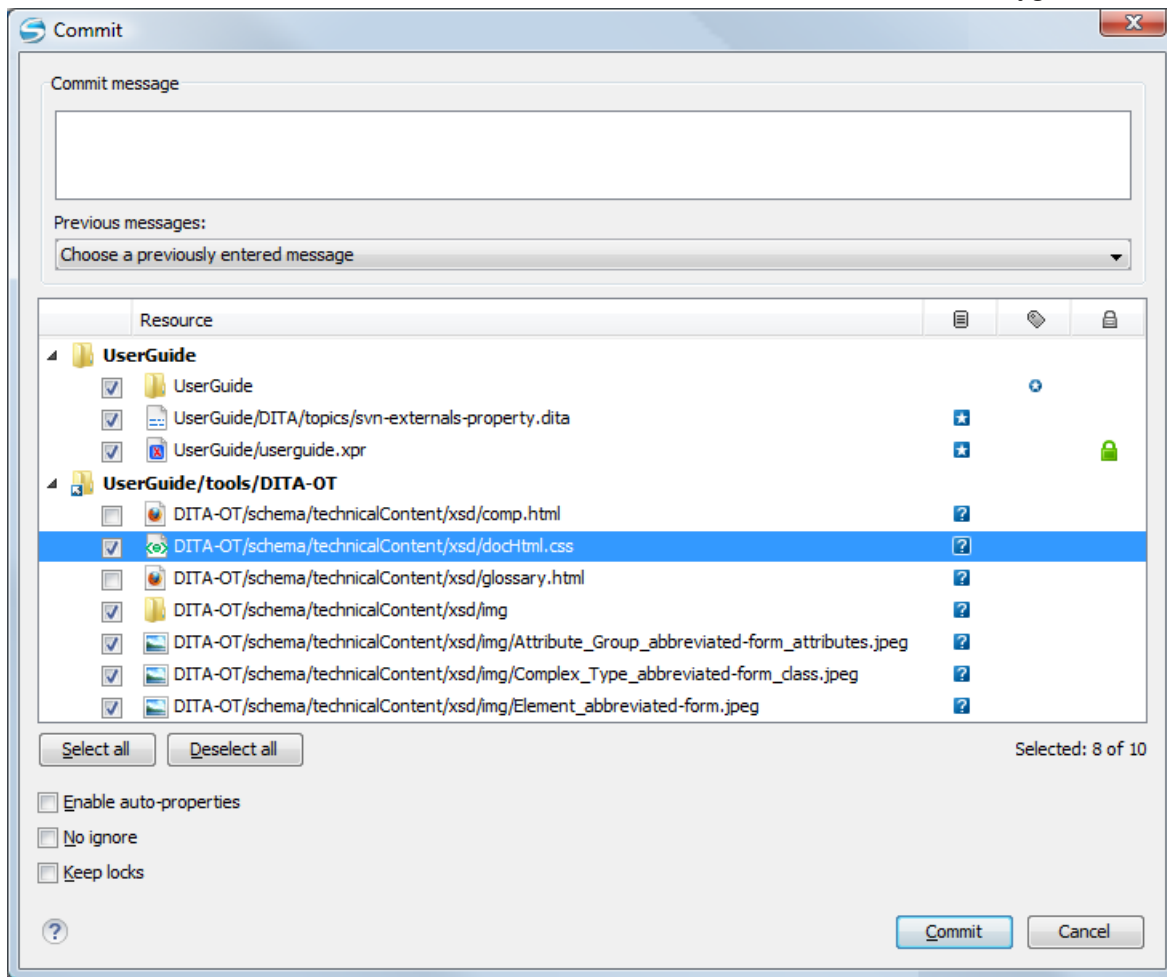


Figure 281: Commit dialog box

Enter a message to associate with the commit, or choose a previous message from the **Previous messages** list (the last 10 commit messages will be remembered even after restarting the SVN client application).

An item that can be committed has one of the following states: *added*, *modified* (content or properties), *replaced*, and *deleted*. All items that have one of these states are selected in the dialog box by default. If you do not want to commit one of the items, uncheck it.



Attention: For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination, otherwise the commit operation will fail.

Besides the items that have one of the mentioned states, Syncro SVN Client also includes the files being *unversioned* or *missing*. In order to be committed, these items are handled automatically:

- *Unversioned* items are added under version control.
- *Missing* items are deleted.



Note: If the **Show unversioned directories content** is disabled, the **Commit** dialog box does not display the items inside an *unversioned* directory.

Unversioned or *missing* items are not selected by default in the **Commit** dialog box, unless you have selected them explicitly when issuing the commit command.



Note: In some cases, items that have one of the above states are not presented in the **Commit** dialog box.

For example:

- Items that have been *added* or *replaced* previously, but now are presented as *missing* after being removed from the file system, outside of an SVN client. Such items do not exist in the repository and you should use the **Delete** action to remove them from your working copy.
- Items that have incoming changes from the repository, after a synchronization. You need to have your working copy up-to-date before committing your changes.
- Files that, after a synchronization, appear as locked by other users or from other locations than the current working copy.



Note: Due to dependencies between items, when you select or clear an *unversioned* (?) or *added* (+) item in the **Commit** dialog box, other items with one of these states can be selected or cleared automatically.

The modifications that will be committed for each file can be reviewed in the compare editor window by double clicking a file in the **Commit** dialog box, or by right clicking and selecting the **Show Modifications** action from the contextual menu. This option is available to review only file content changes, not property changes.

The **Local file status** column indicates the actual state of the items and the **Local properties status** column indicates whether the properties of an item are modified.

The **Lock information** column is displayed if at least one of the files in the **Commit** dialog box has lock information associated with it, valid against the commit operation.

The following options are available in this dialog box:

- **Enable automatic properties** or **Disable automatic properties** - enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in the `config` file of the Subversion configuration directory.



Note: This option is available only when there are defined properties to be applied automatically for resources newly added under version control. You can define these properties in the `config` file of the Subversion configuration directory, in the `auto-props` section. Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

- **Keep locks** - selecting the **Keep locks** option preserves any locks you set on various files.



Note: This option is available only when files that you locked are presented in the dialog box.

Each of the above options is activated only when you select an item for which the option can be applied.

Your working copy must be up-to-date with respect to the resources you commit. This is ensured by using the **Update** action prior to committing, resolving conflicts and re-testing as needed. If your working copy resources you are trying to commit are out of date you will get an appropriate error message.

Committing to Multiple Locations

Although Subversion does not support committing to different locations at once, Syncro SVN Client offers this functionality regarding *external* items.

If items to be committed belong to different *external* definitions found in the working copy, they are grouped under the corresponding item that indicates their repository origin. Each parent item is rendered bold and its corresponding repository location is presented when hovering it. Parent items are decorated with a small arrow (↗) if they are *external* definitions. The working copy root directory is never decorated and is not presented if there are no *external* items listed (all items belong to the main working copy). Each child item is presented relative to the parent item.



Note: When an *external* directory has modifications of its own, it is presented both as a parent item and as an item that you can select and commit. This is always the case for *external* files.

The sets of items belonging to *external* definitions from the same repository are committed together, resulting a single revision. So, the number of revisions can be smaller than the number of *externals*. External definitions are considered from the same repository if they have the same protocol, server address, port, and repository address within the server.



Note: *External* files are always from the same repository as the parent directory which defines them, so they are always committed together with the changes from their parent directory.

Integration with Bug Tracking Tools

Users of bug tracking systems can associate the changes they make in the repository resources with a specific ID in their bug tracking system. The only requirement is that the user includes the bug ID in the commit message that he enters in the **Commit** dialog box. The format and the location of the ID in the commit message are configured with SVN properties.

To make the integration possible Syncro SVN Client needs some data about the bug tracking tool used in the project. You can configure this using the following [SVN properties](#) which must be set on the folder containing resources associated with the bug tracking system. Usually they are set recursively on the root folder of the working copy.

- **bugtraq:message** - A string property. If it is set [the Commit dialog box](#) will display a text field for entering the bug ID. It must contain the string `%BUGID%`, which is replaced with the bug number on commit.
- **bugtraq:label** - A string property that sets the label for the text field configured with the **bugtraq:message** property.
- **bugtraq:url** - A string property that is the URL pointing to the bug tracking tool. The URL string should contain the substring `%BUGID%` which Syncro SVN Client replaces with the issue number. That way the resulting URL will point directly to the correct issue.
- **bugtraq:warnifnoissue** - A boolean property with the values *true/yes* or *false/no*. If set to *true*, the Syncro SVN Client will warn you if the bug ID text field is left empty. The warning will not block the commit, only give you a chance to enter an issue number.
- **bugtraq:number** - A boolean property with the value *true* or *false*. If this property is set to *false*, then any character can be entered in the bug ID text field. If the property is set to *true* or is missing then only numbers are allowed as the bug ID.
- **bugtraq:append** - A boolean property. If set to *false*, then the bug ID is inserted at the beginning of the commit message. If yes or not set, then it's appended to the commit message.
- **bugtraq:logregex** - This property contains one or two regular expressions, separated by a newline. If only one expression is set, then the bug ID's must be matched in the groups of the regular expression string, for example `[Ii]ssue #?(\d+)`. If two expressions are set, then the first expression is used to find a string which relates to a bug ID but may contain more than just the bug ID (for example, `Issue #123` or `resolves issue 123`). The second expression is then used to extract the bug ID from the string extracted with the first expression. An example: if you want to catch every pattern `issue #XXX` and `issue #890`, `#789` inside a log message you could use the following strings:
 - `[Ii]ssue #?(\d+)(, ? ?#?(\d+))+`
 - `(\d+)`

The data configured with these SVN properties is stored on the repository when a revision is committed. A bug tracking system or a statistics tools can retrieve the revisions that affected a bug from the SVN server and present the commits related to that bug to the user of the bug tracking system.

If the **bugtraq:url** property was filled in with the URL of the bug tracking system and this URL includes the `%BUGID%` substring as specified above in the description of the **bugtraq:url** property then [the History view](#) presents the bug ID as a hyperlink in the commit message. Clicking such a hyperlink in the commit message of a revision opens a Web browser at the page corresponding to the bug affected by that commit.

Obtain Information for a Resource

This section explains how to obtain information for a SVN resource:

Request Status Information for a Resource

While you are working with the SVN Client you often need to know which files you have changed, added, removed, or renamed, or even which files got changed and committed by others. This is where the **Synchronize** action from the

[Working Copy view](#) comes in handy. The **Working Copy** view shows you every file that has changed your working copy, as well as any unversioned files you may have.

If you want more detailed information about a given resource, you can use the  **Show SVN Information** action. This action is available from the **File** menu or the contextual menu of the **Working Copy**, **Repositories**, **History**, or **Directory Change Set** views, or from the **Revision Graph** dialog box. The **SVN Information** dialog box will be displayed, showing information about the selected resource. The information displayed depends on the location of the item (local or remote) and may include the following:

- Local path and repository location
- Revision number
- Last change author, revision and date
- Information about locks
- Local file status
- Local properties status
- Local directory depth
- Repository location and revision number for copied files or directories
- Path information about locally moved items
- Path information about conflict generated files
- Remote file status
- Remote properties status
- File size and other information

The value of a property of the resource displayed in the dialog box can be copied by right-clicking the property and selecting the **Copy** action.

Request History for a Resource

In Apache Subversion™, both files and directories are versioned and have a history. If you want to examine the history for a selected resource and find out what happened at a certain revision you can use the **History view** that can be accessed from [Repositories view](#), [Working Copy view](#), [Revision Graph](#), or [Directory Change Set view](#). From the **Working copy view** you can display the history of local versioned resources.

Management of SVN Properties

In the [Properties view](#) you can read and set the Apache Subversion™ properties of a file or folder. There is a set of predefined properties with special meaning to Subversion. For more information about properties in Subversion see the SVN Subversion specification. Subversion properties are revision dependent. After you change, add or delete a property for a resource, you have to commit your changes to the repository.

If you want to change the properties of a given resource you need to select that resource from the [Working Copy view](#) and run the **Show properties** action from the contextual menu. The **Properties** view will show the local properties for the resource in the working copy. Once the [Properties](#) view is visible, it will always present the properties of the currently selected resource. In the **Properties** view [toolbar](#) there are available actions which allow you to add, change and delete the properties.

If you choose the **Add a new property** action, a new dialog box will appear that contains the following:

- **Name** - Combo box that allows you to enter the name of the property. The drop-down menu of the combo box presents the predefined Subversion properties (such as **svn:ignore**, **svn:externals**, **svn:needs-lock**, etc.)
- **Current value** - Text area which allows you to enter the value of the new property.

If the selected item is a directory, you can also set the property recursively on its children by checking the **Set property recursively** checkbox.

If you want to change the value for a previously set property you can use the **Edit property** action which will display a dialog box where you can set:

- **Name** - Property name (cannot be changed).
- **Current value** - Presents the current value and allows you to change it.

- **Base value** - The value of the property, if any, from the resource in the pristine copy. It cannot be modified.

If you want to completely remove a property previously set you can choose the **Remove property** action. It will display a confirmation dialog box in which you can choose also if the property will be removed recursively.

In the [Properties view](#) there is a **Refresh** action which can be used when the properties have been changed from outside the view. This can happen, for example, when the view was already presenting the properties of a resource and they have been changed after an **Update** operation.

Branches and Tags

One of the fundamental features of version control systems is the ability to create a new line of development from the main one. This new line of development will always share a common history with the main line if you look far enough back in time. This line is known as a *branch*. Branches are mostly used to try out features or fixes. When the feature or fix is finished, the branch can be merged back into the main branch (*trunk*).

Another feature of version control systems is the ability to take a snapshot of a particular revision, so you can at any time recreate a certain build or environment. This is known as *tagging*. Tagging is especially useful when making release versions.

In Apache Subversion™, there is no difference between a *tag* and a *branch*. On the repository, both are ordinary directories that are created by copying. The trick is that they are cheap copies instead of physical copies. Cheap copies are similar to hard links in Unix, which means that they merely link to a specific tree and revision without making a physical copy. As a result, branches and tags occupy little space on the repository and are created very quickly.

Provided that nobody ever commits to the directory in question, it remains a tag. If people start committing to it, it becomes a branch.

Create a Branch / Tag

To create a branch or tag by copying a directory, use the **Branch/Tag** action that is available in the **Tools** menu when an item is selected in the [Working Copy view](#) or [Repositories view](#), or from the contextual menu of the **Repositories** view.

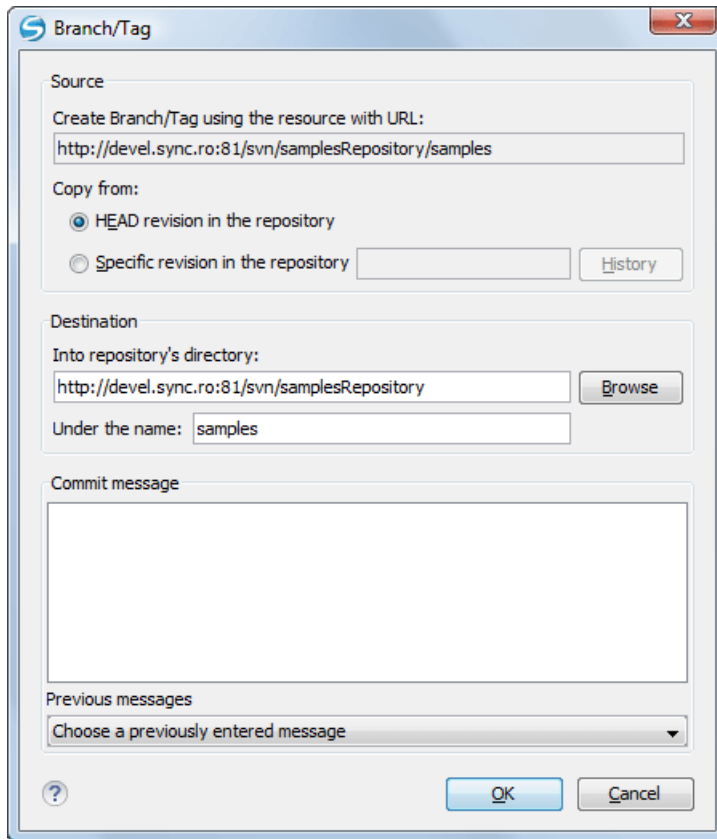


Figure 282: The Branch/Tag Dialog Box

You can configure the following options in this dialog box:

You can specify the source revision of the copy in the **Copy from** section. You can choose between the following options:

- **HEAD revision in the repository** - The new branch or tag will be copied in the repository from the HEAD revision. The branch will be created very quickly, as the repository will make a *cheap* copy.
- **Specific revision in the repository** - The new branch will be copied into the repository, but you can specify the exact desired revision. For example, this is useful if you forgot to make a branch or tag when you released your application. If you click the **History** button you can select the revision number from [the History dialog box](#). This type of branch will also be created very quickly.
- **Working copy** - (Available only if the item is selected from the **Working copy** view). The new branch will be a copy of your local working copy. If you have updated some files to an older revision in your working copy, or if you have made local changes, that is exactly what goes into the copy. This involves transferring some data from your working copy back to the repository, or more specifically, the locally modified files.

You can specify the location of the new branch or tag in the **Destination** section:

- **Into repository's directory** - [The URL of the parent directory](#) of the new branch or tag.



Note: *Peg revisions* have no effect for this operation since it is used to send information to the repository.

- **Under the name** - You can specify another branch or tag name other than the name of the resource selected in the **Repositories** or **Working copy** view.

The new branch or tag will be created as a child of the specified URL of the repository directory and will have the new name.

Merging

At some stage during the development process, you will want to merge the changes made on a *branch* back into the *trunk*, or vice-versa. The *merge* is accomplished by comparing two points (branches or revisions) in the repository and applying the obtained differences to your working copy. This process is closely related to the *diff* concept.



Note: A *branch* is a line of development that exists independently of another line, yet still shares a common history if you look far enough back in time. A *branch* always begins life as a *copy of something* (such as a trunk, another branch, or tag), and moves on from there, generating its own history.

The  **Merge** action is available in the **Tools** menu. The working copy item selected when you issued the command will be the one receiving the generated changes. If there is no item selected, the *merge* operation will be performed on the entire working copy.

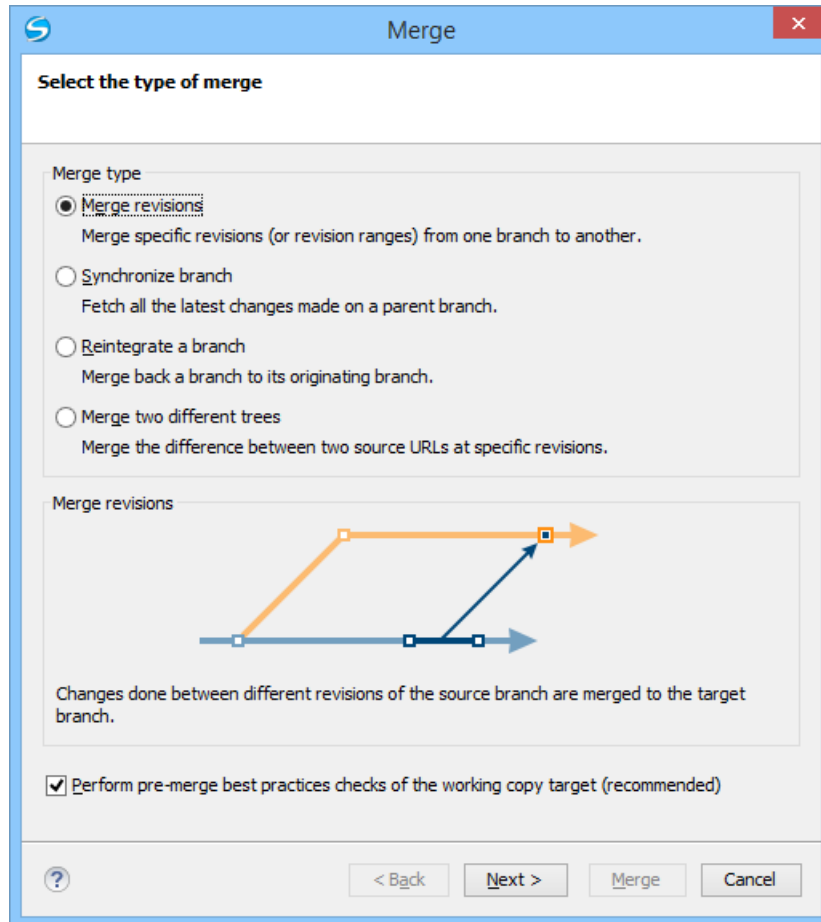


Figure 283: The Merge Wizard

The four types of merging are as follows:

- **Merge revisions** - port changes from one branch to another. Note that the *trunk* can also be considered a branch, in this context.
- **Synchronize branch** - fetch all the changes made on a parent branch (or the *trunk*) to a child branch.
- **Reintegrate a branch** - merge back a branch to its parent branch (which can also be the *trunk*).
- **Merge two different trees** - integrate the changes done on a branch to a different branch.

It is recommended that you enable the following pre-merge check option:

- **Perform pre-merge best practices checks of the working copy target** - When enabled, the SVN Client checks if the working copy target item is ready for the merge operation and displays the **pre-merge checks** wizard page.

Remember: It is a good idea to perform a merge into an unmodified working copy. If you have made changes to your working copy, commit them first. If the *merge* does not go as you expect, you may want to revert the changes and revert cannot recover your uncommitted modifications.

Important: The above recommendation becomes mandatory when *reintegrating a branch*.

Pre-Merge Checks

Before performing a merge, it is recommended to make sure that the working copy target item is ready for the merge operation. The SVN Client includes a best practices step that checks various conditions of the working copy target item to ensure that the merge operation will succeed. By enabling the **Perform pre-merge best practices checks of the working copy target** option in the first page of the **Merge** wizard, the **Pre-merge checks** wizard page is displayed to give you a summary of the verified conditions.

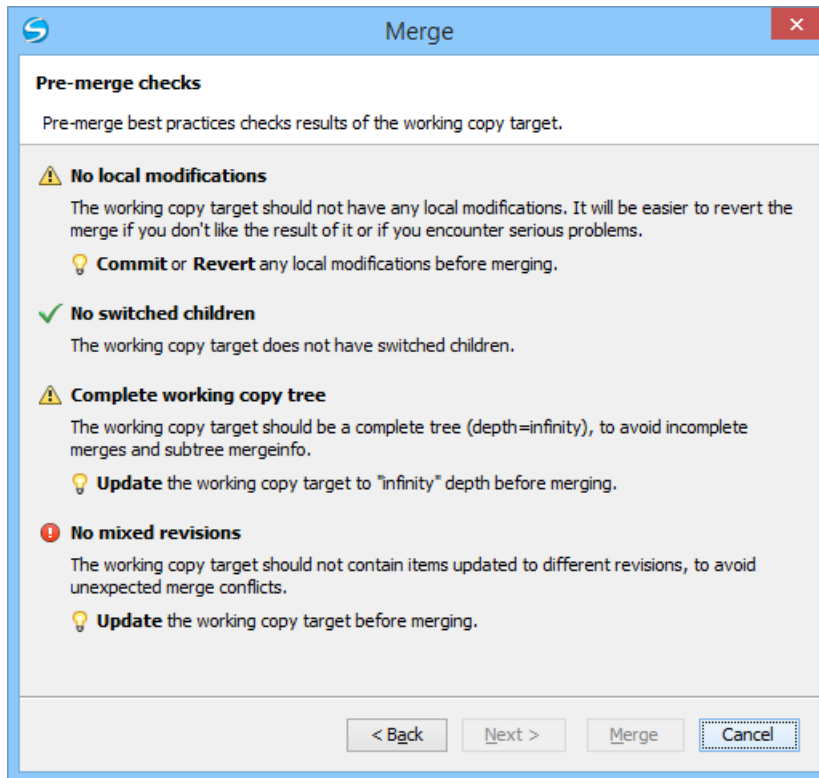


Figure 284: The Pre-Merge Checks Wizard Page

The following conditions are checked in this operation:

No local modifications

The working copy item (or any of its children) receiving the merge should not contain uncommitted changes, to make it easier to revert merge-generated changes if you encounter unexpected results.

Tip: If this condition fails, you should *commit* or *revert* the local modifications before merging.

No switched children

None of the children of the working copy item receiving the merge should be switched, to avoid incomplete merges and *subtree mergeinfo*.

Tip: If this condition fails, you should switch back all the children before merging.

Complete working copy tree

The working copy item receiving the merge should be a complete directory tree structure with an infinite depth, to avoid incomplete merges and *subtree mergeinfo*.



Tip: If this condition fails, you should change the *sticky* depth of the working copy item receiving the merge to *infinity* value.

No mixed revisions

The working copy item receiving the merge should not contain items that were updated to different revisions, to avoid unexpected merge conflicts.



Tip: If this condition fails, you should *update* the working copy before merging.

Each condition is marked with an icon that represents the state of the condition. The possible states are as follows:

- **Successful** - The condition is fulfilled successfully.
- **Warning** - The condition is not fulfilled, but it is not mandatory.
- **Error** - The condition is not fulfilled and is mandatory, and therefore the operation cannot proceed until you solve the error.



Tip: For each condition state, a message is displayed that gives you additional information about the results and, for warning or errors, a hint that explains how you can solve them.



Important: After solving any of the warnings or errors, it is recommended that you perform the *pre-merge checks* again to make sure your new changes are valid.

Merge Revisions

This is the case when you have made one or more changes to a branch and you want to duplicate them in a different branch. For example, we know that a problem has been fixed by committing revisions 17, 20, and 25 on branch B1. These changes are also needed in branch B2. Thus, in order to merge them, we need a working copy of the B2 branch.

To merge revisions from a different branch, follow these steps:

1. Go to menu **Tools > Merge**.
The **Merge** wizard is opened.
2. Select the **Merge revisions** option.
3. It is recommended that you enable the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
 - a) Press the **Next** button.
If the **Perform pre-merge best practices checks of the working copy target** option was enabled, *the Pre-Merge Checks wizard page* is displayed.



Note: If errors are found you need to solve them before proceeding.

4. Press the **Next** button.
The **Merge revisions** wizard page is displayed.
5. In the **Merge from (URL)** text box, enter *the URL of the branch or tag* that contain the changes that you want to duplicate in your working copy. In our example, it is the URL of the B1 branch.
You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.



Note: If the URL belongs to a different repository than the working copy, the **Ignore ancestry / Disable merge tracking** option, in the *Merge Options wizard page*, will be enabled automatically (and you cannot change this). This is because the *Subversion client cannot track changes between different repositories*.



Tip: You can also specify a *peg revision* at the end of the URL (for example, URL@rev1234). The peg revision does not affect the merge range you select. By default, the HEAD revision is assumed.

6. In the **Revisions to merge** section, choose between the **all revisions** and **specific revision(s)** options.

- **all revisions** - The operation will include *all eligible revisions* that were not yet merged.
- **specific revision(s)** - You can specify one or more individual revisions and/or revision ranges. Also, you can mix *forward* ranges (for example, 1 - 5), *backward* ranges (for example, 20 - 15), and subtract specific revisions from a range (for example, 1 - 5, - 3).



Note: If using the Subversion command-line client, a revision range of the form 1 - 5 means all changes starting from revision 2 up to revision 5 (the changes necessary to reach revision 5, committed after revision 1). Unlike the Subversion command-line client, in Syncro SVN Client the revision ranges are inclusive, meaning that it will process all revisions, starting with revision 1, up to and including revision 5.



Attention: The HEAD revision is the only non-numerical revision allowed, and it can only be used when specifying revision ranges as one of the ends of the range (for example, 10 - HEAD). Be careful when using it, as it might not refer to the desired revision, if it has recently been committed by another user.



Tip: If you want to perform a *reverse merge* and roll-back your working copy changes that have already been committed to the repository, use the *negative revisions* notation (for example, - 7) or *backward revision ranges* (for example, 20 - 10).

- If you press the **History** button, *the History dialog box* is displayed, which allows you to select one or more revisions to be merged.

7. Optionally, if you want to *configure the options* for your merge, press the **Next** button.

The *Merge Options wizard page* is displayed that allows you to configure options for the operation.



Warning: If the **Ignore ancestry / Disable merge tracking** option is enabled and you selected **all revisions** in the **Revisions to merge** section, revisions that were previously merged will also be included, which may result in conflicts.

8. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, *you may need to resolve conflicts* after making major changes.



Note: The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

Synchronize a Branch

While working on your own branch, other people on your team might continue to make important changes in the parent branch (which can be the *trunk* itself or any other branch). It is recommended to periodically duplicate those changes in your branch to make sure your changes are compatible with them. This is done by performing a *synchronize merge*, which will bring your branch up-to-date with any changes made to its ancestral parent branch since the time your branch was created or last synchronized. Subversion is aware of the history of your branch and can detect when it split away from the parent branch.

Frequently keeping your branch in sync with the parent branch helps you to prevent unexpected conflicts when the time comes for you to duplicate your changes back into the parent branch. The synchronization uses *merge tracking* to skip all those revisions that have already been merged, thus a sync merge can be repeated periodically to fetch all the latest changes of the parent branch to keep up-to-date with it.



Important: It is recommended to synchronize the whole working copy that was created from the child branch (the root of the working copy), rather than just a part of it.

After running the *synchronize merge*, your working copy from the child branch now contains new local modifications, and these edits are duplications of all of the changes that have happened on the *trunk* since you first created your branch. At this point, your private branch is now synchronized with the trunk.

To synchronize your branch with its parent branch, follow these steps:

1. Go to **Tools > Merge**.
The **Merge** wizard is opened.
2. Select the **Synchronize branch** option.
3. It is recommended that you enable the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
 - a) Press the **Next** button.
If the **Perform pre-merge best practices checks of the working copy target** option was enabled, [the Pre-Merge Checks wizard page](#) is displayed.
 Note: If errors are found you need to solve them before proceeding.
4. Press the **Next** button.
The **Synchronize branch** wizard page is displayed.
5. In the **Parent branch (URL)** text box, enter [the URL of the branch from which you created your branch](#). This means that the URL must belong to the same repository as your working copy that was created from the child branch.
You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.
 Tip: You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). The peg revision specifies both the peg revision of the URL and the latest revision that will be considered for merging. By default, the HEAD revision is assumed.
6. Optionally, if you want to [configure the options](#) for your merge, press the **Next** button.
The [Merge Options wizard page](#) is displayed that allows you to configure options for the operation.
 Note: The **Ignore ancestry / Disable merge tracking** option is not available for this merge type, since a synchronization merge should always be recorded in the destination branch.
7. Press the **Merge** button.
The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.

Note: The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

Reintegrate a Branch

There are some conditions that apply to reintegrate a branch:

- The server must support merge tracking.
- The source branch (to be reintegrated) must be coherently synchronized with its parent branch. This means that all revisions between the branching point and the last revision merged from the parent branch to the child branch must be merged to the latter one (there must be no missing revisions in-between).
- The working copy **must not** contain the following:
 - Local modifications.

- A mixture of revisions (all items must point to the same revision).
- Sparse directories (all directories must be of depth *infinity*).
- Switched items.
- The revision of the working copy must be greater than or equal to the last revision of the parent branch with which the child branch was synchronized.

 **Tip:** You can use [the pre-merge checks option](#) to make sure these conditions are fulfilled.

This method is useful when you have a feature branch on which the development has concluded and it should be merged back into its parent branch. Since you have kept the feature branch synchronized with its parent, the latest versions of them will be absolutely identical except for your feature branch changes. These changes can be reintegrated into the parent branch by using a working copy of it and the **Reintegrate a branch** option.

This method uses the *merge-tracking* features of Apache Subversion™ to automatically calculate the correct revision ranges and to perform additional checks that will ensure that the branch to be reintegrated has been fully updated with its parent changes. This ensures that you do not accidentally undo work that others have committed to the parent branch since the last time you synchronized the child branch with it. After the merge, all branch development will be completely merged back into the parent branch, and the child branch will be redundant and can be deleted from the repository.

 **Tip:** Before reintegrating the child branch it is recommended to synchronize it with its parent branch one more time, to help avoid any possible conflicts.

To reintegrate a child branch into its parent branch, follow these steps:

1. Go to menu **Tools > Merge**.
The **Merge** wizard is opened.

2. Select the **Reintegrate a branch** option.



Note: This option is disabled if the selected working copy item (or if it is a directory, any of the items inside of it) has any type of modification. This is because it is mandatory for the target item to have no modifications.

3. It is recommended that you enable the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.

- a) Press the **Next** button.

If the **Perform pre-merge best practices checks of the working copy target** option was enabled, [the Pre-Merge Checks wizard page](#) is displayed.



Note: If errors are found you need to solve them before proceeding.

4. Press the **Next** button.

The **Reintegrate a branch** wizard page is displayed.

5. In the **Child branch (URL)** text box, enter [the URL of the child branch to be reintegrated](#). This means that the URL must belong to the same repository as your working copy that was created from the parent branch.

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.



Tip: You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). The peg revision specifies both the peg revision of the URL and the latest revision that will be considered for merging. By default, the HEAD revision is assumed.

The [Merge Options wizard page](#) is displayed that allows you to configure options for the operation.



Note: Since a *reintegrate merge* is so specialized, most of the merge options are not available, except for those in the **File Comparison** category.

6. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.



Note: The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

Merge Two Different Trees

This merge type is useful when you need to duplicate changes from one child branch (for example, CB1) to another child branch (CB2) from the same parent branch. The SVN client will calculate the changes necessary to get from the HEAD revision of the parent branch (or the *trunk*) to the HEAD revision of one of its child branches (CB1), and apply those changes to your working copy of the other branch (CB2). The result is that the latter child branch (CB2) will also include the changes made on the original child branch (CB1), although that branch was not reintegrated into the parent branch.

This merge type could also be used to reintegrate a child branch back into its parent when the repository does not support *merge tracking*.



Note: If the server does not support *merge-tracking*, then this is the only way to merge a branch back to its parent.

1. Go to menu **Tools > Merge**.
The **Merge** wizard is opened.
2. Select the option **Merge two different trees**.
3. It is recommended that you enable the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
 - a) Press the **Next** button.
If the **Perform pre-merge best practices checks of the working copy target** option was enabled, [the Pre-Merge Checks wizard page](#) is displayed.



Note: If errors are found you need to solve them before proceeding.

4. Press the **Next** button.
The **Merge two different trees** wizard page is displayed.
5. In the **From (starting URL and revision)** section enter [the URL of the first branch](#).

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.



Tip: If you are using this method to merge a feature branch back to its parent branch, you need to start the merge wizard from within a working copy of the parent. In this field enter the full URL of the parent branch. This may sound wrong, but remember that the parent is the starting point to which you want to add the branch changes.



Note: If the URL belongs to a different repository than the working copy, the **Ignore ancestry / Disable merge tracking** option, in the [Merge Options wizard page](#), will be enabled automatically (and you cannot change this). This is because the [Subversion client cannot track changes between different repositories](#).



Tip: You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). By default, the HEAD revision is assumed.

6. Enter the last revision number at which the two trees were synchronized by choosing between **HEAD revision** and **other revision**.

- **HEAD revision** - Use this option if you are sure that no one else has committed changes since the last synchronization.
- **other revision** - Use this option to input a specific revision number and avoid losing recent commits. You can use the **History** button to see a list of all revisions.

7. In the **To (ending URL and revision)** section enter *the URL of the second branch*.

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.



Tip: If you are using this method to merge a feature branch back to its parent branch, enter the URL of the feature branch. This way, only the changes unique to this branch will be merged, since the branch should have been periodically synchronized with its parent.



Attention: The URL must point to the same repository as the one in the **From (starting URL and revision)** field. Otherwise, the operation will not be allowed, since Subversion cannot compute changes between items from different repositories.



Tip: You can also specify a *peg revision* at the end of the URL (for example, URL@rev1234). By default, the HEAD revision is assumed.

8. Select a revision to compute all changes committed up to that point by choosing between **HEAD revision** and **other revision**.

- **HEAD revision** - This is the default selected revision.
- **other revision** - Use this option if you want to enter a previous revision. You can use the **History** button to see a list of all revisions.

9. Optionally, if you want to *configure the options* for your merge, press the **Next** button.

The *Merge Options wizard page* is displayed that allows you to configure options for the operation.



Warning: If the **Ignore ancestry / Disable merge tracking** option is enabled and you selected **all revisions** in the **Revisions to merge** section, revisions that were previously merged will also be included, which may result in conflicts.

10. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, *you may need to resolve conflicts* after making major changes.



Note: The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

Merge Options

Here is the list of options that can be used when merging:

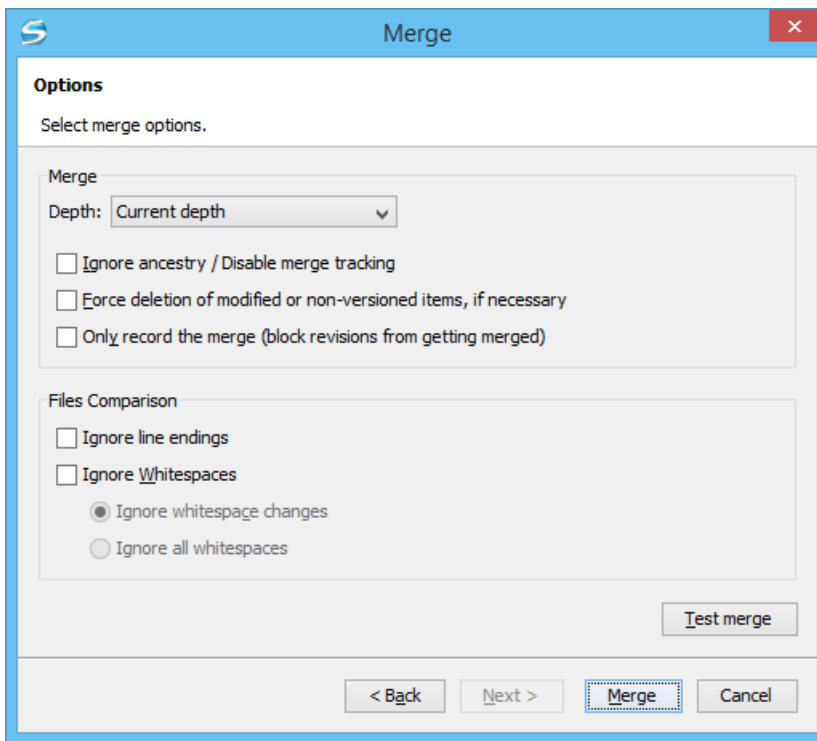


Figure 285: The Merge Wizard - Advanced Options

- **Depth** (This option is applicable only for directories) - sets the depth of the merge operation. You can specify how far down into your working copy the merge should go by selecting one of the following values:
 - **Current depth** - Obeys the depths registered for the directories in the working copy that are to be switched.
 - **Recursive (infinity)** - Merges all the files and folders contained in the selected folder. This is the recommended depth for most users, to avoid incomplete merges and *subtree mergeinfo*.
 - **Immediate children (immediates)** - Merges only the child files and folders without recursing subfolders.
 - **File children only (files)** - Merges only the child files.
 - **This folder only (empty)** - Merges only the selected folder (no child files or folders are included).



Note: The *depth* term is described in the [Sparse checkouts](#) section. The default depth is the current depth of the working copy item receiving the merge.

- **Ignore ancestry / Disable merge tracking** - Changes the way two items are merged if they do not share a common ancestry. Most merges involve comparing items that are ancestrally related to one another. However, occasionally you may want to merge unrelated items. If this option is disabled, the first item will be replaced with the second item. In these situations, you would want the merge to do a path-based comparison only, ignoring any relations between the items. For example, if two different files have the same name and are in the same relative location, disabling the option replaces one of the files with the other one, and enabling it merges their contents.



Note: If the URL of the merge source belongs to a different repository than the URL of the target working copy item (the one receiving the changes), this option is selected automatically (and you cannot change this). This is because the *Subversion client cannot track changes between different repositories*.

- **Force deletion of modified or non-versioned items, if necessary** - If disabled, when the merge operation involves deleting locally modified or non-versioned items, it will fail. This is done in order to prevent data loss. This option is only available if there are uncommitted changes in the working copy.
- **Only record the merge (block revisions from getting merged)** - Available when the **Ignore ancestry / Disable merge tracking** option is disabled. It enables a special mode of the merge operation that just records it in the local merge tracking information, without actually performing it (does not modify any file contents or the structure of your working copy). You might want to enable this option for two possible reasons:

- You made (or will make) the merge manually, and therefore you need to mark the revisions as being merged to make the merge tracking system aware of them. This will exclude them from future merges.
 - You want to prevent one or more particular changes from being fetched in subsequent merges.
 - **Ignore line endings** - Allows you to specify how the line ending changes should be handled. By default, all such changes are treated as real content changes, but you can ignore them if you select this option.
 - **Ignore whitespaces** - Allows you to specify how the whitespace changes should be handled. By default, all such changes are treated as real content changes, but you can ignore them if you select this option.
 - **Ignore whitespace changes** - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).
-  **Note:** Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.
- **Ignore all whitespaces** - Ignores all types of whitespace changes.
 - **Test merge** - Performs a dry run of the merge operation, allowing you to *preview* it without actually performing the merge. In the **Console** view you will see a list of the working copy items that will be affected and how they will be affected. This is helpful in detecting whether or not a merge will be successful, and where conflicts may occur.

Resolving Merge Conflicts

After the merge operation is finished, it is possible to have some items in conflict. This means that some incoming modifications for an item could not be merged with the current working copy version. If there are such conflicts, the **Merge conflicts** dialog box will appear, presenting the items that are in conflict. This dialog box offers you choices for resolving the conflicts.

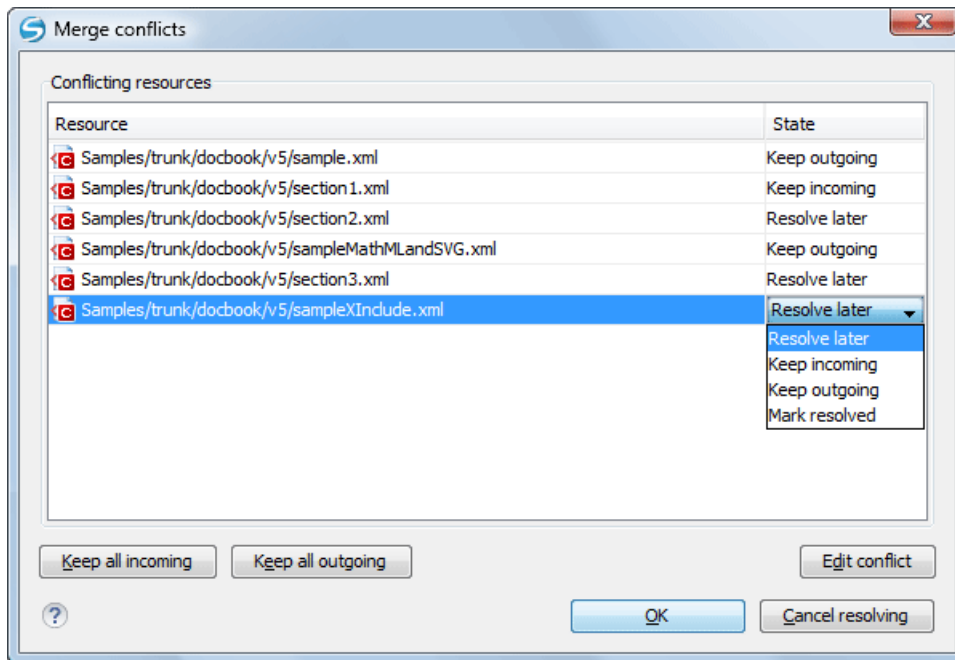


Figure 286: Merge Conflicts Dialog Box

The options to resolve a conflict are as follows:

- **Resolve later** - Used for leaving the conflict as it is, to manually resolve it later.
- **Keep incoming** - This option keeps all the incoming modifications and discards all current ones from your working copy.
- **Keep outgoing** - This option keeps all current modifications from your working copy and discards all incoming ones.

- **Mark resolved** - You should choose this option after you have manually solved the conflict, to instruct the Subversion that it was resolved. To do this, use the **Edit conflict** button, which displays a dialog box that presents the contents of the conflicting items (the content of the working copy version versus the incoming version).

Additional Notes About the Merge Operation

Sub-tree Merges

It is recommended to perform a merge on the whole working copy (select its root directory when triggering the operation) to avoid *sub-tree mergeinfo*. *Sub-tree mergeinfo* is the *mergeinfo* recorded to describe a *sub-tree merge*. That is, a merge done directly to a child of a branch root that might be needed in certain situations. There is nothing special about *sub-tree merges* or *sub-tree mergeinfo* except that the complete record of merges to a branch may not be contained solely in the *mergeinfo* on the branch root and you may have to look to any *sub-tree mergeinfo* to get a full accounting. Fortunately, Subversion does this for you and rarely will you need to look for it.

Merging from Foreign Repositories

Subversion supports merging from foreign repositories. While all merge source URLs must point to the same repository, the merge target (from the working copy) may come from a different repository than the source. However, copies made in the merge source will be transformed into plain additions in the merge target. Also, *merge-tracking* is not supported for merges from foreign repositories.



Note: When performing merges from repositories other than the one corresponding to the target item (from the working copy), the **Ignore ancestry / Disable merge tracking** option, in the [Merge Options wizard page](#), will be enabled automatically (and you cannot change this).

General Merge Recommendations

As a recommendation, you should only merge into clean working copies that **do not** contain any of the following:

- Modifications.
- Sparse directories (all directories must be of depth *infinity*).
- Switched items.



Important: This recommendation becomes mandatory when performing a [reintegrate merge](#) operation. Also, trying to merge to mixed-revision working copies will fail in all types of merge operations.



Remember: The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

Switch the Repository Location

The **Switch** action is useful when the repository location of a working copy, or an already committed item in the working copy, must be changed within the same repository. The action is available on the **Tools** menu when a versioned resource is selected in the current working copy that is displayed in [the Working Copy view](#).



Note: *External* items cannot be switched using this action. Instead, change the value of the `svn:externals` property set on the parent directory of the external item and update the parent directory.

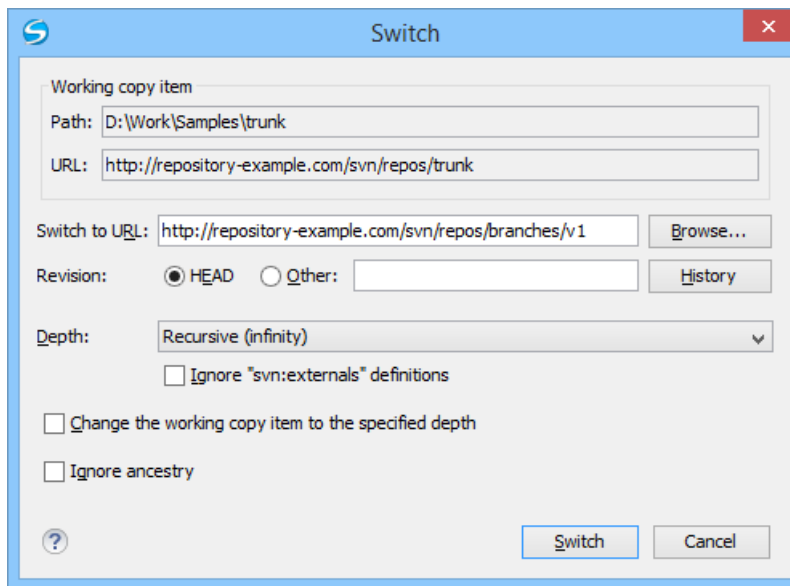


Figure 287: The Switch Dialog Box

The following options can be configured in the **Switch** dialog box:

Switch to URL

The new location in the same repository to which you are switching.



Tip: You can switch to items that were deleted, moved, or replaced, by specifying the original URL (before the item was removed) and use a *peg revision* at the end (for example, URL@rev1234).



Note: For items that are already *switched* that you want to switch back, the proposed URL is the original location of the item.

Revision

The specific version of the location to which you are switching.

Depth - (This option is applicable only for directories)

Current depth - Obeys the depths registered for the directories in the working copy that are to be switched.

Recursive (infinity) - Switches the location of the selected folder and all of its files and folders.

Immediate children (immediates) - Switches the location of the selected folder and its child files and folders without recursing subfolders.

File children only (files) - Switches the location of the selected folder and its child files.

This folder only (empty) - Switches the location of the selected folder (no child files or folders are included).

Ignore "svn:externals" definitions

When enabled, external items are ignored in the switch operation. This option is only available if you choose the **Current depth** or **Recursive (infinity)** depth.

Change the working copy item to the specified depth

Changes the *sticky* depth on the directory in the working copy.

Ignore ancestry

When disabled, the SVN system does not allow you to switch to a location that does not share a common ancestry with the current location. If enabled, the SVN does not check for a common ancestry.

Relocate a Working Copy

Sometimes the base URL of the repository is changed after a working copy is checked out from that URL. For example, if the repository itself is moved to a different server. In such cases, you do not have to check out a working copy from

the new repository location. It is easier to change the base URL of the root folder of the working copy to [the new URL of the repository](#).



Note: *Peg revisions* have no effect for this operation.

This **Relocate** action is available in the **Tools** menu when selecting the root item of the working copy.



Note: *External* items that are defined using absolute URLs and that point to the same repository as the working copy are not affected by the **Relocate** action (the URL is not updated). To relocate these items, change the value of the `svn:externals` property for each external item, which is set on their parent directories. For example, if an external item is defined as `externalDir http://host/path/to/repo/to/dir` and the repository was moved to another server (`host2`) and its protocol changed to `https`, then the value of the property needs to be updated to `externalDir https://host2/path/to/repo/to/dir`.



Tip: If you edit external items using the method described in the previous note, on the next update the system will try to fetch the external items again. To avoid this, you can invoke the **Relocate** action on each of these external items.

Patches

This section explains how to work with patches in Syncro SVN Client.

What is a Patch

Suppose you are working with a set of XML files that you want to tag the project and distribute releases to other team members. While working on the project and correcting problems, you may need to distribute the corrections to other team members. In this case, you can distribute a patch, which is a collection of differences, that applied over the last distribution, would correct the problems. By default, the Syncro SVN Client generates patches in [the Unified Diff format](#), but it can also use [the Git format](#).

Creating a patch in Apache Subversion™ implies the access to either two revisions of a versioned item, or two different versioned items from the repository:

- *Two revisions of a version item* - the item can be local or remote and you can select two versions of it. This also applies when you need to generate a patch that only contains the changes in the working copy that were not yet committed.
- *Two different versioned items from the repository* - the items are remote and you need to specify a revision for both.



Warning: The resulting patch file may contain content that was written using a mix of encodings, based upon the encodings of the files that were compared. If you open the generated patch file in a text editor, it may result in unrecognizable content.

Generating a Patch - Local Items

Based on a versioned item (already committed or scheduled for addition) in the working copy, you can generate patches that contain the local changes, the differences between a specific revision of that item and the item itself, or differences between the pristine item and another item from the repository. There are four options for generating a patch based upon local items.

To open the **Create patch** wizard, use the  **Create patch** action from the **Tools** menu or from the contextual menu in the **Modified**, **Incoming**, **Outgoing**, or **Conflicts** modes.

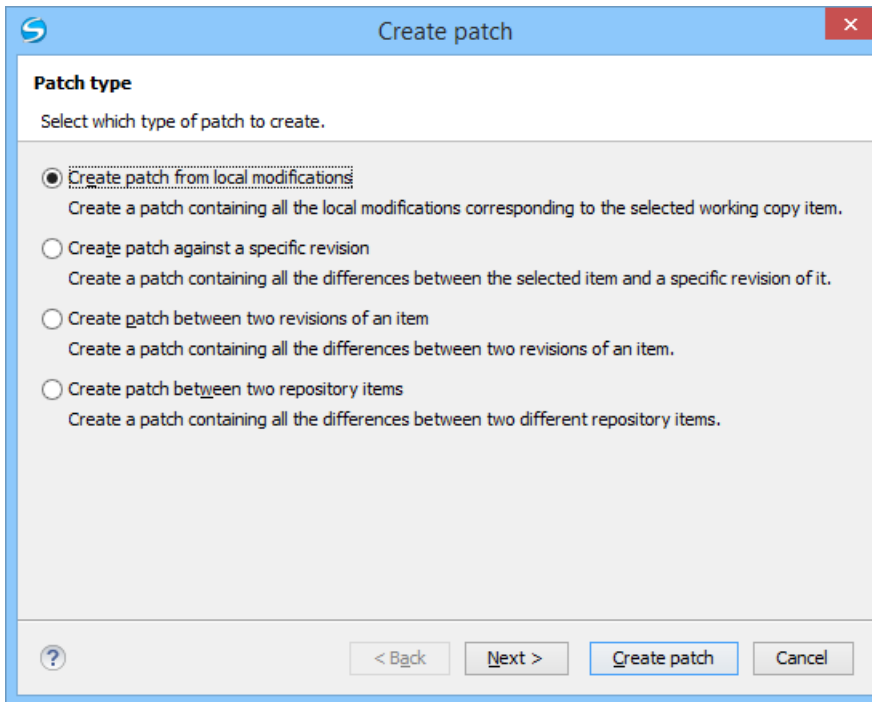


Figure 288: The Create Patch Wizard - Local Items

Create Patch from Local Modifications

This is the most commonly used type of patch and contains only the local changes for the selected item.

This option is useful if you want to share changes with other team members and you are not yet ready to commit them. This option is only available for local items that contain modifications. It is not available for items in which the local file status is *unversioned or ignored, and in some cases missing or obstructed*.

The steps are as follows:

1. Go to menu **Tools > Create patch**.
This opens the **Create patch** wizard.
2. Select the **Create patch from local modifications** option in the dialog box.
3. Optionally, if you want *to configure the options* for your patch, press the **Next** button.
This options page does not remember your selections when creating future patches. It will revert to the default values.
The **Options** wizard page is displayed.
4. Press the **Create patch** button.
If the patch is applied on a folder of the working copy and that folder contains *unversioned files*, this step of the wizard offers the option of selecting the ones that will be included in the patch.

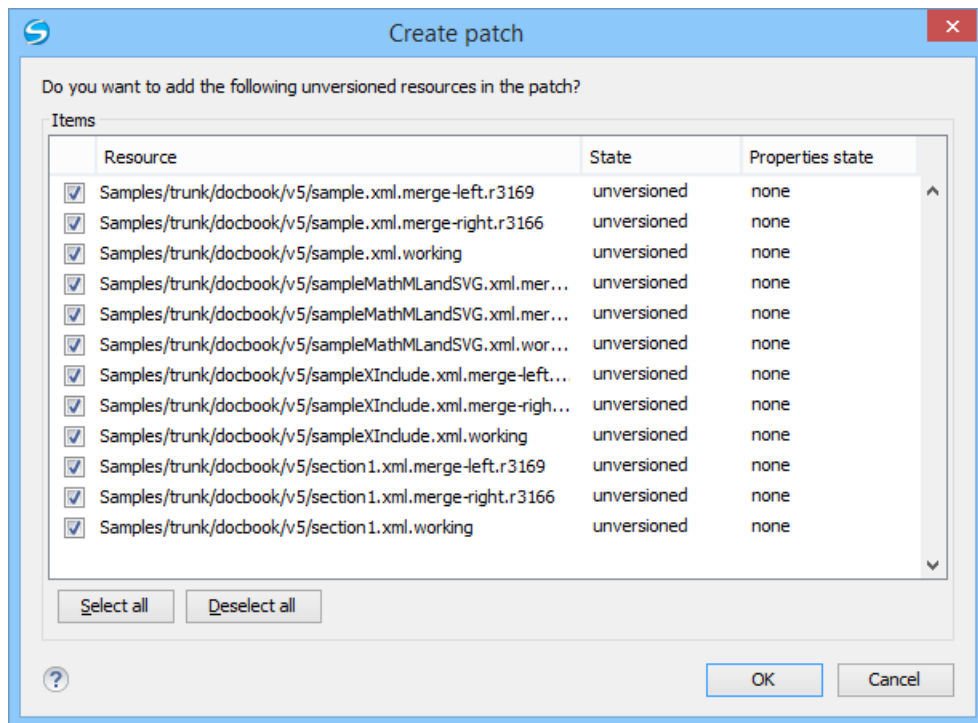


Figure 289: The Create Patch Dialog Box - Add Unversioned Resources

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

Create Patch Against a Specific Revision

This type of patch contains changes between an old revision and the current content from the selected item within the working copy.

This option is useful if you want to obtain differences between an older revision and the current state of the working copy (for instance, to test how current changes apply to an older version).

The steps are as follows:

1. Go to menu **Tools > Create patch**.
This opens the **Create patch** wizard.
2. Select the **Create patch against a specific revision** option in the dialog box.
3. Press the **Next** button.
The second step of the wizard is opened:

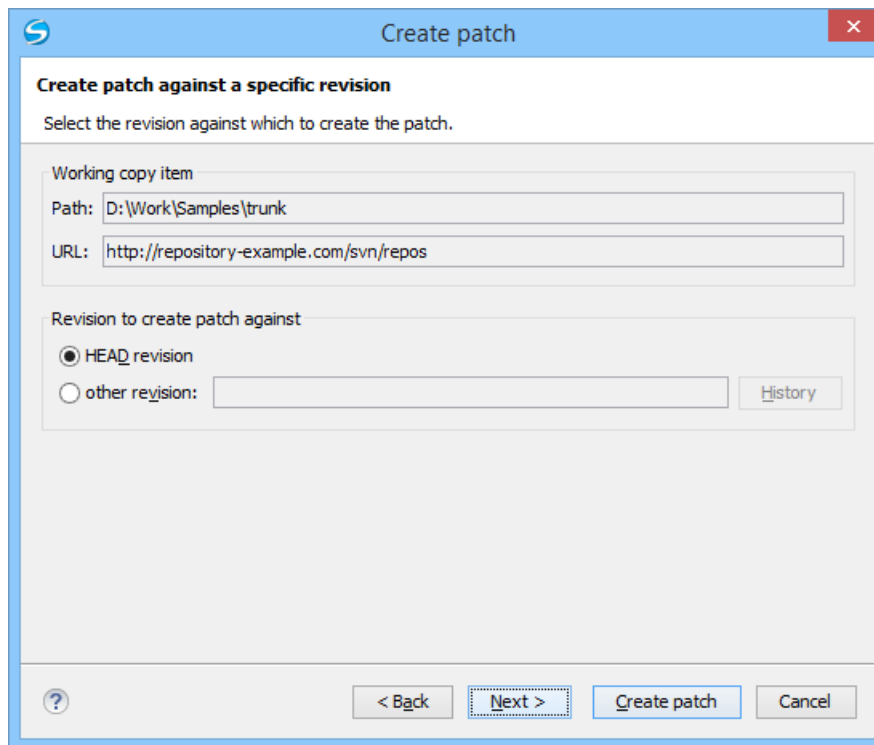


Figure 290: The Create Patch Wizard - Step 2

4. Select the **revision to create patch against**.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.



Note: If the **revision to create patch against** is older than the revision to which the working copy item was updated, the patch will include changes that were made **after** the selected revision.

5. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values. The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

Create Patch Between Two Revisions of an Item

This type of patch contains historical changes between two revisions of a selected item.

This option is useful if you want to share changes between two revisions with other team members.



Tip: If you need to generate a patch between two revisions of a previously *deleted*, *moved*, or *replaced* item, you should use [the Create patch between two repository items option](#) instead.

The steps are as follows:

1. Go to menu **Tools > Create patch**.

This opens the **Create patch** wizard.

2. Select the **Create patch between two revisions of an item** option in the dialog box.

3. Press the **Next** button.

The second step of the wizard is opened:

The screenshot shows a dialog box titled 'Create Patch Wizard - Step 2'. It is divided into two main sections: 'From' and 'To'.
 In the 'From' section, there are two radio buttons: 'HEAD revision' (unselected) and 'other revision' (selected). Next to 'other revision' is a text input field containing the number '27436'. To the right of this input field is a button labeled 'History'.
 In the 'To' section, there are also two radio buttons: 'HEAD revision' (selected) and 'other revision' (unselected). Next to 'other revision' is an empty text input field. To the right of this input field is another button labeled 'History'.

Figure 291: The Create Patch Wizard - Step 2

4. Select the starting and ending revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.



Note: The patch will only include changes between the two specified revisions, starting with the changes that were made **after** the older revision.



Tip: If you want to reverse changes done between two revisions by using a patch file, you can specify the newer revision in the **From** section and the older version in the **To** section.

5. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

Create Patch Between Two Repository Items

This type of patch contains changes between one version of an item and a specific version of another item.

This option is useful for generating a patch that contains changes between existing, or even previously deleted, moved, or replaced items from different branches. This is the default option when you do not have a working copy loaded, when no repository items are selected, or when exactly two repository items of the same kind are selected.



Tip: To access an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

The steps are as follows:

1. Go to menu **Tools > Create patch**.
This opens the **Create patch** wizard.
2. Select the **Create patch between two repository items** option in the dialog box.
3. Press the **Next** button.

The second step of the wizard is opened:

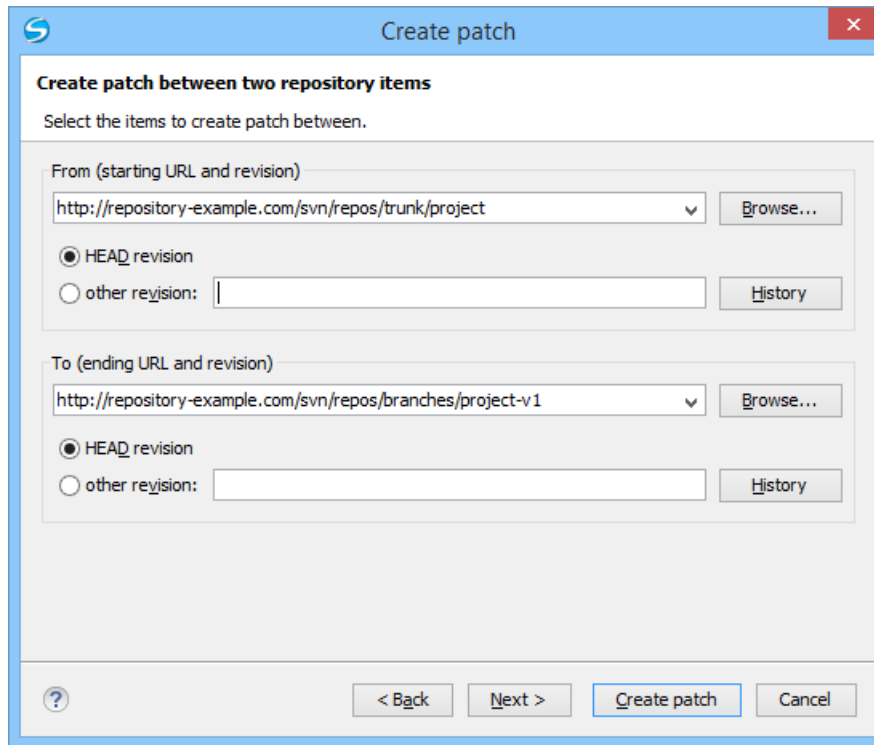


Figure 292: The Create Patch Wizard - Step 2

4. Select *the starting and ending URLs* and revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press *the History button* to display a list of the item revisions.



Important: Both URLs must point to items from the same repository.



Note: If you use a *peg* revision in the URL field, anything specified in the **other revision** field is ignored.

5. Optionally, if you want *to configure the options* for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in *the Output section of the Options page* or in the default location.

Generating a Patch - Remote Items

Based on a repository item, you can generate patches that contain the differences between two specific revisions of that item, or between a revision of that same item and another revision of another item from the repository. There are two options for generating a patch based upon remote items.

To open the **Create patch** wizard, use the  **Create patch** action from the **Tools** menu.

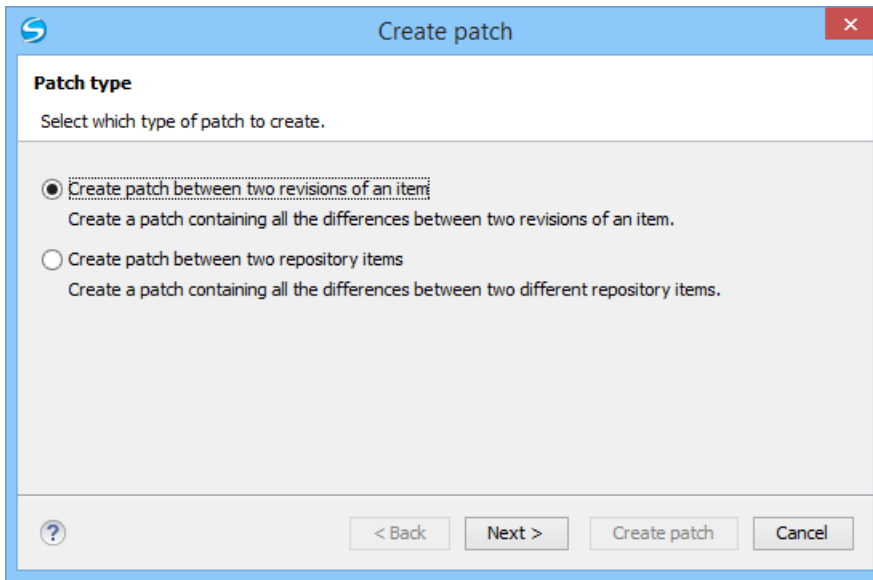


Figure 293: The Create Patch Wizard - Remote Items

Create Patch Between Two Revisions of an Item

This type of patch contains historical changes between two revisions of a selected item.

This option is useful if you want to share changes between two revisions with other team members.

Tip: If you need to generate a patch between two revisions of a previously *deleted*, *moved*, or *replaced* item, you should use [the Create patch between two repository items option](#) instead.

The steps are as follows:

1. Go to menu **Tools > Create patch**.
This opens the **Create patch** wizard.
2. Select the **Create patch between two revisions of an item** option in the dialog box.
3. Press the **Next** button.

The second step of the wizard is opened:



Figure 294: The Create Patch Wizard - Step 2

4. Select the starting and ending revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.

Note: The patch will only include changes between the two specified revisions, starting with the changes that were made **after** the older revision.

Tip: If you want to reverse changes done between two revisions by using a patch file, you can specify the newer revision in the **From** section and the older version in the **To** section.

- Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

- Press the **Create patch** button.

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

Create Patch Between Two Repository Items

This type of patch contains changes between one version of an item and a specific version of another item.

This option is useful for generating a patch that contains changes between existing, or even previously deleted, moved, or replaced items from different branches. This is the default option when you do not have a working copy loaded, when no repository items are selected, or when exactly two repository items of the same kind are selected.

Tip: To access an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

The steps are as follows:

- Go to menu **Tools > Create patch**.

This opens the **Create patch** wizard.

- Select the **Create patch between two repository items** option in the dialog box.

- Press the **Next** button.

The second step of the wizard is opened:

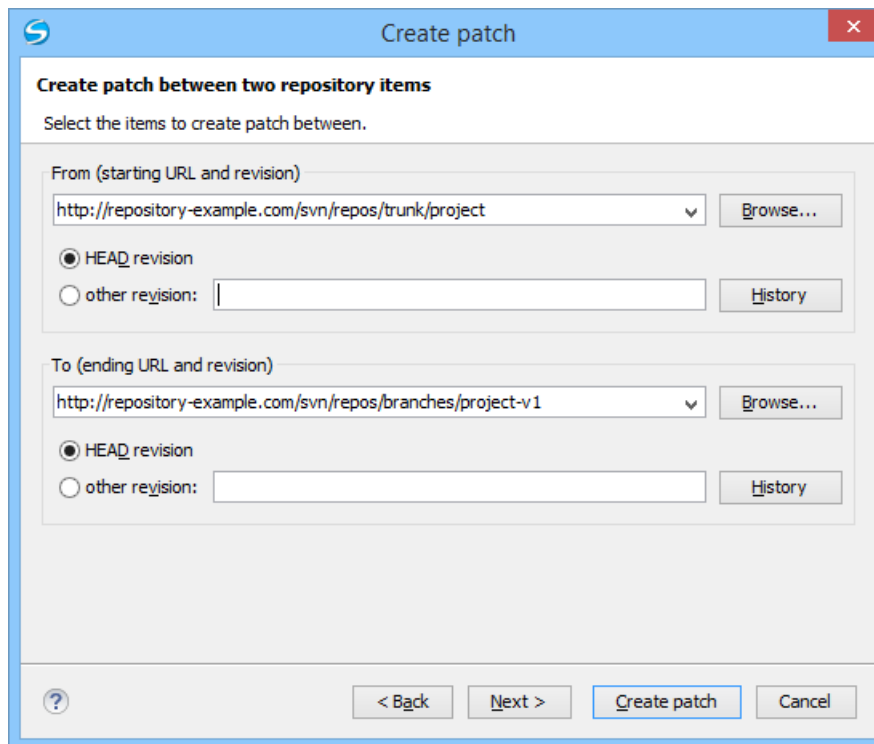


Figure 295: The Create Patch Wizard - Step 2

- Select [the starting and ending URLs](#) and revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.

Important: Both URLs must point to items from the same repository.



Note: If you use a *peg* revision in the URL field, anything specified in the **other revision** field is ignored.

5. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.
This options page does not remember your selections when creating future patches. It will revert to the default values.
The **Options** wizard page is displayed.
6. Press the **Create patch** button.
The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

Patch Options

Figure 296: The Create Patch Wizard - Options

Patch Section

Depth - (This option is applicable only for directories)

Current depth - The depth of recursing the folder for creating the patch is the same as the depth of that same folder in the working copy (available only when generating patches that contain changes from the working copy).

Recursive (infinity) - The patch is created on all the files and folders contained in the selected folder.

Immediate children (immediates) - The patch is created only on the child files and folders without recursing subfolders.

File children only (files) - The patch is created only on the child files.

This folder only (empty) - The patch is created only on the selected folder (no child file or folder is included in the patch).

Ignore content of added files

When enabled, the patch file does not include the content of the *added* items. This option corresponds to the `--no-diff-added` option of the `svn diff` command.

Ignore content of delete files

When enabled, the patch file does not include the content of the *deleted* items. This option corresponds to the `--no-diff-deleted` option of the `svn diff` command.

Treat copied files as newly added

When enabled, copied items are treated as new, rather than comparing the items with their sources. This option corresponds to the `--show-copies-as-adds` option of the `svn diff` command.

Include files having a binary MIME type

When enabled, the application is forced to compare items that are considered binary file types. This option corresponds to the `--force` option of the `svn diff` command.

Ignore properties

When enabled, differences in the properties of items are ignored. This option corresponds to the `--ignore-properties` option of the `svn diff` command.

Properties only

When enabled, only differences in the properties of the items are included in the patch file (file content is ignored). This option corresponds to the `--properties-only` option of the `svn diff` command.



Note: The **Ignore properties** and **Properties only** options are mutually exclusive.

Notice ancestry

If enabled, the SVN common ancestry is taken into consideration when calculating the differences. This option corresponds to the `--notice-ancestry` option of the `svn diff` command.

Files Comparison Section**Ignore line endings**

If enabled, the differences in line endings are ignored when the patch is generated. This option corresponds to the `--ignore-eol-style` option of the `svn diff` command.

Ignore whitespaces

If enabled, it allows you to specify how the whitespace changes should be handled. When enabled, you can then choose between two options:

- **Ignore whitespace changes** (`--ignore-space-change`) - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).



Note: Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.

- **Ignore all whitespaces** (`--ignore-all-space`) - Ignores all types of whitespace changes.

Output Section**Save as**

The patch will be created and saved in the specified file.

Use Git extended diff format

When enabled, the patch is generated using the *Git* format. This option corresponds to the `--git` option of the `svn diff` command.

Working with Repositories

This section explains how to locate and browse SVN repositories in Syncro SVN Client.

Importing Resources Into a Repository

Importing resources into a repository is the process of copying local files and directories into a repository so that they can be managed by an Apache Subversion™ server. If you have already been using Subversion and you have an existing working copy you want to use, then you will likely want to follow the procedure for [using an existing working copy](#).

The **Import folder** and **Import Files** actions are available from the **Import** submenu of the **Repository** menu or of the contextual menu in the **Repositories** view. These actions open a dialog box that allow you to select the directories or files that will be imported into the selected repository location.

The **Import folder** action opens the **Import folder** dialog box.

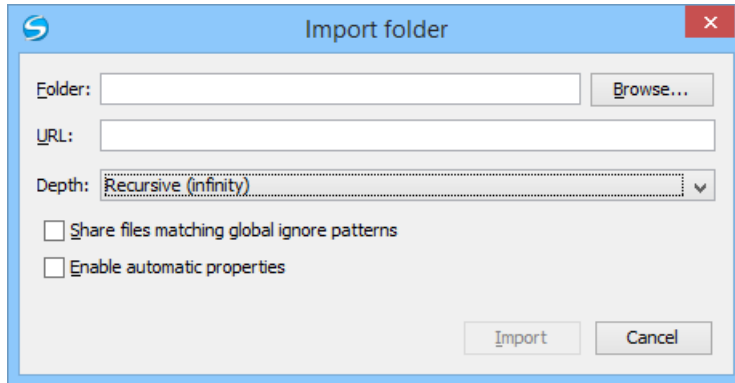


Figure 297: The Import Folder Dialog Box

You can configure the following options:

Folder

Specify [the local folder](#) by using the text box or the **Browse** button. This folder should not be empty or already under version control.



Important: By default, the SVN system only imports the content of the specified folder, and not the folder itself. Therefore, it is recommended to use the **Browse** button to select the local folder so that the client will automatically append the name of it to the specified URL.

URL

Specify [the repository location](#) that will be used to access the folder to be imported.



Note: *Peg revisions* have no effect for this operation since it is used to send information to the repository.



Attention: If the new location already exists, make sure that it is an empty directory to avoid mixing your project content with other files (if items exist with the same name, an error will occur and the operation will not proceed). Otherwise, if the address does not exist, it is created automatically.

Depth

Recursive (infinity) - Imports all the files and folders contained in the selected folder.

Immediate children (immediates) - Imports only the child files and folders without recursing subfolders.

File children only (files) - Import only the child files.

This folder only (empty) - Imports only the selected folder (no child file or folder is included).

Share files matching global ignore patterns

When enabled, the file names that match the patterns defined in either of the following locations are also imported into the repository:

- The `global-ignore` property in [the SVN configuration file](#).
- The [File name ignore patterns option](#) in the **SVN > Working Copy preferences page**.

Enable automatic properties/Disable automatic properties

Enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in [the SVN configuration file](#).



Note: This option is available only when there are defined properties to be applied automatically for newly added items under version control. You can define these properties in the SVN `config` file (in the `auto-props` section). Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

Exporting Resources From a Repository

This is the process of taking a resource from the repository and saving it locally in a clean form, with no version control information. This is very useful when you need a clean build for an installation kit.

The **Export** dialog box is very similar to the **Check out** dialog box:

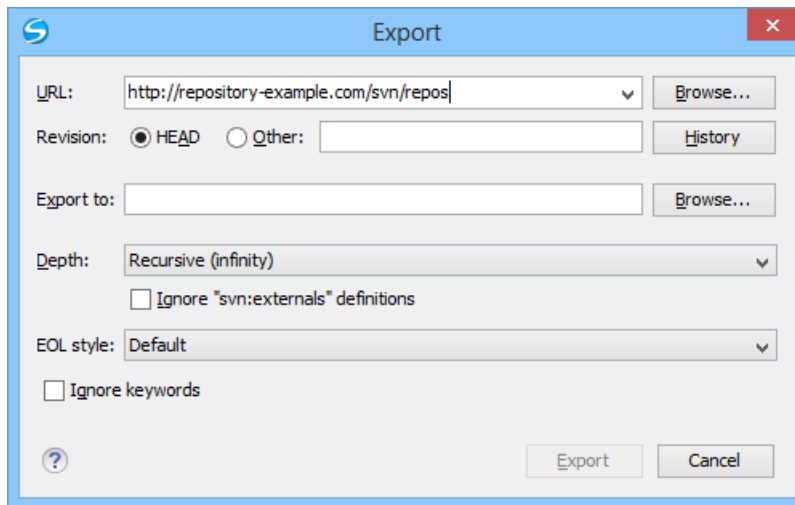


Figure 298: Export from Repository Dialog Box

You can configure the following options:

URL

Specify [the source directory from the repository](#) by using the text box or the **Browse** button.



Tip: To export an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, `URL@rev1234`).



Note: The content of the selected directory from the repository and not the directory itself will be exported to the file system.

Revision

You can choose between the **HEAD** or **Other** revision. If you need to export a specific revision, specify it in the **Other** text box or use the **History** button and choose a revision from the **History** dialog box.

Export to

Specify [the location where you want to export](#) the repository directory by typing the local path in the text box or by using the **Browse** button. If the specified local path does not point to an existing directory, it will automatically be created.



Important: By default, the SVN system only exports the content of the directory specified by the URL, and not the directory itself. Therefore, it is recommended to use the **Browse** button to select the *export* location so that the client will automatically append the name of the remote directory to the path of the selected directory.



Warning: The destination directory should be empty. If files exist, they will be overwritten by exported files with matching names.

Depth

Recursive (infinity) - Exports all the files and folders contained in the selected folder.

Immediate children (immediates) - Exports only the child files and folders without recursing subfolders.

File children only (files) - Export only the child files.

This folder only (empty) - Exports only the selected folder (no child file or folder is included).

Ignore "svn:externals" definitions

When enabled, external items are ignored in the export operation. This option is only available if you choose the

Recursive (infinity) depth.

EOL style

Defines the *end-of-line (EOL)* marker that should be used when exporting files that have the value or the `svn:eol-style` property set to `native`. You can choose between the following styles:

- **Default** - It uses the system-specific *end-of-line* marker.
- **CRLF** - The **Windows**-specific *end-of-line* marker (*carriage return - line feed*).
- **LF** - The **Unix / OS X**-specific *end-of-line* marker (*line feed*).
- **CR** - The **Mac OS 9 (or older)**-specific *end-of-line* marker (*carriage return*).

Ignore keywords

When enabled, the export operation does not expand the *SVN keywords* found inside the files.

Copy / Move / Delete Resources From a Repository

Once you have a location defined in the [Repositories view](#), you can run commands (such as copy, move, and delete) directly on the repository. The commands correspond to the following actions in the contextual menu:

The **Copy to** and **Move to** action allows you to copy and move individual or multiple resources to a specific directory from the *HEAD* revision of the repository.

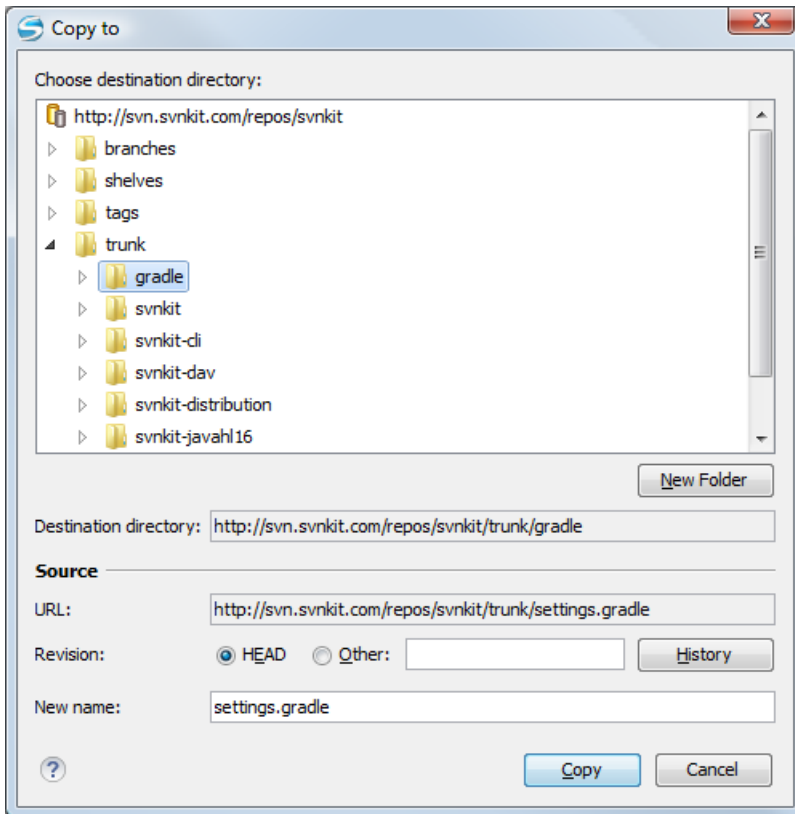


Figure 299: Copy/Move Items in Repository

The dialog box used to copy or move items allows you to browse the *HEAD* revision of the repository and select the destination of the items, presenting its repository URL below the tree view.

The **Source** section presents relevant options regarding the item(s) that you move or copy:

- **URL** - This field is displayed only if you copy/move a single item.
- **Revision** - Presents the revision from which you copy one or more items, allowing you to also choose another revision.

 **Note:** Since only items from the HEAD revision can be moved, the **Revision** options are not presented for the **Move to** action.

 **Note:** When you copy a single item while browsing a revision other than *HEAD*, the **Revision** options present this revision but does not allow you to change it. The same applies if copying multiple items.

- **New name** - This option is presented when you copy or move a single item, allowing you to also rename it.

Another useful action is **Delete**, allowing you to erase resources directly from the repository.

All three actions are commit operations and you will be prompted with the **Commit message** dialog box.

Sparse Checkout

Sometimes you need to check out only certain parts of a directory tree. For this you can check out the top directory (*the action **Check out from the Repositories view***) and then update recursively only the needed directories (*the action **Update from the Working Copy view***). Now, each directory has a depth set to it, which has four possible values:

- **Recursive (infinity)** - Updates all descendant directories and files recursively.
- **Immediate children (immediates)** - Updates the directory, including direct child directories and files, but does not populate the child directories.
- **File children only (files)** - Updates the directory, including only child files without the child directories.

- **This folder only (*empty*)** - Updates only the selected directory, without updating any children.

For some operations, you can use as depth the current depth registered on the directories from the working copy (the value **Current depth**). This is the depth value defined in a previous check out or update operation.

The sparse checked out directories are presented in the [Working Copy view](#) with a marker corresponding to each depth value, in the top left corner, as follows:

-  **Recursive (*infinity*)** - This is the default value and it has no mark. The directory has no limiting depth.
-  **Immediate children (*immediates*)** - The directory is limited to direct child directories (without contents) and files.
-  **File children only (*files*)** - The directory is limited to direct child files only.
-  **This folder only (*empty*)** - The directory has *empty* depth set.

A depth set on a directory means that some operations process only items within the specified depth range. For example, **Synchronize** on a working copy directory reports the repository modified items within the depth set on the directory and those existing in the working copy outside of this depth.

The depth information is also presented in the **SVN Information** dialog box and in the tool tip displayed when hovering a directory in the **Working Copy** view.

Syncro SVN Client Views

The main working area occupies the center of the application window, which contains the most important views:


- [Repositories View](#)
- [Working Copy View](#)
- [History View](#)
- [Console View](#)

The other views that support the main working area are also presented in this section.

Repositories View

The **Repositories** view allows you to define and manage Apache Subversion™ repository locations and browse repositories. If no connections to your repository are available, you can [add a new repository location](#). Repository files and folders are presented in a tree view with the repository locations at the first level, where each location represents a connection to a specific repository. More information about each resource is displayed in a tabular form:

- **Date** - Date when the resource was last modified.
- **Revision** - The revision number at which the resource was last time modified.
- **Author** - Name of the person who made the last modification on the resource.
- **Size** - Resource size on disk.
-  **Lock information** - Information about the lock status of a file. When a repository file is locked by a user the  icon is displayed in this column. If no icon is displayed the file is not locked. The tooltip of this column displays the details about the lock:
 - **Owner** - The name of the user who created the lock.
 - **Date** - The date when the user locked the file.
 - **Expires on** - Date when the lock expires. Lock expiry policy is set in the repository options, on the server side.
 - **Comment** - The message attached when the file was locked.
- **Type** - Contains the resource type or file extension.

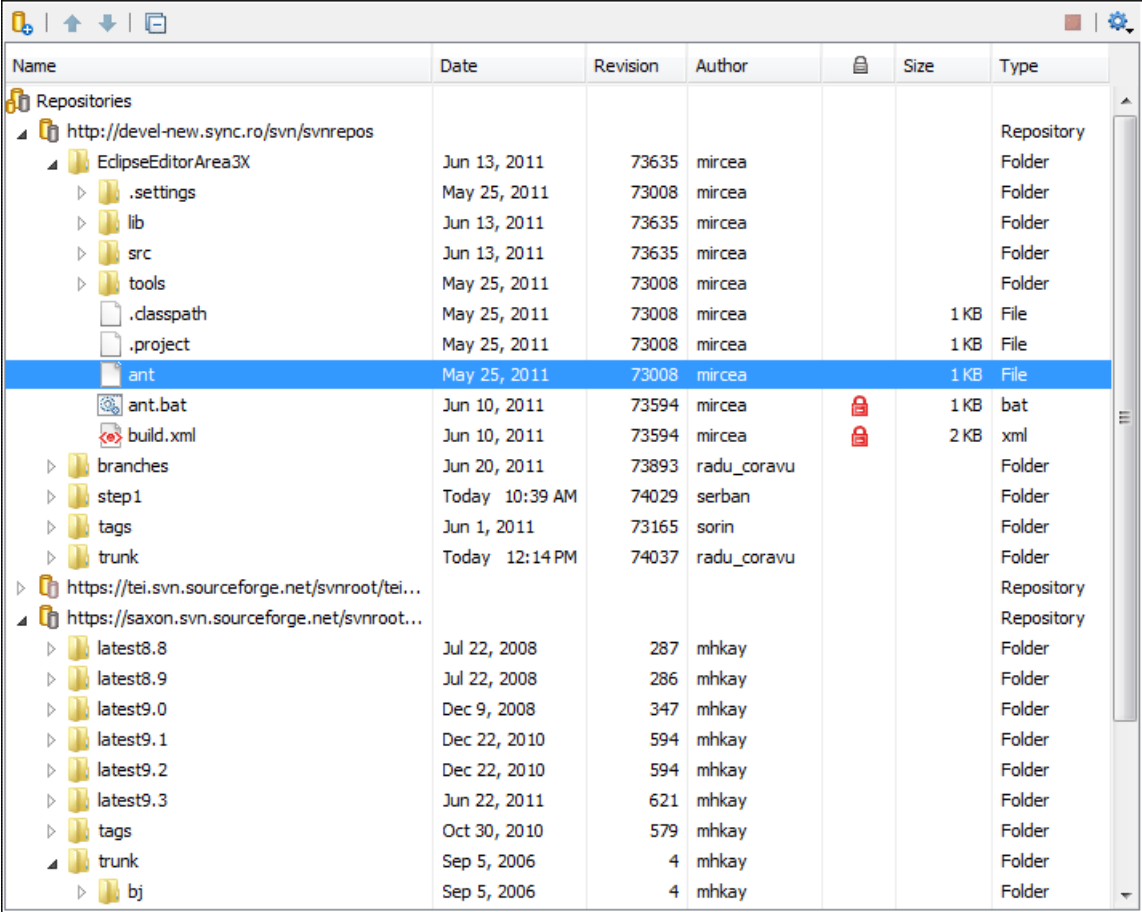

Name	Date	Revision	Author	Lock	Size	Type
Repositories						
http://devel-new.sync.ro/svn/svnrepos						Repository
EclipseEditorArea3X	Jun 13, 2011	73635	mircea			Folder
.settings	May 25, 2011	73008	mircea			Folder
lib	Jun 13, 2011	73635	mircea			Folder
src	Jun 13, 2011	73635	mircea			Folder
tools	May 25, 2011	73008	mircea			Folder
.classpath	May 25, 2011	73008	mircea		1 KB	File
.project	May 25, 2011	73008	mircea		1 KB	File
ant	May 25, 2011	73008	mircea		1 KB	File
ant.bat	Jun 10, 2011	73594	mircea	🔒	1 KB	bat
build.xml	Jun 10, 2011	73594	mircea	🔒	2 KB	xml
branches	Jun 20, 2011	73893	radu_coravu			Folder
step1	Today 10:39 AM	74029	serban			Folder
tags	Jun 1, 2011	73165	sorin			Folder
trunk	Today 12:14 PM	74037	radu_coravu			Folder
https://tei.svn.sourceforge.net/svnroot/tei...						Repository
https://saxon.svn.sourceforge.net/svnroot...						Repository
latest8.8	Jul 22, 2008	287	mhkay			Folder
latest8.9	Jul 22, 2008	286	mhkay			Folder
latest9.0	Dec 9, 2008	347	mhkay			Folder
latest9.1	Dec 22, 2010	594	mhkay			Folder
latest9.2	Dec 22, 2010	594	mhkay			Folder
latest9.3	Jun 22, 2011	621	mhkay			Folder
tags	Oct 30, 2010	579	mhkay			Folder
trunk	Sep 5, 2006	4	mhkay			Folder
bj	Sep 5, 2006	4	mhkay			Folder

Figure 300: Repositories View

Toolbar

The **Repositories** view's toolbar contains the following buttons:

-  **New Repository Location** - Allows you to enter a new repository location by means of the **Add SVN Repository** dialog box.
-  **Move Up** - Move the selected repository up one position in the list of repositories in the **Repositories** view.
-  **Move Down** - Move the selected repository down one position in the list of repositories in the **Repositories** view.
-  **Collapse all** - Collapses all repository trees.
-  **Stop** - Stops the current repository browsing operation executed when a repository node is expanded. This is useful when the operation takes too long or the server is not responding.
-  **Settings** - Allows you to configure the resource table appearance.

Repositories View Contextual Menu Actions

The **Repositories** view contextual menu contains different actions depending on the selected item. If a repository location is selected, the following management actions are available:

New Repository Location (Ctrl Alt N (Meta Alt N on OS X))

Displays the **Add SVN Repository** dialog box. This dialog box allows you to define a new repository location.

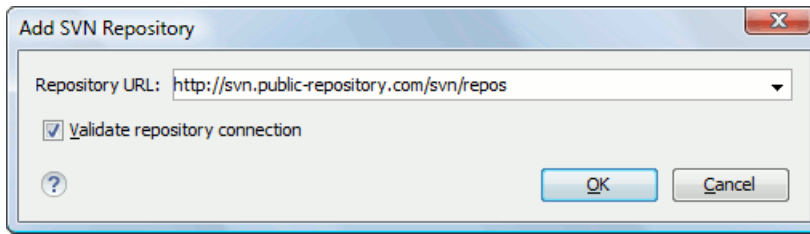


Figure 301: Add SVN Repository Dialog Box

If the **Validate repository connection** option is selected, the URL connection is validated before being added to the **Repositories** view.

 Edit Repository Location (Ctrl Alt E (Meta Alt E on OS X))

Context-dependent action that allows you to edit the selected repository location using the **Edit SVN Repository** dialog box. It is active only when a repository location root is selected.

Change the Revision to Browse (Ctrl Alt B (Meta Alt B on OS X))

Context-dependent action that allows you to change the selected repository revision using the **Change the Revision to Browse** dialog box. It is active only when a repository location root is selected.

 Remove Repository Location (Ctrl Alt R (Meta Alt R on OS X))

Allows you to remove the selected repository location from the view. It shows you a confirmation dialog box before removal. It is active only when a repository location root is selected.

The following actions are common to all repository resources:

Open

Opens the selected file in the Editor view in read-only mode.

Open with

Displays the **Open with** dialog box to specify the editor in which the selected file is opened. If multiple files are selected, only external applications can be used to open the files.

Save as

Saves the selected files locally, as they are in the browsed revision.

 Refresh (F5)

Refreshes the resource selected in the **Repositories** view.

 Check out (Ctrl Alt O (Meta Alt O on OS X))

Allows you to create a working copy from a repository directory, on your local file system. To read more about this operation, see the section [Check out a working copy](#).

Branch/Tag

Allows you to create a branch or a tag from the selected folder in the repository. To read more about how to create a branch/tag, see the [Creation and management of Branches/Tags](#) section.

Share project

Allows you to [share a new project](#) using an SVN repository. The local project is automatically converted into an SVN working copy.

Import:

Import folder (Ctrl Shift L (Meta Shift L on OS X))

Allows you to import the contents of a specified folder from the file system into the selected folder in a repository. To read more about this operation, see the section [Importing resources into a repository](#).



Note: The difference between the **Import folder** and **Share project** actions is that the latter also converts the selected directory into a working copy.

Import Files (Ctrl Shift I (Meta Shift I on OS X))

Imports the files selected from the files system into the selected folder in the repository.

Export

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

**Show History (Ctrl H (Meta T on OS X))**

Displays the history of the selected resource. At the start of the operation, you can set filtering options.

**Show Annotation (Ctrl Shift A (Meta Shift A on OS X))**

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.

**Revision Graph (Ctrl G (Meta G on OS X))**

This action allows you to see the graphical representation of a resource history. For more details about a resource revision graph see the section [Revision Graph](#). This operation is enabled for any resource selected into the **Repositories** view or **Working Copy** view.

Copy URL Location (Ctrl Alt U (Meta Alt U on OS X))

Copies to clipboard the URL location of the selected resource.

**Copy to**

Copies to a specified location the currently selected resource(s). This action is also available when you browse other revisions than the latest one (*HEAD*), to allow restoring previous versions of an item.

Move to (Ctrl M (Meta M on OS X))

Moves to a specified location the currently selected resource(s).

Rename ((F2))

Renames the selected resource.

✗ Delete ((Delete))

Deletes selected items from the repository via an immediate commit.

New Folder (Ctrl Shift F (Meta Shift F on OS X))

Allows you to create a folder in the selected repository path (available only for folders).

Locking

(available only for files):

**Lock (Ctrl K (Meta K on OS X))**

Allows you to lock certain files for which you need exclusive access. For more details on the use of this action, see [Locking a file](#).

**Unlock (Ctrl Shift K (Meta Shift K on OS X))**

Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

**Show SVN Properties (Ctrl Shift P (Meta Shift P on OS X))**

Brings up the [Properties view](#) displaying the SVN properties for the selected resource. This view does not allow adding, editing, or removing SVN properties of a repository resource. These operations are allowed only for working copy resources.

**Show SVN Information (Ctrl I (Meta I on OS X))**

Provides additional information for the selected resource. For more details, go to [Obtain information for a resource](#).

Assistant Actions

When there is no repository configured, the **Repositories** view mode lists the following two actions:


Add a new repository
 Add a new repository to work on or to checkout a new working copy from it.


Checkout a new working copy
 You can start using Syncro SVN Client by checking out a new working copy.

Drag and Drop Operations

The structure of the files tree can be changed with drag and drop operations inside the **Repositories** view. These operations behave in the same way with the **Copy to/Move to** operations.

Working Copy View

The **Working Copy** view allows you to manage the content of an SVN working copy.

The toolbar contains the following:

- The list of defined working copies.
- A set of view modes that allow you to filter the content of the working copy based on the resource status (like incoming or outgoing changes).
- **Settings** menu.

If you click any of the view modes (**All Files**, **Modified**, **Incoming**, **Outgoing**, **Conflicts**), the information displayed changes as follows:

-  **All Files** - Resources (files and folders) are presented in a hierarchical structure with the root of the tree representing the location of the working copy on the file system. Each resource has an icon representation which describes the type of resource and also depicts the state of that resource with a small overlay icon.

svnkit										
svnkit All Files Modified Incoming Outgoing Conflicts										
Name			Date	Revision	Author				Size	Type
E:\svnkit			May 15, 2011	7636	alex					File Folder
gradle			May 4, 2011	7623	alex					File Folder
wrapper			May 4, 2011	7623	alex					File Folder
gradle-wrapper.jar			May 4, 2011	7618	alex				12 KB	Executable ...
gradle-wrapper.properties			May 4, 2011	7623	alex				1 KB	PROPERTIE...
svnkit			May 15, 2011	7636	alex					File Folder
svnkit-ci			May 10, 2011	7630	alex					File Folder
.settings			May 4, 2011	7618	alex					File Folder
src			May 10, 2011	7630	alex					File Folder
main			May 10, 2011	7630	alex					File Folder
conf			May 4, 2011	7618	alex					File Folder
java			May 4, 2011	7622	alex					File Folder
resources			May 4, 2011	7618	alex					File Folder
scripts			May 10, 2011	7630	alex					File Folder
jsvn			May 4, 2011	7618	alex				2 KB	File
jsvn.bat			May 10, 2011	7630	alex				2 KB	Windows B...
jsvnsetup.openvms			May 4, 2011	7618	alex				1 KB	OPENVMS File
build.gradle			May 4, 2011	7618	alex				2 KB	GRADLE File
svnkit-dav			May 4, 2011	7620	alex					File Folder
svnkit-distribution			May 4, 2011	7623	alex					File Folder
svnkit-javahl16			May 4, 2011	7618	alex					File Folder
svnkit-osgi			May 4, 2011	7623	alex					File Folder
svnkit-test			May 12, 2011	7635	alex					File Folder
.settings			May 4, 2011	7618	alex					File Folder
configurations			May 4, 2011	7618	alex					File Folder

Figure 302: Working Copy View - All Files View Mode

-  **Modified** - The resource tree presents resources modified locally (including those with conflicting content) and remotely. Decorator icons are used to differentiate between various resource states:
 - Incoming modification from repository:
 -  - File content or properties modified remotely.
 -  - New file added remotely.
 -  - File deleted remotely.
 - Outgoing modification to repository:
 -  - File content or properties modified locally.
 -  - New file added locally.
 -  - File deleted locally.
 -  - **Pseudo-conflict state** - A resource being locally and remotely modified at the same time, or a parent directory of such a resource.
 -  - **Real conflict state** - A resource that had both incoming and outgoing changes and not all the differences could be merged automatically through the update operation (manually editing the local file is necessary for resolving the conflict).

UserGuide										
All Files Modified Incoming Outgoing Conflicts										
Name					Remote date	Remote revision	Remote author	Size	Type	
UserGuide					Today 11:44 AM	12368	sorin		Folder	
DITA									Folder	
img									Folder	
references									Folder	
tasks									Folder	
topics									Folder	
ignore-resources-working-copy.dita								2 KB	dita	
oxygenEntitiesDictionary.dita					Today 11:44 AM	12368	sorin	2 KB	dita	
preferences-svn-working-copy.dita								4 KB	dita	
properties-view.dita								2 KB	dita	
revert-changes.dita								3 KB	dita	
show-history.dita								1 KB	dita	
svn-main-menu.dita								26 KB	dita	
svn-main-toolbar.dita								3 KB	dita	
svn-toolbar.dita								2 KB	dita	
tree-conflict.dita								1 KB	dita	
update-working-copy.dita								4 KB	dita	
views.dita								3 KB	dita	
working-copy-menu.dita								20 KB	dita	
working-copy-settings.dita					Today 11:28 AM	12366	sorin	2 KB	dita	
working-copy-view.dita								15 KB	dita	
EditorUserManual.ditamap								102 KB	ditamap	
.project						12368		1 KB	File	
build.xml					Nov 17, 2010	12337	sorin	14 KB	xml	
build_part.xml					Nov 16, 2010	12323	sorin	18 KB	xml	
userguide.xpr								2 MB	xpr	

Figure 303: Working Copy View - Modified View Mode

-  **Incoming** - The resource tree presents only incoming changes.
-  **Outgoing** - The resource tree presents only outgoing changes.
-  **Conflicts** - The resource tree presents only conflicting changes (real conflicts and pseudo-conflicts).

The following columns provide information about the resources:

- **Name** - Resource name. Resource icons can have the following decorator icons:
 - Additional status information:
 -  **Propagated modification marker** - A folder marked with this icon indicates that the folder itself presents some changes (like modified properties) or a child resource has been modified.
 -  **External** - This indicates a mapping of a local directory to the URL of a versioned resource. It is declared with a `svn:externals` property in the parent folder and it indicates a working copy not directly related with the parent working copy that defines it.
 -  **Switched** - This indicates a resource that has been switched from the initial repository location to a new location within the same repository. The resource goes to this state as a result of [the Switch action](#) executed from the contextual menu of the Working Copy view.
 -  **Grayed** - A resource with a grayed-out icon, but no overlaid icon, is an ignored resource. It is obtained with the **Add to svn:ignore** action.
 - Current SVN depth of a folder:
 -  **Immediate children (immediates)** (a variant of [sparse checkout](#)) - The directory contains only direct file and folder children. Child folders ignore their content.
 -  **File children only (files)** (a variant of [sparse checkout](#)) - The directory contains only direct file children, disregarding any child folders.
 -  **This folder only (empty)** (a variant of [sparse checkout](#)) - The directory discards any child resource.



Note:

- Any folder not marked with one of the depth icons, has recursive depth (*infinity*) set by default (presents all levels of child resources).
 - Although folders not under version control can have no depth set, Oxygen XML Developer presents *unversioned* and *ignored* folders with *empty* depth when **Show unversioned directories content** or **Show ignored directories content** options are disabled.
 -  **Local file status** - Shows the changes of working copy resources that were not committed to the repository yet. The following icons are used to mark resource status:
 -  - Resource is *not under version control* (*unversioned*).
 -  - Resource is being *ignored* because it is not under version control and its name matches a file name pattern defined in one of the following places:
 - *global-ignores* section in the SVN client-side [config file](#).
-  **Attention:** If you do not explicitly set the `global-ignores` runtime configuration option - either to your preferred set of patterns or to an empty string - Subversion uses the default value.
- [Application global ignores option](#) of Oxygen XML Developer.
 - The value of a [svn:ignore property](#) set on the parent folder of the resource being ignored.

-  - Marks a newly created resource, *scheduled for addition* to the version control system.
-  - Marks a resource *scheduled for addition*, created by copying a resource already under version control and inheriting all its SVN history.
-  - The content of the resource has been *modified*.
-  - Resource has been *replaced* in your working copy (the file was scheduled for deletion, and then a new file with the same name was scheduled for addition in its place).
-  - Resource is *deleted*(scheduled for deletion from **Repository** upon the next commit).
-  - The resource is *incomplete* (as a result of an interrupted *check out* or *update* operation).
-  - The resource is *missing* because it was moved or deleted without using an SVN-aware application.
-  - The contents of the resource is in *real conflict state*.
-  - Resource is in a *name conflict* state.
-  - Resource is in *tree conflict* state after an update operation because:
 - Resource was locally modified and incoming deleted from repository.
 - Resource was locally scheduled for deletion and incoming modified.
-  - Resource is *obstructed* (versioned as one kind of object: file, directory, or symbolic link, but has been replaced outside Syncro SVN Client by a different kind of object).
-  **Local properties status** - Marks the resources that have SVN properties, with the following possible states:
 -  - The resource has SVN properties set.
 -  - The resource properties have been modified.
 -  - Properties for this resource are in *real conflict* with property updates received from the repository.
- **Revision** - The current revision number of the resource.
- **Date** - Date when the resource was last time modified on the disk.
- **BASE Revision** - The revision number of the pristine version of the resource.
- **BASE Date** - Date when the pristine version of the resource was last time committed in the repository.
- **Author** - Name of the person who made the last modification on the pristine version of the resource.
-  **Remote file status** - Shows changes of resources recently modified in the repository. The following icons are used to mark incoming resource status:
 -  - Resource is newly added in repository.
 -  - The content of the resource has been modified in repository.
 -  - Resource was replaced in repository.
 -  - Resource was deleted from repository.
-  **Remote properties status** - Resources marked with the  icon have incoming modified properties from the repository.
- **Remote revision** - Revision number of the resource latest committed modification.
- **Remote date** - Date of the resource latest modification committed on the repository.
- **Remote author** - Name of the author who committed the latest modification on the repository.
-  **Lock information** - Shows the lock state of a resource. The lock mechanism is a convention intended to help you signal other users that you are working with a particular set of files. It minimizes the time and effort wasted in solving possible conflicts generated by clashing commits. A lock gives you exclusive rights over a file, only if other users follow this convention and they do not try to bypass the lock state of a file.

A folder can be locked only by the SVN client application, completely transparent to the user, if an operation in progress was interrupted unexpectedly. As a result, folders affected by the operation are marked with the  symbol. To clear the locked state of a folder, use the **Clean up** action.



Note: Users can lock only files.

The following lock states are displayed:

- *no lock* - the file is not locked. This is the default state of a file in the SVN repository.
- *remotely locked* () - shown when:
 - Another user has locked the file in the repository.
 - The file was locked by the same user from another working copy.
 - The file was locked from the **Repositories** view.

If you try to commit a new revision of the file to the repository, the server does not allow you to bypass the file lock.



Note: To commit a new revision, you need to wait for the file to be unlocked. Ultimately, you might try to *break* or *steal* the lock, but this is not what other users expect. Use these actions carefully, especially when you are not the file lock owner.

- *locked* () - displayed after you have locked a file from the current working copy. Now you have exclusive rights over the corresponding file, being the only one who can commit changes to the file in the repository.



Note: Working copies keep track of their locked files, so the locks are presented between different sessions of the application. Synchronize your working copy with the repository to make sure that the locks are still valid (not *stolen* or *broken*).

- *stolen* () - a file already locked from your working copy is being locked by another user. Now the owner of the file lock is the user who stole the lock from you.
- *broken* () - a file already locked from your working copy is no longer locked in the repository (it was unlocked by another user).



Note: To remove the *stolen* or *broken* states from your working copy files, you have to **Update** them.

If one of your working copy files is locked, hover the mouse pointer over the lock icon to see more information:

- Lock type - current file lock state
- Owner - the name of the user who created the lock
- Date - the date when the user locked the file
- Expires on - date when the lock expires. Lock expiry policy is set in the repository options, on the server side
- Comment - the message attached when the file was locked
- **Size** - Resource size on disk
- **Type** - Contains the resource type or file extension



Note: The working copy table allows you to show or hide any of its columns and also to sort its contents by any of the displayed columns. The table header provides a contextual menu which allows you to customize the displayed information.

The toolbar contains the following options for switching to a different working copy:

- **List of Defined Working Copies** - A drop-down menu that contains all the working copies Oxygen XML Developer is aware of. When you select a different working copy from the list, the newly selected working copy content is scanned and displayed in the **Working Copy** view.
-  ( on Mac OS X) **Working Copies Manager** - Opens a dialog box that displays the working copies Oxygen XML Developer is aware of. In this dialog box, you can add existing working copies or remove those you no longer need. If you try to add a folder that is not a valid Subversion working copy, Oxygen XML Developer warns you that the selected directory is not under version control.



Note: Removing a working copy from this dialog box does NOT remove it from your file system; you will have to do that manually.

Working Copy Settings

The **Settings** button from the toolbar of the **Working Copy** view provides the following options:

- **Show unversioned directories content** - Displays the content of unversioned directories.



Note: If this option is disabled, it will be ignored for items that, after a synchronize, are reported as incoming from the repository. This applies for all working copy modes, except **All Files**.

- **Show ignored items** - Displays the ignored resource when **All Files** mode is selected.
- **Show ignored directories content** - Displays the content of ignored directories when **All Files** mode is selected.



Note: Although *ignored* items are not presented in the **Modified**, **Incoming**, and **Conflicts** modes, they will be if, after a synchronize, they are reported as incoming from the repository.

- **Show deleted items** - Displays the deleted resource when **All Files** mode is selected. All other modes always display deleted resources, disregarding this option.
- **Tree / Compressed / Flat** - Affect the way information is displayed inside the **Modified**, **Incoming**, **Outgoing**, and **Conflicts** view modes.
- **Configure columns** - Allows you to customize the structure of the **Working Copy** view data. This action opens the following dialog box:

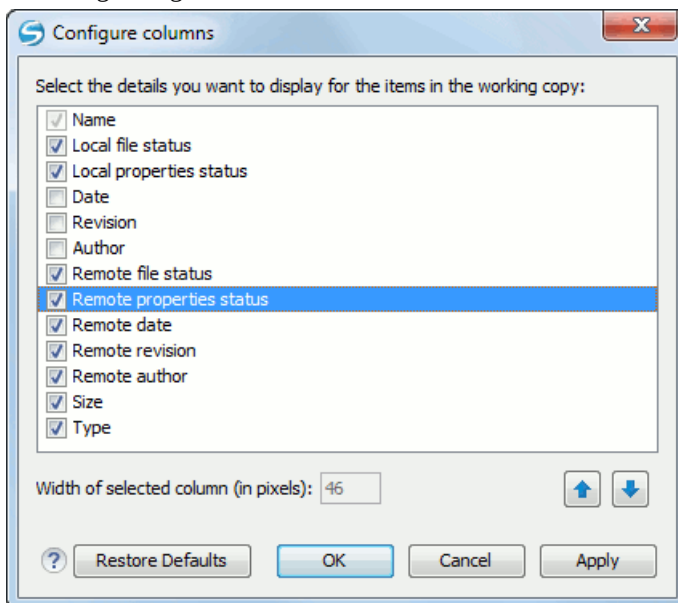


Figure 304: Configure Columns of Working Copy View

The order of the columns can be changed with the two arrow buttons. The column size can be edited in the **Width of selected column** field. The **Restore Defaults** button reverts all columns to the default order, width and enabled/disabled state from the installation of the application.

Working Copy Format

When an SVN working copy is loaded, Syncro SVN Client first checks the format of the working copy:

- If the format is older than SVN 1.7, you are prompted to upgrade it to SVN 1.8 in order to load it.
- If the format is 1.7, Syncro SVN Client takes into account the state of the [When loading an old format working copy](#) option.

To change how working copy formats are handled, [open the Preferences dialog box](#), go to **SVN > Working copy**, and configure the options in the [Administrative area](#) section.



Note:

- The format of the working copy can be downgraded or upgraded at any time with the **Upgrade** and **Downgrade** actions available in the **Tools** menu. These actions allow switching between SVN 1.7 and SVN 1.8 working copy formats.
- SVN 1.7 working copies cannot be downgraded to older formats.

Refresh a Working Copy

A refresh is a frequent operation triggered automatically when you switch between two working copies using the toolbar selector of the **Working Copy** view and when you switch between Oxygen XML Developer and other applications.

The **Working Copy** view features a fast refresh mechanism: the content is cached locally when loading the working copy for the first time. Later on, when the same working copy is displayed again, the application uses this cache to detect the changes between the cached content and the current content found on disk. The refresh operation is run on these changes only, thus improving the response time. improvement is noticeable especially when working with large working copies.

Working Copy View Contextual Menu Actions

The contextual menu in the **Working Copy** view contains the following actions:

Edit conflict (**Ctrl (Command on OS X) + E**)

Opens the **Compare** editor, allowing you to modify the content of the currently conflicting resources. For more information about editing conflicts, see [Edit conflicts](#).

Open in Compare Editor (**Ctrl (Command on OS X) + Alt + C**)

Displays changes made in the currently selected file.

Open (**Ctrl (Command on OS X) + O**)

Opens the selected resource from the working copy. Files are opened with an internal editor or an external application associated with that file type, while folders are opened with the default file system browsing application (Windows Explorer on Windows, Finder on OS X, etc).

Open with...

Submenu that allows you to open the selected resource either with Oxygen XML Developer or with another application.

Show in Explorer/Show in Finder

Opens the parent directory of the selected working copy file and selects the file.



Expand All (**Ctrl (Command on OS X) + Alt + X**)

Displays all descendants of the selected folder. The same behavior is obtained by double-clicking a collapsed folder.



Refresh (**F5**)

Re-scans the selected resources recursively and refreshes their status in the working copy view.



Synchronize (**Ctrl (Command on OS X) + Shift + S**)

Connects to the repository and determines the working copy and repository changes made to the selected resources. The application switches to **Modified** view mode if the [Always switch to 'Modified' mode](#) option is selected.

Update (**Ctrl (Command on OS X) + U**)

Updates the selected resources to the *HEAD* revision (latest modifications) from the repository. If the selection contains a directory, it will be updated depending on its depth.

Update to revision/depth

Allows you to update the selected resources from the working copy to an earlier revision from the repository. You can also select the update *depth* for the current folder. You can find out more about the *depth* term in the [sparse checkouts](#) section.

Commit

Collects the outgoing changes from the selected resources in the working copy and allows you to choose exactly what resources to commit. A directory will always be committed recursively. Unversioned resources will be deselected by default. In the **Commit** dialog box you can also enter a comment before sending your changes to the repository.



Revert (Ctrl (Command on OS X) + Shift + V)

Undoes all local changes for the selected resources. It does not contact the repository and the files are obtained from Apache Subversion™ pristine copy. It is enabled only for modified resources. See [Revert your changes](#) for more information.

Override and Update

Drops any outgoing change and replaces the local resource with the HEAD revision. This action is available on resources with outgoing changes, including conflicting ones. See the [Revert your changes](#) section.

Override and Commit

Drops any incoming changes and sends your local version of the resource to the repository. This action is available on conflicting resources. For more information see [Drop incoming modifications](#).



Mark Resolved (Ctrl (Command on OS X) + Shift + R)

Instructs the Subversion system that you resolved a conflicting resource. For more information, see [Merge conflicts](#).



Mark as Merged (Ctrl (Command on OS X) + Shift + M)

Instructs the Subversion system that you resolved the pseudo-conflict by merging the changes and you want to commit the resource. Read the [Merge conflicts](#) section for more information about how you can solve the pseudo-conflicts.



Create patch (Ctrl (Command on OS X) + Alt + P)

Allows you to create a file containing all the differences between two resources, based on the `svn diff` command. To read more about creating patches, see [the section about patches](#).

Compare with:

- **Latest from HEAD (Ctrl (Command on OS X) + Alt + H)** - Performs a 3-way diff operation between the selected file and the *HEAD* revision from the repository and displays the result in the **Compare view**. The common ancestor of the 3-way diff operation is the *BASE* version of the file from the local working copy.
- **BASE revision (Ctrl (Command on OS X) + Alt + C)** - Compares the working copy file with the BASE revision file (the so-called *pristine copy*).
- **Revision (Ctrl (Command on OS X) + Alt + R)** - Displays the **History view** that contains the log history of that resource.
- **Branch/Tag** - Opens the **Compare with Branch/Tag** dialog box that allows you to specify [another file from the repository](#) (**To URL** field) to compare with the working copy file. You can specify the revision of the repository file by choosing between **HEAD revision** or specific **Other revision**.



Tip: To compare with a file that was deleted, moved, or replaced, you need to specify the original URL (before the file was removed) and use a [peg revision](#) at the end (for example, `URL@rev1234`).

- **Each other** - Compares two selected files with each other.

These *compare* actions are enabled only if the selected resource is a file.

Replace with:

- **Latest from HEAD** - Replaces the selected resources with their versions from the *HEAD* revision of the repository.
- **BASE revision** - Replace the selected resources with their versions from the pristine copy (the BASE revision).



Note: In some cases it is impossible to replace the currently selected resources with their versions from the *BASE/HEAD* revision:

- For the **Replace with BASE revision** action, the resources being unversioned or added have no *BASE* revision, and thus cannot be replaced. However, they will be deleted if the action is invoked on a parent folder. The action will never work for missing folders or for obstructing files (folders being obstructed by a file), since you cannot recover a tree of folders
- For the **Replace with latest from HEAD** action, you must be aware that there are cases when resources will be completely deleted or reverted to the *BASE* revision and then updated to a *HEAD* revision to avoid conflicts. These cases are:
 - The resource is *unversioned*, *added*, *obstructed*, or *modified*.
 - The resource is affected by a `svn:ignore` or `svn:externals` property that is locally added on the parent folder and not yet committed to the repository.



Show History (**Ctrl (Command on OS X) + H**)

Displays the **History view** where the log history for the selected resource will be presented. For more details about resource history, see the sections about [the resource history view](#) and [requesting the history for a resource](#).



Show Annotation (**Ctrl Shift A (Meta Shift A on OS X)**)

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.



Revision Graph (**Ctrl (Command on OS X) + G**)

This action allows you to see the graphical representation history of a resource. For more details about the revision graph of resources, see [Revision Graph](#).

Copy URL Location (**Ctrl (Command on OS X) + Alt + U**)

Copies the encoded URL of the selected resource from the Working Copy to the clipboard.

Mark as copied

You can use this action to mark an item from the working copy as a copy of an other item under *version control*, when the copy operation was performed outside of an SVN client. The **Mark as copied** action is available when you select two items (both the new item and source item), and it depends on the state of the source item.

Mark as moved

You can use this action to mark an item from the working copy as being moved from another location of the working copy, when the move operation was performed outside of an SVN client. The **Mark as moved** action is available when you select two items from different locations (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

Mark as renamed

You can use this action to mark an item from the working copy as being renamed outside of an SVN client. The **Mark as renamed** action is available when you select two items from the same directory (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.



Copy to

Copies the currently selected resource to a specified location.

Move to **Ctrl M (Meta M on OS X)**

Moves the currently selected resource to a specified location.

Rename (**F2**)

As with the move command, a copy of the original resource will be made with the new name and the original will be marked as deleted. Note that you can only rename one resource at a time.



Delete (**Delete**)

Schedules selected items for deletion upon the next commit and removes them from the disk. Depending on the state of each item, you are prompted to confirm the operation.

New:**New File**

Creates a new file inside the selected folder. The newly created file will be added under version control only if the parent folder is already versioned.

New Folder (Ctrl (Command on OS X) + Shift + F)

Creates a child folder inside the selected folder. The newly created folder will be added under version control only if its parent is already versioned.

New External Folder (Ctrl (Command on OS X) + Shift + W)

This operation allows you to add a new external definition on the selected folder. An external definition is a mapping of a local directory to [a URL of a versioned directory](#), and ideally a particular revision, stored in the `svn:externals` property of the selected folder.



Tip: You can specify a particular revision of the external item by using a [peg revision](#) at the end of the URL (for example, `URL@rev1234`). You can also use peg revisions to access external items that were deleted, moved, or replaced.

The URL used in the external definition format can be relative. You can specify the repository URL that the external folder points to by using one of the following relative formats:

- `../` - Relative to the URL of the directory on which the `svn:externals` property is set.
- `^/` - Relative to the root of the repository in which the `svn:externals` property is versioned.
- `//` - Relative to the scheme of the URL of the directory on which the `svn:externals` property is set.
- `/` - Relative to the root URL of the server in which the `svn:externals` property is versioned.



Important: To change the target URL of an external definition, or to delete an external item, do the following:

1. Modify or delete the item definition found in the `svn:externals` property that is set on the parent folder.
2. For the change to take effect, use the **Update** operation on the parent folder of the external item.



Note: Syncro SVN Client does not support definitions of local relative external items.

Add to "svn:ignore" (Ctrl (Command on OS X) + Alt + I)

Allows you to add files that should not participate in the *version control* operations inside your working copy. This action can only be performed on resources not under *version control*. It actually modifies the value of the `svn:ignore` property in the parent directory of the resource. Read more about this in the [Ignore Resources Not Under Version Control](#) section.

**Add to version control (Ctrl (Command on OS X) + Alt + V)**

Allows you to add resources that are not under *version control*. For further details, see [Add Resources to Version Control](#) section.

Remove from version control

Schedules selected items for deletion from repository upon the next commit. The items are not removed from the file system after committing.

**Clean up (Ctrl (Command on OS X) + Shift + C)**

Performs a maintenance cleanup operation on the selected resources from the working copy. This operation removes the Subversion maintenance locks that were left behind. This is useful when you already know where the problem originated and want to fix it as quickly as possible. It is only active for resources under *version control*.

Locking:

- **Scan for locks (Ctrl (Command on OS X) + L)** - Contacts the repository and recursively obtains the list of locks for the selected resources. A dialog box containing the locked files and the lock description will be displayed. This is only active for resources under *version control*. For more details see [Scanning for locks](#).

-  **Lock (Ctrl (Command on OS X) + K)** - Allows you to lock certain files that need exclusive access. You can write a comment describing the reason for the lock and you can also force (*steal*) the lock. This action is active only on files under *version control*. For more details on the use of this action see [Locking a file](#).
-  **Unlock (Ctrl (Command on OS X) + Alt + K)** - Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

**Show SVN Properties (Ctrl P (Meta P on OS X))**

Brings up the [Properties view](#) and displays the SVN properties for the selected resource.

**Show SVN Information (Ctrl I (Meta I on OS X))**

Provides additional information for the selected resource from the working copy. For more details, go to [Obtain information for a resource](#).

Drag and Drop Operations

The structure of the files tree can be changed with drag and drop operations inside the **Working Copy** view. These operations behave in the same way with the **Copy to/Move to** operations.

Also, files and folders can be added to the file tree of the view as *unversioned* resources by drag and drop operations from other applications (for example from Windows Explorer or Mac OS X Finder). In this case, the items from the file system are only copied, without removing them from their original location.



Attention: When you drag items from the working copy to a different application, the performed operation is controlled by that application. This means that the moved items are left as *missing* in the working copy (items are moved in the file system only, but no SVN versioning meta-data is changed).

Assistant Actions

To ensure a continuous and productive work flow, when a view mode has no files to present, it offers a set of guiding actions with some possible paths to follow.

Initially, when there is no working copy configured the **All Files** view mode lists the following two actions:

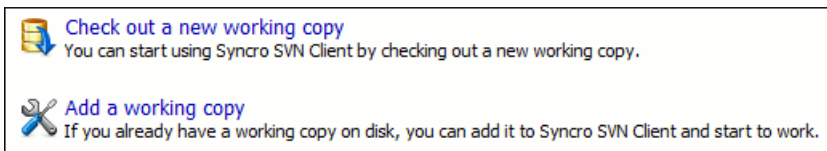


Figure 305: All Files Panel

For **Modified**, **Incoming**, **Outgoing**, **Conflicts** view modes, the following actions may be available, depending on the current working copy state in different contexts:

-  Information message - Informs you why there are no resources presented in the currently selected view mode.
-  **Synchronize with Repository** - Available only when there is nothing to present in the **Modified** and **Incoming** view modes.
-  **Switch to Incoming** - Selects the **Incoming** view mode.
-  **Switch to Outgoing** - Selects the **Outgoing** view mode.
-  **Switch to Conflicts** - Selects the **Conflicts** view mode.
-  **Show all changes/incoming/outgoing/conflicts** - Depending on the currently selected view mode, this action presents the corresponding resources after a synchronize operation was executed only on a part of the working copy resources.

History View

In Apache Subversion™, both files and directories are versioned and have a history. If you want to examine the history for a selected resource and find out what happened at a certain revision you can use the **History view** that can be accessed from [Repositories view](#), [Working Copy view](#), [Revision Graph](#), or [Directory Change Set view](#). From the **Working copy view** you can display the history of local versioned resources.

The view consists of four distinct areas:

- The table showing details about each revision, like: revision number, commit date and time, number of changes (more details available in the tooltip), author's name, and a fragment of the commit message.

Some revisions may be highlighted to emphasize:

- The current revision of the resource for which the history is displayed - a bold font revision.
- The last revision in which the content or properties of the resource were modified - blue font revision.



Note: Both font highlights may be applied for the same revision.

- The complete commit message for the selected revision.
- A tree structure showing the folders where the modified resources are located. You can compress this structure to a more compact form that focuses on the folders that contain the actual modifications.
- The list of resources modified in the selected revision. For each resource, the type of action done against it is marked with one of the following symbols:
 - - A newly created resource.
 - - A newly created resource, copied from another repository location.
 - - The content/properties of the resource were *modified*.
 - - Resource was *replaced* in the repository.
 - - Resource was deleted from the repository.

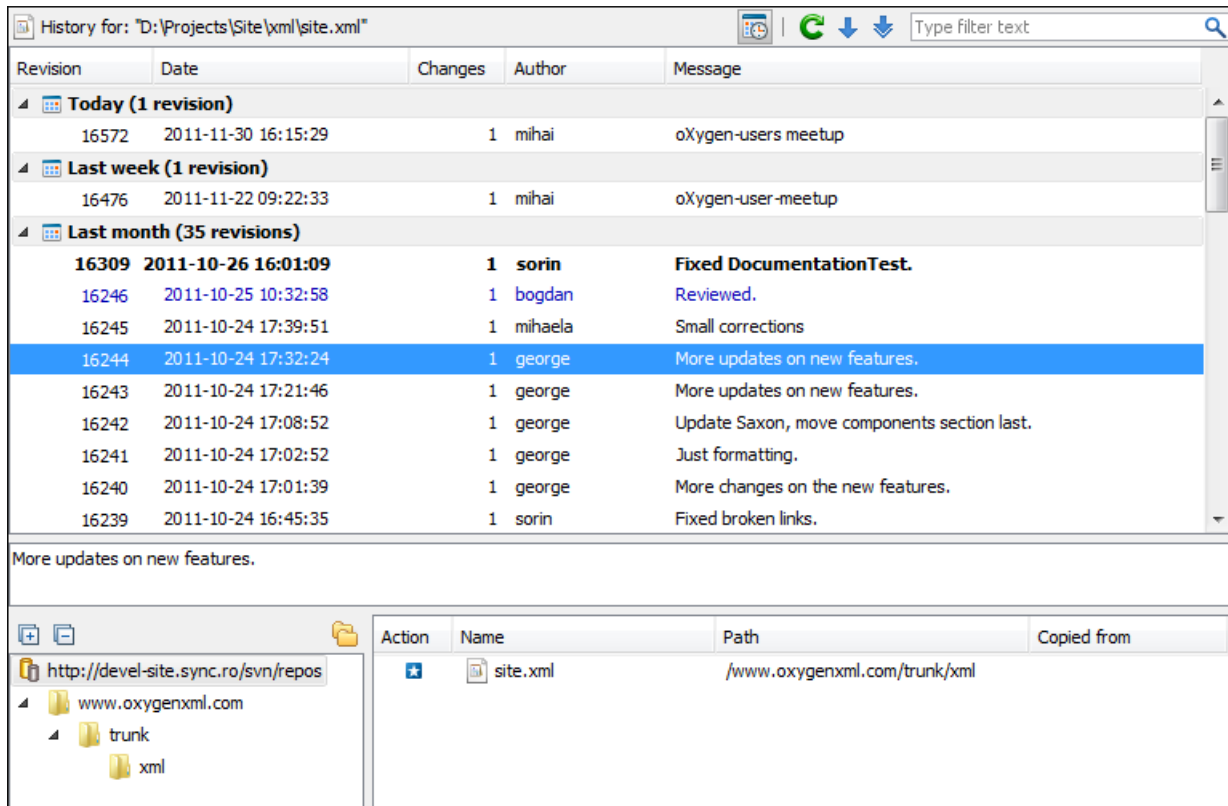


Figure 306: History View

You can group revisions in predefined time frames (today, yesterday, this week, this month), by pressing the  **Group by date** button from the toolbar.

The History Filter Dialog Box

The **History view** does not always show all the changes ever made to a resource because there may be thousands of changes and retrieving the entire list can take a long time. Normally you are interested in the more recent ones. That is why you can specify the criteria for the revisions displayed in the **History view** by selecting one of several options presented in the **History** dialog box that is displayed when you invoke the **Show History** action.

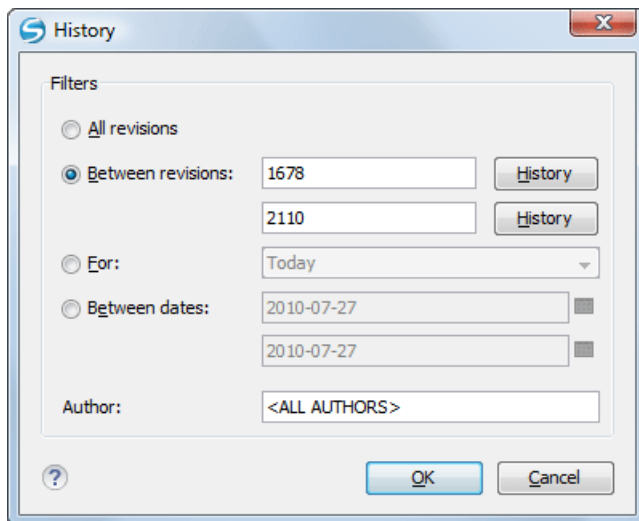


Figure 307: History Filters Dialog Box

Options for the set of revisions presented in the History view are:

- All revisions of the selected resource.
- Only revisions between a start revision number and an end revision number.
- Only revisions added in a period of time (such as today, last week, last month, etc.)
- Only revisions between a start and an end date.
- Only revisions committed by a specified SVN user.

The toolbar of the **History view** has two buttons for extending the set of revisions presented in the view: **Get next 50** and **Get all**.

The History Filter Field

When only the history entries which contain a specified substring need to be displayed in the **History view** the filter field displayed at the top of this view is the perfect fit. Just enter the search string in the field next to the label **Find**. Only the items with an author name, commit message, revision number or date which match the search string are kept in the **History view**. The filter action is executed and the content of the table is updated when the button  **Search** is pressed.

History View Contextual Menu Actions

The **History** view contains the following contextual menu actions:

Compare with working copy

Compares the selected revision with your working copy file. It is enabled only when you select a file.

Open

Opens the selected revision of the file into the Editor. This is enabled only for files.

Open with

Displays the **Open with** dialog box to specify the editor in which the selected file will be opened.

Get Contents

Replaces the current version from the working copy with the contents of the selected revision from the history of the file. The *BASE* version of the file is not changed in the working copy so that after this action the file will appear as modified in a synchronization operation, that is newer than the *BASE* version, even if the contents is from an older version from history.

Save as

Allows you to save the contents of a file as it was committed at a certain revision. This option is available only when you access the history of a file.

Copy to

Copies to the repository the item whose history is displayed, using the selected revision. This option is active only when presenting the history for a repository item (URL).



Note: This action can be used to resurrect deleted items also.

Revert changes from this revision

Reverts changes that were made in the selected revisions. The changes are reverted only in your working copy and does not affect the repository items. It does not replace your working copy items with those from the selected revisions. This action is enabled when the resource history was launched for a local working copy resource.



Note: For items displayed in the **Affected Paths** section that were *added*, *deleted*, or *replaced*, this action has no effect because such changes are considered to be changes to the parent directory. To revert these type of changes, follow these steps:

1. Request the history for the parent directory.
2. Identify the revision that contains the changes you want to revert.
3. Invoke the action on that revision.



Warning: There are instances where the SVN Client is not able to identify the corresponding working copy item for the selected item in the **Affected Paths** section. In this case, the action does not proceed and an error message is displayed. For example, the selected item in the **Affected Paths** section is from a different repository location than the working copy item for which the history is displayed.

Update to revision

Updates your working copy resource to the selected revision. This is useful if you want your working copy to reflect a time in the past. It is best to update a whole directory in your working copy, not just one file, otherwise your working copy is inconsistent and you are unable to commit your changes.



Check out

Checks out a new working copy of the directory for which the history is presented, from the selected revision.

Export

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.



Show Annotation (**Ctrl Shift A** (**Meta Shift A** on OS X))

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.

Change

Allows you to change commit data for a file:

- *Author* - Changes the name of the SVN user that committed the selected revision.
- *Message* - Changes the commit message of the selected revision.

When two resources are selected in the **History** view, the contextual menu contains the following actions:

Compare revisions

When the resource is a file, the action compares the two selected revisions using the **Compare** view. When the resource is a folder, the action displays the set of all resources from that folder that were changed between the two revision numbers.

Revert changes from these revisions

Similar to the `svn merge` command, it merges two selected revisions into the working copy resource. This action is only enabled when the resource history was requested for a working copy item.

For more information about the **History view** and its features, see the [Request history for a resource](#) and [Using the resource history view](#) sections.

Directory Change Set View

The result of comparing two reference revisions from the history of a folder resource is a set with all the resources changed between the two revision numbers. The changed resources can be contained in the folder or in a subfolder of that folder. These resources are presented in a tree format. For each changed resource all the revisions committed between the two reference revision numbers are presented.

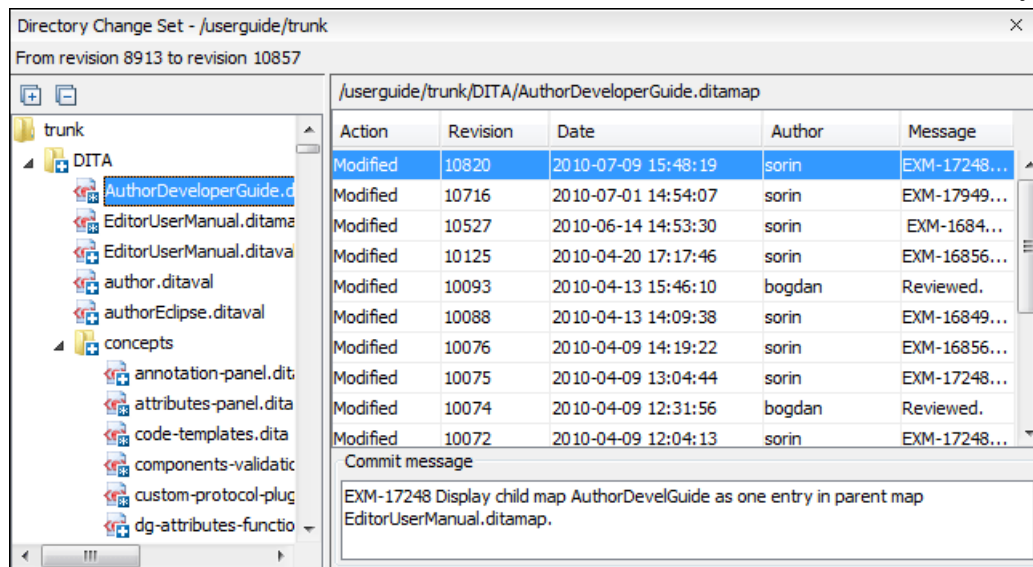


Figure 308: Directory Change Set View

The set of changed resources displayed in the tree is obtained by running the action **Compare revisions** available on the contextual menu of the **History** view when two revisions of a folder resource are selected in the **History** view.

The left side panel of the view contains the tree hierarchy with the names of all the changed resources between the two reference revision numbers. The right side panel presents the list with all the revisions of the resource selected in the left side tree. These revisions were committed between the two reference revision numbers. Selecting one revision in the list displays the commit message of that revision in the bottom area of the right side panel.

Double-clicking a file listed in the left-side tree performs a diff operation between the two revisions of the file corresponding to the two reference revisions. Double-clicking one of the revisions displayed in the right side list of the view performs a diff operation between that revision and the previous one of the same file.

The contextual menu of the right side list contains the following actions:

Compare with previous version

Performs a diff operation between the selected revision in the list and the previous one.

Open

Opens the selected revision in the associated editor type.

Open with

Displays a dialog box with the available editor types and allows you to select the editor type for opening the selected revision.

Save as

Saves the selected file as it was in the selected revision.

Copy to

Copies to the repository the item whose history is displayed, using the selected revision.



Note: This action can be used to resurrect deleted items also.



Check out

Checks out a new working copy of the selected directory, from the selected revision.

Export

Opens the [Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

 Show Annotation (Ctrl Shift A (Meta Shift A on OS X))

Opens the **Show Annotation** dialog box that computes *the annotations for a file and displays them in the Annotations view*, along with the history of the file in the **History** view.

 Show SVN Information (Ctrl (Command on OS X) + I)

Provides additional information for a selected resource. For more details, go to *Obtain information for a resource*.

The Editor Panel of SVN Client

You can open a file for editing in an internal built-in editor. There are default associations between frequently used file types and the internal editors in *the File Types preferences panel*.

The internal editor can be accessed either from the *Working copy view* or from the *History view*. No actions that modify the content are allowed when the editor is opened with a revision from history.

Only one file at a time can be edited in an internal editor. If you try to open another file it will be opened in the same editor window. The editor provides syntax highlighting for known file types. This means that a different color will be used for each recognized token type found in the file. If the file's content type is unknown you will be prompted to choose the proper way the file should be opened.

After editing the content of the file in an internal editor you can save it to disk by using the **Save** action from the *File* menu or the **Ctrl S (Meta S on OS X)** key shortcut. After saving your file you can see the file changed status in *the Working Copy view*.

If the internal editor associated with a file type is not the XML Editor, then the encoding set in *the preferences for Encoding for non XML files* is used for opening and saving a file of that type. This is necessary because in the case of XML files, the encoding is usually declared at the beginning of the XML file in a special declaration or it assumes the default value UTF-8, but in the case of non-XML files, there is no standard mechanism for declaring the encoding for the file.

Annotations View

Sometimes you need to know not only what was changed in a file, but also who made those changes. This view displays the revision and the author that changed every line in a file. Just click a line in the editor panel where the file is opened to see the revision in which the line was last modified. The same revision is highlighted in the **History view** and you can also see all the lines that were changed in the same revision highlighted in the editor panel. Also, the entries of the **Annotations view** corresponding to that revision are highlighted. Therefore, the **Annotations view**, **History view**, and annotations editor panel are all synchronized. Clicking a line in one of them highlights the corresponding lines in the other two.

History for: "D:\...\xml\site.xml"

Revision	Date	Changes	Author	Message
16476	2011-11-22 09:22:33	1	mihai	oXygen-user-meetup
16309	2011-10-26 16:01:09	1	sorin	Fixed DocumentationTest.
16246	2011-10-25 10:32:58	1	bogdan	Reviewed.
16245	2011-10-24 17:39:51	1	mihaela	Small corrections
16244	2011-10-24 17:32:24	1	george	More updates on new features.

oXygen-users meetup

Action	Name	Path	Copied from
+	site.xml	/www.oxygenxml.com/trunk/xml	

http://devel-site.sync.ro/svn/repos/www.oxygenxml.com/trunk/xml/site.xml:Revision 16247

```

185 <title>About <product/>
186 </title>
187 <section id="index" title="oXygen XML Editor home page" priority="1.0">
188   <title>XML Editor - <lt;oXygen/></title>
189   <menutitle>Home</menutitle>
190   <description><product/> XML Editor is a cross platform XML Editor providing to
191     authoring, XML conversion, XSL, XSLT, XQuery, XML Schema, DTD, Relax NG an
192     Schematron development, SOAP and WSDL.</description>
193 </slide>

```

Annotations View

- mihai 7285 (18 Lines)
- mihai 7448 (1 Line)
- mihai 7285 (126 Lines)
- mihai 7325 (6 Lines)
- mihai 7285 (36 Lines)
- mihai 7448 (1 Line)
- mihai 7285 (1 Line)
- mihai 7325 (1 Line)
- mihai 7418 (1 Line)
- mihai 7285 (68 Lines)
- mihai 7418 (1 Line)
- mihai 7285 (9 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (4 Lines)
- mihai 7321 (4 Lines)
- mihai 7285 (3 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (4 Lines)
- mihai 7321 (5 Lines)
- mihai 7285 (5 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (6 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (7 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (10 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (6 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (7 Lines)
- mihai 7321 (1 Line)
- mihai 7285 (7 Lines)

Figure 309: The Annotations View

The annotations of a file are computed with the **Show Annotation** action, which is available in the **History** menu, and from the contextual menu of the following views: *the Repositories view*, *Working copy view*, *History view*, and *Directory Change Set view*.

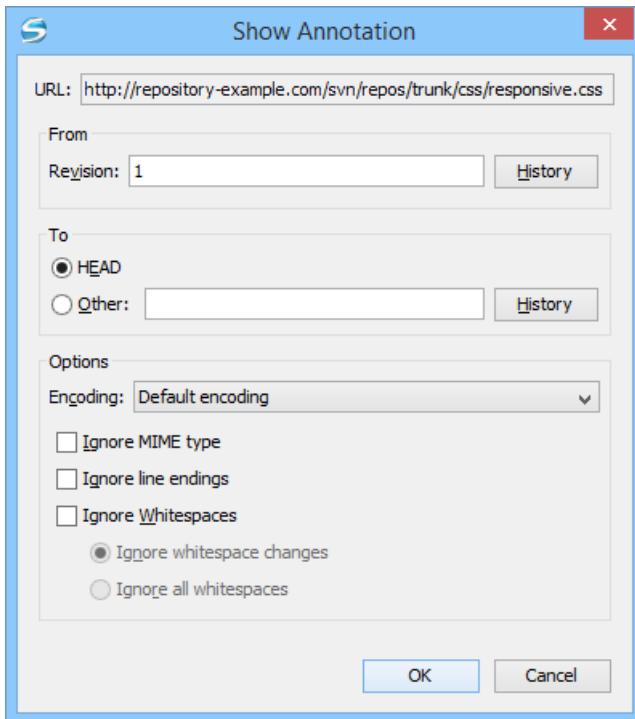


Figure 310: The Show Annotation Options Dialog Box

The following options can be configured in the **Show Annotation** dialog box:

From Revision Section

Select the revision from which to start computing the annotation. If you press the **History** button, [the History dialog box](#) is displayed, which allows you to select a revision.

To Revision Section

Select the ending revision by choosing between the **HEAD** revision or specify it in the **Other** text box . If you press the **History** button, [the History dialog box](#) is displayed, which allows you to select a revision.

Encoding

Select the encoding to be used when the annotation is computed. For each line of text, the SVN Client looks through the history of the file to be annotated see when it was last modified, and by whom. It is required that it is in the form of a text file. Therefore, encoding is needed to properly decode and read the file content. By default, the encoding of the operating system is used.

Ignore MIME type

If enabled, the file is treated as a text file and ignores what the SVN system infers from the `svn:mime-type` property.

Ignore line endings

If enabled, the differences in line endings are ignored when the annotation is computed.

Ignore whitespaces

If enabled, it allows you to specify how the whitespace changes should be handled. When enabled, you can then choose between two options:

- **Ignore whitespace changes** - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).



Note: Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.

- **Ignore all whitespaces** - Ignores all types of whitespace changes.



Tip: Enabling any of these *ignore* options can help you better determine the last time a meaningful change was made to a given line of text.

After you configure the options and press **OK**, the annotations will be computed and the **Annotations** view is displayed, where all the users that modified the selected resource will be presented, along with the specific lines and revision numbers modified by each user.



Note: If the file has a very long history, the computation of the annotation data can take a long time to process.

Compare View

In the Oxygen XML Developer there are three types of files that can be checked for differences: text files, image files and binary files. For the text files and image files you can use the built-in **Compare** view.

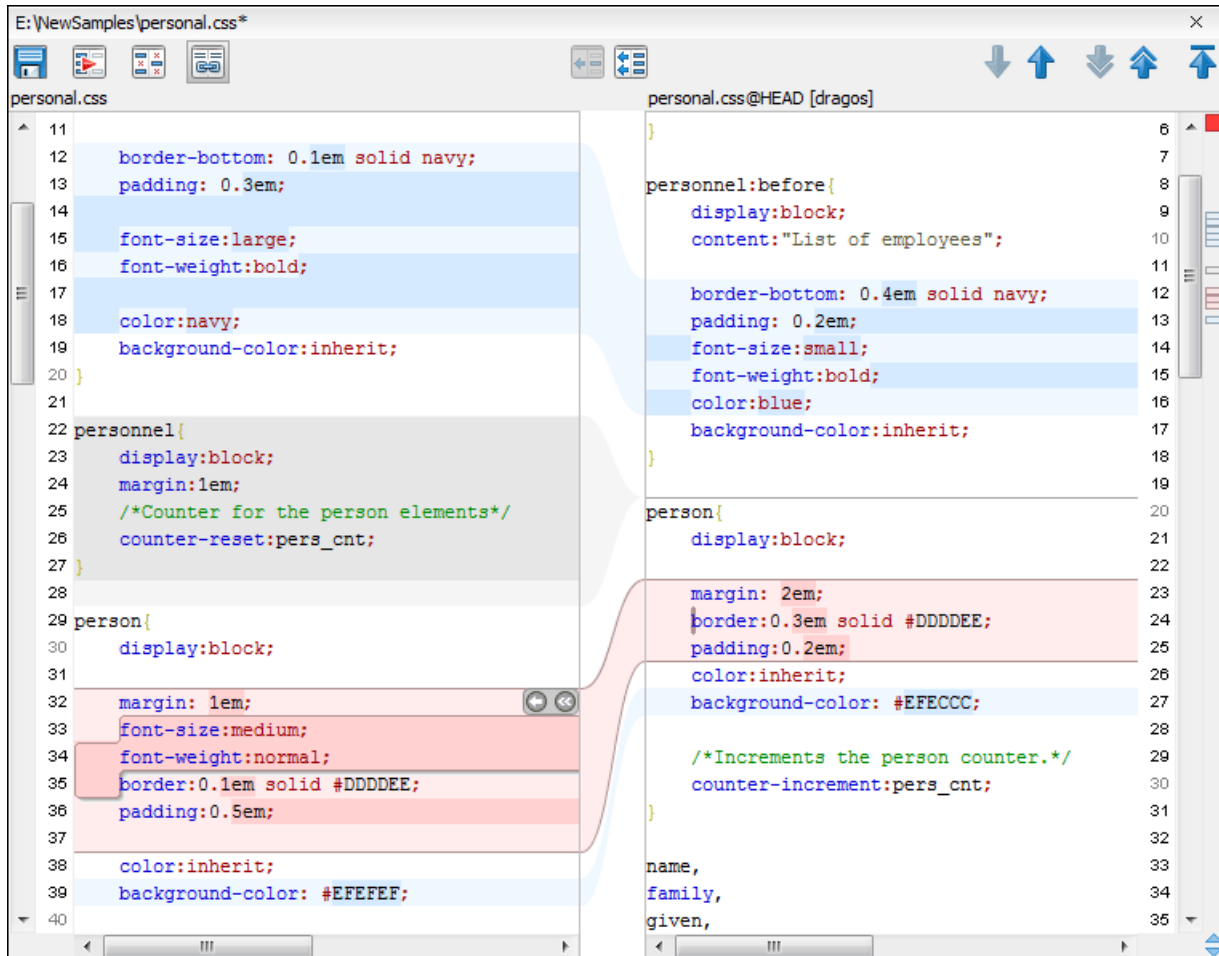


Figure 311: Compare View

At the top of each of the two editors, there are presented the name of the opened file, the corresponding SVN revision number (for remote resources) and the author who committed the associated revision.

When comparing text, the differences are computed using a *line differencing algorithm*. The view can be used to show the differences between two files in the following cases:

- after obtaining the outgoing status of a file with a **Refresh** operation, the view can be used to show the differences between your working file and the pristine copy. In this way you can find out what changes you will be committing;
- after obtaining the incoming and outgoing status of the file with the **Synchronize** operation, you can examine the exact differences between your local file and the *HEAD* revision file;

- you can use the **Compare view** from the **History view** to compare the local file and a selected revision or compare two revisions of the same file.

The Compare view contains two editors. Edits are allowed only in the left editor and only when it contains the working copy file. To learn more about how the view can be used in the day by day work see [View differences](#).

Compare View Toolbar

The list of actions available in the **Compare** view toolbar include:



Save action

Saves the content of the left editor when it can be edited.



Perform Files Differencing

Performs a comparison between the source file and target file.



Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



Synchronized scrolling

Synchronizes scrolling so that a selected difference can be seen on both sides of the application window. This action enables/disables the previously described behavior.



Format and Indent Both Files (**Ctrl Shift P (Meta Shift P on OS X)**)

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.



Next Block of Changes (**Ctrl Period (Meta Period on OS X)**)

Jumps to the next block of changes. This action is disabled when the cursor is positioned on the last change block or when there are no changes.



Note: A change block groups one or more consecutive lines that contain at least one change.



Copy Change from Right to Left

Copies the selected difference from the target file in the right side to the source file in the left side.



Copy All Changes from Right to Left

Copies all changes from the target file in the right side to the source file in the left side.



Previous Block of Changes (**Ctrl Comma (Meta Comma on OS X)**)

Jumps to the previous block of changes. This action is disabled when the cursor is positioned on the first change block or when there are no changes.



Next Change (**Ctrl Shift Period (Meta Shift Period on OS X)**)

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is disabled when the cursor is positioned on the last change or when there are no changes.



Previous Change (**Ctrl Shift Comma (Meta Shift M on OS X)**)

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is disabled when the cursor is positioned on the first change or when there are no changes.



First Change (**Ctrl B (Meta B on OS X)**)

Jumps to the first change.

Most of these actions are also available from the [Compare](#) menu.

Image Preview

You can view your local files by using the built-in **Image preview** component. The view can be accessed from the [Working copy view](#) or from the [Repository view](#). It can also be used from the [History view](#) to view a selected revision of a image file.

Only one image file can be opened at a time. If an image file is opened in the *Image preview* and you try to open another one it will be opened in the same window. Supported image types are *GIF*, *JPEG/JPG*, *PNG*, *BMP*. Once the image is displayed in the **Image preview** panel using the actions from the contextual menu one can scale the image at its original size (**1:1** action) or scale it down to fit in the view's available area (**Scale to fit** action).

Compare Images View

The images are compared using the Compare images view. The images are presented in the left and right part of the view, scaled to fit the view's available area. You can use the contextual menu actions to scale the images at their original size or scale them down to fit the view's available area.

The supported image types are: *GIF*, *JPG / JPEG*, *PNG*, *BMP*.

Properties View

The properties view presents Apache Subversion™ properties for the currently selected resource from either the **Working Copy** view or the **Repositories** view.

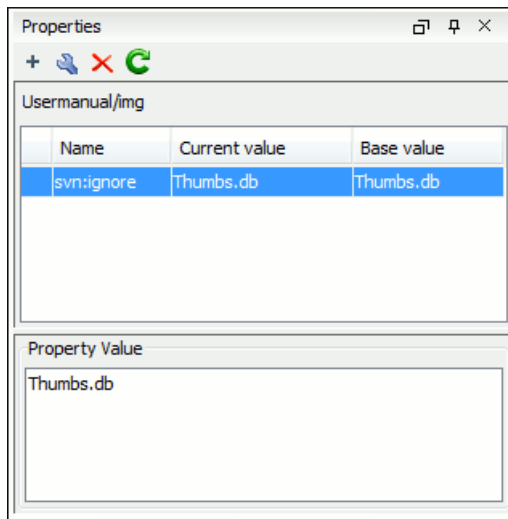


Figure 312: The Properties View

Above the table it is specified the currently active resource for which the properties are presented. Here you will also find a warning when an unversioned resource is selected.

The table in which the properties are presented has four columns:

- **State** - can be one of:
 - (empty) - normal unmodified property, same current and base values;
 - *(asterisk) - modified property, current and base values are different;
 - +(plus sign) - new property;
 - -(minus sign) - removed property.
- **Name** - the property name.
- **Current value** - the current value of the property.
- **Base value** - the base(original) value of the property.

The svn:externals Property

The `svn:externals` property can be set on a folder or a file. In the first case it stores *the URL of a folder from other repository*.

In the second case it stores the URL of a file from other repository. The external file will be added into the working copy as a versioned item. There are a few differences between directory and file externals:

- The path to the file external must be in a working copy that is already checked out. While directory externals can place the external directory at any depth and it will create any intermediate directories, file externals must be placed into a working copy that is already checked out.
- The external file URL must be in the same repository as the URL that the file external will be inserted into; inter-repository file externals are not supported.
- While commits do not descend into a directory external, a commit in a directory containing a file external will commit any modifications to the file external.

The differences between a normal versioned file and a file external:

- File externals cannot be moved or deleted; the `svn:externals` property must be modified instead; however, file externals can be copied.

A file external is displayed as a X in the switched status column.

Toolbar / Contextual Menu

The properties view toolbar and contextual menu contain the following actions:

-  **Add a new property** - This button invokes the *Add property* dialog box in which you can specify the property name and value.
-  **Edit property** - This button invokes the *Edit property* dialog box in which you can change the property value and also see its original(base) value.
-  **Remove property** - This button will prompt a dialog box to confirm the property deletion. You can also specify if you want to remove the property recursively.
-  **Refresh** - This action will refresh the properties for the current resource.

Console View

The **Console View** shows the traces of all the actions performed by the application. Part of the displayed messages mirror the communication between the application and the Apache Subversion™ server. The output is expressed as subcommands to the Subversion server and simulates the Subversion command-line notation. For a detailed description of the Subversion console output read the **SVN User Manual**.

The view has a simple layout, with most of its space occupied by a message area. On its right side, there is a toolbar holding the following buttons:

Clear

Erases all the displayed messages.



Lock scroll

Disables the automatic scrolling when new messages are appended in the view.

The maximum number of lines displayed in the console (length of the buffer) can be modified in the [Preferences](#) page. By default this value is set to 100.

Dynamic Help View

Dynamic Help view is a help window that changes its content to display the help section that is specific to the currently selected view. As you change the focused view, you are able to read a short description of it and its functionality.

The Revision Graph of a SVN Resource

The history of a SVN resource can be watched on a graphical representation of all the revisions of that resource together with the tags in which the resource was included. The graphical representation is identical to a tree structure and very easy to follow.

The graphical representation of a resource history is invoked with the  **Revision graph** action available on the right click menu of a SVN resource in *the Working Copy view* and *the Repository view*.

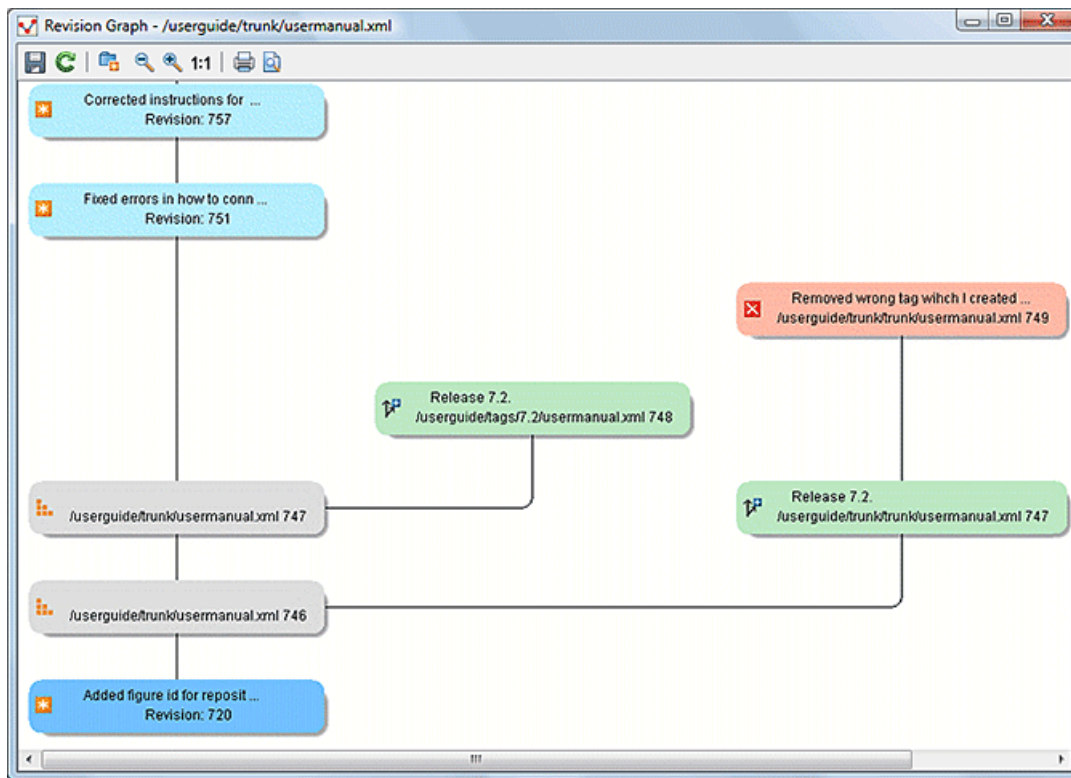


Figure 313: The Revision Graph of a File Resource

In every node of the revision graph an icon and the background color represent the type of operation that created the revision represented in that node. Also the commit message associated with that revision, the repository path and the revision number are contained in the node. The tooltip displayed when the mouse pointer hovers over a node specifies the URL of the resource, the SVN user who created the revision of that node, the revision number, the date of creation, the commit message, the modification type and *the affected paths*.

The types of nodes used in the graph are:

Added resource

The  icon for a new resource added to the repository and a green background.

Copied resource

The  icon for a resource copied to other location, for example when a SVN tag is created and a green background.

Modified resource

The  icon for a modified resource and a blue background.

Deleted resource

The  icon for a resource deleted from the repository and a red background.

Replaced resource

The  icon for a resource removed and replaced with another one on the repository and a orange background.

Indirect resource

The  icon for a revision from where the resource was copied or an indirectly modified resource, that is a directory in which a resource was modified and a gray background. The *Modification type* field of the tooltip specifies how that revision was obtained in the history of the resource.

A directory resource is represented with two types of graphs:

simplified graph

Lists only the changes applied directly to the directory;

complete graph

Lists also the indirect changes of the directory resource, that is the changes applied to the resources contained in the directory.

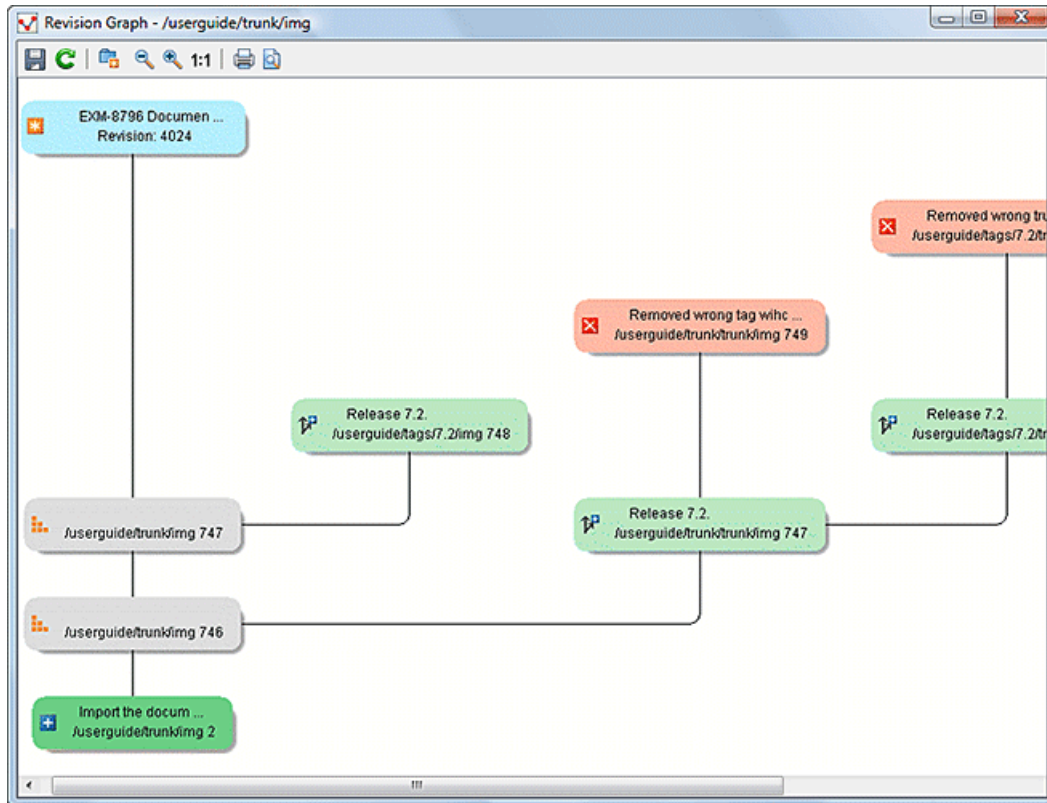


Figure 314: The Revision Graph of a Directory (Direct Changes)

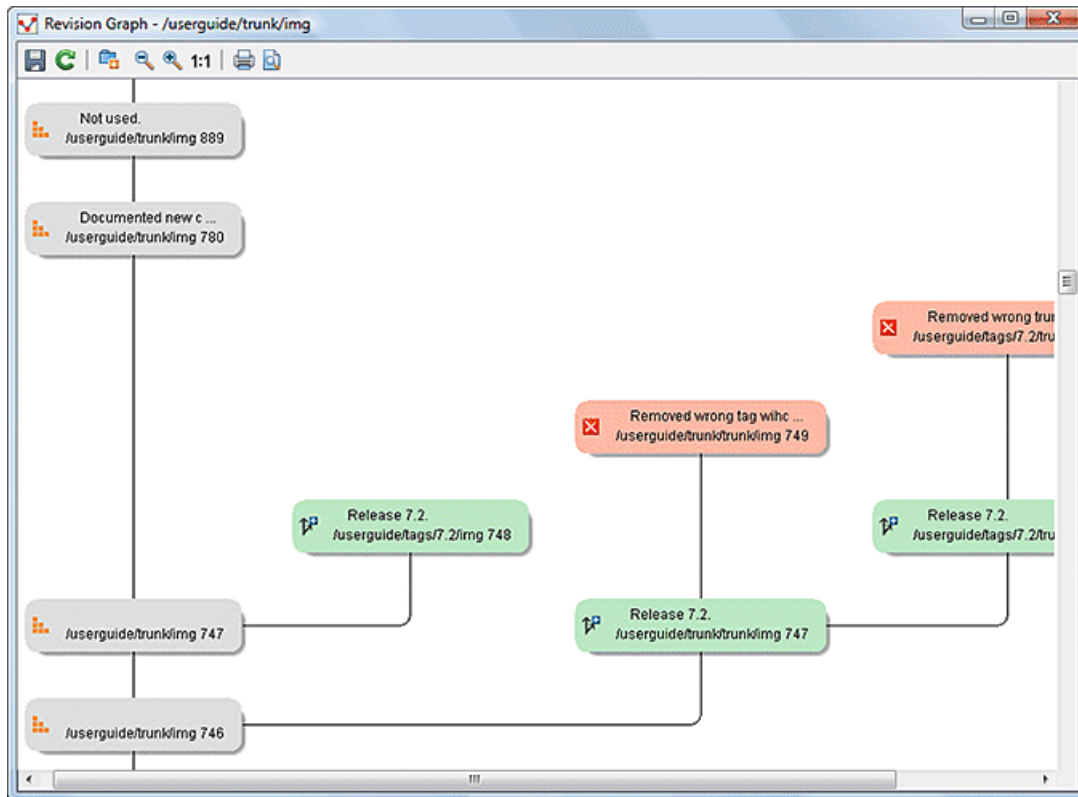


Figure 315: The Revision Graph of a Directory (Also Indirect Changes)

The **Revision graph** toolbar contains the following actions:

 Save as image

Saves the graphical representation as image. For a large revision graph you have to [set more memory in the startup script](#). The default memory size is not enough when there are more than 100 revisions that are included in the graph.

 Show/Hide indirect modifications

Switches between simplified and complete graph.

 Zoom In

Zooms in the graph.

 Zoom Out

Zooms out the graph. When the font reaches its minimum size, the graph nodes will display only the icons, leading to a very compact representation of the graph.

1:1 Reset scale

Resets the graphical scale to a default setting.

 Print

Prints the graph.

 Print preview

Offers a preview of the graph to allow you to check the information to be printed.

The contextual menu of any of the graph nodes contains the following actions:

Open

Opens the selected revision in the editor panel. Available only for files.

Open with

Opens the selected revision in the editor panel. Available only for files.

Save as

Saves the file for which the revision graph was generated, based on the selected node revision.

Copy to

Copies to the repository the item whose revision graph is displayed, using the selected revision.



Note: This action can be used to resurrect deleted items also.

Compare with HEAD

Compares the selected revision with the HEAD revision and displays the result in the diff panel. Available only for files.

**Show History**

Displays the history of the resource in [the History view](#). Available for both files and directories.

**Check out**

[Checks out](#) the selected revision of the directory. Available only for directories.

Export

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

When two nodes are selected in the revision graph of a file the right click menu of this selection contains only the **Compare** for comparing the two revisions corresponding to the selected nodes. If the resource for which the revision graph was built is a folder then the right click menu displayed for a two nodes selection also contains the **Compare** action but it computes the differences between the two selected revisions as a set of directory changes. The result is displayed in the [Directory Change Set](#) view.

**Attention:**

Generating the revision graph of a resource with many revisions may be a slow operation. You should enable caching for revision graph actions so that future actions on the same repository will not request the same data again from the SVN server which will finish the operation much faster.

Oxygen XML Developer SVN Preferences

The options used in the SVN client are saved and loaded independently from the Oxygen XML Developer options. However, if Oxygen XML Developer cannot determine a set of SVN options to be loaded at startup, some of the preferences are imported from the XML Editor options (such as the License key and HTTP Proxy settings).

There is also an additional set of preferences applied to the SVN client that are set in global SVN files. There are two editing actions available in the **Global Runtime Configuration** submenu of the **Options** menu. These actions, **Edit 'config' file** and **Edit 'servers' file**, contain parameters that act as defaults applied to all the SVN client tools that are used by the same user on their login account.

Entering Local Paths and URLs

The Oxygen XML Developer includes a variety of option configuration pages or wizards that contain text boxes where you specify paths to local resources or URLs of items inside remote repositories. The Oxygen XML Developer provides support in these text boxes to make it easier to specify these paths and URLs.

Local Item Paths

The text boxes used for specifying local item paths support the following:

- *Absolute Paths* - In most cases, the Oxygen XML Developer expects absolute paths for local file system items.
- *Relative Paths* - The Oxygen XML Developer only accepts relative paths in the form `~/...`, where `~` is the user home directory.
- *Path Validation* - Oxygen XML Developer validates the path as you type and invalid text becomes red.

- *Drag and Drop* - You can drag files and folders from the file system or other applications and drop them into the text box.
- *Automatic Use of Clipboard Data* - If the text box is empty when its dialog box is opened, any data that is available in the system clipboard is used, provided that it is valid for that text box.

Repository Item URLs

- *Local Repository Paths* - You can use local paths (absolute or relative) to access local repositories. When you use the **Browse** button, the Oxygen XML Developer will convert the file path to a `file://` form of URL, provided that the location is a real repository.
 - *Absolute Paths* - In most cases, the Oxygen XML Developer expects absolute paths for local file system items.
 - *Relative Paths* - The Oxygen XML Developer only accepts relative paths in the form `~/...`, where `~` is the user home directory.
- *Peg Revisions* - For URL text boxes found inside dialog boxes where you are pulling information from the repository, you can [use peg revisions at the end of the URLs](#) (for example, `URL@rev1234`).



Note: If you try to use a *peg revision* number in a dialog box where you are sending information to the repository then the peg revision number will become part of the name of the item rather than searching for the specified revision. For example, in the URL `http://host/path/inside/repo/item@100`, the item name is considered to be `item@100`.



Tip: You can even use *peg revisions* with local repository paths. For example, `C:\path\to\local\repo@100` will be converted to `file:///C:/path/to/local/repo@100` and the **Repository browser** will display the content of the local repository as it is at revision 100.

- *URL Validation* - Oxygen XML Developer validates the URLs as you type and invalid text becomes red. Even paths to local repositories are not accepted unless using the **Browse** button to convert them to valid URLs.
- *Drag and Drop* - You can drag URLs from other applications or text editors and drop them into the URL text box. You can also drag folders that point to local repositories, from the local file system or from other applications, and they are automatically converted to valid `file://` type URLs.
- *Automatic Use of Clipboard Data* - If the URL text box is empty when its dialog box is opened, any data that is available in the system clipboard is used, provided that it is valid for that text box. Even valid local paths will be automatically converted to `file://` type URLs.



Note: The text boxes that are in the form of a combo box also allow you to select previously used URLs, or URLs defined in the **Repositories** view.

Technical Issues

This section contains special technical issues found during the use of Syncro SVN Client.

Authentication Certificates Not Saved

If Syncro SVN Client prompts you to enter the authentication certificate, although you already provided it in a previous session, then you should make sure that your local machine user account has the necessary rights to store certificate files in the *Subversion* configuration folder (write access to *Subversion* folder and all its subfolders). Usually, it is located in the following locations:

- Windows: `[HOME_DIR]\AppData\Roaming\Subversion`
- Mac OS X and Linux: `[HOME_DIR]/.subversion`

Updating Newly Added Resources

When you want to get from the repository a resource which is part of a newly created structure of folders, you need to also get its parent folders.

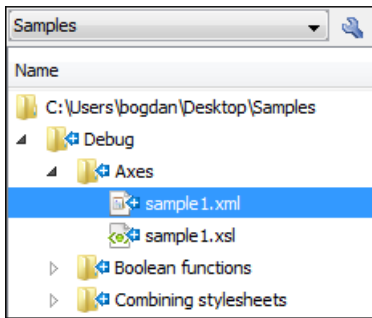


Figure 316: An incoming structure of folders from the repository

Syncro SVN Client allows you to choose how you want to deal with the entire structure from that moment onwards:

Update ancestor directories recursively

This option brings the entire newly added folders structure into your working copy. In this case, the update time depends on the total number of newly incoming resources, because of the full update operation (not updating only selected resource).

Update selected files only (leave ancestor directories empty)

This option brings a skeleton structure composed of the resource's parent folders only, and the selected resource at the end of the operation. All of the parent directories will have depth set to *empty* in your working copy, thus subsequent **Synchronize** operations will not report any remote modifications in those folders. If you need to update the folders to full-depth, you can use **Update to revision/depth** option from the working copy.

Cannot Access a Repository through HTTPS

If you have issues when trying to access a repository through HTTPS protocol, one of the possible causes can be the encryption protocol currently used by the application. This is happening when:

- You are running Oxygen XML Developer with Java 1.6 or older.
- The repository is set to use only one of the SSLv3 or TLSv1 encryption protocols.

To solve this issue, set the **HTTPS encryption protocols** option to **SSLv3 only** or **TLSv1 only** (depending on the repository configuration).

Accessing Old Items from a Repository

Usually, you point to an item from a repository using a URL. However, sometimes this might not be enough, because the URL alone might point to a different item than the one you want and a *peg revision* is needed.

A Subversion repository tracks any change made to its items by using *revisions*, which contain information like the name of the author who made the changes, the date when they were made, and a number that uniquely identifies each of them. During time, an item from a specific location in a repository evolves as a result of committing different changes to it. When an item is deleted, its entire life cycle (all changes made to it, from the moment it was created) still remains recorded in the history of the repository. If a new item is created, with the same name and in the same location of the repository as a previously existing one, then both items are identified by the same URL even though they are located in different time frames. This is when a *peg revision* comes in handy. A *peg revision* is nothing more than a normal revision, but the difference between them is made by their usage. Many of the Subversion commands accept also a peg revision as a way to precisely identify an item in time, beside an *operative revision* (the revision we are interested in, regarding the used command).

To illustrate an example, consider the following:

- We created a new repository file `config`, identified by the URL `http://host.com/myRepository/dir/config`.
- The file has been created at revision 10.
- Over time, the file was modified by committing revisions 12, 15, 17.

To access a specific version of the file identified by the `http://host.com/myRepository/dir/config` URL, we need to use a corresponding revision (the operative revision):

- If we use a revision number less than 10, an error is triggered, because the file has not been created yet.
- If we use a revision number between 10 and 19, we will obtain the specific version we are interested in.



Note: Although the file was modified in revisions 12, 15, 17, it existed in all revisions between 10 and 19. Starting with a revision at which the file is modified, it has the same content across all revisions generated in the repository until another revision in which it is modified again.

At this point, we delete the file, creating revision 20. Now, we cannot access any version of the file, because it does not exist anymore in the latest repository revision. This is due to the fact that Subversion automatically uses the HEAD revision as a peg revision (it assumes any item currently exists in the repository if not instructed otherwise). However, using any of the revision numbers from the 10-19 interval (when the file existed) as a peg revision (beside the operative revision), will help Subversion to properly identify the time frame when the file existed, and access the file version corresponding to the operative revision. If we use a revision number greater than 19, this will also trigger an error.

Continuing our example, suppose that at revision 30 we create a directory called `config` in the same repository location as our deleted file. This means that our new directory will be identified by the same repository address: `http://host.com/myRepository/dir/config`. If we use only this URL in any Subversion command, we will access the new directory. We will also access the same directory if we use as peg revision any revision number equal with or greater than 30. However, if we are interested in accessing an old version of the previously existing file, then we must use as a peg revision one of the revisions at which it existed (10-19), just like in the previous case.

Checksum Mismatch Error

A *Checksum Mismatch* error could happen if an operation that sends or retrieves information from the repository to the working copy is interrupted. This means that there is a problem with the synchronization between a local item and its corresponding remote item.

If you encounter this error, try the following:

1. Identify the parent directory of the file that caused the error (the file name should be displayed in the error message).



Note: If the parent directory is the root of the working copy or if it contains a large amount of items it is recommended that you check out the working copy again, rather than continuing with the rest of this procedure.

2. Identify the *current depth* of that directory.
3. Update the parent directory using the **Update to revision/depth** action that is available from the contextual menu or the **Working copy** menu.

- a. For the **Depth** option, select **This folder only (empty)**.



Warning: If you have files with changes in this directory, those changes could be lost. You should commit your changes or move the files to another directory outside the working copy prior to proceeding with this operation.

4. After clicking **OK** the contents of the directory will be erased and the directory is marked as having *an empty depth*.
5. Once again, update the same directory using the **Update to revision/depth** action.
 - a. This time, for the **Depth** option, select the depth that was previously identified in step 2.

6. If you moved modified files to another directory outside the working copy, move them back to the original location inside the working copy.

If this procedure does not solve the error, you need to check out the working copy again and move possible changes from the old working copy to the new one.

Tree Editor

The **Tree Editor** (**Tools > Tree Editor**) is used for editing the content of a document displayed as an XML tree. The workspace offers the following functional areas:

- Main menu - Provides access to all the features and functions available in Oxygen XML Developer Tree Editor perspective.
- Toolbar - Provides easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function.
- Editor panel - Easy editing of structured mark-up documents. Each token has an associated icon for easier visual identification.
- Message panel - Displays messages returned from user operations.
- Model view - Shows the detailed information about the attribute or element that you are working on.
- All Elements panel - Presents a list of all defined elements that can be inserted within your document.

The tree editor does not offer entity support. Entities are not presented with a special type of node in the tree and new entity nodes cannot be inserted in the document.

Comparing and Merging Documents

In large teams composed of developers or technical writers, the use of a shared repository for the source or document files is a must. Often times multiple authors may be editing the same file at the same time. It is easy to manage multiple changes by using the Oxygen XML Developer comparison and merging tools.

It can be difficult to recognize which files and folders have been modified. If your data has changed, you can use the helpful Oxygen XML Developer features for comparing files and directories to accurately identify and process changes in your files and folders. These tools are powerful, easy-to-use, and produce fast, thorough results.

Oxygen XML Developer provides a simple means of performing file and folder comparisons. You can see the differences in your files and folders and merge the changes.

There are two types of comparison tools: **Compare Directories** or **Compare Files**. These utilities are available from the **Tools** menu or can be opened as stand-alone applications from the Oxygen XML Developer installation folder (`diffDirs.exe` and `diffFiles.exe`).



Note: File comparison and merging actions can also be performed on files inside ZIP-based archives.

The **Compare Files** tool can also be used to compare XML fragments. They can be compared and merged by copying and pasting the fragments into both sides of the comparison window, without selecting files.

The comparison tools can also be started by using command-line arguments. In the installation folder there are two executable shells (`diffFiles.bat` and `diffDirs.bat` on Windows, `diffFiles.sh` and `diffDirs.sh` on Unix/Linux, `diffFilesMac.sh` and `diffDirsMac.sh` on OS X). To specify files or directories to compare, you can pass command-line arguments to each of these shells. The arguments can point to file or folder paths in directories or archives (supported formats: *zip*, *docx*, and *xlsx*).

For example, to start the comparison between the two Windows directories `c:\Program Files` and `c:\ant`, use the following command:


```
diffDirs.bat "c:\Program Files" "c:\ant"
```

If there are spaces in the path names, surround the paths with quotes. If you pass only one argument, you are prompted to manually choose the second directory or archive. This is also true for the files comparison utility.

Directories Comparison

The **Compare Directories** tool allows you to compare and manage changes to files and folders within the structure of your directories. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (`diffDirs.exe`).

The directories comparison results are presented as a tree of files and directories. The directories and folders that contain files that differ are expanded automatically so that you can focus directly on the differences. You can merge the contents of the directories by using the copy actions. If you double-click (or press **Enter**) on a line with a pair of files, Oxygen XML Developer starts a [file comparison](#) between the two files, using the **Compare Files** tool.

 **Note:** The comparison is only available for file type associations that are known by Oxygen XML Developer.

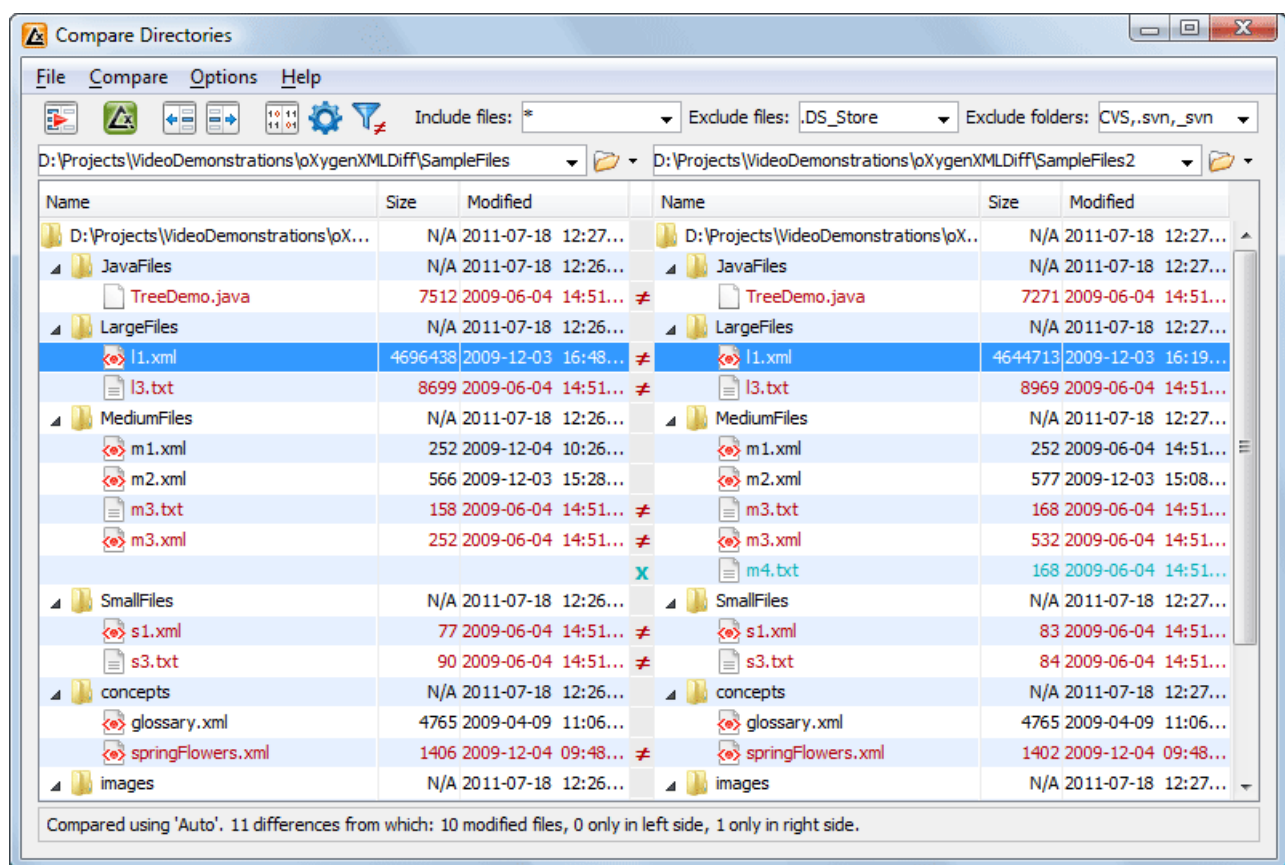


Figure 317: The Compare Directories Window

Directories Comparison User Interface

This section explains the user interface of the **Directories Comparison** window.

Compare Menu

This menu contains the following actions:

-  **Perform Directories Differencing** - Looks for differences between the two directories displayed in the left and right side of the application window.
-  **Perform Files Differencing** - Compares the currently selected files.

-  **Copy Change from Right to Left** - Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).
-  **Copy Change from Left to Right** - Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).

Options Menu

- **Preferences** - Opens the preferences.
- **Menu Shortcut Keys** - Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.
- **Reset Global Options** - Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.
- **Import Global Options** - Allows you to import an options set that you have previously exported.
- **Export Global Options** - Allows you to export the current options set to a file.

Help Menu

The **Help** menu contains the following actions:

Help (F1)

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

Use Online Help

If this option is enabled, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is disabled or an internet connection fails, the help documentation is opened in offline mode.

Report problem

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

Support Center

Opens the Oxygen XML Developer Support Center web page in a browser.

Compare Toolbar of the Compare Directories Tool

The toolbar contains the following actions:



Figure 318: The Compare toolbar



Perform directories differencing

Looks for differences between the two directories displayed in the left and right side of the application window.



Perform files differencing

Compares the currently selected files.



Copy Change from Right to Left

Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).



Copy Change from Left to Right

Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).



Binary Compare

Performs a byte-level comparison on the selected files.



Diff Options

Opens the directory comparison preferences page.



Show Only Modifications

Displays a more uncluttered file structure by hiding all identical files.

File and folder filters

Differences can be filtered using three combo boxes: **Include files**, **Exclude files**, and **Exclude folders**. They come with predefined values and are editable to allow custom values. All of them accept multiple comma-separated values and the * and ? wildcards. For example, to filter out all jpeg and gif image files, edit the **Exclude files** filter box to read *.jpeg, *.png. Each filter includes a drop-down menu with the latest 15 filters applied.

Directories Selector

To open the directories you want to compare, select a folder from each **Browse for local directory** button. The **Compare Directories** tool keeps track of the folders you are currently working with and those that you opened in this window. You can see and select them from the two drop-down menus.

If you want to compare the content of two archives, you can select the archives from the **Browse for archive file** button.



Tip: By default, the supported archives are not treated as directories and the comparison is not performed on the files inside them. To make Oxygen XML Developer treat supported archives as directories, go to the [Diff preferences page](#) and enable the **Look in archives** option.

Comparison Results

The directory comparison results are presented using two tree-like structures showing the files and folders, including their name, size, and modification date.

Name	Size	Modified		Name	Size	Modified
length-bad.xml	140	2010-07-12 16:43:03		length-bad.xml	140	2010-07-12 16:43:03
length-bad1.xml	140	2010-07-12 16:43:04	≠	length-bad1.xml	125	2010-09-02 11:41:14
length-bad2.xml	143	2010-07-12 16:43:04	≠	length-bad2.xml	126	2010-09-02 11:41:07
length-good.xml	141	2010-07-12 16:43:03	≠	length-good.xml	126	2010-09-02 11:41:03
length.dtd	91	2010-07-12 16:43:03	X			
length.sch	648	2010-07-12 16:43:03	X			
name-bad.xml	171	2010-07-12 16:43:03	≠	name-bad.xml	155	2010-09-02 11:40:38
name.dtd	192	2010-07-12 16:43:03	≠	name.dtd	158	2010-09-02 11:42:09
name.sch	566	2010-07-12 16:43:04	≠	name.sch	351	2010-09-02 11:40:50
present-bad.xml	224	2010-07-12 16:43:04	≠	present-bad.xml	171	2010-09-02 11:41:47
present.dtd	130	2010-07-12 16:43:03	≠	present.dtd	60	2010-09-02 11:40:28
present.sch	482	2010-07-12 16:43:03	≠	present.sch	295	2010-09-02 11:41:51
required-bad1.xml	205	2010-07-12 16:43:03	≠	required-bad1.xml	163	2010-09-02 11:41:24
required-bad2.xml	189	2010-07-12 16:43:03	≠	required-bad2.xml	155	2010-09-02 11:41:18
required-good.xml	197	2010-07-12 16:43:03		required-good.xml	197	2010-07-12 16:43:03
required.dtd	128	2010-07-12 16:43:03	≠	required.dtd	91	2010-09-02 11:41:42
required.sch	612	2010-07-12 16:43:03	≠	required.sch	363	2010-09-02 11:41:38
author	N/A	2010-09-01 11:23:14		author	N/A	2010-09-02 11:42:38
author.sch	613	2010-07-12 16:43:04	X			
source1.xml	165	2010-07-12 16:43:04	X			
source2.xml	184	2010-07-12 16:43:04	X			
paragraph	N/A	2010-09-01 11:23:14		paragraph	N/A	2010-09-02 11:39:34

Compared using 'Timestamp (last modified date/time)'. 20 differences from which: 13 modified files, 7 only in left side, 0 only in right side.

Figure 319: Comparison Results

A column that contains graphic symbols separates the two tree-like structures. The graphic symbols can be one of the following:

- An **X** symbol, when a file or a folder exists in only one of the compared directories.
- A **≠** symbol, when a file exists in both directories but the content differs. The same sign appears when a collapsed folder contains differing files.

The color used for the symbol and the directory or file name can be customized in the [Directories Comparison / Appearance](#) preferences page. You can double-click lines marked with the **≠** symbol to open a **Compare Files** window, which shows the differences between the two files.

Compare Images

If you double-click a line containing two different images, the **Compare images** window is displayed. This dialog box presents the images in the left and right sides, scaled to fit the available view area. You can use the contextual menu actions to scale the images to their original size or scale them down to fit in the view area.

The supported image types are: *GIF*, *JPG*, *JPEG*, *PNG*, and *BMP*.

Files Comparison

The **Compare Files** tool can be used to compare files or XML file fragments. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (`diffFiles.exe`). Using the **Browse** drop-down menu, open a file in the left side of the dialog box, and the file you want to compare it to in the right side. To highlight the differences between the two files, click the **Perform File Differencing** button. The line numbers on each side help you to quickly identify the locations of the differences.

To compare XML file fragments, you need to copy and paste the fragments you want to compare into each side, without selecting a file. If a file is already selected, you need to close it, using the **Close (Ctrl W (Meta W on OS X))** button, before pasting the fragments.

You can edit both the source and the target file. The differences are refreshed when you save the modified document.

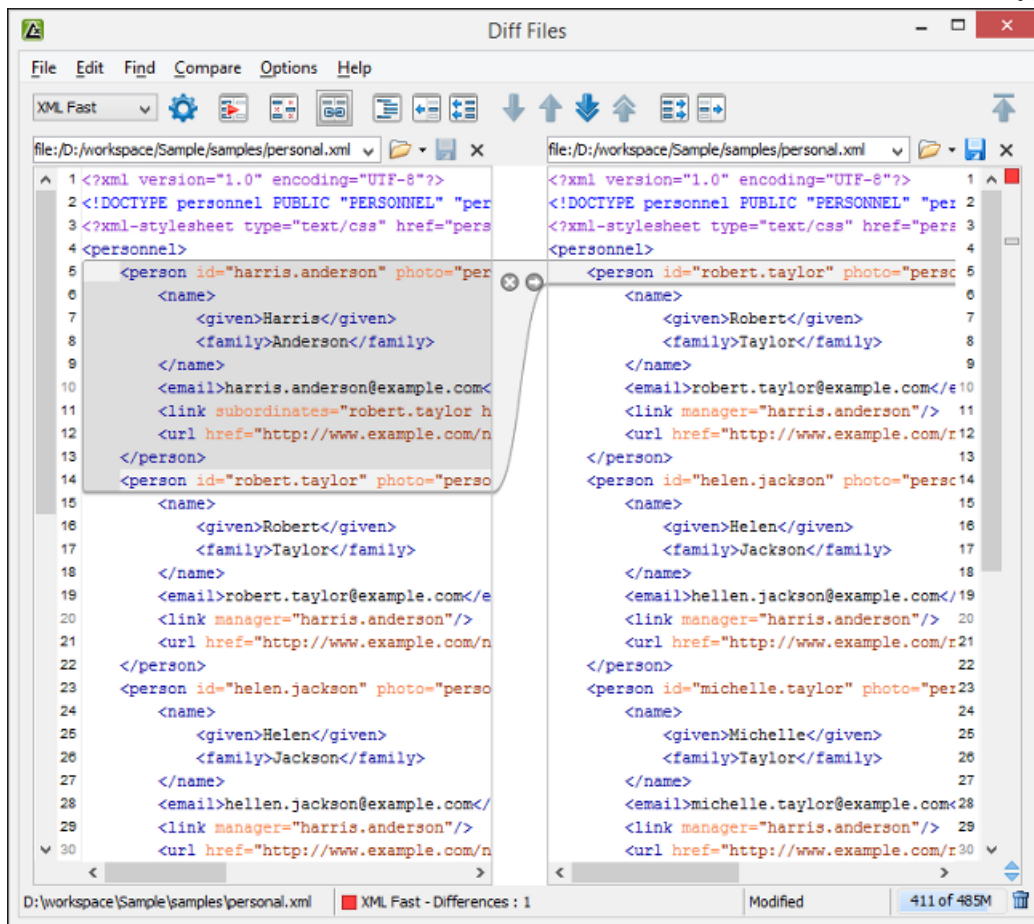


Figure 320: The Compare Files Window

Adjacent changes are grouped into blocks of changes. This layout allows you to easily identify and focus on a group of related changes.

When you select a change, a widget containing actions that can be used to copy or append changes from either of the two sides is displayed:

➡➡ **Append left change to right** and ⬅️⬅️ **Append right change to left**

Copies the content of the selected change from one side and appends it on the other, after the content of the corresponding change. As a result, the side that the arrows point to will contain the changes from both sides.

➡ **Copy change from left to right** and ⬅️ **Copy change from right to left**

Replaces the content of a change from one side, with the content of the corresponding change from the other side.

Oxygen XML Developer offers various diff algorithms to compare files or fragments:

- **Auto** - selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - computes the differences at character level.
- **Words** - computes the differences at word level.
- **Lines** - computes the differences at line level.
- **Syntax Aware** - computes differences for file types or XML fragments that are known by Oxygen XML Developer.
- **XML Fast** - works well on large files or fragments at the expense of accuracy.
- **XML Accurate** - works best on small XML files or fragments and offers accurate results, at the expense of speed.

Main Menu

This section explains the menu actions of the **Files Comparison** window.

File Menu

The **File** menu of the files comparison tool contain the following actions:

Source

The file that is displayed in the left side of the application window.

- **Source** >  **Open** - Browses for a source file.
- **Source** >  **Open URL** - Opens the URL to be used as a source file. See [Open URL](#) for details.
- **Source** >  **Open File from Archive** - Browses an archive content for a source file.
- **Source** >  **Save** - Saves the changes made in the source file.
- **Source** > **Save As** - Displays the **Save As** dialog box that allows you to save the source file with a new name.

Target

The file that is displayed in the right side of the application window.

- **Target** >  **Open** - Browses for a target file.
- **Target** >  **Open URL** - Opens the URL to be used as a target file. See [Open URL](#) for details.
- **Target** >  **Open File from Archive** - Browses an archive content for a target file.
- **Target** >  **Save** - Saves the changes made in the target file.
- **Target** > **Save As** - Displays the **Save As** dialog box that allows you to save the target file with a new name.

Exit

Quits the application.

Edit Menu

The following actions are available in the **Edit** menu:



Cut

Cut the selection from the currently focused **Compare** editor to the clipboard.



Copy

Copy the selection from the currently focused **Compare** editor to the clipboard.



Paste

Paste content from the clipboard into the currently focused **Compare** editor.



Undo

Undo changes in the currently focused **Compare** editor.



Redo

Redo changes in the currently focused **Compare** editor.

Find Menu

The **Find** menu actions are as follows:



Find/Replace

Perform *find/replace* operations in the currently focused **Editor**.



Find Next

Go to the next match using the same options as the last *find* operation. This action runs in both editor panels.

**Find Previous**

Go to the previous match using the same options as the last *find* operation. This action runs in both editor panels.

Compare Menu

The following actions are available in the **Compare** menu:

**Perform Files Differencing**

Performs a comparison between the source file and target file.

**Next Block of Changes (Ctrl Period (Meta Period on OS X))**

Jumps to the next block of changes. This action is disabled when the cursor is positioned on the last change block or when there are no changes.



Note: A change block groups one or more consecutive lines that contain at least one change.

**Previous Block of Changes (Ctrl Comma (Meta Comma on OS X))**

Jumps to the previous block of changes. This action is disabled when the cursor is positioned on the first change block or when there are no changes.

**Next Change (Ctrl Shift Period (Meta Shift Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is disabled when the cursor is positioned on the last change or when there are no changes.

**Previous Change (Ctrl Shift Comma (Meta Shift M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is disabled when the cursor is positioned on the first change or when there are no changes.

**Last Change (Ctrl E (Meta E on OS X))**

Jumps to the last change.

**First Change (Ctrl B (Meta B on OS X))**

Jumps to the first change.

**Copy All Changes from Right to Left**

Copies all changes from the target file in the right side to the source file in the left side.

**Copy All Changes from Left to Right**

Copies all changes from the source file in the left side to the target file in the right side.

**Copy Change from Right to Left**

Copies the selected difference from the target file in the right side to the source file in the left side.

**Copy Change from Left to Right**

Copies the selected difference from the source file in the left side to the target file in the right side.

**Show Word Level Details**

Provides a word-level comparison of the selected change.

**Show Character Level Details**

Provides a character-level comparison of the selected change.

**Format and Indent Both Files (Ctrl Shift P (Meta Shift P on OS X))**

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

Options Menu

- **Preferences** - Opens the preferences.
- **Menu Shortcut Keys** - Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.
- **Reset Global Options** - Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.
- **Import Global Options** - Allows you to import an options set that you have previously exported.
- **Export Global Options** - Allows you to export the current options set to a file.

Help Menu

The **Help** menu contains the following actions:

Help (F1)

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

Use Online Help

If this option is enabled, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is disabled or an internet connection fails, the help documentation is opened in offline mode.

Report problem

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

Support Center

Opens the Oxygen XML Developer Support Center web page in a browser.

Compare Toolbar of the Compare Files Tool

This toolbar contains the operations that can be performed on the source and target files or XML fragments.



Figure 321: The Compare Toolbar

The following actions are available:

Algorithm

This drop-down menu allows you to select one of the following diff algorithms:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level.
- **Words** - Computes the differences at word level.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text. Once identical lines are found, it is considered a match. The content that precedes the match is considered to be a difference and marked accordingly. The algorithm then continues to look for matching lines.
- **Syntax Aware** - Computes differences for known file types or XML fragments. Known file types include those listed in the **New** dialog box, such as XML file types (XSLT files, XSL-FO files, XSD files, RNG files, NVDL files, etc.), XQuery file types (`.xquery`, `.xq`, `.xqy`, `.xqm` extensions), DTD file types (`.dtd`, `.ent`, `.mod` extensions), TEXT file type (`.txt` extension), or PHP file type (`.php` extension).

This algorithm splits the files or fragments into sequences of *tokens* and computes the differences between them. A *token* can have a different meaning, depending on the type of the compared files or fragments. For example:

- When comparing XML files or fragments, a token can be one of the following:
 - The name of an XML tag
 - The < character
 - The /> sequence of characters
 - The name of an attribute inside an XML tag
 - The = sign
 - The " character
 - An attribute value
 - The text string between the start tag and the end tag (a text node that is a child of the XML element corresponding to the XML tag that encloses the text string)
- When comparing plain text, a token can be any continuous sequence of characters or any continuous sequence of whitespaces, including a new line character.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed.



Diff Options

Opens the [Files Comparison page](#).



Perform directories differencing

Looks for differences between the two directories displayed in the left and right side of the application window.



Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



Synchronized scrolling

Synchronizes scrolling so that a selected difference can be seen on both sides of the application window. This action enables/disables the previously described behavior.



Format and Indent Both Files (**Ctrl Shift P (Meta Shift P on OS X)**)

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.



Copy Change from Right to Left

Copies the selected difference from the target file in the right side to the source file in the left side.



Copy All Changes from Right to Left

Copies all changes from the target file in the right side to the source file in the left side.



Next Block of Changes (**Ctrl Period (Meta Period on OS X)**)

Jumps to the next block of changes. This action is disabled when the cursor is positioned on the last change block or when there are no changes.



Note: A change block groups one or more consecutive lines that contain at least one change.



Previous Block of Changes (**Ctrl Comma (Meta Comma on OS X)**)

Jumps to the previous block of changes. This action is disabled when the cursor is positioned on the first change block or when there are no changes.

**Next Change (Ctrl Shift Period (Meta Shift Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is disabled when the cursor is positioned on the last change or when there are no changes.

**Previous Change (Ctrl Shift Comma (Meta Shift M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is disabled when the cursor is positioned on the first change or when there are no changes.

**Copy All Changes from Left to Right**

Copies all changes from the source file in the left side to the target file in the right side.

**Copy Change from Left to Right**

Copies the selected difference from the source file in the left side to the target file in the right side.

**First Change (Ctrl B (Meta B on OS X))**

Jumps to the first change.

Files Selector

To open the source and target files to use for comparison, use one of the following options from the  ▾ **Browse** drop-down menu:

- **Browse for local** - Opens a dialog box to browse for files in your local file system.
- **Browse for remote** - Opens the **Open URL** dialog box to browse for remote files.
- **Browse for archive** - Opens the **Archive Browser** dialog box to browse for archives.
- **Browse Data Source Explorer** - Opens the **Data Source Explorer** dialog box to browse database sources.
- **Search for file** - Opens the **Find Resource** dialog box for advanced search capabilities.

The comparison tool keeps track of the files you are currently working with and those that you opened in this window. You can see and select them from the two combo boxes.

You can also save the changes in either file by clicking the corresponding **Save** button.

You can close compared files by using the **Close** button. To compare XML fragments you need to close the compared files in order to copy and paste the fragments into each side of the panel.

File Contents Panel

Selected files are opened in two side-by-side editors. A text perspective is used to offer a better view of the differences. You can also compare XML fragments by copying and pasting them into both sides of the panel, without selecting files. To compare XML fragments, if files are already opened you need to close them in order to paste the fragments into the panels.

The two editors are constantly kept in sync. Therefore, if you scroll through the text in one side, the other one also scrolls to show the differences side-by-side. The differences are indicated with highlights connected through colored areas. To navigate through differences, do one of the following:

- Use the navigation buttons on the toolbar.
- Select the navigation options from the **Compare** menu.
- Select a block of differences by clicking its small colored indicator in the overview ruler located in the right-most part of the window. At the top of the overview ruler there is a success indicator that turns green where there are no differences, or red if differences are found.
- Click a colored area in between the two text editors.

You can edit the content in either side of the editor and the differences are refreshed when you save the modified document. If you save modified fragments, rather than a file, a dialog box opens that allows you to save the changes as a new document.

Both editors provide a contextual menu that contains *edit*, *merge*, and *navigation* actions.

The **Find/Replace** dialog box is displayed by pressing **Ctrl F (Meta F on OS X)**. **Find/Replace** options are also available:

- **F3** - Performs a forward search, using the last search configuration.
- **Shift F3 (Meta Shift G on OS X)** - Performs a backward search, using the last search configuration.

If the compared blocks of text are too large and you want to see the differences at a more fine-tuned level, you can choose options in the **Compare** menu to do a *word level comparison* or *character level comparison*.

Word Level Comparison

This option is only available if differences exist between the source and the target file. You can do a word level comparison by selecting the **Show word level details** option from the **Compare** menu.

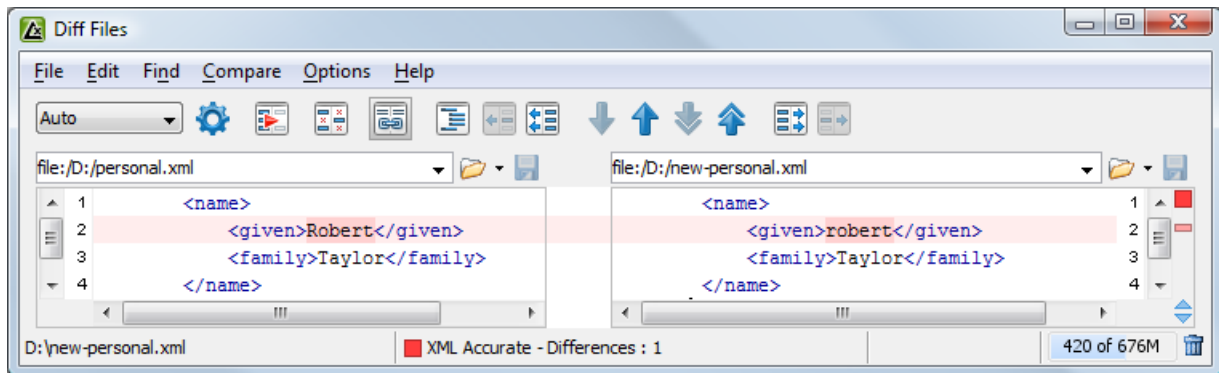


Figure 322: Word Level Comparison

Character Level Comparison

This option is only available if modifications exist between the source and target file. You can do a character level comparison by selecting the **Show Character Level details** option from the **Compare** menu.

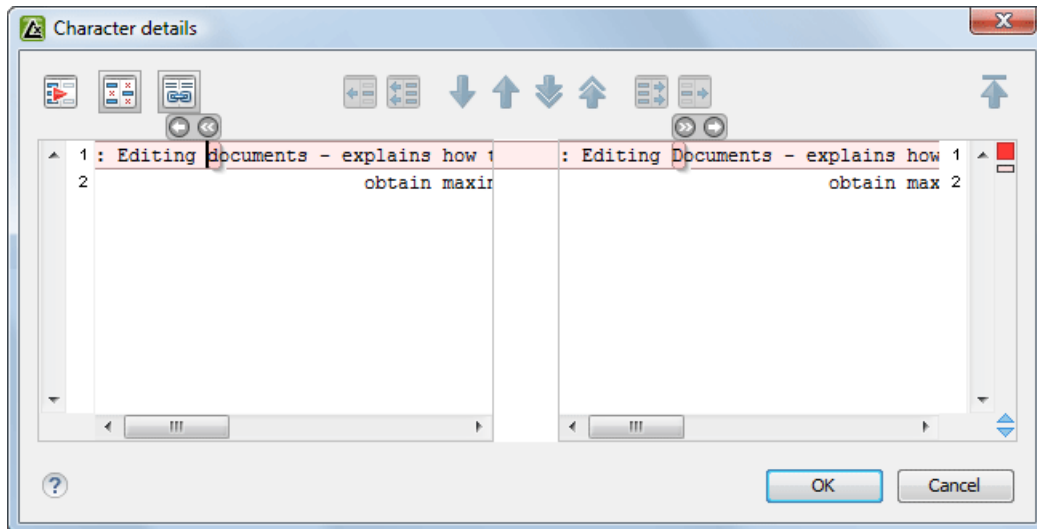


Figure 323: Character Level Comparison

XML Digital Signatures

This chapter explains how to apply and verify digital signatures on XML documents.

Digital Signatures Overview

Digital signatures are widely used as security tokens, not just in XML. A digital signature provides a mechanism for assuring integrity of data, the authentication of its signer, and the non-repudiation of the entire signature to an external party:

- A digital signature must provide a way to verify that the data has not been modified or replaced to ensure integrity.
- The signature must provide a way to establish the identity of the data's signer for authentication.
- The signature must provide the ability for the data's integrity and authentication to be provable to a third party for non-repudiation.

A public key system is used to create the digital signature and it's also used for verification. The signature binds the signer to the document because digitally signing a document requires the originator to create a hash of the message and then encrypt that hash value with his own private key. Only the originator has that private key and he is the only one that can encrypt the hash so that it can be unencrypted using his public key. The recipient, upon receiving both the message and the encrypted hash value, can decrypt the hash value, knowing the originator's public key. The recipient must also try to generate the hash value of the message and compare the newly generated hash value with the unencrypted hash value received from the originator. If the hash values are identical, it proves that the originator created the message, because only the actual originator could encrypt the hash value correctly.

XML Signatures can be applied to any digital content (data object), including XML (see W3C Recommendation, [XML-Signature Syntax and Processing](#)). An XML Signature may be applied to the content of one or more resources:

- Enveloped or enveloping signatures are applied over data within the same XML document as the signature
- Detached signatures are applied over data external to the signature element; the signature is "detached" from the content it signs. This definition typically applies to separate data objects, but it also includes the instance where the signature and data object reside within the same XML document but are sibling elements.

The XML Signature is a method of associating a key with referenced data. It does not normatively specify how keys are associated with persons or institutions, nor the meaning of the data being referenced and signed.

The original data is not actually signed. Instead, the signature is applied to the output of a chain of canonicalization and transformation algorithms, which are applied to the data in a designated sequence. This system provides the flexibility to accommodate whatever "normalization" or desired preprocessing of the data that might be required or desired before subjecting it to being signed.

To canonicalize something means to put it in a standard format that everyone generally uses. Since the signature is dependent on the content it is signing, a signature produced from a non-canonicalized document could possibly be different from one produced from a canonicalized document. The canonical form of an XML document is physical representation of the document produced by the method described in this specification. The term canonical XML refers to XML that is in canonical form. The XML canonicalization method is the algorithm defined by this specification that generates the canonical form of a given XML document or document subset. The term XML canonicalization refers to the process of applying the XML canonicalization method to an XML document or document subset. XML canonicalization is designed to be useful to applications that require the ability to test whether the information content of a document or document subset has been changed. This is done by comparing the canonical form of the original document before application processing with the canonical form of the document result of the application processing.

A digital signature over the canonical form of an XML document or document subset would allow the signature digest calculations to be oblivious to changes in the original document's physical representation. During signature generation, the digest is computed over the canonical form of the document. The document is then transferred to the relying party, which validates the signature by reading the document and computing a digest of the canonical form of the received document. The equivalence of the digests computed by the signing and relying parties (and hence the equivalence of the canonical forms over which they were computed) ensures that the information content of the document has not been altered since it was signed.

The following canonicalization algorithms are used in Oxygen XML Developer: Canonical XML (or Inclusive XML Canonicalization)([XMLC14N](#)) and Exclusive XML Canonicalization([EXCC14N](#)). The first is used for XML where the context doesn't change while the second was designed for canonicalization where the context might change.

Inclusive Canonicalization copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. Inclusive Canonicalization is useful when it is less

likely that the signed data will be inserted in other XML document and it is the safer method from the security perspective because it requires no knowledge of the data that are to be secured in order to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the Inclusive Canonicalization will copy them and the signature will be invalid.

Exclusive Canonicalization just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within different XML contexts), as it will ensure the signature is verified correctly each time.

The canonicalization method can specify whether or not comments should be included in the canonical form output by the XML canonicalization method. If a canonical form contains comments corresponding to the comment nodes in the input node-set, the result is called canonical XML with comments. In an uncommented canonical form comments are removed, including delimiter for comments outside document element.

The three operations, **Canonicalize**, **Sign**, and **Verify Signature**, are available from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

Canonicalizing Files

You can select the canonicalization algorithm to be used for a document from the dialog box that is displayed by using the **Canonicalize** action that is available from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

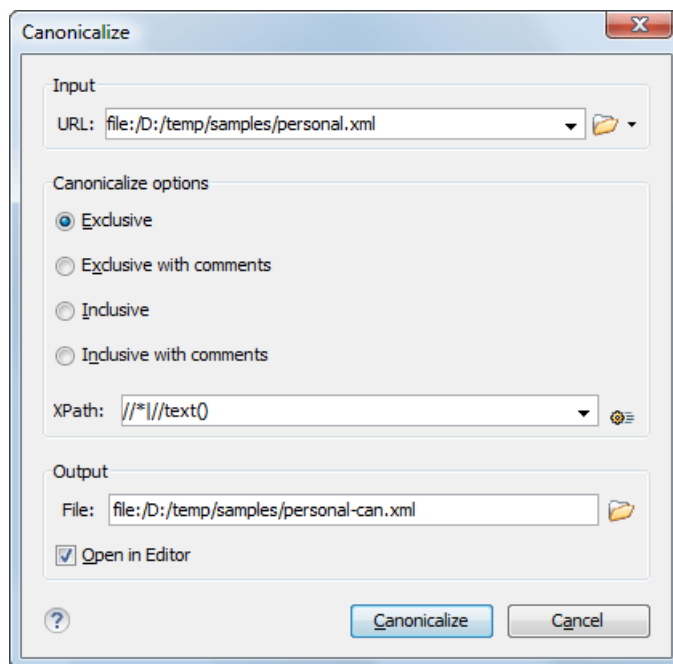


Figure 324: Canonicalization Settings Dialog Box

You can set the following:

- **Input URL** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the location of the input file.
- **Exclusive** - If selected, the exclusive (uncommented) canonicalization method is used.



Note: Exclusive Canonicalization just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within different XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments canonicalization method is used.
- **Inclusive** - If selected, the inclusive (uncommented) canonicalization method is used.



Note: Inclusive Canonicalization copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. Inclusive Canonicalization is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security perspective because it requires no knowledge of the data that are to be secured in order to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the Inclusive Canonicalization will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments canonicalization method is used.
- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **Output** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the output file path where the signed XML document will be saved.
- **Open in editor** - If checked, the output file will be opened in the editor.

Certificates

A certificate is a digitally signed statement from the issuer (an individual, an organization, a website or a firm), saying that the public key (and some other information) of some other entity has a particular value. When data is digitally signed, the signature can be verified to check the data integrity and authenticity. Integrity means that the data has not been modified. Authenticity means the data comes indeed from the entity that claims to have created and signed it. Certificates are kept in special repositories called *keystores*.

A *keystore* is an encrypted file that contains private keys and certificates. All *keystore* entries (key and trusted certificate entries) are accessed via unique aliases. An alias must be assigned for every new entry of either a key or certificate as a reference for that entity. No *keystore* can store an entity if its alias already exists in that *keystore* and cannot store trusted certificates generated with keys in its *keystore*.

In Oxygen XML Developer there are provided two types of *keystores*: Java Key Store (JKS) and Public-Key Cryptography Standards version 12 (PKCS-12). A *keystore* file is protected by a password. In a PKCS 12 *keystore* you should not store a certificate without alias together with other certificates, with or without alias, as in such a case the certificate without alias cannot be extracted from the *keystore*.

To configure the options for a certificate or to validate it, [open the Preferences dialog box](#) and go to **XML > XML Signing Certificates**. This opens [the certificates preferences page](#).

Signing Files

You can select the type of signature to be used for documents from a signature settings dialog box. To open this dialog box, select the **Sign** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

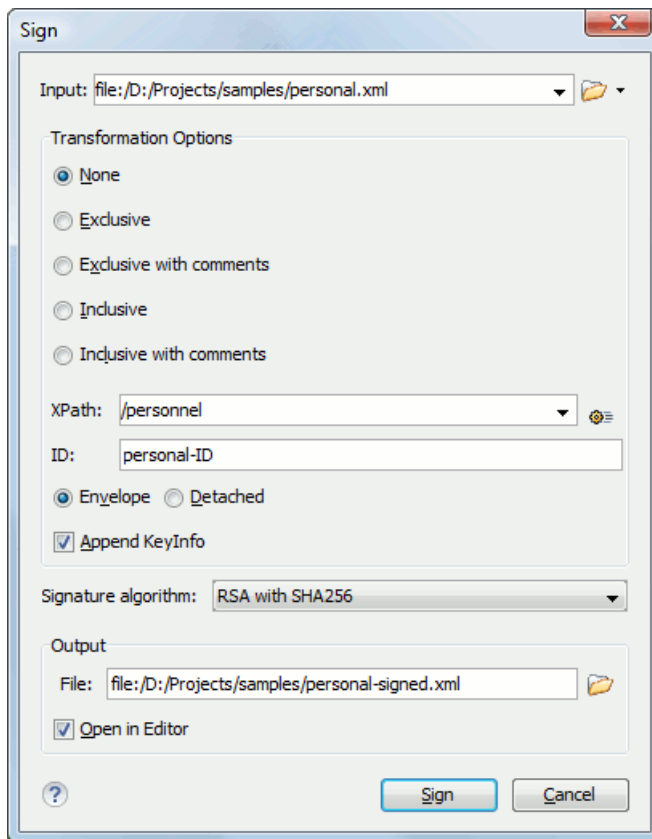


Figure 325: Signature Settings Dialog Box

The following options are available:



Note: If Oxygen XML Developer could not find a valid certificate, a link is provided at the top of the dialog box that opens the [XML Signing Certificates preferences page](#) where you can configure a valid certificate.

❗ Could not obtain a valid certificate. [You must configure a valid certificate.](#)

- **Input** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the location of the input URL.
- **Transformation Options** - See the [Digital Signature Overview](#) section for more information about these options.

- **None** - If selected, no canonicalization algorithm is used.
- **Exclusive** - If selected, the exclusive (uncommented) canonicalization method is used.



Note: Exclusive Canonicalization just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within different XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments canonicalization method is used.
- **Inclusive** - If selected, the inclusive (uncommented) canonicalization method is used.



Note: Inclusive Canonicalization copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. Inclusive Canonicalization is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security perspective because it requires no knowledge of the data that are to be secured in order to safely sign them. A problem may occur if the signed document is moved

into another XML document that has other declarations because the Inclusive Canonicalization will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments canonicalization method is used.
- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **ID** - Provides ID of the XML element to be signed.
- **Envelope** - If selected, the *enveloped* signature is used. See the [Digital Signature Overview](#) for more information.
- **Detached** - If selected, the *detached* signature is used. See the [Digital Signature Overview](#) for more information.
- **Append KeyInfo** - If this option is checked, the `ds:KeyInfo` element will be added in the signed document.
- **Signature algorithm** - The algorithm used for signing the document. The following options are available: **RSA with SHA1**, **RSA with SHA256**, **RSA with SHA384**, and **RSA with SHA512**.
- **Output** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the path of the output file where the signed XML document will be saved.
- **Open in editor** - If checked, the output file will be opened in Oxygen XML Developer.

Verifying the Signature

You can verify the signature of a file by selecting the **Verify Signature** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu. The **Verify Signature** dialog box then allows you to specify the location of the file whose signature is verified.

If the signature is valid, a dialog box displays the name of the signer. Otherwise, an error shows details about the problem.

Example of How to Digitally Sign XML Files or Content

Suppose you want to digitally sign an XML document, but more specifically, suppose you have multiple instances of the same element in the document and you just want to sign a specific ID. Oxygen XML Developer includes a signature tool that allows you to digitally sign XML documents or specific content.

The Oxygen XML Developer installation directory includes a `samples` folder that contains a file called `personal.xml`. For the purposes of this example, this file will be used to demonstrate how to digitally sign specific content. Notice that this file has multiple `person` elements inside the `personnel` element. Suppose you want to digitally sign the specific `person` element that contains the `id=robert.taylor`. To do this, follow this procedure:

1. Open the `personal.xml` file in Oxygen XML Developer in **Text** editing mode.
2. Right-click anywhere in the editor and select the **Sign** action from the **Source** submenu. The **Sign** dialog box is displayed.

Tip: If you want to sign a file but create a new output file so that the original file remains unchanged, use the **Sign** action from the **Tools** menu. Selecting the action from this menu will allow you to choose an input file and output file in the **Sign** dialog box.
3. If Oxygen XML Developer cannot find a valid certificate, click the link at the top of the dialog box to **configure a valid certificate**. This opens the [XML Signing Certificates preferences page](#) that allows you to configure and validate a certificate.
4. Once a valid certificate is recognized, continue to configure the **Sign** dialog box.
 - a) Select one of [the Transformation Options](#). For the purposes of this example, select the **Inclusive with comments** option.
 - b) Specify the appropriate **XPath** expression for the specific element that needs to be signed. For this example, type `/personnel/person` in the **XPath** text box.
 - c) Enter the specific **ID** that needs to be signed. For this example, type `robert.taylor` in the **ID** field.
 - d) Select [the Envelope option](#) and leave the other options as their default values.

The digital signature is added at the end of the XML document, just before the end tag. It is always added at the end of the document, even if you only sign specific content within the document.

5. You can verify the signature by choosing the **Verify Signature** action from the **Source** submenu of the contextual menu.

Large File Viewer

XML files tend to become larger and larger mostly because they are frequently used as a format for database export or for porting between different database formats. Traditional XML text editors simply cannot handle opening these huge export files, some having sizes exceeding one gigabyte, because all the file content must be loaded in memory before the user can actually view it.

The best performance of the viewer is obtained for encodings that use a fixed number of bytes per character, like UTF-16 or ASCII. The performance for UTF-8 is very good for documents that use mostly characters of the European languages. For the same encoding, the rendering performance is higher for files consisting of long lines (up to few thousands characters) and may degrade for short lines. In fact, the maximum size of a file that can be rendered in the Large File Viewer decreases when the total number of the text lines of the file increases. Trying to open a very large file, for example a file of 4 GB with a very high number of short lines (100 or 200 characters per line) may produce an *out of memory* error (**OutOfMemoryError**) which would require either increasing the Java heap memory with the -Xmx startup parameter or decreasing the total number of lines in the file.

The powerful **Large File Viewer** is available from the **Tools** menu or as a standalone application. You can also right click a file in your project and choose to open it with the viewer. It uses an efficient structure for indexing the opened document. No information from the file is stored in the main memory, just a list of indexes in the file. In this way the viewer can open very large files, up to 10 gigabytes. If the opened file is XML, the encoding used to display the text is detected from the XML prolog of the file. For other file types, the encoding is taken from the Oxygen XML Developer options. See [Encoding for non XML files](#).

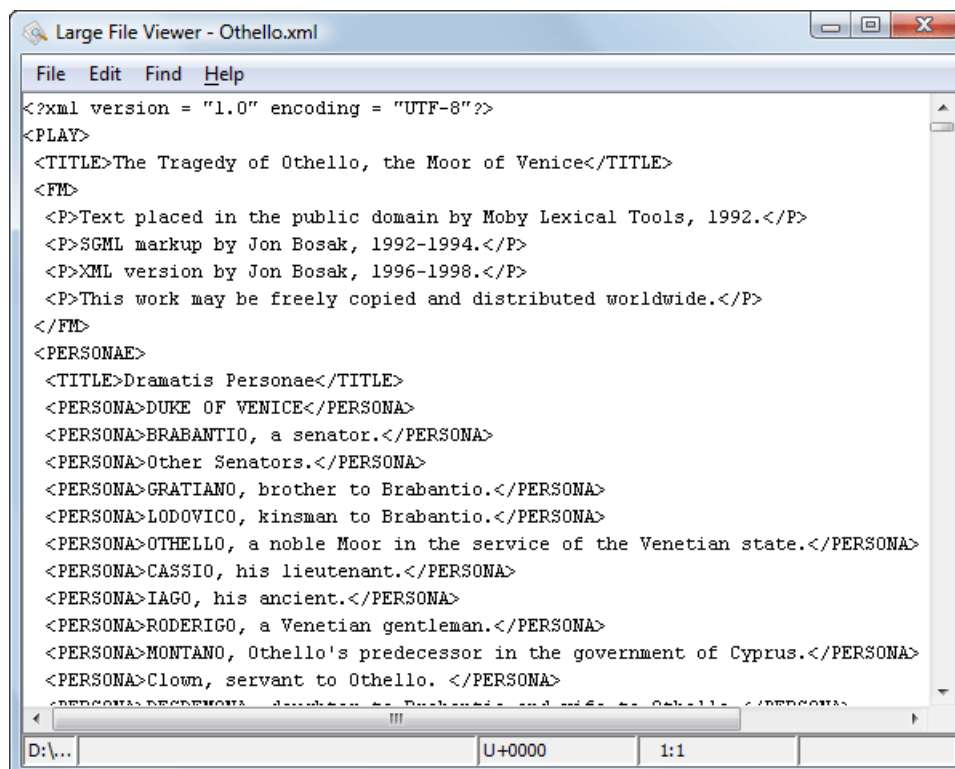


Figure 326: The Large File Viewer

Large File Viewer components:

- The menu bar provides menu driven access to all the features and functions that are available in **Large File Viewer**:

File > Open

Opens files in the viewer (also available in the contextual menu).

File > Exit

Closes the viewer.

Edit > Copy

Copies the selected text to clipboard (also available in the contextual menu).

Find > Find

Opens a reduced **Find** dialog box that provides some basic search options, such as:

- **Case sensitive** - When checked, operations are case-sensitive.
- **Regular Expression** - When checked, allows you to use any regular expression in [Perl-like syntax](#).
- **Wrap around** - Continues the find operation from the start (end) of the document after reaching the end (start), depending on whether the search is in forward or (backward) direction.

Help > Help

Provides access to the User Manual.

- The status bar provides information about the current opened file path, the Unicode representation of the character at cursor position and the line and column in the opened document where the cursor is located.



Attention: For faster computation the **Large File Viewer** uses a fixed font (plain, monospace font of size 12) to display characters. The font is *not* configurable from the [Preferences page](#).



Tip: The best performance of the viewer is accomplished for encodings that use a fixed number of bytes per character, like UTF-16 or ASCII. The performance for UTF-8 is very good for documents that use mostly characters of the European languages. For the same encoding the rendering performance is high for files consisting of short lines (up to a few thousand characters) and may degrade for long lines.

Hex Viewer

When the Unicode characters that are visible in a text viewer or editor are not enough and you need to see the byte values of each character of a document, you can start the **Hex Viewer** that is available on the **Tools** menu. It has two panels: the characters are rendered in the right panel and the bytes of each character are displayed in the left panel. There is a 1:1 correspondence between the characters and their byte representation: the byte representation of a character is displayed in the same matrix position of the left panel as the character in the matrix of the right panel.

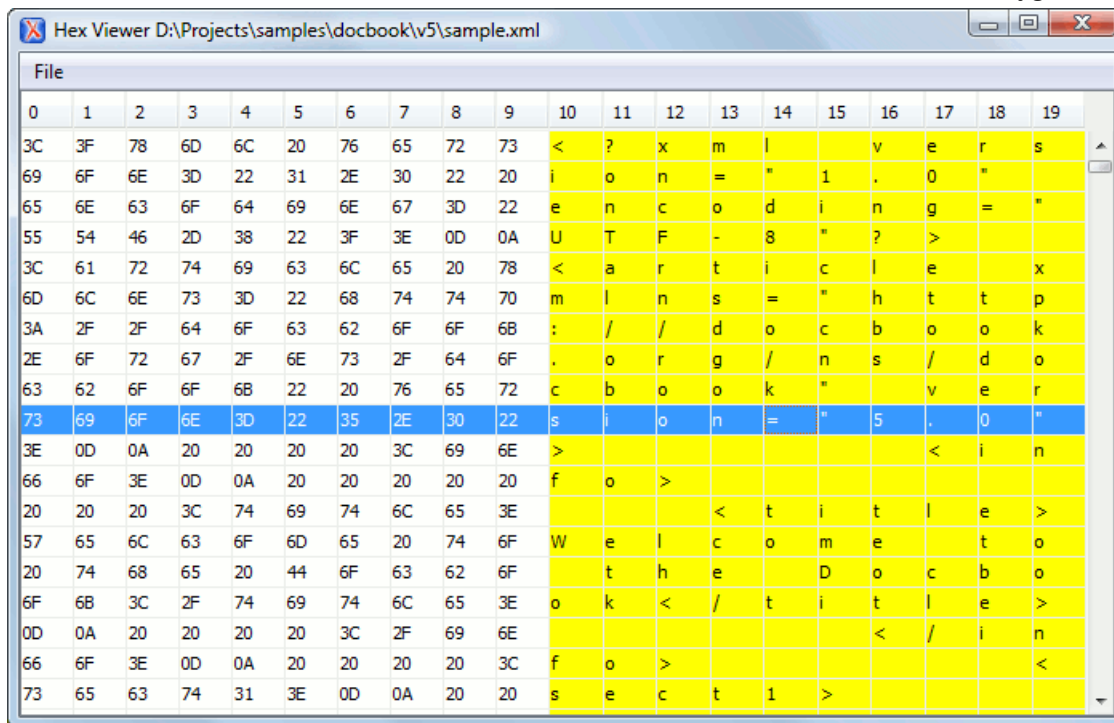


Figure 327: Hex Viewer

To open a file in **Hex Viewer** use the **File > Open** action. Alternatively, you can drag a file and drop it in the **Hex Viewer** panel.

The Standalone SVG Viewer

Oxygen XML Developer includes a simple *SVG Viewer* that allows you to work with SVG images.

To open the viewer, select **SVG Viewer** from the **Tools** menu.

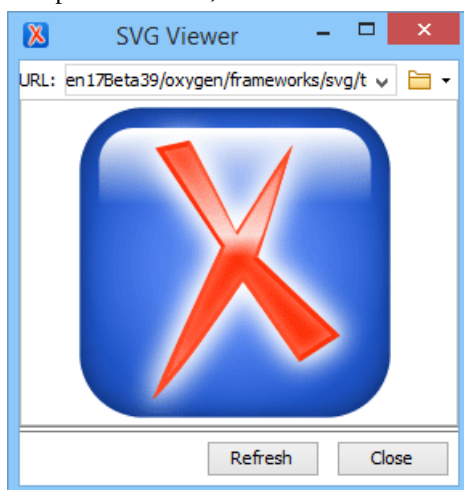


Figure 328: SVG Viewer

You can browse for and open any SVG file that has the **.svg** or **.svgz** extension.

If the file is included in the current project, you can open it in the viewer by right-clicking the image file in the **Project** view and selecting **Open with > SVG Viewer**.

Actions Available in the SVG Viewer

The following actions are available in the **SVG Viewer**:

Zoom in

To zoom in on an image, use any of the following methods:

- Scroll **up** with the mouse wheel.
- Select **Zoom in** from the contextual menu.
- Use the **Ctrl + I (Command I on OS X)** keyboard shortcut.

Zoom out

To zoom in on an image, use any of the following methods:

- Scroll **down** with the mouse wheel.
- Use the **Ctrl + O (Command O on OS X)** keyboard shortcut.
- Select **Zoom out** from the contextual menu.

Rotate

To rotate an image, use either of the following methods:

- Use the **Ctrl + Right-Click + Drag (Command + Right-Click + Drag on OS X)** shortcut.
- Select **Rotate** from the contextual menu. This rotates the image exactly 90 degrees clockwise.

Refresh

To refresh (or reset) an image, use either of the following methods:

- Use the **Ctrl + T (Command + T on OS X)** keyboard shortcut.
- Select **Refresh** from the contextual menu.

Move

To move an image, use either of the following methods:

- Use the **Arrow Keys** on your keyboard.
- Use the **Shift + Left-Click + Drag** shortcut.

Pan

To pan an image, **click and drag** the image with your mouse.

Integrating External Tools

Sometimes an external tool which can be launched from the command line and which is different than a *FO processor* is needed. Oxygen XML Developer offers you the option of integrating such a tool by specifying just the command line for starting the executable file and its working directory. To integrate such a tool, *open the Preferences dialog box* and go to **External Tools**.

If the external tool is applied on one of the files opened in Oxygen XML Developer, *enable the option* for saving all edited files automatically when an external tool is applied.

External tools can be launched from the **External tools** drop-down menu in the **Tools** toolbar or from the **Tools >**

External tools submenu. While the action is running its icon is a stop icon . When the tool has finished running, it changes the icon back to the original run icon . Note that even though you can stop the external tool by invoking the action again while it is running, that doesn't mean you can also stop the processes spawned by that external tool. This is especially a limiting factor when running a batch file as the batch will be stopped but without actually stopping the processes that the batch was running at that time.

Integrating the Ant Tool

As example let us integrate *the Ant build tool* in Oxygen XML Developer:

- [Download](#) and [install](#) *Ant* on your computer.
- Test your *Ant* installation from the command-line interface in the directory where you want to use *Ant* from Oxygen XML Developer, for example run the `clean` target of your `build.xml` file `C:\projects\XMLproject\build.xml`:

```
ant clean
```

- [Open the Preferences dialog box](#) and go to **External Tools**.
- Create a new external tool entry with the name **Ant tool**, the working directory `C:\projects\XMLproject` and the command line `"C:\projects\XMLproject\ant.bat" clean` obtained by browsing to the `ant.bat` file from directory `C:\projects\XMLproject`.
- Run the tool from **Tools > External Tools > Ant tool**. You can see the output in the **Command results** panel:

```
Started: "C:\projects\XMLproject\ant.bat" clean
Buildfile: build.xml

clean:
[echo] Delete output files.
[delete] Deleting 5 files from C:\projects\XMLproject

BUILD SUCCESSFUL
Total time: 1 second
```

Chapter 18

Configuring Oxygen XML Developer

Topics:

- [*Preferences*](#)
- [*Configuring Options*](#)
- [*Importing / Exporting Global Options*](#)
- [*Reset Global Options*](#)
- [*Configuring the Layout of the Views and Editors*](#)
- [*Configure Toolbars*](#)
- [*Scenarios Management*](#)
- [*Editor Variables*](#)
- [*Custom System Properties*](#)
- [*Localizing the User Interface*](#)
- [*Setting a Java Virtual Machine Parameter in the Launcher Configuration File / Start-up Script*](#)

This chapter presents all the user preferences and options that allow you to configure various features, or the application itself, and the editor variables that are available for customizing the user-defined commands.

Preferences

You can configure Oxygen XML Developer options using the **Preferences** dialog box.

To open the preferences dialog box, go to **Options > Preferences**.

You can select the preference page you are interested in from the tree on the left of the **Preferences** dialog box. You can filter the tree by typing in the filter box above the tree.

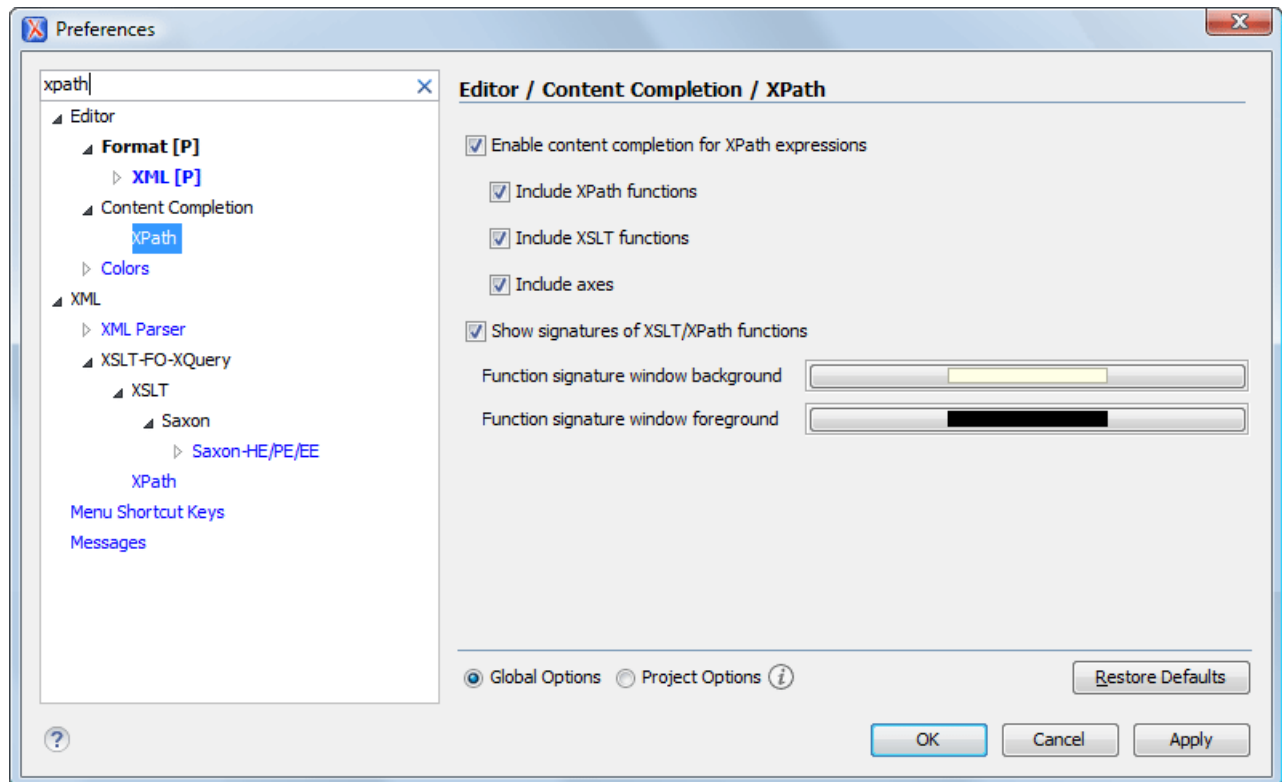


Figure 329: The Search Field in the Preferences Dialog Box

You can restore options to their default values by pressing the **Restore Defaults** button, available in each preferences page.

Press  or **F1** for help on any preferences page.

Preferences Directory Location

A variety of resources (such as global options, license information, and history files) are stored in a preferences directory (com.oxygenxml) that is in the following locations:

- **Windows (Vista, 7, 8, 10)** - [user_home_directory]\AppData\Roaming\com.oxygenxml
- **Windows XP** - [user_home_directory]\Application Data\com.oxygenxml
- **Mac OS X** - [user_home_directory]/Library/Preferences/com.oxygenxml
- **Linux/Unix** - [user_home_directory]/.com.oxygenxml

Global Preferences

The global options cover a number of aspects of the overall operation of Oxygen XML Developer. To configure the **Global** options, [open the Preferences dialog box](#) and go to **Global**.

The following options are available in the **Global** preferences page:

- **Automatic Version Checking** - This option sets whether Oxygen XML Developer will check for a new version on startup.
- **Check for notifications** - If enabled, the application will check for various types of messages from the Oxygen XML Developer website and they will be displayed in the status bar. The types of messages include the addition of new videos on the website, the announcement of upcoming webinars and conferences where the Oxygen XML Developer team will participate, and more. This option is enabled by default.
- **Language** - This option sets the language used in the user interface to English, French, German, Dutch, or Japanese. You must restart Oxygen XML Developer for the change to take effect.
- **Other language** - This option sets the language used in the user interface using an interface localization file. For details about creating this file, see [Localizing the User Interface](#) on page 822. You can use this option to set the language of the user interface to a language that is not shipped with Oxygen XML Developer.



Note: If some interface labels are not rendered correctly after restarting the application, (for example Chinese or Korean characters are not displayed correctly), make sure that your operating system has the appropriate language pack installed (for example the East-Asian language pack).

- **Line separator** - This option sets the line separator used when saving files. Use **System Default** to select the normal line separator for your OS. If you want the existing file separator of a file to be maintained, regardless of your current OS, check **Detect the line separator on file open**.
- **Detect the line separator on file open** - When this option is selected, the editor detects the line separator when a file is loaded and it uses it when the file is saved. New files are saved using the line separator defined by the **Line separator** option.
- **Default Internet browser** - This option sets the Web browser that Oxygen XML Developer will use to do the following:
 - Open (X)HTML or PDF transformation results.
 - Open a web page (for example, pointing to specific paragraphs in the W3C recommendation of XML Schema if there are XML Schema validation errors).

If you leave this setting blank, the system default browser will be used.

- **Open last edited files from project** - When this option is enabled, Oxygen XML Developer opens the files you had open the last time you used a project whenever you open the application or switch to that project.
- **Beep on operation finished** - When this option is selected, Oxygen XML Developer beeps when a validation or transform action ends. Different tones are used for success and failure. The tones used may depend on your operating system's sound settings.
- **Show memory status** - When this option is selected, the memory Oxygen XML Developer uses is displayed in the status bar. To free memory, click the  **Free unused memory** button located at the right side of the status bar. The memory status bar turns yellow or red when Oxygen XML Developer uses too much memory. You can change the amount of memory available to Oxygen XML Developer by [changing the parameters of the application launcher](#).
- **Check opened files for file system changes** - When this option is selected, Oxygen XML Developer checks the content of the all opened editors to see if they have been updated by another application. If the file has changed, Oxygen XML Developer will ask you if you want to reload the file.
 - **Auto update unmodified editors on file system changes** - If this option is selected, Oxygen XML Developer automatically updates unmodified editors if the edited file changes externally.
- **Show Java vendor warning at startup** - If this option is selected, Oxygen XML Developer displays a warning on startup if a non-recommended version of the Java virtual machine is being used.
- **File Chooser Dialog** - This options sets the directory that will be shown when the [Open file dialog box](#) is displayed.
 - **Last visited directory** - The last visited folder will be displayed.
 - **Directory of the edited file** - The folder where the currently edited file is stored will be displayed.
- **Show hidden files and directories** - If this option is selected, Oxygen XML Developer shows system hidden files and folders in the file browser dialog box and the folder browser dialog box. This setting is not available on OS X.

Appearance Preferences

This preferences page contains various options that allow you to change the appearance of the user interface of Oxygen XML Developer. To configure the **Appearance** options, [open the Preferences dialog box](#) and go to **Appearance**.

The following options are available in the **Appearance** preferences page:

Look and Feel

This option allows you to change the graphic style (look and feel) of the user interface. Depending on the operating system, you can choose between various predefined style options.

Theme

This option allows you to choose predefined color themes that will be applied over the entire user interface. You can select between the following:

- **Light** (default theme in Windows)
- **Classic** (default theme in MAC OS)
- **Graphite**
- **Ultramarine**

You can also change various appearance related options in other preference pages for the selected theme by clicking on the various links in this section. The result of the applied modifications is displayed in the **XML Syntax Highlight Preview** area.

Custom Themes

You can also create custom themes to share with others or use in other installations of Oxygen XML Developer. To create a custom theme, follow these steps:

1. Select a **Theme** to use as a base.
2. Configure the desired options in any of the option pages listed in this preferences page.
3. Click **Export** and specify a name for your custom theme. If you save the theme to the default file path, your custom theme will immediately appear in the **Theme** drop-down list. Otherwise, if you save it to another location, you can use the **Import** button to make it appear in the drop-down list.



Note: In OS X (starting with Yosemite), if you choose **Graphite** for the **Theme**, it is recommended that you enable the *Use dark menu and Dock* option that is found in **System Preferences > General**.



Note: In Windows, if a high contrast theme is detected, and the **Look and Feel** option is set to **Default** or **Windows** and the **Theme** option is set to **Classic**, Oxygen XML Developer inherits the high contrast theme colors that are set in the operating system.

Reset

Resets the theme to its default values (this option is available when the theme is modified).

Rename

Changes the name of the theme (not available for default or predefined themes).

Delete

Removes the selected theme (not available for default or predefined themes).

Import

Allows you to import a color theme from an XML theme file. You can use this option to load an exported [custom theme](#).

Export

Allows you to export the current color theme into an XML theme file that can then be shared with others or imported into another installation of Oxygen XML Developer.

Colors Preferences

Oxygen XML Developer allows you configure the colors for frames, dialog boxes, controls, and commands. To configure the **Colors**, [open the Preferences dialog box](#) and go to **Appearance > Colors**.

Clicking the color button for any of the options opens a **Choose color** dialog box. It includes several tabs that allow you to configure the color in numerous ways. This page allows you to select and configure the color for the following:

Background Colors

Background - Background color for various general user interface items.

Components background - Background color for various components (such as text fields, views, tables, and dialog boxes).

Components selection background - Background color for the current selections in certain components, such as some views and panes.

Components inactive selection background - Background color for a selection in a view that is not the current focus.

Menus and toolbars background - Background color for specific components such as menus, toolbars, and tabs.

Menus and toolbars selection background - (This option is not available for Mac OS) Background color for menu selections and toolbar buttons.

View titles background - Background color for the titles of view and tabs.

Status bar background - Background color of the status bar at the bottom of the editor.

Foreground Colors

Foreground - Foreground color for various general user interface items.

Component selection foreground - Foreground color for the current selection.

Disabled foreground - Foreground color for various components that are not the current focus (such as views other than the currently selected one).

Link foreground - Foreground color for links in views and dialog boxes.

View titles foreground - Foreground color for the title bar of views.

Status bar foreground - Foreground color for the text in the status bar at the bottom of the editor.

Other Colors

Borders and table grids - Color for certain borders and table grid lines.

Text component border - Color for the borders of text fields and drop-down lists.

View/Editor tabs border - Color for the borders of views and tabs.

Scroll bars, chevrons - Color for scroll bars (navigation bars) and chevrons (button to expand a non-visible area).

Separator - Color for the separators in toolbars, menus, and dialog boxes.



Note: You must restart the application for your changes to be applied.

Fonts Preferences

Oxygen XML Developer allows you to choose the fonts to be used in the **Text**, **Design**, and **Grid** editor modes. To configure the font options, [open the Preferences dialog box](#) and go to **Appearance > Fonts**.

The following options are available:

Editor

Allows you to choose the font that will be used in the editor.



Note: On Mac OS X, the default font, Monaco, cannot be rendered in bold.

Schema default font

This option allows you to choose the font to be used in:

- The **Design** mode of the [XML Schema editor](#).
- Images with schema diagram fragments that are included in the HTML documentation generated from an XML Schema.

Text antialiasing

This option allows you to set the text anti-aliasing behavior:

- **Default** - Allows the application to use the setting of the operating system, if available.
- **On** - Sets the text anti-aliasing to pixel level.
- **Off** - Disables text anti-aliasing.
- Sub-pixel anti-aliasing modes, such as GASP, LCD_HRGB, LCD_HBGR, LCD_VRGB, and LCD_VBGR.

Text components

This option allows you to choose the font to be used in text boxes within the interface.

GUI

This option allows you to choose the font to be used for user interface labels.



Note: You must restart the application for your changes to be applied.

Application Layout Preferences

Oxygen XML Developer offers various perspectives and views that you can arrange in different layouts to suit your needs.

To configure the application layout options, [open the Preferences dialog box](#) and go to **Application Layout**. The following options are available:

- **Select application layout** section
 - **Default** - Uses the default layout for all perspectives. Any modification of this layout (such as closing views, displaying views, or a new view arrangement) is saved on exit and reloaded at start-up.
 - **Predefined** - Allows you to choose one of the predefined layouts:
 - **Advanced** - All views are displayed.
 - **Author** - An authoring-oriented layout, which displays views such as **Project**, **Archive Browser**, **DITA Maps Manager**, **Outline**, **Attributes**, **Model**, and **Elements**.
 - **Basic** - Only the **Project** view and the **Outline** view are visible. Recommended when you edit XML content and you need maximum screen space.
 - **Schema development** - The **Project**, **Component Dependencies**, **Resource Hierarchy/Dependencies**, **Outline**, **Palette**, and **Attributes** views are displayed.
 - **XQuery development** - The **Project**, **Outline**, **Transformation Scenarios**, **XSLT/XQuery input** views are displayed.
 - **XSLT development** - The **Project**, **Component Dependencies**, **Resource Hierarchy/Dependencies**, **Outline**, **Attributes**, **Model**, **XSLT/XQuery input**, **XPath Builder**, and **Transformation Scenarios** views are displayed.
 - **Custom** - Allows you to specify a custom layout to be used. You can save your preferred layout using **Window > Export Layout**, then enter the location of the saved layout file in this setting.
 - **Reset layout at startup** - When this option is enabled, Oxygen XML Developer forgets any changes made to the layout during a session and reloads the default layout the next time it is started. This is useful when you want to keep a fixed layout from one session to another.
 - **Remember layout changes for each project** - When this options is enabled, Oxygen XML Developer saves layouts individually for each project. When you switch projects, the layout you last used for that project is loaded automatically.
- **Allow detaching editors from main window** - When this options is enabled, you can drag and drop an editor window outside of the main screen. This is useful especially when you are using two monitors and you want to view files side by side.
 - **Note:** If the main screen is maximized, you cannot drag and drop an editor outside of it.
- **View tab placement** - This option specifies whether the *View* tabs are located at the top or bottom of the window.
- **Editor tab placement** - This option specifies whether the *Editor* tabs are located at the top or bottom of the window.

The changes you make to any layout are preserved between working sessions. The predefined *layout* files are saved in the preferences directory of Oxygen XML Developer.

To watch our video demonstration about configuring the user interface of Oxygen XML Developer, go to http://oxygenxml.com/demo/Dockable_Views.html.

Add-ons Preferences

You can use add-ons to enhance the functionality of Oxygen XML Developer. To configure the **Add-ons** options, [open the Preferences dialog box](#) and go to **Add-ons**. The following options are available in the Add-ons preferences page:

- **Enable automatic updates checking** - When this option is selected, Oxygen XML Developer will search for available updates automatically.
- **Add-on Sites URLs** - This is a list of the URLs for the add-on sites. You can add, edit, and delete sites in this list.

Document Type Association Preferences

Oxygen XML Developer uses document type associations to associate a *document type* with a set of functionality provided by a framework. To configure the **Document Type Association** options, [open the Preferences dialog box](#) and go to **Document Type Association**.

The following actions are available in this preferences page:

Discover more frameworks by using add-ons update sites

Click on this link to specify URLs for framework add-on update sites.

Document Type Table

This table presents the currently defined document type associations (frameworks), sorted by priority and alphabetically. Each edited document type has a set of association rules (used by the application to detect the proper document type association to use for an opened XML document). A rule is described by:

- **Namespace** - Specifies the namespace of the root element from the association rules set (* (*any*) by default). If you want to apply the rule only when the root element has no namespace, leave this field empty (remove the **ANY_VALUE** string).
- **Root local name** - Specifies the local name of the root element (* (*any*) by default).
- **File name** - Specifies the name of the file (* (*any*) by default).
- **Public ID** - Represents the Public ID of the matched document.
- **Java class** - Presents the name of the Java class, which is used to determine if a document matches the rule.

New

Opens a [Document type configuration dialog box](#) that allows you to add a new association.

Edit

Opens a [Document type configuration dialog box](#) that allows you to edit an existing association.



Note: If you try to edit an existing association type when you do not have write permissions to its store location, a dialog box will be shown asking if you want to extend the document type.

Duplicate

Opens a [Document type configuration dialog box](#) that allows you to duplicate the configuration of an existing document type association.

Extend

Opens a [Document type configuration dialog box](#) that allows you to extend an existing document type. You can add or remove functionality starting from a base document type. All of these changes will be saved as a patch. When the base document type is modified and evolves (for example, from one application version to another) the extension will evolve along with the base document type, allowing it to use the new actions added in the base document type.

Delete

Deletes the selected document type associations.

Enable DTD/XML Schema processing in document type detection

When this option is enabled (default value), the matching process also examines the DTD/XML Schema associated with the document. For example, the fixed attributes declared in the DTD for the root element are also analyzed, if this is specified in the association rules. This is especially useful if you are writing DITA customizations. DITA topics and maps are also matched by looking for the `DITAArchVersion` attribute of the root element. This attribute is specified as `default` in the DTD and it is detected in the root element, helping Oxygen XML Developer to correctly match the DITA customization.

Only for local DTDs/XML Schemas

When this option is enabled (default value), only the local DTDs / XML Schemas will be processed.

Enable DTD/XML Schema caching

When this option is enabled (default value), the associated DTDs or XML Schema are cached when parsed for the first time, improving performance when opening new documents with similar schema associations.

Locations Preferences

Oxygen XML Developer allows you to change the location where *document types (frameworks)* are stored, and to specify additional framework directories. The **Locations** preferences page allows you to specify the main `frameworks` folder location. You can choose between the **Default** directory (`[OXYGEN_DIR]/frameworks`) or a **Custom** specified directory. You can also change the current `frameworks` folder location value using the `com.oxygenxml.editor.frameworks.url` system property set either in the application's *.vmoptions configuration files or in the startup scripts*.

A list of additional `frameworks` directories can also be specified. The application will look in each of those folders for additional document type configurations to load. Use the **Add**, **Edit** and **Delete** buttons to manage the list of folders.

A document type (configuration) can be loaded from the following locations:

- Internal preferences - The document type configuration is stored in the application *Internal preferences*.
- Additional frameworks directories - The document type configuration is loaded from one of the specified **Additional frameworks directories** list.
- Add-ons - An add-on can contribute a framework. You can manage the add-ons locations in the *Add-ons preferences page*.
- The `frameworks` folder - The main folder containing framework configurations.

All loaded document type configurations are first sorted by priority, then by document type name and then by load location (in the exact order specified above). When an XML document is opened, the application chooses the first document type configuration from the sorted list which matches the specific document.

All loaded document type configurations are first sorted by priority, then by document type.

The Document Type Configuration Dialog Box

The **Document type** configuration dialog box allows you to create or edit a *Document Type Association* (framework). The following fields are available in this dialog box:

- **Name** - The name of the *Document Type Association*.
- **Storage** - Displays the type of location where the framework configuration file is stored. Can be one of: **External** (framework configuration is saved in a file) or **Internal** (framework configuration is stored in the application's internal options).



Note: If you set the **Storage** to **Internal** and the document type association settings are already stored in a framework file, the file content is saved in the application's internal options and the file is removed.

- **Description** - A detailed description of the framework.
- **Priority** - Depending on the priority level, Oxygen XML Developer establishes the order in which the existing document type associations are evaluated to determine the type of a document you are opening. It can be one of the following: Lowest, Low, Normal, High, or Highest. You can set a higher priority to *Document Type Associations* you want to be evaluated first.

- **Initial edit mode** - Sets the default edit mode when you open a document for the first time.

You are able to configure the options of each *framework* in the following tabs:

- [Association rules](#)
- [Schema](#)
- [Classpath](#)
- [Author](#)
- [Templates](#)
- [Catalogs](#)
- [Transformation](#)
- [Validation](#)
- [Extensions](#)

The Association Rules Tab

By combining multiple association rules you can instruct Oxygen XML Developer to identify the type of a document. An Oxygen XML Developer *association rule* holds information about *Namespace*, *Root local name*, *File name*, *Public ID*, *Attribute*, and *Java class*. Oxygen XML Developer identifies the type of a document when the document matches at least one of the *association rules*. Using the **Document type rule** dialog box, you can create *association rules* that activate on any document matching all the criteria in the dialog box.

In the **Association rules** tab you can perform the following actions:

New

Opens the **Document type rule** dialog box allowing you to create *association rules*.

Edit

Opens the **Document type rule** dialog box allowing you to edit the properties of the currently selected *association rule*.

Delete

Deletes the currently selected *association rules*.

Move Up

Moves the selection to the previous *association rule*.

Move Down

Moves the selection to the following *association rule*.

The Schema Tab

In the **Schema** tab, you can specify a schema that Oxygen XML Developer uses if an XML document does not contain a schema declaration and no default validation scenario is associated with it.

To set the **Schema URL**, use [editor variables](#) to specify the path to the Schema file.



Note: It is a good practice to store all resources in the framework directory and use the `${framework}` editor variable to reference them. This is a recommended approach to designing a self-contained document type that can be easily maintained and shared between different users.

The Classpath Tab

The **Classpath** tab displays a list of folders and JAR libraries that hold implementations for API extensions, implementations for custom **Author** mode operations, different resources (such as stylesheets), and framework translation files. Oxygen XML Developer loads the resources looking in the folders in the order they appear in the list.

In the **Classpath** tab you can perform the following actions:

New

Opens a dialog box that allows you to add a resource in the **Classpath** tab.

**Edit**

Opens a dialog box that allows you to edit a resource in the **Classpath** tab.

**Delete**

Deletes the currently selected resource.

**Move Up**

Moves the selection to the previous resource.

**Move Down**

Moves the selection to the following resource.

The *Use parent classloader from plugin with ID* specifies the ID of a plugin. The current framework has access to the classes loaded for the plugin.

The Author Tab

The **Author** tab is a container that holds information regarding the CSS file used to render a document in the **Author** mode, and regarding framework-specific actions, menus, contextual menus, toolbars, and content completion list of proposals.

The options that you configure in the **Author** tab are grouped in the following sub-tabs: *CSS*, *Actions*, *Menu*, *Contextual menu*, *Toolbar*, *Content Completion*.

CSS

The **CSS** subtab contains the CSS files that Oxygen XML Developer uses to render a document in the **Author** mode. In this subtab, you can set *main* and *alternate* CSS files. When you are editing a document in the **Author** mode, you can switch between these CSS files from the **Styles** drop-down menu on the **Author Styles** toolbar.

The following actions are available in the **CSS** subtab:

**New**

Opens a dialog box that allows you to add a CSS file.

**Edit**

Opens a dialog box that allows you to edit a CSS file.

**Delete**

Deletes the currently selected CSS file.

**Move Up**

Moves the selected CSS file up in the list.

**Move Down**

Moves the selected CSS file down in the list.

Enable multiple selection of alternate CSSs

Allows users to apply multiple alternate styles, as layers, over the main CSS style. This option is enabled by default for DITA document types.

ignore CSSs from the associated document type

The CSS files set in the CSS tab are overwritten by the CSS files specified in the document itself.

merge them with CSSs from the associated document type

The CSS files set in the CSS tab are merged with the CSS files specified in the document itself.

Actions

The **Actions** sub-tab holds the framework specific actions. Each action has a unique ID, a name, a description, and a shortcut key.

The following actions are available in this sub-tab:

**New**

Opens [the Action dialog box](#) that allows you to add an action.

**Duplicate**

Duplicates the currently selected action.

**Edit**

Opens a dialog box that allows you to edit an existing action.

**Delete**

Deletes the currently selected action.

The Action Dialog Box

To edit an existing document type action or create a new one, [open the Preferences dialog box](#), go to **Document Type Association**, select a document type, and click **Edit** or **New**. The [Document type configuration dialog box](#) is presented. In this dialog box, go to the **Author** tab, click **Actions**, select an action, and click  **Edit**, or to create a new action click  **New**.

Action

ID:

Name: Menu access key:

Description:

[How to translate frameworks](#)

Large icon (20x20):

Small icon (16x16):

Shortcut key:

☒ Enable platform-independent shortcut keys ⓘ

Operations

1

When this XPath expression is true
(This XPath expression applies only to elements and attributes)
[More details...](#)

invoke the operation

with the arguments

Name	Description	Type	Value
element	The element to surround with.	Fragment	

Operation priority:

☐ Evaluate activation XPath expressions even in read-only contexts

Figure 330: The Action Dialog Box

The following options are available in the **Action** dialog box:

- **ID** - Specifies a unique action identifier.
- **Name** - Specifies the name of the action. This name is displayed as a tooltip or as a menu item.

- **Menu access key** - In Windows, the menu items are accessed using the shortcut when the menu is visible. The letter is visually represented by underlining the first occurrence of the letter in the menu item **Name**.
- **Description** - A description of the action.
- **Large icon** - Allows you to select an image for the icon that Oxygen XML Developer uses for the toolbar action.



Tip: A good practice is to store the image files inside the framework directory and use the `${frameworks}` editor variable to make the image relative to the framework location. If the images are bundled in a *jar* archive (for instance, along with some Java operations implementation), it is convenient to reference the images by their relative path location in the *class-path*.

- **Small icon** - Allows you to select an image for the icon that Oxygen XML Developer uses for the contextual menu action.
- **Shortcut key** - This field allows you to configure a shortcut key for the action that you are editing. The + character separates the keys. If the **Enable platform-independent shortcut keys** checkbox is enabled, the shortcut that you specify in this field is platform-independent and the following modifiers are used:
 - M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
 - M2 represents the **Shift** key.
 - M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
 - M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.

- **Operations**

In this section of the **Action** dialog box, you configure the functionality of the action that you are editing. An action has one or more operation modes. The evaluation of an XPath expression activates an operation mode. The first enabled operation mode is activated when you trigger the action. The scope of the XPath expression must consist only of element nodes and attribute nodes of the edited document. Otherwise, the XPath expression does not return a match and does not fire the action. For more details see: [Activation of Multiple Functions for Actions using XPath Expressions](#) on page 742.

The following options are available in this section:

- **When this XPath expression is true** - An XPath 2.0 expression that applies to elements and attributes. For more details see: [Activation of Multiple Functions for Actions using XPath Expressions](#) on page 742.
- **invoke the operation** - Specifies the invoked operation.
- **with the arguments** - Specifies the arguments of the invoked operation.
- **Edit** - Allows you to edit the arguments of the operation.
- **Operation priority** - Increases or decreases the priority of an operation. The operations are invoked in the order of their priority. If more than one XPath expression is true, the operation with the highest priority is invoked.
 - **Add** - Adds an operation.
 - **Remove** - Removes an operation.
 - **Duplicate** - Duplicates an operation.
- **Evaluate activation XPath expressions even in read-only contexts** - If this checkbox is enabled, the action can be invoked even when the cursor is placed in a read-only location.

Activation of Multiple Functions for Actions using XPath Expressions

An **Author** mode action can have multiple functions, each function invoking an **Author** mode operation with certain configured parameters. Each function of an action has an XPath 2.0 expression for activating it.

For each function of an action, the application will check if the XPath expression is fulfilled (when it returns a not empty nodes set or a *true* result). If it is fulfilled, the operation defined in the function will be executed.

Two special XPath extension functions are provided: the `oxy:allows-child-element()` function that you can use to check whether an element is valid in the current context, considering the associated schema and the `oxy:current-selected-element()` function that you can use to get the currently selected element.

The `oxy:allows-child-element()` Function

This extension function allows author actions to be available in a context only if the associated schema permits it.

The `oxy:allows-child-element()` is evaluated at the cursor position and has the following signature:

`oxy:allows-child-element($childName, ($attributeName, $defaultAttributeValue, $contains?)).`

The following parameters are supported:

childName

The name of the element that you want to check if it is valid in the current context. Its value is a string that supports the following forms:

- The child element with the specified local name that belongs to the default namespace.

```
oxy:allows-child-element("para")
```

The above example verifies if the `para` element (of the default namespace) is allowed in the current context.

- The child element with the local name specified by any namespace.

```
oxy:allows-child-element("*:para")
```

The above example verifies if the `para` element (of any namespace) is allowed in the current context.

- A prefix-qualified name of an element.

```
oxy:allows-child-element("prefix:para")
```

The prefix is resolved in the context of the element where the cursor is located. The function matches on the element with the `para` local name from the previous resolved namespace. If the prefix is not resolved to a namespace, the function returns a value of `false`.

- A specified namespace-URI-qualified name of an element.

```
oxy:allows-child-element("{namespaceURI}para")
```

The `namespaceURI` is the namespace of the element. The above example verifies if the `para` element (of the specified namespace) is allowed in the current context.

- Any element.

```
oxy:allows-child-element("**")
```

The above function verifies if any element is allowed in the current context.



Note: A common use case of `oxy:allows-child-element("**")` is in combination with the `attributeName` parameter.

attributeName

The attribute of an element that you want to check if it is valid in the current context. Its value is a string that supports the following forms:

- The attribute with the specified name from no namespace.

```
oxy:allows-child-element("", "class", " topic/topic ")
```

The above example verifies if an element with the `class` attribute and the default value of this attribute (that contains the `topic/topic` string) is allowed in the current context.

- The attribute with the local name specified by any namespace.

```
oxy:allows-child-element("", "*:localname", " topic/topic ")
```

- A qualified name of an attribute.

```
oxy:allows-child-element("", "prefix:localname", " topic/topic ")
```

The prefix is resolved in the context of the element where the cursor is located. If the prefix is not resolved to a namespace, the function returns a value of `false`.

defaultAttributeValue

A string that represents the default value of the attribute. Depending on the value of the next parameter, the default value of the attribute must either contain this value or be equal with it.

contains

An optional boolean. The default value is `true`. For the `true` value, the default value of the attribute must contain the `defaultAttributeValue` parameter. If the value is `false`, the two values must be the same.

The `oxy:current-selected-element()` Function

This function returns the fully selected element. If no element is selected, the function returns an empty sequence.

```
oxy:current-selected-element()[self::p]/b
```

This example returns the `b` elements that are children of the currently selected `p` element.

Menu

In the **Menu** sub-tab you configure what *framework* specific actions appear in the Oxygen XML Developer menu. The sub-tab is divided in two sections: **Available actions** and **Current actions**.

The **Available actions** section presents a table that displays the actions defined in the **Actions** sub-tab, along with their icon, ID, and name. The **Current actions** section holds the actions that are displayed in the Oxygen XML Developer menu. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button.

To add an image in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:



Edit

Edits an item.



Remove

Removes an item.



Move Up

Moves an item up.



Move Down

Moves an item down.

Contextual Menu

In the **Contextual menu** sub-tab you configure what framework-specific action the **Content Completion Assistant** proposes. The sub-tab is divided in two sections: **Available actions** and **Current actions**.

The **Available actions** section presents a table that displays the actions defined in the **Actions** sub-tab, along with their icon, ID, and name. The **Current actions** section holds the actions that are displayed in the contextual menu of a document belonging to the edited framework. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an action in this section as a child of the currently selected action use the

 **Add as child** button.

The following actions are available in the **Current actions** section:



Edit

Edits an item.



Remove

Removes an item.

 Move Up

Moves an item up.

 Move Down

Moves an item down.

Toolbar

In the **Toolbar** sub-tab you configure what framework-specific action the Oxygen XML Developer toolbar holds. The sub-tab is divided in two sections: **Available actions** and **Current actions**.

The **Available actions** section presents a table that displays the actions defined in the **Actions** sub-tab, along with their icon, ID, and name. The **Current actions** section holds the actions that are displayed in the Oxygen XML Developer toolbar when you work with a document belonging to the edited framework. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an action in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:

 Edit

Edits an item.

 Remove

Removes an item.

 Move Up

Moves an item up.

 Move Down

Moves an item down.

Content Completion

In the **Content Completion** sub-tab you configure what framework-specific the **Content Completion Assistant** proposes. The sub-tab is divided in two sections: **Available actions** and **Current actions**.

The **Available actions** section presents a table that displays the actions defined in the **Actions** sub-tab, along with their icon, ID, and name. The **Current actions** section holds the actions that the **Content Completion Assistant** proposes when you work with a document belonging to the edited framework. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an action in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:

 Edit

Edits an item.

 Remove

Removes an item.

 Move Up

Moves an item up.

 Move Down

Moves an item down.

The Templates Tab

The **Templates** tab specifies a list of directories in which new file templates are located. These file templates are gathered from all the document types and presented in the **New** document dialog box.

Use the  **Add**,  **Edit**, and  **Delete** button to add, configure, or remove templates. The **Templates directory** text field specifies the path to the directory of the template. It is recommended to use relative paths since absolute paths will make it difficult to share the templates with others.

You can also use wildcards in the paths for the template directories.

For example, using the following wildcard in the path would add all the template folders found inside the **templates** directory:

```
${frameworkDir}/templates/*
```

The Catalogs Tab

The **Catalogs** tab specifies a list of *XML catalogs* which are added to all the catalogs that Oxygen XML Developer uses to resolve resources.

The Transformation Tab

In the **Transformation** tab you configure the transformation scenarios associated with the framework you are editing. These are the transformation scenarios that are presented in the **Configure Transformation Scenarios** dialog box as associated with the type of the edited document.

You can set one or more of the scenarios from the **Transformation** tab as default. The scenarios set here as default are rendered bold in the **Configure Transformation Scenarios** dialog box and are also displayed on the tooltip of the **Apply transformation Scenario(s)**.

The **Transformation** tab offers the following options:



New

Opens the **New scenario** dialog box allowing you to create a new transformation scenario.



Edit

Opens the **Edit scenario** dialog box allowing you to edit the properties of the currently selected transformation scenario.



Delete

Deletes the currently selected transformation scenario.



Import scenarios

Imports transformation scenarios.



Export selected scenarios

Export transformation scenarios.



Move Up

Moves the selection to the previous scenario.



Move Down

Moves the selection to the next scenario.

The Validation Tab

In the **Validation** tab you configure the validation scenarios associated with the framework you are editing. These are the validation scenarios that are presented in the **Configure Validation Scenarios** dialog box as associated with the type of the edited document.

You can set one or more of the scenarios from the **Validation** tab as default. The scenarios set here as default are rendered bold in the **Configure Transformation Scenarios** dialog box and are also displayed on the tooltip of the **Apply transformation Scenario(s)** button.

The **Validation** tab offers the following options:

**New**

Opens the **New scenario** dialog box allowing you to create a new validation scenario.

**Edit**

Opens the **Edit scenario** dialog box allowing you to edit the properties of the currently selected validation scenario.

**Delete**

Deletes the currently selected validation scenario.

**Import scenarios**

Imports transformation scenarios.

**Export selected scenarios**

Export transformation scenarios.

**Move Up**

Moves the selection to the previous scenario.

**Move Down**

Moves the selection to the next scenario.

The Extensions Tab

The **Extension** tab specifies implementations of Java interfaces used to provide advanced functionality to the document type.

Libraries containing the implementations must be present in the *classpath* of your document type. The Javadoc available at <http://www.oxygenxml.com/InstData/Editor/SDK/javadoc/> contains details about how each API implementation functions.

Encoding Preferences

Oxygen XML Developer lets you configure how character encodings are recognized when opening files and which encodings are used when saving files. To configure encoding options, *open the Preferences dialog box* and go to **Encoding**. The following encoding options are available:

- **Fallback character encoding** - Default character encoding of non-XML documents if their character encoding cannot be determined from other sources (like, for example, specified in the document itself, or determined by the file type).



Note: For certain document types, the following encoding detection rules are used:

- For XML, DTD and CSS documents, Oxygen XML Developer tries to collect the character encoding from the document. If no such encoding is found, then *UTF-8* is used.
- For JavaScript, JSON, SQL, XQuery, and RNC, the *UTF-8* encoding is used.

- **UTF-8 BOM handling** - This setting specifies how to handle the *Byte Order Mark* (BOM) when Oxygen XML Developer saves a UTF-8 XML document:

- **Don't Write** - do not save the BOM bytes. Loaded BOM bytes are ignored.
- **Write** - save the BOM bytes.
- **Keep** - do not alter the BOM declaration of the currently open file. This is the default option.



Note: The UTF-16 BOM is always preserved. UTF-32 documents have a *big-endian* byte order.

- **Encoding errors handling** - This setting specifies how to handle characters that cannot be represented in the character encoding that is used when the document is opened. The available options are:

- **REPORT** - displays an error identifying the character that cannot be represented in the specified encoding. Unrecognized characters are rendered as an empty box. This is the default option.
- **IGNORE** - the error is ignored and the character is not included in the document displayed in the editor.



Attention: If you edit and save the document, the characters that cannot be represented in the specified encoding are dropped.

- **REPLACE** - the character is replaced with a standard replacement character. For example, if the encoding is UTF-8, the replacement character has the Unicode code FFFD, and if the encoding is ASCII, the replacement character code is 63.

Editor Preferences

Oxygen XML Developer lets you configure how the editor appears. To configure the appearance of the text editor, [open the Preferences dialog box](#) and go to **Editor**.

The following options are available:

- **Selection background color** - Sets the background color of selected text.
- **Selection foreground color** - Sets the text color of selected text.
- **Completion proposal background** - Sets the background color of the content completion window.
- **Completion proposal foreground** - Sets the foreground color of the content completion window.
- **Documentation window background** - Sets the background color of the documentation of elements suggested by the content completion assistant.
- **Documentation window foreground** - Sets the foreground color for the documentation of elements suggested by the content completion assistant.
- **Find highlight color** - Sets the color of the highlights generated by the **Find** and **Find all** actions.
- **XPath highlight color** - Sets the color of the highlights generated when you run an XPath expression.
- **Declaration highlight color** - Sets the color of the highlights generated by the **Find declaration** action.
- **Reference highlight color** - Sets the color of the highlights generated by the **Find reference** action.
- **Maximum number of highlights** - Sets the maximum number of highlights that Oxygen XML Developer displays.
- **Show TAB/NBSP/EOL/EOF marks** - Makes the TAB/NBSP/EOL/EOF characters visible in the editor. You can use the color picker to choose the color of the marks.
- **Show SPACE marks** - Makes the space character visible in the editor.
- **Can edit read only files** - If this option is selected, Oxygen XML Developer will let you edit, but not save, a read-only file. If the option is disabled, a warning message is displayed when you try to edit a read-only file.
- **Display quick-assist and quick-fix side hints** - Displays the Quick Assist and Quick Fix icon in the editor's left side line number stripe.
- **Undo history size** - Sets the maximum amount of undo operations you can perform in either of the editor modes (Text, Design, Grid).

Print Preferences

Oxygen XML Developer lets you configure how files are printed out of the editor. Note that these settings cover how files are printed directly from Oxygen XML Developer itself, not how they are printed after the XML source has been transformed by a publishing stylesheet. To configure the **Print** options, [open the Preferences dialog box](#) and go to **Editor > Print**.

This page allows you to customize the headers and footers added to a printed page when you print from the **Text** mode editor. These settings do not apply to the **Grid** and schema **Design** modes.

You can specify what is printed on the **Left**, **Middle**, and **Right** of the header and footer using plain text of any of the following variables:

- `${currentFileURL}` - Current file as URL, that is the absolute file path of the current edited document represented as URL.
- `${cfne}` - Current file name with extension. The current file is the one currently opened and selected.
- `${cp}` - Current page number. Used to display the current page number on each printed page in the **Editor / Print** Preferences page.

- `${tp}` - Total number of pages in the document. Used to display the total number of pages on each printed page in the **Editor / Print** Preferences page.
- `${env(VAR_NAME)}` - Value of the `VAR_NAME` environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the `${system(var.name)}` editor variable.
- `${system(var.name)}` - Value of the `var . name` Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as `-Dvar . name=var . value`. If you are looking for operating system environment variables, use the `${env(VAR_NAME)}` editor variable instead.
- `${date(pattern)}` - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#).
Example: yyyy-MM-dd;



Note: This editor variable supports both the `xs:date` and `xs:datetime` parameters. For details about `xs:date`, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about `xs:datetime`, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.

For example, to show the current page number and the total number of pages in the top right corner of the page, write the following pattern in the **Right** text area of the **Header** section: `${cp} of ${tp}`.

You can also set the **Color** and **Font** used in the header and footer. Default font is **SansSerif**.

You can place a line below the header or above the footer by selecting **Underline/Overline**.

Edit modes Preferences

Oxygen XML Developer lets you configure which [edit mode](#) a file is opened in the first time it is opened. This setting only affects the first time a file is opened. The current editing mode of each file is saved when the file is closed and restored the next time it is opened. To configure the **Edit modes** options, [open the Preferences dialog box](#) and go to **Editor > Edit modes**.

The initial edit mode can be one of the following:

- [Text](#)
- [Grid](#)
- **Design** (available only for the W3C XML Schema editor).

The Oxygen XML Developer Edit Modes Preferences Page

Editor	Edit Mode
XML Editor	Text
XSD Editor	Design
HTML Editor	Text
WSDL Editor	Text
XSL Editor	Text
NVDL Editor	Text
XProc Editor	Text
RNG Editor	Text
Schematron Editor	Text

Text Preferences

Oxygen XML Developer lets you configure how [text mode](#) editor appears. To configure the **Text** mode editor options, [open the Preferences dialog box](#) and go to **Editor > Edit modes > Text**.

The following preferences are available:

- **Editor background color** - Sets the background color of the **Text** editing mode, **Diff Files** editors and **Outline** view.
- **Editor cursor color** - Sets the color of the cursor.
- **Highlight current line** - Sets the foreground color of the line numbers displayed in the editor panels.
- **Show line numbers** - Shows line numbers in the editor panels and in the **Results** view of the Debugger perspective.
- **Show print margin** - In conjunction with the **Print margin column** option, allows you to set a safe print limit in the form of a vertical line displayed in the right side of the editor pane. You can also customize the print margin line color.
 - **Print margin column** - Safe print limit width measured in characters.
- **Line wrap** - Enables *soft wrap* of long lines, that is automatically wrap lines in edited documents. The document content is unaltered as the application does not use newline characters to break long lines.



Note: When you enable the **Line wrap** option, Oxygen XML Developer disables the **Highlight current line** option.

- **Cut / Copy whole line when nothing is selected** - Enables the *Cut* and *Copy* actions when nothing is selected in the editor. In this case the *Cut* and *Copy* actions operate on the entire current line.
- **Enable folding** - Displays the vertical stripe that holds the *folding markers*.
- **Highlight matching tag** - If you place the cursor on a start or end tag, Oxygen XML Developer highlights the corresponding member of the pair. You can also customize the highlight color.
- **Lock the XML tags** - Default tag locking state of the opened editors.

Diagram Preferences

For certain XML languages, Oxygen XML Developer provides a diagram view as part of the text mode editor. To configure the **Diagram** preferences, [open the Preferences dialog box](#) and go to **Editor > Edit modes > Text > Diagram**.

The following options are available:

- **Show Full Model XML Schema diagram** - When this option is selected, the **Text** mode editor for XML Schemas is displayed with a split screen view that shows a diagram of the schema structure. This may be useful for seeing the effect of schema changes you make in text view. For editing a the schema using diagram rather than text, use the [schema Design view](#).



Note: When handling very large schemas, displaying the schema diagram might affect the performance of your system. In such cases, disabling the schema diagram view improves the speed of navigation through the edited schema.

- **Enable Relax NG diagram and related views** - Enables the Relax NG schema diagram and synchronization with the related views (**Attributes**, **Model**, **Elements**, **Outline**).
 - **Show Relax NG diagram** - Displays the Relax NG schema diagram in **Full Model View** and **Logical Model View**.
- **Enable NVDL diagram and related views** - Enables the NVDL schema diagram and synchronization with the related views (**Attributes**, **Model**, **Elements**, **Outline**).
 - **Show NVDL diagram** - Displays the NVDL schema diagram in **Full Model View** and **Logical Model View**.
- **Location relative to editor** - Allows you to specify the location of the schema diagram panel relative to the diagram **Text** editor.

Grid Preferences

Oxygen XML Developer provides a [Grid view](#) of an XML document. To configure the **Grid** options, [open the Preferences dialog box](#) and go to **Editor > Edit modes > Grid**.

The following options are available:

- **Compact representation** - If selected, the *compact representation* of the grid is used: a child element is displayed beside the parent element. In the *non-compact representation*, a child element is nested below the parent.

- **Format and indent when passing from grid to text or on save** - If selected, the content of the document is *formatted and indented* each time you switch from the **Grid** view to the **Text** view.
- **Default column width (characters)** - Sets the default width in characters of a table column of the grid. A column can hold:
 - Element names
 - Element text content
 - Attribute names
 - Attribute values

If the total width of the grid structure is too large you can resize any column by dragging the column margins with the mouse pointer, but the change is not persistent. To make it persistent, set the new column width with this option.

- **Active cell color** - Sets the background color for the active cell of the grid. There is only one active cell at a time. The keyboard input always goes to the active cell and the selection always contains it.
- **Selection color** - Background color for the selected cells of the grid except the active cell.
- **Border color** - The color used for the lines that separate the grid cells.
- **Background color** - The background color of grid cells that are not selected.
- **Foreground color** - The text color of the information displayed in the grid cells.
- **Row header colors - Background color** - The background color of row headers that are not selected.
- **Row header colors - Active cell color** - The background color of the row header cell that is currently active.
- **Row header colors - Selection color** - The background color of the header cells corresponding to the currently selected rows.
- **Column header colors - Background color** - The background color of column headers that are not selected.
- **Column header colors - Active cell color** - The background color of the column header cell that is currently active.
- **Column header colors - Selection color** - The background color of the header cells corresponding to the currently selected columns.

The column headers are painted with two color gradients, one for the upper 1/3 part of the header and the other for the lower 2/3 part. The start and end colors of the first gradient are set with the first two color buttons. The start and end colors of the second gradient are set with the last two color buttons.

Schema Design Preferences

Oxygen XML Developer provides a *graphical schema design editor* to make editing XML schemas easier. To configure the **Schema Design** options, *open the Preferences dialog box* and go to **Editor > Edit modes > Schema Design**

The following options are available in the **Schema Design** preferences page:

- **Show annotation in the diagram** - When selected, Oxygen XML Developer displays the content of `xs:documentation` elements in the XML Schema **Design** view.
- **When trying to edit components from another schema** - The schema diagram editor will combine schemas imported by the current schema file into a single schema diagram. You can choose what happens if you try to edit a component from an imported schema. The options are:
 - **Always go to its definition** - Oxygen XML Developer opens the imported schema file so that you can edit it.
 - **Never go to its definition** - The imported schema file is not opened. The definition cannot be edited in place.
 - **Always ask** - Oxygen XML Developer asks if you want to open the imported schema file.
- **Zoom** - Allows you to set the default zoom level of the schema diagram.

Properties

Oxygen XML Developer lets you control which properties to display for XML Schema components in the *XML Schema Design view*. To configure the schema design properties displayed, *open the Preferences dialog box* and go to **Editor > Edit modes > Schema Design > Properties**.

This preferences page contains the following:

Show additional properties in the diagram

If this option is selected, the properties selected in the property table are shown in the XML Schema **Design** mode. This option is selected by default.

Properties Table

Show - Use this column in the table to select the properties that you want to be displayed in the XML Schema **Design** mode.

Only if specified - Use this column to select if you want the property to be displayed only if it is defined in the schema.

Format Preferences

This preferences page contains various formatting options which influence editing and formatting in the **Text** mode.



Note: These settings apply to the formatting of source documents. The formatting of output documents is determined by the [transformation scenarios that create them](#).

The following options are available:

- **Detect indent on open** - Oxygen XML Developer detects how a document is indented when it is opened. Oxygen XML Developer uses a heuristic method of detection by computing a weighted average indent value from the initial document content. You can disable this setting if the detected value does not work for your particular case and you want to use a fixed-size indent for all the edited documents.
-  **Tip:** If you want to minimize the formatting differences created by the **Format and Indent** operation in a document edited in the **Text** edited mode, make sure that both the **Detect indent on open** and **Detect line width on open** options are enabled.
- **Use zero-indent, if detected** - By default, if no indent was detected in the document, the fixed-size indent is used. Enable this option if all your document have no indentation and you want to keep them that way.
- **Indent with tabs** - If selected, indents are created using tab characters. If unchecked, lines are indented using space characters.
- **Indent size** - A fixed number of spaces used for indenting a line.
- **Hard line wrap (Limit to "Line width - Format and Indent")** - If selected, when typing content in the **Text** editing mode when the maximum line width is reached, a line break is automatically inserted.
- **Indent on enter** - If disabled, when you press the **Enter** key to insert a line break in the **Text** editing mode, no indentation will be added to the new line.
- **Enable smart enter** - If selected, when you press the **Enter** key between a start and an end XML tag in the **Text** editing mode, the cursor is placed in an indented position on the empty line formed between the start and end tag.
- **Detect line width on open** - When selected, Oxygen XML Developer detects the line width automatically when the document is opened.
- **Format and indent the document on open** - When selected, an XML document is formatted and indented before opening it in Oxygen XML Developer.
- **Line width - Format and Indent** - Defines the number of characters after which the **Format and Indent** (pretty-print) action performs hard line wrapping. For example, if set to 100, after a **Format and Indent** action, the longest line will have at most 100 characters.



Note: In order to avoid having an indent that is longer than the line width setting and without having sufficient space available for the text content, the indent limit is actually set at half the value of the **Line width - Format and Indent** setting. The remaining space is reserved for text.

- **Clear undo buffer before Format and Indent** - The **Format and Indent** operation can be undone, but if used intensively, a considerable amount of the memory allocated for Oxygen XML Developer will be used for storing the undo states. If this option is selected, Oxygen XML Developer empties the undo buffer before doing a **Format and Indent** operation. This means you will not be able to undo any changes you made before the format and indent operation. Select this option if you encounter out of memory problems (**OutOfMemoryError**) when performing the **Format and Indent** operation.

The indent size and line width limit settings are used in various places in the application:

- When the **Format and Indent** action is used in the **Text** editing mode.
- When you press ENTER in the **Text** editing mode to break a line.
- When editing in the **Text** mode with **Hard line wrap** enabled.

To watch our video demonstration about the formatting options offered by Oxygen XML Developer, go to http://oxygenxml.com/demo/Autodetect_Formatting.html.

XML Formatting Preferences

To configure the **XML** Formatting options, [open the Preferences dialog box](#) and go to **Editor > Format > XML**.

The following options are available:

Format Section

This section includes the following drop down boxes:

Preserve empty lines

The **Format and Indent** operation preserves all empty lines found in the document.

Preserve text as it is

The **Format and Indent** operation preserves text content as it is, without removing or adding any white space.

Preserve line breaks in attributes

Line breaks found in attribute values are preserved.



Note: When this option is enabled, the **Break long attributes** option is automatically disabled.

Break long attributes

The **Format and Indent** operation breaks long attribute values.

Indent inline elements

The *inline elements* are indented on separate lines if they are preceded by white spaces and they follow another element start or end tag. For example:

Original XML:

```
<root>
  text <parent> <child></child> </parent>
</root>
```

Indent inline elements enabled:

```
<root> text <parent>
  <child/>
</parent>
</root>
```

Indent inline elements disabled:

```
<root> text <parent> <child/> </parent> </root>
```

Expand empty elements

The **Format and Indent** operation outputs empty elements with a separate closing tag (for example, `<a atr1="v1"></a>`). When not enabled, the same operation represents an empty element in a more compact form (`<a atr1="v1"/>`).

Sort attributes

The **Format and Indent** operation sorts the attributes of an element lexicographically.

Add space before slash in empty elements

Inserts a space character before the trailing / and > of empty elements.

Break line before an attribute name

The **Format and Indent** operation breaks the line before the attribute name.

Element Spacing Section

This section controls how the application handles whitespaces found in XML content. You can **Add** or **Remove** element names or simplified XPath expressions in the various tabs.



Note: The XPath expressions can accept the following attribute conditions (default attribute values are not taken into account):

- *element[@attr]* - Matches all instances of the specified element that include the specified attribute.
- *element[not(@attr)]* - Matches all instances of the specified element that do not include the specified attribute.
- *element[@attr = "value"]* - Matches all instances of the specified element that include the specified attribute with the given value.
- *element[@attr != "value"]* - Matches all instances of the specified element that include the specified attribute and its value is different than the one given.

The tabs are as follows:

Preserve space

List of elements for which the **Format and Indent** operation preserves the whitespaces (such as blanks, tabs, and newlines). The elements can be specified by name or by simplified XPath expressions:

- `elementName`
- `//elementName`
- `/elementName1/elementName2/elementName3`
- `//xs:localName`



Note: The namespace prefixes (such as `xs`) are treated as part of the element name without taking its binding to a namespace into account.

Default space

List of elements for which the content is normalized (multiple contiguous whitespaces are replaced by a single space), before applying the **Format and Indent** operation.

Mixed content

The elements from this list are treated as mixed content when applying the **Format and Indent** operation. The lines are split only when whitespaces are encountered.

Line break

List of elements for which line breaks will be inserted, regardless of their content. You can choose to break the line *before* the element, *after*, or both.

Schema aware format and indent

The **Format and Indent** operation takes the schema information into account with regards to the *space preserve*, *mixed*, or *element only* properties of an element.

Indent Section

Includes the following options:

Indent (when typing) in preserve space elements

Normally, the *Preserve space* elements (identified by the `xml:space` attribute set to `preserve` or by their presence in the **Preserve space** elements list) are ignored by the **Format and Indent** operation. When this option is enabled and you edit one of these elements, its content is formatted.

Indent on paste - sections with number of lines less than 300

When you paste a chunk of text that has less than 300 lines, the inserted content is indented. To keep the original indent style of the document you copy content from, disable this option.

Whitespaces Preferences

When Oxygen XML Developer formats and indents XML documents, a whitespace normalization process is applied, thus replacing whitespace sequences with single space characters. Oxygen XML Developer allows you to configure which Unicode characters are treated as spaces during the normalization process.

To configure the **Whitespaces** preferences, [open the Preferences dialog box](#) and go to **Editor > Format > XML > Whitespaces**.

This table lists the Unicode whitespace characters. Check any that you want to have treated as whitespace when formatting and indenting an XML document.

The whitespaces are normalized when the **Format and Indent** action is applied on an XML document.



Note: The whitespace normalization process replaces any sequence of characters declared as whitespaces in the **Whitespaces** table with a single space character (U+0020). If you want to be sure that a certain whitespace character will not be removed in the normalization process, deselect it in the **Whitespaces** table.



Important: The characters with the codes U+0009 (TAB), U+000A (LF), U+000D (CR) and U+0020 (SPACE) are always considered to be whitespace characters and cannot be deselected.

XQuery Formatting Preferences

To configure the **XQuery** Formatting options, [open the Preferences dialog box](#) and go to **Editor > Format > XQuery**.

The following options are available:

- **Preserve line breaks** - All initial line breaks are preserved.
- **Break line before an attribute name** - Each attribute of an XML element is written on a new line and properly indented.

XPath Formatting Preferences

To configure the **XPath** Formatting options, [open the Preferences dialog box](#) and go to **Editor > Format > XPath**.

The following option is available:

- **Format XPath code embedded in XSLT, XSD and Schematron files** - If enabled, the **Format and Indent** action applied on a XSD, XSLT, or Schematron document will perform an XPath-specific formatting on the values of the attributes that accept XPath expressions.



Note: For XSLT documents, the formatting is not applied to *attribute value templates*.

CSS Properties Formatting Preferences

Oxygen XML Developer can format and indent your CSS files. To configure the **CSS** formatting options, [open the Preferences dialog box](#) and go to **Editor > Format > CSS**.

The following options control how your CSS files are formatted and indented:

Class body on new line

If enabled, the *class* body (including the curly brackets) is placed on a new line. Disabled by default.

Indent class content

When enabled, the *class* content is indented. Enabled by default.

Add space before the value of a CSS property

When enabled, whitespaces are added between the **:** (colon) and the value of a style property. Enabled by default.

Add new line between classes

If enabled, an empty line is added between two classes. Disabled by default.

Preserve empty lines

When enabled, the empty lines from the CSS content are preserved. Enabled by default.

Allow formatting embedded CSS

When enabled, CSS content that is embedded in XML is also formatted when the XML content is formatted. Enabled by default.

JavaScript Properties Formatting Preferences

To configure the **JavaScript** format options, [open the Preferences dialog box](#) and go to **Editor > Format > JavaScript**.

The following options control the behavior of the **Format and Indent** action:

- **Start curly brace on new line** - Opening curly braces start on a new line.
- **Preserve empty lines** - Empty lines in the JavaScript code are preserved. This option is enabled by default.
- **Allow formatting embedded JavaScript** - Applied only to XHTML documents, this option allows Oxygen XML Developer to format embedded JavaScript code, taking precedence over the [Schema aware format and indent](#) option. This option is enabled by default.

Content Completion Preferences

Oxygen XML Developer provides a [Content Completion Assistant](#) that list available options at any point in a document and can auto-complete structures, elements, and attributes. These options control how the **Content Completion Assistant** works.

To configure the **Content Completion** preferences, [open the Preferences dialog box](#) and go to **Editor > Content Completion**.

The following options are available:

- **Auto close the last opened tag** - Oxygen XML Developer closes the last open tag when you type `</`.
- **Automatically rename/delete/comment matching tag** - If you rename, delete, or comment out a start tag, Oxygen XML Developer automatically renames, deletes, or comments out the matching end tag.



Note: If you select **Toggle comment** for multiple starting tags and the matching end tags are on the same line as other start tags, the end tags are not commented.

- **Use content completion** - Turns content completion on or off.
- **Close the inserted element** - When you choose an entry from the **Content Completion Assistant** list of proposals, Oxygen XML Developer inserts both start and end tags.
 - **If it has no matching tag** - The end tag of the inserted element is automatically added only if it is not already present in the document.
 - **Add element content** - Oxygen XML Developer inserts the required elements specified in the DTD, XML Schema, or RELAX NG schema that is [associated with the edited XML document](#).
 - **Add optional content** - Oxygen XML Developer inserts the optional elements specified in the DTD, XML Schema, or RELAX NG schema.
 - **Add first Choice particle** - Oxygen XML Developer inserts the first **choice** particle specified in the DTD, XML Schema, or RELAX NG schema.
- **Case sensitive search** - When enabled, the search in the content completion assistant window when you type a character is case-sensitive ('a' and 'A' are different characters).



Note: This option is ignored when the current language itself is not case sensitive. For example, the case is ignored in the CSS language.

- **Cursor position between tags** - When selected, Oxygen XML Developer automatically moves the cursor between start and end tag after inserting the element. This only applies to:
 - Elements with only optional attributes or no attributes at all.
 - Elements with required attributes, but only when the **Insert the required attributes** option is disabled.

- **Show all entities** - Oxygen XML Developer displays a list with all the internal and external entities declared in the current document when you type the start character of an entity reference (for example, &).
- **Insert the required attributes** - Oxygen XML Developer inserts automatically the required attributes taken from the DTD or XML Schema.
- **Insert the fixed attributes** - Oxygen XML Developer automatically inserts any FIXED attributes from the DTD or XML Schema for an element inserted with the help of the **Content Completion Assistant**.
- **Show recently used items** - when checked, Oxygen XML Developer remembers the last inserted items from the **Content Completion Assistant** window. The number of items to be remembered is limited by the **Maximum number of recent items shown** list box. These most frequently used items are displayed on the top of the content completion window and are separated from the rest of the suggestions by a thin gray line .
- **Maximum number of recent items shown** - limits the number of recently used items presented at the top of the **Content Completion Assistant** window.
- **Learn attributes values** - Oxygen XML Developer learns the attribute values used in a document.
- **Learn on open document** - Oxygen XML Developer automatically learns the document structure when the document is opened.
- **Learn words** (Dynamic Abbreviations, available on **Ctrl Space (Command Space on OS X)**) - When selected, Oxygen XML Developer learns the typed words and makes them available in a content completion fashion by pressing **Ctrl Space (Command Space on OS X)** on your keyboard;



Note: In order to be learned, the words need to be separated by space characters.

- **Activation delay of the proposals window (ms)** - Delay in milliseconds from last key press until the content completion assistant window is displayed.

Annotations Preferences

Different types of schemas (XML Schema, DTDs, Relax NG) can include annotations that document the various elements and attributes that they define. Oxygen XML Developer can display these annotations when offering content completion suggestions. To configure the **Annotations** preferences, [open the Preferences dialog box](#) and go to **Editor > Content Completion > Annotations**.

The following options are available:

Show annotations in Content Completion Assistant

Oxygen XML Developer displays the schema annotations of an element, attribute, or attribute value currently selected in the **Content Completion Assistant** proposals list.

Show annotations in tooltip

Oxygen XML Developer displays the annotation of elements and attributes as a tooltip when you hover over them with the cursor in the editing area or in the **Elements** view.

Show annotation in HTML format, if possible

This option allows you to view the annotations associated with an element or attribute in HTML format. It is available when editing XML documents that have associated an XML Schema or Relax NG schema. When this option is disabled the annotations are converted and displayed as plain text.

Prefer DTD comments that start with "doc:" as annotations

To address the lack of dedicated annotation support in DTD documents, Oxygen XML Developer recommends prefixing with the **doc :** particle all comments intended to be shown to the developer who writes an XML validated against a DTD schema.

When this option is enabled, Oxygen XML Developer uses the following mechanism to collect annotations:

- If at least one **doc :** comment is found in the entire DTD, only comments of this type are displayed as annotations.
- If no **doc :** comment is found in the entire DTD, all comments are considered annotations and displayed as such.

When the option is disabled, all comments, regardless of their type, are considered annotations and displayed as such.

Use all Relax NG annotations as documentation

When this option is selected, any element outside the Relax NG namespace, that is `http://relaxng.org/ns/structure/1.0`, is considered annotation and is displayed in the annotation window next to the **Content Completion Assistant** window and in the **Model** view. When this option is not selected, only elements from the Relax NG annotations namespace, that is `http://relaxng.org/ns/compatibility/annotations/1.0` are considered annotations.

XSL Preferences

XSL stylesheets are often used to create output in XHTML or XSL-FO. In addition to suggesting content completion options for XSLT stylesheet elements, Oxygen XML Developer can suggest elements from these vocabularies. To configure the XSL content completion options, [open the Preferences dialog box](#) and go to **Editor > Content Completion > XSL**.

The following options are available:

- **Automatically detect XHTML transitional or Formatting objects** - Detects if the output being generated is XHTML or FO and provides content completion for those vocabularies. Oxygen XML Developer analyzes the namespaces declared in the root element to find an appropriate schema.

If the detection fails, Oxygen XML Developer uses one of the following options:

- **None** - The **Content Completion Assistant** suggests only XSLT elements.
- **XHTML transitional** - The **Content Completion Assistant** includes XHTML transitional elements as substitutes for `xsl:element`.
- **Formatting objects** - The **Content Completion Assistant** includes Formatting Objects (XSL-FO) elements as substitutes for `xsl:element`.
- **Custom schema** - If you want content completion hints for a different output vocabulary, enter the path to the schema for that vocabulary here. The supported schema types are DTD, XML Schema, RNG schema, or NVDL schema for inserting elements from the target language of the stylesheet.
- **Documentation schema** - You can choose an additional schema that will be used for documenting XSL stylesheets. Choose between the following:
 - **Build-in schema** - Uses the built-in schema for documentation.
 - **Custom schema** - Allows you to specify a custom schema for documentation. The supported schema types are XSD, RNG, RNC, DTD, and NVDL.

XPath Preferences

Oxygen XML Developer provides content-completion support for XPath expressions. To configure the options for the content completion in XPath expressions, [open the Preferences dialog box](#) and go to **Editor > Content Completion > XPath**.

The following options are available:

- **Enable content completion for XPath expressions** - Enables [the Content Completion Assistant in XPath expressions](#) that you enter in the `match`, `select`, and `test` XSL attributes and also in the XPath toolbar.
 - **Include XPath functions** - When this option is selected, XPath functions are included in the content completion suggestions.
 - **Include XSLT functions** - When this option is selected, XSLT functions are included in the content completion suggestions.
 - **Include axes** - When this option is selected, XSLT axes are included in the content completion suggestions.
- **Show signatures of XSLT / XPath functions** - Makes the editor indicate the signature of the XPath function located at the cursor position in a tooltip. See the [XPath Tooltip Helper](#) section for more information.
- **Function signature window background** - Specifies the background color of the tooltip window.
- **Function signature window foreground** - Specifies the foreground color of the tooltip window.

XSD Preferences

Oxygen XML Developer provides content completion assistance when you are writing an XML Schema (XSD). To configure XSD preferences, [open the Preferences dialog box](#) and go to **Editor > Content Completion > XSD**. The options in this preferences page define what elements are suggested by the **Content Completion Assistant**, in addition to the ones from the XML Schema (defined by the `xs:annotation/xs:appinfo` elements).

The following options are available:

- **None** - The **Content Completion Assistant** offers only the XML Schema schema information.
- **ISO Schematron** - The **Content Completion Assistant** includes ISO Schematron elements in `xs:appinfo`.
- **Schematron 1.5** - The **Content Completion Assistant** includes Schematron 1.5 elements in `xs:appinfo`.
- **Other** - The **Content Completion Assistant** includes in `xs:appinfo` elements from an XML Schema identified by an URL.

JavaScript Preferences

Oxygen XML Developer can provide content completion suggestions when you are writing JavaScript files. To configure content completion support for JavaScript, [open the Preferences dialog box](#) and go to **Editor > Content Completion > JavaScript**. You can configure the following options:

- **Enable content completion** - Enables the content completion support for JavaScript files.
- **Use built-in libraries** - Allows Oxygen XML Developer to include components (object names, properties, functions, and variables) collected from the built-in JavaScript library files when making suggestions.
- **Use defined libraries** - Oxygen XML Developer can also use JavaScript libraries to when making suggestions. List the paths (URIs) of any JavaScript files you want Oxygen XML Developer to use when making suggestions.



Note: The paths can contain editor variables such as `${pdu}`, or `${oxygenHome}`. You can make these paths relative to the project directory or installation directory.

Syntax Highlight Preferences

Oxygen XML Developer supports syntax highlighting of XML in the [Text mode](#) editor, DTD, Relax NG (XML and Compact Syntax), Java, JavaScript / JSON, Ant, PHP, CSS, XQuery, C++, C, Perl, Properties, SQL, Shell and Batch documents.

To configure syntax highlighting, [open the Preferences dialog box](#) and go to **Editor > Syntax Highlight**.

To set syntax colors for a language, expand the listing for that language in the top panel to show the list of syntax items for that language. Use the color and style selectors to change how each syntax item is displayed. The results of your changes are displayed in the preview panel. If you do not know the name of the syntax token that you want to configure, click that token in the **Preview** area to select it.



Note: All default color sets come with a high-contrast variant, which is automatically used when you switch to a black-background or white-background high-contrast theme in your Windows operating system settings. The high-contrast theme will not overwrite any default color you set in **Editor > Syntax Highlight** preferences page.

The settings for XML documents are used also in XSD, XSL, RNG documents. The **Preview** area has separate tabs for XML, XSD, XSL, RNG.

The **Enable nested syntax highlight** option controls if different content types mixed in the same file (like PHP, JS and CSS scripts inside an HTML file) are highlighted according with the color schemes defined for each content type.

Elements / Attributes by Prefix Preferences

Oxygen XML Developer lets you specify different colors for XML elements and attributes with specific namespace prefixes. To configure the **Elements / Attributes by Prefix** preferences, [open the Preferences dialog box](#) and go to **Editor > Syntax Highlight > Elements / Attributes by Prefix**.

To change the syntax coloring for a specific namespace prefix, choose the prefix from the list, or add a new one using the **New** button, and use the color and style selectors to set the syntax highlighting style for that namespace prefix.



Note: Syntax highlighting is based on the literal namespace prefix, not the namespace that the prefix is bound to in the document.

If you want only the prefix, and not the whole element or attribute name, to be styled differently, select **Draw only the prefix with a separate color**.

Open / Save Preferences

Oxygen XML Developer lets you control how files are opened and saved. To configure the **Open / Save** options, [open the Preferences dialog box](#) and go to **Editor > Open / Save**.

Open

The following options apply to opening files:

- **Lock local resources** - When this option is enabled and you open a file from the local file system or a shared network drive, Oxygen XML Developer locks the file for the current user and the file cannot be modified by other users while the lock exists. However, other users are offered the possibility to edit the file, but without overwriting it. If they decide to continue, they will be asked to save the changes in a different file or drop them. Newly created files are *locked* when you first save them. If you enable this option with files already opened in Oxygen XML Developer, it will *lock* all the currently opened files. If you disable this option with files already opened, it will unlock them by deleting the corresponding `.lock` files.
- **Support for Special Characters** section - You can choose how you want Oxygen XML Developer to handle bidirectional text, Asian languages, or other special characters when they are detected. You can choose one of the following:
 - **Enable support for special characters**
 - **Disable support for special characters**
 - **Prompt for each document**
- **Disable special characters support for documents larger than (characters)** - Enabling bidirectional text editing support can affect performance on large files. When this option is selected, bidirectional editing is disabled for files exceeding the specified size, even if the **Enable support for special characters** option is selected.

Save

The following options apply to saving files:

- **Safe save (only for local files)** - In the unlikely event of a failure of the **Save** action, this option provides increased protection from corruption of the original file. When this option is enabled, it saves the content to a temporary file and if the save is unsuccessful, the editor preserves its unsaved state status.
- **Make backup copy on save (only for local files)** - If selected, a backup copy is made when saving the edited document. This option is available only for local files (files that are stored on the local file system). The default backup file extension is `.bak`, but that can be changed.
- **Enable automatic save** - When selected, your documents are saved automatically, after a preset time interval.
- **Automatic save interval (minutes)** - Selects the interval, in minutes, for the automatic save action.
- **Check errors on save** - If enabled, Oxygen XML Developer runs a validation that checks your document for errors before saving it.
- **Save all files before transformation or validation** - Saves all open files before validating or transforming an XML document. This ensures that any dependencies are resolved when modifying the XML document and its XML Schema.
- **Save all files before calling external tools** - If selected, all files are saved before executing an [external tool](#).

Performance

The following options cover performance issues when dealing with large files:

- **Optimize loading in the Text edit mode for files over (MB)** - File loading is optimized for reduced memory usage for any file with a size larger than this value. This is useful for editing large files, but it comes with [several restrictions](#) on memory-intensive operations.
- **Show warning when loading large documents** - Oxygen XML Developer will warn you if you open a file that is bigger than the specified size.
- **Optimize loading for documents with lines longer than (Characters)** - Line wrap is turned on for a document that contains lines that exceed the specified length. For a list of the restrictions applied to a document with long lines, see [the Editing Documents with Long Lines section](#).
- **Show warning when loading documents with long lines** - When selected, Oxygen XML Developer will warn you when you open a file with lines longer than the specified length. To reduce the length of lines in a file, [format and indent the document](#) after it is opened in the editor panel. For a list of the restrictions applied to a document with long lines, see [Editing Documents with Long Lines](#) on page 373.
- **Clear undo buffer on save** - If selected, Oxygen XML Developer clears its undo buffer when you save a document. Therefore, modifications made prior to saving the document cannot be undone. Select this option if you frequently encounter *out of memory* errors when editing large documents.
- **Consider application bundles to be directories when browsing** - This option is available only on the Mac OS X platform. When selected, the file browser dialog box allows browsing inside an application bundle, as in a regular folder. Otherwise, the file browser dialog box does not allow browsing inside an application bundle, as the Finder application does on Mac OS X.



Note: The same effect can be obtained by setting the property `apple.awt.use-file-dialog-packages` to `true` or `false` in the `Info.plist` descriptor file of the Oxygen XML Developer application:

```
<key>apple.awt.use-file-dialog-packages</key>
<string>>false</string>
```

Save Hooks Preferences

Oxygen XML Developer includes an option for automatically compiling LESS stylesheets. To set this option, [open the Preferences dialog box](#) and go to **Editor > Open / Save > Save hooks**.

The following option can be enabled or disabled:

- **Automatically compile LESS to CSS when saving** - If enabled, when you save a LESS file it will automatically be compiled to CSS (disabled by default).



Important: If this option is enabled, when you save a LESS file, the CSS file that has the same name as the LESS file is overwritten without warning. Make sure all your changes are made in the LESS file. Do not edit the CSS file directly, as your changes might be lost.

Templates Preferences

This page groups the preferences for code templates and document templates:

- [Code Templates](#)
- [Document Templates](#)

Code Templates Preferences

[Code templates](#) are code fragments that can be inserted at the current editing position. Oxygen XML Developer comes with a set of built-in templates for CSS, LESS, Schematron, XSL, XQuery, and XML Schema document types. You can also define your own code templates and share them with your colleagues using the template export and import functions.

To configure **Code Templates**, [open the Preferences dialog box](#) and go to **Editor > Templates > Code Templates**.

This preferences page contains a list of all the available code templates (both built-in and custom created ones) and a code preview area. You can disable any code template by deselecting it.

The following actions are available:

New

Opens the **Code template** dialog box that allows you to define a new code template. You can define the following fields:

- **Name** - The name of the code template.
- **Description** - The description of the code template that will appear in the **Code Templates** preferences page and in the tooltip message when selecting it from the **Content Completion Assistant**. HTML markup can be used for better rendering.
- **Associate with** - You can choose to set the code template to be associated with a specific type of editor or for all editor types.
- **Shortcut key** - Allows you to configure a shortcut key that can be used to insert the code template. The + character separates keys. If the **Enable platform-independent shortcut keys** checkbox is enabled, the shortcut is platform-independent and the following modifiers are used:
 - M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
 - M2 represents the **Shift** key.
 - M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
 - M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.
- **Content** - Text box where you define the content that is used when the code template is inserted.

Edit

Opens the **Code template** dialog box and allows you to edit an existing code template. You can edit the following fields:

- **Description** - The description of the code template that will appear in the **Code Templates** preferences page and in the tooltip message when selecting it from the **Content Completion Assistant**. HTML markup can be used for better rendering.
- **Shortcut key** - Allows you to configure a shortcut key that can be used to insert the code template. The + character separates keys. If the **Enable platform-independent shortcut keys** checkbox is enabled, the shortcut is platform-independent and the following modifiers are used:
 - M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
 - M2 represents the **Shift** key.
 - M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
 - M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.
- **Content** - Text box where you define the content that is used when the code template is inserted.

Duplicate

Creates a duplicate of the currently selected code template.

Delete

Deletes the currently selected code template. This action is disabled for the built-in code templates.

Export

Exports a file with code templates.

Import

Imports a file with code templates that was created by the **Export** action.

You can use the following *editor variables* when you define a code template in the **Content** text box:

- *\${caret}* - The position where the cursor is located. This variable can be used in a code template, in **Author** mode operations, or in a selection plugin.
- *\${selection}* - The current selected text content in the current edited document. This variable can be used in a code template, in **Author** mode operations, or in a selection plugin.
- *\${ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default_value'))}* - To prompt for values at runtime, use the *ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default-value')* editor variable. You can set the following parameters:

- 'message' - The displayed message. Note the quotes that enclose the message.
- type - Optional parameter, with one of the following values:

Parameter	
url	Format: <code>\${ask('message', url, 'default_value')}</code>
	Description: Input is considered a URL. Oxygen XML Developer checks that the provided URL is valid.
	Example: • <code>\${ask('Input URL', url)}</code> - The displayed dialog box has the name Input URL. The expected input type is URL. • <code>\${ask('Input URL', url, 'http://www.example.com')}</code> - The displayed dialog box has the name Input URL. The expected input type is URL. The input field displays the default value <code>http://www.example.com</code>.
password	Format: <code>\${ask('message', password, 'default')}</code>
	Description: The input is hidden with bullet characters.
	Example: • <code>\${ask('Input password', password)}</code> - The displayed dialog box has the name 'Input password' and the input is hidden with bullet symbols. • <code>\${ask('Input password', password, 'abcd')}</code> - The displayed dialog box has the name 'Input password' and the input hidden with bullet symbols. The input field already contains the default abcd value.
generic	Format: <code>\${ask('message', generic, 'default')}</code>
	Description: The input is considered to be generic text that requires no special handling.
	Example: • <code>\${ask('Hello world!')}</code> - The dialog box has a Hello world! message displayed. • <code>\${ask('Hello world!', generic, 'Hello again!')}</code> - The dialog box has a Hello world! message displayed and the value displayed in the input box is 'Hello again!'.
relative_url	Format: <code>\${ask('message', relative_url, 'default')}</code>
	Description: Input is considered a URL. Oxygen XML Developer tries to make the URL relative to that of the document you are editing.  Note: If the <code>\$ask</code> editor variable is expanded in content that is not yet saved (such as an <i>untitled</i> file, whose path cannot be determined), then Oxygen XML Developer will transform it into an absolute URL.
	Example: • <code>\${ask('File location', relative_url, 'C:/example.txt')}</code> - The dialog box has the name 'File location'. The URL inserted in the input box is made relative to the current edited document location.
combobox	Format: <code>\${ask('message', combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code>

Parameter	
	Description: Displays a dialog box that offers a drop-down menu. The drop-down menu is populated with the given <code>rendered_value</code> values. Choosing such a value will return its associated value (<code>real_value</code>).  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example: • <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems. The associated value will be returned based upon your selection. •  Note: In this example, the default value is indicated by the <code>osx</code> key. However, the same result could be obtained if the default value is indicated by <code>Mac OS X</code>, like in the following example: <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'Mac OS X')}</code> • <code>\${ask('Mobile OS', combobox, ('win':'Windows Mobile';'ios':'iOS';'and':'Android'), 'Android')}</code>
editable_combobox	Format: <code>\${ask('message', editable_combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a drop-down menu with editable elements. The drop-down menu is populated with the given <code>rendered_value</code> values. Choosing such a value will return its associated real value (<code>real_value</code>) or the value inserted when you edit a list entry.  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example: • <code>\${ask('Operating System', editable_combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems and also allows you to edit the entry. The associated value will be returned based upon your selection or the text you input.
radio	Format: <code>\${ask('message', radio, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a series of radio buttons. Each radio button displays a 'rendered_value' and will return an associated <code>real_value</code>.  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example:

Parameter	
	• <code>\${ask('Operating System', radio, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx')}</code> - The dialog box has the name 'Operating System'. The radio button group allows you to choose between the three operating systems.  Note: In this example Mac OS X is the default selected value and if selected it would return OSX for the output.

- 'default-value' - optional parameter. Provides a default value.
 - `${timeStamp}` - Time stamp, that is the current time in Unix format. It can be used for example to save transformation results in different output files on each transform.
 - `${uuid}` - Universally unique identifier, a unique sequence of 32 hexadecimal digits generated by the Java [UUID](#) class.
 - `${id}` - Application-level unique identifier; a short sequence of 10-12 letters and digits which is not guaranteed to be universally unique.
 - `${cfn}` - Current file name without extension and without parent folder. The current file is the one currently opened and selected.
 - `${cfne}` - Current file name with extension. The current file is the one currently opened and selected.
 - `${cf}` - Current file as file path, that is the absolute file path of the current edited document.
 - `${cfd}` - Current file folder as file path, that is the path of the current edited document up to the name of the parent folder.
 - `${frameworksDir}` - The path (as file path) of the [OXYGEN_DIR]/frameworks directory.
 - `${pd}` - Current project folder as file path. Usually the current folder selected in the **Project** View.
 - `${oxygenInstallDir}` - Oxygen XML Developer installation folder as file path.
 - `${homeDir}` - The path (as file path) of the user home folder.
 - `${pn}` - Current project name.
 - `${env(VAR_NAME)}` - Value of the VAR_NAME environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the `${system(var.name)}` editor variable.
 - `${system(var.name)}` - Value of the var.name Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as -Dvar.name=value. If you are looking for operating system environment variables, use the `${env(VAR_NAME)}` editor variable instead.
 - `${date(pattern)}` - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#).
- Example:** yyyy-MM-dd;



Note: This editor variable supports both the xs:date and xs:datetime parameters. For details about xs:date, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about xs:datetime, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.

Document Templates Preferences

Oxygen XML Developer provides a selection of document templates that make it easier to create new documents in a variety of formats. The list of available templates is presented when you create a new document. You can also create your own templates and share them with others. You can add your custom file templates by creating template files in a directory and adding that directory to the list of template directories that Oxygen XML Developer uses. To add a template directory, [open the Preferences dialog box](#) and go to **Editor > Templates > Document Templates**.

You can add new document template location folders and manage existing ones. You can also alter the order in which Oxygen XML Developer looks into these directories by using the **Up** and **Down** buttons.

Spell Check Preferences

Oxygen XML Developer provides support for spell checking in the [text](#) editing mode. To configure the **Spell Check** options, [open the Preferences dialog box](#) and go to **Editor > Spell Check**.

The following options are available:

- **Spell checking engine** - Oxygen XML Developer ships with two spell check engines, *Hunspell* and *Java spell checker*. The two engines come with different dictionaries. When you select an engine here, the list of languages in the **Default language** option changes based on the available dictionaries for the engine you have chosen.
- **Automatic Spell Check** - This option is disabled by default. When enabled, Oxygen XML Developer automatically checks the spelling as you type and highlights misspelled words in the document.
 - **Select editors** - You can select which editors (and therefore which file types) will be automatically spelled checked. File types for which automatic spell check is generally not useful, such as CSS and DTD, are excluded by default.
- **Spell check highlight color** - Use this option to set the color used by the spell check engine to highlight spelling errors.

Language Options Section

- **Default language** - The default language list allows you to choose the language used by the spell check engine when the language is not specified in the source file. You can [add additional dictionaries to the spell check engines](#).
- **Use "lang" and "xml:lang" attributes** - When this option is selected, the contents of an element with one of the lang or xml:lang attributes is checked in that language. When this option is enabled, choose between the following two options for instances **when these attributes are missing**:
 - **Use the default language** - If the lang and xml:lang attributes are missing, the selection in the **Default language** list is used.
 - **Do not check** - If the lang and xml:lang attributes are missing, the element is not checked.

XML Spell Checking in Section

You can choose to check the spelling inside the following XML items:

- **Comments**
- **Attribute values**
- **Text**
- **CDATA**

Options Section

- **Check capitalization** - When selected, the spell checker reports capitalization errors (for example, a word that starts with lowercase after *etc.* or *i.e.*).
- **Check punctuation** - When selected, the spell checker checks punctuation. Misplaced white space and unusual sequences, like a period following a comma, are highlighted as errors.
- **Ignore mixed case words** - When selected, the spell checker does not check words containing mixed case characters (for example, *SpellChecker*).
- **Ignore acronyms** - Available only for the *Hunspell spell checker*. When selected, acronyms are not reported as errors.
- **Ignore words with digits** - When selected, the spell checker does not check words containing digits (for example, *b2b*).
- **Ignore duplicates** - When selected, the spell checker does not signal two successive identical words as an error.
- **Ignore URL** - When selected, the spell checker ignores words looking like URLs or file names (for example, *www.oxygenxml.com* or *c:\boot.ini*).
- **Allow compounds words** - When selected, all words formed by concatenating two legal words with a hyphen (hyphenated compounds) are accepted. If recognized by the language, two words concatenated without hyphen (closed compounds) are also accepted.
- **Allow general prefixes** - Available only for the *Java spell checker*. When selected, a word formed by concatenating a recognized prefix and a legal word is accepted. For example if *mini-* is a registered prefix, the spell check engine accepts the word *mini-computer*.

- **Allow file extensions** - When selected, the spell checker accepts any word ending with recognized file extensions (for example, *myfile.txt* or *index.html*).

Ignore Elements Section

You can use the **Add** and **Remove** buttons to configure a list of element names or XPath expressions to be ignored by the spell checker. The following restricted set of XPath expressions are supported:

- '/' and '/' separators
- '*' wildcard

An example of an allowed XPath expression is: `/a/*/b`.

Spell Check Dictionaries Preferences

To set the Dictionaries preferences, [open the Preferences dialog box](#) and go to **Editor > Spell Check > Dictionaries**. This page allows you to configure the dictionaries and term lists (.tdi files) that Oxygen XML Developer uses and to choose where to save new learned words.

The following options are valid when Oxygen XML Developer uses the Hunspell spell checking engine:

- **Dictionaries and term lists default folder** - Displays the default location where the dictionaries and term lists that Oxygen XML Developer uses are stored.
- **Include dictionaries and term list from** - Selecting this option allows you to specify a location where you have stored dictionaries and term lists that you want to include, along with the default ones.



Note: The spell checker takes into account dictionaries and term lists collected both from the default and custom locations and multiple dictionaries and term lists from the same language are merged into generic ones (for example, `en_UK.dic` from the default location is merged with `en_US.dic` from a custom location, and the result is that a third file is created for a generic dictionary called `en.dic`). However, if there is already a generic dictionary (for example, `en.dic`) saved in either the default or custom location, the other specific dictionaries (for example, `en_UK.dic` and `en_US.dic`) will not be merged and the existing generic dictionary will simply be used. Also, if the additional location contains a file with the same name as one from the default location, the file in the additional location takes precedence over the file from the default location.

- **Save learned words in the following location** - Specifies the target where the newly learned words are saved. By default, the target is the application preferences folder, but you can also choose a custom location.
- **Delete learned words** - Opens the list of learned words, allowing you to select the items you want to remove, without deleting the dictionaries and term lists.

Document Checking Preferences

To configure the **Document Checking** options, [open the Preferences dialog box](#) and go to **Editor > Document Checking**. This preferences page contains preferences for configuring how a document is checked for both well-formedness errors and validation errors.

The following options are available:

- **Maximum number of validation highlights** - If validation generates more errors than the number from this option only the first errors up to this number are highlighted in editor panel and on stripe that is displayed at right side of editor panel. This option is applied both for [automatic validation](#) and [manual validation](#).
- **Validation error highlight color** - The color used to highlight validation errors in the document.
- **Validation warning highlight color** - The color used to highlight validation warnings in the document.
- **Validation success color** - The color used to highlight in the vertical ruler bar the success of the validation operation.
- **Always show validation status** - If this option is selected the line at the bottom of the editor panel which presents the current validation error or warning is always visible. This is useful to avoid scrolling problems when **Automatic validation** is enabled and the vertical scroll bar may change position due to displaying an error message while the document is edited.
- **Enable automatic validation** - Validation of edited document is executed in background as the document is modified by editing in Oxygen XML Developer.

- **Delay after the last key event (s)** - The period of keyboard inactivity which starts a new validation (in seconds).

At the bottom of the preferences page you can *choose whether or not the saved options will be shared with other users by selecting **Global** or **Project** storage options.*

Mark Occurrences Preferences

To configure the **Mark Occurrences** options, *open the **Preferences dialog box*** and go to **Editor > Mark Occurrences**:

The following preferences are available in this preferences page:

- **XML files** - Activates the *Highlight IDs Occurrences* feature in XML files.
- **XSLT files** - Activates the *Highlight Component Occurrences* feature in XSLT files.
- **XML Schema files and WSDL files** - Activates the *Highlight Component Occurrences* feature in XSD and WSDL files.
- **RNG files** - Activates the highlight component occurrences feature in RNG files.
- **Schematron files** - Activates the *Highlight Component Occurrences* feature in Schematron files.
- **Ant files** - Activates the *Highlight Component Occurrences* feature in Ant files.
- **Declaration highlight color** - Color used to highlight the component declaration.
- **Reference highlight color** - Color used to highlight component references.

Custom Validation Engines Preferences

To configure the options for *Custom Validation Engines*, *open the **Preferences dialog box*** and go to **Editor > Custom Validations**.

If you want to add a new custom validation tool or edit the properties of an exiting one you can use the **Custom Validator** dialog box displayed by pressing the **New** button or the **Edit** button.

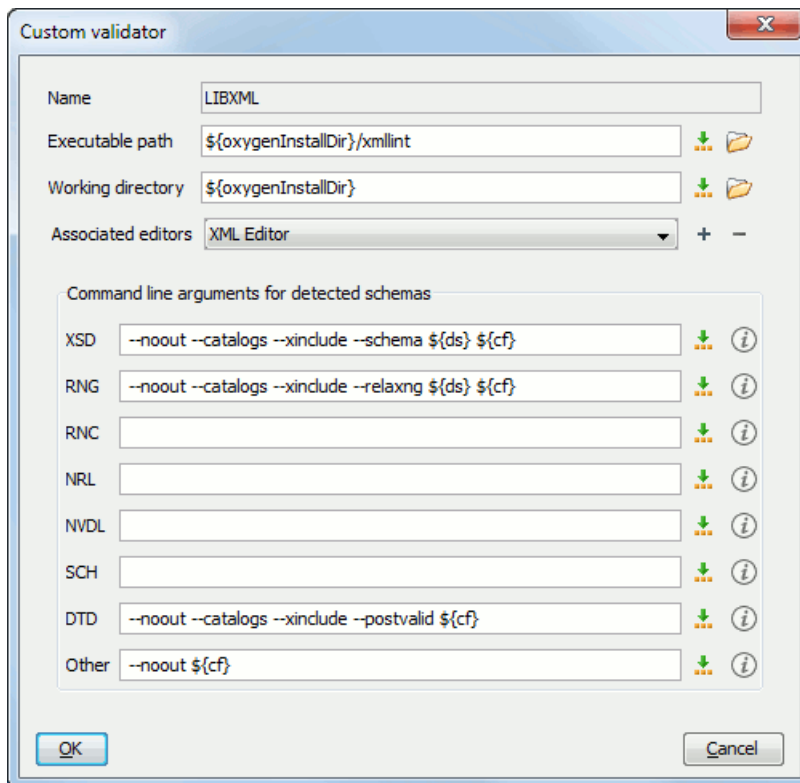


Figure 331: Edit a Custom Validator

The configurable parameters of a custom validator are as follows:

- **Name** - Name of the custom validation engine that will be displayed in the  **Validation** toolbar drop-down menu.
- **Executable path** - Path to the executable file of the custom validation tool. You can insert *editor variables*, such as `${home}`, `${pd}`, `${oxygenInstallDir}`.
- **Working directory** - The working directory of the custom validation tool.
- **Associated editors** - The editors that can perform validation with the external tool (XML editor, XSL editor, XSD editor, etc.)
- **Command line arguments for detected schemas** - Command line arguments used in the commands that validate the current edited file against different types of schema (W3C XML Schema, Relax NG full syntax, Relax NG compact syntax, NVDL, Schematron, DTD, etc.) The arguments can include any custom switch (like `-rng`) and the following editor variables:
 - `${cf}` - Current file as file path, that is the absolute file path of the current edited document.
 - `${currentFileURL}` - Current file as URL, that is the absolute file path of the current edited document represented as URL.
 - `${ds}` - The path of the detected schema as a local file path for the current validated XML document.
 - `${dsu}` - The path of the detected schema as an URL for the current validated XML document.

Increasing the stack size for validation engines

To prevent the appearance of a *StackOverflowException*, use one of the following methods:

- Use the `com.oxygenxml.stack.size.validation.threads` property to increase the size of the stack for validation engines. The value of this property is specified in bytes. For example, to set a value of one megabyte specify `1x1024x1024=1048576`.
- Increase the value of the `-Xss` parameter.



Note: Increasing the value of the `-Xss` parameter affects all the threads of the application.

CSS Validator Preferences

To configure the **CSS Validator** preferences, *open the Preferences dialog box* and go to **CSS Validator**.

You can configure the following options for the built-in **CSS Validator** of Oxygen XML Developer:

- **Profile** - Selects one of the available validation profiles: **CSS 1**, **CSS 2**, **CSS 2.1**, **CSS 3**, **CSS 3 with Oxygen extensions**, **SVG**, **SVG Basic**, **SVG Tiny**, **Mobile**, **TV Profile**, **ATSC TV Profile**. The **CSS 3 with Oxygen extensions** profile includes all the CSS 3 standard properties and the CSS extensions specific for Oxygen. That means all Oxygen specific extensions are accepted in a CSS stylesheet by *the built-in CSS validator* when this profile is selected.
- **Media type** - Selects one of the available mediums: **all**, **aural**, **braille**, **embossed**, **handheld**, **print**, **projection**, **screen**, **tty**, **tv**, **presentation**, **oxygen**.
- **Warning level** - Sets the minimum severity level for reported validation warnings. Can be one of: **All**, **Normal**, **Most Important**, **No Warnings**.
- **Ignore properties** - You can type comma separated patterns that match the names of CSS properties that will be ignored at validation. As wildcards you can use:
 - `*` to match any string.
 - `?` to match any character.
- **Recognize browser CSS extensions (applies also to content completion)** - If checked, Oxygen XML Developer recognizes (no validation is performed) browser-specific CSS properties. The **Content Completion Assistant** lists these properties at the end of its list, prefixed with the following particles:
 - `-moz` - for Mozilla.
 - `-ms` - for Internet Explorer.
 - `-o` - for Opera.
 - `-webkit` - for Safari/Webkit.

XML Preferences

This section describes the panels that contain the user preferences related with XML.

XML Catalog Preferences

To configure the **XML Catalog** options, [open the Preferences dialog box](#) and go to **XML > XML Catalog**.

The following options are available:

- **Prefer** - the prefer setting determines whether public identifiers specified in the catalog are used in favor of system identifiers supplied in the document. Suppose you have an entity in your document for which both a public identifier and a system identifier has been specified, and the catalog only contains a mapping for the public identifier (for example, a matching public catalog entry). If **public** is selected, the URI supplied in the matching public catalog entry is used. If **system** is selected, the system identifier in the document is used.



Note: If the catalog contained a matching system catalog entry giving a mapping for the system identifier, that mapping would have been used, the public identifier would never have been considered, and the setting of override would have been irrelevant.

Generally, the purpose of catalogs is to override the system identifiers in XML documents, so **Prefer** should usually be **public** in your catalogs.

- When using catalogs it is sometimes useful to see what catalog files are parsed, if they are valid or not, and what identifiers are resolved by the catalogs. The **Verbosity** option selects the detail level of such logging messages of the XML catalog resolver that will be displayed in the **Catalogs** view at the bottom of the window:
 - **None** - No message is displayed by the catalog resolver when it tries to resolve a URI reference, a SYSTEM one or a PUBLIC one with the XML catalogs specified in this panel.
 - **Unresolved entities** - Only the logging messages that track the failed attempts to resolve references are displayed.
 - **All messages** - The messages of both failed attempts and successful ones are displayed.
- If **Resolve schema locations also through system mappings** is enabled, Oxygen XML Developer analyzes both *uri* and *system* mappings in order to resolve the location of schema.



Note: This option is not applicable for DTD schemas since the public and system catalog mappings are always considered.

- If **Process namespaces through URI mappings for XML Schema** is selected then the target namespace of the imported XML Schemas is resolved through the *uri* mappings. The namespace is taken into account only when the schema specified in the *schemaLocation* attribute was not resolved successfully.
- If the **Use default catalog** option is checked the first XML catalog which Oxygen XML Developer will use to resolve references at document validation and transformation will be a default built-in catalog. This catalog maps such references to the built-in local copies of the schemas of the Oxygen XML Developer frameworks (DocBook, DITA, TEI, XHTML, SVG, etc.)

You can also add or configure catalogs at framework level from the **Catalogs** tab in the [Document Type configuration dialog box](#).

When you add, delete or edit an XML catalog to / from the list, reopen the currently edited files which use the modified catalog or run [the Validate action](#) so that the XML catalog changes take full effect.

XML Parser Preferences

To configure the **XML Parser** options, [open the Preferences dialog box](#) and go to **XML > XML Parser**.

The configurable options of the built-in XML parser are as follows:

- **Enable parser caching (validation and content completion)** - Enables re-use of internal models when validating and provides content completion in opened XML files which reference the same schemas (grammars) like DTD, XML Schema, RelaxNG.

- **Ignore the DTD for validation if a schema is specified** - Forces validation against a referenced schema (W3C XML Schema, Relax NG schema) even if the document includes also a DTD DOCTYPE declaration. This option is useful when the DTD declaration is used only to declare DTD entities and the schema reference is used for validation against a W3C XML Schema or a Relax NG schema.



Note: Schematron schemas are treated as additional schemas. The validation of a document associated with a DTD and referencing a Schematron schema is executed against both the DTD and the Schematron schema, regardless of the value of the **Ignore the DTD for validation if a schema is specified** option.

- **Enable XInclude processing** - Enables XInclude processing. If checked, the XInclude support in Oxygen XML Developer is turned on for validation and transformation of XML documents.
- **Base URI fix-up** - According to the specification for XInclude, processors must add an `xml:base` attribute to elements included from locations with a different base URI. Without these attributes, the resulting infoset information would be incorrect.

Unfortunately, these attributes make XInclude processing not transparent to Schema validation. One solution to this is to modify your schema to allow `xml:base` attributes to appear on elements that might be included from different base URIs.

If the addition of `xml:base` and / or `xml:lang` is undesired by your application, you can disable base URI fix-up.

- **Language fix-up** - The processor will preserve language information on a top-level included element by adding an `xml:lang` attribute if its include parent has a different [language] property. If the addition of `xml:lang` is undesired by your application, you can disable the language fix-up.
- **DTD post-validation** - Enable this option to validate an XML file against the associated DTD, after all the content merged to the current XML file using `XInclude` was resolved. If you disable this option, the current XML file is validated against the associated DTD before all the content merged to the current XML file using `XInclude` is resolved.

XML Schema Preferences

To configure the **XML Schema** options, [open the Preferences dialog box](#) and go to **XML > XML Parser > XML Schema**.

This preferences page allows you to configure the following options:

- **Default XML Schema version** - Allows you to select the version of W3C XML Schema: XML Schema **1.0** or XML Schema **1.1**.



Note: You are also able to set the XML Schema version using the **Customize** option in [New dialog box](#).

- **Default XML Schema validation engine** - Allows you to set the default XML Schema validation engine either to **Xerces** or **Saxon EE**.

Xerces validation features

- **Enable full schema constraint checking** (<http://apache.org/xml/features/validation/schema-full-checking>) - Sets the *schema-full-checking* feature to true. This enables a validation of the parsed XML document against a schema (W3C XML Schema or DTD) while the document is parsed.
- **Enable honour all schema location feature** (<http://apache.org/xml/features/honour-all-schema-location>) - Sets the *honour-all-schema-location* feature to true. All the files that declare W3C XML Schema components from the same namespace are used to compose the validation model. In case this option is disabled, only the first W3C XML Schema file that is encountered in the XML Schema import tree is taken into account.
- **Enable full XPath 2.0 in assertions and alternative types** (<http://apache.org/xml/features/validation/cta-full-xpath-checking>) - When enabled (default value), you can use the full XPath support in assertions and alternative types. Otherwise, only the XPath support offered by the Xerces engine is available.
- **Assertions can see comments and processing instructions** (<http://apache.org/xml/features/validation/assert-comments-and-pi-checking>) - Controls whether comments and processing instructions are visible to the XPath expression used for defining an assertion in XSD 1.1.

Saxon validation features

- **Multiple schema imports** - Forces xs:import to fetch the referenced schema document. By default, the xs:import fetches the document only if no schema document for the given namespace has already been loaded. With this option in effect, the referenced schema document is loaded unless the absolute URI is the same as a schema document already loaded.
- **Assertions can see comments and processing instructions** - Controls whether comments and processing instructions are visible to the XPath expression used to define an assertion. By default (unlike Saxon 9.3), they are not made visible.

Relax NG Preferences

To configure the **Relax NG** options, [open the Preferences dialog box](#) and go to **XML > XML Parser > Relax NG**.

The following options are available in this page:

- **Check feasibly valid** - Checks whether Relax NG documents can be transformed into valid documents by inserting any number of attributes and child elements anywhere in the tree.



Note: Enabling this option disables the **Check ID/IDREF** option.

- **Check ID/IDREF** - Checks the ID/IDREF matches when a Relax NG document is validated.
- **Add default attribute values** - Default values are given to the attributes of documents validated using Relax NG. These values are defined in the Relax NG schema.

Schematron Preferences

To configure the **Schematron** options, [open the Preferences dialog box](#) and go to **XML > XML Parser > Schematron**.

The following options are available in this preferences page:

ISO Schematron Section

- **Optimize (visit-no-attributes)** - If your ISO Schematron assertion tests do not contain the attributes axis, you should check this option for faster ISO Schematron validation.
- **Allow foreign elements (allow-foreign)** - Enables support for allow-foreign on ISO Schematron. This option is used to pass non-Schematron elements to the generated stylesheet.
- **Use Saxon EE (schema aware) for xslt2/xslt3 query language binding** - When enabled, Saxon EE is used for xslt2/xslt3 query binding. If this option is disabled, Saxon PE is used.
- **Enable Schematron Quick Fixes (SQF) support** - Allows you to enable or disable the support for quick fixes in Schematron files. This option is enabled by default.
- **Embedded rules query language binding** - You can control the query language binding used by the ISO Schematron embedded rules. You can choose between: **xslt1**, **xslt2**, or **xslt3**.



Note: To control the query language binding for standalone ISO Schematron, you need to set the query language to be used with a `queryBinding` attribute on the schema root element.

Schematron 1.5 Section

- **XPath Version** - Allows you to select the version of XPath for the expressions that are allowed in Schematron assertion tests. You can choose between: **1.0**, **2.0**, or **3.0**. This option is applied in both standalone Schematron 1.5 schemas and embedded Schematron 1.5 rules.

XML Instances Generator Preferences

To configure the **XML Instances Generator** options, [open the Preferences dialog box](#) and go to **XML > XML Instances Generator**. It sets the default parameters of the **Generate Sample XML Files** tool that is available on the **Tools** menu.

The options of the tool that generates XML instance documents based on a W3C XML Schema are the following:

- **Generate optional elements** - If checked, the elements declared optional in the schema will be generated in the XML instance.

- **Generate optional attributes** - If checked, the attributes declared optional in the schema will be generated in the XML instance.
 - **Values of elements and attributes** - Specifies what values are generated in elements and attributes of the XML instance. It can have one of the values:
 - **None** - No values for the generated elements and attributes.
 - **Default** - The value is the element name or attribute name.
 - **Random** - A random value.
 - **Preferred number of repetitions** - If the values set here is greater than `maxOccurs`, then the `maxOccurs` is used.
 - **Maximum recursivity level** - For recursive type definitions this parameter specifies the number of levels of recursive elements inserted in the parent element with the same name.
 - **Type alternative strategy** - Specifies how the element type alternatives are generated in the XML instance:
 - **First** - The first element type alternative whose XPath condition is true is used.
 - **Random** - A random element type alternative whose XPath condition is true is used.
-  **Note:** If no XPath condition is true, the default element type alternative is used.
-  **Note:** To evaluate an XPath expression, either the values of the attributes defined in the **Options** tab of the **XML Instance Generator** dialog box, or the attributes values defined in the XML Schema are used.
- **Choice strategy** - For choice element models specifies what choice will be generated in the XML instance:
 - **First** - The first choice is selected from the choice definition and an instance of that choice is generated in the XML instance document.
 - **Random** - A random choice is selected from the choice definition and an instance of that will be generated.
 - **Generate the other options as comments** - If checked, the other options of the choice element model (the options which are not selected) will be generated inside an XML comment in the XML instance.
 - **Use incremental attribute / element names as default** - If checked, the value of an element or attribute starts with the name of that element or attribute. For example, for an `a` element the generated values are: `a1`, `a2`, `a3`, and so on. If not checked, the value is the name of the type of that element / attribute (for example: `string`, `decimal`, etc.)
 - **Maximum length** - The maximum length of string values generated for elements and attributes.
 - **Discard optional elements after nested level** - The optional elements that exceed the specified nested level are discarded. This option is useful for limiting deeply nested element definitions that can quickly result in very large XML documents.

XProc Engines Preferences

Oxygen XML Developer comes with a built-in XProc engine called *Calabash*. You can add or configure external XProc engines by using the **XProc Engines** preferences page. [Open the Preferences dialog box](#) and go to **XML > XProc**.

When **Show XProc messages** is selected all messages emitted by the XProc processor during a transformation will be presented in the results view.

To add an external engine click the **New** button. To configure an existing engine, click the **Edit** button. This opens the **Custom Engine** dialog box that allows you to configure an external engine.

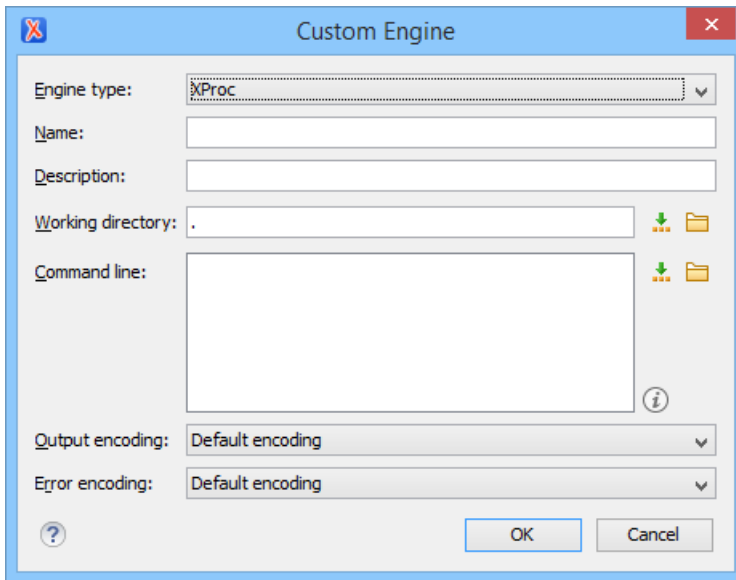


Figure 332: Creating an XProc external engine

The following options can be configured in this dialog box:

- **Name** - The value of this field will be displayed in the XProc transformation scenario and in the command line that will start it.
- **Description** - A textual description that will appear as a tooltip where the XProc engine will be used.
- **Working directory** - The working directory for resolving relative paths. You can use [built-in editor variables](#) and [custom editor variables](#) for the path.
- **Command line** - The command line that will run the XProc engine as an external process. You can use [built-in editor variables](#) and [custom editor variables](#) for parametrizing a file path.
- **Output encoding** - The encoding for the output stream of the XProc engine, used for reading and displaying the output messages.
- **Error encoding** - The encoding for the error stream of the XProc engine, used for reading and displaying the messages from the error stream.



Note: You can configure the built-in Saxon processor using the `saxon.config` file. For further details about configuring this file go to <http://www.saxonica.com/documentation9.5/index.html#!configuration/configuration-file>. You can configure the built-in Calabash processor by using the `calabash.config` file. These files are located in `[OXYGEN_DIR]\lib\xproc\calabash\lib`. If they do not exist, you have to create them.

XSLT-FO-XQuery Preferences

To configure the **XSLT/FO/XQuery** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery**. This panel contains only the most generic options for working with XSLT / XSL-FO / XQuery processors. The more specific options are grouped in other panels linked as child nodes of this panel in the tree of this **Preferences** page.

There is only one generic option available:

Create transformation temporary files in system temporary directory - It should be selected only when the temporary files necessary for performing transformations are created in the same folder as the source of the transformation (the default behavior, when this option is not selected) and this breaks the transformation. An example of breaking the transformation is when the transformation processes all the files located in the same folder as the source of the transformation, which will include the temporary files, and the result is incorrect or the transformation fails due to this fact.

XSLT Preferences

To configure the **XSLT** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XSLT**.

Oxygen XML Developer gives you the possibility to use an XSLT transformer implemented in Java (other than the XSLT transformers that come bundled with Oxygen XML Developer). To use a different XSLT transformer, specify the name of the transformer factory class. Oxygen XML Developer sets this transformer factory class as the value of the Java property `javax.xml.transform.TransformerFactory`.

You can customize the following XSLT preferences:

- **Value** - Allows you to set the value of the `TransformerFactory` Java class.
- **XSLT 1.0 Validate with** - Allows you to set the XSLT engine used for validation of XSLT 1.0 documents.
- **XSLT 2.0 Validate with** - Allows you to set the XSLT Engine used for validation of XSLT 2.0 documents.
- **XSLT 3.0 Validate with** - Allows you to set the XSLT Engine used for validation of XSLT 3.0 documents.



Note: Saxon-HE does not implement any XSLT 3.0 features. Saxon-PE implements a selection of XSLT 3.0 (and XPath 3.0) features, with the exception of schema-awareness and streaming. Saxon-EE implements additional features relating to streaming (processing of a source document without constructing a tree in memory). For further details about XSLT 3.0 conformance, go to <http://www.saxonica.com/documentation/index.html#!conformance/xslt30>.

Saxon6 Preferences

To configure the **Saxon 6** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XSLT > Saxon > Saxon 6**.

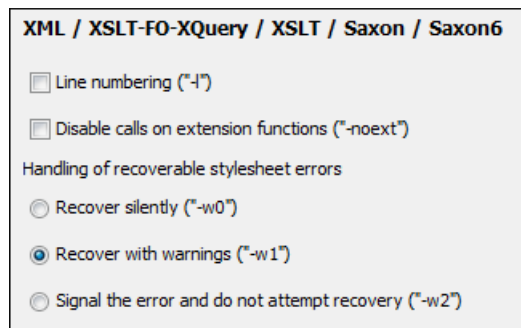


Figure 333: The Saxon 6 XSLT Preferences Panel

The built-in Saxon 6 XSLT processor can be configured with the following options:

- **Line numbering** - Specifies whether line numbers are maintained and reported in error messages for the XML source document.
- **Disable calls on extension functions** - If enabled, external functions called is disallowed. Checking this is recommended in an environment where untrusted stylesheets may be executed. Also disables user-defined extension elements, together with the writing of multiple output files, all of which carry similar security risks.
- **Handling of recoverable stylesheet errors** - Allows you to choose how dynamic errors are handled. One of the following options can be selected:
 - **recover silently** - Continue processing without reporting the error.
 - **recover with warnings** - Issue a warning but continue processing.
 - **signal the error and do not attempt recovery** - Issue an error and stop processing.

Saxon-HE/PE/EE Preferences

To configure the **Saxon HE/PE/EE** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XSLT > Saxon > Saxon HE/PE/EE**.

Oxygen XML Developer allows you to configure the following XSLT options for the Saxon 9.6.0.7 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE):

- **Use a configuration file ("-config")** - Sets a Saxon 9.6.0.7 configuration file that is executed for XSLT transformation and validation processes.

- **Version warnings ("-versmsg")** - Warns you when the transformation is applied to an XSLT 1.0 stylesheet.
- **Line numbering ("-l")** - Error line numbers are included in the output messages.
- **Debugger trace into XPath expressions (applies to debugging sessions)** - Instructs the *XSLT Debugger* XSLT Debugger to step into XPath expressions.
- **Expand attributes defaults ("-expand")** - Specifies whether or not the attributes defined in the associated DTD or XML Schema are expanded in the output of the transformation you are executing.
- **DTD validation of the source ("-dtd")** - The following options are available:
 - **On** - Requests DTD validation of the source file and of any files read using the `document()` function.
 - **Off** - (default setting) Suppresses DTD validation.
 - **Recover** - Performs DTD validation but treats the errors as non-fatal.



Note: Any external DTD is likely to be read even if not used for validation, since DTDs can contain definitions of entities.

- **Recoverable errors ("-warnings")** - Policy for handling recoverable errors in the stylesheet: Allows you to choose how dynamic errors are handled. One of the following options can be selected:
 - **Recover silently ("silent")** - Continues processing without reporting the error.
 - **Recover with warnings ("recover")** - (default setting) Issues a warning but continues processing.
 - **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.
- **Strip whitespaces ("-strip")** - Strip whitespaces feature can be one of the following three options:
 - **All ("all")** - Strips all whitespace text nodes from source documents before any further processing, regardless of any `xsl:strip-space` declarations in the stylesheet, or any `xml:space` attributes in the source document.
 - **Ignorable ("ignorable")** - Strips all ignorable whitespace text nodes from source documents before any further processing, regardless of any `xsl:strip-space` declarations in the stylesheet, or any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
 - **None ("none")** - default setting. No whitespaces are stripped before further processing. However, whitespace are stripped if this is specified in the stylesheet using `xsl:strip-space`.
- **Optimization level ("-opt")** - Set the optimization level. The value is an integer in the range 0 (no optimization) to 10 (full optimization). This option allows optimization to be suppressed when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

The advanced options available only in Saxon Professional Edition (PE) and Enterprise Edition (EE) are:

- **Allow calls on extension functions ("-ext")** - If checked, the stylesheet is allowed to call external Java functions. This does not affect calls on integrated extension functions, including Saxon and EXSLT extension functions. This option is useful when loading an untrusted stylesheet, such as from a remote site using an `http://[URL]`. It ensures that the stylesheet cannot call arbitrary Java methods and thus gain privileged access to resources on your machine.
- **Register Saxon-CE extension functions and instructions** - Registers the Saxon-CE extension functions and instructions when compiling a stylesheet using the Saxon 9.6.0.7 processors.



Note: Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).

The advanced options available only in Saxon Enterprise Edition (EE) are:

- **XML Schema version** - Use this option to change the default XML Schema version. To change the default XML Schema version, [open the Preferences dialog box](#) and go to **XML > XML Parser > XML Schema**.



Note: This option is available when you configure the Saxon EE advanced options from a transformation scenario.

- **Validation of the source file ("-val")** - Requests schema-based validation of the source file and of any files read using the document () or similar functions. It can have the following values:
 - **Schema validation ("strict")** - This mode requires an XML Schema and specifies that the source documents should be parsed with strict schema-validation enabled.
 - **Lax schema validation ("lax")** - If an XML Schema is provided, this mode enables parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
 - **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.
- **Validation errors in the results tree treated as warnings ("-outval")** - Normally, if validation of result documents is requested, a validation error is fatal. Enabling this option causes such validation failures to be treated as warnings.
- **Write comments for non-fatal validation errors of the result document** - The validation messages are written (where possible) as a comment in the result document itself.
- **Generate bytecode ("--generateByteCode:(on|off)")** - If you enable this option, Saxon-EE attempts to generate Java bytecode for evaluation of parts of a query or stylesheet that are amenable to such an action. For further details regarding this option, go to <http://www.saxonica.com/documentation9.5/index.html#!javadoc>.

Saxon HE/PE/EE Advanced Preferences

To configure the **Saxon HE/PE/EE Advanced** preferences, *open the Preferences dialog box* and go to **XML > XSLT/FO/XQuery > XSLT > Saxon > Saxon HE/PE/EE > Advanced**.

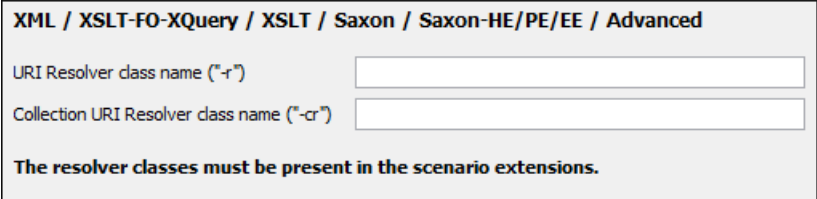


Figure 334: The Saxon HE/PE/EE XSLT Advanced Preferences Panel

You can configure the following advanced XSLT options for the Saxon 9.6.0.7 transformer (all three editions: Home Edition, Professional Edition, Enterprise Edition):

- **URI Resolver class name ("-r")** - Specifies a custom implementation for the URI resolver used by the XSLT Saxon 9.6.0.7 transformer (the -r option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from *the dialog box for configuring the XSLT extension* for the particular transformation scenario.
- **Collection URI Resolver class name ("-cr")** - Specifies a custom implementation for the Collection URI resolver used by the XSLT Saxon 9.6.0.7 transformer (the -cr option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from *the dialog box for configuring the XSLT extension* for the particular transformation scenario.

XSLTProc Preferences

To configure **XSLTProc** options, *open the Preferences dialog box* and go to **XML > XSLT/FO/XQuery > XSLT > XSLTProc**.

The options of the XSLTProc processor are the same as the ones available in the command line:

- **Enable XInclude processing** - If checked, XInclude references will be resolved when XSLTProc is used as transformer in *XSLT transformation scenarios*.
- **Skip loading the document's DTD** - If checked, the DTD specified in the DOCTYPE declaration will not be loaded.
- **Do not apply default attributes from document's DTD** - If checked, the default attributes declared in the DTD and not specified in the document are not included in the transformed document.
- **Do not use Internet to fetch DTD's, entities or docs** - If checked, the remote references to DTD's and entities are not followed.
- **Maximum depth in templates stack** - If this limit of maximum templates depth is reached the transformation ends with an error.

- **Verbosity** - If checked, the transformation will output detailed status messages about the transformation process in the **Warnings** view.
- **Show version of libxml and libxslt used** - If checked, Oxygen XML Developer will display in the **Warnings** view the version of the **libxml** and **libxslt** libraries invoked by XSLTProc.
- **Show time information** - If checked, the **Warnings** view will display the time necessary for running the transformation.
- **Show debug information** - If checked, the **Warnings** view will display debug information about what templates are matched, parameter values, and so on.
- **Show all documents loaded during processing** - If checked, Oxygen XML Developer will display in the **Warnings** view the URL of all the files loaded during transformation.
- **Show profile information** - If checked, Oxygen XML Developer will display in the **Warnings** view a table with all the matched templates, and for each template will display: the match XPath expression, the template name, the number of template modes, the number of calls, the execution time.
- **Show the list of registered extensions** - If checked, Oxygen XML Developer will display in the **Warnings** view a list with all the registered extension functions, extension elements and extension modules.
- **Refuses to write to any file or resource** - If checked, the XSLTProc processor will not write any part of the transformation result to an external file on disk. If such an operation is requested by the processed XSLT stylesheet the transformation ends with a runtime error.
- **Refuses to create directories** - If checked, the XSLTProc processor will not create any directory during the transformation process. If such an operation is requested by the processed XSLT stylesheet the transformation ends with a runtime error.

MSXML Preferences

To configure the MSXML options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XSLT > MSXML**.

The options of the MSXML 3.0 and 4.0 processors are the same as [the ones available in the command line for the MSXML processors](#):

- **Validate documents during parse phase** - If checked and either the source or stylesheet document has a DTD or schema against which its content can be checked, validation is performed.
- **Do not resolve external definitions during parse phase** - By default, MSXSL instructs the parser to resolve external definitions such as document type definition (DTD), external subsets or external entity references when parsing the source and style sheet documents. If this option is checked the resolution is disabled.
- **Strip non-significant whitespaces** - If checked, strips non-significant white space from the input XML document during the load phase. Enabling this option can lower memory usage and improve transformation performance while, in most cases, creating equivalent output.
- **Show time information** - If checked, the relative speed of various transformation steps can be measured:
 - The time to load, parse, and build the input document.
 - The time to load, parse, and build the stylesheet document.
 - The time to compile the stylesheet in preparation for the transformation.
 - The time to execute the stylesheet.
- **Start transformation in this mode** - Although stylesheet execution usually begins in the empty mode, this default may be changed by specifying another mode. Changing the start mode allows execution to jump directly to an alternate group of templates.

MSXML.NET Preferences

To configure the MSXML.NET options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XSLT > MSXML.NET**.

The options of the MSXML.NET processor are:

- **Enable XInclude processing** - If checked, XInclude references will be resolved when MSXML.NET is used as transformer in the [XSLT transformation scenario](#).

- **Validate documents during parse phase** - If checked and either the source or stylesheet document has a DTD or schema against which its content can be checked, validation is performed.
- **Do not resolve external definitions during parse phase** - By default MSXML.NET resolves external definitions such as DTD external subsets or external entity references when parsing source XML document and stylesheet document. Using this option you can disable this behavior. Note, that it may affect also the validation process for the XML document.
- **Strip non-significant whitespaces** - If checked, strips non-significant white space from the input XML document during the load phase. Enabling this option can lower memory usage and improve transformation performance while, in most cases, creating equivalent output.
- **Show time information** - If checked, the relative speed of various transformation steps can be measured:
 - The time to load, parse, and build the input document.
 - The time to load, parse, and build the stylesheet document.
 - The time to compile the stylesheet in preparation for the transformation.
 - The time to execute the stylesheet.
- **Forces ASCII output encoding** - There is a known problem with .NET 1.X XSLT processor (System.Xml.Xsl.XslTransform class): it doesn't support escaping of characters as XML character references when they cannot be represented in the output encoding. That means that when you output a character that cannot be represented in output encoding, it will be outputted as '?'. Usually this happens when output encoding is set to ASCII. With this option checked the output is forced to be ASCII encoded and all non-ASCII characters get escaped as XML character references (&#nnnn; form).
- **Allow multiple output documents** - This option allows to create multiple result documents using [the `exsl:document` extension element](#).
- **Use named URI resolver class** - This option allows to specify a custom URI resolver class to resolve URI references in `xsl:import` and `xsl:include` instructions (during XSLT stylesheet loading phase) and in `document()` function (during XSL transformation phase).
- **Assembly file name for URI resolver class** - The previous option specifies partially or fully qualified URI resolver class name (for example, `Acme.Resolvers.CacheResolver`). Such name requires additional assembly specification using this option or the next option, but fully qualified class name (which always includes an assembly specifier) is all-sufficient. See MSDN for more info about [fully qualified class names](#). This option specifies a file name of the assembly, where the specified resolver class can be found.
- **Assembly GAC name for URI resolver class** - This option specifies partially or fully qualified name of the assembly in the [global assembly cache](#) (GAC), where the specified resolver class can be found. See MSDN for more info about [partial assembly names](#). Also see the previous option.
- **List of extension object class names** - This option allows to specify [extension object](#) classes, whose public methods then can be used as extension functions in an XSLT stylesheet. It is a comma-separated list of namespace-qualified extension object class names. Each class name must be bound to a namespace URI using prefixes, similar to providing XSLT parameters.
- **Use specified EXSLT assembly** - MSXML.NET supports a rich library of the [EXSLT](#) and [EXSLT.NET extension functions](#) embedded or in a plugged in EXSLT.NET library. EXSLT support is enabled by default and cannot be disabled in this version. If you want to use an external EXSLT.NET implementation instead of a built-in one use this option.
- **Credential loading source xml** - This option allows to specify user credentials to be used when loading XML source documents. The credentials should be provided in the `username:password@domain` format (all parts are optional).
- **Credential loading stylesheet** - This option allows to specify user credentials to be used when loading XSLT stylesheet documents. The credentials should be provided in the `username:password@domain` format (all parts are optional).

XQuery Preferences

To configure the XQuery options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XQuery**.

The generic XQuery preferences are the following:

- **XQuery validate with** - Allows you to select the processor that validates XQuery documents. If you are validating an XQuery file that has an associated validation scenario, Oxygen XML Developer uses the processor specified in

the scenario. If no validation scenario is associated, but the file has an associated transformation scenario, the processor specified in the scenario is used. If the processor does not support validation or if no scenario is associated, then the value from this combo box will be used as validation processor.

- **Size limit of Sequence view (MB)** - When the result of an XQuery transformation is [set in the transformation scenario as sequence](#) the size of one chunk of the result that is fetched from the database in lazy mode in one step is set in this option. If this limit is exceeded, go to the **Sequence** view and click **More results available** to extract more data from the database.
- **Format transformer output** - Specifies whether the output of the transformer is formatted and indented (pretty printed).



Note: This option is ignored if you choose **Sequence** (lazy extract data from a database) from the associated transformation scenario.

- **Create structure indicating the type nodes** - If checked, Oxygen XML Developer takes the results of a query and creates an XML document containing copies of all items in the sequence, suitably wrapped.



Note: This option is ignored if you choose **Sequence** (lazy extract data from a database) from the associated transformation scenario.

Saxon HE/PE/EE Preferences

To configure the **Saxon HE/PE/EE** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XQuery > Saxon HE/PE/EE**.

The XQuery preferences for the Saxon 9.6.0.7 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

- **Use a configuration file ("-config")** - Sets a Saxon 9 configuration file that is used for XQuery transformation and validation
- **Recoverable errors ("-warnings")** - Allows you to choose how dynamic errors are handled. The following options can be selected:
 - **recover silently ("silent")** - Continues processing without reporting the error.
 - **recover with warnings ("recover")** - Issues a warning but continues processing.
 - **signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.
- **Strip whitespaces ("-strip")** - Can have one of the following values:
 - **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
 - **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
 - **None ("none")** - Strips *no* whitespace before further processing.
- **Optimization level ("-opt")** - Set the optimization level. The value is an integer in the range 0 (no optimization) to 10 (full optimization). This option allows optimization to be suppressed when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.
- **Use linked tree model ("-tree:linked")** - This option activates the linked tree model.
- **Enable XQuery 3.0 support ("-qversion:(1.0|3.0)")** - If checked, Saxon runs the XQuery transformation with the XQuery 3.0 support (this option is enabled by default).

The following option is available for Saxon 9.6.0.7 Professional Edition (PE) and Enterprise Edition (EE) only:

- **Allow calls on extension functions ("-ext")** - If checked, calls on external functions are allowed. Checking this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

The options available specifically for Saxon 9.6.0.7 Enterprise Edition (EE) are as follows:

- **Validation of the source file ("-val")** - Requests schema-based validation of the source file and of any files read using the document () or similar functions. It can have the following values:
 - **Schema validation ("strict")** - This mode requires an XML Schema and enables parsing the source documents with strict schema-validation enabled.
 - **Lax schema validation ("lax")** - If an XML Schema is provided, this mode enables parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
 - **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.
- **Validation errors in the results tree treated as warnings ("-outval")** - Normally, if validation of result documents is requested, a validation error is fatal. Enabling this option causes such validation failures to be treated as warnings.
- **Enable XQuery update ("-update:(on|off)")** - This option controls whether or not XQuery update syntax is accepted. The default value is off.
- **Backup files updated by XQuery ("-backup:(on|off)")** - If checked, backup versions for any XML files updated with XQuery Update are generated. This option is available when the **Enable XQuery update** option is enabled.

Saxon HE/PE/EE Advanced Preferences

To configure **Saxon HE/PE/EE Advanced** preferences, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XQuery > Saxon HE/PE/EE > Advanced**.

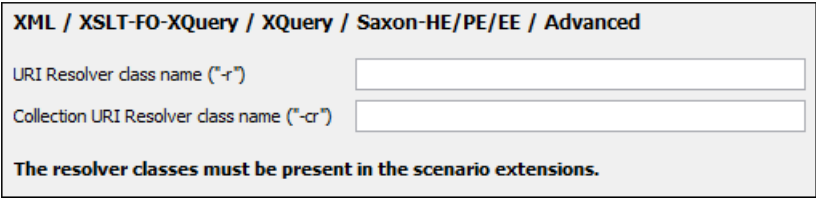


Figure 335: The Saxon HE/PE/EE XQuery Advanced Preferences Panel

The advanced XQuery options which can be configured for the Saxon 9.6.0.7 XQuery transformer (all editions: Home Edition, Professional Edition, Enterprise Edition) are the following:

- **URI Resolver class name** - Allows you to specify a custom implementation for the URI resolver used by the XQuery Saxon 9.6.0.7 transformer (the -r option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from [the dialog box for configuring the XQuery extension](#) for the particular transformation scenario.



Note: If your `URIResolver` implementation does not recognize the given resource, the `resolve(String href, String base)` method should return a null value. Otherwise, the given resource will not be resolved through the [XML catalog](#).

- **Collection URI Resolver class name** - Allows you to specify a custom implementation for the Collection URI resolver used by the XQuery Saxon 9.6.0.7 transformer (the -cr option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from [the dialog box for configuring the XQuery extension](#) for the particular transformation scenario.

Debugger Preferences

To configure the **Debugger** preferences, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > Debugger**.

The following preferences are available:

- **Show xsl:result-document output** - if checked, the debugger presents the output of `xsl:result-document` instructions into the debugger output view.
- **Infinite loop detection** - set this option to receive notifications when an infinite loop occurs during transformation.
- **Maximum depth in templates stack** - sets how many `xsl:template` instructions can appear on the current stack. This setting is used by the infinite loop detection.

- **Debugger layout** - a horizontal layout means that the stack of XML editors takes the left half of the editing area and the stack of XSL editors takes the right one. A vertical layout means that the stack of XML editors takes the upper half of the editing area and the stack of XSL editors takes the lower one.
- **Debugger current instruction pointer** - controls the background color of the current execution node, both in the document (XML) and XSLT/XQuery views.
- **XWatch evaluation timeout (seconds)** - specifies the maximum time that Oxygen XML Developer allocates to the evaluation of XPath expressions while debugging.
- **Messages** - specifies whether a debugging session is stopped, is continued, or you are asked what to do when you are editing the source document involved in a debugging session.

Profiler Preferences

This section explains the settings available for the XSLT Profiler. To access and modify these settings, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > Profiler** (see [Debugger Preferences](#) on page 781).

The following profile settings are available:

- **Show time** - Shows the total time that was spent in the call.
- **Show inherent time** - Shows the inherent time that was spent in the call. The inherent time is defined as the total time of a call minus the time of its child calls.
- **Show invocation count** - Shows how many times the call was called in this particular call sequence.
- **Time scale** - The time scale options determine the unit of time measurement, which may be milliseconds or microseconds.
- **Hotspot threshold** - The threshold below which hot spots are ignored (milliseconds).
- **Ignore invocation less than** - The threshold below which invocations are ignored (microseconds).
- **Percentage calculation** - The percentage base that determines what time span percentages are calculated against:
 - **Absolute** - Percentage values show the contribution to the total time.
 - **Relative** - Percentage values show the contribution to the calling call.

FO Processors Preferences

Oxygen XML Developer includes a built-in formatting objects processor (Apache FOP), but you can also configure other external processors and use them in the transformation scenarios for processing XSL-FO documents.

Oxygen XML Developer provides an easy way to add two of the most commonly used commercial FO processors: *RenderX XEP* and *Antenna House Formatter*. You can easily add *RenderX XEP* as an external FO processor if you have the XEP installed. Also, if you have the *Antenna House Formatter*, Oxygen XML Developer uses the environment variables set by the XSL formatter installation to detect and use it for XSL-FO transformations. If the environment variables are not set for the XSL formatter installation, you can browse and choose the executable file just as you would for XEP. You can use these two external FO processors for [DITA OT transformations scenarios](#) and [XML with XSLT transformation scenarios](#).

To configure the options for the FO Processors, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > FO Processors**. The **FO Processors** preferences page is displayed.

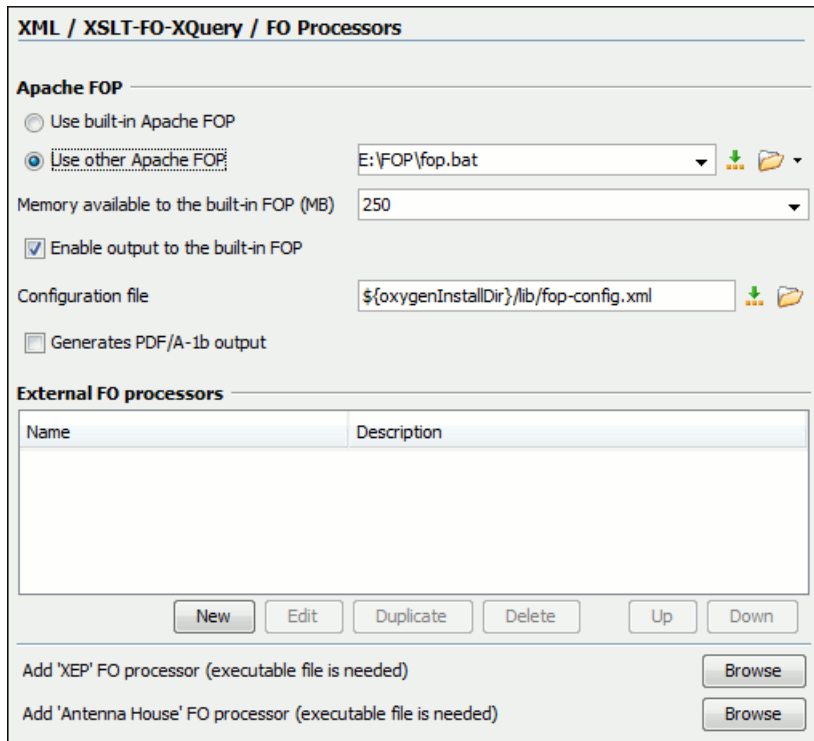


Figure 336: The FO Processors Preferences Page

Apache FOP Section

In this section you can configure options for the built-in Apache processor. The following options are available:

Use built-in Apache FOP

Instructs Oxygen XML Developer to use the built-in Apache FO processor.

Use other Apache FOP

Instructs Oxygen XML Developer to use another Apache FO processor that is installed on your computer.

Enable the output of the built-in FOP

All Apache FOP output is displayed in a results pane at the bottom of the Oxygen XML Developer window, including warning messages about FO instructions not supported by Apache FOP.

Memory available to the built-in FOP

If your Apache FOP transformations fail with an Out of Memory error (**OutOfMemoryError**), use this combo box to select a bigger value for the amount of memory reserved for FOP transformations.

Configuration file for the built-in FOP

Use this option to specify the path to an Apache FOP configuration file (for example, to render to PDF a document containing Unicode content using a special *true type* font).

Generates PDF/A-1b output

When selected, PDF/A-1b output is generated.



Note: All fonts have to be embedded, even the implicit ones. More information about configuring metrics files for the embedded fonts can be found in [Add a font to the built-in FOP](#).



Note: You cannot use the `<filterList>` key in the configuration file since the FOP would generate the following error: *The Filter key is prohibited when PDF/A-1 is active.*

External FO Processors Section

In this section you can manage the external FO processors you want to use in transformation scenarios. You can use the two options at the bottom of the section to use the *RenderX XEP* or *Antenna House Formatter* commercial FO processors.

Add 'XEP' FO processor (executable file is needed)

If *RenderX XEP* is already installed on your computer, you can use this button to choose the XEP executable script (xep.bat for Windows, xep for Linux).

Add 'Antenna House' FO processor (executable file is needed)

If *Antenna House Formatter* is already installed on your computer, you can use this button to choose the Antenna House executable script (AHFCmd.exe or XSLCmd.exe for Windows, and run.sh for Linux/Mac OS).



Note: The built-in **Antenna House Formatter GUI** transformation scenario requires that you configure an external FO processor that runs AHFormatter.exe (Windows only). In the [external FO Processor configuration dialog box](#), you could use "\${env(AHF62_64_HOME)}\AHFormatter.exe" -d \${fo} -s for the value in the **Command line** field, although the environment variable name changes for each version of the AH Formatter and for each system architecture (you can install multiple versions side-by-side). For more information, see <https://github.com/AntennaHouse/focheck/wiki/focheck>.

You can also add external processors or configure existing ones. Press the **New** button to open a configuration dialog box that allows you to add a new external FO processor. Use the other buttons (**Edit**, **Duplicate**, **Delete**, **Up**, **Down**) to configure existing external processors.

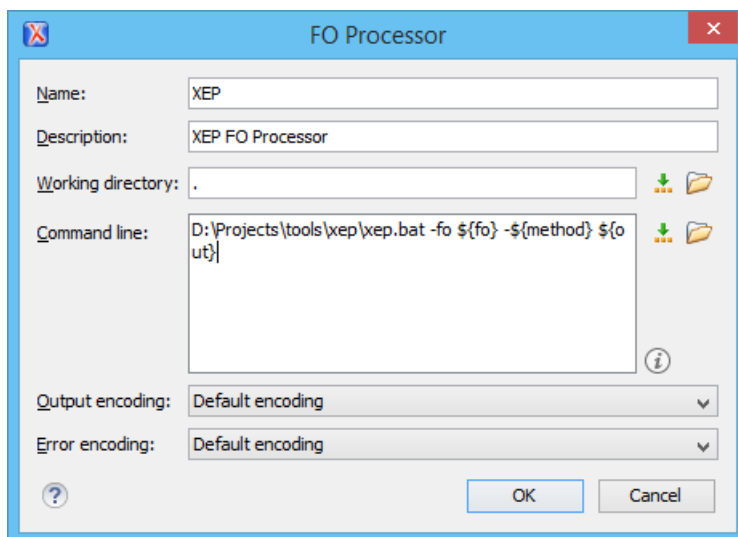


Figure 337: The External FO Processor Configuration Dialog Box

The external **FO Processor** configuration dialog box includes the following options:

Name

The name that will be displayed in the list of available FO processors on the FOP tab of the transformation scenario dialog box.

Description

A textual description of the FO processor that will be displayed in the FO processors table and in tooltips of UI components where the processor is selected.

Working directory

The directory where the intermediate and final results of the processing is stored. You can use one of the following editor variables:

- **\${homeDir}** - The path to the user home directory.
- **\${cfd}** - The path of the current file directory. If the current file is not a local file, the target is the user desktop directory.

- **\${pd}** - The project directory.
- **\${oxygenInstallDir}** - The Oxygen XML Developer installation directory.

Command line

The command line that starts the FO processor, specific to each processor. You can use one of the following editor variables:

- **\${method}** - The FOP transformation method: **pdf**, **ps**, or **txt**.
- **\${fo}** - The input FO file.
- **\${out}** - The output file.
- **\${pd}** - The project directory.
- **\${frameworksDir}** - The path of the `frameworks` subdirectory of the Oxygen XML Developer installation directory.
- **\${oxygenInstallDir}** - The Oxygen XML Developer installation directory.
- **\${ps}** - The platform-specific path separator. It is used between the library files specified in the class path of the command line.

Output Encoding

The encoding of the FO processor output stream that is displayed in a results panel at the bottom of the Oxygen XML Developer window.

Error Encoding

The encoding of the FO processor error stream that is displayed in a results panel at the bottom of the Oxygen XML Developer window.

XPath Preferences

To configure the **XPath** options, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > XPath**.

Oxygen XML Developer allows you to customize the following options:

- **Unescape XPath expression** - the entities of an XPath expressions that you type in the XPath/XQuery Builder and the [XPath toolbar](#) are unescaped during their execution. For example the expression

```
//varlistentry[starts-with(@os,'&#x73;')]
```

is equivalent with:

```
//varlistentry[starts-with(@os,'s')]
```

- **Multiple XPath results** - enable this option to display the results of an XPath in separate tabs in the [The Results View](#) on page 74.
- **No namespace** - if you enable this option, Oxygen XML Developer considers unprefix element names of the evaluated XPath 2.0 / 3.0 expressions as belonging to no namespace.
- **Use the default namespace from the root element** - if you enable this option, Oxygen XML Developer considers unprefix element names of the evaluated XPath expressions as belonging to the default namespace declared on the root element of the XML document you are querying.
- **Use the namespace of the root** - if you enable this option, Oxygen XML Developer considers unprefix element names of the evaluated XPath expressions as belonging to the same namespace as the root element of the XML document you are querying.
- **This namespace** - in this field you can enter the namespace of the unprefix elements.
- **Default prefix-namespace mappings** - in this field you can associate prefixes with namespaces. Use these mappings when you want to define them globally, not for each document.

Custom Engines Preferences

You can configure and run XSLT and XQuery transformations with processors other than [the ones which come with the Oxygen XML Developer distribution](#).



Note:

To configure the **Custom Engines** preferences, [open the Preferences dialog box](#) and go to **XML > XSLT/FO/XQuery > Custom Engines**.

The following parameters can be configured for a custom engine:

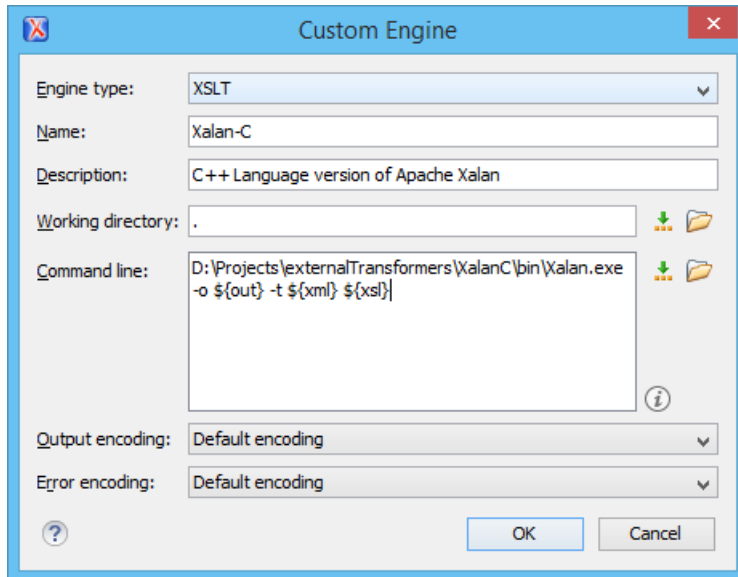


Figure 338: Parameters of a Custom Engine

- **Engine type** - Combo box allowing you to choose the transformer type. There are two options: XSLT engines and XQuery engines.
- **Name** - The name of the transformer displayed in the dialog box for editing transformation scenarios
- **Description** - A textual description of the transformer.
- **Working directory** - The start directory of the transformer executable program. The following editor variables are available for making the path to the working directory independent of the location of the input files:
 - **\${homeDir}** - The user home directory in the operating system.
 - **\${cfd}** - The path to the directory of the current file.
 - **\${pd}** - The path to the directory of the current project.
 - **\${oxygenInstallDir}** - The Oxygen XML Developer install directory.
- **Command line** - The command line that must be executed by Oxygen XML Developer to perform a transformation with the engine. The following editor variables are available for making the parameters in the command line (the transformer executable, the input files) independent of the location of the input files:
 - **\${xml}** - The XML input document as a file path.
 - **\${xmlu}** - The XML input document as a URL.
 - **\${xsl}** - The XSL / XQuery input document as a file path.
 - **\${xslu}** - The XSL / XQuery input document as a URL.
 - **\${out}** - The output document as a file path.
 - **\${outu}** - The output document as a URL.
 - **\${ps}** - The platform separator which is used between library file names specified in the class path.
- **Output Encoding** - The encoding of the transformer output stream.
- **Error Encoding** - The encoding of the transformer error stream.

Ant Preferences

To set Ant preferences, [open the Preferences dialog box](#) and go to **XML > Ant**. This panel allows you to choose the directory containing the Apache Ant libraries (the so-called *Ant Home*) that Oxygen XML Developer uses to handle Ant build files.

There are two options available:

- **Built-in** - the path to the Ant distribution that comes bundled with Oxygen XML Developer installation kit.
- **Custom** - the path to an Ant distribution of your choice.

Import Preferences

To configure the **Import** options, [open the Preferences dialog box](#) and go to **XML > Import**. This page allows you to configure how empty values and `null` values are handled when they are encountered in imported database tables or Excel sheets. Also you can configure the format of date / time values recognized in the imported database tables or Excel sheets.

The following options are available:

- **Create empty elements for empty values** - If checked, an empty value from a database column or from a text file is imported as an empty element.
- **Create empty elements for null values** - If checked, `null` values from a database column are imported as empty elements.
- **Escape XML content** - Enabled by default, this option instructs Oxygen XML Developer to escape the imported content to an XML-safe form.
- **Add annotations for generated XML Schema** - If checked, the generated XML Schema contains an annotation for each of the imported table columns. The documentation inside the annotation tag contains the remarks of the database columns (if available) and also information about the conversion between the column type and the generated XML Schema type.

The section **Date / Time Format** specifies the format used for importing date and time values from Excel spreadsheets or database tables and in the generated XML schemas. The following format types are available:

- **Unformatted** - If checked, the date and time formats specific to the database are used for import. When importing data from Excel a string representation of date or time values are used. The type used in the generated XML Schema is `xs:string`.
- **XML Schema date format** - If checked, the XML Schema-specific format ISO8601 is used for imported date / time data (`yyyy-MM-dd'T'HH:mm:ss` for `datetime`, `yyyy-MM-dd` for `date` and `HH:mm:ss` for `time`). The types used in the generated XML Schema are `xs:datetime`, `xs:date` and `xs:time`.
- **Custom format** - If checked, you can define a custom format for timestamp, date, and time values or choose one of the predefined formats. A preview of the values is presented when a format is used. The type used in the generated XML Schema is `xs:string`.

Date / Time Patterns Preferences

Table 12: Pattern letters

Letter	Date or Time Component	Presentation	Examples
G	Era designator	Text	AD
y	Year	Year	1996; 96
M	Month in year	Month	July; Jul; 07
w	Week in year	Number	27
W	Week in month	Number	2
D	Day in year	Number	189
d	Day in month	Number	10
F	Day of week in month	Number	2
E	Day in week	Text	Tuesday; Tue
a	Am / pm marker	Text	PM

Letter	Date or Time Component	Presentation	Examples
H	Hour in day (0-23)	Number	0
k	Hour in day (1-24)	Number	24
K	Hour in am / pm (0-11)	Number	0
h	Hour in am / pm (1-12)	Number	12
m	Minute in hour	Number	30
s	Second in minute	Number	55
S	Millisecond	Number	978
z	Time zone	General time zone	Pacific Standard Time; PST; GMT-08:00
Z	Time zone	RFC 822 time zone	-0800

Pattern letters are usually repeated, as their number determines the exact presentation:

- *Text* - If the number of pattern letters is 4 or more, the full form is used; otherwise a short or abbreviated form is used if available.
- *Number* - The number of pattern letters is the minimum number of digits, and shorter numbers are zero-padded to this amount.
- *Year* - If the number of pattern letters is 2, the year is truncated to 2 digits; otherwise it is interpreted as a number.
- *Month* - If the number of pattern letters is 3 or more, the month is interpreted as text; otherwise, it is interpreted as a number.
- *General time zone* - Time zones are interpreted as text if they have names. For time zones representing a GMT offset value, the following syntax is used:
 - *GMTOffsetTimeZone* - GMT Sign Hours : Minutes
 - *Sign* - one of + or -
 - *Hours* - one or two digits
 - *Minutes* - two digits
 - *Digit* - one of 0 1 2 3 4 5 6 7 8 9

Hours must be between 0 and 23, and Minutes must be between 00 and 59. The format is locale independent and digits must be taken from the Basic Latin block of the Unicode standard.

- *RFC 822 time zone*: The RFC 822 4-digit time zone format is used:
 - *RFC822TimeZone* - Sign *TwoDigitHours* Minutes
 - *TwoDigitHours* - a number of two digits

TwoDigitHours must be between 00 and 23.

XML Signing Certificates Preferences

Oxygen XML Developer provides two types of *keystores* for certificates that are used for digital signatures of XML documents: Java KeyStore (**JKS**) and Public-Key Cryptography Standards version 12 (**PKCS-12**). A *keystore* file is protected by a password. To configure a certificate *keystore*, [open the Preferences dialog box](#) and go to **XML > XML Signing Certificates**. You can customize the following parameters of a *keystore*:

Figure 339: The Certificates Preferences Panel

- **Keystore type** - The type of *keystore* that Oxygen XML Developer uses (**JKS** or **PKCS-12**).
- **Keystore file** - The location of the imported file.
- **Keystore password** - The password that is used for protecting the privacy of the stored keys.
- **Certificate alias** - The alias used for storing the key entry (the certificate or the private key) inside the *keystore*.
- **Private key password** - The private key password of the certificate (required only for JKS *kestores*).
- **Validate** - Press this button to verify the configured *keystore* and the validity of the certificate.

XML Refactoring Preferences

To specify a folder for loading the custom XML refactoring operations, [open the Preferences dialog box](#) and go to **XML > XML Refactoring**. The following option is available in this preferences page:

- **Load additional refactoring operations from** - Use this text box to specify a folder for loading custom XML refactoring operations. You can use [editor variables](#) by pressing the **Insert Editor Variable** button or search for a folder by using the **Browse** button.

DITA Preferences

To access the DITA Preferences page, [open the Preferences dialog box](#) and go to **DITA**. This preferences page includes the following sections and options:

DITA Open Toolkit Section

This section allows you to specify the default directory of the DITA Open Toolkit distribution (bundled with the Oxygen XML Developer installation) to be used for validating and publishing DITA content. You can select from the following:

- **Built-in DITA-OT 1.8** - This is the default setting and the default DITA OT directory is: [OXYGEN_DIR]/frameworks/dita/DITA-OT.
- **Built-in DITA-OT 2.x (with experimental DITA 1.3 support)** - All defined DITA transformation scenarios will run with DITA-OT 2.x. This also gives you access to new DITA 1.3 file templates when you [create new documents from templates](#). The default DITA OT directory is: [OXYGEN_DIR]/frameworks/dita/DITA-OT2.x.
- **Custom** - In the **Location** field, you can either provide a new file path for the specific DITA OT that you want to use or you can select a previously used one from the drop-down list.

The **Show console output** option allows you to specify when to display the console output log. The following options are available:

- **When build fails** - displays the console output log if the build fails.
- **Always** - displays the console output log, regardless of whether or not the build fails.

The following options are available for the **Insert Reference** and **Edit Properties** operations:

- **Always fill values for attributes** - Allows you to specify that in the **Insert Reference\Edit Properties** dialog box, the values for these attributes will be automatically populated with a detected value (based on the specifications), even if it is the same as the default value.
 - **Format** - If enabled, the *Format* attribute will always be populated automatically.

- **Scope** - If enabled, the *Scope* attribute will always be populated automatically.
- **Type** - If enabled, the *Type* attribute will always be populated automatically.

Data Sources Preferences

To configure the **Data Sources** preferences, *open the Preferences dialog box* and go to **Data Sources**.

Data Sources Preferences

To configure the **Data Sources** preferences, *open the Preferences dialog box* and go to **Data Sources**. In this preferences page you can configure data sources and connections to relational databases as well as native XML databases. You can check the list of drivers available for the major database servers here: http://www.oxygenxml.com/database_drivers.html.

Connection Wizards Section

Create eXist-db XML connection

Click this link to open the dedicated *Create eXist-db XML connection dialog box* that provides a quick way to create an eXist connection.

Data Sources Section

This section allows you to add and configure data sources.

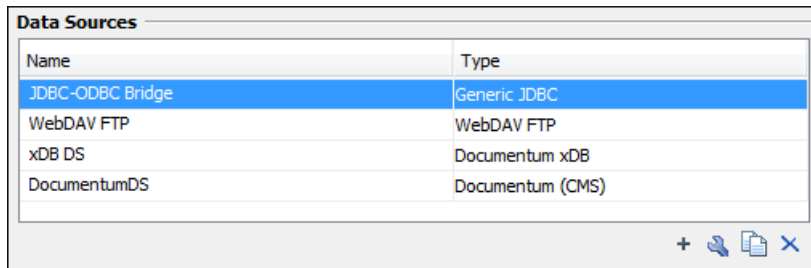


Figure 340: The Data Sources Preferences Panel

The following buttons are available at the bottom of the **Data Sources** panel:

+ New

Opens the **Data Sources Drivers** dialog box that allows you to configure a new database driver.

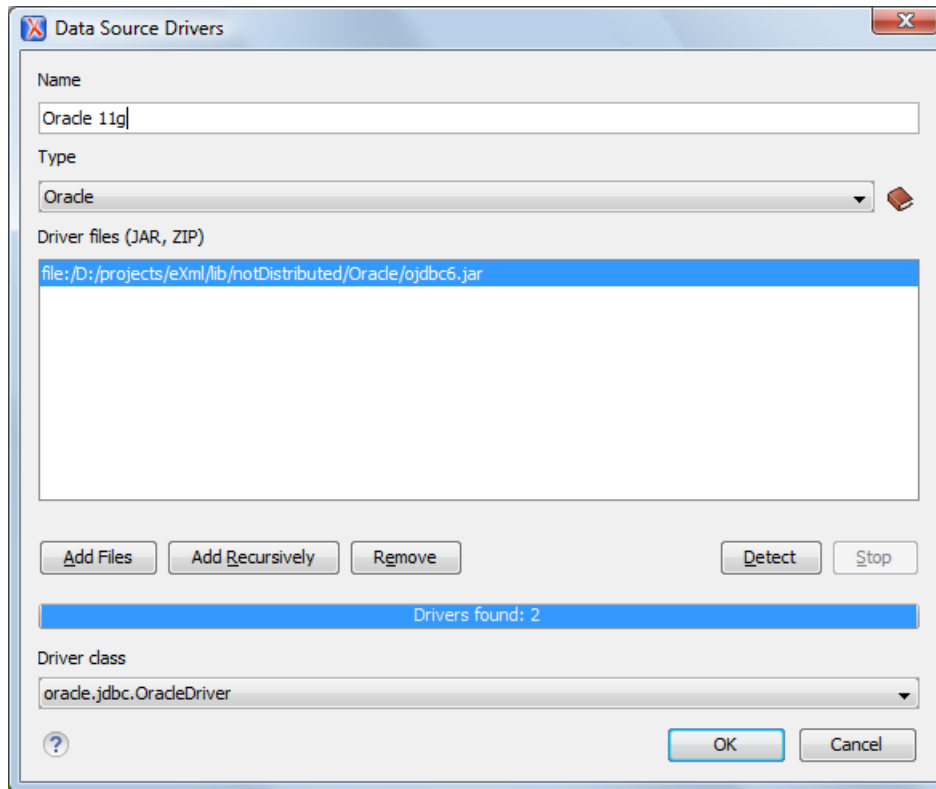


Figure 341: The Data Sources Drivers Dialog Box

The following options are available in the **Data Source Drivers** dialog box:

- **Name** - The name of the new data source driver that will be used for creating connections to the database.
- **Type** - Selects the data source type from the supported driver types.
-  **Help button** - Opens the User Manual at [the list of the sections](#) where the configuration of supported data sources is explained and the URLs for downloading the database drivers are specified.
- **Driver files (JAR, ZIP)** - Lists [download links for database drivers](#) that are necessary for accessing databases in Oxygen XML Developer.
- **Add Files** - Adds the driver class library.
- **Add Recursively** - Adds driver files recursively.
- **Remove** - Removes the selected driver class library from the list.
- **Detect** - Detects driver file candidates.
- **Stop** - Stops the detection of the driver candidates.
- **Driver class** - Specifies the driver class for the data source driver.



Edit

Opens the **Data Sources Drivers** dialog box for editing the selected driver. See above the specifications for the **Data Sources Drivers** dialog box. In order to edit a data source, there must be no connections using that data source driver.



Duplicate

Creates a copy of the selected data source.



Delete

Deletes the selected driver. In order to delete a data source, there must be no connections using that data source driver.

Connections Section

This section allows you to add and configure data source connections.

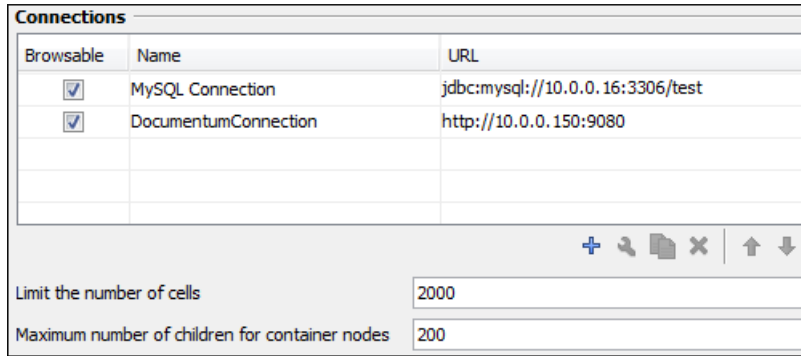


Figure 342: The Connections Preferences Panel

The following buttons are available at the bottom of the **Connections** panel:

+ New

Opens the **Connection** dialog box that allows you to configure a new database connection.

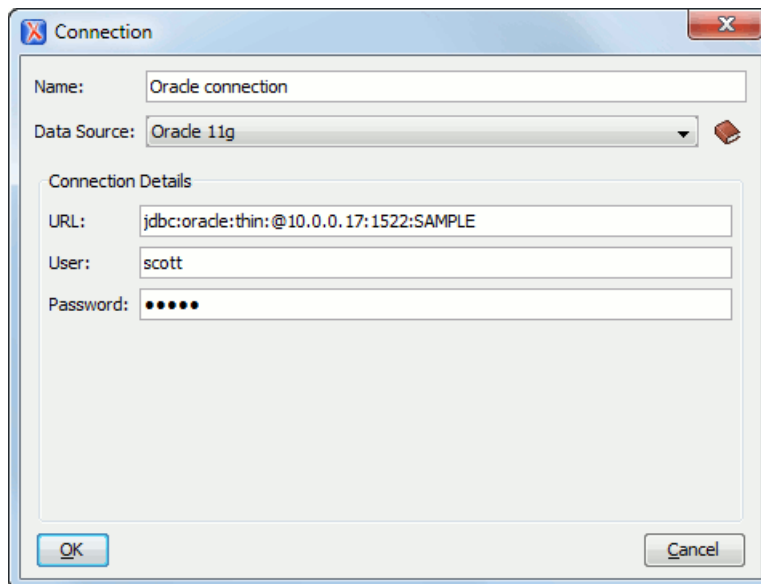


Figure 343: The Connection Dialog Box

The following options are available in the **Connection** dialog box:

- **Name** - The name of the new connection that will be used in transformation scenarios and validation scenarios.
- **Data Source** - Allows selecting a data source defined in the **Data Source Drivers** dialog box.

Depending upon the selected data source, you can set some of the following parameters in the **Connection details** area:

- **URL** - The URL for connecting to the database server.
- **User** - The user name for connecting to the database server.
- **Password** - The password of the specified user name.
- **Host** - The host address of the server.
- **Port** - The port where the server accepts the connection.
- **XML DB URI** - The database URI.
- **Database** - The initial database name.
- **Collection** - One of the available collections for the specified data source.

- **Environment home directory** - Specifies the home directory (only for a Berkeley database).
- **Verbosity** - Sets the verbosity level for output messages (only for a Berkeley database).
- **Use a secure HTTPS connection (SSL)** - Allows you to establish a secure connection to an eXist database through the SSL protocol.

**Edit**

Opens the **Connection** dialog box, allowing you to edit the selected connection. See above the specifications for the **Connection** dialog box.

**Duplicate**

Creates a copy of the selected connection.

**Delete**

Deletes the selected connection.

**Move Up**

Moves the selected connection up one row in the list.

**Move Down**

Moves the selected connection down one row in the list.

Limit the number of cells

For performance issues, you can set the maximum number of cells that will be displayed in the **Table Explorer** view for a database table. Leave this field empty if you want the entire content of the table to be displayed. By default, this field is set to 2000. If a table that has more cells than the value set here is displayed in the **Table Explorer** view, a warning dialog box will inform you that the table is only partially shown.

Maximum number of children for container nodes

In Oracle XML, a container can hold millions of resources. If the node corresponding to such a container in the **Data Source Explorer** view would display all the contained resources at the same time, the performance of the view would be very slow. To prevent this, only a limited number of the contained resources is displayed as child nodes of the container node. Navigation to other contained resources from the same container is enabled by the *Up* and *Down* buttons in the **Data Source Explorer** view. This limited number is set in the field. The default value is 200 nodes.

Download Links for Database Drivers

Below you can find instructions for getting the drivers that are necessary to access databases in Oxygen XML Developer.

- **Berkeley DB XML database** - Copy the *jar* files from the Berkeley database install directory into the Oxygen XML Developer install directory as described in [the procedure for configuring a Berkeley DB data source](#).
- **IBM DB2 Pure XML database** - Go to the [IBM website](#) and in the *DB2 Clients and Development Tools* category select the *DB2 Driver for JDBC and SQLJ* download link. Fill out the download form and download the zip file. Unzip the zip file and use the `db2jcc.jar` and `db2jcc_license_cu.jar` files in Oxygen XML Developer for [configuring a DB2 data source](#).
- **eXist database** - Copy the *jar* files from the eXist database install directory to the Oxygen XML Developer install directory as described in [the procedure for configuring an eXist data source](#).
- **MarkLogic database** - Download the MarkLogic driver from [MarkLogic Community site](#).
- **Microsoft SQL Server 2005 / 2008 database** - Download the appropriate MS SQL JDBC driver from the Microsoft website. For SQL Server 2008 R2 and older go to <http://www.microsoft.com/en-us/download/details.aspx?id=21599>. For SQL Server 2012 and 2014 go to <http://www.microsoft.com/en-us/download/details.aspx?id=11774>.
- **Oracle 11g database** - Go to the [Oracle website](#) and download the Oracle 11g JDBC driver called `ojdbc6.jar`.
- **PostgreSQL 8.3 database** - Go to the [PostgreSQL website](#) and download the PostgreSQL 8.3 JDBC driver called `postgresql-8.3-603.jdbc3.jar`.
- **Documentum xDb (X-Hive/DB) 10 XML database** - Copy the *jar* files from the Documentum xDb (X-Hive/DB) 10 database install directory to the Oxygen XML Developer install directory as described in [the procedure](#) for configuring a Documentum xDb (X-Hive/DB) 10 data source.

Table Filters Preferences

to configure the **Table Filters** preferences, [open the Preferences dialog box](#) and go to **Data Sources > Table Filters**. Here you can choose which of the database table types will be displayed in the **Data Source Explorer** view.

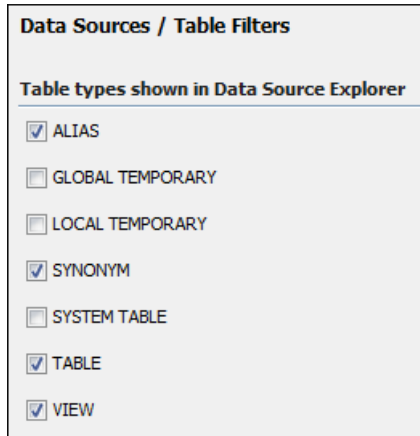


Figure 344: Table Filters Preferences Panel

SVN Preferences

To configure the SVN options, [open the Preferences dialog box](#) and go to **SVN**. In this preferences page, the user preferences for the embedded SVN client tool are configured. Some other preferences for the embedded SVN client tool can be set in the global files called **config** and **servers**. These files contain parameters that act as defaults applied to all the SVN client tools that are used by the same user on his login account on the computer. To open these files for editing, launch the embedded SVN client tool (**Tools > SVN Client**) and select **Global Runtime Configuration > Edit 'config' file** or **Global Runtime Configuration > Edit 'servers' file** from the SVN client **Options** menu.

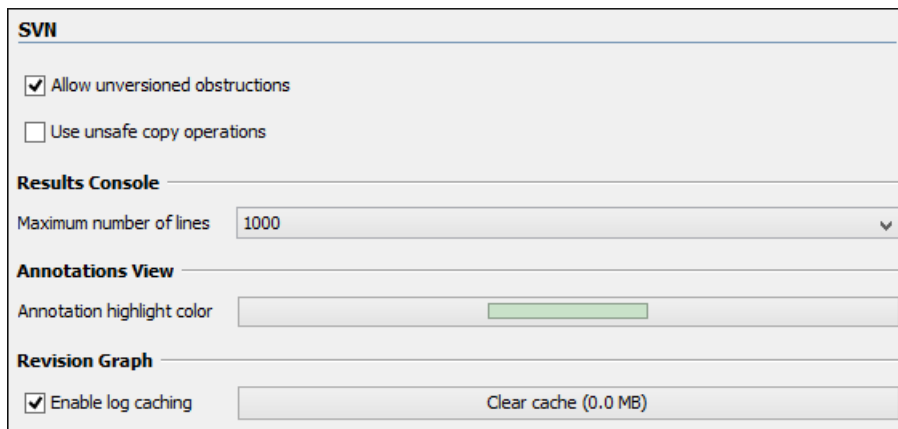


Figure 345: The SVN Preferences Panel

The following SVN options can be configured in this preferences page:

- **Enable symbolic link support** (*available only on Mac OS X and Linux*) - Apache Subversion™ has the ability to put a symbolic link under version control, via the usual SVN **add** command. The Subversion repository has no internal concept of a symbolic link. It stores a versioned symbolic link as an ordinary file with a `svn:special` property attached. On Unix/Linux, the SVN client sees the property and translates the file into a symbolic link in the working copy. If the symbolic link support is disabled, the versioned symbolic links appear as a text file instead of symbolic link.



Note: Windows file systems have no symbolic links, so a Windows client will not do any such translation and the object appears as a normal file.



Important: It is recommended to disable symbolic links support if you do not have versioned symbolic links in your repository, since the SVN operations will work faster. However, you should not disable this option when you do have versioned symbolic links in repository. In that case a workaround would be to reference the working copy by its real path, instead of a path that includes a symbolic link.

- **Allow unversioned obstructions** - Controls how to handle a situation where working copy resources are ignored / unversioned when performing an update operation and incoming files (from the repository) with the same name and location intersect with those being ignored / unversioned. If the option is enabled, the incoming items will become BASE revisions of the ones already present in the working copy, and those present will be made versioned resources and will be marked as modified (exactly as if the user first made the update operation and then modified the files). If the option is disabled, the update operation will fail when encountering files in this situation, possibly leaving other files not updated. By default, this option is enabled.
- **Use unsafe copy operations** - Sometimes when the working copy is accessed through Samba and the SVN client cannot make a safe copy of the committed file due to a delay in getting a write permission, the result is that the committed file will be saved with zero length (the content is removed) and an error will be reported. In this case, this option should be selected so that the SVN client does not try to make the safe copy.
- **HTTPS encryption protocols** (available if you are using Java version 1.6 or older) - Sets a specific encryption protocol to be used when the [application accesses a repository through HTTPS protocol](#). You can choose one of the following values:
 - **SSLv3, TLSv1** (default value)
 - **SSLv3 only**
 - **TLSv1 only**
- **Results Console** - Specifies the maximum number of lines displayed in the **Console** view. The default value is 1000.
- **Annotations View** - Sets the color used in the editor panel for highlighting all the changes contributed to a resource by the revision selected in [the Annotations view](#).
- **Revision Graph** - Enables caching for the action of computing a revision graph. When a new revision graph is requested, one of the caches from the previous actions may be used that will avoid running the whole query again on the SVN server. If a cache is used, it will finish the action much faster.

Working Copy Preferences

To configure the **Working Copy** preferences, [open the Preferences dialog box](#) and go to **SVN > Working Copy**. The option that you are able to configure in this preferences page are specific to SVN working copies:

- **Working copies location** - Allows you to define a location where you keep your working copies. This location is automatically suggested when you checkout a new working copy.
- **Working copy administrative directory** - Allows you to customize the directory name where the svn entries are kept for each directory in the working copy.
- **When loading an old format working copy** - You can instruct Syncro SVN Client to do one of the following:
 - **Always ask** - You are notified when such a working copy is used and you are allowed to choose what action to be taken - to upgrade or not the format of the current working copy.
 - **Never upgrade** - Older format working copies are left untouched. No attempt to upgrade the format is made.



Note: SVN 1.6 and older working copies still need to be upgraded before loading them.

- **Enable working copy caching** - If checked, the content of the working copies is cached for refresh operations.
- **Automatically refresh the working copy** - If checked, the working copy is refreshed from cache. Only the new changes (modifications with a date/time that follows the last refresh operation) are refreshed from disk. Disabled by default.
- **Allow moving/renaming mixed revision directories** - If enabled, the Syncro SVN Client will allow you to move or rename a directory even if its child items have a different revision. Otherwise, an error message is displayed when there are multiple revisions to avoid unnecessary conflicts. It is recommended to leave this option disabled and to **Update** the subtree to a single revision before moving or renaming it.

- **When synchronizing with repository** - The action that will be executed automatically after the **Synchronize** action. The possible actions are:
 - **Always switch to 'Modified' mode** - The **Synchronize** action is followed automatically by a switch to **Modified** mode of **Working Copy** view, if **All Files** mode is currently selected.
 - **Never switch to 'Modified' mode** - Keeps the currently selected view mode unchanged.
 - **Always ask** - The user is always asked if he wants to switch to **Modified** mode.
- **Application global ignores** - Allows setting file patterns that may include the * and ? wildcards for unversioned files and folders that must be ignored when displaying the working copy resources in *the Working Copy view*. These patterns are case-sensitive. For example, *.txt matches file.txt, but does not match file.TXT.

Diff Preferences

To configure the SVN Diff options, *open the Preferences dialog box* and go to **Diff**.

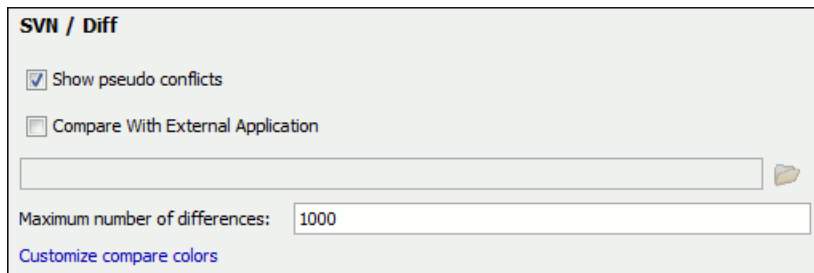


Figure 346: The SVN Diff Preferences Panel

The SVN diff preferences are the following:

- **Show pseudo conflicts** - Specifies whether the *the Compare view* displays pseudo-conflicts. A pseudo-conflict occurs when two developers make the same change, for example when they both add or remove the same line of code.
- **Compare With External Application** - Specifies an external application to be launched for compare operations in the following cases:
 - When two history revisions are compared.
 - When the working copy file is compared with a history revision.
 - When *a conflict is edited*.

The parameters \${firstFile} and \${secondFile} specify the positions of the two compared files in the command line for the external diff application. The parameter \${ancestorFile} specifies the common ancestor (that is, the BASE revision of a file) in a three-way comparison. The working copy version of a file is compared with the repository version, with the BASE revision (the latest revision read from the repository by an Update or Synchronize operation) being the common ancestor of these two compared versions.



Important: If the path to the external compare application includes spaces (or any of the subsequent options or arguments), then each of these paths or *tokens* must be double-quoted for the Oxygen XML Developer to correctly parse and identify them. For example, C:\Program Files\compareDir\app name.exe must be written as "C:\Program Files\compareDir\app name.exe".

- **Maximum number of differences** - Sets the maximum number of differences allowed in the view.

Messages Preferences

To configure the options for **Messages**, *open the Preferences dialog box* and go to **SVN > Messages**. This preferences page allows you to disable the following warning messages which may appear in the application:

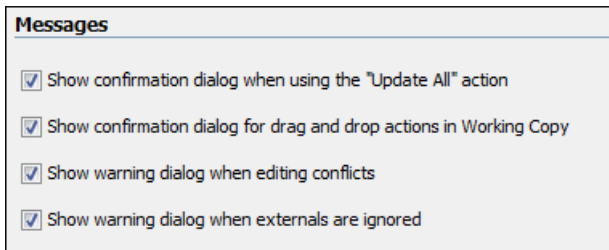


Figure 347: The Messages Preferences Panel

- **Show confirmation dialog when using the "Update All" action** - Allows you to avoid performing accidental update operations by requesting you to confirm them before execution.
- **Show confirmation dialog for drag and drop actions in Working Copy** - This option avoids doing a drag and drop when you just want to select multiple files in the Working Copy view.
- **Show warning dialog when editing conflicts** - When the **Edit Conflicts** action is executed, a warning dialog box notifies you that the action overwrites the conflicted version of the file created by an update operation. The conflicted file is overwritten with the version of the same file which existed in the working copy before the update operation and then *proceeds with the visual editing of the conflicting file*.
- **Show warning dialog when "svn:externals" definitions are ignored** - A warning dialog box is displayed when "svn:externals" definitions are ignored before performing any operation that updates resources of the working copy (like *Update* and *Override and Update*).

Diff Preferences

The Diff Preferences Page has sub-pages for configuring File Comparisons and Directory Comparisons.

Files Comparison Preferences

To configure the **Files Comparison** options, [open the Preferences dialog box](#) and go to **Diff > Files Comparison**. This preferences page allows you to configure the following options:

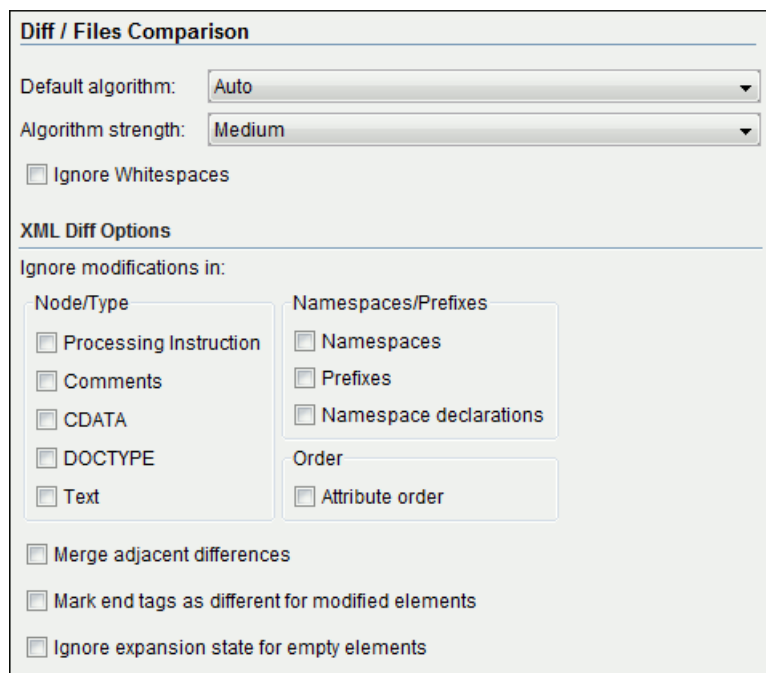


Figure 348: The Files Comparison Preferences Panel

- **Default algorithm** - the default algorithm used for comparing files. The following options are available:
 - **Auto** - automatic selection of the diff algorithm, based on the content and size

- **Characters** - computes the differences at character level
- **Words** - computes the differences at word level
- **Lines** - computes the differences at line level
- **Syntax aware** - computes differences for the file types or XML fragments known by Oxygen XML Developer, taking the syntax (the specific types of tokens) into consideration
- **XML Fast** - a diff algorithm well-suited for large XML documents or fragments (sacrifices accuracy in favor of speed)
- **XML Accurate** - XML-tuned diff algorithm that favors accuracy over speed
- **Algorithm strength** - controls the amount of resources allocated to the application to perform the comparison. The algorithm stops searching more differences when reaches the maximum allowed resources. A dialog box is displayed when this limit is reached and partial results are displayed. Four settings are available: **Low**, **Medium** (default), **High** and **Very High**.
- **Ignore Whitespaces** - ignoring whitespaces means that before performing the comparison, the application normalizes the content (collapses any sequence of whitespace characters (space, newline or tab characters) into a single space) and trims its leading and trailing whitespaces.



Note: If the **Ignore Whitespaces** check box is selected, comparing the `a b` sequence with `a b`, Oxygen XML Developer finds no differences, because after normalization, all whitespaces from the first sequence are collapsed into a single space character. However, when comparing `a b` with `ab` (no whitespace between `a` and `b`), Oxygen XML Developer signals a difference.

- **XML Diff Options** - this set of options allows you to specify the types of XML nodes for which the differences will be ignored (will not be reported) by the **XML Fast** and **XML Accurate** algorithms.
- **Merge adjacent differences** - considers two adjacent differences as one when the differences are painted in the side-by-side editors. If unchecked, every difference is represented separately.
- **Mark end tags as different for modified elements** - end tags of modified elements are presented as differences too, otherwise only the start tags are presented as differences.
- **Ignore expansion state for empty elements** - empty elements in both expansion states are considered matched, that is `<element/>` and `<element></element>` are considered equal.

Appearance Preferences

To configure the appearance options for the Files Comparison tool, [open the Preferences dialog box](#) and go to **Diff > Files Comparison > Appearance**. This preferences page offers the following options:

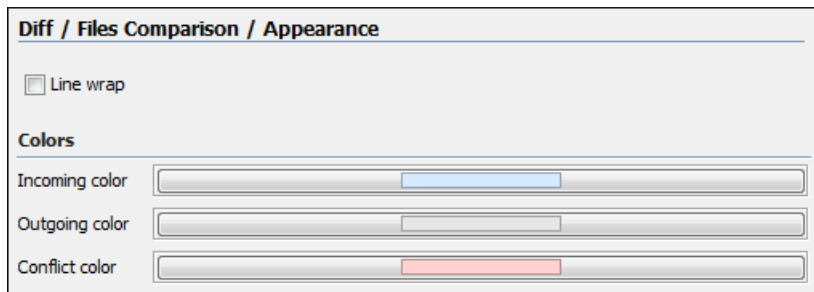


Figure 349: Files Comparison Appearance Preferences Panel

- **Line wrap** - Wraps at the right margin of each panel the lines presented in the two diff panels, so no horizontal scrollbar is necessary.
- **Incoming color** - Specifies the color used for incoming changes on the vertical bar, that shows the differences between the compared files.
- **Outgoing color** - Specifies the color used for outgoing changes on the vertical bar, that shows the differences between the compared files.
- **Conflict color** - Specifies the color used for conflicts on the vertical bar, that shows the differences between the compared files.

Directories Comparison Preferences

To configure the **Directories Comparison** preferences, *open the [Preferences dialog box](#)* and go to **Diff > Directories Comparison**.

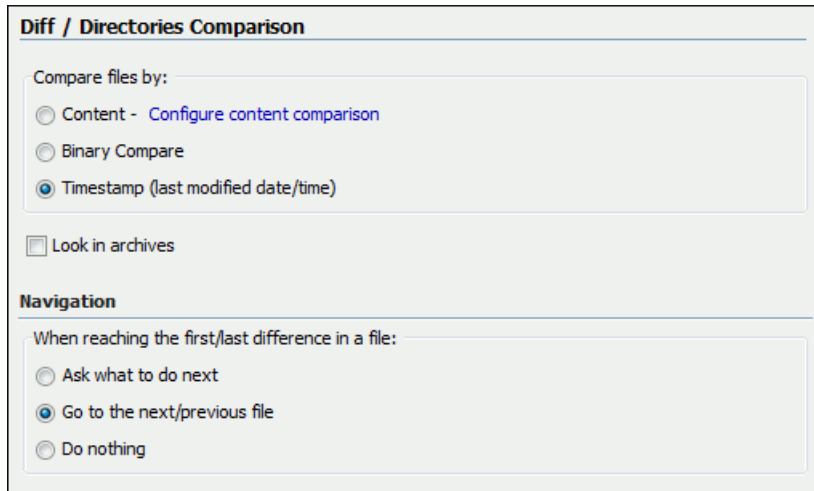


Figure 350: The Diff Preferences Panel

For the directories comparison, you can specify:

- **Compare files by** - Controls the method used for comparing two files:
 - **Content** - The file content is compared using the current *diff algorithm*. This option is applied for a pair of files only if that file type is associated with a built-in editor type (either associated by default or associated by the user when prompted to do so on opening a file of that type for the first time).
 - **Binary Compare** - The files are compared at byte level.
 - **Timestamp (last modified date / time)** - The files are compared only by their last modified timestamp.
- **Look in archives** - If checked, *archives known by Oxygen XML Developer* are considered directories and their content is compared just like regular files.
- **Navigation** - This options control the behavior of the differences traversal actions (**Go to previous modification**, **Go to next modification**) when the first or last difference in a file is reached:
 - **Ask what to do next** - A dialog box is displayed asking you to confirm that you want the application to display modifications from the previous or next file.
 - **Go to the next/previous file** - The application opens the next or previous file without waiting for your confirmation.
 - **Do nothing** - No further action is taken.

Appearance Preferences

To configure the appearance options for the Directories Comparison tool, *open the [Preferences dialog box](#)* and go to **Diff > Directories Comparison > Appearance**.

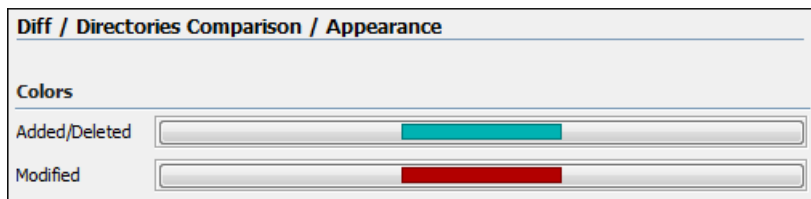


Figure 351: The Diff Appearance Preferences Panel

- **Added/Deleted** - Color used for marking added or deleted files and folders.
- **Modified** - Color used for marking modified files.

Archive Preferences

To configure **Archive** preferences, *open the [Preferences dialog box](#)* and go to **Archive**.

The following options are available in the **Archive** preferences panel:

- **Archive backup options** - Controls if the application makes backup copies of the modified archives. The following options are available:
 - **Always create backup copies of modified archives** - When you modify an archive, its content is backed up.
 - **Never create backup copies of modified archives** - No backup copy is created.
 - **Ask for each archive once per session** - Once per application session for each modified archive, user confirmation is required to create the backup. This is the default setting.



Note: Backup files have the name `originalArchiveFileName.bak` and are located in the same folder as the original archive.

- **Archive types** - This table contains all known archive extensions mapped to known archive formats. Each row maps a list of extensions to an archive type supported in Oxygen XML Developer. You can edit an existing mapping or create a new one by associating your own list of extensions to an archive format.



Important: You have to restart Oxygen XML Developer after removing an extension from the table in order for that extension to not be recognised anymore as an archive extension.

- **Store Unicode file names in Zip archives** - Use this option when you archive files that contain international (that is, non-English) characters in file names or file comments. If this option is selected and an archive is modified in any way, UTF-8 characters are used in the names of all files in the archive.

Plugins Preferences

You are able to add plugins that extend the functionality of Oxygen XML Developer. The plugins are shipped as separate packages. To check for new plugins, go to http://www.oxygenxml.com/oxygen_sdk.html.

A plugin consists of a separate sub-folder in the **Plugins** folder of the Oxygen XML Developer installation folder. This sub-folder must contain a valid `plugin.xml` file in accordance with the `plugin.dtd` file located in the **Plugins** folder.

Oxygen XML Developer automatically detects and loads plugins installed correctly in the **Plugins** folder and displays them in the **Plugins** preferences page. To configure plugins, *open the [Preferences dialog box](#)* and go to **Plugins**.

You can use the check-boxes in front of each plugin to enable or disable them. To display the properties of a plugin in the second section of the **Plugins** preferences page, click the name of the plugin.

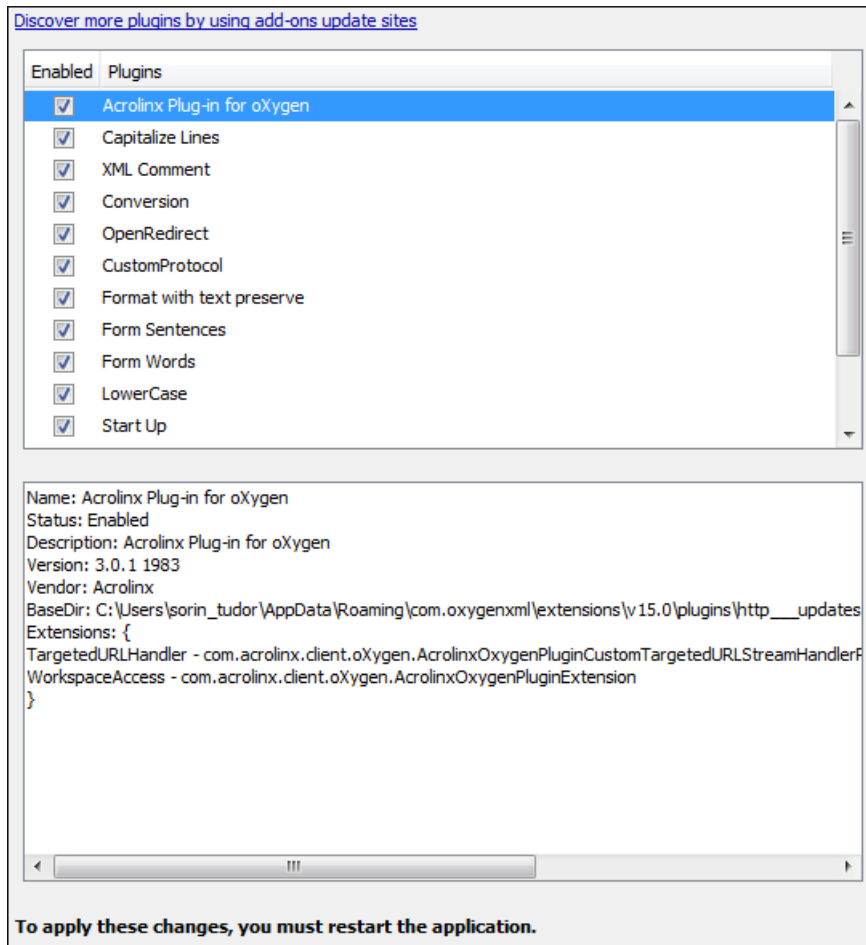


Figure 352: The Plugins Preferences Panel

Also, you are able to install a plugin as an add-on. For further details about this, go to [Deploying Add-ons](#)

External Tools Preferences

The **External Tools** preferences panel is opened from menu **Tools > External Tools > Configure**.

A command-line tool can be started in the Oxygen XML Developer user interface as if from the command line of the operating system shell by selecting it from the  **External Tools** drop-down menu in the **Tools** toolbar. The tool must first be configured in the **External Tools** preferences page.

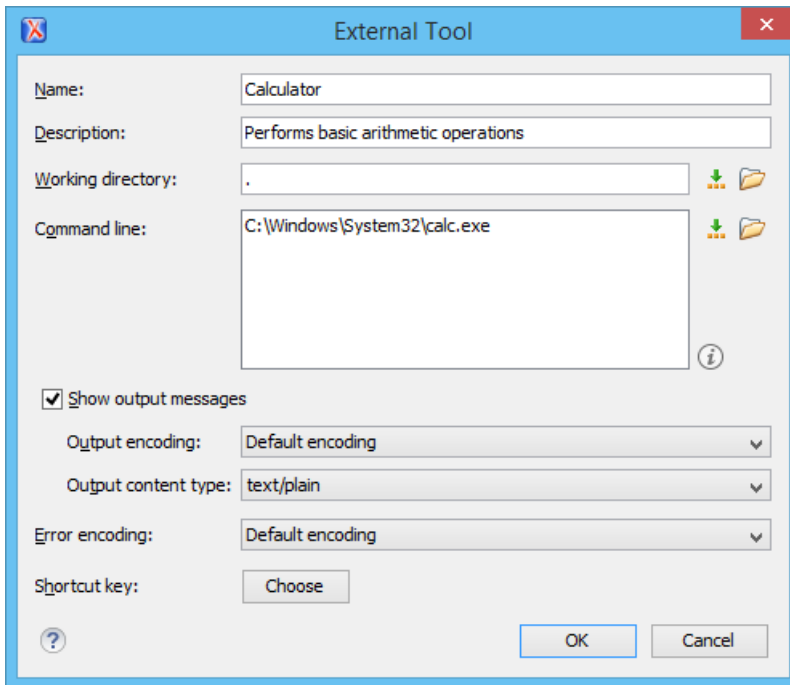


Figure 353: The External Tools Configuration Dialog Box

The configuration dialog box includes the following options:

- **Name** - The name of the menu entry corresponding to this tool that will be displayed in the **Tools > External Tools** menu and in the **External Tools** drop-down menu in the **Tools** toolbar.
- **Description** - The description of the tool displayed as tooltip where the tool name is used.
- **Working directory** - The directory the external tool will use to store intermediate and final results. Here you can use one of the following editor variables: `${cfd}`, `${pd}`, `${oxygenInstallDir}`, `${homeDir}`, `${system(var.name)}`, `${date(pattern)}`, `${xpath_eval(expression)}`.
- **Command line** - The command line that will start the external tool. Here you can use one of the following editor variables: `${homeDir}`, `${home}`, `${cfn}`, `${cfne}`, `${cf}`, `${currentFileURL}`, `${cfd}`, `${cfdu}`, `${tsf}`, `${pd}`, `${pdu}`, `${oxygenInstallDir}`, `${oxygenHome}`, `${frameworksDir}`, `${frameworks}`, `${ps}`, `${timeStamp}`, `${uuid}`, `${id}`, `${afn}`, `${afne}`, `${af}`, `${afu}`, `${afd}`, `${afdu}`, `${ask('message', type, 'default_value')}`, `${dbgXML}`, `${dbgXSL}`, `${env(VAR_NAME)}`, `${system(var.name)}`, `${date(pattern)}`, and `${xpath_eval(expression)}`
- **Show output messages** - When this option is checked all the messages emitted by the external tool are displayed in the **Results** view. You can edit the following options:
 - **Output encoding** - The encoding of the output stream of the external tool that will be used by Oxygen XML Developer to read the output of the tool.
 - **Output content type** - A list of predefined content type formats that instruct Oxygen XML Developer how to display the generated output. For example, setting the **Output content type** to `text/xml` enables the syntax coloring of XML output.

When this option is unchecked only the error messages are displayed.

- **Error Encoding** - The encoding of the error stream of the external tool that will be used by Oxygen XML Developer to read this error stream.
- **Shortcut key** - The keyboard shortcut that launches the external tool.

Menu Shortcut Keys Preferences

To configure the **Menu Shortcut Keys** options, [open the Preferences dialog box](#) and go to **Menu Shortcut Keys**. Alternatively you can go to **Options > Menu Shortcut Keys**. You can use this page to configure shortcut keys for the actions available in Oxygen XML Developer. The shortcuts assigned to menu items are displayed in the below table.

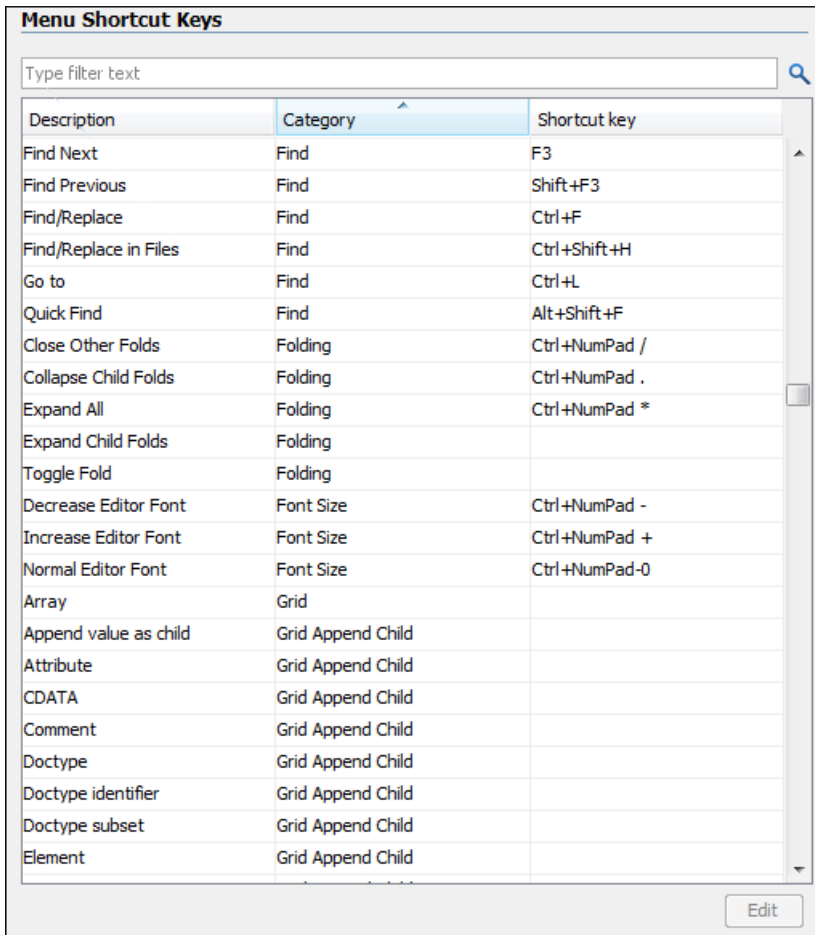


Figure 354: The Menu Shortcut Keys Preferences Panel

The **Menu shortcut Keys** preferences page also contains the shortcuts that you define at *document type* level.



Note: A shortcut defined at *document type* level overwrites a default shortcut.

To find a specific action, you can use the filter to search through the **Description**, **Category**, and **Shortcut Key** columns:

- **Description** - this column provides a short description of the action.
- **Category** - this column provides a classification of the actions in categories for easier management. For example, you can distinguish the **Cut** operation available in the **Text** view from the one available in the **Tree** view by assigning them to different categories.
- **Shortcut key** - this column holds the combination of keys on your keyboard that launches the action. You can either double click a row of the **Shortcut key** column or press the **Edit** button to enter a new shortcut.
- **'Home' and 'End' keys are applied at line level** - Option available only on Mac OS X that controls the way the HOME and END keys are interpreted. If enabled, the default behavior of the Mac OS X HOME and END keys is overridden and the cursor moves only on the current line.

File Types Preferences

Oxygen XML Developer offers editing support for a wide variety of file types, but users are free to add new file extensions and associate them with the editor type which fits better. The associations set here between a file extension and the type of editor which opens the file for editing have precedence over the default associations available in [the File > New dialog box](#).

To configure the **File Types** options, [open the Preferences dialog box](#) and go to **File Types**.

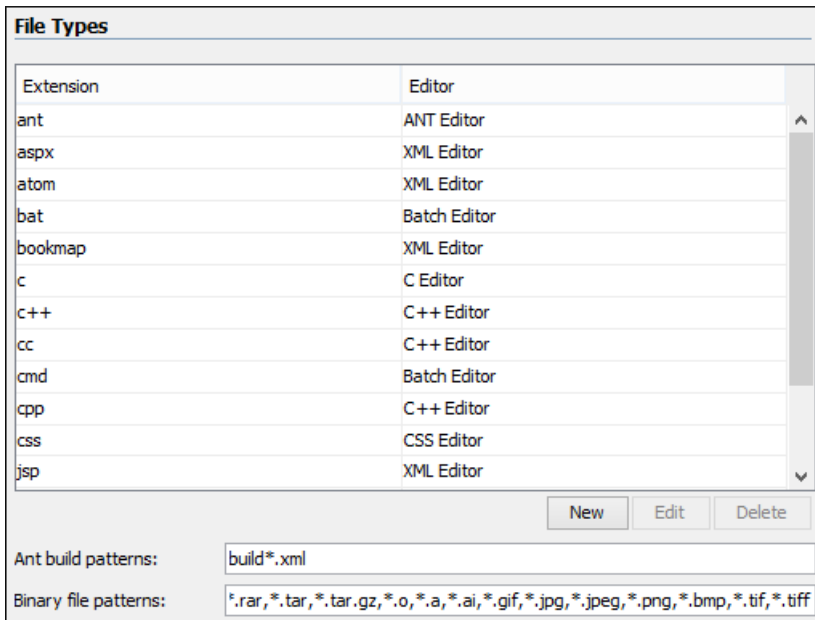


Figure 355: The File Types Preferences Panel

The table columns contain the following data:

- **Extension** - The extensions of the files that will be associated with an editor type.
- **Editor** - The type of editor which the extensions will be associated with. Some editors provide easy access to frequent operations via toolbars (XML editor, XSL editor, DTD editor) while others provide just a syntax highlight scheme (Java editor, SQL editor, Shell editor, etc.).

If the editor set here is not one of the XML editors (XML editor, XSL editor, XSD editor, RNG editor, WSDL editor) then the encoding set in [the preference Encoding for non XML files](#) is used for opening and saving a file of this type.

The files that match the **Ant build patterns** will be associated with the Ant editor.

The files that match the **Binary file patterns** patterns are handled as binary and opened in the associated system application. Also, they are excluded from the following actions available in the [Project view: File/Replace in Files, Check Spelling in Files, Validate](#).

The Open/Find Resources Preferences Page

To configure the **Open/Find Resource** options, [open the Preferences dialog box](#) and go to **Open/Find Resource**.

The following options are available in the **Open/Find Resource** preferences page:

- **Limit search results to** - specifies the maximum number of results that are displayed in the **Open/Find Resource** dialog box or in the **Open/Find Resources** view.
- **Enable searching in content** - enable this option to activate the **In content** option of the **Open/Find Resource** view and **Open/Find Resource** dialog box. In case this option is disabled you can only use the **Open/Find Resource** feature to search in file paths.
- **Ignore content of these files** - allows you to select specific directories, files, or file types that are ignored when you perform a search. For example, `*.txt` ignores all the `.txt` files, `*/topics/*` ignores all the files from the `topics` directory, regardless of their depth, and `file:/C:/tmp/*` ignores everything from the `tmp` directory.



Note: The specified pattern must begin with the desired protocol (in our case *file*) and also contain forward slash (/).

- **Index the content of remote resources** - controls the indexing of resources that are not local. For example, the resources referenced in a DITA map opened from a remote server (from a CMS or from a WebDAV location) are not indexed by default. To index the content of these resources, enable this option.



Note: Enabling this option may lead to delays when the indexing is computed.

- **Exact matches** - this option controls whether the search results should exactly match the whole words that you introduce in the search field of the **Open/Find Resource** dialog box or **Open/Find Resources** view.
- **Prefix matches** - this option controls whether the search results should match documents containing words starting with the searched terms. For instance searching for "pref page" will find documents containing also "preference pages".
- **Automatically join search terms using:** - select the default boolean operator that Oxygen XML Developer applies when you perform a search. For example if the AND operator is selected and you enter "car assembly" in the dialog box, the resulted documents must contain both of the words. If you choose OR, the resulted documents must contain one of the selected search terms. Results containing both words are promoted to the top of the list.
- **Enable XML-aware searching for files with size less than** - allows you to perform an [XML specific search](#) for XML elements and attributes.



Note: Enabling this option may slow down the indexing of your documents and increase the index size on the disk.

- **Stop Words** - list of comma separated stop words. Words added in this list are filtered out prior to processing a search query.

Custom Editor Variables Preferences

An editor variable is useful for making a transformation scenario, a validation scenario or an external tool independent of the file path on which the scenario / command line is applied. An editor variable is specified as a parameter in a transformation scenario, validation scenario or command line of an external tool. Such a variable is defined by a name, a string value and a text description. A custom editor variable is defined by the user and can be used in the same expressions as the built-in ones.

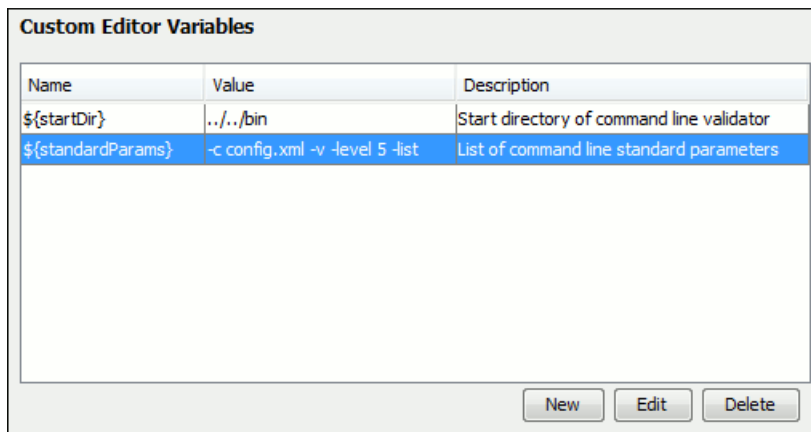


Figure 356: Custom Editor Variables

Network Connection Settings Preferences

This section presents the options available in the **Network Connection Settings** preferences pages.

Proxy Preferences

Some networks use proxy servers to provide internet services to LAN clients. Clients behind the proxy may therefore, only connect to the Internet via the proxy service. If you are not sure whether your computer is required to use a proxy server to connect to the Internet or you do not know the proxy parameters, consult your network administrator.

To configure the **Proxy** options, [open the Preferences dialog box](#) and go to **Network Connection Settings > Proxy**. The following options are available:

- **Direct connection** - Specifies whether the HTTP(S) connections go directly to the target host without going through a proxy server.
 - **Use system settings** - Specifies whether the HTTP(S) connections go through the proxy server set in the operating system. For example, on Windows the proxy settings are the ones that Internet Explorer uses.
-  **Attention:** The system settings for the proxy cannot be read correctly from the operating system on some Linux systems. The system settings option should work properly on Gnome based Linux systems, but it does not work on KDE based ones as the Java virtual machine does not offer the necessary support yet.
- **Manual proxy configuration** - Specifies whether the HTTP(S) connections go through the proxy server specified in the **Address** and **Port** fields.
 - **No proxy for** - Specifies the hosts to which the connections must not go through a proxy server. A host needs to be written as a fully qualified domain name (for example, *myhost.example.com*) or as a domain name (for example, *example.com*). Use comma as a separator between multiple hosts.
 - **User** - Specifies the user necessary for authentication with the proxy server.
 - **Password** - Specifies the password necessary for authentication with the proxy server.
 - **SOCKS Proxy** - In this section you set the host and port of a SOCKS proxy through which all the connections pass. If the **Address** field is empty the connections use no SOCKS proxy.

Using an automatic proxy configuration script (PAC)

If you have set up the path to an automatic proxy configuration script in your system (IE for Windows) Oxygen XML Developer cannot detect this setting out of the box.

You can create a new folder `[OXYGEN_DIR]\lib\endorsed` in which you should copy two additional Java libraries: `deploy.jar` and `plugin.jar`. These libraries can be found in the folder `[OXYGEN_DIR]\jre\lib` if the application comes with a bundled Java VM or otherwise in the Java VM installation used to run the application.

HTTP(S)/WebDAV Preferences

To set the **HTTP(S)/WebDAV** preferences, [open the Preferences dialog box](#) and go to **Network Connection Settings > HTTP(S)/WebDAV**. The following options are available:

- **Internal Apache HttpClient Version** - Oxygen XML Developer uses the Apache HttpClient to establish connections to HTTP servers. To enable Oxygen XML Developer to benefit from particular sets of features provided by different versions, you may choose between v3 and v4.
-  **Note:** For a full list of features, go to <http://hc.apache.org/httpclient-3.x/> and <http://hc.apache.org/httpcomponents-client-ga/>
- **Maximum number of simultaneous connections per host** - Defines the maximum number of simultaneous connections established by the application with a distinct host. Servers might consider multiple connections opened from the same source to be a **Denial of Service** attack. You can avoid that by lowering the value of this option.
-  **Note:** This option accepts a minimum value of 5.
- **Read Timeout (seconds)** - The period in seconds after which the application considers that an HTTP server is unreachable if it does not receive any response to a request sent to that server.
 - **Enable HTTP 'Expect: 100-continue' handshake for HTTP/1.1 protocol** - Activates *Expect: 100-Continue* handshake. The purpose of the *Expect: 100-Continue* handshake is to allow a client that is sending a request message with a request body to determine if the origin server is willing to accept the request (based on the request headers) before the client sends the request body. The use of the *Expect: 100-continue* handshake can result in noticeable performance improvement when working with databases. The *Expect: 100-continue* handshake should be used with caution, as it may cause problems with HTTP servers and proxies that do not support the HTTP/1.1 protocol.

- **Use the 'Content-Type' header field to determine the content type** - When checked, Oxygen XML Developer tries to determine a resource type using the **Content-Type** header field. This header indicates the *Internet media type* of the message content, consisting of a type and subtype, for example:

```
Content-Type: text/xml
```

When unchecked, the resource type is determined by analyzing its extension. For example, a file ending in `.xml` is considered to be an XML file.

- **Automatic retry on recoverable error** - If enabled, if an HTTP error occurs when Oxygen XML Developer communicates with a server via HTTP, for example sending / receiving a SOAP request / response to / from a Web services server, and the error is recoverable, Oxygen XML Developer tries to send again the request to the server.
- **Automatically accept a security certificate, even if invalid** - When enabled, the HTTPS connections that Oxygen XML Developer attempts to establish will accept all security certificates, even if they are invalid.



Important: By accepting an invalid certificate, you accept at your own risk a potential security threat, since you cannot verify the integrity of the certificate's issuer.

- **Encryption protocols (SVN Client only)** - this option is available only if you run the application with Java 1.6 or older. Sets a specific encryption protocol used when a repository is accessed through HTTPS protocol. You can choose one of the following values:
 - **SSLv3, TLSv1** (default value);
 - **SSLv3 only**;
 - **TLSv1 only**.
- **Lock WebDAV files on open** - If checked, the files opened through WebDAV are locked on the server so that they cannot be edited by other users while the lock placed by the current user still exists on the server.

(S)FTP Preferences

To configure the (S)FTP options, [open the Preferences dialog box](#) and go to **Network Connection Settings > (S)FTP**. You can customize the following options:

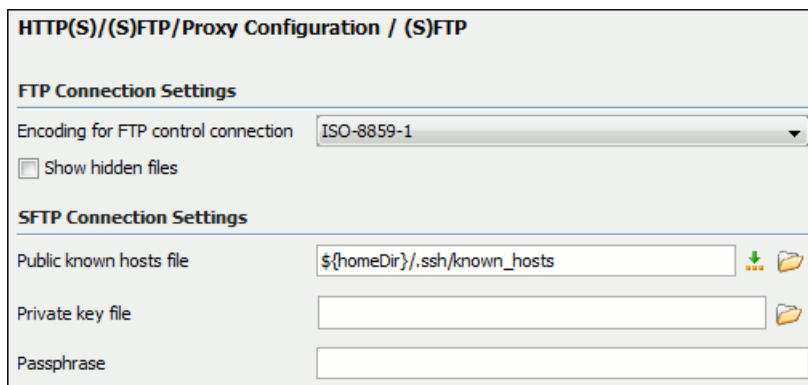


Figure 357: The (S)FTP Configuration Preferences Panel

- **Encoding for FTP control connection** - The encoding used to communicate with FTP servers: either ISO-8859-1 or UTF-8. If the server supports the UTF-8 encoding Oxygen XML Developer will use it for communication. Otherwise it will use ISO-8859-1.
- **Public known hosts file** - File containing the list of all SSH server host keys that you have determined are accurate. The default value is `${homeDir}/.ssh/known_hosts`.
- **Private key file** - The path to the file containing the private key used for the private key method of authentication of the secure FTP (SFTP) protocol. The user / password method of authentication has precedence if it is used in [the Open URL dialog box](#).
- **Passphrase** - The passphrase used for the private key method of authentication of the secure FTP (SFTP) protocol. The user / password method of authentication has precedence if it is used in [the Open URL dialog box](#).

Trusted Hosts Preferences

Holds a list with domains that have been marked as trusted by the user. Oxygen XML Developer will connect to these hosts without requesting user confirmation.

To configure the **Trusted Hosts** options, [open the Preferences dialog box](#) and go to **Network Connection Settings > Trusted Hosts**. The following options are available:

- **New** - Allows you to manually add a new entry in the list of trusted hosts.
- **Delete** - Allows you to remove an entry from the trusted hosts list.

SSH Preferences

To configure the **SSH** options, [open the Preferences dialog box](#) and go to **Connection settings > SSH**. The following options are available:

- **SSH** - Specifies the command line for an external SSH client that will be used when connecting to a SVN+SSH repository. Absolute paths are recommended for the SSH client executable and the file paths given as arguments (if any). Depending on the SSH client used and your SSH server configuration, you may need to specify the user name and/or private key/passphrase in the command line. You can also choose whether to use the **Default SVN user** (the same user name as the SSH client user) or **Prompt for a SVN user** for SVN repository operations whenever SVN authentication is required. For example, on Windows the following command line uses the `plink.exe` tool as the external SSH client for connecting to the SVN repository with SVN+SSH:

```
C:\plink-install-folder\plink.exe -l username -pw password -ssh -batch
host_name_or_IP_address_of_SVN_server
```

XML Structure Outline Preferences

To configure the **XML Structure Outline** options, [open the Preferences dialog box](#) and go to **XML Structure Outline**, which contains the following preferences:

- **Preferred attribute names for display** - The preferred attribute names when displaying the attributes of an element in the **Outline** view. If there is no preferred attribute name specified, the first attribute of an element is displayed.
- **Enable outline drag and drop** - Drag and drop is disabled for the tree displayed in the **Outline** view only if there is a possibility to accidentally change the structure of the document by such operations.

Views Preferences

To configure the view options, [open the Preferences dialog box](#) and go to **Views** and contains the following preferences:

- **Enable drag-and-drop in Project view** - Enables the drag and drop support in **Project** view. It should be disabled only if there is a possibility to accidentally change the structure of the project by such drag and drop actions.
- **Format and indent on save** - If selected, Oxygen XML Developer will run the action **Format and Indent** (pretty-print) on saving a document edited in the tree editor.
- **Maximum number of lines** - Sets the maximum number of lines in the **Information** view.

Messages Preferences

To configure the **Messages** options, [open the Preferences dialog box](#) and go to **Messages**. This preferences page allows you to disable the following warning messages which may appear in the application:

- **Show confirmation dialog when moving resources** - Displays a confirmation dialog box when you move a resource in the Project view, DB Explorer, and Archive Browser. In the **Confirm** dialog box you are able to choose not to see this dialog box in the future.
- **Show warning when adding resources already included in the project** - Displays a dialog box that warns you if you try to add already existing files in your project.
- **Show warning for document size limit for bidirectional text, Asian languages, and other special characters** - Displays a warning dialog box when the opened file that contains bidirectional characters is too large and bidirectional support is disabled.

- **Show warning message when changing the text orientation in the editor** - Displays a warning dialog box when you change the text orientation in the editor.
- **Show warning when editing long expressions in the XPath toolbar** - Displays an information dialog box that asks you whether you want to use the *[XPath/XQuery Builder](#)* view when you edit long XPath expressions.
- **Show SFTP certificate warning dialog** - Displays a warning dialog box each time the authenticity of the SFTP server host cannot be established.
- **Show Enterprise license related message when trying to connect to a Microsoft SharePoint server** - Displays an error message if you try to connect to a Microsoft SharePoint server without having the proper license.
- **Convert DB Structure to XML Schema** - When tables from a database schema are selected in the **Select database table** section of the *[Convert DB Structure to XML Schema dialog box](#)* and another database schema is expanded, a confirmation is needed because the previous selection is discarded. This option controls whether you are always asked about the next action, the other database schema is always expanded without asking you, or it is never expanded.

Configuring Options

A set of options controls the behavior of Oxygen XML Developer, allowing you to configure most of the features. To offer you the highest degree of flexibility in customizing the application to fit the needs of your organization, Oxygen XML Developer comes with several distinct layers of option values.

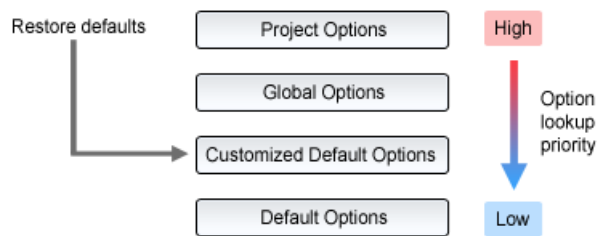


Figure 358: Option Lookup Priority

The option layers are as follows (sorted from high priority to low):

Project Options

Allows project managers to establish a set of rules for a specific project. These rules standardize the information exchanged by the team members (for example, if the project is stored in a repository, a common set of formatting rules avoid conflicts that may appear when documents modified by various team members are committed to the repository).

Global Options

Allows individual users to personalize Oxygen XML Developer according to their specific needs.

Customized Default Options

Designed to customize the initial option values for a group of users, this layer allows an administrator to deploy the application preconfigured with a standardized set of option values.



Note: Once this layer is set, it represents the initial state of Oxygen XML Developer when an end-user uses the *[Restore defaults](#)* or *[Reset Global Options](#)* actions.

Default Options

The predefined default or built-in values, tuned so that Oxygen XML Developer behaves optimally in most working environments.



Note: If you set a specific option in one of the layers, but it is not applied in the application, make sure that one of the higher priority layers does not overwrite it.

Customizing Default Options

Oxygen XML Developer has an extensive set of options that you can configure. When Oxygen XML Developer is installed, these options are set to default values. You can provide a different set of default values for an installation using an XML *options file*.

Creating an XML Options File

To create an *options file*, follow these steps:

1. It is recommended that you use a fresh install for this procedure, to make sure that you do not copy personal or local preferences.
2. Open Oxygen XML Developer and [open the Preferences dialog box](#).
3. Go through the options and set them to the desired defaults. Make sure that **Global Options** is selected in each page.
4. Click **OK** and close the **Preferences** dialog box.
5. Go to **Options > Export Global Options** to create an XML options file.

Using Customized Default Options

Use either one of the following ways to configure an Oxygen XML Developer installation to use customized default options from a created XML options file:

- In the [OXYGEN_DIR] installation folder, create a folder called `preferences` and copy the XML options file into it (for example, [OXYGEN_DIR]/preferences/default.xml).
- Set the path to the XML options file as the value of the `com.oxygenxml.default.options` system property in the [startup parameters](#).

The path must be specified with a URL or file path relative to the application installation folder:

```
-Dcom.oxygenxml.default.options=options/default.xml
```



Note: If you are using the [Java Webstart distribution](#), use the [optionsDir property](#) to specify the path of the options file (in this case, the file needs to be named `default.xml`), or you can edit the [.jnl file](#) that launches the application and set the `com.oxygenxml.default.options` parameter using a property element, as in the following example:

```
<property name="oxy:com.oxygenxml.default.options"
value="http://host/path/to/default.xml"/>
```

Sharing and Storing Preferences

When you configure the Oxygen XML Developer options, you can store them globally or bind them to a specific project by choosing the appropriate setting in the preferences pages. They can then be shared with others by exporting the global options or by sharing the stored project-level files. The same is true with transformation and validation scenarios.




Figure 359: Controlling the Storage of the Preferences

Global Options

By default, **Global Options** is selected in the preferences pages, meaning that the options are stored on your computer and are not accessible to other users (unless you [export them into an XML options](#) file that can then be shared).

Global options are stored locally in the following locations:

- **Windows (Vista, 7, 8, 10)** - [user_home_directory]\AppData\Roaming\com.oxygenxml
- **Windows XP** - [user_home_directory]\Application Data\com.oxygenxml
- **Mac OS X** - [user_home_directory]/Library/Preferences/com.oxygenxml

- **Linux/Unix** - [user_home_directory]/.com.oxygenxml

Project Options

If you select **Project Options**, the preferences are stored in the project file and can be shared with other users. For instance, if your project file is saved on a version control system (such as SVN, CVS, or Source Safe) or in a shared folder, your team will have the same option configuration that you stored in the project file.



Notice: Some pages do not have the **Project Options** switch, since the options they host might contain sensitive data (passwords, for example), unsuitable for sharing with other users.



Note: If changes have been made to the options in a preferences page and you switch between **Project Options** and **Global Options**, a dialog box will be displayed that allows you to select one of the following:

- **Overwrite** - The existing options from the current preferences page will be overwritten.
- **Preserve** - The existing options from the current preferences page will be preserved.

For more information about sharing project files, see the [Sharing a Project - Team Collaboration](#) on page 120 section.

Importing / Exporting Global Options

Actions for importing, exporting, and resetting global options are available in the **Options** menu. The export operation allow you to save global preferences as an XML options file and the import operation allows you to load the options file. You can use this file to reload saved options on your computer or to [share with others](#).

The following actions are available in the **Options** menu:

Reset Global Options

Restores the preference to the factory defaults or to [customized defaults](#).

Import Global Options

Allows you to import a set of *Global Options* from an exported XML options file. You can also select a [project-level options file](#) (.xpr) to import all the *Global Options* that are set in that project file. After you select a file, the **Import Global Options** dialog box is displayed and it informs you that the operation will only override the options that are included in the imported file. You can enable the **Reset all other options to their default values** option to reset all options to the default values before the file is imported.

Export Global Options

Allows you to export *Global Options* to an XML options file. Some user-specific options that are private are not included. For example, passwords and the name of the *Review Author* is not included in the export operation.

Oxygen XML Developer automatically stores your options in an XML options file. Depending on the platform you are using, this file is located in the following directories:

- [user-home-folder]\AppData\Roaming\com.oxygenxml for Windows Vista/7/8/10
- [user-home-folder]\Application Data\com.oxygenxml for Windows XP
- [user-home-folder]/Library/Preferences/com.oxygenxml for OS X
- [user-home-folder]/.com.oxygenxml for Linux

The name of the options file of Oxygen XML Developer 17.1 is oxyDeveloperOptionsSa17.1.xml.

Reset Global Options

To reset all global preferences to their default values, select **Reset Global Options** from the **Options** menu.

The project level preferences are not changed by this action.

This action also resets the transformation and validation scenarios to the default scenarios.

Configuring the Layout of the Views and Editors

All the Oxygen XML Developer views available in the [Editor Perspective](#), [XSLT Debugger Perspective](#), and [XQuery Debugger Perspective](#) are dockable. To open a view, select it from the **Window > Show View** menu. You can hide a view by closing it with the  button at the top-right corner of the view, or with the **Window > Hide current view** action.

You can drag any view to any margin of another view or editor inside the Oxygen XML Developer window. Once you create a layout that suites your needs, you are able to save it from **Window > Export Layout**. Oxygen XML Developer creates a layout file containing the preferences of the saved layout. To load a layout, go to **Window > Load Layout**. To reset it, select **Window > Reset Layout**.



Note: The **Load Layout** menu lets you select between the default layout, a predefined layout, or a custom layout. The changes you make using the **Load Layout** menu are also reflected in the **Application Layout** preferences page.

The changes you make to any layout are preserved between working sessions. Also, changing to a different layout and returning to the previous one does not alter the changes you made to the first layout. The predefined layout files are saved in the [preferences directory](#) of Oxygen XML Developer.

To gain more editing space in the Oxygen XML Developer window, click  **Toggle auto-hide** in any view. This button sets the view in the *auto-hide* state, making it visible only as a vertical tab, at the margins of the Oxygen XML Developer window. To display a view in the *auto-hide* state, hover its side-tab with your cursor, or click it to keep the view visible until you click elsewhere. A view can also be set to a floating state by using the **Toggle floating** action, making it independent from the rest of the Oxygen XML Developer window.

You can drag the editors and arrange them in any order you like, both horizontally and vertically.

The next figure presents two editors arranged as horizontal tiles. To arrange them vertically, drag one of them on top of the other. In the example below, the `personal.xml` file was dragged over the `personal-schema.xml` file. When doing this, a dark gray rectangle marks the rearranged layout.

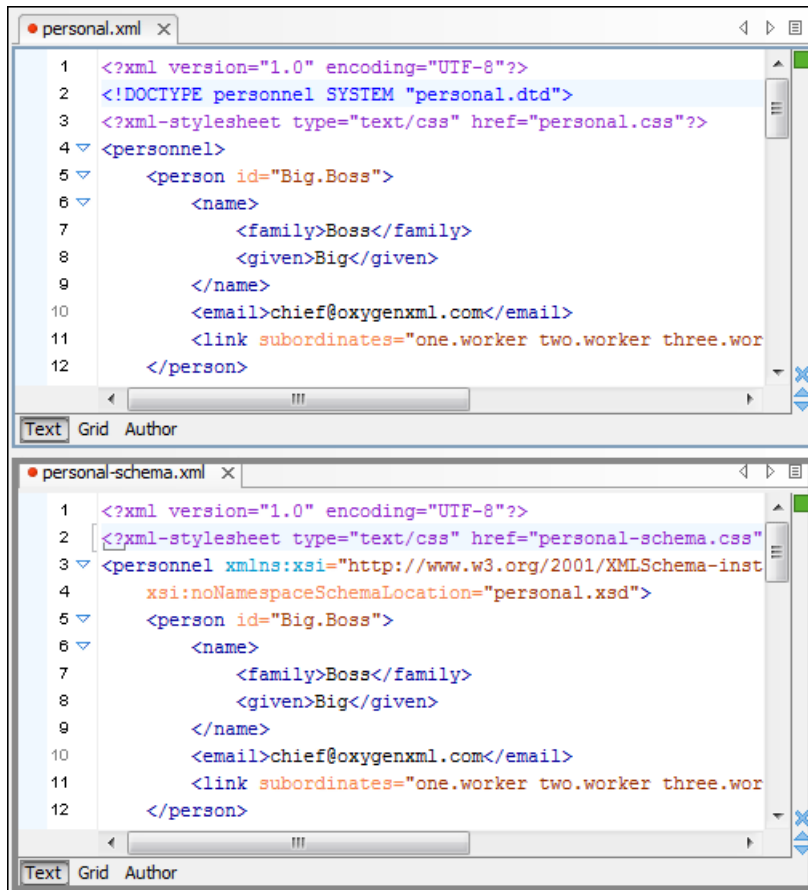


Figure 360: Drag and Drop Editors

You can also tile or stack all open editors, both in the *Editor Perspective* or in the *Database Perspective*, using the following actions from the **Editor** toolbar or **Window** menu:



Synchronous scrolling

Select this action to scroll through the tiled editors at the same time.



Tile Editors Horizontally

Splits the editing area into horizontal tiles, one for each open file.



Tile Editors Vertically

Splits the editing area into vertical tiles, one for each open file.



Stack Editors

The reverse of the **Tile Editors Horizontally/Vertically** actions. Stacks all open editors.



Note: When tiled, you can still drag and drop the editors, but note that they are docked in the same way as a window/view (instead of just tabs). You are actually rearranging the editor windows, so drag the editor tab and drop it to one of the sides of an editor (left/right/top/bottom). While dragging, you will see the grey dark rectangle aligned to one of the sides of the editor, or around the entire editor window. If you drop it to one of the sides it will dock to that side of the editor. If you drop it when the rectangle is around the entire window of the editor it will get stacked on top of that editor. You can also grab one of the stacked editors and tile it to one of the sides.

You can divide the editing area vertically and horizontally using the following actions available in the **Editor** toolbar and **Window** menu:

- **Split horizontally** - Splits the editor horizontally. This is useful for comparing and merging content between two documents.

-  **Split vertically** - Splits the editor vertically. This is useful for comparing and merging content between two documents.
-  **Unsplit** - Removes a split action on the editing area.

To maximize or restore the editors, go to **Window > Maximize/Restore Editor Area**.

When the opened documents titles do not fit in the tab strip, the scroll wheel can be used to scroll the editor title tabs to the left or right, the same as the two arrows on the top-right. You can also switch between edited files by using the **Next editor** and **Previous editor** actions from the **Window** menu, or by using their respective keyboard shortcuts (**Ctrl F6 (Meta F6 on OS X)** and **Ctrl Shift F6 (Meta Shift F6 on OS X)**). These two actions display a small popup window that allows you to cycle through all opened files.

To watch our video demonstration about dockable and floating views and editors in Oxygen XML Developer, go to http://oxygenxml.com/demo/Dockable_Views.html.

Configure Toolbars

You can configure the toolbars in Oxygen XML Developer to personalize the interface for your specific needs. You can choose which toolbars to show or hide in the current editor mode (**Text**, **Design**, or **Grid**) and in the current perspective (**Editor**, **XSLT Debugger**, **XQuery Debugger**, or **Database**). You can also choose which actions to display in each toolbar, add actions to toolbars, and customize the layout of the toolbars.

To configure the toolbars, open the **Configure Toolbars** dialog box by doing one of the following:

- Right-click any toolbar and select **Configure Toolbars**.
- Select **Configure Toolbars** from the **Window** menu.

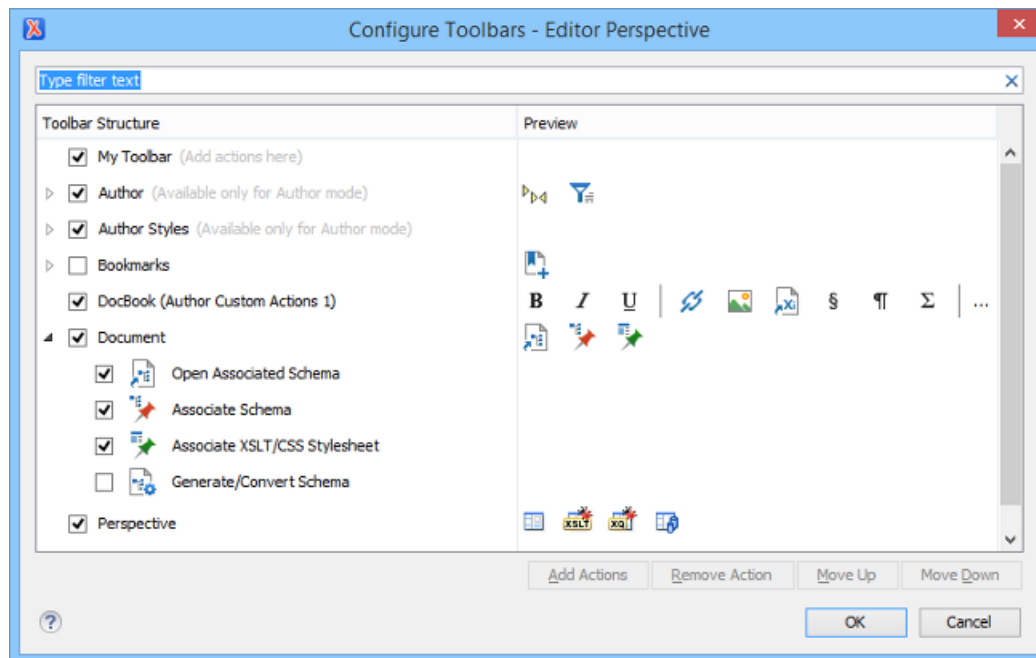


Figure 361: Configure Toolbars Dialog Box

The **Configure Toolbars** dialog box provides the following features:

Filter Text Box

You can use the filter text box at the top of the dialog box to search for a specific toolbar or action.

Show or Hide Toolbars

You can choose whether to show or hide a toolbar by using the checkbox next to the toolbar name. This checkbox is only available for toolbars that are available for the current perspective and editing mode.

Show or Hide Actions in a Toolbar

To show or hide actions in a toolbar, expand it by clicking the arrow next to the toolbar name, then use the checkbox to select or deselect the appropriate actions. The toolbar configuration changes in the **Preview** column according to your changes.

Add Actions to a Toolbar

Use the **Add Actions** button to open the **Add Actions** dialog box that displays all the actions that can be added to any of the toolbars, with the exception of those that are contributed from frameworks (document type associations) or 3rd party plugins.

Remove Actions from a Toolbar

You can remove actions that you have previously added to toolbars by using the **Remove Action** button.

Move Actions in a Toolbar

Use the **Move Up** and **Move Down** actions to change the order of the actions in a toolbar.


The **Configure Toolbars** dialog box also provides a variety of other ways to customize the layout in Oxygen XML Developer.

Customize My Toolbar

You can customize the **My Toolbar** to include your most commonly used actions. By default, this toolbar is listed first. Also, it is hidden until you add actions to it and you can easily hide it with the **Hide "My Toolbar" Toolbar** action that is available when you right-click anywhere in the toolbar area.

Drop-down Menu Actions

Composite actions that are usually displayed as a drop-down menu can only be selected in one toolbar at a time. These actions are displayed in the **Configure Toolbars** dialog box with the name in brackets.



Configure External Tools Action

There is a  **Configure external tools** composite action that appears in the toolbar called **Tools**. It is a drop-down menu that contains any external tools that are configured in the **External Tools** preferences page.



Note: If no external tools are configured, this drop-down menu is not shown in the toolbar.

Additional actions are available from the **Window** menu or contextual menu when invoked from a toolbar that allows you to further customize your layout. These actions include:

Reset Toolbars

To reset the layout of toolbars to the default setting, select the **Reset Toolbars** action from the contextual menu or **Window** menu.

Reset Layout

To reset the entire layout (including toolbars, editing modes, views, etc.) to the default setting, select **Reset Layout** from the contextual menu or **Window** menu.

Export Layout

You can use the **Export Layout** action that is available in the **Window** menu to export the entire layout of the application to share it with other users.

Hide Toolbars

You can use the **Hide Toolbar** action from the contextual menu to easily hide a displayed toolbar. When you right-click a toolbar it will be highlighted to show you which actions are included in that toolbar.

Scenarios Management

You can export global transformation and validation scenarios into specialized *scenarios* files. You can import transformation and validation scenarios from various sources (such as project files, framework option files, or exported

scenario files). The import and export scenario actions are available in the **Options** menu. The following actions are available:

Import Transformation Scenarios

Loads a set of transformation scenarios from a project file, framework options file, or exported scenarios file.

Export Global Transformation Scenarios

Stores a set of global (not project-level) transformation scenarios in a specialized *scenarios* file.

Import Validation Scenarios

Loads a set of validation scenarios from a project file, framework options file, or exported scenarios file.

Export Global Validation Scenarios

Stores a set of global (not project-level) Validation scenarios in a specialized *scenarios* file.

The **Export Global Transformation Scenarios** and **Export Global Validation Scenarios** options are used to store all the scenarios in a separate file. Associations between document URLs and scenarios are also saved in this file. You can load the saved scenarios using the **Import Transformation Scenarios** and **Import Validation Scenarios** actions. To distinguish the existing scenarios and the imported ones, the names of the imported scenarios contain the word *import*.

Editor Variables

An editor variable is a shorthand notation for context-dependent information, such as a file or folder path, a time-stamp, or a date. It is used in the definition of a command (for example, the input URL of a transformation, the output file path of a transformation, or the command line of an external tool) to make a command or a parameter generic and re-usable with other input files. When the same command is applied to different files, the notation is expanded at the execution of the command so that the same command has different effects depending on the actual file.

You can use the following editor variables in Oxygen XML Developer commands of external engines or other external tools, in transformation scenarios, and in validation scenarios:

- `${oxygenHome}` - Oxygen XML Developer installation folder as URL.
- `${oxygenInstallDir}` - Oxygen XML Developer installation folder as file path.
- `${framework}` - The path (as URL) of the current framework, as part of the `[OXYGEN_DIR]/frameworks` directory.
- `${framework(fr_name)}` - The path (as URL) of the `fr_name` framework.
- `${frameworkDir(fr_name)}` - The path (as file path) of the `fr_name` framework.



Note: Since multiple frameworks might have the same name (although it is not recommended), for both `${framework(fr_name)}` and `${frameworkDir(fr_name)}` editor variables Oxygen XML Developer employs the following algorithm when searching for a given framework name:

- All frameworks are sorted, from high to low, according to their **Priority** setting from the **Document Type configuration dialog box**. Only frameworks that have the **Enabled** checkbox set are taken into account.
- Next, if the two or more frameworks have the same name and priority, a further sorting based on the **Storage** setting is made, in the exact following order:
 - Frameworks stored in the internal Oxygen XML Developer options.
 - Additional frameworks added in the **Locations preferences page**.
 - Frameworks installed using the add-ons support.
 - Frameworks found in the **main frameworks location (Default or Custom)**.
- `${frameworks}` - The path (as URL) of the `[OXYGEN_DIR]` directory.
- `${frameworkDir}` - The path (as file path) of the current framework, as part of the `[OXYGEN_DIR]/frameworks` directory.
- `${frameworksDir}` - The path (as file path) of the `[OXYGEN_DIR]/frameworks` directory.
- `${home}` - The path (as URL) of the user home folder.
- `${homeDir}` - The path (as file path) of the user home folder.

- `${pdu}` - Current project folder as URL. Usually the current folder selected in the **Project** View.
- `${pd}` - Current project folder as file path. Usually the current folder selected in the **Project** View.
- `${pn}` - Current project name.
- `${cfdu}` - Current file folder as URL, that is the path of the current edited document up to the name of the parent folder, represented as a URL.
- `${cfd}` - Current file folder as file path, that is the path of the current edited document up to the name of the parent folder.
- `${cfn}` - Current file name without extension and without parent folder. The current file is the one currently opened and selected.
- `${cfne}` - Current file name with extension. The current file is the one currently opened and selected.
- `${cf}` - Current file as file path, that is the absolute file path of the current edited document.
- `${af}` - The local file path of the ZIP archive that includes the current edited document.
- `${afu}` - The URL path of the ZIP archive that includes the current edited document.
- `${afd}` - The local directory path of the ZIP archive that includes the current edited document.
- `${afdu}` - The URL path of the directory of the ZIP archive that includes the current edited document.
- `${afn}` - The file name (without parent directory and without file extension) of the zip archive that includes the current edited file.
- `${afne}` - The file name (with file extension, for example `.zip` or `.epub`, but without parent directory) of the zip archive that includes the current edited file.
- `${currentFileURL}` - Current file as URL, that is the absolute file path of the current edited document represented as URL.
- `${ps}` - Path separator, that is the separator which can be used on the current platform (Windows, OS X, Linux) between library files specified in the class path.
- `${timeStamp}` - Time stamp, that is the current time in Unix format. It can be used for example to save transformation results in different output files on each transform.
- `${caret}` - The position where the cursor is located. This variable can be used in a code template, in **Author** mode operations, or in a selection plugin.
- `${selection}` - The current selected text content in the current edited document. This variable can be used in a code template, in **Author** mode operations, or in a selection plugin.
- `${id}` - Application-level unique identifier; a short sequence of 10-12 letters and digits which is not guaranteed to be universally unique.
- `${uuid}` - Universally unique identifier, a unique sequence of 32 hexadecimal digits generated by the Java [UUID](#) class.
- `${env(VAR_NAME)}` - Value of the `VAR_NAME` environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the `${system(var.name)}` editor variable.
- `${system(var.name)}` - Value of the `var.name` Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as `-Dvar.name=value`. If you are looking for operating system environment variables, use the `${env(VAR_NAME)}` editor variable instead.
- `${ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default_value')}` - To prompt for values at runtime, use the `ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default-value')` editor variable. You can set the following parameters:
 - `'message'` - The displayed message. Note the quotes that enclose the message.
 - `type` - Optional parameter, with one of the following values:

Parameter	
url	Format: <code>\${ask('message', url, 'default_value')}</code>
	Description: Input is considered a URL. Oxygen XML Developer checks that the provided URL is valid.
	Example:

Parameter	
	• <code>\${ask('Input URL', url)}</code> - The displayed dialog box has the name Input URL. The expected input type is URL. • <code>\${ask('Input URL', url, 'http://www.example.com')}</code> - The displayed dialog box has the name Input URL. The expected input type is URL. The input field displays the default value <code>http://www.example.com</code>.
password	Format: <code>\${ask('message', password, 'default')}</code> Description: The input is hidden with bullet characters. Example: • <code>\${ask('Input password', password)}</code> - The displayed dialog box has the name 'Input password' and the input is hidden with bullet symbols. • <code>\${ask('Input password', password, 'abcd')}</code> - The displayed dialog box has the name 'Input password' and the input hidden with bullet symbols. The input field already contains the default abcd value.
generic	Format: <code>\${ask('message', generic, 'default')}</code> Description: The input is considered to be generic text that requires no special handling. Example: • <code>\${ask('Hello world!')}</code> - The dialog box has a Hello world! message displayed. • <code>\${ask('Hello world!', generic, 'Hello again!')}</code> - The dialog box has a Hello world! message displayed and the value displayed in the input box is 'Hello again!'.
relative_url	Format: <code>\${ask('message', relative_url, 'default')}</code> Description: Input is considered a URL. Oxygen XML Developer tries to make the URL relative to that of the document you are editing.  Note: If the <code>\$ask</code> editor variable is expanded in content that is not yet saved (such as an <i>untitled</i> file, whose path cannot be determined), then Oxygen XML Developer will transform it into an absolute URL. Example: • <code>\${ask('File location', relative_url, 'C:/example.txt')}</code> - The dialog box has the name 'File location'. The URL inserted in the input box is made relative to the current edited document location.
combobox	Format: <code>\${ask('message', combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a drop-down menu. The drop-down menu is populated with the given <code>rendered_value</code> values. Choosing such a value will return its associated value (<code>real_value</code>).  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example:

Parameter	
	• <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems. The associated value will be returned based upon your selection.  Note: In this example, the default value is indicated by the <code>osx</code> key. However, the same result could be obtained if the default value is indicated by <code>Mac OS X</code>, like in the following example: <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'Mac OS X'))}</code> • <code>\${ask('Mobile OS', combobox, ('win':'Windows Mobile';'ios':'iOS';'and':'Android'), 'Android'))}</code>
editable_combobox	Format: <code>\${ask('message', editable_combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default'))}</code> Description: Displays a dialog box that offers a drop-down menu with editable elements. The drop-down menu is populated with the given <code>rendered_value</code> values. Choosing such a value will return its associated real value (<code>real_value</code>) or the value inserted when you edit a list entry.  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example: • <code>\${ask('Operating System', editable_combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems and also allows you to edit the entry. The associated value will be returned based upon your selection or the text you input.
radio	Format: <code>\${ask('message', radio, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default'))}</code> Description: Displays a dialog box that offers a series of radio buttons. Each radio button displays a 'rendered_value' and will return an associated <code>real_value</code>.  Note: The 'default' parameter specifies the default selected value and can match either a key or a value. Example: • <code>\${ask('Operating System', radio, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The radio button group allows you to choose between the three operating systems.  Note: In this example <code>Mac OS X</code> is the default selected value and if selected it would return <code>OSX</code> for the output.

- 'default-value' - optional parameter. Provides a default value.
- `${date(pattern)}` - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#).
Example: yyyy-MM-dd;



Note: This editor variable supports both the `xs:date` and `xs:datetime` parameters. For details about `xs:date`, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about `xs:datetime`, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.

- `${dbgXML}` - The local file path to the XML document which is current selected in the Debugger source combo box (for tools started from the XSLT/XQuery Debugger).
- `${dbgXSL}` - The local file path to the XSL/XQuery document which is current selected in the Debugger stylesheet combo box (for tools started from the XSLT/XQuery Debugger).
- `${tsf}` - The transformation result file path. If the current opened file has an associated scenario which specifies a transformation output file, this variable expands to it.
- `${dsu}` - The path of the detected schema as an URL for the current validated XML document.
- `${ds}` - The path of the detected schema as a local file path for the current validated XML document.
- `${cp}` - Current page number. Used to display the current page number on each printed page in the **Editor / Print** Preferences page.
- `${tp}` - Total number of pages in the document. Used to display the total number of pages on each printed page in the **Editor / Print** Preferences page.
- `${xpath_eval(expression)}` - Evaluates an XPath 3.0 expression. Depending on the context, the expression can be:
 - *static* - When executed in a non-XML context. For example, you can use such static expressions to perform string operations on other editor variables for composing the name of the output file in a transformation scenario's **Output** tab.

Example:

```
${xpath_eval(upper-case(substring('${cfn}', 1, 4)))}
```

- *dynamic* - When executed in an XML context. For example, you can use such dynamic expression in a code template or as a value of a parameter of an **Author** mode operation.

Example:

```
${ask('Set new ID attribute', generic, '${xpath_eval(@id)}')}
```

- `${i18n(key)}` - Editor variable used only at framework level to allow translating names and descriptions of **Author** mode actions in multiple actions.

Custom Editor Variables

An editor variable can be created and included in any user-defined expression where a built-in editor variable is also allowed. For example, a custom editor variable may be necessary for configuring the command line of an external tool, the working directory of a custom validator, the command line of a custom XSLT engine, or a custom FO processor.

You can create or configure custom editor variables in the [Custom Editor Variables preferences page](#). To create a custom editor variable, click the **New** button and specify the **name** that will be used in user-defined expressions, the **value** that will replace the variable name at runtime, and a textual **description** of that variable.

Custom System Properties

A number of Java system properties can be set in the application to influence its behavior. For information about how to do this, see the [Setting a system property](#) on page 824 section.

Table 13: Custom System Properties

Property	Allowed values	Default value	Purpose
<i>com.oxygenxml.disable.http.protocol.handlers</i>	true or false	false	By default, Oxygen XML Developer uses the open source Apache HTTP Client software for HTTP(S) connections. If set to True , the default Java Sun HTTP(S) will be used instead. You will also lose WebDAV support and possibly other related features.
<i>com.oxygenxml.default.options</i>	A URL-type relative or absolute path.	N/A	Provides the path to an XML file containing default application options. For more details, see Customizing Default Options on page 810.
<i>com.oxygenxml.customOptionsDir</i>	A file system absolute path pointing to a folder.	N/A	Sets a different folder to be used by the application to load and save preference files. The default location where the options are saved varies according to the operating system. See Importing / Exporting Global Options on page 811.
<i>com.oxygenxml.ApplicationDataFolder</i> (Windows only)	A file system absolute path pointing to a folder.	%APPDATA%	When the application runs on Windows, you can set this property to change the location where the application considers that the <i>APPDATA</i> folder is located.
<i>com.oxygenxml.editor.frameworks.url</i>	An URL-type absolute path.	OXYGEN_DIR \frameworks	Changes the folder where the application considers that the main frameworks are installed. It has the same effect as changing the custom frameworks directory value in the Locations Preferences on page 738 page.
<i>com.oxygenxml.MultipleInstances</i>	true or false	false	If set to true , multiple instances of the application are allowed to be started.
<i>com.oxygenxml.xep.location</i>	A file system absolute path pointing to a folder.	N/A	Points to a folder where RenderX XEP is installed. Has the same effect as configuring XEP in the FO Processors Preferences on page 782 page.
<i>com.oxygenxml.additional.classpath</i>	A list of JAR-type resources separated by a classpath separator.	N/A	An additional list of libraries to be used in the application's internal class loader in addition to the libraries specified in the <i>lib</i> folder.

Property	Allowed values	Default value	Purpose
<i>com.oxygenxml.user.home</i> (Windows only)	A file system absolute path pointing to a folder.	USERPROFILE Folder	Overwrites the user home directory that was implicitly detected for the application.
<i>com.oxygenxml.use.late.delegation.for.author.extensions</i>	true or false	true	All Java extensions in a document type configuration are instantiated in a separate class loader. When true , the JAR libraries used in a certain document type configuration will have priority to resolve classes before delegating to the parent class loader. When false , the parent class loader will take precedence.
<i>com.oxygenxml.stack.size.validation.threads</i>	The number of bytes used for validation threads.	5*1024*1024	Some parts of the application (validation, content completion) that use the Relax NG parser sometimes require a larger <i>Thread</i> stack size in order to parse complex schemas. The default value should be more than enough.
<i>com.oxygenxml.jing.skip.validation.xhtml.data.attrs</i>	true or false	true	By default, the Relax NG validation was configured to skip validation for XHTML attributes that start with "data-", which should be skipped from validation according to the XHTML 5 specification.
<i>com.oxygenxml.report.problems.url</i>	User defined URL	N/A	The URL where a problem reported through the Report Problem dialog box is sent. The report is sent in XML format using the <code>report</code> parameter with the POST HTTP method.

Localizing the User Interface

You can select the language of the Oxygen XML Developer user interface. Oxygen XML Developer ships with the following languages: English, French, German, Japanese, and Dutch. To change the interface language, go to **Options > Preferences > Global** preferences page, then choose the appropriate language from the **Language** drop-down menu.

You can also localize the interface in a different language by [creating an interface localization file](#).

Creating an Interface Localization File

You can change the language of the Oxygen XML Developer user interface by creating an interface localization file. The example in this procedure is based on the Spanish language, and a standard Oxygen XML Developer Windows distribution.

1. Identify the code for the new language you want to translate the interface. It is composed from a language code (two or three lowercase letters that conform to the [ISO 639 standard](#)), followed by an underscore character, and a region code (two or three uppercase letters that conform to the [ISO 3166 standard](#)).
2. Write an email to the Oxygen XML Developer support team and ask them to send you the *translation.xml* sample file.

3. Open *translation.xml* in Oxygen XML Developer. The file contains all the interface messages that can be translated and is updated at every new release with the latest additions. Here is a sample of its content:

```
<translation>
  <languageList>
    <language description="English" lang="en_US"/>
  </languageList>
  <key value="New">
    <comment>The File/New action. Creates a new document.</comment>
    <val lang="en_US">New</val>
  </key>
  <key value="New_folder">
    <comment>Creates a folder in the Project View.</comment>
    <val lang="en_US">New Folder</val>
  </key>
  ....
</translation>
```

4. Update the `language` element to reflect the new language. Set the `description` attribute to Spanish and the `lang` attribute to `es_ES`.
5. For each `key` element translate the `comment` (optional) and `val` elements. Set the `lang` attribute to `es_ES`.



Note: After you are finished, the file should look like:

```
<translation>
  <languageList>
    <language description="Español" lang="es_ES"/>
  </languageList>
  <key value="New">
    <comment>El Archivo / Nueva acción. Crea un nuevo documento.</comment>
    <val lang="es_ES">Nuevo</val>
  </key>
  <key value="New_folder">
    <comment>Crea una carpeta en la vista del proyecto.</comment>
    <val lang="es_ES">Nueva carpeta</val>
  </key>
  ....
</translation>
```

6. *Open the Preferences dialog box* and go to **Global** and enable the **Other language** option. Browse for the *translation.xml* file.
7. Restart the application.

Setting a Java Virtual Machine Parameter in the Launcher Configuration File / Start-up Script

You can set Java Virtual Machine parameters (for example, if you want to increase the maximum amount of memory available) for the Oxygen XML Developer *application launchers* or *command-line scripts*. You can also create a *custom startup parameters file*.

Setting Parameters for the Application Launchers

Increasing the amount of memory that Oxygen XML Developer uses on Windows

To increase the memory available to Oxygen XML Developer on Windows:

- Browse to the installation directory of Oxygen XML Developer.
- Locate the `-Xmx` parameter in the `oxygenDeveloper17.1.vmoptions` file.



Note: For 32-bit Windows modify the parameter to `-Xmx1024m` or larger, but not over `-Xmx1200m`. Make sure you do not exceed your physical RAM. For 64-bit Windows modify the parameter to a larger value (for example `-Xmx2048m`). We recommended you to not use more than half of your existing physical RAM.

Restart Oxygen XML Developer. Go to **Help > About** and verify the amount of memory that is actually available (see the last row in the **About** dialog box). If Oxygen XML Developer does not start and you receive an error message saying that it could not start the JVM, decrease the `-Xmx` parameter and try again.

For Windows Vista/7/8/10, copy the `oxygenDeveloper17.1.vmoptions` to your desktop (or to any other folder with write access), modify it there, then copy it back to the Oxygen XML Developer installation folder.



Note: The parameters from the `.vmoptions` file are used when you start Oxygen XML Developer with the `oxygen` launcher (or with the desktop shortcut). In case you use the command line script `oxygen.bat/oxygen.sh`, modify the `-Xmx` parameter in the script file.

Increasing the amount of memory that Oxygen XML Developer uses on OS X

To increase the memory available to Oxygen XML Developer on OS X:

- **Ctrl Single-Click (Command Single-Click on OS X)** (or right-click) the Oxygen XML Developer icon in **Finder**.
- From the contextual menu, select **Show Package Contents**.
- Go to the `contents` directory and edit the `Info.plist` file.



Note: You can open this file either with the **Property List Editor**, or the **TextEdit**.

- Look for the **VMOptions** key and adjust the `-Xmx` parameter to a larger value (for example `-Xmx1500m`)



Note: For a Mac kit bundled with Java 7, look for the **VMOptionArray** key and add the `-Xmx` parameter in a new string element from the array element. For example, for 1500 MB use the following:

```
<string>-Xmx1500m</string>
```



Tip: Try not to use more than half of your existing physical RAM if possible.

Setting a system property

To set a system property, edit the application launcher and add a parameter after the `%OXYGEN_JAVA%` token, using the following form:

```
-Dproperty.name=value
```

You can also set a system property through a parameter prefixed with `-DOxy` in the command line used to start the application:

```
oxygenDeveloper17.1.exe "-DOxyproperty.name=value"
```

All system properties are displayed in the **System properties** tab of the **About** dialog box.

To view the list of Oxygen XML Developer system properties, go to [Custom System Properties](#) on page 820.

Disabling DPI Scaling

Some users may prefer the look of smaller icons in a HiDPI display. To achieve this, display scaling needs to be disabled for high DPI settings. To disable the DPI scaling, set the following property in `.vmoptions` (or in the `.bat` script):

```
sun.java2d.dpiaware=false
```

Setting Parameters in the Command Line Scripts

If you start Oxygen XML Developer with the `oxygenDeveloper.bat` command line script, you have to add or modify the `-Xmx` parameter to the java command at the end of the script.

For example, to set the maximum amount of Java memory to 600 MB in **Windows**, modify the **-Xmx** parameter like this:

```
java -Xmx600m -Dsun.java2d.noddraw=true ...
```

On **Mac OS X**, the java command should look like this:

```
java "-Xdock:name=Developer"\
-Dcom.oxygenxml.editor.plugins.dir="$DEVELOPER_HOME/plugins"\
-Xmx600m\
...
```

On **Linux**, the Java command should look like this:

```
java -Xmx600m\
"-Dcom.oxygenxml.editor.plugins.dir="$DEVELOPER_HOME/plugins"
```

Creating Custom Startup Parameters File

The startup launchers for Oxygen XML Developer and its executable internal tools (**Tree Editor**, **XML Schema Regular Expressions Builder**, **Large File Viewer**, **SVN Client**, **Compare Directories**, and **Compare Files**) include a default `.vmoptions` file that contain some startup parameters (such the `-Xmx` parameter, which is used for allocating memory for that particular application). You can edit the parameters in these `.vmoptions` files so that the applications will launch with your desired values. However, if you re-install the application, install an update for the application, or deploy it to other users or machines, those parameters will be reset to their default values.

To avoid resetting user-defined startup parameters, you can create custom `.vmoptions` files and the application and the executable tools will automatically include your custom parameters at startup. The following custom files are recognized by the application and the executable tools:

- `custom_commons.vmoptions` - The parameters and their values of this file will be included in all the startup launchers.
- `custom_<app name>.vmoptions` - The `<app name>` is the name of the executable application or tool (for example, `custom_diffFiles.vmoptions` for the **Compare Files** tool). The parameters and their values of this file will be included in the startup launcher for this particular executable.

To be recognized and included, these custom startup parameter files must be saved in the installation directory of Oxygen XML Developer.

Chapter 19

Common Problems

Topics:

- [Performance Problems](#)
- [Common Problems and Solutions](#)

This section provides a variety of common problems and their solutions.

Performance Problems

This section contains solutions for some common performance problems that may appear when running Oxygen XML Developer.

Performance Issues with Large Documents

When starting Oxygen XML Developer from the icon created on the Start menu or Desktop in Windows (or from the shortcut created on the Linux desktop), the default maximum memory available to the application is set to 40% of the amount of physical RAM, but not more than 700 MB.

When starting Oxygen XML Developer from a command-line script, the default maximum memory is 512 MB.

While editing large documents in Oxygen XML Developer, if you see that performance slows down considerably over time, then a possible cause is that the application needs more memory to run properly. You can increase the maximum amount of memory available to Oxygen XML Developer by [setting the -Xmx parameter in a configuration file](#) that is specific to the platform that runs the application.

 **Attention:** The maximum amount of memory should not be equal to the physical amount of memory available on the machine because in that case the operating system and other applications will have no memory available.

When installed on a multiple user environment, each instance of Oxygen XML Developer will be allocated the amount stipulated in the memory value. To avoid degrading the general performance of the host system, ensure that the amount of memory available is optimally apportioned for each of the expected instances.

External Processes

The [Memory available to the built-in FOP](#) option controls the amount of memory allocated to generate PDF output with the built-in Apache FOP processor. If Oxygen XML Developer throws an *Out Of Memory* error, [open the Preferences dialog box](#), go to **XML > XSLT-FO-XQuery > FO Processors**, and increase the value of the [Memory available to the built-in FOP](#) option.

For external XSL-FO processors, XSLT processors, and external tools, the maximum value of the allocated memory is set in the command line of the tool using the -Xmx parameter set to the Java virtual machine.

Common Problems and Solutions

This chapter presents common problems that may appear when running the application and the solutions for these problems.

Details to Submit in a Request for Technical Support Using the Online Form

What details should I add to my request for technical support on the online form in the product website?

When completing a request for Technical Support using the online form, include as many details as possible about your problem. For problems where a simple explanation may not be enough for the Technical Support team to reproduce or address the issue (such as server connection errors, unexpected delays while editing a document, an application crash, etc.), you should generate a log file and attach it to the problem report. In the case of a crash, you should also attach the crash report file generated by your operating system.

To generate an Oxygen XML Developer log file, follow these steps:

1. Create a text file called `log4j.properties` in the application installation folder, with the following content:

```
log4j.rootCategory= debug, R2

log4j.appender.R2=org.apache.log4j.RollingFileAppender
log4j.appender.R2.File=${user.home}/Desktop/oxygenLog/oxygen.log
log4j.appender.R2.MaxFileSize=12000KB
log4j.appender.R2.MaxBackupIndex=20
```



```
log4j.appender.R2.layout=org.apache.log4j.PatternLayout
log4j.appender.R2.layout.ConversionPattern=%r %p [ %t ] %c - %m%n
```

2. Restart the application.
3. Reproduce the error.
4. Close the application.
5. Delete the `log4j.properties` file because it might cause performance issues if you leave it in the installation folder.



Important: The logging mode may severely decrease the performance of the application. Therefore, please do not forget to delete the `log4j.properties` file when you are done with the procedure.

The resulting log file is named `oxygen#.log` (for example, `oxygen.log`, `oxygen.log.1`, `oxygen.log.2`, etc.) and is located in the `Desktop\oxygenLog` folder.

XML Document Takes a Long Time to Open

If Oxygen XML Developer takes a long time to open a document, check the following:

It takes longer to open an XML document if the whole content of your document is on a single line or if the document size is very large.

If the content is on a single line, you can speed up loading by enabling the **Format and indent the document on open** option. To do so, [open the Preferences dialog box](#) and go to **Editor > Format > Format and indent the document on open**.

If the document is very large (above 30 MB) make sure that the value of [Optimize loading in the Text edit mode for files over](#) is greater than the size of your document.

If that fails and you get an Out Of Memory error (**OutOfMemoryError**) you can [increase the memory available to Oxygen XML Developer](#).

Oxygen XML Developer Takes Several Minutes to Start on Mac

If Oxygen XML Developer takes several minutes to start, the Java framework installed on the Mac may have a problem. One solution for this is to update Java to the latest version: go to **Apple symbol > Software Update**. After it finishes to check for updates, click **Show Details**, select the Java Update (if one is available) and click **Install**. If no Java updates are available, reset the Java preferences to their defaults. Start **Applications > Utilities > Java Preferences** and click **Restore Defaults**.

Out Of Memory Error When Opening Large Documents

I am trying to open a file larger than 100 MB to edit it in Oxygen XML Developer, but it keeps telling me it runs out of memory (**OutOfMemoryError**). What can I do?

You should make sure that the minimum limit of document size that enables the support for editing large documents (the value of [Optimize loading in the Text edit mode for files over option](#)) is less than the size of your document. That will enable the optimized support for large documents. If that fails and you still get an Out Of Memory error you should [increase the memory available to Oxygen XML Developer](#).

Other tips:

- Make sure that you close other files before opening the large file.
- You can set the default editing mode [in the Preferences dialog box](#). The *Text editing mode* uses less memory than other editing modes.
- If the file is too large for the editor to handle, you can [open it in for viewing in Large File Viewer](#).

Special Characters are Replaced with a Square in Editor

My file was created with other application and it contains special characters (such as é, ©, ®, etc.) Why does Oxygen XML Developer display a square for these characters when I open the file in Oxygen XML Developer?

You must set a font able to render the special characters in the **Font preferences**. If it is a text file you must set also [the encoding used for non XML files](#). If you want to set a font which is installed on your computer but that font is not accessible in the **Font** preferences that means the Java virtual machine is not able to load the system fonts, probably because it is not a True Type font. It is a problem of the Java virtual machine and a possible solution is to copy the font file in the [JVM_DIR]/lib/fonts folder. [JVM_DIR] is the value of the property `java.home` which is available in the **System properties** tab of the **About** dialog box that is opened from menu **Help > About**.

XSLT Debugger Is Very Slow

When I run a transformation in the **XSLT Debugger** perspective it is very slow. Can I increase the speed?

If the transformation produces HTML or XHTML output you should [disable rendering of output in the XHTML output view](#) during the transformation process. To view the XHTML output result do one of the following:

- Run the transformation in the **Editor** perspective and make sure the [Open in Browser/System Application option](#) is enabled.
- Run the transformation in the **XSLT Debugger** perspective, save the text output area to a file, and use a browser application for viewing it (for example Firefox or Internet Explorer).

The Scroll Function of my Notebook Trackpad is Not Working

I got a new notebook (Lenovo Thinkpad™ with Windows) and noticed that the scroll function of my trackpad is not working in Oxygen XML Developer.

It is a problem of the Synaptics™ trackpads which can be fixed by adding the following lines to the C:\Program Files\Synaptics\SynTP\TP4table.dat file:

```
* , *, oxygen17.1.exe, * , * , *, WheelStd, 1, 9
* , *, oxygenAuthor17.1.exe, * , * , *, WheelStd, 1, 9
* , *, oxygenDeveloper17.1.exe, * , * , *, WheelStd, 1, 9
* , *, syncroSVNClient.exe, * , * , *, WheelStd, 1, 9
* , *, diffDirs.exe, * , * , *, WheelStd, 1, 9
* , *, diffFiles.exe, * , * , *, WheelStd, 1, 9
```

Crash at Startup on Windows with an Error Message About a File nvogl32.dll

I try to start Oxygen XML Developer on Windows but it crashed with an error message about “Fault Module Name: nvogl32.dll”. What is the problem?

It is an OpenGL driver issue that can be avoided by creating an empty file called `opengl32.dll` in the Oxygen XML Developer install folder (if you start Oxygen XML Developer with the shortcut created by the installer on the Start menu or on Desktop) or in the subfolder `bin` of the home folder of the Java virtual machine that runs Oxygen XML Developer (if you start Oxygen XML Developer with the `oxygen.bat` script). The home folder of the Java virtual machine that runs Oxygen XML Developer is the value of the `java.home` property that is available in the **System properties** tab of the **About** dialog box (opened from the **Help > About** menu).

Oxygen XML Developer Crashed on My Mac OS X Computer

Oxygen XML Developer crashed the Apple Java virtual machine/Oxygen XML Developer could not start up on my OS X computer due to a JVM crash. What can I do?

Usually it is an incompatibility between the Apple JVM and a native library of the host system. More details are available in the crash log file generated by OS X and reported in the crash error message.

Wrong Highlights of Matched Words in a Search in User Manual

When I do a keyword search in the User Manual that comes with the Oxygen XML Developer application the search highlights the wrong word in the text. Sometimes the highlighted word is several words after the matched word. What can I do to get correct highlights?

This does not happen when Oxygen XML Developer runs with a built-in Java virtual machine, that is a JVM that was installed by Oxygen XML Developer in a subfolder of the installation folder, for example on Windows and Linux when installing Oxygen XML Developer with the installation wizard specific for that platform. When Oxygen XML Developer runs from an All Platforms installation it uses whatever JVM was found on the host system which may be incompatible with the JavaHelp indexer used for creating the built-in User Manual. Such a JVM may offset the highlight of the matched word with several characters, usually to the right of the matched word. In order to see the highlight exactly on the matched word it is recommended to install the application with the specific installation wizard for your platform (available only for Windows and Linux).

Keyboard Shortcuts Do Not Work

The keyboard shortcuts listed in the [Menu Shortcut Keys preferences](#) do not work. What can I do?

Usually this happens when a special keyboard layout is set in the operating system which generates other characters than the usual ones for the keys of a standard keyboard. For example if you set the extended Greek layout for your keyboard you should return to the default Greek layout or to the English one. Otherwise the Java virtual machine that runs the application will receive other key codes than the usual ones for a standard keyboard.

After Installing Oxygen XML Developer I Cannot Open XML Files in Internet Explorer Anymore

Before installing Oxygen XML Developer I had no problems opening XML files in Internet Explorer. Now when I try to open an XML file in Internet Explorer it opens the file in Oxygen XML Developer. How can I load XML files in Internet Explorer again?

XML files are opened in Oxygen XML Developer because Internet Explorer uses the Windows system file associations for opening files and you associated XML files with Oxygen XML Developer in the installer panel called **File Associations** therefore Internet Explorer opens XML files with the associated Windows application.

By default the association with XML files is disabled in the Oxygen XML Developer installer panel called **File Associations**. When you enabled it the installer displayed a warning message about the effect that you experience right now.

For opening XML files in Internet Explorer again you have to set Internet Explorer as the default system application for XML files, for example by right-clicking an XML file in Windows Explorer, selecting **Open With > Choose Program**, selecting IE in the list of applications and selecting the checkbox **Always use the selected program**. Also you have to run the following command from a command line:

```
wscript revert.vbs
```

where `revert.vbs` is a text file with the following content:

```
function revert()
  Set objShell = CreateObject("WScript.Shell")
  objShell.RegWrite "HKCR\.xml\", "xmlfile", "REG_SZ"
  objShell.RegWrite "HKCR\.xml\Content Type", "text/xml", "REG_SZ"
end function

revert()
```

I Cannot Associate Oxygen XML Developer With a File Type on My Windows Computer

I cannot associate the Oxygen XML Developer application with a file type on my Windows computer by right clicking a file in Windows Explorer, selecting **Open With > Choose Program** and browsing to the file `oxygenDeveloper17.1.exe`. When I select the file `oxygenDeveloper17.1.exe` in the Windows file browser dialog box, the Oxygen XML Developer application is not added to the list of applications in the **Open With** dialog box. What can I do?

The problem is due to some garbage Windows registry entries remained from versions of Oxygen XML Developer older than version 9.0. Uninstall all your installed versions of Oxygen XML Developer and run a registry cleaner application for cleaning these older entries. After that just reinstall your current version of Oxygen XML Developer and try again to create the file association.

Gray Window on Linux With the Compiz / Beryl Window Manager

I try to run Oxygen XML Developer on Linux with the Compiz / Beryl window manager but I get only a gray window which does not respond to user actions. Sometimes the Oxygen XML Developer window responds to user actions but after opening and closing an Oxygen XML Developer dialog or after resizing the Oxygen XML Developer window or a view of the Oxygen XML Developer window the content of this window becomes gray and it does not respond to user actions. What is wrong?

Sun Microsystems' Java virtual machine *does not support the Compiz window manager and the Beryl one very well*. It is expected that better support for Compiz / Beryl will be added in future versions of their Java virtual machine. You should turn off the special effects of the Compiz / Beryl window manager before starting the Oxygen XML Developer application or switch to other window manager.

Drag and Drop Without Initial Selection Does Not Work

When I try to drag with the mouse an unselected file from the **Project** view, the drag never starts, it only selects the resource. I need to drag the resource again after it becomes selected. As a result any drag and drop without initial selection becomes a two step operation. How can I fix this?

This is [a bug](#) present in JVM versions prior to 1.5.0_09. This issue is fixed in 1.5.0_09 and newer versions. See [the installation instructions](#) for setting a specific JVM version for running the Oxygen XML Developer application.

Set Specific JVM Version on Mac OS X

How do I configure Oxygen XML Developer to run with the version X of the Apple Java virtual machine on my Mac OS X computer?

Oxygen XML Developer uses the first JVM from the list of preferred JVM versions set on your Mac computer that has a version number 1.6.0 or higher. You can move your desired JVM version up in the preferred list by dragging it with the mouse on a higher position in the list of JVMs available in the **Java Preferences** panel that is opened from **Applications > Utilities > Java > Java Preferences**.

Segmentation Fault Error on Mac OS X

On my Mac OS X machine the application gives a *Segmentation fault* error when I double-click the application icon. Sometimes it gives no error but it does not start. What is the problem?

Make sure you have the latest Java update from the Apple website installed on your Mac OS X computer. If installing the latest Java update does not solve the problem, copy the file `JavaApplicationStub` from the `/System/Frameworks/JavaVM.framework` folder to the `OxygenDeveloper.app/Contents/MacOS` folder. For browsing the `.app` folder you have to **(CMD+click)** the Oxygen XML Developer icon and select **Show Package Contents**.

Damaged File Associations on OS X

After upgrading OS X and Oxygen XML Developer, it is no longer associated to the appropriate file types (such as XML, XSL, XSD, etc.) How can I create the file associations again?

The upgrade damaged the file associations in the LaunchService Database on your OS X machine. You can rebuild the LaunchService Database with the following procedure. This will reset all file associations and will rescan the entire file system searching for applications that declare file associations and collecting them in a database used by Finder.

1. Find all the Oxygen XML Developer installations on your hard drive.
2. Delete them by dragging them to the Trash.
3. Clear the Trash.

4. Unpack the Oxygen XML Developer installation kit on your desktop.
5. Copy the contents of the archive into the folder / Applications / Oxygen.
6. Run the following command in a Terminal:

```
/System/Library/Frameworks/CoreServices.framework/Versions/A/Frameworks/LaunchServices.framework/Versions/A/Support/lsregister
-kill -r -domain local -domain system -domain user
```

7. Restart Finder with the following command:

```
killall Finder
```

8. Create a XML or XSD file on your desktop.
It should have the Oxygen XML Developer icon.
9. Double-click the file.
10. Accept the confirmation.

When you start Oxygen XML Developer the file associations should work correctly.

I Cannot Connect to SVN Repository from Repositories View

I cannot connect to a SVN repository from the **Repositories** view of SVN Client. How can I find more details about the error?

First check that you entered the correct URL of the repository in the **Repositories** view. Also check that a SVN server is running on the server machine specified in the repository URL and is accepting connections from SVN clients. You can check that the SVN server accepts connections with the command line SVN client from CollabNet.

If you try to access the repository with a `svn+ssh` URL also check that a SSH server is running on port 22 on the server machine specified in the URL.

If the above conditions are verified and you cannot connect to the SVN repository please generate a logging file on your computer and send the logging file to support@oxygenxml.com. For generating a logging file you need to create a text file called `log4j.properties` in the install folder with the following content:

```
log4j.rootCategory= debug, R2
log4j.appender.R2=org.apache.log4j.RollingFileAppender
log4j.appender.R2.File=logging.log
log4j.appender.R2.MaxFileSize=12000KB
log4j.appender.R2.MaxBackupIndex=20
log4j.appender.R2.layout=org.apache.log4j.PatternLayout
log4j.appender.R2.layout.ConversionPattern=%r %p [ %t ] %c - %m%n
```

Restart the application, reproduce the error, close the application and send the file `logging.log` generated in the install directory to support@oxygenxml.com.

Signature Verification Failed Error on Open or Edit a Resource from Documentum

When I try to open/edit a resource from Documentum, I receive the following error:

```
signature verification failed: certificate for All-MB.jar.checksum not signed
by a certification authority.
```

The problem is that the certificates from the Java Runtime Environment 1.6.0_22 or later no longer validate the signatures of the UCF jars.

Set the `-Drequire.signed.ucf.jars=false` parameter, as explained in the [Setting a Parameter in the Launcher Configuration File / Startup Script](#) topic.

```
-vmargs
-Xms40m
-Xmx256m
-Drequire.signed.ucf.jars=false
```

Compatibility Issue Between Java and Certain Graphics Card Drivers

Under certain settings, a compatibility issue can appear between Java and some graphics card drivers, which results in the text from the editor (in **Author** or **Text** mode) being displayed garbled. If you encounter this problem, update your graphics card driver. Another possible workaround is, [open the Preferences dialog box](#), go to **Appearance > Fonts**, and set the value of **Text antialiasing** option to ON.



Note: If this workaround does not resolve the problem, set the **Text antialiasing** option to other values.

An Image Appears Stretched Out in the PDF Output

When publishing XML content (DITA, DocBook, etc.), images are sometimes scaled up in the PDF outputs but are displayed perfectly in the HTML (or WebHelp) output.

PDF output from XML content is obtained by first obtaining a intermediary XML format called XSL-FO and then applying an XSL-FO processor to it to obtain the PDF. This stretching problem is caused by the fact that all XSL-FO processors take into account the DPI (dots-per-inch) resolution when computing the size of the rendered image.

The PDF processor which comes out of the box with the application is the open-source Apache FOP processor. Here is what Apache FOP does when deciding the image size:


1. If the XSL-FO output contains width, height or a scale specified for the image `external-graphic` tag, then these dimensions are used. This means that if in the XML (DITA, DocBook, etc.) you set explicit dimensions to the image they will be used as such in the PDF output.
2. If there are no sizes (width, height or scale) specified on the image XML element, the processor looks at the image resolution information available in the image content. If the image has such a resolution saved in it, the resolution will be used and combined with the image width and height in order to obtain the rendered image dimensions.
3. If the image does not contain resolution information inside, Apache FOP will look at the FOP configuration file for a default resolution. The FOP configuration file for XSLT transformations which output PDF is located in the `[OXYGEN_DIR]/lib/fop.xconf`. DITA publishing uses the DITA Open Toolkit that has the Apache FOP configuration file located in `[DITA_OT_DIR]/plugins/org.dita.pdf2/fop/conf/fop.xconf`. The configuration file contains two XML elements called `source-resolution` and `target-resolution`. The values set to those elements can be increased, usually a DPI value of 110 or 120 should render the image in PDF just like in the HTML output.

The commercial **RenderX XEP** XSL-FO processor behaves similarly but as a fallback it uses 120 as the DPI value instead of using a configuration file.



Tip:

As a conclusion, it is best to save your images without any DPI resolution information in them. For example the open-source GIMP image editor allows you when saving a PNG image whether to save the resolution to it or not:

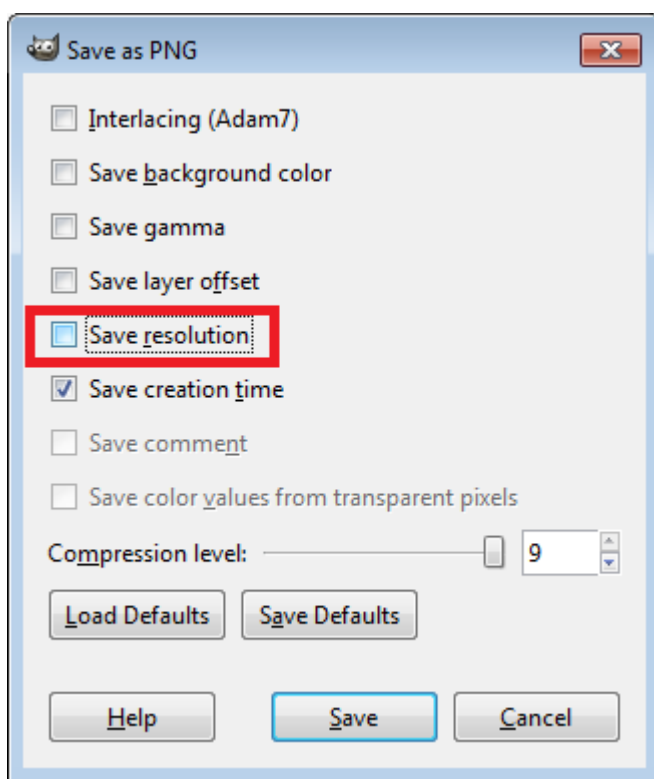

Having images without any resolution information saved in them allows you to control the image resolution from the configuration file for all referenced images.

The DITA PDF Transformation Fails

To generate the PDF output, Oxygen XML Developer uses the DITA Open Toolkit.

You can analyse the **Results** tab of the DITA transformation and search for messages that contain text similar to `[fop]` `[ERROR]`. If you encounter this type of error message, edit the transformation scenario you are using and set the **clean.temp** parameter to **no** and the **retain.topic.fo** parameter to **yes**. Run the transformation, go to the temporary directory of the transformation, open the `topic.fo` file and go to the line indicated by the error. Depending on the XSL FO context try to find the DITA topic that contains the text which generates the error.

If none of the above methods helps you, go to **Help > About > Components > Frameworks** and check what version of the DITA Open Toolkit you are using. Copy the whole output from the DITA OT console output and either report the problem on the DITA User List or to support@oxygenxml.com.

The DITA to CHM Transformation Fails

Oxygen XML Developer uses the DITA Open Toolkit and the HTML Help compiler (part of the Microsoft HTML Help Workshop) to transform DITA content into *Compiled HTML Help* (or *CHM* in short).

However, the execution of the transformation scenario may still fail. Reported errors include:

- `[exec] HHC5010: Error: Cannot open "fileName.chm". Compilation stopped.` - This error occurs when the CHM output file is opened and the transformation scenario cannot rewrite its content. To solve this issue, close the CHM help file and run the transformation scenario again.
- `[exec] HHC5003: Error: Compilation failed while compiling fileName` - Possible causes of this error are:
 - The processed file does not exist. Fix the file reference before executing the transformation scenario again.
 - The processed file has a name that contains space characters. To solve the issue, remove any spacing from the file name and run the transformation scenario again.

DITA Map Ant Transformation Because it Cannot Connect to External Location

The transformation is run as an external Ant process so you can continue using the application as the transformation unfolds. All output from the process appears in the **DITA Transformation** tab.

The HTTP proxy settings are used for the Ant transformation so if the transformation fails because it cannot connect to an external location you can check the [the Proxy preferences page](#)

Topic References Outside the Main DITA Map Folder

Referencing to a DITA topic, map or to a binary resource (for example: image) which is located outside of the folder where the main DITA map is located usually leads to problems when publishing the content using the DITA Open Toolkit. The DITA OT does not handle well links to topics which are outside the directory where the published DITA map is found. By default it does not even copy the referenced topics to the output directory.

You have the following options:

1. Create another DITA map which is located in a folder path above all referenced folders and reference from it the original DITA map. Then transform this DITA map instead.
2. Edit the transformation scenario and in the **Parameters** tab edit the **fix.external.refs.com.oxygenxml** parameter. This parameter is used to specify whether the application tries to fix up such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references. The fix up has no impact on your edited DITA content. Only "false" and "true" are valid values. The default value is false.

The PDF Processing Fails to Use the DITA OT and Apache FOP

There are cases when publishing DITA content fails when creating a PDF file. This topic lists some common problems and solutions.

- The FO processor cannot save the PDF at the specified target. The console output contains messages like:

```
[fop] [ERROR] Anttask - Error rendering fo file: C:\samples\dita\temp\pdf\oxygen_dita_temp\topic.fo <Failed
to open C:\samples\dita\out\pdf\test.pdf>
Failed to open samples\dita\out\pdf\test.pdf
.....
[fop] Caused by: java.io.FileNotFoundException: C:\Users\radu_coravu\Desktop\bev\out\pdf\test.pdf
(The process cannot access the file because it is being used by another process)
```

Such an error message usually means that the PDF file is already opened in a PDF reader application. The solution is to close the open PDF before running the transformation.

- One of the DITA tables contains more cells in a table row than the defined number of *colspec* elements. The console output contains messages like:

```
[fop] [ERROR] Anttask - Error rendering fo file:
D:\projects\exml\samples\dita\flowers\temp\pdf\oxygen_dita_temp\topic.fo
<net.sf.saxon.trans.XPathException: org.apache.fop.fo.ValidationException:
The column-number or number of cells in the row overflows the number of fo:table-columns specified for the
table. (See position 179:-1)>net.sf.saxon.trans.XPathException: org.apache.fop.fo.ValidationException: The
column-number or number of cells in the row overflows the number of fo:table-columns specified for the table.
(See position 179:-1)
[fop] at org.apache.fop.tools.anttasks.FOPTaskStarter.renderInputHandler(Fop.java:657)
[fop] at net.sf.saxon.event.ContentHandlerProxy.startContent(ContentHandlerProxy.java:375)
.....
[fop] D:\projects\samples\dita\flowers\temp\pdf\oxygen_dita_temp\topic.fo ->
D:\projects\samples\dita\flowers\out\pdf\flowers.pdf
```

To resolve this issue, correct the *colspec* attribute on the table that caused the issue. To locate the table that caused the issue:

1. Edit the transformation scenario and set the parameter *clean.temp* to *no*.
2. Run the transformation, open the *topic.fo* file in Oxygen XML Developer, and look in it at the line specified in the error message (See *position 179:-1*).
3. Look around that line in the XSL-FO file to find relevant text content which you can use, for example, with the **Find/Replace in Files** action in the **DITA Maps Manager** view to find the original DITA topic for which the table was generated.

- There is a broken link in the generated XSL - FO file. The PDF is generated but contains a link that is not working. The console output contains messages like:

```
[fop] 1248 WARN [ main ] org.apache.fop.apps.FOUserAgent - Page 6: Unresolved ID reference
"unique_4_Connect_42_wrongID" found.
```

To resolve this issue:

1. Use the  **Validate and Check for Completeness** action available in the **DITA Maps Manager** view to find such problems.
2. If you publish to PDF using a DITaval filter, select the same DITaval file in the **DITA Map Completeness Check** dialog box.
3. If the  **Validate and Check for Completeness** action does not discover any issues, edit the transformation scenario and set the *clean.temp* parameter to *no*.
4. Run the transformation, open the `topic.fo` file in Oxygen XML Developer, and search in it for the `unique_4_Connect_42_wrongID` id.
5. Look around that line in the XSL - FO file to find relevant text content which you can use, for example, with the **Find/Replace in Files** action in the **DITA Maps Manager** view to find the original DITA topic for which the table was generated.

Navigation to the web page was canceled when viewing CHM on a Network Drive

When viewing a CHM on a network drive, if you only see the TOC and an empty page displaying “Navigation to the web page was canceled” note that this is normal behavior. The Microsoft viewer for CHM does not display the topics for a CHM opened on a network drive.

As a workaround, copy the CHM file on your local system and view it there.

Alignment Issues of the Main Menu on Linux Systems Based on Gnome 3.x

On some Linux systems based on Gnome 3.x (Ubuntu 11.x, 12.x), the main menu of Oxygen XML Developer has alignment issues when you navigate it using your mouse.

This is a known problem caused by Java SE 6 1.6.0_32 and earlier. You can resolve this problem using the latest Java SE 6 JRE from Oracle. To download the latest version, go to

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>.

To bypass the JRE bundled with Oxygen XML Developer, go to the installation directory of Oxygen XML Developer and rename or move the `jre` folder. If Oxygen XML Developer does not seem to locate the system JRE, either set the `JAVA_HOME` environment variable to point to the location where you have installed the JRE, or you can simply copy that folder with the JRE to the installation directory and rename it to `jre` to take the place of the bundled JRE.

SVG Rendering Issues

Oxygen XML Developer uses the **Apache Batik** open source library to render SVG images. The **Batik** library only has partial support for SVG 1.2: <http://xmlgraphics.apache.org/batik/dev/svg12.html>.

For example, if you are using the *Inkscape* SVG editor, it is possible that it saves the SVG as 1.1 but it actually uses SVG 1.2 elements like `flowRoot` inside it. This means that the image will not be properly rendered inside the application.

MSXML 4.0 Transformation Issues

If the latest MSXML 4.0 service pack is not installed on your computer, you are likely to encounter the following error message in the **Results** panel when you run a transformation scenario that uses the MSXML 4.0 transformer.

Error Message

Could not create the 'MSXML2.DOMDocument.4.0' object.
Make sure that MSXML version 4.0 is correctly installed on the machine.

To fix this issue, go to the Microsoft website and get the latest MSXML 4.0 service pack.

Chapter

20

Glossary

Topics:

- [Active cell](#)
- [Apache Ant](#)
- [Block element](#)
- [Bookmap](#)
- [DITA Map](#)
- [DITA_OT_DIR](#)
- [Inline element](#)
- [Java Archive](#)
- [Named User](#)

Active cell

The selected cell in which data is entered when you begin typing. Only one cell is active at a time. The active cell is bounded by a heavy border.

Apache Ant

Apache Ant (Another Neat Tool) is a software tool for automating software build processes.

Ant

Block element

A block element is an one that is intended to be visually separated from its siblings, usually vertically. For instance, a paragraph or a list item are block elements. It is distinct from a *inline element* which has no such separation.

Bookmap

A bookmap is a specialized *DITA map* used for creating books. A bookmap supports book divisions such as chapters and book lists such as indexes.

DITA Map

A DITA map is a hierarchical collection of DITA topics that can be processed to form an output. Maps do not contain the content of topics, but only references to them. These are known as topic references. Usually the maps are saved on disk or in a CMS with the extension `.ditamap`.

Maps can also contain relationship tables that establish relationships between the topics contained within the map. Relationship tables are also used to generate links in your published document.

You can use your map or bookmap to generate a deliverable using an output type such as XHTML, PDF, HTML Help or Eclipse Help.

DITA_OT_DIR

DITA_OT_DIR is the default directory that is specified for your DITA Open Toolkit distribution in the [Options > Preferences > DITA preferences page](#).

For example, if you are using DITA 1.8, the default DITA OT directory is:
[OXYGEN_DIR]/frameworks/dita/DITA-OT.

Inline element

An inline element is one that is intended to be displayed in the same line of text as its siblings or the surrounding text. For instance, strong and emphasis in HTML are inline elements. It is distinct from a *block element*, which is visually separated from its siblings.

Java Archive

JAR (Java ARchive) is an archive file format. JAR files are built on the ZIP file format and have the .jar file extension. Computer users can create or extract JAR files using the `jar` command that comes with a JDK.

Java Archive (JAR)

JAR

Named User

Named User is defined as an individual full or part-time employee who is authorized by *You* (the individual or entity who owns the rights to Oxygen XML Developer) to use the software regardless of whether the individual is actively using the software at any given time. To avoid any doubt, Named User licenses cannot be shared amongst multiple individuals and separate Named User licenses must be purchased for each individual user.

A Named User license may not be reassigned to another employee except in the following circumstances:

- (a) Upon termination of the Named User's employment with your company.
- (b) Permanent reassignment of a Named User to a position that does not involve the use of the Software.

For example, suppose Jane has been assigned an Oxygen XML license and she leaves your company. When she leaves, you can simply reassign her license to John, her replacement. In the event that you do reassign the Named User license in accordance with the restrictions above, you do not need to notify Syncro of such a reassignment.



Note: This definition is taken from the Oxygen XML Developer [End User License Agreement](#).

Index

A

- Add button 473
- Add favicon to WebHelp 471
- Add items to a project 22, 112
- Archives 515, 516, 519
- browse 516
- edit 519
- file browser 516
- modify 516
- Author Editor 122
 - whitespace handling 122
 - versions differences 122
- Automating WebHelp Output 461
- WebHelp plugin 461

B

- Bidirectional text 78, 80
- Grid Mode 80
- Text Mode 78

C

- Common Problems 828
- Comparing and Merging Documents 708, 709, 710, 711, 712, 714, 715, 716, 718, 719
 - Compare Directories tool 709, 710, 711, 712
 - compare images view 712
 - Compare menu 709, 710
 - comparison results 711
 - user interface 709
 - Compare Files tool 714, 715, 716, 718, 719
 - character comparison 719
 - Compare menu 715
 - compare toolbar 716
 - Edit menu 714
 - file contents panel 718
 - File menu 714
 - files selector 718
 - Find menu 714
 - main menu 714
 - word comparison 719
 - Compare Files tool Compare Directories tool 710, 716
 - Help menu 710, 716
 - Options menu 710, 716
- Compare Files tool compare fragments 712
- Comparing and Merging Documents(Compare Directories tool 711
- Directories Selector 711
- Compile LESS to CSS 323
- Configuration 769
- CSS validator 769
- Configure Application 765
 - Editor preferences 765
 - spell check 765
- Configure the application 734
 - Appearance Preferences 734
 - Colors 734

- Configure the Application 732, 735, 736, 737, 747, 748, 749, 750, 751, 752, 753, 755, 756, 759, 760, 761, 765, 767, 768, 770, 772, 773, 774, 775, 777, 778, 779, 780, 781, 782, 785, 787, 788, 790, 793, 794, 795, 796, 797, 798, 799, 800, 801, 802, 803, 805, 806, 807, 808, 810, 811, 814, 815, 816
- (S)FTP 807
- Accessibility 814
- archive 800
- BOM 747
- byte order mark 747
- certificates 788
- character encoding 747
- configure toolbars 814
- customize default options 810
- custom validation 768
 - data sources 790, 793, 794
 - download links for database drivers 793
 - table filters 794
- Diff 797
- Diff appearance 798
- Diff directories 799
- Diff directories appearance 799
- document type association 737
- editor preferences 748
 - Editor preferences 748, 749, 750, 751, 752, 753, 755, 756, 759, 760, 761, 765, 767
 - code templates 761
 - content completion 756
 - document checking 767
 - document templates 765
 - elements and attributes by prefix 759
 - format 752
 - format - CSS 755
 - format - JavaScript 756
 - format - XML 753
 - grid 750
 - open/save 760
 - pages 749
 - print 748
 - save hooks 761
 - schema design 751
 - syntax highlight 759
 - text 749
 - text/diagram 750
- editor variables 816
- encoding 747
- external tools 801
- file types 803
- fonts 735
- global 732
- HTTP(S)/WebDAV preferences 806
 - import 787
 - date/time patterns 787
- import/export global options 811
- menu shortcut keys 802
- messages 796, 808
- outline 808

- Configure the Application (*continued*)
 - perspectives layout 736
 - plugins 800
 - proxy preferences 805
 - reset global options 811
 - scenarios management 815
 - Export Global Transformation Scenarios 815
 - Export Global Validation Scenarios 815
 - Import Global Transformation Scenarios 815
 - Import Global Validation Scenarios 815
- SSH 808
- SVN 794
- SVN Diff 796
- UTF-8 747
- views 808
- working copy 795
- XML 770
- XML catalog 770
- XML instances generator 772
- XML parser 770
- XProc engines 773
- XSLT 774
- XSLT/FO/XQuery 774
 - XSLT/FO/XQuery preferences 775, 777, 778, 779, 780, 781, 782, 785
 - custom engines 785
 - debugger 781
 - FO Processors 782
 - MSXML 778
 - MSXML.NET 778
 - profiler 782
 - Saxon6 775
 - Saxon HE/PE/EE 775, 780
 - Saxon-HE/PE/EE 775
 - Saxon HE/PE/EE advanced options 777, 781
 - XPath 785
 - XQuery 779
 - XSLTProc 777
- Configure the interface (Change interface colors) (Change color theme) 734
- Accessibility 734
- Content Completion in Schematron 351
- Content Management System 579
- CMS integration 579
- Context sensitive WebHelp 454
- Copy/Paste 139
- grid editor 139
- create edit document type association 738
- Create New Project 22, 112
- Create Validation Scenario 159
- Create validation scenario XSLT stylesheets 205
- Creating Documents 93
- New Document Wizard 93
- Customizing Schematron Quick Fixes 359
- SQF 359
- Customizing WebHelp Systems 455, 456, 457, 468, 469, 470, 471, 472
 - add logo image in title area 470
 - add videos to WebHelp output 469
 - change style of ordered lists 472
 - changing the style of WebHelp Mobile pages 457
 - customizing headers / footers 471

- Customizing WebHelp Systems (*continued*)
 - Customizing icons in the Table of Contents 469
 - Customizing WebHelp output with a custom CSS 456
 - Editing Scoring Properties for Search Results 468
 - remove previous / next links 471
 - Table of contents customization 470
 - custom startup parameters 825
 - vmoptions reset to default values 825

D

- Databases 485, 521, 522, 541, 542, 560, 561, 562, 563, 564, 585
- debugging with MarkLogic 563
- limitations of the MarkLogic debugger 563
- native XML databases (NXD) 541
- Native XML databases (NXD) 542
- Relational databases 522
- SharePoint connection 585
- WebDAV connection 564
 - XQuery 485, 560, 561, 562
 - debugging 562
 - drag and drop from the Data Source Explorer 560
 - transformation 561
 - validation 485
- Debugging XSLT/XQuery Documents 492, 496, 505, 508
- Java extensions 508
 - layout 492, 496, 505
 - information views 496
 - multiple output documents in XSLT 2.0 505
- XSLT/XQuery debugger 505
- Debugging XSLT / XQuery Documents 493
 - layout 493
 - Control toolbar 493
- deploying WebHelp with Feedback 450
- Develop an oXygen Plugin 592, 606
- example - **UppercasePlugin** 606
- introduction 592
- Digital Signature 719, 721, 722, 724
 - canonicalizing files 721
 - certificates 722
 - signing files 722
 - verifying the signature 724
- Digital Signatures 720, 724
- digital signatures overview 720
- how to digitally sign XML content 724
- Disable browser caching 472
- DITA map document type 391
 - schema 391
- DITA Map document type 391
 - Author extension 391
 - catalogs 391
- DITA Map Document Type 391, 397
 - Author extension 397
 - templates 397
- DITA MAP document type 391
 - association rules 391
- DITA MAP Document Type 391
 - Author extension 391
 - transformation scenarios 391
- DITA Maps 836
 - transforming DITA Maps 836
 - running an ANT transformation 836

- DITA Map Transformation Scenario WebHelp Output 392
- DITA Topics document type 390
 - association rules 390
 - Author extensions 390
 - catalogs 390
 - schema 390
- DITA Topics Document Type 390
 - Author extensions 390
 - templates 390
 - transformation scenarios 390
- DocBook 381, 387
- Insert olink 381, 387
- DocBook Targetset document type 401
 - association rules 401
 - schema 401
- DocBook Targetset Document Type 401
- DocBook V4 document type 377, 380
 - association rules 377
 - Author extensions 377, 380
 - catalogs 377
 - templates 380
 - schema 377
- DocBook V4 Document Type 377
 - Author extensions 377
 - transformation scenarios 377
- DocBook V5 document type 383, 387
 - association rules 383
 - Author extensions 383, 387
 - catalogs 383
 - templates 387
 - schema 383
- DocBook V5 Document Type 383
 - Author extensions 383
 - transformation scenarios 383
- Document Navigation 165
- Outline View Navigation 165
- Document type configuration dialog box 738
- Documentum (CMS) Support 580, 581, 582, 583
 - actions 581, 582, 583
 - cabinets/folders 582
 - connection 582
 - resources 583
- configuring a Documentum (CMS) data source 580, 581

E

- Edit 89, 90, 93, 96, 97, 98, 99, 106, 110, 111, 167, 168, 171, 172, 368, 371, 372, 373, 519, 728, 822
- archives 519
- associating a file extension 373
- change the user interface language 822
- change user interface language 822
- Character map 90
- check spelling 368
- check spelling in files 371
- close documents 110
- copy/paste 167
- create new documents 93
- edit documents with long lines 373
- file properties 111
- find/replace 168
- find/replace (keyboard shortcuts) 171

- Edit (*continued*)
- find and replace text in multiple files 172
- integrate external tools 728
- interface localization file 822
- localize the user interface 822
- open and close documents 93
- open documents 96
- open read-only files 373
- open remote documents (FTP/SFTP/WebDAV) 99
- open resource 106
- open the currently document in the system application 97
- Quick Find toolbar 171
- save documents 98
- scratch buffer 372
- Unicode documents 90
- Unicode support 90
- Unicode toolbar 90
- Editing Ant Build Files 235
- Editing CSS Stylesheets 319, 320, 321
- Content Completion Assistant 320
- folding 321
- format and indent (pretty print) 321
- Outline view 320
- validation 319
- Editing Documents 111, 166
 - Accessibility 166
 - change the font size 166
 - contextual menu of current editor tab 111
 - drag and drop 166
 - undo and redo 166
 - Using projects 111
- Editing JavaScript Documents 344
- Editing JavaScript Files 344, 346, 347, 348
- Content Completion Assistant 346
- Outline view 347
- Text mode 344
- validating JavaScript files 348
- Editing JSON Documents 339, 340, 341, 342
 - convert XML to JSON 342
 - folding 340
 - Grid mode 341
 - Outline view 342
 - syntax highlight 340
 - Text mode 339
 - Validating JSON Documents 342
- Editing LESS stylesheets 322
- Editing Modes 74
- Results View 74
- Editing NVDL Schemas 335, 336, 337, 338
- Component Dependencies view 338
 - schema diagram 335, 336, 337
 - actions in the diagram view 336
 - full model view 335
 - Outline view 337
- searching and refactoring actions 337
- Editing RelaxNG Schemas 333
- Component Dependencies View 333
- Editing Relax NG Schemas 323, 324, 325, 326, 327, 329, 330
- Resource Hierarchy/Dependencies View 330
 - schema diagram 324, 325, 326, 327
 - actions 326
 - full model view 324

- Editing Relax NG Schemas (*continued*)
 - schema diagram (*continued*)
 - logical model view 325
 - Outline view 327
 - symbols 325
- searching and refactoring actions 329
- Editing Schematron 358
- Quick Assist 358
- Editing Schematron Documents 356
- searching and refactoring operations 356
- Editing Schematron Schemas 349, 350, 352, 354, 357
- contextual editing 352
- Master Files context 352
- Resource Hierarchy/Dependencies View 354
- Schematron Outline view 352
- Search and Refactoring Operations Scope 357
- validation against Schematron 350
- Editing StratML Documents 343
- Editing SVG Documents 365, 366, 367, 727
- preview result pane 367
- standalone SVG viewer 366, 727
- Editing WSDL Document 316
 - SOAP request 316
 - composing a SOAP request 316
- Editing WSDL Documents 299, 300, 304, 305, 306, 307, 310, 311, 312, 315, 316, 318
- Component Dependencies view 310
- component occurrences 311
- composing web service calls with WSDL SOAP analyzer 316
- content completion 304
- contextual editing 304
- generate documentation for WSDL documents 312
- generate documentation for WSDL documents from command line 316
- generate documentation for WSDL documents in a custom format 315
- Outline view 300
- Quick Assist 311
- Resource Hierarchy/Dependencies view 307
- searching and refactoring operations 305
- searching and refactoring operations scope 306
 - SOAP request 318
 - testing remote WSDL files 318
 - UDDI registry browser 318
- Editing XLIFF document 344
 - 1.2 344
 - 2.0 344
- Editing XML Documents 59, 67, 70, 73, 77, 113, 120, 125, 131, 141, 142, 144, 145, 149, 151, 152, 154, 155, 156, 157, 159, 162, 163, 164, 166, 175, 176, 177, 179, 181, 183, 185, 186, 187
- against a schema 155
 - associate a schema to a document 141, 142, 144
 - add schema association in XML instance 142
 - learning a document structure 144
 - setting a default schema 141
 - supported schema types 141
- checking XML well-formedness 154
- code templates 152
- content completion 152
- converting between schema languages 181
- Editing XML Documents (*continued*)
 - document navigation 59, 67, 163, 164, 166
 - bookmarks 59, 163
 - folding 164
 - navigation buttons 166
 - outline view 67
 - editor specific actions 131
 - smart editing 131
 - grouping documents in XML projects 59, 113, 175
 - large documents 175
 - new project 59, 113
 - project view 59, 113
- image preview 186
- including document parts with XInclude 176
- locking and unlocking XML markup 187
- making a persistent copy of results 186
- markup transparency 187
- Resource Hierarchy/Dependencies view 179
 - Sharing projects 120
 - team collaboration - Subversion 120
- status information 185
 - streamline with content completion 70, 73, 145, 149, 151
 - the Attributes view 70, 149
 - the Elements view 73, 151
 - the Entities view 73, 151
- Text mode contextual menu actions 125
- Text Mode specific actions 125
 - validation against a schema 77, 155, 156, 157, 159, 162, 163
 - automatic validation 157
 - custom validation 157
 - marking validation errors 77, 155
 - references to XML Schema specification 162
 - resolving references to remote schemas with an XML Catalog 163
 - validation actions 162
 - validation example 156
 - validation scenario 159
- working with XML Catalogs 177
- XML tree nodes 183
- Editing XML Documents in Text Mode 131
 - document navigation 131
 - fast navigation in Text mode 131
- Editing XML Schemas 243, 270, 273, 275, 278, 281, 282, 285, 289, 293, 294
- Component Dependencies view 273
- contextual editing 270
 - generate documentation for XML Schema 282, 285, 289
 - from command line 289
 - output formats 285
 - Custom format 285
 - DocBook format 285
 - HTML format 285
 - PDF format 285
- Resource Hierarchy/Dependencies view 275
 - schema instance generator 278, 281
 - running from command line 281
- schema regular expressions builder 293
- searching and refactoring actions 270
- XML Schema 1.1 294
- Editing XProc Scripts 348
- Editing XQuery Documents 296, 298, 299
- folding 298

- Editing XQuery Documents (*continued*)
 - generate HTML documentation 299
- Editing XSL Stylesheets 229, 230, 233
- Component Dependencies view 229
- quick assist support 230
- XSpec 233
- Editing XSLT Schemas 206
- contextual editing 206
- Editing XSLT Stylesheets 204, 205, 206, 207, 208, 211, 213, 216, 217, 219, 222, 223, 224, 226
 - content completion 207, 208
 - in XPath expressions 208
- find XSLT references and declarations 223
- generate documentation for XSLT stylesheets 217
 - generate documentation for XSLT Stylesheets 219, 222
 - as HTML 219
 - from command line 222
 - in custom format 222
- Outline view 213
- refactoring actions 224
- Resource Hierarchy/Dependencies view 226
 - validation 205, 206
 - custom validation 206
- XSLT Input view 211
- XSLT stylesheet documentation 216
- Edit Large Documents 371, 372
- larger than 300 MB 372
- smaller than 300 megabytes 372
- Edit Menu 59, 80, 90, 163, 166, 167, 368, 371, 506
- Bookmarks 59, 163
- Breakpoints 506
- Change Text Orientation 80
- Check Spelling 368
- Check Spelling in files 371
- Copy 167
- Cut 167
- Insert from Character Map 90
- Paste 167
- Redo 166
- Select All 167
- Undo 166
- editor highlights 187
 - Accessibility 187
- Edit Validation Scenario 159
- Edit validation scenario XSLT stylesheets 205
- Embedded Schematron Rules 351
- Relax NG 351
- XML Schema 351
- EPUB Document Type 400
- Expanding Unicode support 92
- fallback font support 92
- Export color themes 734
- share color themes 734
- Extend Oxygen with plugins 592
- implement plugin 592
- Extend Oxygen with Plugins 592, 593, 596, 597, 598, 599, 600, 601, 604
 - implement plugin 593, 596, 597, 598, 599, 600, 601, 604
 - CMS integration plugin 601
 - components validation plugin 596
 - custom protocol plugin 597, 599, 600
 - document plugin 601

- Extend Oxygen with Plugins (*continued*)
 - implement plugin (*continued*)
 - general plugin 600
 - how to install a plugin 593
 - how to write a custom protocol plugin 604
 - resource locking custom protocol plugin 598
 - selection plugin 601

F

- Facebook widget 457
- File Menu 93, 96, 97, 98, 110, 167, 570, 571, 573, 576
- Close 110
- Close All 110
- Close Other Files 110
- Import Database Data 573
- Import HTML File 576
- Import MS Excel File 571
- Import Text File 570
- New 93
- Open 96
- Open URL 96
- Print 167
- Print Preview 167
- Reopen 96
- Save 98
- Save All 98
- Save as 98
- Save to URL 98
- View in Browser System Application 97
- Find/Replace 168, 170, 171
- Find All Elements/Attributes dialog box 170
- keyboard shortcuts 171
- Quick Find toolbar 171
- Find Menu 106, 131, 166, 168, 170, 171, 172
- Back 166
- Find/Replace 168
- Find/Replace in Files 172
- Find All Elements 170
- Forward 166
- Go to 131
- Last Modification 166
- Open/Find Resource 106
- Quick Find 171
- Flagging content 473
- Floating license key replacement 42, 44
- Format and indent 133
- Format and Indent 755

G

- Generate Documentation for an XML Schema 288
- customizing the PDF output 288
- Generating Documentation for WSDL Documents 314
- generating WSDL documentation in HTML format 314
- Getting Started 51, 52, 53, 54, 55, 708, 812
- dockable views and editors 812
 - perspectives 51, 52, 53, 54, 55, 708
 - database 55
 - editor 52
 - tree editor 708
 - XQuery debugger 54

Getting Started (*continued*)
 perspectives (*continued*)
 XSLT debugger 53
 Google Analytics integration 460
 Google Plus widget 458
 Google Search Integration 459
 grid editor 80
 navigation 80
 collapse all 80
 collapse children 80
 collapse others 80
 expand all 80
 expand children 80
 Grid Editor 78, 79, 80, 138, 139
 add nodes 139
 clear column content 139
 copy/paste 139
 drag and drop 139
 duplicate nodes 139
 inserting table column 139
 insert table row 138
 layouts (grid and tree) 79
 navigation 80
 refresh layout 139
 sort table column 138
 start and stop editing a cell value 139
 Grid Mode Editor 78

H

Help menu 23
 Accessibility 23
 Check for a New Version 23
 Check for updates 23
 install add-ons 23
 online help 23
 Register 23
 Report problem 23
 Support center 23
 Tip of the day 23
 Highlight Component Occurrences 356
 HTTP Authentication Schemes 104
 NTLM 104

I

Import color themes 734
 copy color themes 734
 Import from Excel 573
 2007 573
 2010 573
 2013 573
 Importing data 569
 Importing Data 570, 573, 576
 from a database 573
 table content as XML document 573
 from HTML files 576
 from text files 570
 Importing data from Excel 571
 Installation 27, 28, 29, 30, 31, 32, 33, 34
 all platforms version 28, 29, 31, 32, 34
 Linux 30, 34

Installation (*continued*)
 multiple instances (Unix / Linux server) 34
 OS X installation 29
 unattended (Windows and Linux only) 27, 31
 Windows installation 27, 32
 Windows terminal server 33
 installing WebHelp with Feedback 450
 integrate WebHelp plugin with DITA 461
 integrate WebHelp plugin with DocBook 465
 Integrating Social Media in WebHelp 457
 Integrating the Ant tool 728
 Integrating the WebHelp plugin with DITA OT 461

J

JATS NISO Journal Article Tag Suite Document Type 400
 Java system properties 820
 custom system properties 820

K

Kerberos authentication 104

L

License 37, 38, 39, 40, 43, 45, 46
 floating (concurrent) license 38
 floating license server 43
 floating license servlet 40
 license server installed on OS X Linux Unix 45
 multiple named-user licenses 39
 named-user license 37
 register a license key 37
 release floating license 39
 releasing a license key 46
 transferring a license key 46
 unregistering a license key 46
 localize WebHelp with Feedback system emails 467
 Localizing WebHelp Output 460

M

Manage IDs 132, 183
 highlight ID occurrences in Text mode 132
 search and refactor actions of ID IDREFS 183
 Master Files 122
 Model view 72, 148
 streamline with content completion 72, 148
 the Model panel 72, 148
 Moving Renaming Schematron resources 355

N

Native XML Databases 537
 resource management 537
 Table Explorer view 537
 Native XML Databases (NXD) 533, 541, 542, 543, 544, 545, 546
 database connections configuration 542, 543, 545
 Berkeley DB XML 542
 Documentum xDb (X-Hive/DB) 545
 eXist 543

Native XML Databases (NXD) (*continued*)
 data sources configuration 541, 542, 543, 544, 545
 Berkeley DB XML 542
 Documentum xDb (X-Hive/DB) 545
 eXist 543
 MarkLogic 544
 resource management 533, 546
 Data Source Explorer view 533, 546

O

Options Menu 732, 802, 811, 815
 Export Global Options 811
 Export Global Transformation Scenarios 815
 Export Global Validation Scenarios 815
 Import Global Options 811
 Import Global Transformation Scenarios 815
 Import Global Validation Scenarios 815
 Menu Shortcut Keys 802
 Preferences 732
 Reset Global Options 811
 Options priority 809
 OutOfMemory 782, 828, 829
 Out Of Memory 725, 782, 828, 829
 large documents error 829
 Large File Viewer 725
 opening XML documents closed a long time ago 829
 OutOfMemoryError 782, 828, 829

P

Performance Problems 828
 external processes 828
 large documents 828
 Predefined XML refactoring operations 192
 Preferences 732
 Pretty print 133
 Profiling 512
 XSLT stylesheets and XQuery documents 512
 Profiling XSLT Stylesheets and XQuery Documents 512, 513
 profiling information 512, 513
 Hotspots view 513
 Invocation tree view 512
 XSLT/XQuery profiler 513
 Project Menu 65, 119
 Change Search and Refactor operations scope 65, 119
 Enable Master Files Support 65, 119
 Filters 65, 119
 New Project 65, 119
 Open Project 65, 119
 Reopen Project 65, 119
 Save Project As 65, 119
 Show Project View 65, 119
 Validate all project files 65, 119

Q

Querying Documents 296, 476, 477, 481, 482, 483, 485
 running XPath and XQuery expressions 477
 XPath/XQuery Builder view 477
 running XPath expressions 476
 XPath toolbar 476

Querying Documents (*continued*)
 XQuery 296, 481, 482, 483, 485
 Input view 483
 Outline view 296, 482
 syntax highlight and content completion 481
 transforming XML documents; advanced Saxon B/SA options 485
 validation 485
 Quick Assist Support 132

R

Refactoring 132
 Quick Assist 132
 Refactoring XML Documents 190
 XML Refactoring Tool 190
 register license for WebHelp plugin 462
 Relational Databases 522, 523, 524, 525, 526, 527, 528, 529, 530, 531, 532, 533, 537, 539, 541, 546
 connections configuration 522, 523, 525, 527, 528, 530, 532
 generic JDBC 527
 IBM DB2 connection 523
 JDBC-ODBC connection 532
 Microsoft SQL Server 525
 MySQL 528
 Oracle 11g 530
 PostgreSQL 8.3 532
 data sources configuration 522, 523, 524, 526, 527, 529, 531
 generic JDBC data source 526
 IBM DB2 523
 Microsoft SQL Server 524
 MySQL 527
 Oracle 11g 529
 PostgreSQL 8.3 531
 resource management 533, 537, 546
 Data Source Explorer view 533, 546
 Table Explorer view 537
 SQL execution support 539, 541
 drag and drop from the Data Source Explorer 539
 executing SQL statements 541
 SQL validation 541
 Relax NG Schema Editor 323
 contextual editing 323
 Resolve schema through xml catalog mappings 179

S

Schematron Quick Fixes 189
 SharePoint Browser 586
 SharePoint Connection 585, 588, 589
 actions at connection level 588
 actions at file level 589
 actions at folder level 588
 configuration 585
 Sharing preferences 810
 global options 810
 project options 810
 Sharing Preferences 120
 project options file 120
 Sharing Transformation Scenarios 120
 Sharing Validation Scenarios 120
 Social media 457

- Social Media 457, 458, 460
- Social plugin 457
- Spell Checking 370
- automatic spell check 370
- SQF 189
- Startup parameter 823, 824
- application launchers parameters 823
- command line scripts parameters 824
- Startup parameters 823
- Storing preferences 810
- global options 810
- project options 810
- Supported document types 376
- frameworks 376
- SVN Branches/Tags 646, 648, 650, 651, 652, 654, 658, 659
- create a branch/tag 646
 - merging 648, 650, 651, 652, 654
 - merge changes 650
 - merge two different trees 654
 - reintegrate a branch 652
 - reverse merge 650
 - synchronize branch 651
- relocate a working copy 659
- switch the repository location 658
- SVN Client 612, 620, 621, 622, 624, 625, 628, 629, 634, 644, 645, 646, 660, 671, 672, 673, 674, 675, 684, 689, 690, 691, 692, 694, 697, 698, 699, 700, 701, 704
- Annotations view 694
 - Compare view 697, 698, 699
 - Compare images view 699
 - toolbar 698
- Console view 700
 - define a repository location 622
 - add/edit/remove repository locations 622
 - authentication 622
- define a working copy 625
- Help view 700
 - History view 689, 690, 691
 - history filter dialog box 690
 - history filter field 691
- image preview 699
 - main window 612, 620, 621
 - main menu 612
 - status bar 621
 - toolbar 620
 - views 612
 - obtain information regarding a resource 644, 645
 - request history 645
 - request status information 644
- Preferences 704
 - Properties view 699, 700
 - toolbar and contextual menu 700
 - Repositories view 674, 675
 - contextual menu actions 675
 - toolbar 675
 - Resource History view 692
 - contextual menu on double selection 692
 - Directory Change Set view 692
- Revision Graph 701
- share a project 624
- sparse checkouts 673

- SVN Client (*continued*)
 - SVN branches/tags 646, 660
 - patch 660
 - SVN properties 645, 700
 - Add / Edit / Remove 700
- SVN working copy resources 629
- synchronize with the SVN repository 634
- use an existing working copy 628
 - Working Copy view 684
 - contextual menu actions 684
 - working with repositories 671, 672
 - copy/move/delete resources 672
 - export resources 671
- SVN working copy resources 633
 - lock / unlock resources 633
 - locked items 633
- SVN Working Copy Resources 629, 631, 632, 633, 634
- add resources to version control 629
- copy resources 632
- delete resources 631
- edit files 629
- ignore resources 631
 - lock/unlock resources 632, 633, 634
 - locking a file 633
 - scanning for locks 633
 - unlocking a file 634
- move resources 632
- rename resources 632
- Synchronize with the SVN Repository 634, 636, 637, 638, 639, 640, 641, 644
- commit changes 641
- integration with Bug Tracking tools 644
 - resolve conflicts 636, 637, 638, 639, 640
 - content conflicts vs property conflicts 636
 - drop incoming modifications 640
 - edit real content conflicts 637
 - merge conflicted resources 639
 - real conflicts vs mergeable conflicts 636
 - revert changes 638
 - tree conflicts 640
- update the working copy 641
- view differences 634
- Synchronize With The SVN Repository 634
- syntax highlight depending on namespace prefix 77

T

- TEI ODD document type 398
- association rules 398
 - Author extensions 398
 - catalogs 398
- schema 398
- TEI ODD Document Type 398
 - Author extensions 398
 - templates 398
 - transformation scenarios 398
- TEI P4 document type 398, 399
- association rules 398
 - Author extensions 399
 - catalogs 399
- schema 398

- TEI P4 Document Type 398, 399
 - Author extensions 399
 - templates 399
 - transformation scenarios 399
- TEI P5 document type 399
- association rules 399
 - Author extensions 399
 - catalogs 399
- schema 399
- TEI P5 Document Type 399, 400
 - Author extensions 399, 400
 - templates 400
 - transformation scenarios 399
- Text Editing Mode 58, 104, 133, 138, 167
- compare file 133
- insert file at cursor position 133
- Manage highlighted content 138
- open file at cursor position 133
- print a file 167
- shortcut actions 133
- switch between opened tabs 104
- Text mode editor 58
- Text Mode Editor 58
 - Accessibility 58
 - breadcrumb 58
 - navigation 58
- Tools 611
- Tools Menu 181, 190, 278, 282, 290, 291, 293, 316, 342, 366, 612, 708, 709, 712, 721, 722, 724, 725, 726, 727, 728
- Canonicalize 721
- Compare Directories 709
- Compare Files 712
- Convert DB Structure to XML Schema 290
- External Tools 728
- Flatten Schema 291
- Generate/Convert Schema 181
 - Generate Documentation 282
 - XML Schema Documentation 282
- Generate Sample XML Files 278
- Hex Viewer 726
- Large File Viewer 725
- Sign 722
- SVG Viewer 366, 727
- SVN Client 612
- Tree Editor 708
- Verify Signature 724
- WSDL SOAP Analyzer 316
- XML Refactoring 190
- XML Schema Regular Expression Builder 293
- XML to JSON 342
- Transformation Scenario 404, 405, 406, 407, 408, 410, 433, 434
 - built-in transformation scenarios 434
 - new transformation scenario 404, 405, 406, 407, 408, 410, 433
 - additional XSLT stylesheets 408
 - configure transformation scenario 404
 - create a transformation scenario 433
 - XML transformation with XSLT 405
 - XQuery parameters 406
 - XSLT/XQuery extensions 407, 410
 - XSLT parameters 406
 - sharing transformation scenarios 434

- Transforming Documents 403, 404, 434, 437, 439, 440, 443
 - custom XSLT processors 439
 - output formats 443
 - supported XSLT processors 437
 - transformation scenario 404
- Transformation Scenarios view 434
- XSL-FO processors 440
- XSLT processors extensions paths 439
- Tweet Button 458
- Twitter Widget 458

U

- Unicode 755
- Uninstalling the application 48
- Upgrade 46
 - check for new version 46
 - upgrade WebHelp plugin for DITA 462
 - upgrading WebHelp plugin for DocBook 466

V

- Validating Schematron Files 350
- Validating XML Documents 154
- Validation Scenario 162
- sharing validation scenarios 162

W

- WebDAV Connection 564, 565
 - actions at connection level 564
 - actions at file level 565
 - actions at folder level 565
- configuration 564
- WebHelp 461
 - command line 461
 - external process 461
 - outside oxygen 461
- WebHelp Administrative page 452
- Admin Panel 452
- WebHelp GET parameters 472
- WebHelp Internationalization 460, 461
 - DITA WebHelp localization 460
 - WebHelp i18n 460
 - DocBook WebHelp localization 461
 - WebHelp i18n 461
- WebHelp Output 455
- WebHelp Skin Builder 455
- WebHelp plugin to run external DITA transformations 462
- WebHelp System 444
- WebHelp with Feedback 452
 - comment management 452
 - manage comments 452
- WebHelp with Feedback System 447
- whitespace 755
- Whitespace handling 133
- Window Menu 51, 76, 812
- Export Layout 812
- Hide current view 812
- Load Layout 812
- Maximize/Restore Editor Area 812
- Next editor 812

- Window Menu (*continued*)
- Open Perspective 51
- Previous editor 812
- Reset Layout 812
 - Results 76
 - Close 76
 - Close All Tabs 76
 - Close Other Tabs 76
 - Print Results 76
 - Save Results 76
- Show View 812
- Split Editor Horizontally 812
- Split Editor Vertically 812
- Stack Editors 812
- Synchronous Scrolling 812
- Tile Editors Horizontally 812
- Tile Editors Vertically 812
- Unsplit Editor 812
- Workspace Access 594
- Workspace Access JavaScript 595

X

- XHTML document type 397
 - association rules 397
 - Author extensions 397
 - catalogs 397
 - schema 397
- XHTML Document Type 397
 - Author extensions 397
 - templates 397
 - transformation scenarios 397
- XML Outline View 67, 68, 69, 70, 165, 166
 - document structure change 68, 69, 165
 - contextual menu 69
- document tag selection 70, 166
- drag and drop actions 68, 165
- modification follow-up 68, 165
- outline filters 69
- XML document overview 68, 165
- XML Quick Fixes 188
- Accessibility 188
- XML Schema 83, 271
- Outline view 83, 271
- XML Schema Diagram Editor 81, 82, 85, 87, 88, 243, 250, 253, 254, 255, 256, 258, 259, 260, 261, 262, 263, 264, 265, 266, 267, 268
 - Attributes view 85
 - editing actions 243
 - edit schema namespaces 268
 - Facets view 87
 - group schema components 266, 267
 - attributes 266
 - constraints 266
 - substitutions 267
 - navigation 82
 - schema components 250, 253, 254, 255, 256, 258, 259, 260, 261, 262, 263, 264, 265
 - xs:alternative 258

- XML Schema Diagram Editor (*continued*)
 - schema components (*continued*)
 - xs:any 261
 - xs:anyAttribute 262
 - xs:assert 265
 - xs:attribute 253
 - xs:attributeGroup 254
 - xs:complexType 255
 - xs:element 250
 - xs:field 264
 - xs:group 259
 - xs:import 259
 - xs:include 259
 - xs:key 263
 - xs:keyRef 264
 - xs:notation 260
 - xs:openContent 265
 - xs:override 260
 - xs:redefine 260
 - xs:schema 250
 - xs:selector 264
 - xs:sequence, xs:choice, xs:all 261
 - xs:simpleType 256
 - xs:unique 263
 - the Palette view 88
 - validation 267
- XML Schema Text Editor 268, 269, 291
 - content completion 268
 - flatten an XML Schema 291
 - references to XML Schema specification 269
- XML serialization 133
- XProc Transformation 425
- XProc transformation outputs tab 425
- XQJ Connection 486
- XQJ configuration 486
- XQJ Support 486
- XQJ processor configuration 486
- XSLT/XQuery Debugger 496, 497, 498, 499, 500, 501, 502, 503, 505, 506
 - debug steps 505
 - determining what XSLT/XQuery expression generated particular output 506
 - using breakpoints 506
 - inserting breakpoints 506
 - removing breakpoints 506
 - viewing processing information 496, 497, 498, 499, 500, 501, 502, 503
 - breakpoints view 497
 - context node view 496
 - messages view 498
 - node set view 503
 - output mapping stack view 500
 - stack view 499
 - templates view 502
 - trace history view 501
 - variables view 503
 - XPath watch view 497