



Oxygen XML Developer 20.0

User Guide

Contents

Chapter 1: Introduction.....	1
Chapter 2: Getting Started.....	2
What is Oxygen XML Developer.....	2
Getting Familiar with the Interface.....	3
Supported Document Types.....	4
Resources to Help You Get Started Using Oxygen XML Developer.....	4
Your First Document or Project.....	6
Creating a New Project.....	6
Getting Help.....	7
Help Menu.....	7
Frequently Used Shortcut Keys.....	10
Accessibility Support in Oxygen.....	13
Chapter 3: Installation.....	15
Installing Oxygen XML Developer on Windows.....	16
Installing Oxygen XML Developer on Mac OS X.....	18
Installing Oxygen XML Developer on Linux.....	19
Installing Oxygen XML Developer on Windows Server.....	22
Installing Oxygen XML Developer on a Linux / UNIX Server.....	23
Installing Oxygen XML Developer using the Java Web Start (JWS) Installer.....	24
Site-Wide Deployment.....	26
Licensing.....	26
Choosing a License Type.....	26
Obtaining a License Key.....	27
Register a Named-User or Subscription License.....	27
Floating Licenses.....	28
Transferring a License Key.....	30
Floating License Servers.....	30
Setting up an HTTP Floating License Server.....	31
Setting up a TCP Floating License Server Using a 32-bit Windows Installer.....	36
Setting up a TCP Floating License Server Using All-Platforms Distribution.....	37
Common Problems: Floating License Server Errors.....	39
Upgrading.....	40
Upgrading Oxygen XML Developer on Windows/Linux.....	40
Upgrading Oxygen XML Developer on OS X.....	41
Installing and Updating Add-ons.....	41
Uninstalling.....	42
Chapter 4: Configuration.....	44
Preferences.....	44
Global Preferences.....	46
Appearance Preferences.....	47
Application Layout Preferences.....	50
Add-ons Preferences.....	51
Document Type Association Preferences.....	51
Encoding Preferences.....	69
Editor Preferences.....	70
CSS Validator Preferences.....	95

XML Preferences.....	95
DITA Preferences.....	118
Data Sources Preferences.....	120
SVN Preferences.....	124
Diff Preferences.....	127
Archive Preferences.....	130
Plugins Preferences.....	130
External Tools Preferences.....	131
Menu Shortcut Keys Preferences.....	132
File Types Preferences.....	134
Open/Find Resource Preferences Page.....	135
Custom Editor Variables Preferences.....	136
Network Connection Settings Preferences.....	137
XML Structure Outline Preferences.....	140
Views Preferences.....	140
Messages Preferences.....	140
Configuring Options.....	141
Customizing Default Options.....	142
Storing Global and Project Level Options.....	143
Sharing Application Settings.....	144
Importing/Exporting/Resetting Global Options.....	145
Associating a File Extension with Oxygen XML Developer.....	145
Configuring the Layout of the Views and Editors.....	146
Configuring Toolbars.....	149
Import/Export Transformation or Validation Scenarios.....	151
Editor Variables.....	151
Custom Editor Variables.....	156
Custom System Properties.....	156
Localizing the User Interface.....	159
Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer.....	160
Setting Parameters for the Application Launchers.....	160
Setting Parameters in the Command Line Scripts.....	161
Creating Custom Startup Parameters File.....	161
How to Increase the Amount of Available Memory.....	162
Chapter 5: Perspectives.....	163
Editor Perspective.....	163
XSLT Debugger Perspective.....	164
XQuery Debugger Perspective.....	165
Database Perspective.....	166
Chapter 6: Editing Modes.....	168
Text Editing Mode.....	168
Navigating the Document Content in Text Mode.....	168
Smart Editing in Text Mode.....	170
Shortcut Actions in Text Mode.....	171
Editing XML Markup in Text Mode.....	172
Folding XML Elements in Text Mode.....	176
Drag and Drop in Text Mode.....	177
Selecting Content in Text Mode.....	177
Content Completion Assistant in Text Mode.....	179
Text Mode Views.....	188
Syntax Highlighting in XML Documents.....	206
Syntax Highlight Depending on Namespace Prefix.....	207
Presenting Validation Errors in Text Mode.....	207
Special Character Support in Text Mode.....	209
Inserting or Opening a File at Cursor Location.....	209

Adjusting the Transparency of XML Markup.....	209
Locking and Unlocking XML Markup.....	210
Formatting and Indenting XML Documents.....	210
Managing Highlighted Content.....	214
Quick Assist Support for IDs and IDREFS.....	215
Highlight ID Occurrences in Text Mode.....	215
Contextual Menu Actions in Text Mode.....	216
Grid Editing Mode.....	224
Layouts: Grid and Tree.....	224
Grid Mode Navigation.....	225
Special Character Support in Grid Mode.....	226
Editing Actions in Grid Mode.....	227
Drag and Drop in the Grid Editing Mode.....	228
Copy and Paste in the Grid Editing Mode.....	229
Content Completion Assistant in Grid Mode.....	230
Exporting XML Content to Excel.....	230
Design Editing Mode (XML Schema Diagram Editor).....	231
Navigation in the XML Schema Design Mode.....	232
XML Schema Outline View.....	233
XML Schema Attributes View.....	235
XML Schema Facets View.....	237
XML Schema Palette View.....	238
Schema Editing Actions.....	238
Contextual Menu Actions in the Design Mode.....	239
XML Schema Components.....	245
Schema Validation.....	265
Edit Schema Namespaces.....	266

Chapter 7: Working with Documents.....267

Getting Familiar with the Interface.....	267
Configuring the Layout of the Views and Editors.....	268
Configuring Toolbars.....	272
Creating and Working with Documents.....	273
Creating New Documents and Templates.....	273
Opening Documents.....	280
Saving Documents.....	281
Opening and Saving Remote Documents.....	282
Switching and Moving Editor Tabs.....	288
Closing Documents.....	289
Contextual Menu of the Current Editor Tab.....	289
Viewing File Properties.....	290
Simple Text Editor.....	290
Using Projects to Group Documents.....	291
Creating a New Project.....	291
Project View.....	292
Sharing a Project - Team Collaboration.....	300
Master Files Support.....	302
Searching Documents.....	306
Open/Find Resource View.....	306
Open/Find Resource Dialog Box.....	308
Searching in Content.....	310
Searching in File Paths.....	312
Searching in Reviews.....	312
Technical Aspects.....	312
Finding and Replacing Text.....	312
Find/Replace Dialog Box.....	313
Find/Replace in Multiple Files.....	314
Find All Elements Dialog Box.....	317

Quick Find Toolbar.....	318
Keyboard Shortcuts for Finding the Next and Previous Match.....	318
Regular Expressions Syntax.....	319
Spell Checking.....	319
Spell Check Dictionaries and Term Lists.....	321
Learned Words.....	324
Ignored Words (Elements).....	325
Automatic Spell Check.....	325
Spell Check Multiple Files.....	325
Working with Special Characters.....	326
Inserting Special Characters.....	327
Unicode Fallback Font Support.....	328
Opening and Saving Documents with Unsupported Characters.....	329
Working with Unicode.....	329
Special Character Support in Text Mode.....	330
Special Character Support in Grid Mode.....	330
Loading Large Documents.....	331
File Sizes Smaller than 300 MB.....	331
File Sizes Greater than 300 MB.....	332
Documents with Long Lines.....	332
Handling Read-Only Files.....	333
Scratch Buffer.....	333
Compare Files or Directories.....	333
Compare Files.....	334
Compare Directories.....	347
Compare Directories Against a Base (3-Way).....	351
Viewing Status Information.....	356
Editor Highlights.....	356
Printing a Document.....	357

Chapter 8: Editing Specific Document Types..... 359

Editing XML Documents.....	359
Editing XML Documents in Text Mode.....	359
Editing XML Documents in Grid Mode.....	397
Validating XML Documents.....	401
XML Quick Fixes.....	418
Associating a Schema to XML Documents.....	420
Search and Refactoring Actions for IDs and IDREFS.....	428
Working with Modular XML Files in the Master Files Context.....	429
XML Resource Hierarchy/Dependencies View.....	430
Working with XML Catalogs.....	432
Combining XML Content Using DTD Entities and XInclude.....	434
Refactoring XML Documents.....	437
XML Digital Signatures.....	457
Editing XSLT Stylesheets.....	462
Editing XSLT Stylesheets in the Master Files Context.....	462
Validating XSLT Stylesheets.....	463
XSLT Quick Fix Support.....	464
Content Completion in XSLT Stylesheets.....	466
Syntax Highlighting in XSLT.....	471
XSLT Outline View.....	472
XSLT/XQuery Input View.....	475
XSLT Resource Hierarchy/Dependencies View.....	478
XSLT Component Dependencies View.....	480
Highlight Component Occurrences.....	482
Finding XSLT References and Declarations.....	482
XSLT Stylesheet Component Documentation Support.....	482
XSLT 3.0 Text Value Templates.....	483

XSLT Refactoring Actions.....	484
XSLT Quick Assist Support.....	487
XSLT Unit Test (XSpec).....	488
Generating Documentation for an XSLT Stylesheet.....	490
Compiling an XSL Stylesheet for Saxon.....	496
Editing Ant Build Files.....	497
Editing Ant Build Files in the Context of Master Files.....	498
Validating Ant Build Files.....	498
Transforming Ant Build Files.....	498
Ant Quick Fix Support.....	499
Content Completion in Ant Build Files.....	499
Syntax Highlighting in Ant Files.....	500
Ant Outline View.....	500
Ant Resource Hierarchy/Dependencies View.....	502
Ant Component Dependencies View.....	503
Highlight Component Occurrences.....	504
Find References and Declarations of Ant Components.....	504
Ant Refactoring Actions.....	505
Ant Quick Assist Support.....	506
Editing XML Schemas.....	506
Design Editing Mode (XML Schema Diagram Editor).....	507
Editing XML Schema in Text Editing Mode.....	536
Editing XML Schema in the Master Files Context.....	536
Validating XML Schema Documents.....	537
Quick Fixes for DTD, XSD, and Relax NG Errors.....	537
Content Completion in XML Schema.....	538
Syntax Highlighting in XML Schema.....	538
XML Schema Outline View.....	538
XML Schema Attributes View.....	540
XML Schema Palette View.....	542
XML Schema Facets View.....	542
XML Schema Resource Hierarchy / Dependencies View.....	544
XML Schema Component Dependencies View.....	546
Highlight Component Occurrences.....	548
Searching and Refactoring Actions in XML Schemas.....	548
XML Schema Quick Assist Support.....	549
Generating Sample XML Files.....	550
Generating Documentation for an XML Schema.....	555
Converting Schema to Another Schema Language.....	564
Converting Database to XML Schema.....	566
Flatten an XML Schema.....	566
XML Schema Regular Expressions Builder.....	568
XML Schema 1.1.....	570
Setting the XML Schema Version.....	571
Editing XQuery Documents.....	572
XQuery Validation.....	572
Content Completion in XQuery.....	573
Syntax Highlighting in XQuery.....	573
Formatting and Indenting XQuery Documents.....	574
Folding in XQuery Documents.....	574
XQuery Outline View.....	574
XQuery Builder View.....	576
XSLT/XQuery Input View.....	578
Generating HTML Documentation for an XQuery Document.....	580
Transforming XML Documents Using XQuery.....	581
Editing WSDL Documents.....	584
Editing WSDL Documents in the Master Files Context.....	585
Validating WSDL Documents.....	585

Content Completion Assistance in WSDL Documents.....	585
WSDL Syntax Highlighting.....	586
WSDL Outline View.....	587
WSDL Resource Hierarchy/Dependencies View in WSDL Documents.....	590
WSDL Component Dependencies View.....	592
Highlight Component Occurrences in WSDL Documents.....	593
Searching and Refactoring Operations in WSDL Documents.....	594
Quick Assist Support in WSDL Documents.....	596
Generating Documentation for WSDL Documents.....	597
WSDL SOAP Analyzer.....	601
Editing CSS Stylesheets.....	603
Validating CSS Stylesheets.....	604
Content Completion in CSS Stylesheets.....	604
Syntax Highlighting in CSS Files.....	605
CSS Outline View.....	605
Folding in CSS Stylesheets.....	606
Formatting and Indenting CSS Stylesheets (Pretty Print).....	606
Minifying CSS Stylesheets.....	606
Editing LESS Stylesheets.....	606
Validating LESS Stylesheets.....	607
Content Completion in LESS Stylesheets.....	607
Syntax Highlighting in LESS Files.....	607
Compiling LESS Stylesheets to CSS.....	608
Editing Relax NG Schemas.....	608
Editing Relax NG Schema in the Master Files Context.....	608
Relax NG Schema Diagram Editor.....	609
Validating Relax NG Schema Documents.....	612
Content Completion in Relax NG Schemas.....	612
Syntax Highlighting in Relax NG Schemas.....	613
Quick Fixes for DTD, XSD, and Relax NG Errors.....	613
Relax NG Outline View.....	614
RNG Resource Hierarchy/Dependencies View.....	616
Relax NG Schema Component Dependencies View.....	618
Searching and Refactoring Actions in RNG Schemas.....	619
RNG Quick Assist Support.....	620
Configuring a Custom Datatype Library for a RELAX NG Schema.....	621
Editing NVDL Schemas.....	622
NVDL Schema Diagram.....	622
Validating NVDL Schema Documents.....	624
Content Completion in NVDL Schemas.....	624
Syntax Highlighting in NVDL Schemas.....	625
NVDL Outline View.....	625
NVDL Schema Component Dependencies View.....	625
Searching and Refactoring Actions in NVDL Schemas.....	626
Editing JSON Documents.....	627
Editing JSON Documents in Text Mode.....	628
Editing JSON Documents in Grid Mode.....	629
Validating JSON Documents.....	630
Syntax Highlighting in JSON Documents.....	630
Folding in JSON.....	630
JSON Outline View.....	630
JSON to XML Converter.....	631
XML to JSON Converter.....	632
Editing StratML Documents.....	633
Editing XLIFF Documents.....	633
Editing JavaScript Documents.....	634
JavaScript Editing Actions.....	634
Validating JavaScript Files.....	636

Content Completion in JavaScript Documents.....	636
Syntax Highlighting in JavaScript Documents.....	637
JavaScript Outline View.....	637
Editing XProc Scripts.....	638
Editing Schematron Schemas.....	639
Editing Schematron Schema in the Master Files Context.....	640
Validating Schematron Documents.....	640
Presenting Schematron Validation Issues.....	641
Content Completion in Schematron Documents.....	641
Syntax Highlighting in Schematron.....	642
XML Schema or RELAX NG with Embedded Schematron Rules.....	642
Schematron Outline View.....	643
Schematron Resource Hierarchy/Dependencies View.....	645
Highlight Component Occurrences in Schematron Documents.....	647
Searching and Refactoring Operations in Schematron Documents.....	647
Quick Assist Support in Schematron Documents.....	649
Schematron Unit Test (XSpec).....	649
Editing Schematron Quick Fixes.....	650
Schematron Quick Fixes (SQF).....	651
Defining Schematron Quick Fixes.....	651
Validating Schematron Quick Fixes.....	657
Content Completion in SQF.....	657
Highlight Quick Fix Occurrences in SQF.....	658
Searching and Refactoring Operations in SQF.....	658
Embed Schematron Quick Fixes in Relax NG or XML Schema.....	659
Integrating SQF in a Framework.....	660
Editing SVG Files.....	660
Standalone SVG Viewer.....	661
Integrated SVG Viewer in the Results Panel.....	662
Editing XHTML Documents.....	663
Editing Markdown Documents.....	663
Markdown Editor.....	664
Creating New Markdown Documents.....	665
Actions Available in the Markdown Editor.....	665
Syntax Highlighting in the Markdown Editor.....	670
Automatic Validation in Markdown Documents.....	670
Working with Markdown Documents in DITA.....	670
Markdown Editor Syntax Rules and Specifications.....	671
Chapter 9: Built-in XML Frameworks.....	680
Predefined Document Types (Frameworks).....	680
DocBook 4 Document Type (Framework).....	681
DocBook 5 Document Type (Framework).....	684
DocBook 5.1 Assembly.....	687
DocBook 5.1 Topic.....	688
DocBook Targetset Document Type (Framework).....	689
DITA Topics Document Type (Framework).....	689
DITA Map Document Type (Framework).....	690
XHTML Document Type (Framework).....	691
TEI P5 Document Type (Framework).....	692
TEI ODD Document Type (Framework).....	693
jTEI Document Type (Framework).....	693
JATS Document Type (Framework).....	694
EPUB Document Type (Framework).....	695
Other Supported Document Types.....	696
Chapter 10: Publishing.....	698

Transformation Scenarios.....	698
Built-in Transformation Scenarios.....	699
Creating New Transformation Scenarios.....	749
Editing a Transformation Scenario.....	793
Duplicating a Transformation Scenario.....	794
Applying Associated Transformation Scenarios.....	795
Configure Transformation Scenario(s) Dialog Box.....	795
Batch Transformations.....	798
Sharing Transformation Scenarios.....	799
Transformation Scenarios View.....	799
WebHelp Output.....	802
WebHelp Classic Output.....	803
WebHelp Responsive Output.....	854
PDF Output.....	930
PDF Output Customization.....	930
Generating PDF Output Using an XSL-FO Processor.....	936
Generating PDF Output Using a Calabash XProc Processor.....	941
Debugging PDF Transformations.....	941
Chapter 11: Working with XPath Expressions.....	942
XPath Toolbar.....	942
XPath Builder View.....	944
XPath Expression Results View.....	946
XPath and XML Catalogs.....	947
XPath Prefix Mapping.....	947
Chapter 12: Working with Archives.....	948
Browsing Archives.....	948
Working with Archive Files.....	950
Creating an Archive.....	952
Editing and Saving Files Inside an Archive.....	952
Migrating Archives to DITA or TEI.....	952
Chapter 13: Databases and SharePoint.....	953
Working with Databases.....	953
Data Source Explorer View.....	953
Table Explorer View.....	954
Database Connection Support.....	957
WebDAV Connections.....	997
SQL Execution Support.....	999
XQuery and Databases.....	1001
Integration with Microsoft SharePoint.....	1006
How to Configure a SharePoint Connection.....	1007
SharePoint Browser View.....	1007
SharePoint Contextual Menu Actions.....	1010
Chapter 14: Importing Data.....	1012
Import from Text Files.....	1012
Import from MS Excel Files.....	1014
Import Data from MS Excel 2007 or Newer.....	1016
Import Database Data as an XML Document.....	1016
Import from HTML Files.....	1018
Import Content Dynamically.....	1019

Chapter 15: XSLT/XQuery Debugging.....	1022
Debugger Layout.....	1023
Control Toolbar.....	1024
Debugging Information Views.....	1026
Multiple Output Documents in XSLT 2.0 and XSLT 3.0.....	1035
Steps in a Typical Debugging Process.....	1036
Identify the XSLT / XQuery Expression that Generated Particular Output.....	1036
Using Breakpoints.....	1038
Performance Profiling of XSLT Stylesheets and XQuery Documents.....	1039
Invocation Tree View.....	1040
Hotspots View.....	1041
Debugging XSLT that Call Java Extensions.....	1042
Debugging Java Extensions.....	1043
Supported Processors for XSLT / XQuery Debugging.....	1043
 Chapter 16: Using the Oxygen XML SDK.....	 1044
Extending Oxygen XML Developer with Plugins.....	1044
General Configuration of an Oxygen XML Developer Plugin.....	1044
Installing an Oxygen XML Developer Plugin.....	1045
Types of Plugin Extensions Available with the SDK.....	1046
Oxygen XML Developer Plugin How to.....	1056
Creating and Running Automated Tests.....	1060
Debugging a Plugin Using the Eclipse Workbench.....	1062
Debugging an Oxygen SDK Extension Using the Eclipse Workbench.....	1062
Disabling a Plugin.....	1063
API Frequently Asked Questions (API FAQ).....	1063
Add Custom Actions to the Contextual Menu?.....	1063
Auto-Generate an ID When a Document is Opened or Created.....	1063
Customize the Default Icons for Toolbars/Menus.....	1064
Customize the Outline View in Text Mode?.....	1064
Dynamically Open File in Oxygen XML Developer Distributed via JavaWebStart.....	1067
Run XSLT or XQuery Transformations.....	1068
Save a New Document with a Predefined File Name Pattern.....	1068
 Chapter 17: Add-ons.....	 1070
Batch Converter Add-on.....	1070
DITA Prolog Updater Add-on.....	1071
Excel XLSX Libraries Add-on.....	1071
ICU4J Library Add-on.....	1072
Saxon XSLT and XQuery Transformer Add-on.....	1072
Translation Package Builder Add-on.....	1072
XSpec Helper View Add-on.....	1073
 Chapter 18: Tools.....	 1074
XML Refactoring.....	1074
Predefined Refactoring Operations.....	1077
Custom Refactoring Operations.....	1081
Storing and Sharing Refactoring Operations.....	1090
Localizing XML Refactoring Operations.....	1090
Generate Sample XML Files.....	1091
Schema Tab (Generate Sample XML Files Tool).....	1091
Options Tab (Generate Sample XML Files Tool).....	1093
Advanced Tab (Generate Sample XML Files Tool).....	1095
Running the Generate Sample XML Files Tool from the Command Line.....	1095

Generate/Convert Schema.....	1096
Convert DB Structure to XML Schema.....	1098
Flatten Schema.....	1098
JSON to XML.....	1100
XML to JSON.....	1101
Compile XSL Stylesheet for Saxon.....	1102
Format and Indent Files.....	1103
Generate Documentation.....	1104
XML Schema Documentation.....	1104
XSLT Stylesheet Documentation.....	1107
XQuery Documentation.....	1110
WSDL Documentation.....	1111
Canonicalize.....	1113
Sign.....	1114
Verify Signature.....	1116
WSDL SOAP Analyzer.....	1116
Testing Remote WSDL Files.....	1118
UDDI Registry Browser.....	1118
XML Schema Regular Expressions Builder.....	1119
Large File Viewer.....	1121
Hex Viewer.....	1123
SVG Viewer.....	1123
Tree Editor.....	1125
Compare Files.....	1125
Starting File Comparison Tool from a Command Line.....	1130
How to Integrate the File Comparison Tool with Git.....	1131
How to Integrate the File Comparison Tool with SourceTree.....	1132
Toolbar and Contextual Menu Actions of the Compare Files Tool.....	1133
Compare Files Tool Menus.....	1135
Compare Directories.....	1138
Toolbar and Contextual Menu Actions of the Compare Directories Tool.....	1140
Compare Directories Tool Menus.....	1141
Compare Images.....	1142
Compare Directories Against a Base (3-Way).....	1143
Syncro SVN Client.....	1147
Main Window.....	1148
Getting Started.....	1157
Syncro SVN Client Views.....	1207
Revision Graph of a SVN Resource.....	1233
Oxygen XML Developer SVN Preferences.....	1237
Entering Local Paths and URLs.....	1237
Technical Issues.....	1238
External Tools.....	1240

Chapter 19: Common Problems..... 1242

Performance Problems and Solutions.....	1242
Display Problems on Linux or Solaris.....	1242
Out of Memory on External Processes.....	1242
<i>Too many nested apply-templates calls</i> Error When Running a Transformation.....	1243
Performance Issues with Large Documents.....	1243
Performance Issues when Using Oxygen XML Developer with Remote Desktop.....	1243
Misc Problems and Solutions.....	1244
'Address Family Not Supported by Protocol Family; Connect' Error.....	1244
Alignment Issues of the Main Menu on Linux Systems Based on Gnome 3.x.....	1244
Archive Distribution Fails to Run on Mac OS 10.12 (Sierra).....	1245
Cannot Associate Oxygen XML Developer With a File Type on My Windows Computer.....	1245
Cannot Connect to SVN Repository from Repositories View.....	1245
Cannot Open XML Files in Internet Explorer.....	1246

Cannot Uninstall Oxygen XML Developer in Windows.....	1247
Compatibility Issue Between Java and Certain Graphics Card Drivers.....	1247
Crash at Startup on Windows with an Error About the nvogl32.dll File.....	1247
Damaged File Associations on OS X.....	1247
Details to Submit in a Request for Technical Support Using the Online Form.....	1248
DITA Map Transformation Fails (Cannot Connect to External Location).....	1249
DITA Map WebHelp Transformation Fails (Duplicate Topic References Found).....	1249
DITA PDF Transformation Fails.....	1249
DITA to CHM Transformation Fails - Cannot Open File.....	1251
DITA to CHM Transformation Fails - Compilation Failed.....	1251
Drag and Drop Without Initial Selection Does Not Work.....	1251
Gray Window on Linux With the Compiz / Beryl Window Manager.....	1251
Handshake Failure Error When Accessing an HTTPS (SSL) Resource.....	1252
Images Appear Stretched Out in the PDF Output.....	1252
Increasing the Memory for the Ant Process.....	1253
Keyboard Shortcuts Do Not Work.....	1253
Keyboard Language Resets to Default on Windows.....	1253
Machine Signature Mismatch Error.....	1254
MSXML 4.0 Transformation Issues.....	1254
Navigation to a Web Page is Canceled when Viewing CHM on a Network Drive.....	1255
Out Of Memory Error When Opening Large Documents.....	1255
Java Virtual Machine (JVM) Crash on Mac OS X.....	1255
Oxygen XML Developer Takes Several Minutes to Start.....	1255
High Resolution Scaling Issues.....	1256
Saxon 9.7 Transformer Issues.....	1256
Scroll Function of my Notebook Trackpad is Not Working.....	1256
Segmentation Fault Error on Mac OS X.....	1257
Setting a Specific JVM Version on Mac OS X.....	1257
Signature Verification Failed Error on a Resource from Documentum.....	1257
Special Characters are Replaced with a Square.....	1258
TocJS Transformation Does not Generate All Files for a Tree-Like TOC.....	1258
References Outside the Main DITA Map Folder.....	1258
Windows Service Reports Incorrect Function Error When Starting (TCP Server).....	1259
Windows Service Reports Process Terminated Unexpectedly Error (TCP Server).....	1259
Wrong Words are Highlighted when Searching in a User Manual.....	1259
XML Document Takes a Long Time to Open.....	1260
XSLT Debugger Is Very Slow.....	1260
 Chapter 20: Glossary.....	 1261
Index.....	1268
 Copyright.....	

Welcome to the User Manual of Oxygen XML Developer 20.0.

Oxygen XML Developer is a cross-platform application designed to accommodate all of your XML editing, authoring, developing, and publishing needs. It is the best XML editor available for document development using structured mark-up languages such as XML, XSD, Relax NG, XSL, DTD.

It offers developers a powerful **Integrated Development Environment** and the intuitive **Graphical User Interface** of Oxygen XML Developer is easy to use and provides robust functionality for content editing, project management, and validation of structured mark-up sources. Coupled with *XSLT* and *FOP* transformation technologies, Oxygen XML Developer offers support for generating output to multiple target formats, including: *PDF*, *PS*, *TXT*, *HTML*, *JavaHelp*, *WebHelp*, and *XML*.

This user guide is focused on describing features, functionality, the application interface, and to help you quickly get started. It also includes a vast amount of advanced technical information and instructional topics that are designed to teach you how to use Oxygen XML Developer to accomplish your tasks. It is assumed that you are familiar with the use of your operating system and the concepts related to XML technologies and structured mark-up.

Getting Started

Topics:

- [What is Oxygen XML Developer](#)
- [Getting Familiar with the Interface](#)
- [Supported Document Types](#)
- [Resources to Help You Get Started Using Oxygen XML Developer](#)
- [Your First Document or Project](#)
- [Getting Help](#)
- [Frequently Used Shortcut Keys](#)
- [Accessibility Support in Oxygen](#)

This section provides a variety of resources to help you get the most out of the application. Typically, the first step of getting started with Oxygen XML Developer would be to install the software. For detailed information about that process, see the [Installation chapter](#).

After installation, when you launch Oxygen XML Developer for the first time, you are greeted with a **Welcome** dialog box. It presents upcoming events, useful video demonstrations, helpful resources, the tip of the day, and also gives you easy access to recently used files and projects and to create new ones.

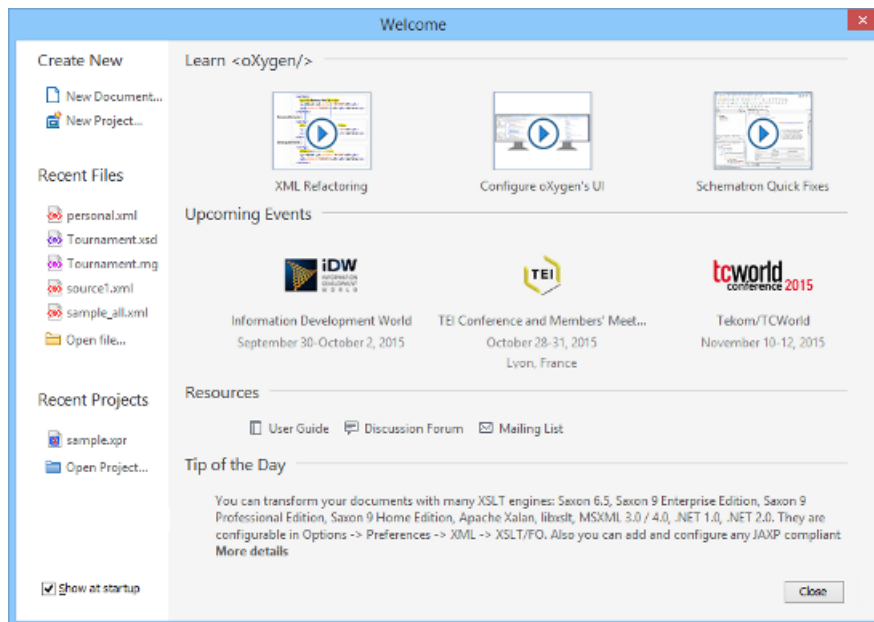


Figure 1: Welcome Dialog Box

If you do not want it to be displayed every time you launch Oxygen XML Developer, deselect the **Show at startup** option in the bottom-left corner of the dialog box. To display it any time, go to **Help > Welcome**.

What is Oxygen XML Developer

Oxygen XML Developer is the best XML editor available and is a complete XML development and authoring solution. It is designed to accommodate a large number of users, ranging from beginners to XML experts. It is the

only XML tool that supports all of the XML schema languages and provides a large variety of powerful tools for editing and publishing XML documents.

You can use Oxygen XML Developer to work with most XML-based standards and technologies. It is a cross-platform application available on all the major operating systems (Windows, Mac OS X, Linux, Solaris) and can be used either as a standalone application or as an Eclipse plugin.

For a list of many of the features and technologies that are included in Oxygen XML Developer, see the [Oxygen Website](#).

Getting Familiar with the Interface

Oxygen XML Developer includes several [perspectives](#) and [editing modes](#) to help you accomplish a wide range of tasks. Each *perspective* and editing mode also includes a large variety of helper view, menu actions, toolbars, and contextual menu functions.

There are various ways that you can [configure the layout of the views or editors](#), and you can [customize the toolbars](#).

Regardless of the [perspective](#) or [editing mode](#) that you are working with, the default layout consists of the following areas:

Menus

Menu driven access to all the features and functions available in Oxygen XML Developer. Most of the menus are common for all types of documents, but Oxygen XML Developer also includes some context-sensitive and *framework*-specific menus and actions that are only available for a specific context or type of document.

Toolbars

Easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. Some of the toolbars are common for all *perspectives*, editing modes, and types of documents, while others are specific to the particular *perspective* or mode. Some toolbars are also *framework*-specific, depending on the type of document that is being edited. All the [toolbars can be configured](#) to suit your specific needs.

Helper Views

Oxygen XML Developer includes a large variety of [dockable](#) views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. Many of the views also contain useful contextual menu actions, toolbar buttons, or menus. The most commonly used views for each *perspective* and editing mode are displayed by default and you can choose to display others to suit your specific needs. The [layout of the views can also be configured](#) according to your preferences.

Editor Pane

The main editing area in the center of the application. Each [editing mode](#) provides a main editor pane where you spend most of your time reading, editing, applying markup, and validating your documents. The editor pane in each [editing mode](#) also includes a variety of contextual menu actions and other features to help streamline your editing tasks. Each file that has been opened has a tab at the top of the editing pane and there are [several ways to switch between tabs or move them](#).

Perspectives

Oxygen XML Developer includes [several different perspectives](#) that you can use to work with your documents. The **Editor perspective** is the most commonly used *perspective* used for displaying and editing the content of your XML documents, and it is the default *perspective* when you start Oxygen XML Developer for the first time. Oxygen XML Developer also includes a **Database perspective** that allows you to manage databases and their connections and a few debugging *perspectives* that allow you to detect problems in XSLT or XQuery transformations.

Status Bar

The status bar at the bottom of the application contains some useful information when you are working with documents. It includes the following information, in the order it is displayed from left to right:

- The path of the current document.
- The [Unicode value](#) for the character directly to the right of the current cursor position.

- The status of the current document. The status of **Modified** is displayed for documents that have not yet been saved. Otherwise, this section is left blank.
- In **Text editing mode**, the current line and character position is displayed.
- If the **Check for notifications option** is selected, this section will show you when new messages have been received. The types of messages include the addition of new videos on the Oxygen XML Developer website, the announcement of upcoming webinars and conferences where the Oxygen XML Developer team will participate, and more.
- The memory consumption, including the memory used by the application and the maximum amount that is allocated to the application.
- If the **Show memory status option** is selected, a  **Free unused memory** icon is displayed in the bottom-right corner and you can use this icon to free up unused memory.

Supported Document Types

You can use the main editing pane in Oxygen XML Developer to edit a large variety of document types.

The supported document types include the following:

-  - XML documents
-  - XSLT stylesheets
-  - XML Schema
-  - DTD (Document Type Definition) schemas
-  - RELAX NG full syntax schemas
-  - RELAX NG compact syntax schemas
-  - NVDL (Namespace-based Validation Dispatching Language) schemas
-  - XSL:FO documents
-  - XQuery documents
-  - WSDL documents
-  - Schematron documents
-  - JavaScript documents
-  - Python documents
-  - CSS documents
-  - LESS documents
-  - XProc scripts
-  - SQL documents
-  - JSON documents
-  - Ant build scripts
-  - Markdown documents

Resources to Help You Get Started Using Oxygen XML Developer

Configuring Oxygen XML Developer

There are numerous ways that you can configure Oxygen XML Developer to accommodate your specific needs.

- See the [Configuring Oxygen section](#) for details on the various ways that you can configure the application and its features.

Video Tutorials

The Oxygen XML Developer website includes numerous video demonstrations and webinars that present many of the features that are available in Oxygen XML Developer and show you how to complete specific tasks or how to use the various features.

- Go to the [Oxygen XML Developer Videos Page](#) to see the list of video tutorials and webinars.

Oxygen XML Developer Documentation

The Oxygen XML Developer documentation includes a plethora of sections and topics to provide you with a variety of information, ranging from basic authoring tasks to advanced developer techniques. You can, of course, search through the documentation using standard search mechanisms, but you can also place the cursor in any particular position in the interface and use the **F1** key to open a dialog box that presents a section in the documentation that is appropriate for the context of the current cursor position. Aside from the other topics in this *Getting Started* section, the following are links to other sections of the documentation that might be helpful for your specific needs:

- [Text Editing Mode Section](#) - Provides information about the **Text** editor.
- [XML Schema Diagram Editor](#) - Provides information about the schema design mode.
- [Editing Specific Document Types Chapter](#) - Includes information about editing numerous different types of documents.
- [Publishing Chapter](#) - Provides information about the various ways that you can publish content.
- [Importing Data Chapter](#) - Provides information about importing data from text files, MS Excel files, database data, and HTML files.
- [Tools Chapter](#) - Details about the various built-in tools that are available in Oxygen XML Developer.
- [Add-ons Chapter](#) - Information about how to extend the functionality of Oxygen XML Developer through add-ons.

Sample Documents

Your installation of Oxygen XML Developer includes a large variety of sample documents and projects that you can use as templates to get started and to experiment with the various features and technologies. They are located in the **samples** folder that is located in the installation directory of Oxygen XML Developer. You will find files and folders for various types of documents, including the following:

- **Sample project file (*sample.xpr*)** - A sample project file that will allow you to experiment with how projects can be structured and used. When you open this project file, you will be able to see all the sample files and folders in the [Project view](#).
- **Sample files (*personal.xml*, etc.)** - A collection of interrelated sample files that will allow you to experiment with the structure and relationship between XML files, stylesheets, and schemas.
- **Various document type folders** - The various folders contain sample files for numerous document types, such as CSS, DITA, DocBook, ePub, TEI, XHTML, and many others.

Other Resources

The following list includes links to various other resources that will help you get started using the features of Oxygen XML Developer:

- See the [Oxygen XML Developer Blog Site](#) for a large variety of current and archived blogs in regards to numerous features, requests, and instructional topics.
- Take advantage of the [Oxygen XML Developer Forum](#) to see various announcements and learn more about specific issues that other users have experienced.
- If you are using DITA, see the incredibly helpful [DITA Style Guide Best Practices for Authors](#).
- To learn about the WebHelp features in Oxygen XML Developer, see the [Publishing DITA and DocBook to WebHelp](#) section of the website.
- For more information about various additional tools that are integrated into Oxygen XML Developer, see the [Tools section](#).
- See the [External Resource Page](#) for links to various other helpful resources, such as discussion lists, external tutorials, and more.

- See the [Oxygen SDK](#) section for details about the SDK that allows you to extend and develop Oxygen XML Developer [frameworks](#) and [plugins](#), and to integrate Eclipse plugins.
- For a list of new features that were implemented in the latest version of Oxygen XML Developer, see the [What's New Section of the Website](#)
- You can select the **Tip of the Day** action in the [Help menu](#) to display a dialog box that includes a variety of tips for using Oxygen XML Developer.
- You can select **Show Dynamic Help view** from the [Help menu](#) to dynamically opens a topic that is relevant to the focused editor, view, or dialog box.

Your First Document or Project

This section includes several topics that will help you get started with your first document or project.

Creating a New Project

Oxygen XML Developer allows you to organize your XML-related files into projects. This helps you manage and organize your files and also allows you to perform batch operations (such as validation and transformation) over multiple files. You can also [share your project settings and transformation/validation scenarios](#) with other users. Use the [Project view](#) to manage projects, and the files and folders contained within.

Creating a New Project

To create a new project, select  **New Project** from the **Project** menu, the **New** menu in the contextual menu, or the drop-down menu at the top-left of the **Project** view. This opens a dialog box that allows you to assign a name to the new project and adds it to the structure of the project in the [Project view](#).

Adding Items to the Project

To add items to the project, select any of the following actions that are available when invoking the contextual menu in the **Project** view:

New > **File**

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New > **Folder**

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

The project itself is considered a logical folder. You can add a logical folder, or content to a logical folder, by using one of the following actions that are available in the contextual menu, when invoked from the *project root*:

New > **Logical Folder**

Creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - .

New > **Logical Folders from Web**

Replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X - .

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Using Linked Folders (Shortcuts)

Another easy way to organize your XML working files is to place them in a directory and then to create a corresponding linked folder in your project. If you add new files to that folder, you can simply use the  **Refresh (F5)** action from the toolbar or contextual menu and the **Project view** will display the existing files and subdirectories. If your files are scattered amongst several folders, but represent the same class of files, you might find it useful to combine them in a logical folder.

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (Mac OS X Finder) to the project tree, or by selecting  **Add Folder** in the contextual menu from the *project root*. Linked folders are displayed in the **Project view** with bold text. To create a file inside a linked folder, select the **New > File** action from the contextual menu. The linked files presented in the **Project view** are marked with a special icon.

Note: Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

For more information on managing projects and their content, see [Project View](#) on page 188.

For more details about how you can share projects with other users, see [Sharing a Project - Team Collaboration](#) on page 300.

Related Information:

[Using Projects to Group Documents](#) on page 291

Getting Help

If you run into specific problems while using Oxygen XML Developer you can take advantage of a variety of support related resources. Those resources include the following:

- [The Oxygen XML Developer Support Section of the Website](#)
- [The Oxygen XML Developer Forum](#)
- [The Oxygen XML Developer Video Tutorials](#)
- [The Common Problems and Solutions Section of the User Manual](#)
- [The Online Technical Support Form](#)

The application also includes various specific help-related resources in the **Help** menu.

Help Menu

The Oxygen XML Developer **Help** menu provides various resources to assist you with your tasks.

This menu includes the following actions or options:

Welcome

This option opens the **Welcome** screen that includes some resources to assist you with using Oxygen XML Developer.

Help (F1)

Use this action (or the **F1** key) to open a dialog box that presents a section in the User Manual that is appropriate for the context of the current cursor position. If the **Use online help** option is selected, this action will open the User Manual in an online mode.

Use online help

If this option is selected, the **Help (F1)** action will open the Oxygen XML Developer User Manual in an online mode.

Show Dynamic Help view

Use this action to open a view that loads the latest online WebHelp version of the Oxygen XML Developer User Manual, and dynamically opens a topic that is relevant to the focused editor, view, or dialog box. It requires Java 1.8 and an online connection. In Windows, if a Java 1.8 version is not detected, you will be advised to upgrade, while in Linux and Mac OS X with Java 1.7 and lower, Oxygen XML Developer will attempt

to load an offline version of the documentation. In all three operating systems, with Java 1.8, if an online connection is not detected, you will receive an error message advising you to check your proxy settings.

You can also open the **Dynamic Help** view by selecting it from the **Window > Show View** menu.

Install new add-ons

Opens a dialog box that allows you to install new [add-ons](#) to extend the functionality of Oxygen XML Developer.

Check for add-ons updates

Opens a dialog box that allows you to check for updates on installed [add-ons](#).

Manage add-ons

Opens a dialog box that allows you to manage installed [add-ons](#).

Check for a New Version

Use this action to view information about the latest version of Oxygen XML Developer.

Browse Oxygen Website

Opens the Oxygen XML Developer website in your default internet browser.

Register

If you encounter problems with your Oxygen XML Developer license, you can use this option to open a dialog box that provides options for obtaining or using a license key.

Lock/Unlock floating license

If you are using a *Floating License*, you can lock it so that it does not get [released to the pool](#) unless you or the system administrator unlocks it.

Report problem

You can use this option to open a dialog box that allows you to write the description of a problem that was encountered while using the application. You can also select additional information to be sent to the technical support team in the five tabs:

- **General info** - You can edit your contact details in case you want to be contacted for further details or to be notified of a resolution.
- **Class Loader URLs** - You can choose whether or not to include the listed *Class Loader URLs* with your report.
- **System properties** - You can choose whether or not to include the listed system property details with your report.

Tip: You are able to change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

- **Plugins** - You can choose whether or not to include details about your installed [plugins](#) with your report.
- **Frameworks** - You can choose whether or not to include details about your installed [frameworks](#) with your report.

Support Center

Use this option to open the [Oxygen XML Developer Support Section of the Website](#).

Support Tools > Clipboard Inspector

Opens a dialog box that displays extensive details of all the transferable objects from the clipboard. This is helpful if you experience problems while copying content from other applications and pasting it into Oxygen XML Developer. You can use the **Copy** button to copy all of this data and then paste it into an email to be sent to the *Oxygen* support team.

Support Tools > Randomize XML text content

Use this action when you need to send samples to the *Oxygen* support team and you want to keep the text content confidential. It opens a dialog box that allows you to select the resources for which the text content will be randomized. You can then save the resources and send them to the *Oxygen* support team without fear of compromising sensitive or private data. For more information, see [Randomize XML Text Content](#) on page 9.



Warning: Before using this action, it is highly recommended that you copy the XML resources to be processed, save them in a separate folder, and then process this operation on the copies instead of the original files. Otherwise, you may lose your original content.

Tip of the Day

Opens a dialog box that offers tips for using Oxygen XML Developer.

About

Use this option to open a dialog box that contains information about Oxygen XML Developer and the installed version. This dialog box includes the following tabs:

- **Copyright** - This tab contains general information about the product and the version of the product you are using, along with contact details and the SGN number. Details regarding the memory usage are also presented at the bottom of the dialog box.
- **Libraries** - This tab presents the list of third party libraries that Oxygen XML Developer uses. To view the End User Licence Agreement of each library, double-click it.
- **Frameworks** - This tab contains a list with the *framework* that are bundled with Oxygen XML Developer.
- **System Properties** - This tab contains a list with system properties and their values. The contextual menu allows you to select and copy the properties.

Related Information:

[Details to Submit in a Request for Technical Support Using the Online Form](#) on page 1248

Randomize XML Text Content

Oxygen XML Developer includes an action that randomizes the text content of an XML document. This action is available in the **Help > Support Tools** menu. It is helpful if you need to send XML samples to the *Oxygen* support team and you want to keep the text content confidential. It opens a dialog box that allows you to select the resources for which the text content will be randomized. You can then save the resources and send them to the *Oxygen* support team without fear of compromising sensitive or private data.



Warning: Before using this action, it is highly recommended that you copy the XML resources to be processed, save them in a separate folder, and then perform this operation on the copies instead of the original files. Otherwise, you may lose your original content.

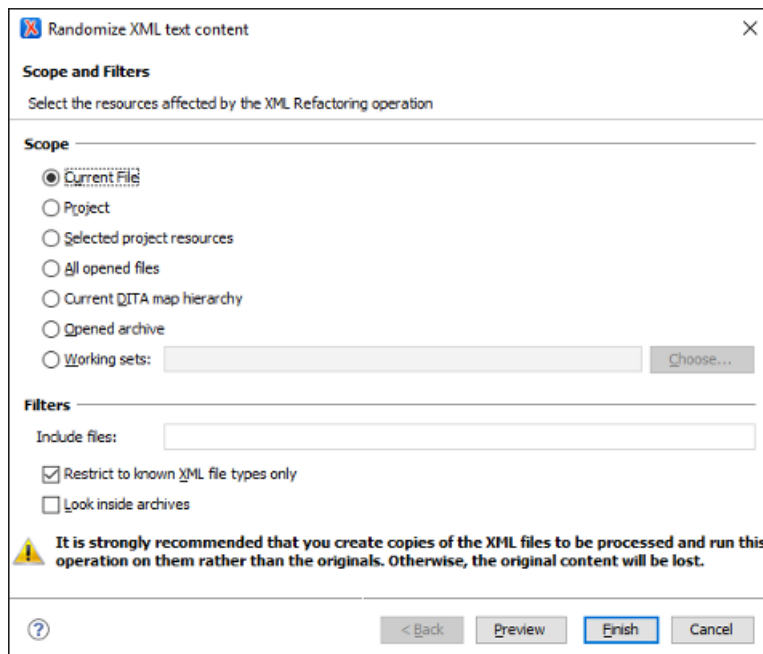


Figure 2: Randomize XML Text Content Dialog Box

The **Randomize XML Text Content** dialog box includes the following options:

Scope

Allows you to select the set of files whose text content will be randomized by the operation. You can select from predefined resource sets (such as the current file, your whole project, the current [DITA map](#) hierarchy for DITA projects, etc.) or you can define your own set of resources by creating a [working set](#).

Filters

This section includes the following options:

- **Include files** - Allows you to filter the selected resources by using a file pattern. For example, to restrict the operation to only analyze build files you could use `build*.xml` for the file pattern.
- **Restrict only to known XML file types** - When selected, only resources with a known XML file type will be affected by the operation.
- **Look inside archives** - When selected, the resources inside archives will also be affected.

Frequently Used Shortcut Keys

Oxygen XML Developer includes numerous shortcut keys that are assigned to actions to help you edit content. All the shortcuts that are assigned to actions are displayed in the table in the [Menu Shortcut Keys preference page](#).

For information about how to assign or configure shortcut keys, see [How to Assign a Shortcut Key or Edit an Existing Shortcut](#) on page 133.

Table 1: Frequently Used Shortcut Keys in Oxygen XML Developer

Action	Windows/Linux Shortcut Keys	Mac/OS X Shortcut Keys	Description of Default Assigned Action
Attribute Editor	<u>Alt + Enter</u>	<u>Alt + Enter</u>	• Opens the in-place attribute editor
Beginning	<u>Ctrl + Home</u>	<u>Command + Home</u>	• Navigates to the beginning of the document
Check Spelling	<u>F7</u>	<u>F7</u>	• Opens the spell checking dialog box
Check Well-Formedness	<u>Ctrl + Shift + W</u>	<u>Command + Shift + W</u>	• Check well-formedness of current document
Configure Transformation	<u>Ctrl + Shift + C</u>	<u>Command + Shift + C</u>	• Opens the Configure Transformation Scenario dialog box
Content Completion / New Line	<u>Enter</u>	<u>Enter</u>	• Author mode - Opens the content completion window • Text mode - Moves cursor to the next line
Content Completion (Text Mode)	<u>Ctrl + Space</u>	<u>Command + Space</u>	• Opens the content completion window in Text mode
Create Bookmark #	<u>Ctrl + Shift + 1-9</u>	<u>Command + Shift + 1-9</u>	• Create bookmarks numbered 1 through 9

Action	Windows/Linux Shortcut Keys	Mac/OS X Shortcut Keys	Description of Default Assigned Action
Create Next Bookmark	<u>F9</u>	<u>F9</u>	Create bookmark numbered whatever is next in sequence
Delete Next Word	<u>Ctrl + Delete</u>	<u>Command + Delete</u>	Deletes the next word or whitespace
Delete Previous Word	<u>Ctrl + Backspace</u>	<u>Command + Backspace</u>	Deletes the previous word or whitespace
Delete Tags	<u>Alt + Shift + X</u>	<u>Command + Alt + X</u>	Deletes the start and end tag of the current element
Duplicate Lines Up (Text Mode)	<u>Ctrl + Shift + UpArrow</u>	<u>Alt + Shift + UpArrow</u>	Duplicates the selected lines (or current line) and inserts it above the current selection/line
Duplicate Lines Down (Text Mode)	<u>Ctrl + Shift + DownArrow</u>	<u>Alt + Shift + DownArrow</u>	Duplicates the selected lines (or current line) and inserts it below the current selection or line
End	<u>Ctrl + End</u>	<u>Command + End</u>	Navigates to the end of the document
Exit	<u>Ctrl + Q</u>	<u>Command + Q</u>	Exit the application
Find	<u>Ctrl + F</u>	<u>Command + F</u>	Opens Find/Replace dialog box
Find Next	<u>F3</u>	<u>Command + G</u>	Finds next occurrence of the last searched term
Find Previous	<u>Shift + F3</u>	<u>Command + Shift + G</u>	Finds previous occurrence of the last searched term
Go To Bookmark	<u>Ctrl + 1-9</u>	<u>Command + 1-9</u>	Go to specific bookmark
Help	<u>F1</u>	<u>F1</u>	Opens help documentation
Insert Para / Format Indent	<u>Ctrl + Shift + P</u>	<u>Command + Shift + P</u>	Author mode - Inserts a paragraph at cursor position Text mode - Formats and indents current document
Move Tab Left	<u>Ctrl + Alt + Comma</u>	<u>Ctrl + Alt + Comma</u>	Moves the current file tab one position to the left
Move Tab Right	<u>Ctrl + Alt + Period</u>	<u>Ctrl + Alt + Period</u>	Moves the current file tab one position to the right
Move Node Down (Author)	<u>Alt + DownArrow</u>	<u>Alt + DownArrow</u>	Moves the selected XML node down in Author mode

Action	Windows/Linux Shortcut Keys	Mac/OS X Shortcut Keys	Description of Default Assigned Action
Move Node Down (Text)	<u>Ctrl + Alt + DownArrow</u>	<u>Command + Alt + DownArrow</u>	• Moves the selected XML node down in Text mode
Move Node Up (Author)	<u>Alt + UpArrow</u>	<u>Alt + UpArrow</u>	• Moves the selected XML node up in Author mode.
Move Node Up (Text)	<u>Ctrl + Alt + UpArrow</u>	<u>Command + Alt + UpArrow</u>	• Moves the selected XML node up in Text mode
New File	<u>Ctrl + N</u>	<u>Command + N</u>	• Opens wizard for creating new documents
Next Word	<u>Ctrl + RightArrow</u>	<u>Command + RightArrow</u>	• Navigates to next word
Open/Find Resource	<u>Ctrl + Shift + R</u>	<u>Command + Shift + R</u>	• Opens the Open/Find Resource dialog box
Previous Word	<u>Ctrl + LeftArrow</u>	<u>Command + LeftArrow</u>	• Navigates to previous word
Print Preview	<u>Ctrl + P</u>	<u>Command + P</u>	• Opens the print preview (page setup) dialog box
Quick Assist	<u>Alt + 1</u>	<u>Command + Alt + 1</u>	• Opens Quick Assist menu if actions are available in the current context (usually indicated with a bulb  icon in the left stripe)
Quick Find	<u>Alt + Shift + F</u>	<u>Alt + Shift + F</u>	• Opens the Quick Find mechanism at the bottom of the editor
Redo	<u>Ctrl + Y</u> (Windows) - <u>Ctrl + Shift + Z</u> (Linux)	<u>Command + Shift + Z</u>	• Redo last editing action
Refresh	<u>F5</u>	<u>F5</u>	• Refresh
Remove Bookmarks	<u>Ctrl + F7</u>	<u>Command + F7</u>	• Removes all bookmarks
Reopen Last Closed Editor	<u>Ctrl + Alt + T</u>	<u>Command + Alt + T</u>	• Reopens the editor tab that was closed most recently
Reset Zoom	<u>Ctrl + NumPad0</u>	<u>Command + NumPad0</u>	• Resets zoom (default font size)
Save	<u>Ctrl + S</u>	<u>Command + S</u>	• Saves current document
Save All	<u>Ctrl + Shift + S</u>	<u>Command + Shift + S</u>	• Saves all opened files
Scroll Down	<u>Ctrl + DownArrow</u>	<u>Command + DownArrow</u>	• Scrolls the editor down
Scroll Up	<u>Ctrl + UpArrow</u>	<u>Command + Up Arrow</u>	• Scrolls the editor up

Action	Windows/Linux Shortcut Keys	Mac/OS X Shortcut Keys	Description of Default Assigned Action
Shift Left	<u>Shift + Tab</u>	<u>Shift + Tab</u>	• Author mode - Moves cursor to the previous XML node • Text mode - Shifts content to the left
Shift Right	<u>Tab</u>	<u>Tab</u>	• Author mode - Moves cursor to the next XML node • Text mode - Shifts content to the right
Split Element	<u>Alt + Shift + D</u>	<u>Ctrl + Alt + D</u>	• Splits the element the cursor position
Surround With	<u>Ctrl + E</u>	<u>Command + E</u>	• Surrounds selected content with specified tag
Switch Tabs	<u>Ctrl + Tab</u> / <u>Ctrl + Shift + Tab</u>	<u>Command + Tab</u> / <u>Command + Shift + Tab</u>	• Switches between opened tabs
Transform	<u>Ctrl + Shift + T</u>	<u>Command + Shift + T</u>	• Opens a dialog box for selecting a transformation scenario
Underline / Open URL	<u>Ctrl + U</u>	<u>Command + U</u>	• Underlines select content (in main editor) • Opens URL (when focus is outside the main editor)
Undo	<u>Ctrl + Z</u>	<u>Command + Z</u>	• Undo last editing action
Validate	<u>Ctrl + Shift + V</u>	<u>Command + Shift + V</u>	• Validates current document
Zoom In	<u>Ctrl + NumPad+</u>	<u>Command + NumPad+</u>	• Zooms in (increase font size)
Zoom Out	<u>Ctrl + NumPad-</u>	<u>Command + NumPad-</u>	• Zooms out (decrease font size)

Accessibility Support in Oxygen

Our company is dedicated to developing software products that are usable for everyone, including those with physical challenges and disabilities. Oxygen XML Developer was designed to adhere to the U.S. Government Section 508 accessibility standards: https://www.oxygenxml.com/xml_editor/section508.html

Adjusting Fonts and Colors

If you have low vision, go to **Options > Preferences > Appearance > Fonts** where you can adjust the font styles and sizes used in the entire application, both for the editing areas and UI labels. If you have color blindness, you can also adjust most of the colors used in Oxygen XML Developer by going to **Options > Preferences > Appearance** and changing the current color theme. You can also search for other color related setting in the **Preferences** dialog box.

Text to Speech Narrators (JAWS)

If you are using a text to speech narrator, Oxygen XML Developer support this since it is a Java application and it is periodically tested on Windows using the JAWS screen reader: <http://www.freedomscientific.com/Products/Blindness/JAWS>.

For JAWS to work, you need to enable the Java access bridge in Oxygen XML Developer: http://docs.oracle.com/javase/7/docs/technotes/guides/access/enable_and_test.html

Since Oxygen XML Developer comes bundled with its own Java VM, you need to open a console in the `jre` folder bundled with Oxygen XML Developer and run the following command:

```
D:\PATH\TO\OXYGEN_INSTALLATION_FOLDER\jre>bin\jabswitch -enable
```

You will receive a notification in the console that the access bridge has been enabled.

Once the Java access bridge is enabled and if the JAWS narrator is active, when Oxygen XML Developer starts, the narrator will start reading content from Oxygen XML Developer and you can interact with the application, read menus, content from opened XML documents, and UI components from dialog boxes and side views.

Hints for the Visually Impaired

Here are a few hints for using Oxygen XML Developer if you are visually impaired:

- The top main menu should contain most of the actions that you need to open, save, and close documents, switch between opened documents, or switch between the various editing modes for XML documents that are already opened.
 - The **File** menu contains actions to open, save, or close the currently edited XML document.
 - The **Edit** menu contains actions to undo/redo or cut/copy/paste content. They also have the usual shortcuts that can be used instead of directly invoking the actions from the menu.
 - The **Find** menu contains an action to show the **Find/Replace** dialog box. Sometimes the **JAWS** narrator overloads the **CTRL-F** shortcut and presents its own find/replace window but the Oxygen XML Developer **Find/Replace** dialog box provides the ability to perform complex find/replace operations in the opened file.
 - In the **Options** menu, you have access to the **Preferences** dialog box that contains global application settings and access to the **Menu Shortcut Keys** table where you can configure shortcuts for the most commonly used actions.
 - The **Window** menu includes actions to switch between opened XML documents. Also, you can use the **Show view** submenu open a particular side view and move the focus to that view.
- An opened XML document can be edited with accessibility support either in the **Text** editing mode (where the XML tags are accessible in the edited content) or in the visual **Author** editing mode (where the XML tags are hidden and only the text content is shown). You can switch between these editing modes by using the **Document > Edit Mode** menu.
 - **Text** mode provides access to the entire source document with all of its **XML** content, just like you have in any text editing application. In addition, using the **Window > Show view** submenu, you can change focus to the **Attributes**, **Elements**, or **Outline** view. The **Attributes** view presents the existing and possible attributes that can be inserted in an XML tag. The **Elements** view shows you the list of XML elements that can be inserted at cursor position (also, pressing **F2** on a selected element presents its annotation). The **Outline** view shows the current path in the XML structure.
 - **Author** mode is useful for reviewing written XML content because it has support for change tracking and for adding comments. Editing in the **Author** visual editing mode, you have access only to the text content in the XML document. Pressing **Shift-F2** will read to you the location in the XML structure. Again, you can also use the **Outline** view for this. In the **Author** editing mode, you can also use the **Attributes** and **Elements** views similar to using them in the **Text** editing mode. Pressing **ENTER** in the **Author** visual editing mode can also be used to present a list of allowed elements at the current position.

Installation

Topics:

- [Installing Oxygen XML Developer on Windows](#)
- [Installing Oxygen XML Developer on Mac OS X](#)
- [Installing Oxygen XML Developer on Linux](#)
- [Installing Oxygen XML Developer on Windows Server](#)
- [Installing Oxygen XML Developer on a Linux / UNIX Server](#)
- [Installing Oxygen XML Developer using the Java Web Start \(JWS\) Installer](#)
- [Site-Wide Deployment](#)
- [Licensing](#)
- [Floating License Servers](#)
- [Upgrading](#)
- [Installing and Updating Add-ons](#)
- [Uninstalling](#)

Oxygen XML Developer is available on Windows, Linux, and Mac OS X and there are a variety of methods and options for installing and running Oxygen XML Developer on your system or server. This section also includes information about registering, transferring, or releasing licenses, upgrading, installing *add-ons*, and uninstalling.

Choosing How Oxygen XML Developer Runs

You can install Oxygen XML Developer to run in several ways:

- As a desktop application (running standalone or as an Eclipse plugin) on Windows, Linux, or Mac OS X.
- As a desktop application (running standalone or as an Eclipse plugin) on a Unix or Linux server or on Windows Terminal Server.
- From within a browser though the Java Web Start technology.

Choosing an Installer

You also have a choice of several different installers:

- The native installer for your platform (Windows, Linux, or Mac OS X).
- On Windows and Linux, the native installer can also run in unattended mode.

Choosing a License Option

You must [obtain and register a license key](#) to run Oxygen XML Developer.

You can choose from two types of licenses:

- A named-user license, which can be used by a single person on multiple computers.
- A floating license, which can be used by different people at different times. Only one person can use a floating license at a time.

Upgrading, transferring, and uninstalling.

You can also [upgrade](#) Oxygen XML Developer, [transfer a license](#), or [uninstall](#) Oxygen XML Developer.

Getting help with installation

If you need help at any point during these procedures, please send us an email at support@oxygenxml.com.

Installing Oxygen XML Developer on Windows

Choosing an Installation Method

You can install Oxygen XML Developer on Windows using one of the following methods:

- [Windows installer](#)
- [Windows installer in unattended mode](#)

System Requirements

Operating systems

Windows Vista, Windows 7, Windows 8, Windows 10, Windows Server 2008, Windows Server 2012

CPU

- Minimum - Intel Pentium III™ /AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. If you use the native Windows installer, Oxygen XML Developer will be installed with its own copy of Java. If you use the all platforms installer, your system must have a compatible Java virtual machine installed.

Oxygen XML Developer only supports official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.8) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that those implementations will work with future Oxygen XML Developer updates and releases.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you install using the native Windows installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Windows environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise, the version of Java pointed to by your `PATH` environment variable is used.

If you run Oxygen XML Developer using the batch file, `oxygenDeveloper.bat`, you can edit the batch file to specify a particular version to use.

Windows Installer

To install Oxygen XML Developer using the Windows installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. [Download](#) the Windows installer.
3. [Optional] Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.

4. Run the installer and follow the instructions in the installation program.
5. Start Oxygen XML Developer using one of the following methods:
 - Use one of the shortcuts created by the installer.
 - Run `oxygenDeveloper.bat`, which is located in the installation directory.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Unattended Installation

You can run the installation in unattended mode by running the installer from the command line with the **-q** parameter. By default, running the installer in unattended mode installs Oxygen XML Developer with the default options and does not overwrite existing files. You can change various options for the unattended installer using the installer [command line parameters](#).

Windows Installer Command Line Reference

The Oxygen XML Developer installer for Windows creates a file called `response.varfile`, which records the choices that the user made when running the installer interactively. The generated response file is found in the `[OXYGEN_INSTALL_DIR]/.install4j` folder. You can use the `response.varfile` to set the options for an [unintended install](#).

The following table describes some of the settings that can be used in the `response.varfile`:

Table 2: `response.varfile` Options Parameters

Parameter Name	Description	Values
autoVersionChecking	Automatic version checking.	true / false . Default setting is true .
reportProblem	Allows you to report a problem encountered while using Oxygen XML Developer.	true / false . Default setting is true .
downloadResources	Allows Oxygen XML Developer to download resources (links to video demonstrations, webinars, and upcoming events) from https://www.oxygenxml.com to populate the application welcome screen.	true / false . Default setting is true .

For more information about the `response.varfile` format, see [install4j site](#).

Command Line Parameters

The Oxygen XML Developer installer supports the following command line parameters:

Table 3: Supported Parameters

Option	Meaning
-q	Run the installer in unattended mode. The installer will not prompt the user for input during the install. Default settings will be used for all options unless a <code>response.varfile</code> is specified using the <code>-varfile</code> option or individual settings are specified using - on Windows: <pre>oxygenDeveloper.exe -q</pre> - on Linux: <pre>oxygenDeveloper.sh -q</pre>

Option	Meaning
-overwrite	In unattended mode, the installer does not overwrite files with the same name if a previous version of the Oxygen XML Developer is installed in the same folder. The -overwrite parameter added after the -q parameter forces the overwriting of these files. - on Windows: <pre>oxygenDeveloper.exe -q -overwrite</pre> - on Linux: <pre>oxygenDeveloper.sh -q -overwrite</pre>
-console	To display a console for the unattended installation, add a -console parameter to the command line. - on Windows: <pre>start /wait oxygenDeveloper.exe -q -console</pre> Note: The use of <i>start /wait</i> on Windows is required to make the installer run in the foreground. If you run it without <i>start /wait</i>, it will run in the background. - on Linux: <pre>oxygenDeveloper.sh -q -console</pre>
-varfile	Points to the location of a response .varfile to be used during an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -varfile response.varfile</pre> - on Linux: <pre>oxygenDeveloper.sh -q -varfile response.varfile</pre>
-V	Is used to define a variable to be used by an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -VusageDataCollector=false</pre> - on Linux: <pre>oxygenDeveloper.sh -q -VusageDataCollector=false</pre>

Installing Oxygen XML Developer on Mac OS X

You can install Oxygen XML Developer on Mac OS X by using the oxygenDeveloper.dmg installation package.

System Requirements

Operating system

OS X version 10.8 64-bit or later

CPU

- Minimum - Intel-based Mac, 1 GHz

- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

OS X Installation

To install Oxygen XML Developer on OS X, follow these steps:

1. [Download](#) the OS X installation package (oxygenDeveloper.dmg).
 2. [Optional] Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
 3. Double-click the oxygenDeveloper.dmg disk image file to mount it.
 4. Drag/Copy the *Oxygen XML Developer* folder to your /Applications folder (or another location if you wish).
- Important:** Do not copy the files/folders from within the *Oxygen XML Developer* folder (always copy the folder itself), otherwise you will omit invisible files/folders and the application may no longer start.
5. Start Oxygen XML Developer, using one of the following methods:
 - Double-click Oxygen XML Developer .app.
 - Run `sh oxygenDeveloper.sh` in the command line interface.
 6. To license your copy of Oxygen XML Developer, go to **Help > Register** to enter your [license key](#).

Installing Oxygen XML Developer on Linux

Choosing an Installation Method

You can install Oxygen XML Developer on Linux using one of the following methods:

- [Linux installer](#)
- [Linux installer in unattended mode](#)

System Requirements

Operating system

Any Unix/Linux distribution with an available Java SE Runtime Environment version 1.6.0 or later from Oracle

CPU

- Minimum - Intel Pentium III™/AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. Oxygen XML Developer only supports official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.8) from Oracle available at

<http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that other implementations will work with future Oxygen XML Developer updates and releases. Oxygen XML Developer does not work with the GNU libgcj Java Virtual Machine.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you used the Linux installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.
2. Otherwise, if the Linux environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

You can also change the version of the Java Virtual Machine that runs Oxygen XML Developer by editing the script file, `oxygenDeveloper.sh`. Go to the Java command at the end of the script file and specify the full path to the Java executable of the desired JVM version. For example:

```
/usr/bin/jre1.6.0_45/bin/java -Xmx256m ...
```

Linux Installer

To install Oxygen XML Developer using the Linux installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. [Download](#) the Linux installer.
3. [Optional] Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
4. Run the installer and follow the instructions in the installation program.

Note: For example, open a shell, `cd` to the installation directory, and at the prompt type `sh ./oxygen-32bit.sh` or `sh ./oxygen-64bit.sh`, depending on which installer you downloaded.



Warning: If you are running the installer as root and your Linux distribution uses Wayland (such as **Ubuntu 17.10** or **Fedora 25**), before running the installer, the local user must first allow the root user to access the X server by running the following command (as the local user):

```
xhost +SI:localuser:root
```

5. Start Oxygen XML Developer using one of the following methods:
 - Use the `developer` shortcut created by the installer.
 - From a command line, type `sh oxygenDeveloper.sh`. This file is located in the installation folder.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Unattended Installation

You can run the installation in unattended mode by running the installer from the command line with the `-q` parameter. By default, running the installer in unattended mode installs Oxygen XML Developer with the default options and does not overwrite existing files. You can change various options for the unattended installer using the installer [command line parameters](#).

Linux Installer Command Line Reference

The Oxygen XML Developer installer for Linux creates a file called `response.varfile`, which records the choices that the user made when running the installer interactively. The generated response file is found in the `[OXYGEN_INSTALL_DIR]/.install4j` folder. You can use the `response.varfile` to set the options for an [unintended install](#).

The following table describes some of the settings that can be used in the `response.varfile`:

Table 4: response.varfile Options Parameters

Parameter Name	Description	Values
autoVersionChecking	Automatic version checking.	true / false. Default setting is true .
reportProblem	Allows you to report a problem encountered while using Oxygen XML Developer.	true / false. Default setting is true .
downloadResources	Allows Oxygen XML Developer to download resources (links to video demonstrations, webinars, and upcoming events) from https://www.oxygenxml.com to populate the application welcome screen.	true / false. Default setting is true .

For more information about the response.varfile format, see [install4j site](#).

Command Line Parameters

The Oxygen XML Developer installer supports the following command line parameters:

Table 5: Supported Parameters

Option	Meaning
-q	Run the installer in unattended mode. The installer will not prompt the user for input during the install. Default settings will be used for all options unless a response.varfile is specified using the -varfile option or individual settings are specified using - on Windows: <pre>oxygenDeveloper.exe -q</pre> - on Linux: <pre>oxygenDeveloper.sh -q</pre>
-overwrite	In unattended mode, the installer does not overwrite files with the same name if a previous version of the Oxygen XML Developer is installed in the same folder. The -overwrite parameter added after the -q parameter forces the overwriting of these files. - on Windows: <pre>oxygenDeveloper.exe -q -overwrite</pre> - on Linux: <pre>oxygenDeveloper.sh -q -overwrite</pre>
-console	To display a console for the unattended installation, add a -console parameter to the command line. - on Windows: <pre>start /wait oxygenDeveloper.exe -q -console</pre> Note: The use of <i>start /wait</i> on Windows is required to make the installer run in the foreground. If you run it without <i>start /wait</i>, it will run in the background. - on Linux: <pre>oxygenDeveloper.sh -q -console</pre>

Option	Meaning
-varfile	Points to the location of a response .var file to be used during an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -varfile response.varfile</pre> - on Linux: <pre>oxygenDeveloper.sh -q -varfile response.varfile</pre>
-V	Is used to define a variable to be used by an unattended installation. For example: - on Windows: <pre>oxygenDeveloper.exe -q -VusageDataCollector=false</pre> - on Linux: <pre>oxygenDeveloper.sh -q -VusageDataCollector=false</pre>

Installing Oxygen XML Developer on Windows Server

System Requirements

Operating systems

Windows Server 2008, Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2

CPU

- Minimum - Intel Pentium III™ /AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum values per user - 512 MB of RAM
- Recommended values per user - 2 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. If you use the native Windows installer, Oxygen XML Developer will be installed with its own copy of Java. If you use the all platforms installer, your system must have a compatible Java virtual machine installed.

Oxygen XML Developer only supports official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.8) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that those implementations will work with future Oxygen XML Developer updates and releases.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you install using the native Windows installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the jre subdirectory of the installation directory is used.
2. Otherwise, if the Windows environment variable JAVA_HOME is set, Oxygen XML Developer uses the Java version pointed to by this variable.

3. Otherwise, the version of Java pointed to by your PATH environment variable is used.

If you run Oxygen XML Developer using the batch file, `oxygenDeveloper.bat`, you can edit the batch file to specify a particular version to use.

Windows Installer

To install Oxygen XML Developer using the Windows installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. [Download](#) the Windows installer.
3. [Optional] Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
4. Run the installer and follow the instructions in the installation program.
5. Start Oxygen XML Developer using one of the following methods:
 - Use one of the shortcuts created by the installer.
 - Run `oxygenDeveloper.bat`, which is located in the installation directory.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Configuring Windows Terminal Server

1. Install Oxygen XML Developer on the server and make its shortcuts available to all users.
2. Make sure you allocate sufficient memory to Oxygen XML Developer by adding the `-Xmx` parameter either in [the .bat startup script](#), or in [the .vmoptions configuration file](#) (if you start it from an executable launcher).

Installing Oxygen XML Developer on a Linux / UNIX Server

System Requirements

Operating system

Any Unix/Linux distribution with an available Java SE Runtime Environment version 1.6.0 or later from Oracle

CPU

- Minimum - Intel Pentium III™ /AMD Athlon™ class processor, 1 GHz
- Recommended - Dual Core class processor

Memory

- Minimum - 2 GB of RAM
- Recommended - 4 GB of RAM

Storage

- Minimum - 400 MB free disk space
- Recommended - 1 GB free disk space

Java

Oxygen XML Developer requires Java. Oxygen XML Developer only supports official and stable Java Virtual Machines with the version number 1.6.0 or later (the recommended version is 1.8) from Oracle available at <http://www.oracle.com/technetwork/java/javase/downloads/index.html>. Oxygen XML Developer may work with JVM implementations from other vendors, but there is no guarantee that other implementations will work with future Oxygen XML Developer updates and releases. Oxygen XML Developer does not work with the GNU libgcj Java Virtual Machine.

Oxygen XML Developer uses the following rules to determine which installed version of Java to use:

1. If you used the Linux installer, which installs a version of Java as part of the Oxygen XML Developer installation, the version in the `jre` subdirectory of the installation directory is used.

2. Otherwise, if the Linux environment variable `JAVA_HOME` is set, Oxygen XML Developer uses the Java version pointed to by this variable.
3. Otherwise the version of Java pointed to by your `PATH` environment variable is used.

You can also change the version of the Java Virtual Machine that runs Oxygen XML Developer by editing the script file, `oxygenDeveloper.sh`. Go to the Java command at the end of the script file and specify the full path to the Java executable of the desired JVM version. For example:

```
/usr/bin/jre1.6.0_45/bin/java -Xmx256m ...
```

Linux Installer

To install Oxygen XML Developer using the Linux installer, follow these steps:

1. Make sure that your system meets the [system requirements](#).
2. [Download](#) the Linux installer.
3. [Optional] Validate the integrity of the downloaded file by [checking it against the MD5 sum](#) published on the download page.
4. Run the installer and follow the instructions in the installation program.
Note: For example, open a shell, `cd` to the installation directory, and at the prompt type `sh ./oxygen-32bit.sh` or `sh ./oxygen-64bit.sh`, depending on which installer you downloaded.
5. Start Oxygen XML Developer using one of the following methods:
 - Use the developer shortcut created by the installer.
 - From a command line, type `sh oxygenDeveloper.sh`. This file is located in the installation folder.
6. To license your copy of Oxygen XML Developer go to **Help > Register** and enter your [license information](#).

Unix/Linux Server Configuration

1. Install Oxygen XML Developer on the server and make sure the `oxygenDeveloper.sh` script is executable and the installation directory is in the `PATH` of the users that need to use the application.
2. Make sure you allocate sufficient memory to Oxygen XML Developer by setting an appropriate value for the `-Xmx` parameter in the `.sh` startup script.
Note: The default value of the `-Xmx` parameter is 512 MB. To avoid [performance issues with large documents](#), you may need to adjust it.
3. Make sure the X server processes located on the workstations allow connections from the server host. For this, use the `xhost` command.
4. Start telnet (or ssh) on the server host.
5. Start an `xterm` process with the **display** parameter set on the current workstation. For example: `xterm -display workstationip:0.0`.
6. Start Oxygen XML Developer by typing `sh oxygenDeveloper.sh` from the command line. This file is located in the installation folder.

Installing Oxygen XML Developer using the Java Web Start (JWS) Installer

Oxygen XML Developer provides the tools to create your own JWS distribution that can be installed on a custom web server. The advantages of a JWS distribution include:

- Oxygen XML Developer is run locally, not inside a web browser, overcoming many of the browser compatibility problems common to applets.
- JWS ensures that the most current version of the application will be deployed, as well as the correct version of JRE.
- Applications launched with Java Web Start are cached locally. Thus, an already downloaded application is launched on par with a traditionally installed application.
- You can preconfigure Oxygen XML Developer and the rest of your team will use the same preferences and [frameworks](#).

Important: If you want to create your own JWS distribution package, please [contact Syncro Soft](#) for permission through a *Value Added Reseller Agreement*.

Note: A code signing certificate is needed to sign the JWS distribution. The following procedure assumes that you already have such a certificate (for example, Thawte™, or Verisign™).

The following schematic depicts the Oxygen XML Developer Java Web Start deployment procedure:

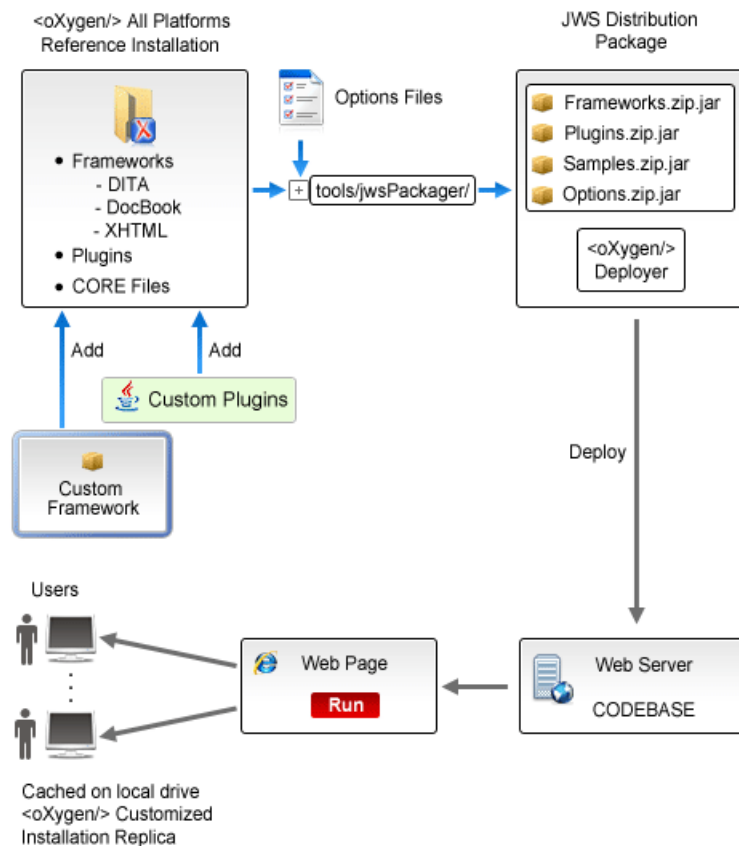


Figure 3: Java Web Start Deployment Procedure

To deploy an Oxygen XML Developer installation on a server.

1. Go to <https://www.oxygenxml.com/InstData/Developer/All/oxygenDeveloper.tar.gz> and download the *All Platforms Installation* package to a local drive.
2. Expand the archive to a temporary location. The oxygenDeveloper folder is created.
3. Optionally, you can customize your own *framework*.
4. Edit the oxygenDeveloper\tools\jwsPackager\packager.properties configuration file. Adjust the following properties appropriately for your server:
 - **codebase** - Represents the location of the future JWS distribution.
 - **keystore** - The *keystore* location path.
 - **storepass** - The password for *keystore* integrity.
 - **storetype** - The type of the certificate file, such as PKCS12 or JKS.
 - **alias** - The *keystore* alias.
 - **optionsDir** - Points to the options directory that may be distributed with the JWS installer. If the directory contains an XML document named options.xml or default.xml containing exported options, these options will be used. Otherwise, the structure of the options folder has to match the structure of a stand alone application options folder.

Note: This property is optional. It is provided only if *custom options* need to be delivered to the end users.

The values of **keystore**, **storepass**, and **alias** properties are all provided by the code signing certificate. For more information, see the documentation for your *jarsigner* tool.

5. If you want to modify the default settings, edit the JNLP `oxygenDeveloper\tools\jwsPackager\dist\javawebstart\author\developer.jnlp` template file. You can specify the list of files opened at startup by modifying the `<argument>` list. To pass system properties directly to Oxygen XML Developer when it is started, add the `oxy` prefix to them (for example: `<property name="oxyPropertyName" value="testValue"/>`). The system property is passed to Oxygen XML Developer with the prefix stripped.
6. Open a command-line console and run `ant` in the `oxygenDeveloper\tools\jwsPackager` folder. The **ant** process creates the `oxygenDeveloper\tools\jwsPackager\dist\InstData\authorJWS.zip` archive that contains the actual remote JWS installer.
7. Copy the expanded content of the archive to the folder specified in the **codebase** property, previously set in the **packager.properties** file.
8. Using your favorite web browser, go to the address specified in the **codebase** property or to its parent folder and start the remote installer.

Important: When running the Java Web Start distribution on OS X, due to changes in the [security release](#), clicking the link to the JNLP file does not start the application. The selected JNLP is downloaded locally. Right-click it and choose to open the resource.

Site-Wide Deployment

If you are deploying Oxygen XML Developer for a group, there are various things you can do to customize Oxygen XML Developer for your users and to make the deployment more efficient.

Creating custom default options

You can [create a custom set of default options](#) for Oxygen XML Developer. These will become the default options for each of your users, replacing the normal default settings. Users can still set options to suit themselves in their own copies of Oxygen XML Developer, but if they choose to reset their options to defaults, the custom defaults that you set will be used.

Creating default project files

[Oxygen XML Developer project files](#) are used to configure a project. You can [create and deploy default project files](#) for your projects so that your users will have a preconfigured project file to begin work with.

Shared project files

Rather than each user having their own project file, you can [create and deploy shared project files](#) so that all users share the same project configuration and settings and automatically inherit all project changes.

Using the unattended installer

You can speed up the installation process by using the [unattended installer for Windows](#) or [Linux](#) installs.

Using floating licenses

If you have a number of people using Oxygen XML Developer on a part-time basis or in different time zones, you can use a [floating license](#) so that multiple people can share a license.

Licensing

Oxygen XML Developer is not free software. To activate and use Oxygen XML Developer, you need a license.

For demonstration and evaluation purposes, a time limited license is available upon request at <https://www.oxygenxml.com/register.html>. This license is supplied at no cost for a period of 30 days from the date of issue. During this period, the software is fully functional, enabling you to test all its functionality. To continue using the software after the trial period, you must purchase a permanent license.

Choosing a License Type

You can use one of the following license types with Oxygen XML Developer:

1. A **Named-User License** may be used by a single *Named User* on one or more computers. Named-user licenses are not transferable to a new *Named User*. If you order multiple named-user licenses, you will receive a single license key good for a specified number of *named users*. It is your responsibility to keep track of the *named users* that each license is assigned to.
2. A **Floating License** may be used by any user on any machine. However, the total number of copies of Oxygen XML Developer in use at one time must not be more than the number of floating licenses available. A user who runs two different distributions of Oxygen XML Developer (for example, Standalone and Eclipse Plugin) at the same time on the same computer, consumes a single floating license.
3. A **Subscription license** that allows you to use the application for a specific period of time (either 6 months or 1 year). This type of license is user-based and is covered by a Support and Maintenance Pack, which means that during the subscription period you will get free upgrades to all major and minor releases and priority technical support.

For definitions and legal details of the license types, consult the End User License Agreement available at https://www.oxygenxml.com/eula_developer.html.

Obtaining a License Key

You can obtain a license key for Oxygen XML Developer in one of the following ways:

- You can purchase one or more licenses from the Oxygen XML Developer website at <https://www.oxygenxml.com/buy.html>. A license key will be sent to you by email.
- If your company or organization has already purchased licenses, please contact your license administrator to obtain a license key.
- If you purchased a subscription and you received a registration code, you can use it to obtain a license key from <https://www.oxygenxml.com/registerCode.html>. A license key will be sent to you by email.
- If you want to evaluate the product, you can obtain a trial license key for 30 days from the Oxygen XML Developer website at <https://www.oxygenxml.com/register.html>.

Register a Named-User or Subscription License

To register a *Named-User License* or *Subscription License* on a machine owned by the *Named User*, follow these steps:

1. Purchase a license from the [Oxygen XML Developer website](#). You will receive an email that contains your license key.
2. Save a backup copy of your email message that contains the new license key.
3. Start Oxygen XML Developer.
If this is a new install of Oxygen XML Developer, the registration dialog box is displayed. If the registration dialog box is not displayed, go to **Help > Register**.

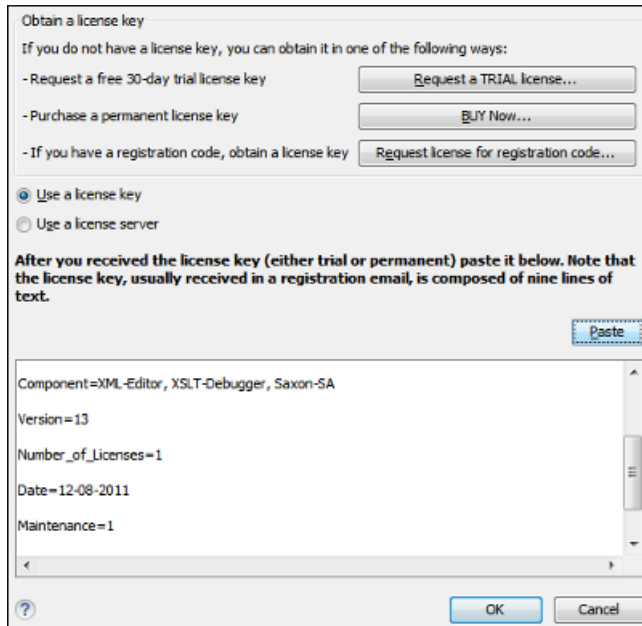


Figure 4: License Registration Dialog Box

4. Select **Use a license key** as the licensing method.
5. Paste your license key into the registration dialog box. The license key is composed of nine lines of text between two text markers.
6. Press **OK**.

Related Information:

[Oxygen XML Developer End-User License Agreement](#)

Floating Licenses

The floating license type is commonly used by organizations that have a large number of infrequent users who do not need to use Oxygen XML Developer all at the same time. Instead of each user having their own individual license key to use at their discretion, there are a pool of licenses that are used one at a time by various users upon request.

To use floating licenses, a license server is required and the license key needs to be activated. Your system administrator will most likely be responsible for [setting up the license server](#). Then you will need to [request a floating license from the server](#). This process is designed to help you comply with the *Oxygen End User License Agreement*. This means that the license key will be locked to a particular license server deployment, and the same license key cannot be used with any other license server.

For information about releasing and returning a floating license to the pool for other users, see [Releasing a Floating License](#) on page 29.

For information about reserving (or locking) a floating license so that it does not get returned to the pool, see [Reserving a Floating License](#) on page 30.

Requesting a Floating License from an HTTP License Server

To request a floating license from an HTTP license server, follow this procedure:

1. Contact your server administrator to make sure the license server has already been set up and get network address and login details for the license server.
2. Start Oxygen XML Developer.
3. Go to **Help > Register**.
The license registration dialog box is displayed.
4. Choose **Use a license server** as licensing method.
5. Select **HTTP/HTTPS Server** as server type.

6. In the *URL* field, enter the address of the license server.

The URL address has the following format: `http://hostName:port/oXygenLicenseServlet/license-servlet`.

7. Complete the *User* and *Password* fields.
8. Click the **OK** button.

If a floating license is available, it is registered in Oxygen XML Developer. To display the license details, open the **About** dialog box from the **Help** menu. If a floating license is not available, you will get a message listing the users currently using floating licenses.

Related Information:

[Setting up an HTTP Floating License Server](#) on page 31

Requesting a Floating License from a TCP License Server

Use this procedure if your company uses an Oxygen XML Developer TCP license server and the license server has already been set up by your server administrator:

1. Contact your server administrator to get network address and login details for the license server.
2. Start Oxygen XML Developer.
3. Go to **Help > Register** .
The license registration dialog box is displayed.
4. Choose **Use a license server** as licensing method.
5. Select **TCP server** as server type.
6. In the *Host* field, enter the host name or IP address of the license server.
7. In the *Port* field, enter the port number used to communicate with the license server.
8. Click the **OK** button.

If a floating license is available, it is registered in Oxygen XML Developer. To display the license details, open the **About** dialog box from the **Help** menu. If a floating license is not available, you will get a message listing the users currently using floating licenses.

Related Information:

[Setting up a TCP Floating License Server Using a 32-bit Windows Installer](#) on page 36

[Setting up a TCP Floating License Server Using All-Platforms Distribution](#) on page 37

Releasing a Floating License

The floating license you are using will be released and returned to the pool if any of the following occur:

- The connection with the license server is lost.
- You exit the application running on your machine, and no other copies of Oxygen XML Developer running on your machine are using your floating license.
- You register a [Named User](#) license with your copy of Oxygen XML Developer, and no other copies of Oxygen XML Developer running on your machine are using your floating license.
- Your computer idles for more than 2 hours.
- Your system administrator [manually revokes the license](#).

Tip: To prevent your floating license from being released, you can use the **Lock floating license** action available in the **Help** menu. You can use the same action to unlock the license. Note that your [system administrator also has the ability to unlock your license](#).

To release a floating license on demand, follow these steps:

1. Go to **Help > Register**.
The license registration dialog box is displayed.
2. The license key field should be empty (this is normal). If it is not empty, delete any text in the field.
3. Make sure the **Use a license key** option is selected.
4. Click **OK**.
A dialog box is displayed asking if you want to reset your license key.

5. Select between:

- **Use the last one** - Falls back to your previous license key. Use this option if you want to release a floating license and revert to a [Named User](#) license.
- **Reset** - Removes your license key from your user account on the current computer.

The **Reset** button erases all the licensing information. To complete the reset operation, close and restart Oxygen XML Developer.

Reserving a Floating License

There are instances where you might want to reserve or lock a floating license. For example, you could lock a floating license if you want to use your floating license offline while traveling.

To reserve/lock a floating license, follow these steps:

1. Select **Lock floating license** from the **Help** menu.
2. Click **OK**.

Your floating license is now locked. You can use the same action to unlock the license or you can contact your system administrator to unlock it.

Transferring a License Key

If you want to transfer your Oxygen XML Developer license key to another computer (for example, if you are disposing of your old computer or transferring it to another person), you must first unregister your license. You can then [register your license](#) on the new computer in the normal way.

To transfer a license, follow this procedure:

1. Go to **Help > Register**.
The license registration dialog box is displayed.
2. The license key field should be empty (this is normal). If it is not empty, delete any text in the field.
3. Make sure the **Use a license key** option is selected.
4. Click **OK**.
A dialog box is displayed asking if you want to reset your license key.
5. Select between:

- **Use the last one** - Falls back to your previous license key, if applicable.
- **Reset** - Removes your license key from your user account on the current computer.

The **Reset** button erases all the licensing information. To complete the reset operation, close and restart Oxygen XML Developer.

Floating License Servers

Installing a License Server to Manage Floating Licenses

If you are using floating licenses for Oxygen XML Developer, you must set up an Oxygen XML Developer floating license server. A floating license server can be installed as one of the following:

- An [HTTP server](#). This is the recommended method.
- A [TCP server](#) (deprecated).

Note: Oxygen XML Developer version 17 or higher requires a license server version 17 or higher. License servers version 17 or higher can be used with any version of a floating license key.

Activating Floating License Keys

To help you comply with the Oxygen XML Developer EULA (terms of licensing), all floating licenses require activation. This means that the license key will be locked to a particular license server deployment and no multiple uses of the same license key are possible.

During the activation process, a code that uniquely identifies your license server deployment is sent to the Oxygen XML Developer servers, which in turn will sign the license key.

Split or Combine License Keys to Work with Your License Servers

A license server can only manage one license key (which can cover any number of floating licenses). If you have multiple license keys for the same Oxygen XML Developer version and you want to have all of them managed by the same server, or if you have a multiple-user floating license and you want to split it between two or more license servers, please [contact our support team](#) and ask for a new license key.

Setting up an HTTP Floating License Server

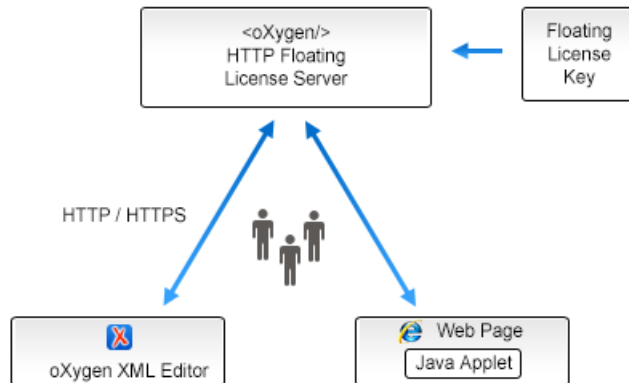


Figure 5: Floating License Server (HTTP Server)

The Oxygen XML Developer license server is available in several distributions, tailored for covering a variety of deployment configurations:

- **Windows installer** - Easy-to-use Windows installation wizard. Requires elevated permissions to run it.
- **All-platform distribution** - Script-based deployment that does not require elevated permissions to run it. Provides scripts for Windows, Mac, and Linux.
- **Web Archive (WAR) distribution** - Provides more flexibility in your deployment configuration, but it requires an existing HTTP server (such as Apache Tomcat).

Installation Steps for the HTTP License Server Installer Distribution for Windows

1. Download the HTTP license server installer from the [Oxygen XML Developer website](#).
2. Run the installer and follow the on-screen instructions.
3. You need to configure two sets of credentials:
 - a. **Administrator credentials** - used for accessing the Oxygen XML Developer license server administrative interface. Optionally you can choose to change the standard 8080 port.
 - b. **Standard user credentials** - used by an Oxygen XML Developer application to connect to the license server.
4. Optionally you can choose to install the server as a Windows service. In this case, you can choose the name of the Windows service.

Installation Steps for the HTTP License Server All-Platform Distribution

1. Download the HTTP license server all-platform archive from the [Oxygen XML Developer website](#).
2. Unpack the archive.
3. Run the license server scripts suitable for your operating system (`licenseServer.bat` for Windows or `licenseServer.sh` for Linux and Mac).

Note: To specify a different port (other than the default 8080), you can pass the new port number as an argument to the scripts (for example, `licenseServer.bat 8082`).

4. On the first run, you will be prompted to set two sets of credentials:
 - a. **Administrator credentials** - used for accessing the Oxygen XML Developer license server administrative interface.
 - b. **Standard user credentials** - used by an Oxygen XML Developer application to connect to the license server.

Installation Steps for the HTTP License Server WAR Distribution

1. Make sure that Apache Tomcat 5.5 or higher is running on the machine you have selected to be the license server. To get it, go to <http://tomcat.apache.org>.
2. Download the HTTP license server **Web ARchive (.war)** from the [Oxygen XML Developer website](#).
3. Configure two Tomcat users:
 - a. One user with the role *user*, used by an Oxygen XML Developer application to connect to the license server. In the subsequent example, this user name is **John**.
 - b. Another user with the roles *admin* and *manager-gui*, used for accessing the Oxygen XML Developer license server administrative interface and the Tomcat management interface. In the subsequent example, this user name is **Mary**.

A typical way to achieve this is to edit the `tomcat-users.xml` file from your Tomcat installation (if using a Tomcat **zip/tar.gz** distribution, by default this configuration file is found in the `/TomcatInstallFolder/conf/` directory). After adding the two users, the configuration file might look like this:

```
<tomcat-users xmlns="http://tomcat.apache.org/xml"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://tomcat.apache.org/xml tomcat-users.xsd"
  version="1.0">
  <!-- ... other user and role definitions ... -->
  <role rolename="user"/>
  <role rolename="admin"/>
  <role rolename="manager-gui"/>
  <user username="John" password="user_pass" roles="user"/>
  <user username="Mary" password="admin_pass" roles="admin,manager-gui"/>
</tomcat-users>
```

4. Go to the Tomcat Web Application Manager page and log-in with the user you configured with the *manager-gui* role (**Mary** in the example above). In the **WAR file to deploy** section, choose the WAR file and click the **Deploy** button. The `oxygenLicenseServlet` application is now up and running, but the license key is not yet registered.
5. Go to the *Oxygen* license server administration page by clicking the `oxygenLicenseServlet` link in the manager page. You will need to authenticate with the user configured with the *admin* role (Mary in our example).
6. Activate the floating license key. This process involves binding your license key to your license server deployment. Once the process is completed you cannot activate the floating license with another license server. Follow these steps to activate the license:
 - a. Access the HTTP license server by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the credentials configured for the *admin* or *manager* users.
Result: A page is displayed that prompts for a license key.
 - b. Paste your floating license key into the form and press **Submit**. The browser used in the activation process needs to have Internet access.
Result: You will be redirected to an online form hosted on the Oxygen XML Developer website. This form is pre-filled with an activation code that uniquely identifies your license server deployment, and your license key.
Note: If, for some reason, your browser does not take you to this activation form, refer to the [Manual Activation Procedure](#).
 - c. Press **Activate**.
 If the activation process is successfully completed, your license server is running. Follow the on-screen instructions to configure the Oxygen XML Developer client applications.
7. By default, the license server logs its activity in the `TomcatInstallDir/logs/oxygenLicenseServlet.log` file. To change the log file location, edit the `log4j.appender.R2.File`

property from the TomcatInstallDir/webapps/oxygenLicenseServlet/WEB-INF/lib/log4j.properties configuration file.

Manual License Activation Procedure

1. Access the HTTP license server by following the link provided by the Tomcat Web Application Manager page. You will be taken to the license registration page.
2. Copy the license server activation code.
3. Go to the activation page at <http://www.oxygenxml.com/activation/>.
4. Paste the license server activation code and floating license key in the displayed form, then click **Activate**.
5. The activated license key is displayed on-screen. Copy the activated license key and paste it in the license registration page of the HTTP server.

Automatic Subscription Renewal

If the HTTP license server is configured with a subscription license, then the license server will automatically check to see if a new subscription license was purchased and will automatically download and install it for you.

Important: This automatic checking procedure implies a connection to a web service located at [oxygenxml.com](http://www.oxygenxml.com). You can deactivate this automatic behavior by deselecting the **Automatically check for subscription renewal** option from the main management page of the license server.

If the automatic renewal process fails, you can try either of the following possible solutions:

- If your server uses a proxy to connect to the Internet, go to the main management page of the license server and configure the proxy settings by clicking the **Proxy settings** link in the **Management tasks** section.
- [Manually replace the floating license key](#).

Floating License Server Management and Statistics Pages

A system administrator can manage and access information about the floating license server at: <http://hostname:port/oxygenLicenseServlet>.

This page provides access to several statistics reports and management tasks. It also shows the current status of the server and provides additional instructions for using the license server with Oxygen XML Developer.

This page includes the following links for accessing statistics or managing tasks:

- **Current Allocated Licenses** - Opens the [Allocated License Report page](#).
- **Usage Statistics** - Opens the [Floating License Usage Statistics page](#).
- **View License Key** - Use this link to view details about the license key.
- **Replace License Key** - Use this link if you need to [replace a license key](#).
- **Configuration** - Opens a page where you can configure notification settings and specify whether or not users are allowed to lock licenses. This page can be used for setting up the mail server used for sending rejection emails.

Allocated License Report Page

This report page provides a system administrator the ability to revoke or unlock current running instances of licenses and includes the following information:

- **License load** - A graphical indicator that shows how many licenses are available.
- **Floating license server status** - General information about the license server status, such as start time, license counts, rejected and acknowledged requests, average usage time, license refresh and timeout intervals, location of the license key, and the server version.
- **Current running instances** - Lists all currently acknowledged users, including user name, date and time when the license was granted, IP and MAC address of the computer where Oxygen XML Developer runs, and lock status.
 - **Revoke** - A system administrator can click on the  **Revoke** icon next to a user name to release that particular license and return it to the pool.

- **Unlock** - If a user has locked their floating license, the system administrator can also unlock it from this page.

Note: This report is also available in XML format at: <http://hostName:port/oXygenLicenseServlet/license-servlet/report-xml>.

Floating License Usage Statistics Page

This report page provides some usage statistics for the floating licenses. It is helpful for determining the number of licenses that are needed and monitoring times when licenses are consumed. It includes the following information:

- **Maximum number of concurrent licenses** - Shows the maximum number of floating licenses that can be consumed at any given time.
- **Concurrent license consumption per day** - A chart that shows the peak number of licenses that were consumed and the total number of users that were rejected, on a daily basis. This chart can be used to detect the amount of concurrent licenses that are needed to avoid having rejected users.

Tip: You can click on any bar to see the license consumption per hour for that particular day.

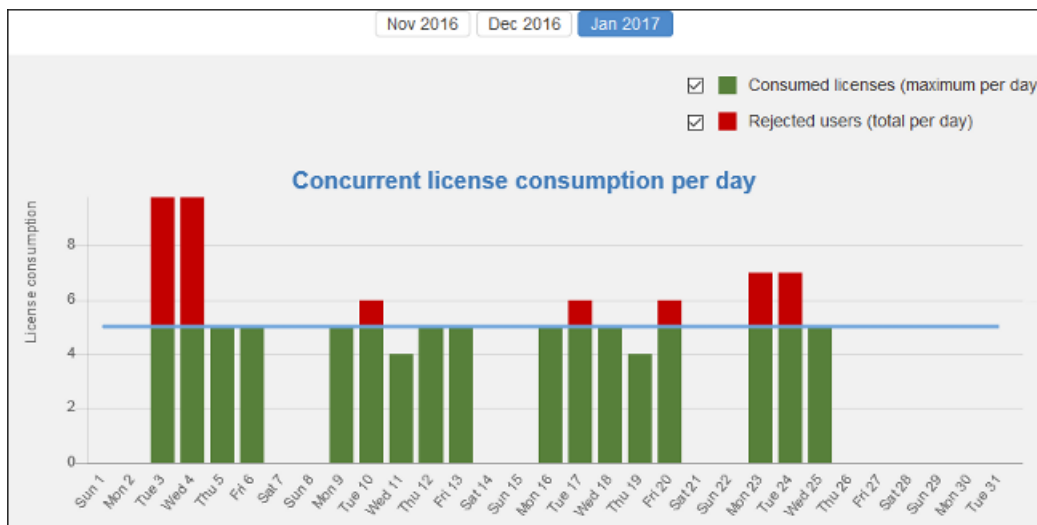


Figure 6: Concurrent License Consumption per Day Chart

- **Concurrent license consumption per hour** - A chart that shows the peak number of licenses that were consumed per hour throughout that particular month. This is useful for identifying the time of day when the most licenses were consumed.

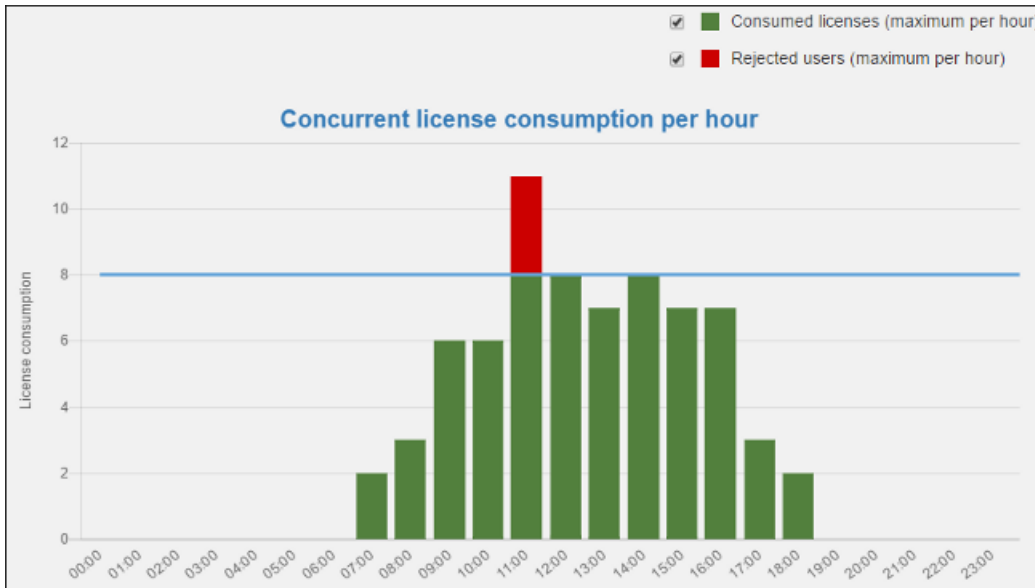


Figure 7: Concurrent License Consumption per Hour Chart

Replacing a Floating License Key in an HTTP Floating License Server

The following procedure assumes that your Oxygen XML Developer HTTP floating license server contains a previously [activated license key](#) and provides instructions for replacing it with another one. The goal of the procedure is to allow you to activate and configure the new license key without any downtime.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your HTTP floating license server with a new one, follow these steps:

1. Access the license server by following the link provided by the Tomcat Web Application Manager page.
2. Click the **Replace license key** link. This will open a page that contains details about the license currently in use.
3. Click the **Yes** button to begin the replacement procedure.
4. Paste the new floating license key in the displayed form, then click **Submit**. The browser used in the process needs to have Internet access.

You will be redirected to an online form hosted on the Oxygen XML Developer website. This form is pre-filled with an activation code that uniquely identifies your license server deployment and your license key.

Note: If for some reason your browser does not take you to this activation form, refer to the [Manual Activation Procedure](#).

5. Press **Activate**.

If the activation process is completed successfully, your license server is now running using the new license key. You can click **View license key** to inspect the key currently used by the license server.

Upgrading Your HTTP Floating License Server

The goal of the following procedure is to help you minimize the downtime when you upgrade the Oxygen XML Developer HTTP floating license server to its latest version.

Follow this procedure:

1. Access the license server by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the **admin** or **manager** credentials.
2. Click the **View license key** link and copy the displayed license key to a file for later use.
3. Go to the Tomcat Web Application Manager page, log in with the user you configured with the **manager** role, and *Undeploy* the floating license server.

4. Go to Oxygen XML Developer website and [download the HTTP license server](#).
5. Deploy the downloaded license server.
6. Access the license server by following the link provided by the Tomcat Web Application Manager page. If prompted for authentication, use the credentials configured for the **admin** or **manager** users.
7. Paste the license key into the form and register it.

Registering a Floating License for Multiple Users

If you are an administrator registering floating licenses for multiple users, you can avoid having to open Oxygen XML Developer on each machine and configuring the registration details by using the following procedure:

1. Reset the registration details:
 - a. Select **Register** from the **Help** menu.
 - b. Click **OK** without entering any information in this dialog box.
 - c. Click **Reset** and restart the application.
2. Register the license using one of the [floating license registration procedures](#).
3. Copy the `license.xml` file from the Oxygen XML Developer [preferences directory](#) to the installation folder on each installation to be registered.

Setting up a TCP Floating License Server Using a 32-bit Windows Installer

This section contains information about setting up the TCP floating license server as a Windows process.

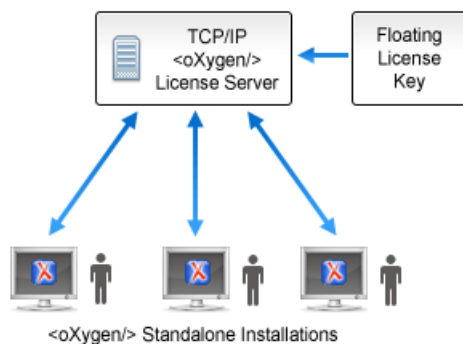


Figure 8: TCP Floating License Server (Process in Windows)

Installation Steps

1. Download the license server installation kit for Windows from the [Oxygen XML Developer website](#).
2. Run the downloaded installer and follow the on-screen instructions.

By default, the installer installs the license server as a Windows service. Optionally, you have the ability to start the Windows service automatically at Windows startup or create shortcuts on the **Start** menu for starting and stopping the Windows service manually. If you want to manually install, start, stop, or uninstall the server as a Windows service, run the following scripts from a command line as an Administrator:

- `installWindowsService.bat [serviceName]` - Installs the server as a Windows service with the name `serviceName`. The parameters for the license key folder and the server port can be set in the `oXygenLicenseServer.vmoptions` file.
- `startWindowsService.bat [serviceName]` - Starts the Windows service.
- `stopWindowsService.bat [serviceName]` - Stops the Windows service.
- `uninstallWindowsService.bat [serviceName]` - Uninstalls the Windows service.

Note: If you do not provide the `serviceName` argument, the default name `oXygenLicenseServer` is used.

If the license server is installed as a Windows service, the output and error messages are automatically redirected to the following log files that are created in the install folder:

- `outLicenseServer.log` - Standard output stream of the server.
- `errLicenseServer.log` - Standard error stream of the server.

3. Manually add the oXygenLicenseServer.exe file in the Windows Firewall list of exceptions. Go to **Control Panel > System and Security > Windows Firewall > Allow a program or feature through Windows Firewall > Allow another program** and browse for oXygenLicenseServer.exe from the Oxygen XML Developer License Server installation folder.
4. Floating licenses require activation prior to use. More details are available either on-screen (if the license server is started in a command line interface) or in the outLicenseServer .log log file.

Note: A license server can only manage one license key (which can cover any number of floating licenses). If you have multiple license keys for the same Oxygen XML Developer version and you want to have all of them managed by the same server, or if you have a multiple-user floating license and you want to split it between two or more license servers, please [contact our support team](#) and ask for a new license key.

Replacing a Floating License Key in a TCP Floating License Server

The following procedure assumes that your Oxygen XML Developer TCP floating license server contains a previously [activated license key](#) and provides instructions for replacing the activated license key with another one. The goal of the procedure is to minimize the license server downtime during the activation step of the new license key.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your floating license server with a new one, follow these steps:

1. Stop the service that runs the floating license server.
2. Locate the folder that holds the previous activated license key (by default, it is named license and it is located in the installation directory of the license server).
3. Remove the license .txt file and try to restart the server. Since the file that stores the license key is missing, [the server will fail to start](#).
4. Find the license activation procedure in the on-screen instructions (if the license server is started in a **command line interface**) or in the outLicenseServer .log log file.
5. After you copy the activated license key in the license .txt file, restart the license server.

Upgrading Your TCP Floating License Server

The goal of the following procedure is to help you minimize the downtime generated when you upgrade the Oxygen XML Developer floating license server to its newest version.

Follow this procedure:

1. Go to the Oxygen XML Developer website and download the [latest floating license server](#).
2. Run the installation kit.
3. Leave the default **Update the existing installation** option selected. This will ensure that some options set in the previous version (namely the installation folder, port number, and the floating license key in use) of the license server will be preserved.
4. Follow the on-screen instructions to complete the installation process.

Setting up a TCP Floating License Server Using All-Platforms Distribution

This installation method can be used for running the TCP license server on any platform where a Java virtual machine can run (OS X, Linux/Unix, Windows).

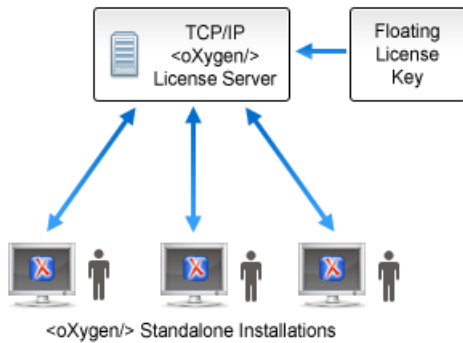


Figure 9: TCP Floating License Server (All-Platforms Distribution)

Installation Steps

1. Ensure that a Java runtime version 6 or later is installed on the server machine.
2. Download the license server installation kit for your platform from the [Oxygen XML Developer website](#).
3. Unzip the installation kit into a new folder.
4. Start the server using the startup script from a command line console.

The startup script is called `licenseServer.sh` for OS X and Unix/Linux or `licenseServer.bat` for Windows. The following parameters are accepted:

- `licenseDir` - The path of the directory where the license files will be placed. The default value is `license`.
- `port` - The TCP port number used to communicate with Oxygen XML Developer instances. The default value is **12346**.

Example: The following is an example of the command line for starting the license server on Unix/Linux and OS X:

```
sh licenseServer.sh myLicenseDir 54321
```

5. Floating licenses require activation prior to use. Follow the on-screen instruction to complete the license activation process.

Replacing a Floating License Key in a TCP Floating License Server

The following procedure assumes that your Oxygen XML Developer TCP floating license server contains a previously [activated license key](#) and provides instructions for replacing the activated license key with another one. The goal of the procedure is to minimize the HTTP license server downtime during the activation step of the new license key.

This is useful if, for instance, you want to upgrade your existing license to the latest version or if you receive a new license key [that accommodates a different number of users](#).

To replace a floating license key that is activated on your floating license server with a new one, follow these steps:

1. Stop the process that runs the floating license server.
2. Locate the folder that holds the previous activated license key (by default, it is named `license` and it is located in the installation directory of the license server).
3. Remove the `license.txt` file and try to restart the server. Since the file that stores the license key is missing, the server will fail to start.
4. Find the license activation procedure in the on-screen instructions.
5. After you copy the activated license key in the `license.txt` file, restart the license server.

Upgrading Your TCP Floating License Server

The goal of the following procedure is to help you minimize the downtime generated when you upgrade the Oxygen XML Developer TCP floating license server to its newest version.

Follow this procedure:

1. Stop the current license server process.
2. Locate and open the floating server startup script. It should look like this:

```
sh licenseServer.sh pathToLicenseDir 54321
```

3. Make a note of the path to the license directory (in our example is `pathToLicenseDir`) and the port number (in our example is 54321).
4. Go to the license directory and copy the license key file (`license.txt`) for later use.
5. Go to the Oxygen XML Developer website and download the [all-platforms floating license server installation kit](#).
6. Unzip the archive and overwrite the content of your current floating license server installation.
7. Copy the license key file (`license.txt`) saved in step 4 to license directory of the floating license server installation.
8. Edit the floating server startup script and configure with the info you made note of in step 3.
9. Start the floating license server process.

Common Problems: Floating License Server Errors

This section includes some common problems that may appear when setting up a floating license server.

Machine Signature Mismatch Error

Problem

During the floating license activation process, the license key becomes bound to a particular license server deployment. This means that a code that uniquely identifies your license server deployment (called *Machine Signature*) is sent to the Oxygen XML Developer servers, which in turn will sign the license key. The *Machine Signature* is computed from the list of network interfaces of the machine where you deployed the floating license.

Causes

When starting the license server, if you receive an error stating that your server's Machine Signature does not match the one found in your license key, there are several possible causes:

1. You have moved your floating license key to a new machine that hosts your license server.
2. You have changed, added, or activated a new network interface in the machine that hosts your license server.

Note: A specific example of when this could happen, is if you activate/deactivate the Bluetooth module or the WiFi module.

Solutions

- Revert back to your previous configuration.
- If this is not possible, contact our [support team](#).

Windows Service Reports Incorrect Function Error When Starting (TCP Server)

Problem

My TCP floating license server reports an "Incorrect Function" error message when starting the Windows service.

Cause

This usually appears because the Windows service launcher cannot locate a Java virtual machine on your system.

Solution

Make sure that you have installed a 32-bit Java SE from Oracle (or Sun) on the system: <http://www.oracle.com/technetwork/java/javase/downloads/index.html>.

Windows Service Reports Process Terminated Unexpectedly Error (TCP Server)

Problem

My TCP floating license server reports a "Process Terminated Unexpectedly" error message for the Windows service.

Cause

This error message appears if the Windows service launcher quits immediately after being started. This problem usually happens because the license key has not been correctly deployed (license.txt file in the license folder).

Solution

Re-deploy your license key. For more information, see the [Setting up a Floating License Server section](#).

Upgrading

From time to time, upgrades and patch versions of Oxygen XML Developer are released to provide enhancements that fix problems and add new features.

By default, Oxygen XML Developer automatically checks for new versions at start up. If a newer version is detected, a dialog box will automatically be displayed that provides information about the type of upgrade or update that is available. If the newer version includes a critical bug fix, this dialog box will continue to be displayed every time Oxygen XML Developer is launched. To disable this check, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and deselect **Automatic Version Checking**.

To check for new versions manually, go to **Help > Check for New Versions**. This opens a dialog box that displays information about whether or not a newer version is available.

Upgrading Oxygen XML Developer on Windows/Linux

What is Preserved During an Upgrade?

When you install a new version of Oxygen XML Developer, some data is preserved and some is overwritten. If there is a previous version of Oxygen XML Developer already installed on your computer, it can coexist with the new one, which means you do not have to uninstall it.

If you install over a previously installed version:

- All the files from its install directory will be removed, including any modification in [framework](#) files, XSLT stylesheets, [XML Catalogs](#), and templates.
- All global user preferences are preserved in the new version.
- All project preferences will be preserved in their project files.
- Any custom [frameworks](#) that were stored outside the installation directory (as configured in [Document type associations > Locations](#)) will be preserved and will be found by the new installation.

If you install in a new directory:

- All the files from the old install directory will be preserved, including any modification in [framework](#) files, XSLT stylesheets, [XML Catalogs](#), and templates. However, these modifications will not be automatically imported into the new installation.
- All global user preferences are preserved in the new version.
- All project preferences will be preserved in their project files.
- Any custom [frameworks](#) that were stored outside the installation directory (as configured in [Document type associations > Locations](#)) will be preserved and will be found by the new installation.

How to Upgrade Oxygen XML Developer on Windows or Linux

1. Upgrading to a new version might require a new license key. To check if your license key is compatible with the new version, select **Help > Check for New Version**. Note that the application needs an Internet connection to check the license compatibility.
2. Download and install the new version according to the instructions for your platform and the type of installer you selected.
3. If you installed from an archive (as opposed to an executable installer) you may have to update any shortcuts you have created or modify the system PATH to point to the new installation folder.
4. Restart Oxygen XML Developer.
5. If you require a new license for your upgrade, install it now according to the procedure for your platform and the type of installer you selected.

Upgrading Oxygen XML Developer on OS X

What is Preserved During an Upgrade?

When you install a new version of Oxygen XML Developer, first you need to remove or rename the old installation directory. By renaming the directory, it can coexist with the new installation and the following data will be preserved:

- All the files from the old install directory will be preserved, including any modification in [framework](#) files, XSLT stylesheets, [XML Catalogs](#), and templates. However, these modifications will not be automatically imported into the new installation.
- All global user preferences are preserved in the new version.
- All project preferences will be preserved in their project files.
- Any custom [frameworks](#) that were stored outside the installation directory (as configured in [Document type associations > Locations](#)) will be preserved and will be found by the new installation.

How to Upgrade Oxygen XML Developer on OS X

1. [Uninstall the current version of Oxygen XML Developer](#) or rename the installation directory (for example, Oxygen XML Editor.old).
2. Upgrading to a new version might require a new license key. To check if your license key is compatible with the new version, select **Help > Check for New Version**. Note that the application needs an Internet connection to check the license compatibility.
3. Download and install the new version according to the instructions for your platform and the type of installer you selected.
4. If you installed from an archive (as opposed to an executable installer) you may have to update any shortcuts you have created or modify the system PATH to point to the new installation folder.
5. Restart Oxygen XML Developer.
6. If you require a new license for your upgrade, install it now according to the procedure for your platform and the type of installer you selected.

Installing and Updating Add-ons

Oxygen XML Developer provides an [add-on](#) mechanism that can automatically discover and install [plugins](#) from a remote location.

Note: *Frameworks* that you install through the add-ons system are read-only.

Installing Add-ons

To install an add-on that is hosted on a remote update site, follow these steps:

1. Go to **Help > Install new add-ons**.
2. In the displayed dialog box, enter or paste the update site that hosts the add-on in the **Show add-ons from** field (or select it from the drop-down menu, if applicable). The default add-ons are hosted on <http://>

www.oxygenxml.com/InstData/Addons/default/updateSite.xml. If you want to see a list of all the default and sample add-ons that are available on the *Oxygen* remote update sites, choose **ALL AVAILABLE SITES** from the drop-down menu. The add-ons list contains the name, status, update version, Oxygen XML Developer version, and the type of the add-on (either **framework**, or **plugin**). A short description of each add-on is presented under the add-ons list.

Note: To see all the versions of the add-ons, deselect **Show only compatible add-ons** and **Show only the latest version of the add-ons**. Incompatible add-ons are shown only to acknowledge their presence on the remote update site, but you cannot install an incompatible add-on.

3. Choose the add-ons you want to install, press the **Next** button, then follow the on-screen instructions.

Note: Accepting the license agreement of the add-on is a mandatory step in the installation process.

Note: All add-ons are installed in the extensions directory inside the Oxygen XML Developer [preferences directory](#).

Managing installed add-ons

To manage the installed add-ons, follow these steps:

1. Go to **Help > Manage add-ons**
2. The displayed dialog box presents a list of your installed add-ons along with various information (such as the installed version, the compatible *Oxygen* version, and more). The **Status** column will indicate if an update is available for a particular add-on. Also, you can click on the row for any particular add-on that has an update available to see details for the update (displayed in the preview pane below the list of add-ons).
3. To update an add-on, select the checkbox for the specific add-on, then press **Update** to update it (or **Uninstall** to remove it). If there is a newer version of the add-on available, Oxygen XML Developer will download the package and install it. Follow the on-screen instructions to complete the installation process.

Note: Accepting the license agreement of the add-on is a mandatory step in the installation process.

Checking for add-on updates

To check if there are available updates for the installed add-ons, go to **Help > Check for add-ons updates**. This action displays updates that are compatible with the current Oxygen XML Developer version.

Related Information:

[Packing and Deploying Plugins or Frameworks as Add-ons](#)

Uninstalling

How to Uninstall Oxygen XML Developer



CAUTION: The following procedure will remove Oxygen XML Developer from your system. **All data stored in the installation directory will be removed, including any customizations or any other data you have stored within that directory. Make a back up of any data you want to keep before uninstalling Oxygen XML Developer.**

1. Backup any data you want to keep from the Oxygen XML Developer installation folder.
2. Remove the application according to your operating system:
 - **Windows** - Use the appropriate uninstaller shortcut provided with your OS.
 - **OS X or Linux** - Manually delete the installation folder and all its contents.
3. If you want to remove the user preferences:
 - **Windows** - Remove the directory: %APPDATA%\Roaming\com.oxygenxml.developer (usually %APPDATA% has the value: [user-home-dir]\Application Data). Note that this directory is hidden.
 - **OS X** - Remove the directory: Library/Preferences/com.oxygenxml.developer of the user home folder.
 - **On Linux**, remove the directory: .com.oxygenxml.developer from the user home directory.

Unattended Uninstall

The unattended uninstall procedure is available only on Windows and Linux.

1. Run the uninstaller executable from command line with the **-q** parameter.
 - **Windows** - The uninstaller executable is called `uninstall.exe` and is located in the *Oxygen* installation directory.
 - **Linux** - The uninstaller executable is called `uninstall` and is located in the *Oxygen* installation directory.

Configuring Oxygen XML Developer

Topics:

- [Preferences](#)
- [Configuring Options](#)
- [Associating a File Extension with Oxygen XML Developer](#)
- [Configuring the Layout of the Views and Editors](#)
- [Configuring Toolbars](#)
- [Import/Export Transformation or Validation Scenarios](#)
- [Editor Variables](#)
- [Custom System Properties](#)
- [Localizing the User Interface](#)
- [Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer](#)
- [How to Increase the Amount of Available Memory](#)

This chapter presents all the user preferences and options that allow you to configure various features and aspects of the application itself. It also includes information about storing and sharing options, importing and exporting options or scenarios, customizing system properties, setting startup parameters, and the [editor variables](#) that are available for customizing user-defined commands..

Preferences

You can configure Oxygen XML Developer options using the **Preferences** dialog box.

To open the preferences dialog box, go to **Options > Preferences**.

You can select the preference page you are interested in from the tree on the left of the **Preferences** dialog box. You can filter the tree by using the filter text box and the following buttons are available to the right of the text box:

-  **Expand All** - Expands the structure of the tree to show all preference pages.
-  **Collapse All** - Collapses the structure of the tree to show only the 1st level preference pages.
-  **Project-Level Options Only** - If toggled on, it filters the tree to only show the preference pages that are [saved at project level](#).

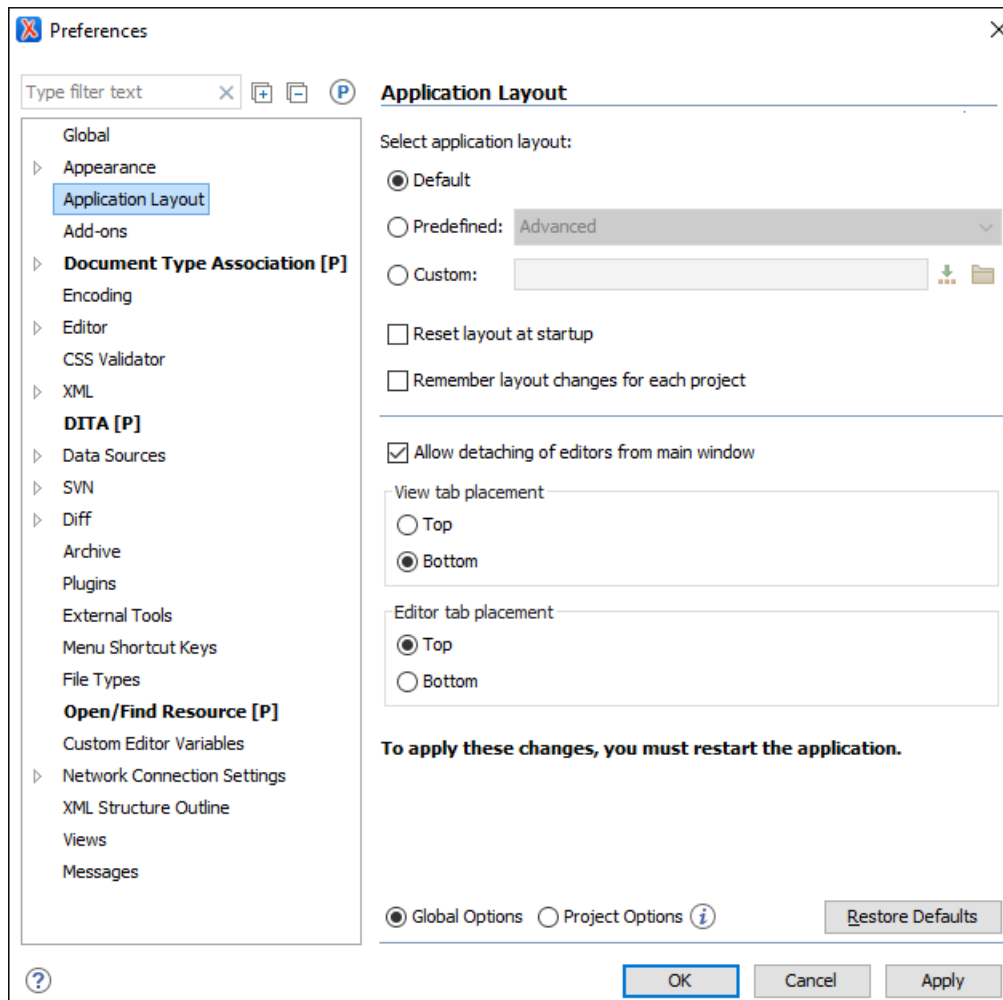


Figure 10: Preferences Dialog Box

Press  or **F1** for help on any preferences page.

Some preference pages include a option to control how the options are stored, either as **Global Options** or **Project Options**.




Figure 11: Controlling the Storage of the Preferences

You can restore options to their default values by pressing the **Restore Defaults** button, available in each preferences page.

Preferences Directory Location

A variety of resources (such as global options, license information, and history files) are stored in a preferences directory (com.oxygenxml) that is in the following locations:

- **Windows (Vista, 7, 8, 10)** - [user_home_directory]\AppData\Roaming\com.oxygenxml
- **Windows XP** - [user_home_directory]\Application Data\com.oxygenxml
- **Mac OS X** - [user_home_directory]/Library/Preferences/com.oxygenxml
- **Linux/Unix** - [user_home_directory]/.com.oxygenxml

Global Preferences

The global options cover a number of aspects of the overall operation of Oxygen XML Developer. To configure the **Global** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Global**.

The following options are available in the **Global** preferences page:

Automatic Version Checking

If this option is selected, Oxygen XML Developer will check for a new version on startup.

Check for notifications

If selected (default value), the application will check for various types of messages from the Oxygen XML Developer website and they will be displayed in the status bar. The types of messages include the addition of new videos on the website, the announcement of upcoming webinars and conferences where the Oxygen XML Developer team will participate, and more.

Language

This option specifies the language used in the user interface. You can choose between English, French, German, Dutch, or Japanese. You must restart Oxygen XML Developer for the change to take effect.

Other language

This option sets the language used in the user interface using an interface localization file. For details about creating this file, see [Localizing the User Interface](#) on page 159. You can use this option to set the language of the user interface to a language that is not shipped with Oxygen XML Developer.

Note: If some interface labels are not rendered correctly after restarting the application, (for example, Chinese or Korean characters are not displayed correctly), make sure that your operating system has the appropriate language pack installed (for example, the East-Asian language pack).

Line separator

This option sets the line separator used when saving files. Use **System Default** to select the normal line separator for your OS. If you want the existing file separator of a file to be maintained, regardless of your current OS, select **Detect the line separator on file open**.

Detect the line separator on file open

When this option is selected, the editor detects the line separator when a file is loaded and it uses it when the file is saved. New files are saved using the line separator defined by the [Line separator option](#).

Default Internet browser

This option sets the Web browser that Oxygen XML Developer will use to do the following:

- Open (X)HTML or PDF transformation results.
- Open a web page (for example, pointing to specific paragraphs in the W3C recommendation of XML Schema if there are XML Schema validation errors).

If you leave this setting blank, the system default browser will be used.

Open last edited files from project

When this option is selected, Oxygen XML Developer opens the files you had open the last time you used a project whenever you open the application or switch to that project.

Check opened files for file system changes

When this option is selected, Oxygen XML Developer checks the content of the all opened editors to see if they have been updated by another application. If the file has changed, Oxygen XML Developer will ask you if you want to reload the file.

Auto update unmodified editors on file system changes

If this option is selected, Oxygen XML Developer automatically updates unmodified editors if the edited file changes externally.

Beep on operation finished

When this option is selected, Oxygen XML Developer beeps when a validation or transform action ends. Different tones are used for success and failure. The tones used may depend on the sound settings in your operating system.

Show memory status

When this option is selected, the memoryOxygen XML Developer uses is displayed in the status bar. To free memory, click the  **Free unused memory** button located at the right side of the status bar. The memory status bar turns yellow or red when Oxygen XML Developer uses too much memory. You can change the amount of memory available to Oxygen XML Developer by [changing the parameters of the application launcher](#).

Order of switching between editor tabs

This option specifies the order for [switching between opened file tabs when using Ctrl + Tab \(Command + Tab on OS X\) or Ctrl + Shift + Tab \(Command + Shift + Tab on OS X\)](#). You can choose between:

- **Recently used order** - Switches to the most recently used tab.
- **Visual order** - Switches to the next tab in visual order.

File Chooser Dialog section

Use platform file chooser (Available on Windows and Mac OS X)

This option is selected by default and it specifies that the native file chooser is used. You can deselect this option if you want the Java Swing file chooser to be used instead. Also, if Oxygen XML Developer encounters a problem using the native file chooser, this option will automatically be deselected.

Opens in

This options specifies the directory that will be shown when the [Open file dialog box](#) is displayed. You can choose between:

- **Directory of the edited file** - The folder where the currently edited file is stored will be displayed.
- **Last visited directory** - The last visited folder will be displayed.

Show hidden files and directories

If this option is selected, Oxygen XML Developer shows system hidden files and folders in the file browser dialog box and the folder browser dialog box.

Tip: On Mac OS X, you need to press **Command + Shift + Period** in the file browser to show hidden files.

Appearance Preferences

This preferences page contains various options that allow you to change the appearance of the user interface of Oxygen XML Developer. To configure the **Appearance** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Appearance**.

The following options are available in the **Appearance** preferences page:

Look and Feel

This option allows you to change the graphic style (look and feel) of the user interface. Depending on the operating system, you can choose between various predefined style options.

Theme

This option allows you to choose predefined color themes that will be applied over the entire user interface. You can select between the following:

- **Light** (default theme in Windows)
- **Classic** (default theme in MAC OS)

Note: In Windows, if a high contrast theme is detected and the **Theme** option is set to **Classic** and the [Look and Feel option](#) is set to **Default** or **Windows**, Oxygen XML Developer inherits the high contrast theme colors that are set in the operating system.

- **Graphite**
- **Ultramarine**

You can also change various appearance related options in other preference pages for the selected theme by clicking on the various links in this section.

Custom Themes

You can also create custom themes to share with others or use in other installations of Oxygen XML Developer. To create a custom theme, follow these steps:

1. Select a **Theme** to use as a base.
2. Configure the desired options in any of the option pages listed in this preferences page.
3. Click **Export** and specify a name for your custom theme. If you save the theme to the default file path, your custom theme will immediately appear in the **Theme** drop-down list. Otherwise, if you save it to another location, you can use the **Import button** to make it appear in the drop-down list.

Note: In OS X (starting with Yosemite), if you choose Graphite for the **Theme**, it is recommended that you select the **Use dark menu and Dock** option that is found in **System Preferences > General**.

Theme preview area

Displays a preview of the current **Theme selection** (available for predefined color themes).

Theme management section

Reset

Resets the theme to its default values (this option is available when the theme is modified).

Rename

Changes the name of the theme (not available for default or predefined themes).

Delete

Removes the selected theme (not available for default or predefined themes).

Import

Allows you to import a color theme from an XML theme file. You can use this option to load an exported **custom theme**.

Export

Allows you to export the current color theme into an XML theme file that can then be shared with others or imported into another installation of Oxygen XML Developer.

Configure icon saturation and brightness link

This link is available if you are using a dark **theme** (such as **Graphite** or **Ultramarine**). It opens a dialog box that allows you to configure the saturation and brightness for all the icons in Oxygen XML Developer.

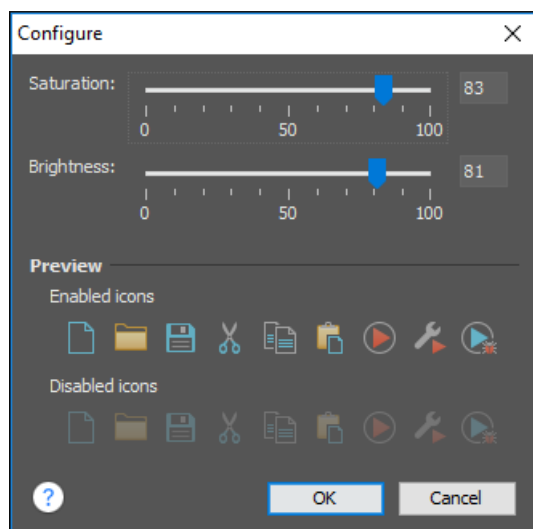


Figure 12: Configure Icon Saturation and Brightness Dialog Box

Colors Preferences

Oxygen XML Developer allows you configure the colors for frames, dialog boxes, controls, and commands. To configure the **Colors**, open the **Preferences dialog box (Options > Preferences)** and go to **Appearance > Colors**.

Clicking the color button for any of the options opens a **Choose color** dialog box. It includes several tabs that allow you to configure the color in numerous ways. This page allows you to select and configure the color for the following:

Background Colors

Background

Background color for various general user interface items.

Components background

Background color for various components (such as text fields, views, tables, and dialog boxes).

Components selection background

Background color for the current selections in certain components, such as some views and panes.

Components inactive selection background

Background color for a selection in a view that is not the current focus.

Menus, toolbars and frame background

Background color for specific components such as menus, toolbars, and the application frame.

Menus and toolbars selection background

(This option is not available for Mac OS) Background color for menu selections and toolbar buttons.

View titles background

Background color for the titles of view and tabs.

Status bar background

Background color of the status bar at the bottom of the editor.

Foreground Colors

Foreground

Foreground color for various general user interface items.

Component selection foreground

Foreground color for the current selection.

Disabled foreground

Foreground color for various components that are not the current focus (such as views other than the currently selected one).

Link foreground

Foreground color for links in views and dialog boxes.

View titles foreground

Foreground color for the title bar of views.

Status bar foreground

Foreground color for the text in the status bar at the bottom of the editor.

Other Colors

Borders and table grids

Color for certain borders and table grid lines.

Text component border

Color for the borders of text fields and drop-down lists.

View/Editor tabs border

Color for the borders of views and tabs.

Scroll bars, chevrons

Color for scroll bars (navigation bars) and chevrons (button to expand a non-visible area).

Separator

Color for the separators in toolbars, menus, and dialog boxes.

Note: You must restart the application for your changes to be applied.

Fonts Preferences

Oxygen XML Developer allows you to choose the fonts to be used in the **Text**, **Design**, and **Grid** editor modes. To configure the font options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Appearance > Fonts**.

The following options are available:

Editor

Allows you to choose the font that will be used in the editor.

Note: On Mac OS X, the default font, Monaco, cannot be rendered in bold.

Schema default font

This option allows you to choose the font to be used in:

- The **Design** mode of the [XML Schema editor](#).
- Images with schema diagram fragments that are included in the HTML documentation generated from an XML Schema.

Text antialiasing

This option allows you to set the text anti-aliasing behavior:

- **Default** - Allows the application to use the setting of the operating system, if available.
- **On** - Sets the text anti-aliasing to pixel level.
- **Off** - Disables text anti-aliasing.
- Sub-pixel anti-aliasing modes, such as GASP, LCD_HRGB, LCD_HBGR, LCD_VRGB, and LCD_VBGR.

Text components

This option allows you to choose the font to be used in text boxes within the interface.

GUI

This option allows you to choose the font to be used for user interface labels.

View titles font

This option allows you to choose the font to be used in the titles of the various views that are opened within the interface.

Note: You must restart the application for your changes to be applied.

Related Information:

[Changing the Font Size in the Editor](#) on page 362

Application Layout Preferences

Oxygen XML Developer offers various [perspectives](#) and views that you can arrange in a variety of layouts to suit your needs.

To configure the application layout options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Application Layout**. The following options are available:

Select application layout

You can choose between the following three layouts:

Default

Uses the default layout for all [perspectives](#). Any modification of this layout (such as closing views, displaying views, or a new view arrangement) is saved on exit and reloaded at start-up.

Predefined

Allows you to choose one of the predefined layouts:

- **Advanced** - All views are displayed.
- **Basic** - Only the [Project view](#) and [Outline view](#) are visible. Recommended when you edit XML content and you need maximum screen space.
- **Schema development** - The [Project](#), [Component Dependencies](#), [Resource Hierarchy/Dependencies](#), [Outline](#), [Palette](#), and [Attributes](#) views are displayed.

- **XQuery development** - The [Project](#), [Outline](#), [XSLT/XQuery Input](#), [XPath/XQuery Builder](#), and [Transformation Scenarios](#) views are displayed.
- **XSLT development** - The [Project](#), [Component Dependencies](#), [Resource Hierarchy/Dependencies](#), [Outline](#), [Attributes](#), [Model](#), [XSLT/XQuery Input](#), [XPath/XQuery Builder](#), and [Transformation Scenarios](#) views are displayed.

Custom

Allows you to specify a custom layout to be used. You can save your preferred layout using **Window > Export Layout**, then enter the location of the saved layout file in this setting.

Reset layout at startup

When this option is selected, Oxygen XML Developer forgets any changes made to the layout during a session and reloads the default layout the next time it is started. This is useful when you want to keep a fixed layout from one session to another.

Remember layout changes for each project

When this options is selected, Oxygen XML Developer saves layouts individually for each project. When you switch projects, the layout you last used for that project is loaded automatically.

Allow detaching of editors from main window

When this options is selected, you can drag and drop an editor window outside of the main screen. This is useful especially when you are using two monitors and you want to view files side by side.

Note: If the main screen is maximized, you cannot drag and drop an editor outside of it.

View tab placement

Specifies whether the *View* tabs are located at the top or bottom of the window.

Editor tab placement

Specifies whether the *Editor* tabs are located at the top or bottom of the window.

The changes you make to any layout are preserved between working sessions. The predefined *layout* files are saved in the preferences directory of Oxygen XML Developer.

For more information about configuring the user interface of Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/anwjepfAdEk>

Add-ons Preferences

You can use [add-ons](#) to enhance the functionality of Oxygen XML Developer. To configure the **Add-ons** options, open the **Preferences** dialog box (**Options > Preferences**) and go to **Add-ons**.

The following options are available in this preferences page:

Enable automatic updates checking

When this option is selected, Oxygen XML Developer will automatically search for available updates.

Add-on Sites URLs

This is a list of the URLs for the add-on sites. You can add, edit, and delete sites in this list by using the buttons below the list.

Document Type Association Preferences

Oxygen XML Developer uses [document type associations](#) to associate a [document type](#) with a set of functionality provided by a [framework](#). To configure the **Document Type Association** options, open the **Preferences** dialog box (**Options > Preferences**) and go to **Document Type Association**.

The following actions are available in this preferences page:

Discover more frameworks by using add-ons update sites

Click on this link to specify URLs for *framework* add-on update sites.

Document Type Table

This table presents the currently defined [frameworks](#) ([document type associations](#)), sorted by priority and alphabetically. Each edited document type has a set of association rules (used by the application to detect the proper document type association to use for an opened XML document). A rule is described by:

- **Namespace** - Specifies the namespace of the root element from the association rules set (* (*any*) by default). If you want to apply the rule only when the root element has no namespace, leave this field empty (remove the **ANY_VALUE** string).
- **Root local name** - Specifies the local name of the root element (* (*any*) by default).
- **File name** - Specifies the name of the file (* (*any*) by default).
- **Public ID** - Represents the Public ID of the matched document.
- **Java class** - Presents the name of the Java class, which is used to determine if a document matches the rule. This Java class should implement the `ro.sync.ecss.extensions.api.DocumentTypeCustomRuleMatcher` interface.

New

Opens a [Document type configuration dialog box](#) that allows you to add a new *framework*.

Edit

Opens a [Document type configuration dialog box](#) that allows you to edit an existing *framework*.

Note: If you try to edit an existing *framework* when you do not have write permissions to its storage location, a dialog box will be shown asking if you want to extend it.

Duplicate

Opens a [Document type configuration dialog box](#) that allows you to duplicate the configuration of an existing *framework*. This will create a snapshot of the *framework* in its current form. It is merely a copy of the document type and will not evolve along with the base document type like the **Extend** action does.

Extend

Opens a [Document type configuration dialog box](#) that allows you to extend an existing *framework*. You can add or remove functionality starting from a base document type. All of these changes will be saved as a patch. When the base document type is modified and evolves (for example, from one application version to another) the extension will evolve along with the base document type, allowing it to use the new actions added in the base document type.

Delete

Deletes the selected *framework* (document type).

Enable DTD/XML Schema processing in document type detection

When this option is selected (default value), the matching process also examines the DTD/XML Schema associated with the document. For example, the fixed attributes declared in the DTD for the root element are also analyzed, if this is specified in the association rules. This is especially useful if you are writing DITA customizations. DITA topics and maps are also matched by looking for the DITAArchVersion attribute of the root element. This attribute is specified as default in the DTD and it is detected in the root element, helping Oxygen XML Developer to correctly match the DITA customization.

Only for local DTDs/XML Schemas

When this option is selected (default value), only the local DTDs / XML Schemas will be processed.

Enable DTD/XML Schema caching

When this option is selected (default value), the associated DTDs or XML Schema are cached when parsed for the first time, improving performance when opening new documents with similar schema associations.

Locations Preferences

Oxygen XML Developer allows you to change the location where [frameworks](#) (document types) are stored, and to specify additional *framework* directories. The **Locations** preferences page allows you to specify the main frameworks folder location. You can choose between the **Default** directory (`[OXYGEN_INSTALL_DIR] / frameworks`) or a **Custom** specified directory. You can also change the current frameworks folder location value using the `com.oxygenxml.editor.frameworks.url` system property set in either the [vmoptions configuration files](#) or in the [startup scripts](#).

A list of additional frameworks directories can also be specified. The application will look in each of those folders for additional document type configurations to load. Use the **Add**, **Edit** and **Delete** buttons to manage the list of folders.

A document type configuration (*framework*) can be loaded from the following locations:

- Internal preferences - The document type configuration is stored in the application [Internal preferences](#).
- Additional *framework* directories - The document type configuration is loaded from one of the specified **Additional frameworks directories** list.
- Add-ons - An *add-on* can contribute a *framework*. You can manage the add-ons locations in the [Add-ons preferences page](#).
- The frameworks folder - The main folder containing *framework* configurations.

All loaded document type configurations are first sorted by priority, then by document type name and then by load location (in the exact order specified above). When an XML document is opened, the application chooses the first document type configuration from the sorted list that matches the specific document.

All loaded document type configurations are first sorted by priority, then by document type.

Document Type Configuration Dialog Box

The **Document Type** Configuration dialog box allows you to create or edit a *framework* (document type). It is displayed when you use the **New**, **Edit**, **Duplicate**, or **Extend** buttons in the [Document Type Association preferences page](#) (open the [Preferences dialog box \(Options > Preferences\)](#) and go to **Document Type Association**).

The configuration dialog box includes the following fields and sections:

- **Name** - The name of the *framework*. This will be displayed as its name in the **Document Type** column in the [Document Type Association preferences page](#).
 - **Priority** - Depending on the priority level, Oxygen XML Developer establishes the order in which the existing *frameworks* are evaluated to determine the type of a document you are opening. It can be one of the following: Lowest, Low, Normal, High, or Highest. You can set a higher priority to *frameworks* you want to be evaluated first.
 - **Description** - A detailed description of the *framework*.
 - **Storage** - Displays the type of location where the *framework* configuration file is stored. Can be one of: **External** (*framework* configuration is saved in a file) or **Internal** (*framework* configuration is stored in the application's internal options).
- Note:** If you set the **Storage** to **Internal** and the *framework* configuration is already stored in a *framework* file, the file content is saved in the application's internal options and the file is removed.
- **Initial edit mode** - Sets the default edit mode when you open a document for the first time.
 - **Configuration Tabs** - The bottom section of the dialog box includes various tabs where you can configure numerous options for the *framework*.

Association Rules Tab

By combining multiple association rules you can instruct Oxygen XML Developer to identify the type of a document. An Oxygen XML Developer *association rule* holds information about **Namespace**, **Root local name**, **File name**, **Public ID**, **Attribute**, and **Java class**. Oxygen XML Developer identifies the type of a document when the document matches at least one of the *association rules*. This tab give you access to a **Document type rule** dialog box that you can use to create *association rules* that activate on any document matching all the criteria defined in the dialog box.

To create a new association rule, click the  **New** button at the bottom of the **Association Rules** tab, or to edit an existing rule, click the  **Edit** button.

Figure 13: Document Type Rule Dialog Box

Tip: You can use wildcards (? and *) or [editor variables](#) in the **Document Type Rule** dialog box, and you can enter multiple values by separating them with a comma.

To open the **Association Rules** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, and click on the **Association Rules** tab.

In the **Association rules** tab, you can perform the following actions:

New

Opens the **Document type rule** dialog box allowing you to create *association rules*.

Edit

Opens the **Document type rule** dialog box allowing you to edit the properties of the currently selected *association rule*.

Delete

Deletes the currently selected *association rules* from the list.

Move Up

Moves the selected *association rule* up one spot in the list.

Move Down

Moves the selected *association rule* down one spot in the list.

Schema Tab

In the **Schema** tab, you can specify a schema that Oxygen XML Developer uses if an XML document does not contain a schema declaration and no default validation scenario is associated with it.

To open the **Schema** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, and click on the **Schema** tab.

This tab includes the following options for defining a schema to be used if no schema is detected in the XML file:

Schema type

Use this drop-down list to select the type of schema.

Schema URI

You can specify the URI of the schema file. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Tip: It is a good practice to store all resources in the *framework* directory and use the `${framework}` editor variable to reference them. This is a recommended approach to designing a self-contained document type that can be easily maintained and shared between multiple users.

Classpath Tab

The **Classpath** tab displays a list of folders and *JAR* libraries that hold implementations for API extensions, implementations for custom **Author** mode operations, various resources (such as stylesheets), and *framework* translation files. Oxygen XML Developer loads the resources looking in the folders in the order they appear in the list.

To open the **Classpath** tab of the **Document type** configuration dialog box, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, and click on the **Classpath** tab.

The **Classpath** tab includes the following actions:

+ New

Opens a dialog box that allows you to add a resource to the table in the **Classpath** tab. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Tip: The path can also contain wildcards (for example, `${framework}/lib/*.jar`).

Edit

Opens a dialog box that allows you to edit a resource in the **Classpath** tab. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Tip: The path can also contain wildcards (for example, `${framework}/lib/*.jar`).

Delete

Deletes the currently selected resource from the list.

Move Up

Moves the selected resource up one spot in the list.

Move Down

Moves the selected resource down one spot in the list.

Use parent classloader from plugin with ID

Use this option to specify the ID of a *plugin*. The current *framework* has access to the classes loaded for the *plugin*.

Related Information:

[Extensions Tab](#) on page 69

[Author Tab](#) on page 55

Author Tab

The **Author** tab is a container that holds information regarding the CSS file used to render a document in the **Author** mode, and regarding *framework*-specific actions, menus, contextual menus, toolbars, and content completion list of proposals.

To open the **Author** tab of the **Document type** configuration dialog box, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, and click on the **Author** tab.

The options that you configure in the **Author** tab are grouped in subtabs.

CSS Subtab

The **CSS** subtab contains the CSS files that Oxygen XML Developer uses to render a document in the **Author** mode. In this subtab, you can set *main* and *alternate* CSS files. When you are editing a document in the **Author** mode, you can switch between these CSS files from the **Styles** drop-down menu on the **Author Styles** toolbar.

To open the **CSS** subtab, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, click on the **Author** tab, and then the **CSS** subtab.

The following actions are available in the **CSS** subtab:

 New

Opens a dialog box that allows you to add a CSS file. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

 Edit

Opens a dialog box that allows you to edit the current selection.

 Delete

Deletes the currently selected CSS file.

 Move Up

Moves the selected CSS file up in the list.

 Move Down

Moves the selected CSS file down in the list.

Enable multiple selection of alternate CSSs

Allows users to apply multiple alternate styles, as layers, over the main CSS style. This option is selected by default for DITA document types.

If there are CSSs specified in the document then

You can choose between the following options for controlling how the CSS files that are set in this subtab will be handled if a CSS is specified in the document itself:

- **Ignore CSSs from the associated document type** - The CSS files set in this CSS subtab are overwritten by the CSS files specified in the document itself.
- **Merge them with CSSs from the associated document type** - The CSS files set in this CSS subtab are merged with the CSS files specified in the document itself.

Actions Subtab

The **Actions** subtab contains a sortable table that includes all the *framework*-specific actions. Each action has a unique ID, a name, a description, and a shortcut key.

To open the **Actions** subtab, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, click on the **Author** tab, and then the **Actions** subtab.

The following actions are available in this subtab:

 New

Opens the **Action** dialog box that allows you to add an action.

 Duplicate

Duplicates the currently selected action.

 Edit

Opens the **Action** dialog box that allows you to edit the existing action.

 Delete

Deletes the currently selected action.

Author Action Dialog Box

To edit an existing document type action or create a new one, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, click on the **Author** tab, and then the **Actions** subtab. At the bottom of this subtab, click  **New** to create a new action, or  **Edit** to modify an existing one.

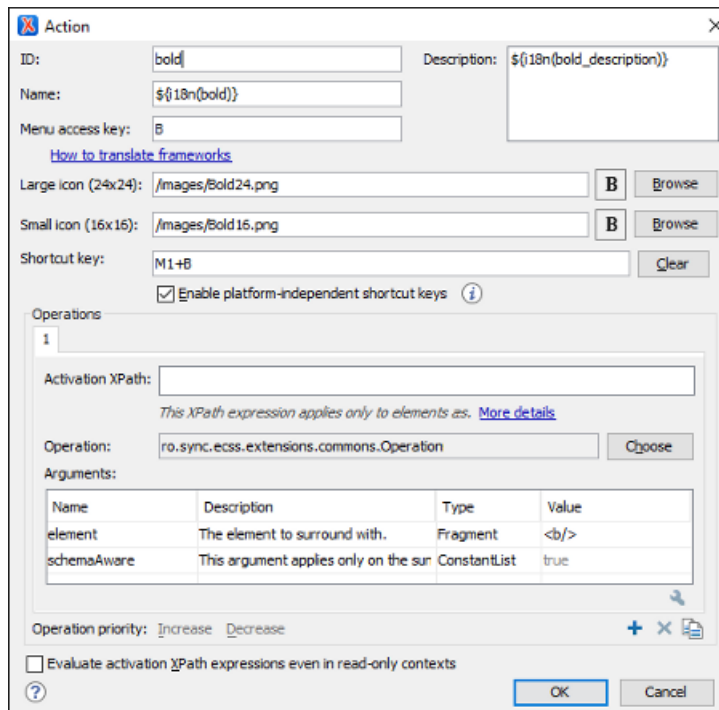


Figure 14: Action Dialog Box

The following options are available in the **Action** dialog box:

ID

Specifies a unique action identifier.

Name

Specifies the name of the action. This name is displayed as a tooltip or as a menu item.

Tip: You can use the `$(i18n('key'))` editor variable to allow for multiple translations of the name.

Menu access key

In Windows, you can access menus by holding down **Alt** and pressing the keyboard key that corresponds to the *Letter* that is underlined in the name of the menu. Then, while still holding down **Alt**, you can select submenus and menu action the same way by pressing subsequent corresponding keys. You can use this option to specify the *Letter* in the name of the action that can be used to access the action.

Description

A description of the action. This description is displayed as a tooltip when hovering over the action.

Tip: You can use the `$(i18n('key'))` editor variable to allow for multiple translations of the description.

How to translate frameworks link

Use this link to see more information about [Localizing Frameworks](#).

Large icon

Allows you to select an image for the icon that Oxygen XML Developer uses for the toolbar action.

Tip: A good practice is to store the image files inside the *framework* directory and use the `$(frameworks)` editor variable to make the image relative to the *framework* location. If the images are bundled in a *jar* archive (for instance, along with some Java operations implementation), it is convenient to reference the images by their relative path location in the *class-path*.

Small icon

Allows you to select an image for the icon that Oxygen XML Developer uses for the contextual menu action.

Shortcut key

This field allows you to configure a shortcut key for the action that you are editing. The + character separates the keys.

Enable platform-independent shortcut keys

If this checkbox is selected, the shortcut that you specify in this field is platform-independent and the following modifiers are used:

- M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
- M2 represents the **Shift** key.
- M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
- M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.

Operations section

In this section of the **Action** dialog box, you configure the functionality of the action that you are editing. An action has one or more operation modes. The evaluation of an XPath expression activates an operation mode. The first selected operation mode is activated when you trigger the action. The scope of the XPath expression must consist only of element nodes and attribute nodes of the edited document. Otherwise, the XPath expression does not return a match and does not fire the action. For more details see: [Activate Multiple Functions for Actions using XPath Expressions](#) on page 58.

The following options are available in this section:

Activation XPath

An XPath 2.0 expression that applies to elements and attributes. For more details see: [Activate Multiple Functions for Actions using XPath Expressions](#) on page 58.

Operation

Specifies the invoked operation.

Arguments

Specifies the arguments of the invoked operation. The  **Edit** at the bottom of the table allows you to edit the arguments of the operation.

Operation priority

Increases or decreases the priority of an operation. The operations are invoked in the order of their priority. If multiple XPath expressions are true, the operation with the highest priority is invoked.

-  **Add** - Adds an operation.
-  **Remove** - Removes an operation.
-  **Duplicate** - Duplicates an operation.

Evaluate activation XPath expressions even in read-only contexts

If this checkbox is selected, the action can be invoked even when the cursor is placed in a read-only location.

Activate Multiple Functions for Actions using XPath Expressions

An **Author** mode action can have multiple functions, each function invoking an **Author** mode operation with certain configured parameters. Each function of an action has an XPath 2.0 expression for activating it.

For each function of an action, the application will check if the XPath expression is fulfilled (when it returns a not empty nodes set or a **true** result). If it is fulfilled, the operation defined in the function will be executed.

The following special XPath extension functions are provided:

- [oxy:allows-child-element\(\)](#) - Use this function to check whether or not an element is valid child element in the current context, according to the associated schema.
- [oxy:allows-global-element\(\)](#) - Use this function to check whether or not an element is a valid global element for the current *framework*, according to the associated schema.
- [oxy:current-selected-element\(\)](#) - Use this function to get the currently selected element.
- [oxy:is-required-element\(\)](#) - Use this function to check if the element returned by the given XPath expression is required (based on the rules declared in the schema).

`oxy:allows-child-element()` Function

The **oxy:allows-child-element()** function allows you to check whether or not an element that matches the arguments of the function is valid as a child of the element at the current cursor position, according to the associated schema. It is evaluated at the cursor position and has the following signature:

oxy:allows-child-element(\$childName, (\$attributeName, \$defaultAttributeValue, \$contains?))?

The following parameters are supported:

childName

The name of the element that you want to check if it is valid in the current context. Its value is a string that supports the following forms:

- The child element with the specified local name that belongs to the default namespace.

```
oxy:allows-child-element("para")
```

The above example verifies if the para element (of the default namespace) is allowed in the current context.

- The child element with the local name specified by any namespace.

```
oxy:allows-child-element("*:para")
```

The above example verifies if the para element (of any namespace) is allowed in the current context.

- A prefix-qualified name of an element.

```
oxy:allows-child-element("prefix:para")
```

The prefix is resolved in the context of the element where the cursor is located. The function matches on the element with the para local name from the previous resolved namespace. If the prefix is not resolved to a namespace, the function returns a value of false.

- A specified namespace-URI-qualified name of an element.

```
oxy:allows-child-element("{namespaceURI}para")
```

The namespaceURI is the namespace of the element. The above example verifies if the para element (of the specified namespace) is allowed in the current context.

- Any element.

```
oxy:allows-child-element("*")
```

The above function verifies if any element is allowed in the current context.

Note: A common use case of `oxy:allows-child-element("*")` is in combination with the `attributeName` parameter.

attributeName

The attribute of an element that you want to check if it is valid in the current context. Its value is a string that supports the following forms:

- The attribute with the specified name from no namespace.

```
oxy:allows-child-element("*", "class", " topic/topic ")
```

The above example verifies if an element with the class attribute and the default value of this attribute (that contains the topic/topic string) is allowed in the current context.

- The attribute with the local name specified by any namespace.

```
oxy:allows-child-element("*", "*:localname", " topic/topic ")
```

- A qualified name of an attribute.

```
oxy:allows-child-element("*", "prefix:localname", " topic/topic ")
```

The prefix is resolved in the context of the element where the cursor is located. If the prefix is not resolved to a namespace, the function returns a value of false.

defaultAttributeValue

A string that represents the default value of the attribute. Depending on the value of the next parameter, the default value of the attribute must either contain this value or be equal with it.

contains

An optional boolean. The default value is `true`. For the `true` value, the default value of the attribute must contain the `defaultAttributeValue` parameter. If the value is `false`, the two values must be the same.

`oxy:allows-global-element()` Function

The **`oxy:allows-global-element()`** function allows you to check whether or not an element that matches the arguments of the function is valid for the current *framework*, according to the associated schema. It has the following signature:

`oxy:allows-global-element($elementName, ($attributeName, $defaultAttributeValue, $contains?))?`

The following parameters are supported:

elementName

The name of the element that you want to check if it is valid in the current *framework*. Its value is a string that supports the following forms:

- The element with the specified local name that belongs to the default namespace.

```
oxy:allows-global-element("para")
```

The above example verifies if the `para` element (of the default namespace) is allowed in the current *framework*.

- The element with the local name specified by any namespace.

```
oxy:allows-global-element("*:para")
```

The above example verifies if the `para` element (of any namespace) is allowed in the current *framework*.

- A prefix-qualified name of an element.

```
oxy:allows-global-element("prefix:para")
```

The prefix is resolved in the context of the *framework*. The function matches on the element with the `para` local name from the previous resolved namespace. If the prefix is not resolved to a namespace, the function returns a value of `false`.

- A specified namespace-URI-qualified name of an element.

```
oxy:allows-global-element("{namespaceURI}para")
```

The `namespaceURI` is the namespace of the element. The above example verifies if the `para` element (of the specified namespace) is allowed in the current *framework*.

- Any element.

```
oxy:allows-global-element("*")
```

The above function verifies if any element is allowed in the current *framework*.

attributeName

The attribute of an element that you want to check if it is valid in the current *framework*. Its value is a string that supports the following forms:

- The attribute with the specified name from no namespace.

```
oxy:allows-global-element("class", "topic/topic")
```

The above example verifies if an element with the `class` attribute and the default value of this attribute (that contains the `topic/topic` string) is allowed in the current *framework*.

- The attribute with the local name specified by any namespace.

```
oxy:allows-global-element("class", "localname", "topic/topic")
```

- A qualified name of an attribute.

```
oxy:allows-global-element("*", "prefix:localname", " topic/topic ")
```

The prefix is resolved in the context of the *framework*. If the prefix is not resolved to a namespace, the function returns a value of `false`.

defaultAttributeValue

A string that represents the default value of the attribute. Depending on the value of the next parameter, the default value of the attribute must either contain this value or be equal with it.

contains

An optional boolean. The default value is `true`. For the `true` value, the default value of the attribute must contain the `defaultAttributeValue` parameter. If the value is `false`, the two values must be the same.

oxy:current-selected-element() Function

This function returns the fully selected element. If no element is selected, the function returns an empty sequence.

Example: oxy:current-selected-element Function

```
oxy:current-selected-element()[self::p]/b
```

This example returns the `b` elements that are children of the currently selected `p` element.

oxy:is-required-element() Function

This function checks if the element returned by the given XPath expression is required (based on the rules declared in the schema). It has only one argument, an XPath expression, and the XPath expression must be written in such a way that it returns a single element.

Example: oxy:is-required-element Function

```
oxy:is-required-element(.)
```

This example would check to see if the current element is required by the schema.

oxy:is-editable-element() Function

This function checks if the element returned by the given XPath expression is editable (content can be inserted in it), meaning both that the entire XML file is editable and that the current context where the element is placed is editable. For example, if the element is inside an *xi:included* section, it is not editable.

It only has one argument, an XPath expression, and the XPath expression must be written in such a way that it returns a single element.

Example: oxy:is-editable-element Function

```
oxy:is-editable-element(ancestor-or-self::table)
```

This example would return `true` if the cursor is placed inside a table and it is editable or `false` if it is not editable.

Localizing Frameworks

Oxygen XML Developer supports *framework* localization (translating *framework* actions, buttons, and menu entries to various languages). This lets you develop and distribute a *framework* to users that speak other languages without changing the distributed *framework*. Changing the language used in Oxygen XML Developer in the Global preferences page is enough to set the right language for each *framework*.

To localize the content of a *framework*, create a `translation.xml` file that contains all the translation (key, value) mappings. The `translation.xml` has the following format:

```
<translation>
  <languageList>
    <language description="English" lang="en_US" />
    <language description="German" lang="de_DE" />
    <language description="French" lang="fr_FR" />
  </languageList>
  <key value="list">
    <comment>List menu item name.</comment>
```

```

        <val lang="en_US">List</val>
        <val lang="de_DE">Liste</val>
        <val lang="fr_FR">Liste</val>
    </key>
    .....
</translation>

```

Oxygen XML Developer matches the GUI language with the language set in the `translation.xml` file. If this language is not found, the first available language declared in the `languageList` tag for the corresponding *framework* is used.

Add the directory where this file is located to the **Classpath** list corresponding to the edited document type.

After you create this file, you can use the keys defined in it to customize the name and description of the following:

- Actions
- Menu entries
- Contextual menus
- Toolbars
- Static CSS content

For example, if you want to localize the bold action, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Document Type Association**. Use the **New** or **Edit** button to open the [Document type configuration dialog box](#), go to **Author > Actions**, and rename the bold action to `${i18n(translation_key)}`. Actions with a name format other than `${i18n(translation_key)}` are not localized. *Translation_key* corresponds to the key from the `translation.xml` file.

Now open the `translation.xml` file and edit the translation entry if it exists or create one if it does not exist. This example presents an entry in the `translation.xml` file:

```

<key value="translation_key">
    <comment>Bold action name.</comment>
    <val lang="en_US">Bold</val>
    <val lang="de_DE">Bold</val>
    <val lang="fr_FR">Bold</val>
</key>

```

To use a description from the `translation.xml` file in the Java code used by your custom *framework*, use the new [ro.sync.ecss.extensions.api.AuthorAccess.getAuthorResourceBundle\(\)](#) API method to request the associated value for a certain key. This allows all the dialog boxes that you present from your custom operations to have labels translated in multiple languages.

You can also reference a key directly in the CSS content:

```

title:before{
    content:"${i18n(title.key)} : ";
}

```

Note: You can enter any language you want in the `languageList` tag and any number of keys.

The `translation.xml` file for the DocBook *framework* is located here: `[OXYGEN_INSTALL_DIR]/frameworks/docbook/i18n/translation.xml`. In the **Classpath** list corresponding to the DocBook document type the following entry was added: `${framework}/i18n/`.

To see how the DocBook actions are defined to use these keys for their name and description, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Document Type Association > Author > Actions**. If you look in the Java class `ro.sync.ecss.extensions.docbook.table.SADocbookTableCustomizerDialog` available in the `oxygen-sample-framework` module of the [Oxygen SDK](#) Maven archetype, you can see how the new `ro.sync.ecss.extensions.api.AuthorResourceBundle` API is used to retrieve localized descriptions for various keys.

Menu Subtab

In the **Menu** subtab, you can configure which actions will appear in the *framework*-specific menu. The subtab is divided in two sections: **Available actions** and **Current actions**.

To open the **Menu** subtab, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the [New, Edit, Duplicate, or Extend](#) button, click on the **Author** tab, and then the **Menu** subtab.

The **Available actions** section presents a table that displays the actions defined in the **Actions** subtab, along with their icon, ID, and name. The **Current actions** section holds the actions that are displayed in the Oxygen XML Developer menu. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an image in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:

Edit

Edits an item.

Remove

Removes an item.

Move Up

Moves an item up.

Move Down

Moves an item down.

Contextual Menu Subtab

In the **Contextual menu** subtab you configure what *framework*-specific action the *Content Completion Assistant* proposes. The subtab is divided in two sections: **Available actions** and **Current actions**.

To open the **Contextual Menu** subtab, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, click on the **Author** tab, and then the **Contextual Menu** subtab.

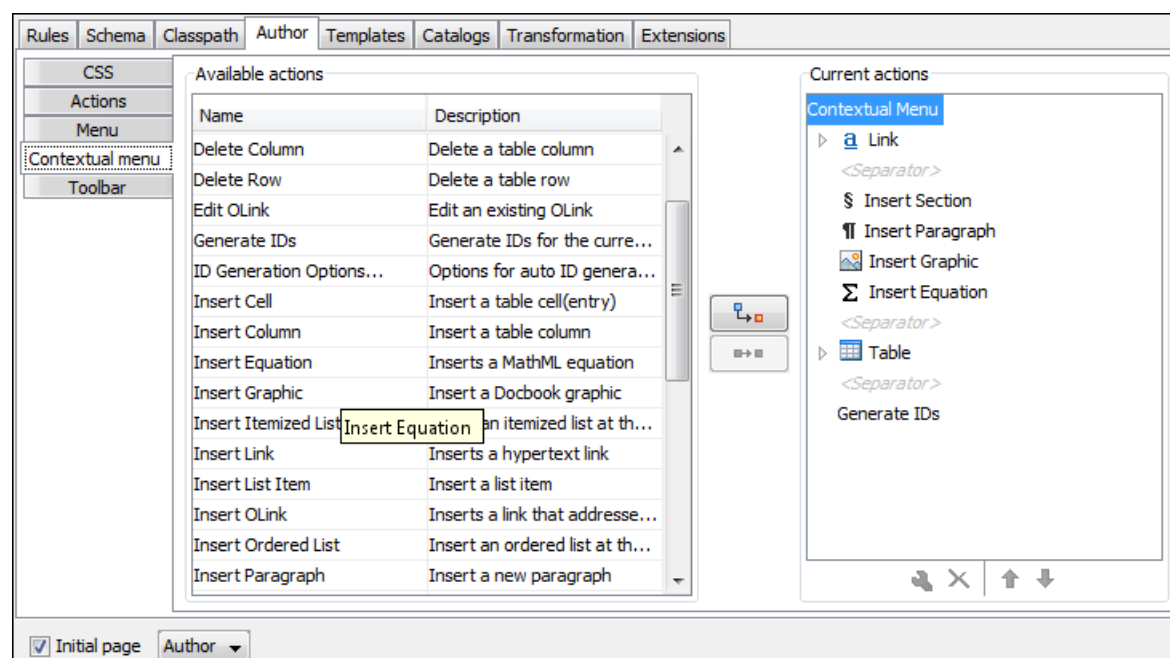


Figure 15: Contextual Menu Subtab

The **Available actions** section presents a table that displays the actions defined in the **Actions** subtab, along with their icon, ID, and name. The **Current actions** section contains the actions that are displayed in the contextual menu for documents that belong to the edited *framework*.

The following actions are available in this subtab:

Add as sibling

Adds the selected action or submenu from the **Available actions** section to the **Current actions** section as a sibling of the selected action.

Add as child

Adds the selected action or submenu from the **Available actions** section to the **Current actions** section as a child of the selected action.

Edit

This option is available for container (submenu) items that are listed in the **Current actions** section. It opens a configuration dialog box that allows you to edit the selected container (submenu).

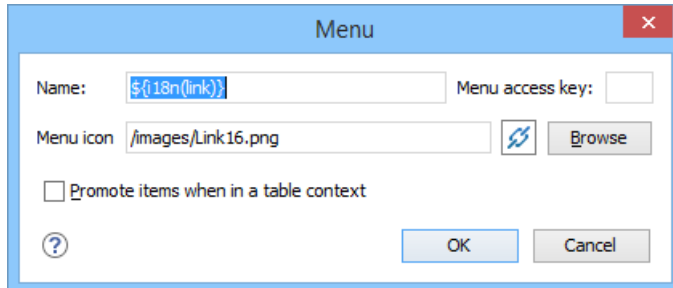


Figure 16: Menu Action Configuration Dialog Box

The following options are available in this dialog box:

Name

Specifies the name of the action. This name is displayed as a tooltip or as a menu item.

Tip: You can use the `${i18n('key')}` editor variable to allow for multiple translations of the name.

Menu access key

In Windows, you can access menus by holding down **Alt** and pressing the keyboard key that corresponds to the *Letter* that is underlined in the name of the menu. Then, while still holding down **Alt**, you can select submenus and menu action the same way by pressing subsequent corresponding keys. You can use this option to specify the *Letter* in the name of the action that can be used to access the action.

Menu icon

Allows you to select an image for the icon that Oxygen XML Developer uses for the container (submenu).

Promote items when in a table context

If this option is selected, when invoking the contextual menu from within a table, all the actions in this container (submenu) will be promoted to the main level in the contextual menu. Actions and submenus that are not promoted are still available in the **Other actions** submenu when invoking the contextual menu within a table.

Remove

Removes the selected action or submenu from the **Current actions** section.

Move Up

Moves the selected item up in the list.

Move Down

Moves the selected item down in the list.

Toolbar Subtab

In the **Toolbar** subtab you configure what *framework*-specific action the Oxygen XML Developer toolbar holds. The subtab is divided in two sections: **Available actions** and **Current actions**.

To open the **Toolbar** subtab, open the **Preferences dialog box (Options > Preferences)**, go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, click on the **Author** tab, and then the **Toolbar** subtab.

The **Available actions** section presents a table that displays the actions defined in the **Actions** subtab, along with their icon, ID, and name. The **Current actions** section holds the actions that are displayed in the Oxygen XML Developer toolbar when you work with a document belonging to the edited *framework*. To add an action in this

section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an action in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:

 Edit

Edits an item.

 Remove

Removes an item.

 Move Up

Moves an item up.

 Move Down

Moves an item down.

Content Completion Subtab

In the **Content Completion** subtab you configure what *framework*-specific the *Content Completion Assistant* proposes. The subtab is divided in two sections: **Available actions** and **Current actions**.

To open the **Content Completion** subtab, open the **Preferences** dialog box (**Options > Preferences**), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, click on the **Author** tab, and then the **Content Completion** subtab.

Available and Current Actions

The **Available actions** section presents a table that displays the actions defined in the **Actions** subtab, along with their icon, ID, and name. The **Current actions** section holds the actions that the *Content Completion Assistant* proposes when you work with a document belonging to the edited *framework*. To add an action in this section as a sibling of the currently selected action, use the  **Add as sibling** button. To add an action in this section as a child of the currently selected action use the  **Add as child** button.

The following actions are available in the **Current actions** section:

 Edit

Edits an item.

 Remove

Removes an item.

 Move Up

Moves an item up.

 Move Down

Moves an item down.

Filter Table

The **Filter** section presents a table that allows you to add elements to be filtered from the *Content Completion Assistant* or from some specific helper views or menus. Use the  **Add** button to add more filters to the table, the  **Edit** button to modify an existing item in the table, or the  **Remove** button to remove a filtered item. The  **Add** and  **Edit** buttons open a **Remove item** dialog box.

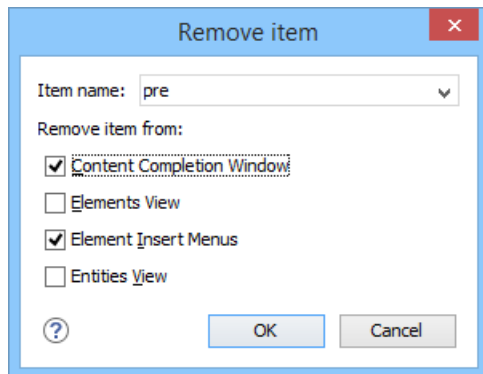


Figure 17: Remove Item Dialog Box

Use this dialog box to add or configure the elements that will be filtered:

Item name

Use this text field to enter the name of the element to be filtered. The drop-down list also includes a few special content completion actions that can be filtered (<SPLIT> and <ENTER>).

Remove item from

You can choose to filter the element from any of the following:

- **Content Completion Window** - The element will not appear in the [Content Completion Assistant](#).
- **Elements View** - The element will not appear in the [Elements view](#).
- **Element Insert Menus** - The element will not appear in the **Append Child**, **Insert Before**, or **Insert After** menus that are available in certain contextual menus (for example, the contextual menu of the [Outline view](#)).
- **Entities View** - The element will not appear in the [Entities view](#).

Related Information:

Templates Tab

The **Templates** tab specifies a list of directories where new document templates are located for this particular framework. These directories, along with the document templates that are saved inside them, will appear in the [New Document wizard](#) inside the **Framework templates** category according to your framework and the directory path you specify in this tab.

To open the **Templates** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, and click on the **Templates** tab.

The **Templates** tab includes the following actions:

+ New

Opens a dialog box that allows you to specify the path to a directory that contains document templates for this framework. You can specify the path by using the text field, its history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the [Browse](#) drop-down list.

Tip: The path can also contain wildcards. For example, using `${frameworkDir}/templates/*` would add all the template folders found inside the `templates` directory.

🔧 Edit

Opens a dialog box that allows you to edit the path of a directory that contains document templates for this framework. You can specify the path by using the text field, its history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the [Browse](#) drop-down list.

Tip: The path can also contain wildcards. For example, using `${frameworkDir}/templates/*` would add all the template folders found inside the `templates` directory.

Delete

Deletes the currently selected template directory from the list.

Move Up

Moves the selected template directory up one spot in the list.

Move Down

Moves the selected template directory down one spot in the list.

Catalogs Tab

The **Catalogs** tab specifies a list of [XML Catalogs](#), specifically for the edited [framework](#), that are added to list of catalogs that Oxygen XML Developer uses to resolve resources.

To open the **Catalogs** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, and click on the **Catalogs** tab.

You can perform the following actions:

Add

Opens a dialog box that allows you to add a catalog to the list. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Edit

Opens a dialog box that allows you to edit the path of an existing catalog.

Delete

Deletes the currently selected catalog from the list.

Move Up

Moves the selected catalog up one spot in the list.

Move Down

Moves the selected catalog down one spot in the list.

Transformation Tab

In the **Transformation** tab, you can configure the transformation scenarios associated with the particular [framework](#) you are editing. These transformation scenarios are presented in the **Configure Transformation Scenarios** dialog box when transforming a document and you can specify which scenarios will be used by default for a particular document type.

To open the **Transformation** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New, Edit, Duplicate, or Extend** button, and click on the **Transformation** tab.

The **Transformation** tab offers the following options:

Default checkbox

You can set one or more of the scenarios listed in this tab to be used as the default transformation scenario when another specific scenario is not specified. The scenarios that are set as default are rendered bold in the [Configure Transformation Scenarios](#) dialog box.

New

Opens the **New scenario** dialog box allowing you to [create a new transformation scenario for the particular document type](#).

Duplicate

Allows you to duplicate the configuration of an existing transformation scenario. It opens the **Edit scenario** dialog box where you can [configure the properties of the duplicated scenario](#).



Edit

Opens the **Edit scenario** dialog box allowing you to [edit the properties of the currently selected transformation scenario](#).



Delete

Deletes the currently selected transformation scenario.



Import scenarios

Imports transformation scenarios.



Export selected scenarios

Export transformation scenarios.



Move Up

Moves the selection to the previous scenario.



Move Down

Moves the selection to the next scenario.

Validation Tab

In the **Validation** tab, you can configure the validation scenarios associated with the particular *framework* you are editing. These validation scenarios are presented in the **Configure Validation Scenarios** dialog box when validating a document and you can specify which scenarios will be used by default for a particular document type.

Note: If a *master file* is associated with the current file, the validation scenarios defined in the *master file*, along with any Schematron schema defined in the default scenarios for that particular *framework*, are used for the validation. These take precedence over other types of validation units defined in the default scenarios for the particular *framework*. For more information on *master files*, see [Master Files Support](#) on page 302 or [Working with Modular XML Files in the Master Files Context](#) on page 429.

To open the **Validation** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, and click on the **Validation** tab.

The **Validation** tab offers the following options:

Default checkbox

You can set one or more of the scenarios listed in this tab to be used as the default validation scenario when another specific scenario is not specified in the validation process. The scenarios that are set as default are rendered bold in the **Configure Validation Scenarios** dialog box.



New

Opens the **New scenario** dialog box allowing you to [create a new validation scenario](#).



Duplicate

Allows you to duplicate the configuration of an existing validation scenario. It opens the **Edit scenario** dialog box where you can [configure the properties of the duplicated scenario](#).



Edit

Opens the **Edit scenario** dialog box allowing you to [edit the properties of the currently selected validation scenario](#).



Delete

Deletes the currently selected validation scenario.



Import scenarios

Imports validation scenarios.



Export selected scenarios

Export validation scenarios.

Move Up

Moves the selected scenario up one spot in the list.

Move Down

Moves the selected scenario down one spot in the list.

Extensions Tab

The **Extensions** tab specifies implementations of Java interfaces used to provide advanced functionality to the document type.

To open the **Extensions** tab of the **Document type** configuration dialog box, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, use the **New**, **Edit**, **Duplicate**, or **Extend** button, and click on the **Extensions** tab.

Libraries containing the implementations must be present in the [classpath](#) of your document type. The Javadoc available at <https://www.oxygenxml.com/InstData/Editor/SDK/javadoc/> contains details about how each API implementation functions.

Encoding Preferences

Oxygen XML Developer lets you configure how character encodings are recognized when opening files and which encodings are used when saving files. To configure encoding options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Encoding**.

The following encoding options are available:

Fallback character encoding

Specifies the default character encoding of non-XML documents if their character encoding cannot be determined from other sources (for example, it is not specified in the document or determined by the file type).

Note: For certain document types, the following encoding detection rules are used:

- For XML, DTD, and CSS documents, Oxygen XML Developer tries to collect the character encoding from the document. If no such encoding is found, then *UTF-8* is used.
- For JavaScript, JSON, SQL, XQuery, and RNC, the *UTF-8* encoding is used.

UTF-8 BOM handling

This setting specifies how to handle the *Byte Order Mark* (BOM) when Oxygen XML Developer saves a UTF-8 XML document:

- **Keep** (default) - Do not alter the BOM declaration of the currently open file.
- **Write** - Save the BOM bytes.
- **Don't Write** - Do not save the BOM bytes. Loaded BOM bytes are ignored.

Note: The UTF-16 BOM is always preserved. UTF-32 documents have a *big-endian* byte order.

Encoding errors handling

This setting specifies how to handle characters that cannot be represented in the character encoding that is used when the document is opened. The available options are:

- **REPORT** (default) - Displays an error identifying the character that cannot be represented in the specified encoding. Unrecognized characters are rendered as an empty box.
- **REPLACE** - The character is replaced with a standard replacement character. For example, if the encoding is UTF-8, the replacement character has the Unicode code FFFD, and if the encoding is ASCII, the replacement character code is 63.
- **IGNORE** - The error is ignored and the character is not included in the document displayed in the editor.



Attention: If you edit and save the document, the characters that cannot be represented in the specified encoding are dropped.

Encoding for Base64, Base32, Hex conversions

Specifies the encoding to be used when invoking the **Encode Selection** or **Decode Selection** actions for [Base64](#), [Base32](#), or [Hex conversions](#). The default setting is *UTF8*.

Editor Preferences

Oxygen XML Developer lets you configure the appearance of various components and features of the main editor. To access these options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor**.

The following options are available:

Selection background color

Allows you to set the background color of selected text.

Selection foreground color

Allows you to set the color of selected text.

Completion proposal background

Allows you to set the background color of the [Content Completion Assistant](#).

Completion proposal foreground

Allows you to set the color of the text in the [Content Completion Assistant](#).

Documentation window background

Allows you to set the background color of the documentation of elements suggested by the [Content Completion Assistant](#).

Documentation window foreground

Allows you to set the color of the text for the documentation of elements suggested by the [Content Completion Assistant](#).

Find highlight color

Allows you to set the color of the highlights generated by the **Find** and **Find all** actions.

XPath highlight color

Allows you to set the color of the highlights generated when you run an XPath expression.

Declaration highlight color

Allows you to set the color of the highlights generated by the **Find declaration** action.

Reference highlight color

Allows you to set the color of the highlights generated by the **Find reference** action.

Maximum number of highlights

Allows you to set the maximum number of highlights that Oxygen XML Developer displays.

Show TAB/NBSP/EOL/EOF marks

Makes the **TAB/NBSP/EOL/EOF** characters visible in the editor. You can use the color picker to choose the color of the marks.

Show SPACE marks

Makes the space character visible in the editor.

Can edit read-only files

If this option is selected, Oxygen XML Developer will let you edit read-only files. When you try to save them, a **Save As** dialog box will be displayed to avoid overwriting the initial resource. If the option is not selected, a warning message is displayed when you try to edit a read-only file.

Display quick-assist and quick-fix side hints

Displays the [Quick Assist](#) icon (💡) and [Quick Fix](#) icon (💡) in the line number stripe on the left side of the editor.

Undo history size

Allows you to set the maximum amount of undo operations you can perform in any of the editor modes (**Text**, **Design**, **Grid**).

Enable mouse-wheel zooming

If selected, you can use **Ctrl + MouseWheelForward (Command + MouseWheelForward on OS X)** to increase the editor font (zoom in) or **Ctrl + MouseWheelBackwards (Command + MouseWheelBackwards on OS X)** to decrease the editor font (zoom out). It is enabled by default on Windows and Linux, while it is disabled by default on Mac OS X, due to the way inertia affects the mouse wheel on this operating system.

Print Preferences

Oxygen XML Developer lets you configure how files are printed out of the editor. Note that these settings cover how files are printed directly from Oxygen XML Developer itself, not how they are printed after the XML source has been transformed by a publishing stylesheet. To configure the **Print** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Print**.

This page allows you to customize the headers and footers added to a printed page when you print from the **Text mode** editor. These settings do not apply to the **Grid** and **schema Design** mode.

You can specify what is printed on the **Left**, **Middle**, and **Right** of the header and footer using plain text of any of the following variables:

- **\${currentFileURL}** - Current file as URL, that is the absolute file path of the current edited document represented as URL.
- **\${cfne}** - Current file name with extension. The current file is the one currently opened and selected.
- **\${cp}** - Current page number. Used to display the current page number on each printed page in the **Editor / Print** Preferences page.
- **\${tp}** - Total number of pages in the document. Used to display the total number of pages on each printed page in the **Editor / Print** Preferences page.
- **\${env(VAR_NAME)}** - Value of the *VAR_NAME* environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the **\${system(var.name)}** editor variable.
- **\${system(var.name)}** - Value of the *var.name* Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as *-Dvar.name=var.value*. If you are looking for operating system environment variables, use the **\${env(VAR_NAME)}** editor variable instead.
- **\${date(pattern)}** - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#). **Example:** *yyyy-MM-dd*;

Note: This editor variable supports both the **xs:date** and **xs:datetime** parameters. For details about **xs:date**, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about **xs:datetime**, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.

For example, to show the current page number and the total number of pages in the top right corner of the page, write the following pattern in the **Right** text area of the **Header** section: **\${cp} of \${tp}**.

You can also set the **Color** and **Font** used in the header and footer. Default font is **SansSerif**.

You can place a line below the header or above the footer by selecting **Underline/Overline**.

Edit Modes Preferences

Oxygen XML Developer lets you configure which **edit mode** a file is opened in the first time it is opened. This setting only applies the first time a file is opened. The current editing mode of each file is saved when the file is closed and restored the next time it is opened. To configure the options for editing modes, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit Modes**.

Allow Document Type specific edit mode setting to override the general mode setting

If selected, the initial edit mode setting set in the [Document Type configuration dialog box](#) overrides the general edit mode setting from the table below.

Select the initial edit mode (page) for each editor

This table specifies the default editing mode that will be opened for each type of document when the **Allow Document Type specific edit mode setting to override the general mode setting** option is not selected. Use the **Edit** button to change the initial edit mode for each type of document (editor). The initial edit mode can be one of the following:

- **Text**
- **Grid**
- **Design** (available only for the XSD editor).

Editor / Edit modes

☒ Allow Document Type specific edit mode setting to override the general edit mode settings

Select the initial edit mode (page) for each editor

Editor	Edit Mode
XML Editor	Text
XSD Editor	Design
HTML Editor	Text
WSDL Editor	Text
XSL Editor	Text
NVDL Editor	Text
XProc Editor	Text
RNG Editor	Text
Schematron Editor	Text

Edit

Figure 18: Edit Modes Preferences Page

Text Preferences

Oxygen XML Developer lets you configure how the **Text mode editor** appears. To configure these options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit modes > Text**.

The following options are available:

Editor background color

Sets the background color for the **Text** editing mode, **Outline view**, and some external tool editors ([Large File Viewer](#), [Compare Files](#), [Compare Directories](#)).

Editor cursor color

Sets the color for the cursor in **Text** mode.

Highlight current line

If selected, the current line is highlighted with the foreground color specified with the color chooser.

Show line numbers

If selected (default value), line numbers are shown in the editor panels and in the **Output view** of the debugger [perspectives](#). You can also specify the color for the line numbers using the color chooser. Printed output will also include the line numbers.

Show print margin

If selected, it allows you to set a safe print limit in the form of a vertical line displayed in the right side of the editor pane. You can also customize the print margin line color.

Print margin column

Allows you to specify a limit for the print width, measured in the number of characters.

Line wrap

If selected, long lines are automatically wrapped in edited documents. The line wrap does not alter the document content since the application does not use *new-line* characters to break long lines.

Cut / Copy whole line when nothing is selected

If selected, **Cut** and **Copy** actions operate on the entire current line when nothing is selected in the editor.

Enable folding

If selected (default value), the vertical stripe that holds the [folding markers](#) is displayed in **Text** mode.

Highlight matching tag

If selected, when you place the cursor on a start or end tag, Oxygen XML Developer highlights the corresponding member of the pair. You can also customize the highlight color.

Lock the XML tags

If selected, XML are locked and cannot be edited in **Text** mode.

Diagram Preferences

For certain XML languages, Oxygen XML Developer provides a diagram view as part of the text mode editor. To configure the **Diagram** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit modes > Text > Diagram**.

The following options are available in this preference page:

Show Full Model XML Schema diagram

When this option is selected, the **Text** mode editor for XML Schemas includes a split screen view that shows a diagram of the schema structure. This is useful for seeing the effects of schema changes you make. For editing a the schema using a diagram instead of text, use the [schema Design view](#).

Note: When handling very large schemas, displaying the schema diagram might affect the performance of your system. In such cases, disabling the schema diagram view improves the speed of navigation through the edited schema.

Enable Relax NG diagram and related views

Enables the Relax NG schema diagram and synchronization with the related views ([Attributes](#), [Model](#), [Elements](#), [Outline](#)).

Show Relax NG diagram

Displays the Relax NG schema diagram in the split screen views ([Full Model View](#) and [Logical Model View](#)).

Enable NVDL diagram and related views

Enables the NVDL schema diagram and synchronization with the related views ([Attributes](#), [Model](#), [Elements](#), [Outline](#)).

Show NVDL diagram

Displays the NVDL schema diagram in the split screen views ([Full Model View](#) and [Logical Model View](#)).

Location relative to editor

Allows you to specify the location of the schema diagram panel relative to the diagram **Text** editor.

Show/Hide Annotations link

Use this link to navigate to the [Schema Design preferences page](#) where you can choose to show or hide annotations in schema diagrams.

Zoom link

Use this link to navigate to the [Schema Design preferences page](#) where you can adjust the default zoom level of schema diagrams.

Grid Preferences

Oxygen XML Developer provides a [Grid view](#) of an XML document. To configure the **Grid** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit modes > Grid**.

The following options are available:

Compact representation

If selected, the *compact representation* of the grid is used: a child element is displayed beside the parent element. In the *non-compact representation*, a child element is nested below the parent.

Format and indent when passing from grid to text or on save

If selected, the content of the document is [formatted and indented](#) each time you switch from the **Grid** view to the **Text** view.

Default column width (characters)

Sets the default width (in characters) of a table column of the grid. A column may contain the following:

- Element names
- Element text content
- Attribute names
- Attribute values

If the total width of the grid structure is too large you can resize any column by dragging the column margins with the mouse pointer, but the change is not persistent. To make it persistent, set the new column width with this option.

Active cell color

Allows you to set the background color for the [active cell](#) of the grid. The keyboard input always goes to the *active cell* and the selection always contains it.

Selection color

Allows you to set the background color for the selected cells of the grid except the [active cell](#).

Border color

Allows you to set the color used for the lines that separate the grid cells.

Background color

Allows you to set the background color of grid cells that are not selected.

Foreground color

Allows you to set the text color of the information displayed in the grid cells.

Row header colors

Background color

Allows you to set the background color of row headers that are not selected.

Active cell color

Allows you to set the background color of the row header cell that is currently active.

Selection color

Allows you to set the background color of the header cells corresponding to the currently selected rows.

Column header colors

The column headers are painted with two color gradients, one for the upper 1/3 part of the header and the other for the lower 2/3 part. The start and end colors of the first gradient are set with the first two color buttons. The start and end colors of the second gradient are set with the last two color buttons.

Background color

Allows you to set the background color of column headers that are not selected.

Active cell color

Allows you to set the background color of the column header cell that is currently active.

Selection color

Allows you to set the background color of the header cells corresponding to the currently selected columns.

Schema Design Preferences

Oxygen XML Developer provides a [graphical schema design editor](#) to make editing XML Schema easier. To configure the **Schema Design** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit modes > Schema Design**.

The following options are available in the **Schema Design** preferences page:

Show annotation in the diagram

When selected, Oxygen XML Developer displays the content of `xs:documentation` elements in schema diagrams.

When trying to edit components from another schema

The schema diagram editor will combine schemas imported by the current schema file into a single schema diagram. You can choose what happens if you try to edit a component from an imported schema. The options are:

- **Always go to its definition** - Oxygen XML Developer opens the imported schema file so that you can edit it.
- **Never go to its definition** - The imported schema file is not opened and the component cannot be edited in place.
- **Always ask** - Oxygen XML Developer asks if you want to open the imported schema file.

Zoom

Allows you to set the default zoom level of the schema diagram.

Properties Preferences

Oxygen XML Developer lets you control which properties to display for XML Schema components in the [XML Schema Design view](#). To configure the schema design properties displayed, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Edit modes > Schema Design > Properties**.

This preferences page contains the following:

Show additional properties in the diagram

If this option is selected, the properties selected in the property table are shown in the XML Schema **Design** mode. This option is selected by default.

Properties Table

Show

Use this column in the table to select the properties that you want to be displayed in the XML Schema **Design** mode.

Only if specified

Use this column to select if you want the property to be displayed only if it is defined in the schema.

Spell Check Preferences

Oxygen XML Developer provides support for spell checking in the [Text](#) editing mode. To configure the **Spell Check** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Spell Check**.

The following options are available:

Automatic spell check

This option is not selected by default. When selected, Oxygen XML Developer automatically checks the spelling as you type and highlights misspelled words in the document.

- **Select editors** - You can select which editors (and therefore which file types) will be automatically spell checked. File types (such as CSS and DTD), in which automatic spell checking is not usually helpful, are excluded by default.

Spell check highlight color

Use this option to set the color used by the spell check engine to highlight spelling errors.

Language options section

This section includes the following language options:

Default language

The default language list allows you to choose the language used by the spell check engine when the language is not specified in the source file. You can [add additional dictionaries to the spell check engines](#).

Use "lang" and "xml:lang" attributes

When this option is selected, the contents of an element with one of the `lang` or `xml:lang` attributes is checked in that language. Choose between the following two options for instances when these attributes are missing:

- **Use the default language** - If the `lang` and `xml:lang` attributes are missing, the selection in the [Default language list](#) is used.

- **Do not check** - If the `lang` and `xml:lang` attributes are missing, the element is not checked.

XML spell checking in section

You can choose to check the spelling inside the following XML items:

- **Comments**
- **Attribute values**
- **Text**
- **CDATA**

Options section

This section includes the following other options:

Check capitalization

When selected, the spell checker reports capitalization errors (for example, a word that starts with lowercase after *etc.* or *i.e.*).

Check punctuation

When selected, the spell checker checks punctuation. Misplaced white space and unusual sequences, such as a period following a comma, are highlighted as errors.

Ignore mixed case words

When selected, the spell checker does not check words containing mixed case characters (for example, *SpellChecker*).

Ignore acronyms

Available only for the **Hunspell Spell Checker**. When selected, acronyms are not reported as errors.

Ignore words with digits

When selected, the spell checker does not check words containing digits (for example, *b2b*).

Ignore duplicates

When selected, the spell checker does not signal two successive identical words as an error.

Ignore URL

When selected, the spell checker ignores words recognized as URLs or file names (for example, *www.oxygenxml.com* or *c:\boot.ini*).

Allow compounds words

When selected, all words formed by concatenating two legal words with a hyphen (hyphenated compounds) are accepted. If recognized by the language, two words concatenated without hyphen (closed compounds) are also accepted.

Allow file extensions

When selected, the spell checker accepts any word ending with recognized file extensions (for example, *myfile.txt* or *index.html*).

Ignore elements section

You can use the **Add** and **Remove** buttons to configure a list of element names or XPath expressions to be ignored by the spell checker. The following restricted set of XPath expressions are supported:

- `'/'` and `'//'` separators
- `'*'` wildcard

An example of an allowed XPath expression is: `/a/*/b`.

Spell Check Dictionaries Preferences

To set the Dictionaries preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Spell Check > Dictionaries**. This page allows you to configure the dictionaries (`.dic` files) and term lists (`.tdi` files) that Oxygen XML Developer uses and to choose where to save new learned words.

The following options are valid when Oxygen XML Developer uses the Hunspell spell checking engine:

Dictionaries and term lists default folder

Displays the default location where the dictionaries and term lists that Oxygen XML Developer uses are stored.

Include dictionaries and term list from

Selecting this option allows you to specify a location where you have stored dictionaries and term lists that you want to include, along with the default ones.

Important: Consider the following notes in regards to this option:

- The spell checker takes into account dictionaries and term lists collected both from the default and custom locations and multiple dictionaries and term lists from the same language are merged (for example, en_UK.dic from the default location is merged with en_US.dic from a custom location).
- If you have a generic dictionary file (one that just has a two letter language code for its file name, such as en.dic) saved in either the default or custom location, the other more specific dictionaries (for example, en_UK.dic and en_US.dic) will not be merged and the existing generic dictionary will simply be used instead.
- If the additional location contains a file with the same name as one from the default location, the file in the additional location takes precedence over the file from the default location.

How to add more dictionaries and term lists link

Use this link to open a topic in the Oxygen XML Developer User Guide that explains how to [add more dictionaries and term lists](#).

Save learned words in the following location

Specifies the target where the newly learned words are saved. By default, the target is the application preferences folder, but you can also choose a custom location.

Delete learned words

Opens the list of learned words, allowing you to select the items you want to remove, without deleting the dictionaries and term lists.

Related Information:

[Adding Spell Check Dictionaries](#) on page 322

[Adding Spell Check Term Lists](#) on page 323

Document Checking Preferences

To configure the **Document Checking** (validation) options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Document Checking**. This page contains preferences for configuring how a document is checked for both well-formedness and validation errors.

The following options are available:

Maximum number of validation highlights

If a validation generates more errors than the number specified in this option, only the errors up to this number are highlighted in the editor panel and on the stripe that is displayed at the right side of the editor panel. This option applies to both [automatic validation](#) and [manual validation](#).

Validation error highlight color

The color used to highlight validation errors in the document.

Validation warning highlight color

The color used to highlight validation warnings in the document.

Validation info highlight color

The color used to highlight validation info messages in the document.

Validation success color

The color used to highlight the success indicator of the validation operation in the vertical ruler bar.

Always show validation status

If this option is selected, the current validation error or warning is always visible in the message line at the bottom of the editor panel. This is useful when the **Enable automatic validation** option is selected and the vertical scroll bar changes position due to an error message being displayed.

Enable automatic validation

This causes the validation to be automatically executed in the background as the document is modified in Oxygen XML Developer.

Delay after the last key event (s)

The period of keyboard inactivity before starting a new validation (in seconds).

At the bottom of the preferences page you can [choose whether or not the saved options will be shared with other users by selecting **Global** or **Project** storage options](#).

Format Preferences

This preferences page contains various formatting options that influence editing and formatting in the **Text** mode.

Note: These settings apply to the formatting of source documents. The formatting of output documents is determined by the [transformation scenarios that create them](#).

To configure the **Format** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format**.

The following options are available:

Detect indent on open

If selected, Oxygen XML Developer detects how a document is indented when it is opened. Oxygen XML Developer uses a heuristic method of detection by computing a weighted average indent value from the initial document content. You can deselect this setting if the detected value does not work for your particular case and you want to use a fixed-size indent for all the edited documents. If this option is selected, Oxygen XML Developer detects the following:

- When TAB characters are used to indent content, the size of the TAB characters is used for the indent size.
- Otherwise, the detected size of SPACE characters is used for the indent size.

Tip: If you want to minimize the formatting differences created by the **Format and Indent** operation in a document edited in the **Text** edited mode, make sure that both the **Detect indent on open** and [Detect line width on open](#) options are selected.

Use zero-indent, if detected

By default, if no indent was detected in the document, the fixed-size indent is used. Select this option if all your document have no indentation and you want to keep them that way.

Indent with tabs

If selected, indents are created using TAB characters. If unchecked, lines are indented using space characters. Selecting this option automatically disables the [Detect indent on open](#) option.

Indent size

The meaning of this setting depends on the following:

- If the [Detect indent on open](#) option is selected and TAB characters are detected at the beginning of the line, the *indent size* is the width of a TAB character. Otherwise, the *indent size* value is ignored and Oxygen XML Developer uses the number of detected SPACE characters.
- If the [Indent with tabs](#) option is selected, the *indent size* is the width of a TAB character.
- If neither of these options are selected, the *indent size* is the number of SPACE characters used for indenting the text lines.

For additional information about changing the *indent size*, see [Setting an Indent Size to Zero](#) on page 386.

For information about when this setting is used, see [Where Indent Size and Line Width Settings are Used in Oxygen XML Developer](#) on page 79.

Indent on enter

If selected, when you press Enter to insert a line break in the **Text** editing mode, an indentation will be added to the new line.

Enable smart enter

If selected, when you press the Enter key between a start and an end XML tag in the **Text** editing mode, the cursor is placed in an indented position on the empty line formed between the start and end tag.

Format and indent the document on open

If selected, an XML document is formatted and indented before opening it in Oxygen XML Developer.

Note: Some specialized types of XML documents do not benefit from this feature, including Relax NG, XSD, XSL, and Ant. However, the feature is available for some non-XML types of documents, such as CSS and JSON.

Detect line width on open

If selected, Oxygen XML Developer automatically detects the line width when the document is opened.

Hard line wrap (Limit to "Line width - Format and Indent")

If selected, when typing content in the **Text** editing mode and the maximum line width is reached, a line break is automatically inserted.

Line width - Format and Indent

Defines the number of characters after which the **Format and Indent** (pretty-print) action performs hard line-wrapping. For example, if set to 100, after a **Format and Indent** action, the longest line will have a maximum of 100 characters.

Note: To avoid having an indent that is longer than the line width setting and without having sufficient space available for the text content, the indent limit is actually set at half the value of the **Line width - Format and Indent** setting. The remaining space is reserved for text.

For information about when this setting is used, see [Where Indent Size and Line Width Settings are Used in Oxygen XML Editor](#).

Clear undo buffer before Format and Indent

The **Format and Indent** operation can be *undone*, but if used intensively, a considerable amount of the memory allocated for Oxygen XML Developer will be used for storing the undo states. If this option is selected, Oxygen XML Developer empties the undo buffer before doing a **Format and Indent** operation. This means you will not be able to undo any changes you made before the format and indent operation. Select this option if you encounter out of memory problems (**OutOfMemoryError**) when performing the **Format and Indent** operation.

Where Indent Size and Line Width Settings are Used in Oxygen XML Developer

The values set in the **Indent Size** and **Line Width - Format and Indent** options are used in various places in the application, including the following:

- When the **Format and Indent** action is used in the **Text** editing mode.
- When you press ENTER to break a line in the **Text** editing mode.
- When the **Hard line wrap (Limit to "Line width - Format and Indent")** option is selected and the maximum line width is reached while editing in the **Text** mode.

For more information about the formatting options offered by Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/1plmdN0Cfso>

XML Preferences

To configure the XML Formatting options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > XML**.

The following options are available:

Format Section

This section includes the following drop-down boxes:

Preserve empty lines

The **Format and Indent** operation preserves all empty lines found in the document.

Preserve text as it is

The **Format and Indent** operation preserves text content as it is, without removing or adding any white space.

Preserve line breaks in attributes

Line breaks found in attribute values are preserved.

Note: When this option is selected, the [Break long attributes option](#) is automatically disabled.

Break long attributes

The **Format and Indent** operation breaks long attribute values.

Indent inline elements

The *inline elements* are indented on separate lines if they are preceded by white spaces and they follow another element start or end tag. For example:

Original XML:

```
<root>
  text <parent> <child></child> </parent>
</root>
```

Indent inline elements selected:

```
<root> text <parent>
  <child/>
</parent>
</root>
```

Indent inline elements not selected:

```
<root> text <parent> <child/> </parent> </root>
```

Expand empty elements

If not selected (default), the **Format and Indent** operation results in an empty XML element being serialized in a compact form (`<a attr1="v1" />`). If selected, the same operation results in empty XML elements being serialized in expanded form (for example, `<a attr1="v1"></a>`).

Sort attributes

The **Format and Indent** operation sorts the attributes of an element lexicographically.

Add space before slash in empty elements

Inserts a space character before the trailing / and > of empty elements.

Break line before an attribute name

The **Format and Indent** operation breaks the line before the attribute name.

Element Spacing Section

This section controls how the application handles whitespaces found in XML content. You can **Add** or **Remove** element names or simplified XPath expressions in the various tabs.

The XPath expressions can accept multiple attribute conditions and inside each condition you can use *AND*/*OR* boolean operators and parentheses to override the priority.

You can use one or more of the following attribute conditions (default attribute values are not taken into account):

- `element[@attr]` - Matches all instances of the specified element that include the specified attribute.
- `element[not(@attr)]` - Matches all instances of the specified element that do not include the specified attribute.

- `element[@attr = "value"]` - Matches all instances of the specified element that include the specified attribute with the given value.
- `element[@attr != "value"]` - Matches all instances of the specified element that include the specified attribute and its value is different than the one given.

Example: The following is an example of how you could use multiple boolean operators and parentheses inside an attribute condition:

```
*[@a and @b or @c and @d]
*[@a and (@b or @c) and @d]
```

The following are just examples of how simplified XPath expressions might look like:

- `elementName`
- `//elementName`
- `/elementName1/elementName2/elementName3`
- `//xs:localName` Note: The namespace prefixes (such as `xs`) are treated as part of the element name without taking its binding to a namespace into account.
- `//xs:documentation[@lang="en"]`

The tabs are as follows:

Preserve space

List of elements for which the **Format and Indent** operation preserves the whitespaces (such as blanks, tabs, and newlines).

Default space

List of elements for which the content is normalized (multiple contiguous whitespaces are replaced by a single space), before applying the **Format and Indent** operation.

Mixed content

The elements from this list are treated as mixed content when applying the **Format and Indent** operation. The lines are split only when whitespaces are encountered.

Line break

List of elements for which line breaks will be inserted, regardless of their content. You can choose to break the line *before* the element, *after*, or *both*.

Schema aware format and indent

The **Format and Indent** operation takes the schema information into account with regards to the *space preserve*, *mixed*, or *element only* properties of an element.

Indent Section

Includes the following options:

Indent (when typing) in preserve space elements

Normally, the *Preserve space* elements (identified by the `xml:space` attribute set to *preserve* or by their presence in the [Preserve space tab of the Element Spacing list](#)) are ignored by the **Format and Indent** operation. When this option is selected and you edit one of these elements, its content is formatted.

Indent on paste - sections with number of lines less than 300

When you paste a chunk of text that has fewer than 300 lines, the inserted content is indented. To keep the original indent style of the document you copy content from, deselect this option.

Whitespaces Preferences

When Oxygen XML Developer formats and indents XML documents, a whitespace normalization process is applied, thus replacing whitespace sequences with single space characters. Oxygen XML Developer allows you to configure which Unicode characters are treated as spaces during the normalization process.

To configure the **Whitespace** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > XML > Whitespaces**.

This table lists the Unicode whitespace characters. Select any that you want to have treated as whitespace when formatting and indenting an XML document.

The whitespaces are normalized when the **Format and Indent** action is applied on an XML document.

Note: The whitespace normalization process replaces any sequence of characters declared as whitespaces in the **Whitespaces** table with a single space character (U+0020). If you want to be sure that a certain whitespace character will not be removed in the normalization process, deselect it in the **Whitespaces** table.

Important: The characters with the codes U+0009 (TAB), U+000A (LF), U+000D (CR) and U+0020 (SPACE) are always considered to be whitespace characters and cannot be deselected.

XQuery Preferences

To configure the **XQuery** Formatting options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > XQuery**.

The following options are available:

- **Preserve line breaks** - All initial line breaks are preserved.
- **Break line before an attribute name** - Each attribute of an XML element is written on a new line and properly indented.

XPath Preferences

To configure the **XPath** Formatting options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > XPath**.

The following option is available:

- **Format XPath code embedded in XSLT, XSD and Schematron files** - If selected, the **Format and Indent** action applied on an XSD, XSLT, or Schematron document will perform an XPath-specific formatting on the values of the attributes that accept XPath expressions.

Note: For XSLT documents, the formatting is not applied to *attribute value templates*.

CSS Preferences

Oxygen XML Developer can format and indent your CSS files. To configure the **CSS** formatting options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > CSS**.

The following options control how your CSS files are formatted and indented:

Class body on new line

If selected, the *class* body (including the curly brackets) is placed on a new line. This option is not selected by default.

Indent class content

When selected (default state), the *class* content is indented.

Add space before the value of a CSS property

When selected (default state), whitespaces are added between the **:** (colon) and the value of a style property.

Add new line between classes

If selected, an empty line is added between two classes. This option is not selected by default.

Preserve empty lines

When selected (default state), the empty lines from the CSS content are preserved.

Allow formatting embedded CSS

When selected (default state), CSS content that is embedded in XML is also formatted when the XML content is formatted.

JavaScript Preferences

To configure the **JavaScript** format options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Format > JavaScript**.

The following options control the behavior of the **Format and Indent** action:

- **Start curly brace on new line** - Opening curly braces start on a new line.
- **Preserve empty lines** - Empty lines in the JavaScript code are preserved. This option is selected by default.

- **Allow formatting embedded JavaScript** - Applied only to XHTML documents, this option allows Oxygen XML Developer to format embedded JavaScript code, taking precedence over the [Schema aware format and indent](#) option. This option is selected by default.

Content Completion Preferences

Oxygen XML Developer provides a [Content Completion Assistant](#) that provides a list of available options at any point in a document and can auto-complete structures, elements, and attributes. To configure the **Content Completion** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion**. These options control how the *Content Completion Assistant* works.

The following options are available:

Auto close the last opened tag

When selected, Oxygen XML Developer automatically closes the last open tag when you type `</`.

Automatically rename/delete/comment matching tags

If you rename, delete, or comment out a start tag, Oxygen XML Developer automatically renames, deletes, or comments out the matching end tag.

Note: If you select **Toggle comment** for multiple starting tags and the matching end tags are on the same line as other start tags, the end tags are not commented.

Enable content completion

Toggles the content completion feature on or off.

Close the inserted element

When you choose an entry from the *Content Completion Assistant* list of proposals, Oxygen XML Developer inserts both start and end tags. The following additional options are available in regards to closing the element:

- **If it has no matching tag** - The end tag of the inserted element is automatically added only if it is not already present in the document.
- **Add element content** - Oxygen XML Developer inserts the required elements specified in the DTD, XML Schema, or RELAX NG schema that is [associated with the edited XML document](#).
 - **Add optional content** - If selected, Oxygen XML Developer inserts the optional elements specified in the DTD, XML Schema, or RELAX NG schema.
 - **Add first Choice particle** - If selected, Oxygen XML Developer inserts the first **choice** particle specified in the DTD, XML Schema, or RELAX NG schema.

Case sensitive search

When selected, the search in the *Content Completion Assistant* is case-sensitive when you type a character ('a' and 'A' are different characters).

Note: This option is ignored when the current language itself is not case sensitive. For example, the case is ignored in the CSS language.

Position cursor between tags

When selected, Oxygen XML Developer automatically moves the cursor between the start and end tag after inserting the element. This only applies to:

- Elements with only optional attributes or no attributes at all.
- Elements with required attributes, but only when the [Insert the required attributes](#) option is not selected.

Show all entities

Oxygen XML Developer displays a list with all the internal and external entities declared in the current document when you type the start character of an entity reference (for example, `&`).

Insert the required attributes

Oxygen XML Developer inserts automatically the required attributes taken from the DTD or XML Schema.

Insert the fixed attributes

If selected, Oxygen XML Developer automatically inserts any FIXED attributes from the DTD or XML Schema for an element inserted with the help of the *Content Completion Assistant*.

Show recently used items

When selected, Oxygen XML Developer remembers the last inserted items from the *Content Completion Assistant* window. The number of items to be remembered is limited by the **Maximum number of recent items shown** list box. These most frequently used items are displayed on the top of the content completion window and are separated from the rest of the suggestions by a thin gray line.

Maximum number of recent items shown

Specifies the limit for the number of recently used items presented at the top of the *Content Completion Assistant* window.

Learn attributes values

When selected, Oxygen XML Developer learns the attribute values used in a document.

Learn on open document

Oxygen XML Developer automatically learns the document structure when the document is opened.

Learn words (Dynamic Abbreviations, available on **Ctrl+Space** (**Command+Space** on OS X))

When selected, Oxygen XML Developer learns the typed words and makes them available in a content completion fashion by pressing **Ctrl + Space** (**Command + Space** on OS X) on your keyboard;

Note: In order to be learned, the words need to be separated by space characters.

Activation delay of the proposals window (ms)

Delay in milliseconds from last key press until the *Content Completion Assistant* is displayed.

Annotations Preferences

Certain types of schemas (XML Schema, DTDs, Relax NG) can include annotations that document the various elements and attributes that they define. Oxygen XML Developer can display these annotations when offering content completion suggestions. To configure the **Annotations** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion > Annotations**.

The following options are available:

Show annotations in Content Completion Assistant

If selected, Oxygen XML Developer displays the schema annotations of an element, attribute, or attribute value currently selected in the [Content Completion Assistant](#) proposals list.

Show annotations in tooltip

If selected, Oxygen XML Developer displays the annotation of elements and attributes as a tooltip when you hover over them with the cursor in the editing area or in the [Elements view](#). If not selected, tooltips are disabled in all modes.

Show annotation in HTML format, if possible

This option allows you to view the annotations associated with an element or attribute in HTML format. It is available when editing XML documents that have associated an XML Schema or Relax NG schema. If this option is not selected, the annotations are converted and displayed as plain text.

Prefer DTD comments that start with "doc:" as annotations

To address the lack of dedicated annotation support in DTD documents, Oxygen XML Developer recommends prefixing with the doc : particle all comments intended to be shown to the developer who writes an XML validated against a DTD schema.

If this option is selected, Oxygen XML Developer uses the following mechanism to collect annotations:

- If at least one doc : comment is found in the entire DTD, only comments of this type are displayed as annotations.
- If no doc : comment is found in the entire DTD, all comments are considered annotations and displayed as such.

If not selected, all comments, regardless of their type, are considered annotations and displayed as such.

Use all Relax NG annotations as documentation

If selected, any element outside the Relax NG namespace, that is `http://relaxng.org/ns/structure/1.0`, is considered annotation and is displayed in the annotation window next to the [Content](#)

[Completion Assistant](#) window and in the [Model view](#). When this option is not selected, only elements from the Relax NG annotations namespace, that is `http://relaxng.org/ns/compatibility/annotations/1.0` are considered annotations.

Related Information:

[Schema Annotations in Text Mode](#) on page 373

XSLT Preferences

XSLT stylesheets are often used to create output in XHTML or XSL-FO. In addition to suggesting content completion options for XSLT stylesheet elements, Oxygen XML Developer can suggest elements from these vocabularies. To configure the XSLT content completion options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion > XSLT**.

The following options are available:

Include elements declared in the schema section

This section includes options in regards to detecting elements from the declared schema.

Automatically detect HTML or Formatting Objects

Detects if the output being generated is HTML or FO and provides content completion for those vocabularies. Oxygen XML Developer analyzes the namespaces declared in the root element to find an appropriate schema.

If the detection fails, Oxygen XML Developer uses one of the following options:

- **None** - The [Content Completion Assistant](#) suggests only XSLT elements.
- **HTML** - The [Content Completion Assistant](#) includes HTML elements, including HTML5 elements (such as video, canvas, etc.).
- **Formatting objects** - The [Content Completion Assistant](#) includes Formatting Objects (XSL-FO) elements as substitutes for `xsl:element`.
- **Custom schema** - If you want content completion hints for another output vocabulary, you can use this option to specify the path to the schema for that vocabulary. The supported schema types are DTD, XML Schema, RNG schema, or NVDL schema for inserting elements from the target language of the stylesheet.

Documentation schema section

This section specifies an additional schema that will be used for documenting XSL stylesheets. You can choose between the following:

- **Build-in schema** - Uses the built-in schema for documentation.
- **Custom schema** - Allows you to specify a custom schema for documentation. The supported schema types are XSD, RNG, RNC, DTD, and NVDL.

XPath Preferences

Oxygen XML Developer provides content-completion support for XPath expressions. To configure the options for the content completion in XPath expressions, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion > XPath**.

The following options are available:

- **Enable content completion for XPath expressions** - Enables the [Content Completion Assistant in XPath expressions](#) that you enter in the match, select, and test XSL attributes and also in the [XPath toolbar](#).
 - **Include XPath functions** - When this option is selected, XPath functions are included in the content completion suggestions.
 - **Include XSLT functions** - When this option is selected, XSLT functions are included in the content completion suggestions.
 - **Include axes** - When this option is selected, XSLT axes are included in the content completion suggestions.
- **Show signatures of XSLT / XPath functions** - Makes the editor indicate the signature of the XPath function located at the cursor position in a tooltip. See the [XPath Tooltip Helper](#) section for more information.
- **Function signature window background** - Specifies the background color of the tooltip window.
- **Function signature window foreground** - Specifies the foreground color of the tooltip window.

XSD Preferences

Oxygen XML Developer provides content completion assistance when you are writing XML Schema (XSD). To configure XSD preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion > XSD**. The option in this preferences page allows you to define additional elements to be suggested by the *Content Completion Assistant* in `xs:appinfo` elements (in addition to the elements defined in the XML Schema).

The following option is available:

When in "xs:appinfo" context, also include elements declared in the schema

You can choose between the following:

- **None** - The *Content Completion Assistant* offers only the XML Schema schema information.
- **ISO Schematron** - The *Content Completion Assistant* also includes ISO Schematron elements in `xs:appinfo`.
- **Schematron 1.5** - The *Content Completion Assistant* also includes Schematron 1.5 elements in `xs:appinfo`.
- **Other** - The *Content Completion Assistant* also includes elements from an XML Schema identified by a URL in `xs:appinfo` elements.

JavaScript Preferences

Oxygen XML Developer can provide content completion suggestions when you are writing JavaScript files. To configure content completion support for JavaScript, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Content Completion > JavaScript**. You can configure the following options:

Enable content completion

Enables the content completion support for JavaScript files.

Use built-in libraries

Allows Oxygen XML Developer to include components (object names, properties, functions, and variables) collected from the built-in JavaScript library files when making suggestions.

Use defined libraries

Oxygen XML Developer can also use JavaScript libraries to when making suggestions. List the paths (URIs) of any JavaScript files you want Oxygen XML Developer to use when making suggestions.

Note: The paths can contain [editor variables](#) such as `${pdu}`, or `${oxygenHome}`. You can make these paths relative to the project directory or installation directory.

Syntax Highlight Preferences

Oxygen XML Developer supports syntax highlighting in the **Text** mode editors for numerous types of documents, including XML, XHTML, JavaScript, XQuery, XPath, PHP, CSS, LESS, Markdown, Text, DTD, RNC, Java, JSON, Ant, and more.

To configure syntax highlighting, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight**.

To set syntax colors for a language, expand the listing for that language in the top panel to show the list of syntax items for that type of document. Use the color and style selectors to change how each syntax item is displayed. The results of your changes are displayed in the **Preview** panel. If you do not know the name of the syntax token that you want to configure, click that token in the **Preview** area to select it.

Note: All default color sets come with a high-contrast variant that is automatically used when you switch to a black-background or white-background high-contrast theme in your Windows operating system settings. The high-contrast theme will not overwrite any default color you set in **Editor > Syntax Highlight** preferences page.

The settings for XML documents are also used in XSD, XSL, RNG documents and the **Preview** area has a separate tab for each of them when **XML** is selected in the top pane.

The **Enable nested syntax highlight** option controls whether or not content types that are nested in the same file (such as PHP, JS, or CSS scripts inside an HTML file) are highlighted according to the color schemes defined for each content type.

Elements/Attributes by Prefix Preferences

Oxygen XML Developer allows you to specify syntax highlighting colors for XML elements and attributes with specific namespace prefixes. To configure the **Elements/Attributes by Prefix** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight > Elements/Attributes by Prefix**.

To change the syntax coloring for a specific namespace prefix, choose the prefix from the list, or add a new one using the **New** button, and use the color and style selectors to set the syntax highlighting style for that namespace prefix.

Note: Syntax highlighting is based on the literal namespace prefix, not the namespace that the prefix is bound to in the document.

If you only want the prefix (and not the whole element or attribute name) to be styled with a particular color, select the **Draw only the prefix with a separate color** option.

Open/Save Preferences

Oxygen XML Developer lets you control how files are opened and saved. To configure the options for opening and saving documents, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Open/Save**.

The following options are available:

Open section

Lock local resources

When this option is selected and you open a file from the local file system or a shared network drive, Oxygen XML Developer locks the file for the current user and the file becomes read-only for other users while the lock exists. Locked and read-only files have a lock icon (🔒) displayed on their editor tabs. Newly created files are *locked* when you first save them. If you select this option with files already opened in Oxygen XML Developer, it will *lock* all the currently opened files. If you deselect this option with files already opened, it will unlock them by deleting the corresponding `.lock` files. When you try to save locked (read-only) files, a **Save As** dialog box will be displayed to avoid overwriting the initial resource.

Restore cursor position

Selected by default, it ensures that the last position of the cursor will be remembered when a document is re-opened. If this option is not selected, the cursor will always be positioned at the beginning of the document.

Open each document in a tab next to the current one

When selected (default), each new document is opened in a tab next to the currently opened tab. If not selected, each new document is opened in a tab at the end of the current tab stack.

Support for Special Characters section

Note: The options in this section only affect the **Text** editing mode.

When bidirectional text, Asian languages, or other special characters are detected

You can choose how you want Oxygen XML Developer to handle bidirectional text, Asian languages, or other special characters when they are detected in **Text** mode. You can choose one of the following:

- **Enable support for special characters** - The support for special characters will always be enabled. For details about what this means, see [Bidirectional Text Support in Text Mode - Enabled](#).
- **Disable support for special characters** - The support for special characters will always be disabled. For details about what this means, see [Bidirectional Text Support in Text Mode - Disabled](#).
- **Prompt for each document** (default setting) - You will be prompted to choose whether or not to enable the support for special characters whenever they are detected in a newly opened document.

Disable special characters support for documents larger than (characters)

Enabling bidirectional text editing support can affect performance on large files. When this option is selected, bidirectional editing is disabled for files exceeding the specified size (even if the [Enable support for special characters option](#) is selected). The default limit is 300 MB. You can change it to 500 MB or 800 MB, but it is recommended that you always leave this option selected regardless of the limit that is set.

Save section

Show "Save as" option to save newly created documents in the "New" document wizard

It is selected by default, but if you deselect this option, the [Save as option](#) will not be available in the [New Document wizard](#), so you will not have the ability to change the default name and path of the new file.

Safe save (only for local files)

In the unlikely event of a failure when attempting a **Save** action, this option provides increased protection from corruption of the original file. When this option is selected, it saves the content to a temporary file and if the save is unsuccessful, the editor preserves its unsaved state status.

On Save, make backup copy with extension (only for local files)

If selected, a backup copy is made when saving the edited document. This option is available only for local files (files that are stored on the local file system). The default backup file extension is `.bak`, but that can be changed in the text field.

Automatically save the document every

If selected, your documents are automatically saved after a preset time interval that is specified in the drop-down list.

Save all files before transformation or validation

Saves all opened files before validating or transforming an XML document. This ensures that any dependencies are resolved when modifying the XML document and its XML Schema.

Check errors on save

If selected, Oxygen XML Developer runs a validation that checks your document for errors before saving it.

Save all files before calling external tools

If selected, all files are saved before executing an [external tool](#).

Performance section

Optimize loading in the Text edit mode for files over (MB)

File loading is optimized for reduced memory usage for any file whose size is larger than the value specified in this drop-down list. This is useful for editing large files, but there are [several restrictions](#) for memory-intensive operations.

Show warning when loading large documents

Oxygen XML Developer will warn you if you open a file that is bigger than the specified size.

Optimize loading for documents with lines longer than (Characters)

Line wrap is automatically performed for documents that contain lines that exceed the length specified in this text field. For a list of the restrictions applied to a document with long lines, see [Editing Documents with Long Lines](#).

Show warning when loading documents with long lines

When selected, Oxygen XML Developer will warn you when you open a file with lines longer than the specified length. To reduce the length of lines in a file, [format and indent the document](#) after it is opened in the editor panel. For a list of the restrictions applied to a document with long lines, see [Documents with Long Lines](#) on page 332.

Clear undo buffer on save

If selected, Oxygen XML Developer clears its undo buffer when you save a document. Thus, modifications made prior to saving the document cannot be undone. Select this option if you frequently encounter **out of memory** errors when editing large documents.

Consider application bundles to be directories when browsing (OS X only)

This option is available only on the Mac OS X platform. When selected, the file browser dialog box allows you to browse inside an application bundle, as in a regular folder. Otherwise, it is not allowed (the same as the Finder application on Mac OS X).

Note: The same effect can be obtained by setting the `apple.awt.use-file-dialog-packages` property to **true** or **false** in the `Info.plist` descriptor file of the Oxygen XML Developer application:

```
<key>apple.awt.use-file-dialog-packages</key>
```



```
<string>>false</string>
```

Save Hooks Preferences

Oxygen XML Developer includes an option for automatically compiling LESS stylesheets. To set this option, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Open/Save > Save Hooks**.

The following option is available:

Automatically compile LESS to CSS when saving

If selected, when you save a LESS file it will automatically be compiled to CSS (deselected by default).

Important: If this option is selected, when you save a LESS file, the CSS file that has the same name as the LESS file is overwritten without warning. Make sure all your changes are made in the LESS file. Do not edit the CSS file directly, as your changes might be lost.

Templates Preferences

This page simply allows you to navigate to the preference pages for code templates or document templates.

Code Templates Preferences

[Code templates](#) are code fragments that can be inserted at the current editing position. Oxygen XML Developer includes a set of built-in templates for CSS, LESS, Schematron, XSL, XQuery, and XML Schema document types. You can also define your own code templates for any type of file and share them with your colleagues using the template export and import functions.

To configure **Code Templates**, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Templates > Code Templates**.

This preferences page contains a list of all the available code templates (both built-in and custom created ones) and a code preview area. You can disable any code template by deselecting it.

The following actions are available:

New

Opens the **Code template** dialog box that allows you to define a new code template. You can define the following fields:

- **Name** - The name of the code template.
- **Description** - The description of the code template that will appear in the **Code Templates** preferences page and in the tooltip message when selecting it from the [Content Completion Assistant](#). HTML markup can be used for better rendering.
- **Associate with** - You can choose to set the code template to be associated with a specific type of editor or for all editor types.
- **Shortcut key** - Allows you to configure a shortcut key that can be used to insert the code template. The + character separates keys. If the **Enable platform-independent shortcut keys** checkbox is selected, the shortcut is platform-independent and the following modifiers are used:
 - M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
 - M2 represents the **Shift** key.
 - M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
 - M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.
- **Content** - Text box where you define the content that is used when the code template is inserted.

Edit

Opens the **Code template** dialog box and allows you to edit an existing code template. You can edit the following fields:

- **Description** - The description of the code template that will appear in the **Code Templates** preferences page and in the tooltip message when selecting it from the [Content Completion Assistant](#). HTML markup can be used for better rendering.
- **Shortcut key** - Allows you to configure a shortcut key that can be used to insert the code template. The + character separates keys. If the **Enable platform-independent shortcut keys** checkbox is selected, the shortcut is platform-independent and the following modifiers are used:

- M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
- M2 represents the **Shift** key.
- M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
- M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.
- **Content** - Text box where you define the content that is used when the code template is inserted.

Duplicate

Creates a duplicate of the currently selected code template.

Delete

Deletes the currently selected code template. This action is not available for the built-in code templates.

Export

Exports a file with code templates.

Import

Imports a file with code templates that was created by the **Export** action.

You can use the following [editor variables](#) when you define a code template in the **Content** text box:

- **\${caret}** - The position where the cursor is located. This variable can be used in a code template, in **Author** mode operations, or in a **selection plugin**.
- **\${selection}** - The current selected text content in the current edited document. This variable can be used in a code template, in **Author** mode operations, or in a **selection plugin**.
- **\${ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default_value')}**
- To prompt for values at runtime, use the `ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default-value')` editor variable. You can set the following parameters:
 - **'message'** - The displayed message. Note the quotes that enclose the message.
 - **'default-value'** - Optional parameter. Provides a default value.
 - **type** - Optional parameter, with one of the following values:

Note: The title of the dialog box will be determined by the type of parameter and as follows:

- For `url` and `relative_url` parameters, the title will be the name of the parameter and the value of the `'message'`.
- For the other parameters listed below, the title will be the name of that respective parameter.
- If no parameter is used, the title will be "Input".

Parameter	
url	Format: <code>\${ask('message', url, 'default_value')}</code>
	Description: Input is considered a URL. Oxygen XML Developer checks that the provided URL is valid.
	Example: • <code>\${ask('Input URL', url)}</code> - The displayed dialog box has the name <i>Input URL</i>. The expected input type is URL. • <code>\${ask('Input URL', url, 'http://www.example.com')}</code> - The displayed dialog box has the name <i>Input URL</i>. The expected input type is URL. The input field displays the default value <i>http://www.example.com</i>.
password	Format: <code>\${ask('message', password, 'default')}</code>
	Description: The input is hidden with bullet characters.

Parameter	
	Example: • <code>\${ask('Input password', password)}</code> - The displayed dialog box has the name 'Input password' and the input is hidden with bullet symbols. • <code>\${ask('Input password', password, 'abcd')}</code> - The displayed dialog box has the name 'Input password' and the input hidden with bullet symbols. The input field already contains the default abcd value.
generic	Format: <code>\${ask('message', generic, 'default')}</code>
	Description: The input is considered to be generic text that requires no special handling.
	Example: • <code>\${ask('Hello world!')}</code> - The dialog box has a <i>Hello world!</i> message displayed. • <code>\${ask('Hello world!', generic, 'Hello again')}</code> - The dialog box has a <i>Hello world!</i> message displayed and the value displayed in the input box is 'Hello again!'.
relative_url	Format: <code>\${ask('message', relative_url, 'default')}</code>
	Description: Input is considered a URL. Oxygen XML Developer tries to make the URL relative to that of the document you are editing. Note: If the <code>\$ask</code> editor variable is expanded in content that is not yet saved (such as an <i>untitled</i> file, whose path cannot be determined), then Oxygen XML Developer will transform it into an absolute URL.
	Example: • <code>\${ask('File location', relative_url, 'C:/example.txt')}</code> - The dialog box has the name 'File location'. The URL inserted in the input box is made relative to the current edited document location.
combobox	Format: <code>\${ask('message', combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code>
	Description: Displays a dialog box that offers a drop-down menu. The drop-down menu is populated with the given <i>rendered_value</i> values. Choosing such a value will return its associated value (<i>real_value</i>). Note: The 'default' parameter specifies the default selected value and can match either a key or a value.
	Example: • <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx')}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems. The associated value will be returned based upon your selection. Note: In this example, the default value is indicated by the <i>osx</i> key. However, the same result could be obtained if the default value is indicated by <i>Mac OS X</i>, as in the following example: <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'Mac OS X')}</code> • <code>\${ask('Mobile OS', combobox, ('win':'Windows Mobile';'ios':'iOS';'and':'Android'), 'Android')}</code>
editable_combobox	Format: <code>\${ask('message', editable_combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code>

Parameter	
	Description: Displays a dialog box that offers a drop-down menu with editable elements. The drop-down menu is populated with the given <i>rendered_value</i> values. Choosing such a value will return its associated real value (<i>real_value</i>) or the value inserted when you edit a list entry. Note: The <i>'default'</i> parameter specifies the default selected value and can match either a key or a value. Example: <code>\${ask('Operating System', editable_combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx')}</code> - The dialog box has the name <i>'Operating System'</i>. The drop-down menu displays the three given operating systems and also allows you to edit the entry. The associated value will be returned based upon your selection or the text you input.
radio	Format: <code>\${ask('message', radio, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a series of radio buttons. Each radio button displays a <i>rendered_value</i> and will return an associated <i>real_value</i>. Note: The <i>'default'</i> parameter specifies the default selected value and can match either a key or a value. Example: <code>\${ask('Operating System', radio, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx')}</code> - The dialog box has the name <i>'Operating System'</i>. The radio button group allows you to choose between the three operating systems. Note: In this example Mac OS X is the default selected value and if selected it would return osx for the output.

- **`\${timeStamp}`** - Time stamp, that is the current time in Unix format. For example, it can be used to save transformation results in multiple output files on each transformation.
- **`\${uuid}`** - Universally unique identifier, a unique sequence of 32 hexadecimal digits generated by the Java [UUID](#) class.
- **`\${id}`** - Application-level unique identifier. It is a short sequence of 10-12 letters and digits that is not guaranteed to be universally unique.
- **`\${cfn}`** - Current file name without extension and without parent folder. The current file is the one currently opened and selected.
- **`\${cfne}`** - Current file name with extension. The current file is the one currently opened and selected.
- **`\${cf}`** - Current file as file path, that is the absolute file path of the current edited document.
- **`\${cfd}`** - Current file folder as file path, that is the path of the current edited document up to the name of the parent folder.
- **`\${frameworksDir}`** - The path (as file path) of the `[OXYGEN_INSTALL_DIR]/frameworks` directory.
- **`\${pd}`** - The file path to the folder that contains the current project file (`.xpr`).
- **`\${oxygenInstallDir}`** - Oxygen XML Developer installation folder as file path.
- **`\${homeDir}`** - The path (as file path) of the user home folder.
- **`\${pn}`** - Current project name.
- **`\${env(VAR\_NAME)}`** - Value of the `VAR_NAME` environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the **`\${system(var.name)}`** editor variable.
- **`\${system(var.name)}`** - Value of the `var.name` Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as `-Dvar.name=var.value`. If you are looking for operating system environment variables, use the **`\${env(VAR\_NAME)}`** editor variable instead.

- **`${date(pattern)}`** - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#). **Example:** `yyyy-MM-dd`;

Note: This editor variable supports both the **xs:date** and **xs:datetime** parameters. For details about **xs:date**, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about **xs:datetime**, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.

Related Information:

[Code Templates](#) on page 379

Document Templates Preferences

Oxygen XML Developer provides a variety of predefined document templates that make it easier to create new documents in various formats. The list of available templates is presented in the [New Document wizard](#) when you create a new document ( **New** toolbar button or **File > New**).

You can also [create your own templates](#) and share them with others. You can store your custom document templates in the existing `templates` folder in the Oxygen XML Developer installation directory or store them in a custom directory. If you store them in a custom directory, you need to use this **Document Templates** preferences page to add that directory to the list of template directories that Oxygen XML Developer makes available in the **New Document** wizard.

To add a template directory, follow these steps:

1. [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Templates > Document Templates**.
2. Use the **New** button to select a location of the new document template folder.
3. You can also use the **Edit** or **Delete** buttons to manage folders in the list, and you can alter the order in which Oxygen XML Developer looks in these directories by using the **Up** and **Down** buttons.

Result: This will add the folder to the list in this preferences page and it will now appear in the [New Document wizard](#) in a category based upon the folder path you specified.

Note: For DITA templates, they will also appear in the dialog box for creating new DITA topics, but if you [customize the template](#), you need to set the type property to **dita** in the corresponding properties file.

Mark Occurrences Preferences

This preferences page specifies which types of files will have the [Highlight IDs Occurrences](#) feature activated. To configure these options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Mark Occurrences**:

The following options are available in this preferences page:

Highlight component occurrences in the current file for:

- **XML files** - Activates the [Highlight IDs Occurrences](#) feature in XML files.
- **XSLT files** - Activates the [Highlight Component Occurrences](#) feature in XSLT files.
- **XML Schema files** - Activates the [Highlight Component Occurrences](#) feature in XSD files.
- **WSDL files** - Activates the [Highlight Component Occurrences](#) feature in WSDL files.
- **RNG files** - Activates the highlight component occurrences feature in RNG files.
- **Schematron files** - Activates the [Highlight Component Occurrences](#) feature in Schematron files.
- **Ant files** - Activates the [Highlight Component Occurrences](#) feature in Ant files.

Declaration highlight color

Allows you to choose the color to be used for highlighting component declarations.

Reference highlight color

Allows you to choose the color to be used for highlighting component references.

Custom Validation Engines Preferences

As the name implies, the **Custom Validation Engines** preferences page displays the list of custom validation engines that can be associated to a particular editor and used for validating documents. To access this page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Custom Validation Engines**.

If you want to add a new custom validation tool or edit the properties of an existing one, you can use the **Custom Validator** dialog box displayed by pressing the **New** or **Edit** button.

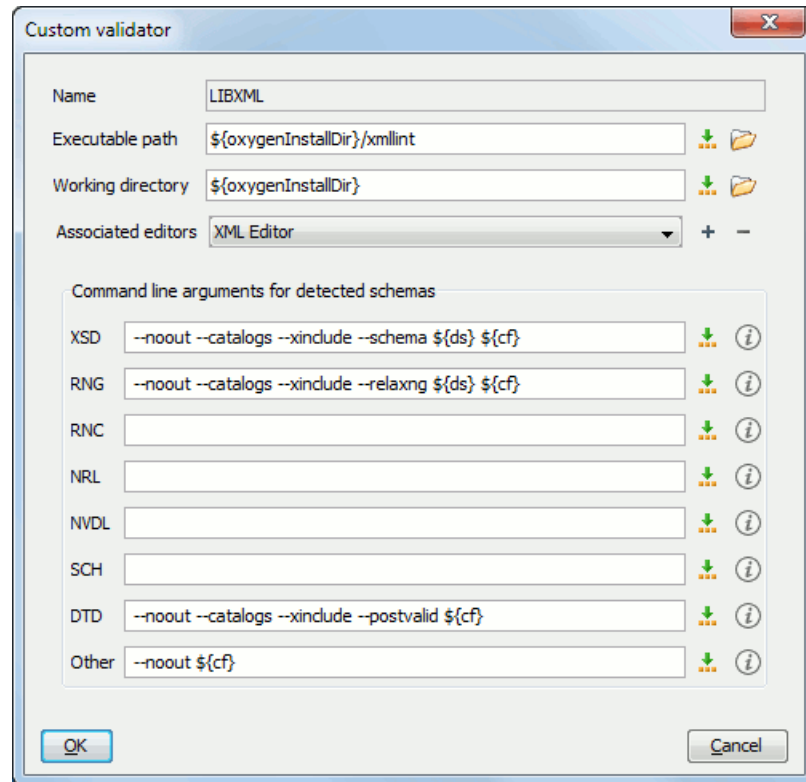


Figure 19: Custom Validator Dialog Box

The **Custom Validator** dialog box allows you to configure the following parameters:

Name

Name of the custom validation engine that will be displayed in the **Validation** toolbar drop-down menu.

Executable path

Path to the executable file of the custom validation tool. You can specify the path by using the text field, the **Insert Editor Variables** button, or the **Browse** button.

Working directory

The working directory of the custom validation tool. You can specify the path by using the text field, the **Insert Editor Variables** button, or the **Browse** button.

Associated editors

The editors that can perform validation with the external tool (XML editor, XSL editor, XSD editor, etc.)

Command line arguments for detected schemas

Command line arguments used in the commands that validate the currently edited file against various types of schema (W3C XML Schema, Relax NG full syntax, Relax NG compact syntax, NVDL, Schematron, DTD, etc.) The arguments can include any custom switch (such as -rng) and the following [editor variables](#):

- **\${cf}** - Current file as file path, that is the absolute file path of the current edited document.
- **\${currentFileURL}** - Current file as URL, that is the absolute file path of the current edited document represented as URL.
- **\${ds}** - The path of the detected schema as a local file path for the current validated XML document.
- **\${dsu}** - The path of the detected schema as a URL for the current validated XML document.

Related Information:

[Editor Variables](#) on page 151

Increasing the Stack Size for Validation Engines

To prevent the appearance of a **StackOverflowException** error, use one of the following methods:

- Use the **com.oxygenxml.stack.size.validation.threads** property to increase the size of the stack for validation engines. The value of this property is specified in bytes. For example, to set a value of one megabyte specify $1 \times 1024 \times 1024 = 1048576$.
- Increase the value of the **-Xss** parameter.

Note: Increasing the value of the **-Xss** parameter affects all the threads of the application.

Related Information:

[Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer](#) on page 160

CSS Validator Preferences

To configure the **CSS Validator** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **CSS Validator**.

You can configure the following options for the built-in **CSS Validator** of Oxygen XML Developer:

- **Profile** - Selects one of the available validation profiles: **CSS 1, CSS 2, CSS 2.1, CSS 3, CSS 3 with Oxygen extensions, SVG, SVG Basic, SVG Tiny, Mobile, TV Profile, ATSC TV Profile**. The **CSS 3 with Oxygen extensions** profile includes all the CSS 3 standard properties and the CSS extensions specific for Oxygen. That means all Oxygen specific extensions are accepted in a CSS stylesheet by [the built-in CSS validator](#) when this profile is selected.
- **Media type** - Selects one of the available mediums: **all, aural, braille, embossed, handheld, print, projection, screen, tty, tv, presentation, oxygen**.
- **Warning level** - Sets the minimum severity level for reported validation warnings. Can be one of: **All, Normal, Most Important, No Warnings**.
- **Ignore properties** - You can type comma separated patterns that match the names of CSS properties that will be ignored at validation. As wildcards you can use:
 - * to match any string.
 - ? to match any character.
- **Recognize browser CSS extensions (also applies to content completion)** - If selected, Oxygen XML Developer recognizes (no validation is performed) browser-specific CSS properties. The [Content Completion Assistant](#) lists these properties at the end of its list, prefixed with the following particles:
 - -moz- for *Mozilla*.
 - -ms- for *Internet Explorer* or *Edge*.
 - -o- for *Opera*.
 - -webkit- for *Safari/Webkit*.

XML Preferences

This section describes the panels that contain the user preferences related with XML.

XML Catalog Preferences

To configure options that pertain to [XML Catalogs](#), [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Catalog**.

The following options are available:

Prefer

Determines whether public identifiers specified in the catalog are used in favor of system identifiers supplied in the document. Suppose you have an entity in your document for which both a public identifier and a system identifier has been specified, and the catalog only contains a mapping for the public identifier (for example, a matching public catalog entry). You can choose between the following:

- **system** - If selected, the system identifier in the document is used.

- **public** - If selected, the URI supplied in the matching public catalog entry is used. Generally, the purpose of catalogs is to override the system identifiers in XML documents, so **public** should usually be used for your catalogs.

Note: If the catalog contains a matching system catalog entry giving a mapping for the system identifier, that mapping would have been used, the public identifier would never have been considered, and this setting would be irrelevant.

Verbosity

When using catalogs it is sometimes useful to see what catalog files are parsed, if they are valid or not, and what identifiers are resolved by the catalogs. This option selects the detail level of such logging messages of the *XML catalog* resolver that will be displayed in the **Catalogs** table at the bottom of the window. You can choose between the following:

- **None** - No message is displayed by the catalog resolver when it tries to resolve a URI reference, a SYSTEM one or a PUBLIC one with the *XML catalogs* specified in this panel.
- **Unresolved entities** - Only the logging messages that track the failed attempts to resolve references are displayed.
- **All messages** - The messages of both failed attempts and successful ones are displayed.

Resolve schema locations also through system mappings

If selected, Oxygen XML Developer analyzes both *uri* and *system* mappings to resolve the location of schema.

Note: This option is not applicable for DTD schemas since the public and system catalog mappings are always considered.

Process "schemaLocation" namespaces through URI mappings for XML Schema

If selected, the target namespace of the imported XML Schema is resolved through the *uri* mappings. The namespace is taken into account only when the schema specified in the *schemaLocation* attribute was not resolved successfully. If not selected, the system IDs are used to resolve the schema location.

Use default catalog

If this option is selected and Oxygen XML Developer cannot resolve the catalog mapping with any other means, the default global catalog (listed below this checkbox) is used. For more information, see [How Oxygen XML Developer Determines which Catalog to Use](#) on page 433.

Catalogs table

You can use this table to add or manage global user-defined catalogs. The following actions are available at the bottom of the table:

Add

Opens a dialog box that allows you to add a catalog to the list. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Edit

Opens a dialog box that allows you to edit an existing catalog. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

Delete

Deletes the currently selected catalog from the list.

Up

Moves the selection to the previous resource.

Down

Moves the selection to the following resource.

Note: When you add, delete, or edit a catalog in this table, you need to reopen the currently edited files that use the modified catalog or run a **manual Validate action** so that the changes take full effect.

You can also add or configure catalogs at *framework* level from the **Catalogs tab** in the **Document Type configuration dialog box**.

Related Information:

[Controlling the Catalog Resolver](#)

[Working with XML Catalogs](#) on page 432

XML Parser Preferences

To configure the **XML Parser** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser**.

The configurable options of the built-in XML parser are as follows:

Enable parser caching (validation and content completion)

Enables re-use of internal models when validating and provides content completion in opened XML files that reference the same schemas (grammars) such as DTD, XML Schema, or RelaxNG.

Ignore the DTD for validation if a schema is specified

Forces validation against a referenced schema (W3C XML Schema, Relax NG schema) even if the document includes also a DTD DOCTYPE declaration. This option is useful when the DTD declaration is used only to declare DTD entities and the schema reference is used for validation against a W3C XML Schema or a Relax NG schema.

Note: Schematron schemas are treated as additional schemas. The validation of a document associated with a DTD and referencing a Schematron schema is executed against both the DTD and the Schematron schema, regardless of the value of the **Ignore the DTD for validation if a schema is specified** option.

Enable XInclude processing

Enables XInclude processing. If selected, the XInclude support in Oxygen XML Developer is turned on for validation and transformation of XML documents.

Base URI fix-up

According to the specification for XInclude, processors must add an `xml:base` attribute to elements included from locations with a different base URI. Without these attributes, the resulting info:et information would be incorrect.

Unfortunately, these attributes make XInclude processing to not be transparent to Schema validation. One solution to this is to modify your schema to allow `xml:base` attributes to appear on elements that might be included from different base URIs.

If the addition of `xml:base` and / or `xml:lang` is not desired by your application, you can deselect this option.

Language fix-up

The processor will preserve language information on a top-level included element by adding an `xml:lang` attribute if its include parent has a different [language] property. If the addition of `xml:lang` is not allowed by your application, you can deselect this option.

DTD post-validation

Select this option to validate an XML file against the associated DTD, after all the content merged to the current XML file using XInclude was resolved. If you deselect this option, the current XML file is validated against the associated DTD before all the content merged to the current XML file using XInclude is resolved.

XML Schema Preferences

To configure options in regards to XML Schema, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema**.

This preferences page allows you to configure the following options:

Default XML Schema version

Allows you to select the version of W3C XML Schema to be used as the default. You can choose XML Schema **1.0** or XML Schema **1.1**.

Note: You are also able to set the XML Schema version using the **Customize** option in the [New document wizard](#).

Default XML Schema validation engine

Allows you to select the default validation engine to be used for XML Schema. You can choose **Xerces** or **Saxon EE**.

Xerces validation features section

Enable full schema constraint checking

Sets the *schema-full-checking* feature to `true`. This enables a validation of the parsed XML document against a schema (W3C XML Schema or DTD) while the document is parsed.

Enable honour all schema location feature

Sets the *honour-all-schema-location* feature to `true`. All the files that declare W3C XML Schema components from the same namespace are used to compose the validation model. If this option is not selected, only the first W3C XML Schema file that is encountered in the XML Schema import tree is taken into account.

Enable full XPath 2.0 for alternative types

When selected (default value), you can use the full XPath support in assertions and alternative types. Otherwise, only the XPath support offered by the Xerces engine is available.

Assertions can see comments and processing instructions

Controls whether or not comments and processing instructions are visible to the XPath expression used for defining an assertion in XSD 1.1.

Saxon EE validation features section

Multiple schema imports

Forces `xs:import` to fetch the referenced schema document. By default, the `xs:import` fetches the document only if no schema document for the given namespace has already been loaded. With this option in effect, the referenced schema document is loaded unless the absolute URI is the same as a schema document already loaded.

Assertions can see comments and processing instructions

Controls whether or not comments and processing instructions are visible to the XPath expression used to define an assertion. By default, they are not made visible (unlike Saxon 9.3).

Relax NG Preferences

To configure options in regards to Relax NG, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > Relax NG**.

The following options are available in this page:

Check feasibly valid

Checks if Relax NG documents can be transformed into valid documents by inserting any number of attributes and child elements anywhere in the tree.

Note: Selecting this option disables the **Check ID/IDREF** option.

Check ID/IDREF

Checks the ID/IDREF matches when a Relax NG document is validated.

Add default attribute values

Default values are given to the attributes of documents validated using Relax NG. These values are defined in the Relax NG schema.

Ignore "data-" attributes in XHTML

This option is selected by default, which means that when XHTML documents are validated with an RNG schema, any **data-** attributes detected in the document will not be taken into account by the validation engine.

Schematron Preferences

To configure options in regards to Schematron, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > Schematron**.

The following options are available in this preferences page:

ISO Schematron Section

Optimize (visit-no-attributes)

If your ISO Schematron assertion tests do not contain the attributes axis, you should select this option for faster ISO Schematron validation.

Allow foreign elements (allow-foreign)

Enables support for allow-foreign on ISO Schematron. This option is used to pass non-Schematron elements to the generated stylesheet.

Use associated XML Schema to expand default attribute values

When selected (default value), if the validated XML document has an XML Schema associated that contains default values for attributes defined in the XML content, the Schematron will be able to match on those default attributes.

Use Saxon EE (schema aware) for xslt2/xslt3 query language binding

When selected, Saxon EE is used for xslt2/xslt3 query binding. If this option is not selected, Saxon PE is used.

Enable Schematron Quick Fixes (SQF) support

Allows you to enable or disable the support for [Quick Fixes](#) in Schematron files. This option is selected by default.

Embedded rules query language binding

You can control the query language binding used by the ISO Schematron embedded rules. You can choose between: **xslt1**, **xslt2**, or **xslt3**.

Note: To control the query language binding for standalone ISO Schematron, you need to set the query language to be used with a queryBinding attribute on the schema root element.

Message language

This option allows you to specify the language to be used in Schematron validation messages. You can choose between the following:

- **Use the language defined in the application** - The language that is specified in [the Global Preferences page](#) will be used and only the validation messages that match that language will be presented. You can use the **Change application language** link to navigate to the preferences page where you can specify the language to be used in the application.
- **Use the "xml:lang" attribute set on the Schematron root** - The language specified in the xml:lang attribute from the Schematron root will be used and only the validation message that match that language will be presented.
- **Ignore the language and show all message** - All messages are displayed in whatever language is defined within the Schematron schema.
- **Custom** - Use this option to specify a custom language to be used and only the messages that match the specified language will be presented.

Note: In all cases, if the selected language is not available for a validation error or warning, all messages will be displayed in whatever language is defined within the Schematron schema.

Schematron 1.5 Section

XPath Version

Allows you to select the version of XPath for the expressions that are allowed in Schematron assertion tests. You can choose between: **1.0**, **2.0**, or **3.0**. This option is applied in both standalone Schematron 1.5 schemas and embedded Schematron 1.5 rules.

Sample XML Files Generator Preferences

The [Generate Sample XML Files tool](#) (available on the **Tools** menu) allows you to generate XML instance documents based on a W3C XML Schema. There are various options that can be configured within the tool and these options are also available in the **Sample XML Files Generator** preferences page. This allows you to set default values for these options. To configure the options for generating the XML files, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > Sample XML Files Generator**.

The following options are available:

Generate optional elements

When selected, all elements are generated, including the optional ones (having the `minOccurs` attribute set to 0 in the schema).

Generate optional attributes

When selected, all attributes are generated, including the optional ones (having the `use` attribute set to `optional` in the schema).

Values of elements and attributes

Controls the content of generated attribute and element values. The following choices are available:

- **None** - No content is inserted.
- **Default** - Inserts a default value depending of data type descriptor of the particular element or attribute. The default value can be either the data type name or an incremental name of the attribute or element (according to the global option from the **Sample XML Files Generator** preferences page). Note that type restrictions are ignored when this option is selected. For example, if an element is of a type that restricts an **xs:string** with the **xs:maxLength** facet to allow strings with a maximum length of 3, the XML instance generator tool may generate string element values longer than 3 characters.
- **Random** - Inserts a random value depending of data type descriptor of the particular element or attribute.

Important: If all of the following are true, the **Generate Sample XML Files** tool outputs invalid values:

- At least one of the restrictions is a regexp.
- The value generated after applying the regexp does not match the restrictions imposed by one of the facets.

Preferred number of repetitions

Allows you to set the preferred number of repeating elements related to `minOccurs` and `maxOccurs` facets defined in the XML Schema.

- If the value set here is between `minOccurs` and `maxOccurs`, then that value is used.
- If the value set here is less than `minOccurs`, then the `minOccurs` value is used.
- If the value set here is greater than `maxOccurs`, then `maxOccurs` is used.

Maximum recursion level

If a recursion is found, this option controls the maximum allowed depth of the same element.

Type alternative strategy

Used for the `xs:alternative` element from XML Schema 1.1. The possible strategies are:

- **First** - The first valid alternative type is always used.
- **Random** - A random alternative type is used.

Choice strategy

Used for `xs:choice` or `substitutionGroup` elements. The possible strategies are:

- **First** - The first branch of `xs:choice` or the head element of `substitutionGroup` is always used.
- **Random** - A random branch of `xs:choice` or a substitute element or the head element of a `substitutionGroup` is used.

Generate the other options as comments

If selected, generates the other possible choices or substitutions (for `xs:choice` and `substitutionGroup`). These alternatives are generated inside comments groups so you can uncomment and use them later. Use this option with care (for example, on a restricted namespace and element) as it may generate large result files.

Use incremental attribute / element names as default

If selected, the value of an element or attribute starts with the name of that element or attribute. For example, for an `a` element the generated values are: `a1`, `a2`, `a3`, and so on. If not selected, the value is the name of the type of that element / attribute (for example: `string`, `decimal`, etc.)

Maximum length

The maximum length of string values generated for elements and attributes.

Discard optional elements after nested level

The optional elements that exceed the specified nested level are discarded. This option is useful for limiting deeply nested element definitions that can quickly result in very large XML documents.

Related Information:

[Generating Sample XML Files](#) on page 550

XProc Preferences

Oxygen XML Developer includes a built-in XProc engine called *Calabash*. You can add or configure external XProc engines by using the XProc preferences page. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XProc**.

When **Show XProc messages** is selected all messages emitted by the XProc processor during a transformation will be presented in the [Results view](#).

To add an external engine click the **New** button. To configure an existing engine, click the **Edit** button. This opens the **Custom Engine** dialog box that allows you to configure an external engine.

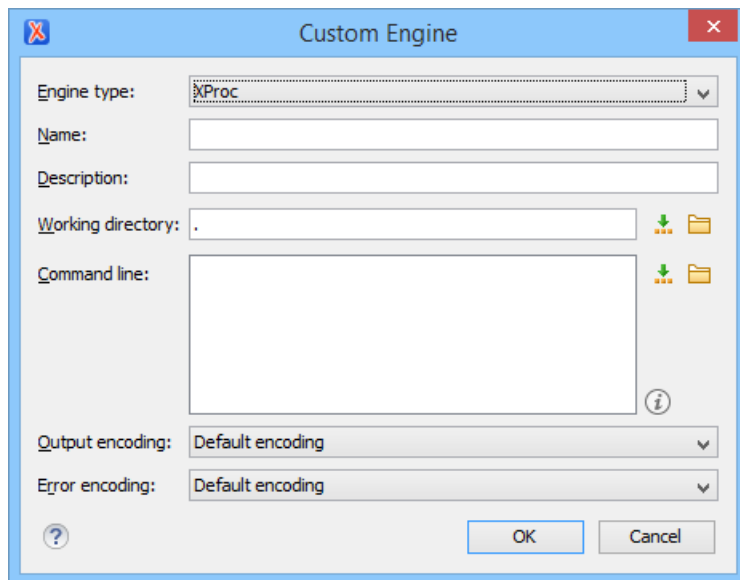


Figure 20: Creating an XProc external engine

The following options can be configure in this dialog box:

- **Name** - The value of this field will be displayed in the XProc transformation scenario and in the command line that will start it.
- **Description** - A textual description that will appear as a tooltip where the XProc engine will be used.
- **Working directory** - The working directory for resolving relative paths. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the **Browse** button.
- **Command line** - The command line that will run the XProc engine as an external process. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the **Browse** button.
- **Output encoding** - The encoding for the output stream of the XProc engine, used for reading and displaying the output messages.
- **Error encoding** - The encoding for the error stream of the XProc engine, used for reading and displaying the messages from the error stream.

Note: You can configure the built-in Saxon processor using the `saxon.config` file. For further details about configuring this file go to <http://www.saxonica.com/documentation9.5/index.html#!configuration/configuration->

[file](#). You can configure the built-in Calabash processor by using the `calabash.config` file. These files are located in `[OXYGEN_INSTALL_DIR]\lib\xproc\calabash\lib`. If they do not exist, you have to create them.

XSLT-FO-XQuery Preferences

To configure options in regards to XSLT, XQuery, and FO processors, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery**. This panel contains only the most generic options for working with XSLT/XSL-FO/XQuery processors. The more specific options are grouped in other panels linked as child nodes of this panel in the tree of this **Preferences** page.

There is only one generic option available:

Create transformation temporary files in system temporary directory

It should be selected only when the temporary files necessary for performing transformations are created in the same folder as the source of the transformation (the default behavior when this option is not selected) and this breaks the transformation. An example of breaking the transformation is when the transformation processes all the files located in the same folder as the source of the transformation (including the temporary files) and the result is incorrect or the transformation fails because of this.

XSLT Preferences

To configure the **XSLT** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT**.

Oxygen XML Developer offers the possibility of using an XSLT transformer implemented in Java (other than the XSLT transformers that come bundled with Oxygen XML Developer). To use another XSLT transformer, specify the name of the transformer factory class. Oxygen XML Developer sets this transformer factory class as the value of the Java property: `javax.xml.transform.TransformerFactory`.

The XSLT preferences page allows you to customize the following options:

JAXP XSLT Transformer - Value

Allows you to set the value of the TransformerFactory Java class.

Validation engine - XSLT 1.0

Allows you to select the XSLT engine to be used for validation of XSLT 1.0 documents.

Validation engine - XSLT 2.0

Allows you to select the XSLT engine to be used for validation of XSLT 2.0 documents.

Validation engine - XSLT 3.0

Allows you to select the XSLT engine to be used for validation of XSLT 3.0 documents.

Note: Saxon-HE does not implement any XSLT 3.0 features. Saxon-PE implements a selection of XSLT 3.0 (and XPath 3.0) features, with the exception of schema-awareness and streaming. Saxon-EE implements additional features relating to streaming (processing of a source document without constructing a tree in memory). For further details about XSLT 3.0 conformance, go to <http://www.saxonica.com/documentation/index.html#!conformance/xslt30>.

XSLT Editor Content Completion Options link

Use this link to switch to the [XSLT Content Completion preferences page](#), where you can configure the XSLT content completion options.

Saxon6 Preferences

To configure the **Saxon 6** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > Saxon > Saxon6**.

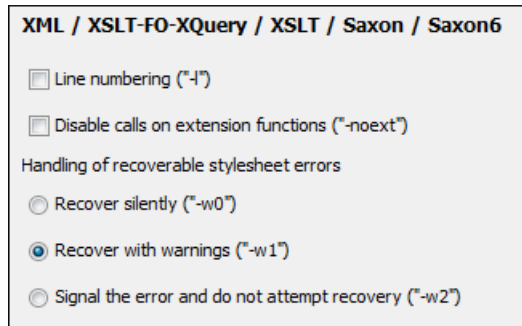


Figure 21: Saxon 6 XSLT Preferences Panel

The built-in Saxon 6 XSLT processor can be configured with the following options:

- **Line numbering** - Specifies whether or not line numbers are maintained and reported in error messages for the XML source document.
- **Disable calls on extension functions** - If selected, external function calls are not allowed. Selecting this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, since they carry similar security risks.
- **Handling of recoverable stylesheet errors** - Allows you to choose how dynamic errors are handled. One of the following options can be selected:
 - **recover silently** - Continue processing without reporting the error.
 - **recover with warnings** - Issue a warning but continue processing.
 - **signal the error and do not attempt recovery** - Issue an error and stop processing.

Saxon-HE/PE/EE Preferences

To configure global options for XSLT transformation and validation scenarios that use the **Saxon HE/PE/EE** engine, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > Saxon > Saxon-HE/PE/EE**.

Saxon-HE/PE/EE Options

Oxygen XML Developer allows you to configure the following XSLT options for the Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE):

Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is executed for XSLT transformation and validation processes.

Debugger trace into XPath expressions (applies to debugging sessions)

Instructs the [XSLT Debugger](#) to *step into* XPath expressions.

Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

Line numbering ("-l")

Line numbers where errors occur are included in the output messages.

Expand attributes defaults ("-expand")

Specifies whether or not the attributes defined in the associated DTD or XML Schema are expanded in the output of the transformation you are executing.

DTD validation of the source ("-dtd")

Specifies whether or not the source document will be validated against their associated DTD. You can choose from the following:

- **On** - Requests DTD validation of the source file and of any files read using the `document()` function.
- **Off** - (default setting) Suppresses DTD validation.
- **Recover** - Performs DTD validation but treats the errors as non-fatal.

Note: Any external DTD is likely to be read even if not used for validation, since DTDs can contain definitions of entities.

Recoverable errors ("-warnings")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.

Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

Saxon-PE/EE Options

The following options are available for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

Register Saxon-JS extension functions and instructions

Registers the Saxon-CE extension functions and instructions when compiling a stylesheet using the Saxon 9.8.0.8 processors.

Note: Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).

Allow calls on extension functions ("-ext")

If selected, the stylesheet is allowed to call external Java functions. This does not affect calls on integrated extension functions, including Saxon and EXSLT extension functions. This option is useful when loading an untrusted stylesheet (such as from a remote site using `http://[URL]`). It ensures that the stylesheet cannot call arbitrary Java methods and thus gain privileged access to resources on your machine.

Enable assertions ("-ea")

In XSLT 3.0, you can use the **xsl:assert** element to make assertions in the form of XPath expressions, causing a dynamic error if the assertion turns out to be false. If this option is selected, XSLT 3.0 `xsl:assert` instructions are enabled. If it is not selected (default), the assertions are ignored.

Saxon-EE Options

The options available specifically for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

Saxon-HE/PE/EE Advanced Preferences

To configure the **Saxon HE/PE/EE Advanced** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > Saxon > Saxon-HE/PE/EE > Advanced**.

XML / XSLT-FO-XQuery / XSLT / Saxon / Saxon-HE/PE/EE / Advanced

URI Resolver class name ("-r")

Collection URI Resolver class name ("-cr")

The resolver classes must be present in the scenario extensions.

Figure 22: Saxon HE/PE/EE XSLT Advanced Preferences Panel

You can configure the following advanced XSLT options for the Saxon 9.8.0.8 transformer (all three editions: Home Edition, Professional Edition, Enterprise Edition):

- **URI Resolver class name ("-r")** - Specifies a custom implementation for the URI resolver used by the XSLT Saxon 9.8.0.8 transformer (the -r option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from [the dialog box for configuring the XSLT extension](#) for the particular transformation scenario.
- **Collection URI Resolver class name ("-cr")** - Specifies a custom implementation for the Collection URI resolver used by the XSLT Saxon 9.8.0.8 transformer (the -cr option when run from the command line). The class name must be fully specified and the corresponding jar or class extension must be configured from [the dialog box for configuring the XSLT extension](#) for the particular transformation scenario.

XSLTProc Preferences

To configure **XSLTProc** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > XSLTProc**.

The following options are available in this preferences page:

- **Enable XInclude processing** - If selected, XInclude references will be resolved when XSLTProc is used as transformer in [XSLT transformation scenarios](#).
- **Skip loading the document's DTD** - If selected, the DTD specified in the DOCTYPE declaration will not be loaded.
- **Do not apply default attributes from document's DTD** - If selected, the default attributes declared in the DTD and not specified in the document are not included in the transformed document.
- **Do not use Internet to fetch DTD's, entities or docs** - If selected, the remote references to DTD's and entities are not followed.
- **Maximum depth in templates stack** - If this limit of maximum templates depth is reached the transformation ends with an error.
- **Verbosity** - If selected, the transformation will output detailed status messages about the transformation process in the **Warnings** view.
- **Show version of libxml and libxslt used** - If selected, Oxygen XML Developer will display in the **Warnings** view the version of the **libxml** and **libxslt** libraries invoked by XSLTProc.
- **Show time information** - If selected, the **Warnings** view will display the time necessary for running the transformation.
- **Show debug information** - If selected, the **Warnings** view will display debug information about what templates are matched, parameter values, and so on.
- **Show all documents loaded during processing** - If selected, Oxygen XML Developer will display in the **Warnings** view the URL of all the files loaded during transformation.

- **Show profile information** - If selected, Oxygen XML Developer will display in the **Warnings** view a table with all the matched templates, and for each template will display: the match XPath expression, the template name, the number of template modes, the number of calls, the execution time.
- **Show the list of registered extensions** - If selected, Oxygen XML Developer will display in the **Warnings** view a list with all the registered extension functions, extension elements and extension modules.
- **Refuses to write to any file or resource** - If selected, the XSLTProc processor will not write any part of the transformation result to an external file on disk. If such an operation is requested by the processed XSLT stylesheet the transformation ends with a runtime error.
- **Refuses to create directories** - If selected, the XSLTProc processor will not create any directory during the transformation process. If such an operation is requested by the processed XSLT stylesheet the transformation ends with a runtime error.

MSXML Preferences

To configure the MSXML options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > MSXML**.

The options in this preferences page for the MSXML 3.0 and 4.0 processors are as follows:

Validate documents during parse phase

If selected, and either the source or stylesheet document has a DTD or schema that its content can be checked against, validation is performed.

Do not resolve external definitions during parse phase

By default, MSXML instructs the parser to resolve external definitions such as document type definition (DTD), external subsets or external entity references when parsing the source and style sheet documents. If this option is selected, the resolution is disabled.

Strip non-significant whitespaces

If selected, strips non-significant white space from the input XML document during the load phase. Selecting this option can lower memory usage and improve transformation performance while, in most cases, creating equivalent output.

Show time information

If selected, the relative speed of various transformation steps can be measured, including:

- The time to load, parse, and build the input document.
- The time to load, parse, and build the stylesheet document.
- The time to compile the stylesheet in preparation for the transformation.
- The time to execute the stylesheet.

Start transformation in this mode

Although stylesheet execution usually begins in the empty mode, this default behavior may be changed by specifying another mode. Changing the start mode allows execution to jump directly to an alternate group of templates.

MSXML.NET Preferences

To configure the **MSXML.NET** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XSLT > MSXML.NET**.

The options in this preferences page for the MSXML.NET processor are as follows:

Enable XInclude processing

If selected, XInclude references will be resolved when MSXML.NET is used as the transformer in the [XSLT transformation scenario](#).

Validate documents during parse phase

If selected, and either the source or stylesheet document has a DTD or schema that its content can be checked against, validation is performed.

Do not resolve external definitions during parse phase

By default, MSXML instructs the parser to resolve external definitions such as document type definition (DTD), external subsets or external entity references when parsing the source and style sheet documents. If this option is selected, the resolution is disabled.

Strip non-significant whitespaces

If selected, strips non-significant white space from the input XML document during the load phase. Selecting this option can lower memory usage and improve transformation performance while, in most cases, creating equivalent output.

Show time information

If selected, the relative speed of various transformation steps can be measured, including:

- The time to load, parse, and build the input document.
- The time to load, parse, and build the stylesheet document.
- The time to compile the stylesheet in preparation for the transformation.
- The time to execute the stylesheet.

Forces ASCII output encoding

There is a known problem with the .NET 1.X XSLT processor (*System.Xml.Xsl.XslTransform* class). It does not support escaping of characters as XML character references when they cannot be represented in the output encoding. This means that it will be outputted as ' ? '. Usually this happens when output encoding is set to ASCII. If this option is selected, the output is forced to be ASCII encoded and all non-ASCII characters get escaped as XML character references (&#nnnn; form).

Allow multiple output documents

This option allows you to create multiple result documents using the [exsl:document](#) extension element.

Use named URI resolver class

This option allows you to specify a custom URI resolver class to resolve URI references in `xsl:import` and `xsl:include` instructions (during XSLT stylesheet loading phase) and in `document()` functions (during XSL transformation phase).

Assembly file name for URI resolver class

This option specifies a file name of the assembly where the specified resolver class can be found. The [Use named URI resolver class option](#) specifies a partially or fully qualified URI resolver class name (for example, *Acme.Resolvers.CacheResolver*). Such a name requires additional assembly specification using this option or the [Assembly GAC name for URI resolver class option](#), but fully qualified class name (which always includes an assembly specifier) is *all-sufficient*. See MSDN for more info about [fully qualified class names](#).

Assembly GAC name for URI resolver class

This option specifies partially or fully qualified name of the assembly in the [global assembly cache](#) (GAC) where the specified resolver class can be found. See MSDN for more info about [partial assembly names](#).

List of extension object class names

This option allows to specify [extension object](#) classes, whose public methods then can be used as extension functions in an XSLT stylesheet. It is a comma-separated list of namespace-qualified extension object class names. Each class name must be bound to a namespace URI using prefixes, similar to providing XSLT parameters.

Use specified EXSLT assembly

MSXML.NET supports a rich library of the [EXSLT](#) and [EXSLT.NET extension functions](#) embedded or in a *plugin* EXSLT.NET library. EXSLT support is enabled by default and cannot be disabled in this version. Use this option if you want to use an external EXSLT.NET implementation instead of a built-in one.

Credential loading source xml

This option allows you to specify user credentials to be used when loading XML source documents. The credentials should be provided in the *username:password@domain* format (all parts are optional).

Credential loading stylesheet

This option allows you to specify user credentials to be used when loading XSLT stylesheet documents. The credentials should be provided in the *username:password@domain* format (all parts are optional).

XQuery Preferences

To configure the **XQuery** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XQuery**.

The following generic XQuery preferences are available:

Validation engine

Allows you to select the processor that will be used to validate XQuery documents. If you are validating an XQuery file that has an associated validation scenario, Oxygen XML Developer uses the processor specified in the scenario. If no validation scenario is associated, but the file has an associated transformation scenario, the processor specified in the scenario is used. If the processor does not support validation or if no scenario is associated, then the value from this combo box will be used as validation processor.

Size limit of Sequence view (MB)

When the result of an XQuery transformation is set as a sequence (**Present as a sequence option**) in the transformation scenario, the size of one chunk of the result that is fetched from the database in lazy mode in one step is set in this option. If this limit is exceeded, go to the **Sequence view** and click **More results available** to extract more data from the database.

Format transformer output

Specifies whether or not the output of the transformer is formatted and indented (*pretty-print*).

Note: This option is ignored if you choose **Present as a sequence** (lazy extract data from a database) from the associated transformation scenario.

Create structure indicating the type nodes

If selected, Oxygen XML Developer takes the results of a query and creates an XML document containing copies of all items in the sequence, suitably wrapped.

Note: This option is ignored if you choose **Present as a sequence** (lazy extract data from a database) from the associated transformation scenario.

Saxon-HE/PE/EE Preferences

To configure global options for XQuery transformation and validation scenarios that use the **Saxon HE/PE/EE** engine, **open the Preferences dialog box (Options > Preferences)** and go to **XML > XSLT-FO-XQuery > XQuery > Saxon-HE/PE/EE**.

Oxygen XML Developer allows you to configure the following XQuery options for the Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE):

Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is used for XQuery transformation and validation scenarios.

Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

Use linked tree model ("-tree:linked")

This option activates the linked tree model.

Recoverable errors ("-warnings")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.

Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

The following option is available for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

Allow calls on extension functions ("-ext")

If selected, calls on external functions are allowed. Selecting this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

The options available specifically for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using document () or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

Enable XQuery update ("-update:(on|off)")

This option controls whether or not XQuery update syntax is accepted. The default value is off.

Backup files updated by XQuery ("-backup:(on|off)")

If selected, backup versions for any XML files updated with an XQuery Update are generated. This option is available when the **Enable XQuery update** option is selected.

Saxon HE/PE/EE Advanced Preferences

To configure **Saxon HE/PE/EE Advanced** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XQuery > Saxon-HE/PE/EE > Advanced**.

XML / XSLT-FO-XQuery / XQuery / Saxon-HE/PE/EE / Advanced

URI Resolver class name ("-r")

Collection URI Resolver class name ("-cr")

The resolver classes must be present in the scenario extensions.

Figure 23: Saxon HE/PE/EE XQuery Advanced Preferences Panel

The advanced XQuery options that can be configured for the Saxon 9.8.0.8 XQuery transformer (all editions: Home Edition, Professional Edition, Enterprise Edition) are as follows:

- **URI Resolver class name** - Allows you to specify a custom implementation for the URI resolver used by the XQuery Saxon 9.8.0.8 transformer (the -r option when run from the command line). The class name must be fully specified and the corresponding JAR or class extension must be configured from [the dialog box for configuring the XQuery extension](#) for the particular transformation scenario.

Note: If your URIResolver implementation does not recognize the given resource, the resolve(String href, String base) method should return a null value. Otherwise, the given resource will not be resolved through the [XML Catalog](#).

- **Collection URI Resolver class name** - Allows you to specify a custom implementation for the Collection URI resolver used by the XQuery Saxon 9.8.0.8 transformer (the -cr option when run from the command line). The

class name must be fully specified and the corresponding JAR or class extension must be configured from [the dialog box for configuring the XQuery extension](#) for the particular transformation scenario.

Debugger Preferences

To configure the **Debugger** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > Debugger**.

The following options are available:

Show xsl:result-document output

If selected, the debugger presents the output of `xsl:result-document` instructions into the debugger output view.

Infinite loop detection

Select this option to receive notifications when an infinite loop occurs during transformation.

Enable Saxon optimizations

This option is not selected by default and this means that the optimization for the debugging process is suppressed. This is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

Maximum depth in templates stack

Allows you to set how many `xsl:template` instructions can appear on the current stack. This setting is used by the infinite loop detection.

Debugger layout

If you select the **Horizontal** layout, the stack of XML editors is presented on the left half of the editing area while the stack of XSL editors is on the right half. If you select the **Vertical** layout, the stack of XML editors is presented on the upper half of the editing area while the stack of XSL editors is on the lower half.

Debugger current instruction pointer

Allows you to set the background color of the current execution node, both in the document (XML) and XSLT/XQuery views.

XWatch evaluation timeout (seconds)

Allows you to specify the maximum time that Oxygen XML Developer allocates to the evaluation of XPath expressions while debugging.

Messages

Allows you to specify how to handle the debugging process when the source document involved in a debugging session is edited. You can choose one of the following:

- **Ask me what to do**
- **Always stop the debugging session**
- **Never stop the debugging session**

Profiler Preferences

This section explains the settings available for the XSLT/XQuery Profiler. To access and modify these settings, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > Profiler** (see [Debugger Preferences](#) on page 110).

The following profiler settings are available:

Show time

Shows the total time that was spent in the call.

Show inherent time

Shows the inherent time that was spent in the call. The inherent time is defined as the total time of a call minus the time of its child calls.

Show invocation count

Shows how many times the call was called in this particular call sequence.

Time scale

Determines the unit of time measurement. You can choose between milliseconds or microseconds.

Hotspot threshold

Hotspots are ignored below this specified amount (in milliseconds). For more information, see [Hotspots View](#) on page 1041.

Ignore invocation less than

Invocations are ignored below this specified amount (in microseconds). For more information, see [Invocation Tree View](#) on page 1040.

Percentage calculation

The percentage base that determines what time span percentages are calculated against. You can choose between the following:

- **Absolute** - Percentage values show the contribution to the total time.
- **Relative** - Percentage values show the contribution to the calling call.

FO Processors Preferences

Oxygen XML Developer includes a built-in formatting objects processor (Apache FOP), but you can also configure other external processors and use them in the transformation scenarios for processing XSL-FO documents.

Oxygen XML Developer provides an easy way to add two of the most commonly used commercial FO processors: **RenderX XEP** and **Antenna House Formatter**. You can easily add *RenderX XEP* as an external FO processor if you have the XEP installed. Also, if you have the *Antenna House Formatter*, Oxygen XML Developer uses the environment variables set by the XSL formatter installation to detect and use it for XSL-FO transformations. If the environment variables are not set for the XSL formatter installation, you can browse and choose the executable file just as you would for XEP. You can use these two external FO processors for [DITA OT transformations scenarios](#) and [XML with XSLT transformation scenarios](#).

To configure the options for the FO Processors, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > FO Processors**. The **FO Processors** preferences page is displayed.

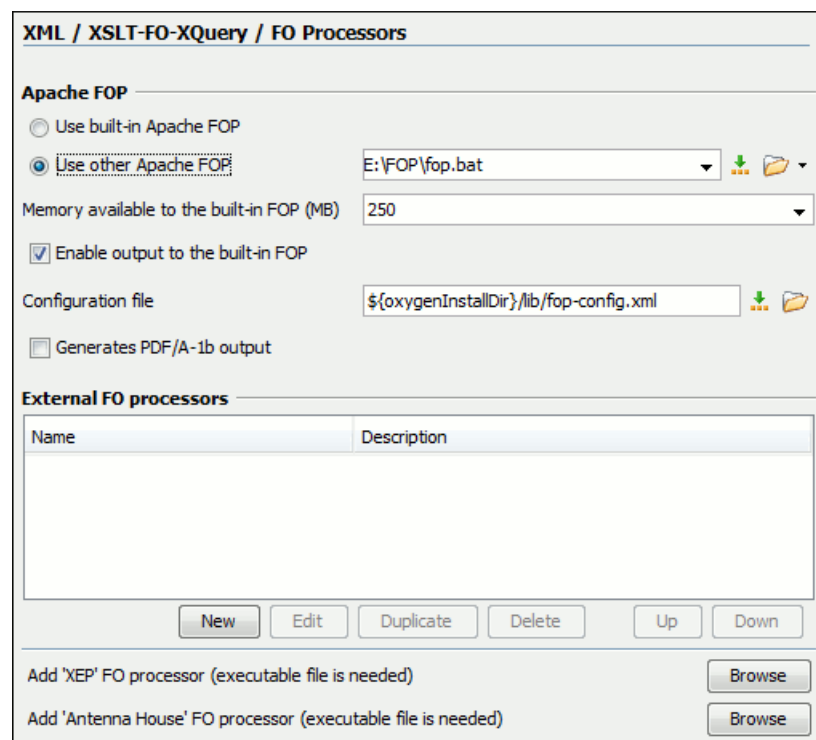


Figure 24: FO Processors Preferences Page

Apache FOP Section

In this section you can configure options for the built-in Apache processor. The following options are available:

Use built-in Apache FOP

Instructs Oxygen XML Developer to use the built-in Apache FO processor. To see the version of the built-in XSL-FO processor for your installation, go to **Help > About > Libraries** and search for *Apache FOP*.

Use other Apache FOP

Instructs Oxygen XML Developer to use another Apache FO processor that is installed on your computer. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

Enable the output of the built-in FOP

All Apache FOP output is displayed in a results pane at the bottom of the Oxygen XML Developer window, including warning messages about FO instructions not supported by Apache FOP.

Memory available to the built-in FOP

If your Apache FOP transformations fail with an Out of Memory error (**OutOfMemoryError**), use this combo box to select a bigger value for the amount of memory reserved for FOP transformations.

Configuration file for the built-in FOP

Use this option to specify the path to an Apache FOP configuration file (for example, to render to PDF a document containing Unicode content using a special *true type* font). You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

Generates PDF/A-1b output

When selected, PDF/A-1b output is generated.

Note: All fonts have to be embedded, even the implicit ones. More information about configuring metrics files for the embedded fonts can be found in [Add a font to the built-in FOP](#).

Note: You cannot use the `<filterList>` key in the configuration file since the FOP would generate the following error: *The Filter key is prohibited when PDF/A-1 is active*.

External FO Processors Section

In this section you can manage the external FO processors you want to use in transformation scenarios. You can use the two options at the bottom of the section to use the **RenderX XEP** or **Antenna House Formatter** commercial FO processors.

Add 'XEP' FO processor (executable file is needed)

If **RenderX XEP** is already installed on your computer, you can use this button to choose the XEP executable script (xep.bat for Windows, xep for Linux).

Add 'Antenna House' FO processor (executable file is needed)

If **Antenna House Formatter** is already installed on your computer, you can use this button to choose the Antenna House executable script (AHFCmd.exe or XSLCmd.exe for Windows, and run.sh for Linux/Mac OS).

Note: The built-in **Antenna House Formatter GUI** transformation scenario requires that you configure an external FO processor that runs AHFormatter.exe (Windows only). In the [external FO Processor configuration dialog box](#), you could use "`${env(AHF63_64_HOME)}\AHFormatter.exe`" -d \${fo} -s for the value in the **Command line** field, although the environment variable name changes for each version of the AH Formatter and for each system architecture (you can install multiple versions side-by-side). For more information, see <https://github.com/AntennaHouse/focheck/wiki/focheck>.

You can also add external processors or configure existing ones. Press the **New** button to open a configuration dialog box that allows you to add a new external FO processor. Use the other buttons (**Edit**,  **Duplicate**, **Delete**, **Up**, **Down**) to configure existing external processors.

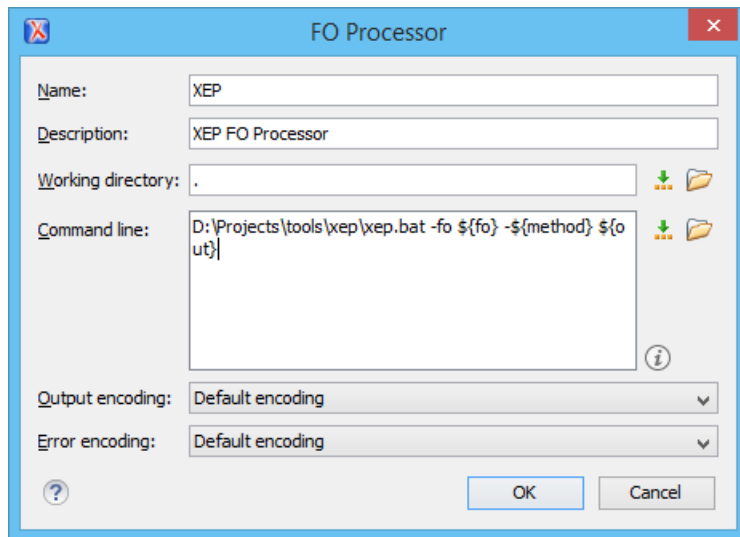


Figure 25: External FO Processor Configuration Dialog Box

The external **FO Processor** configuration dialog box includes the following options:

Name

The name that will be displayed in the list of available FO processors on the FOP tab of the transformation scenario dialog box.

Description

A textual description of the FO processor that will be displayed in the FO processors table and in tooltips of UI components where the processor is selected.

Working directory

The directory where the intermediate and final results of the processing is stored. You can specify the path by using the text field, the **Insert Editor Variables** button, or the **Browse** button. You can use one of the following [editor variables](#):

- **\${homeDir}** - The path to the user home directory.
- **\${cfd}** - The path of the current file directory. If the current file is not a local file, the target is the user desktop directory.
- **\${pd}** - The project directory.
- **\${oxygenInstallDir}** - The Oxygen XML Developer installation directory.

Command line

The command line that starts the FO processor, specific to each processor. You can specify the path by using the text field, the **Insert Editor Variables** button, or the **Browse** button. You can use one of the following [editor variables](#):

- **\${method}** - The FOP transformation method: **pdf**, **ps**, or **txt**.
- **\${fo}** - The input FO file.
- **\${out}** - The output file.
- **\${pd}** - The project directory.
- **\${frameworksDir}** - The path of the frameworks subdirectory of the Oxygen XML Developer installation directory.
- **\${oxygenInstallDir}** - The Oxygen XML Developer installation directory.
- **\${ps}** - The platform-specific path separator. It is used between the library files specified in the class path of the command line.

Output Encoding

The encoding of the FO processor output stream that is displayed in a [Results panel](#) at the bottom of the Oxygen XML Developer window.

Error Encoding

The encoding of the FO processor error stream that is displayed in a [Results panel](#) at the bottom of the Oxygen XML Developer window.

XPath Preferences

To configure XPath options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > XPath**.

Oxygen XML Developer allows you to customize the following options:

Unescape XPath expression

If selected, the entities of an XPath expressions that you type in the [XPath/XQuery Builder](#) and the [XPath toolbar](#) are unescaped during their execution. For example, the expression:

```
//varlistentry[starts-with(@os, '&#x73;')]
```

is equivalent to:

```
//varlistentry[starts-with(@os, 's')]
```

Multiple XPath results

Select this option to display the results of an XPath expression in separate tabs in the [Results view](#).

XPath Default Namespace (only for XPath version 2.0)

Specifies the default namespace to be used for unprefixed element names. You can choose between the following four options:

- **No namespace** - If selected, Oxygen XML Developer considers unprefixed element names of the evaluated XPath expressions as belonging to no namespace.
- **Use the default namespace from the root element** (default selection) - Oxygen XML Developer considers unprefixed element names of the evaluated XPath expressions as belonging to the default namespace declared on the root element of the XML document you are querying.
- **Use the namespace of the root** - If selected, Oxygen XML Developer considers unprefixed element names of the evaluated XPath expressions as belonging to the same namespace as the root element of the XML document you are querying.
- **This namespace** - If selected, you can use the corresponding text field to enter the namespace of the unprefixed elements.

Default prefix-namespace mappings

You can use this table to associate prefixes with namespaces. Use these mappings when you want to define them globally (not for each document). Use the **New** button to add mappings to the list and the **Delete** button to remove mappings.

Custom Engines Preferences

Oxygen XML Developer allows you to configure custom processors to be used for running XSLT and XQuery transformations.

Note:

To configure the **Custom Engines** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT-FO-XQuery > Custom Engines**.

The table in this preferences page displays the custom engines that have been defined. Use the **New** or **Edit** button at the bottom of the table to open a dialog box that allows you to add or configure a custom engine.

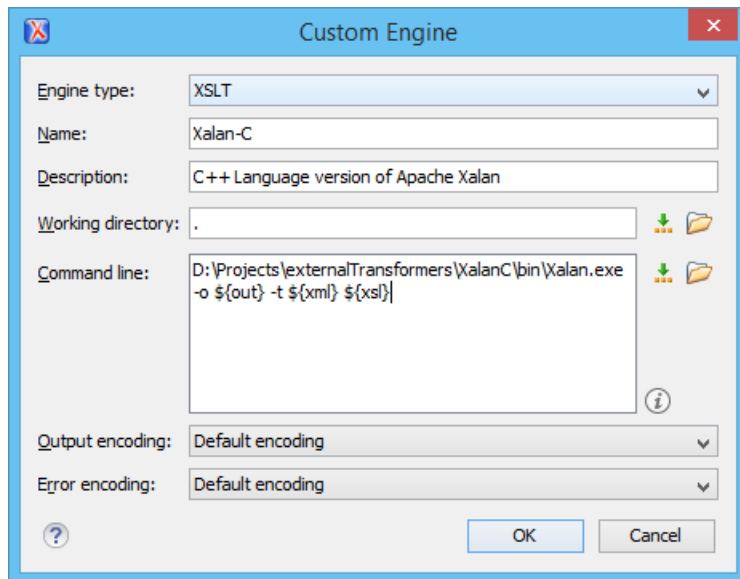


Figure 26: Parameters of a Custom Engine

The following parameters can be configured for a custom engine:

Engine type

Specifies the transformer type. You can choose between XSLT and XQuery engines.

Name

The name of the transformer displayed in the dialog box for editing transformation scenarios.

Description

A textual description of the transformer.

Working directory

The start directory of the executable program for the transformer. The following [editor variables](#) are available for making the path to the working directory independent of the location of the input files:

- **\${homeDir}** - The user home directory in the operating system.
- **\${cfd}** - The path to the directory of the current file.
- **\${pd}** - The path to the directory of the current project.
- **\${oxygenInstallDir}** - The Oxygen XML Developer install directory.

Command line

The command line that must be executed by Oxygen XML Developer to perform a transformation with the engine. The following [editor variables](#) are available for making the parameters in the command line (the transformer executable, the input files) independent of the location of the input files:

- **\${xml}** - The XML input document as a file path.
- **\${xmlu}** - The XML input document as a URL.
- **\${xsl}** - The XSL / XQuery input document as a file path.
- **\${xslu}** - The XSL / XQuery input document as a URL.
- **\${out}** - The output document as a file path.
- **\${outu}** - The output document as a URL.
- **\${ps}** - The platform separator that is used between library file names specified in the class path.

Output Encoding

The encoding of the transformer output stream.

Error Encoding

The encoding of the transformer error stream.

Ant Preferences

To set Ant preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > Ant**. This panel allows you to choose the directory containing the *Apache Ant* libraries (the so-called *Ant Home*) that Oxygen XML Developer uses to handle Ant build files.

There are two options available:

- **Built-in** - the path to the Ant distribution that comes bundled with Oxygen XML Developer installation kit.
- **Custom** - the path to an Ant distribution of your choice.

Import Preferences

To configure importing options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > Import**. This page allows you to configure how empty values and null values are handled when they are encountered in imported database tables or Excel sheets. Also you can configure the format of date / time values recognized in the imported database tables or Excel sheets.

The following options are available:

Create empty elements for empty values

If selected, an empty value from a database column or from a text file is imported as an empty element.

Create empty elements for null values

If selected, null values from a database column are imported as empty elements.

Escape XML content

Selected by default, this option instructs Oxygen XML Developer to escape the imported content to an XML-safe form.

Add annotations for generated XML Schema

If selected, the generated XML Schema contains an annotation for each of the imported table columns. The documentation inside the annotation tag contains the remarks of the database columns (if available) and also information about the conversion between the column type and the generated XML Schema type.

Date / Time Format section

Specifies the format used for importing date and time values from Excel spreadsheets or database tables, and in the generated XML schemas. You can choose from the following format types:

- **Unformatted** - The date and time formats specific to the database are used for import. When importing data from Excel a string representation of date or time values are used. The type used in the generated XML Schema is `xs:string`.
- **XML Schema date format** - The XML Schema-specific format ISO8601 is used for imported date / time data (`yyyy-MM-dd 'T' HH:mm:ss` for `datetime`, `yyyy-MM-dd` for `date` and `HH:mm:ss` for `time`). The types used in the generated XML Schema are `xs:datetime`, `xs:date` and `xs:time`.
- **Custom format** - If selected, you can define a custom format for timestamp, date, and time values or choose one of the predefined formats. A preview of the values is presented when a format is used. The type used in the generated XML Schema is `xs:string`.

Table 6: Pattern Letters

Letter	Date or Time Component	Presentation	Examples
G	Era designator	Text	AD
y	Year	Year	1996; 96
M	Month in year	Month	July; Jul; 07
w	Week in year	Number	27
W	Week in month	Number	2
D	Day in year	Number	189
d	Day in month	Number	10

Letter	Date or Time Component	Presentation	Examples
F	Day of week in month	Number	2
E	Day in week	Text	Tuesday; Tue
a	Am / pm marker	Text	PM
H	Hour in day (0-23)	Number	0
k	Hour in day (1-24)	Number	24
K	Hour in am / pm (0-11)	Number	0
h	Hour in am / pm (1-12)	Number	12
m	Minute in hour	Number	30
s	Second in minute	Number	55
S	Millisecond	Number	978
z	Time zone	General time zone	PST; GMT-08:00
Z	Time zone	RFC 822 time zone	-0800

Pattern letters are usually repeated, as their number determines the exact presentation:

- **Text** - If the number of pattern letters is 4 or more, the full form is used. Otherwise, a short or abbreviated form is used if available.
- **Number** - The number of pattern letters is the minimum number of digits, and shorter numbers are zero-padded to this amount.
- **Year** - If the number of pattern letters is 2, the year is truncated to 2 digits. Otherwise, it is interpreted as a number.
- **Month** - If the number of pattern letters is 3 or more, the month is interpreted as text. Otherwise, it is interpreted as a number.
- **General time zone** - Time zones are interpreted as text if they have names. For time zones representing a GMT offset value, the following syntax is used:
 - **GMTOffsetTimeZone** - GMT Sign Hours : Minutes
 - **Sign** - one of + or -
 - **Hours** - one or two digits
 - **Minutes** - two digits
 - **Digit** - one of 0 1 2 3 4 5 6 7 8 9

Hours must be between 0 and 23, and Minutes must be between 00 and 59. The format is locale independent and digits must be taken from the Basic Latin block of the Unicode standard.
- **RFC 822 time zone**: The RFC 822 4-digit time zone format is used:
 - **RFC822TimeZone**
 - **TwoDigitHours** (must be between 00 and 23)

XML Signing Certificates Preferences

Oxygen XML Developer provides two types of [keystores](#) for certificates that are used for digital signatures of XML documents: Java Keystore (**JKS**) and Public-Key Cryptography Standards version 12 (**PKCS-12**). A *keystore* file is protected by a password. To configure a certificate *keystore*, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Signing Certificates**. You can customize the following parameters of a *keystore*:

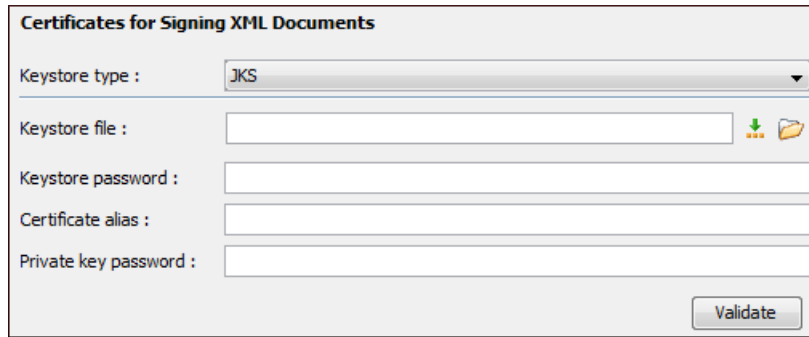


Figure 27: Certificates Preferences Panel

- **Keystore type** - The type of [keystore](#) that Oxygen XML Developer uses (**JKS** or **PKCS-12**).
- **Keystore file** - The location of the imported file.
- **Keystore password** - The password that is used for protecting the privacy of the stored keys.
- **Certificate alias** - The alias used for storing the key entry (the certificate or the private key) inside the [keystore](#).
- **Private key password** - The private key password of the certificate (required only for JKS [keystores](#)).
- **Validate** - Press this button to verify the configured [keystore](#) and the validity of the certificate.

XML Refactoring Preferences

To specify a folder for loading the custom XML refactoring operations, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Refactoring**. The following option is available in this preferences page:

Load additional refactoring operations from

Use this text box to specify a folder for loading custom XML refactoring operations. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the **Browse** button.

DITA Preferences

To access the DITA Preferences page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **DITA**. This preferences page includes the following sections and options:

DITA Open Toolkit section

This section allows you to specify the default directory of the DITA Open Toolkit distribution (bundled with the Oxygen XML Developer installation) to be used for validating and publishing DITA content. You can select from the following:

Built-in DITA-OT 2.x (with support for DITA 1.3 and Lightweight DITA)

Starting with Oxygen XML Developer 18.0, this is the default setting. All defined DITA transformation/validation scenarios will run with DITA-OT 2.5.4. This also gives you access to DITA 1.3 document templates. The default DITA OT 2.5.4 directory is: `[OXYGEN_INSTALL_DIR]/frameworks/dita/DITA-OT2.x`.

Custom

Allows you to specify a custom directory for your DITA OT distribution.

Location

You can either provide a new file path for the specific DITA OT that you want to use or select a previously used one from the drop-down list. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the **Browse** button.

DITA New Topics Preferences

To access the DITA New Topics preferences page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **DITA > New topics**. This preferences page includes the following options:

Use the title to generate the file name

This option (and its sub-options) pertain to the rules that will be used to generate file names in the [New Document Wizard](#). Select this option to use the text entered in the **Title** field to automatically generate a file name (the generated name can be seen in the **Save as** field). By default, the generated name will replace spaces with underscores (_), all illegal characters will be removed, and all upper case characters changed to lower case, but you can use the sub-options to change this.

Replace spaces with

If selected, the file name generation mechanism will replace spaces in the title with the character entered in this option.

Lower case only

If selected, the file name generation mechanism will only use lower case letters.

Use camel case

If selected, the file name generation mechanism will convert the title to a file name using the *camel case* convention where the first word starts with a lower case letter and all subsequent words begin with upper case (for example, myFileName).

Upper case first letter

Select this option if you want the file name generation mechanism to convert the title to a file name using the *camel case* convention but with an upper case letter for the first word (for example, MyFileName).

Use the file name as the value of the root ID attribute

Select this option to use the file name (as seen in the **Save as** field but without the file extension) as the value of the root id attribute for the new topic.

DITA Publishing Preferences

To access the DITA Publishing preferences page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **DITA > Publishing**. You can also open this page by clicking the **Configure Publishing Templates Gallery** link in the **Templates** tab of the transformation scenario dialog box for **WebHelp Responsive** transformations.

You can use this preferences page to specify additional directories where custom publishing templates are stored. The templates stored in these directories will appear in the preview pane in the **Templates** tab of the transformation scenario dialog box, along with all the built-in templates.

DITA Logging Preferences

To access the DITA Logging preferences page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **DITA > Logging**. This preferences page includes the following sections and options:

Show console output

Allows you to specify when to display the console output log in the message panel at the bottom of the editor. The following options are available:

- **When build fails** - Displays the console output log only if the build fails.
- **Always** - Displays the console output log, regardless of whether or not the build fails.

Show the following types of messages in a new tab

This section allows you to specify which types of messages will be displayed in separate tabs in the message panel at the bottom of the editor if a DITA transformation results in errors or warnings. You can choose whether or not to display the following types of messages:

- DITA-OT errors
- DITA-OT warnings
- DITA-OT info
- FOP errors
- FOP warnings
- FOP info

- XSLT problems

Data Sources Preferences

To configure the **Data Sources** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**. This preferences page allows you to configure data sources and connections to relational and native XML databases. For a list of drivers that are available for the major database servers, see [Download Links for Database Drivers](#) on page 123.

Connection Wizards Section

Create eXist-db XML connection

Click this link to open the dedicated [Create eXist-db XML connection dialog box](#) that provides a quick way to create an eXist connection.

Data Sources Section

This section allows you to add and configure data sources.

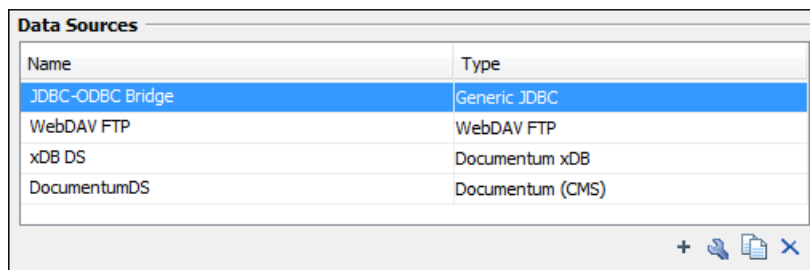


Figure 28: Data Sources Preferences Panel

The following buttons are available at the bottom of the **Data Sources** panel:

+ New

Opens the **Data Sources Drivers** dialog box that allows you to configure a new database driver.

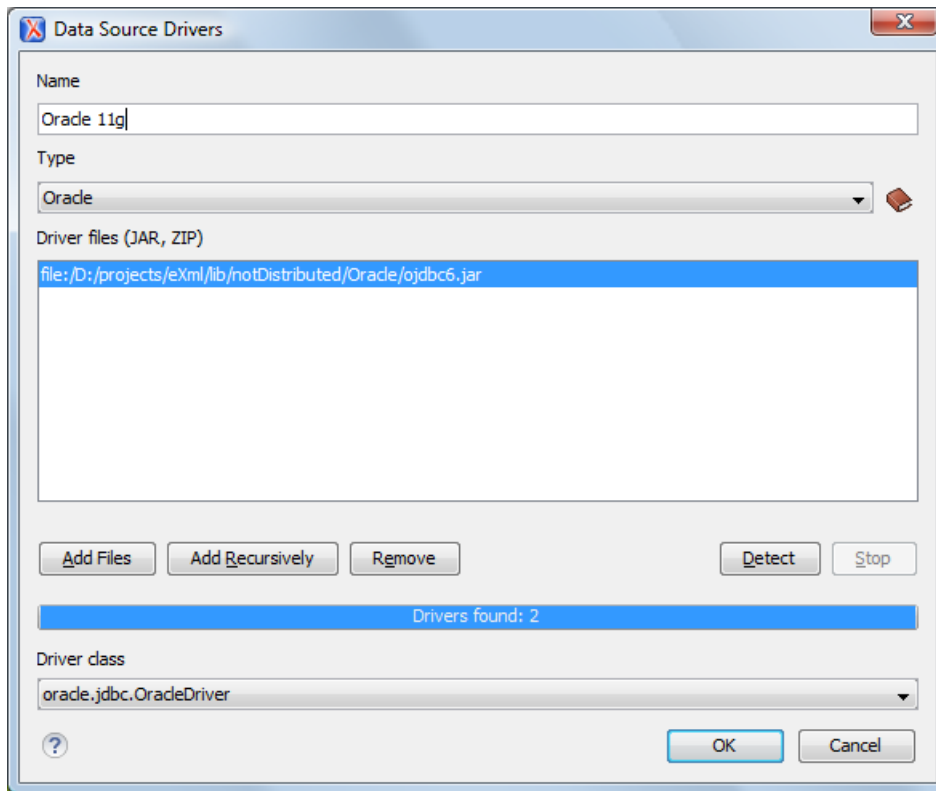


Figure 29: Data Sources Drivers Dialog Box

The following options are available in the **Data Source Drivers** dialog box:

- **Name** - The name of the new data source driver that will be used for creating connections to the database.
- **Type** - Selects the data source type from the supported driver types.
-  **Help button** - Opens the User Manual at [the list of the sections](#) where the configuration of supported data sources is explained and the URLs for downloading the database drivers are specified.
- **Driver files (JAR, ZIP)** - Lists [download links for database drivers](#) that are necessary for accessing databases in Oxygen XML Developer.
- **Add Files** - Adds the driver class library.
- **Add Recursively** - Adds driver files recursively.
- **Remove** - Removes the selected driver class library from the list.
- **Detect** - Detects driver file candidates.
- **Stop** - Stops the detection of the driver candidates.
- **Driver class** - Specifies the driver class for the data source driver.



Edit

Opens the **Data Sources Drivers** dialog box for editing the selected driver. See above the specifications for the **Data Sources Drivers** dialog box. To edit a data source, there must be no connections using that data source driver.



Duplicate

Creates a copy of the selected data source.



Delete

Deletes the selected driver. To delete a data source, there must be no connections using that data source driver.

Connections Section

This section allows you to add and configure data source connections.

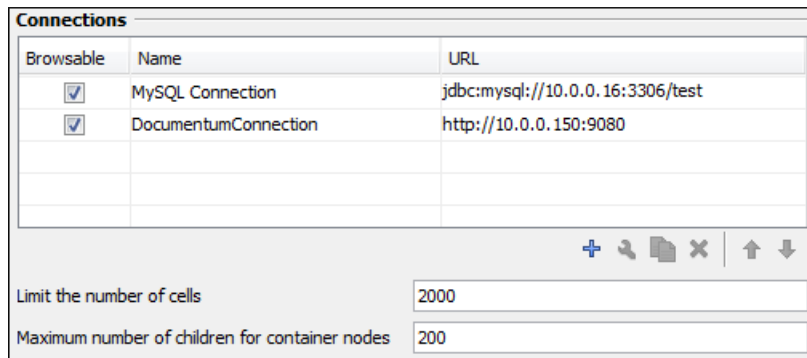


Figure 30: Connections Preferences Panel

The following buttons and options are available at the bottom of the **Connections** panel:

+ New

Opens the **Connection** dialog box that allows you to configure a new database connection.

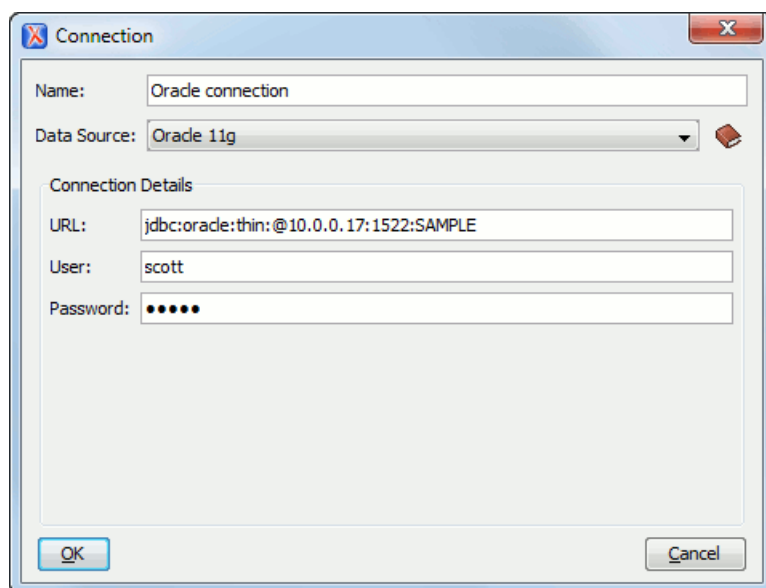


Figure 31: Connection Dialog Box

The following options are available in the **Connection** dialog box:

- **Name** - The name of the new connection that will be used in transformation scenarios and validation scenarios.
- **Data Source** - Allows selecting a data source defined in the **Data Source Drivers** dialog box.

Depending upon the selected data source, you can set some of the following parameters in the **Connection details** area:

- **URL** - The URL for connecting to the database server.
- **User** - The user name for connecting to the database server.
- **Password** - The password of the specified user name.
- **Host** - The host address of the server.
- **Port** - The port where the server accepts the connection.
- **XML DB URI** - The database URI.
- **Database** - The initial database name.
- **Collection** - One of the available collections for the specified data source.
- **Environment home directory** - Specifies the home directory (only for a Berkeley database).
- **Verbosity** - Sets the verbosity level for output messages (only for a Berkeley database).

- **Use a secure HTTPS connection (SSL)** - Allows you to establish a secure connection to an eXist database through the SSL protocol.



Edit

Opens the **Connection** dialog box, allowing you to edit the selected connection. See above the specifications for the **Connection** dialog box.



Duplicate

Creates a copy of the selected connection.



Delete

Deletes the selected connection.



Move Up

Moves the selected connection up one row in the list.



Move Down

Moves the selected connection down one row in the list.

Limit the number of cells

For performance issues, you can set the maximum number of cells that will be displayed in the **Table Explorer view** for a database table. Leave this field empty if you want the entire content of the table to be displayed. By default, this field is set to 2000. If a table that has more cells than the value set here is displayed in the **Table Explorer view**, a warning dialog box will inform you that the table is only partially shown.

Maximum number of children for container nodes

In Oracle XML, a container can hold millions of resources. If the node corresponding to such a container in the **Data Source Explorer view** would display all the contained resources at the same time, the performance of the view would be very slow. To prevent this, only a limited number of the contained resources is displayed as child nodes of the container node. You can navigate to other contained resources from the same container by using the *Up* and *Down* buttons in the **Data Source Explorer view**. This limited number is set in the field. The default value is 200 nodes.

Table Filters Preferences

The **Table Filters** preferences page allows you to choose the types of tables to be shown in the **Data Source Explorer view**. To open this preferences page, **open the Preferences dialog box (Options > Preferences)** and go to **Data Sources > Table Filters**.

You can choose to display the following types of tables:

- **Alias**
- **Global Temporary**
- **Local Temporary**
- **Synonym**
- **System Table**
- **Table**
- **View**

Download Links for Database Drivers

For a list of major relational databases and the drivers that are available for them, see https://www.oxygenxml.com/database_drivers.html.

In addition, the following is a list of other popular databases along with instructions for getting the drivers that are necessary to access the databases in Oxygen XML Developer:

- **Berkeley DB XML database** - Copy the *jar* files from the Berkeley database install directory into the Oxygen XML Developer install directory as described in [the procedure for configuring a Berkeley DB data source](#).
- **IBM DB2 Pure XML database** - Go to the [IBM website](#) and in the *DB2 Clients and Development Tools* category select the *DB2 Driver for JDBC and SQLJ* download link. Fill out the download form and download the zip file. Unzip the zip file and use the *db2jcc.jar* and *db2jcc_license_cu.jar* files in Oxygen XML Developer for [configuring a DB2 data source](#).

- **eXist database** - Copy the *jar* files from the eXist database install directory to the Oxygen XML Developer install directory as described in [the procedure for configuring an eXist data source](#).
- **MarkLogic database** - Download the MarkLogic driver from [MarkLogic Community site](#).
- **Microsoft SQL Server 2005 / 2008 database** - Download the appropriate MS SQL JDBC driver from the Microsoft website. For SQL Server 2008 R2 and older go to <http://www.microsoft.com/en-us/download/details.aspx?id=21599>. For SQL Server 2012 and 2014 go to <http://www.microsoft.com/en-us/download/details.aspx?id=11774>.
- **Oracle 11g database** - Go to <http://www.oracle.com/technetwork/database/enterprise-edition/jdbc-112010-090769.html> and download the Oracle 11g JDBC driver called *ojdbc6.jar*.
- **PostgreSQL 8.3 database** - Go to <http://jdbc.postgresql.org/download.html> and download the PostgreSQL 8.3 JDBC3 driver.
- **Documentum xDB (X-Hive/DB) 10 XML database** - Copy the *jar* files from the Documentum xDB (X-Hive/DB) 10 database install directory to the Oxygen XML Developer install directory as described in [the procedure](#) for configuring a Documentum xDB (X-Hive/DB) 10 data source.

SVN Preferences

To configure the options for the SVN client tool, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **SVN**. Some other preferences for the embedded SVN client tool can be set in the global files called *config* and *servers*. These files contain parameters that act as defaults applied to all the SVN client tools that are used by the same user on their computer login account. To open these files for editing, launch the embedded SVN client tool (**Tools >  SVN Client**) and select **Global Runtime Configuration > Edit 'config' file** or **Global Runtime Configuration > Edit 'servers' file** from the SVN client **Options** menu.

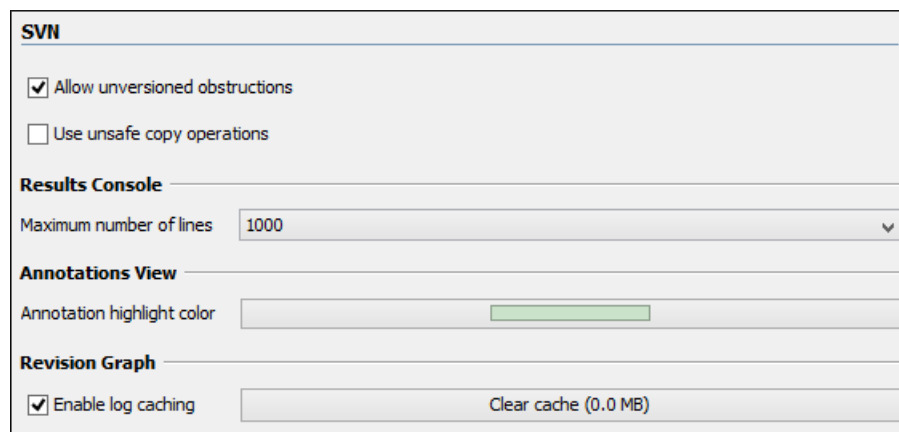


Figure 32: SVN Preferences Panel

The following SVN options can be configured in this preferences page:

Enable symbolic link support (*available only on Mac OS X and Linux*)

Apache Subversion™ has the ability to put a symbolic link under version control, via the usual SVN *add* command. The Subversion repository has no internal concept of a symbolic link. It stores a versioned symbolic link as an ordinary file with a `svn:special` property attached. On Unix/Linux, the SVN client sees the property and translates the file into a symbolic link in the working copy. If the symbolic link support is disabled, the versioned symbolic links appear as a text file instead of symbolic link.

Note: Windows file systems have no symbolic links, so a Windows client will not do any such translation and the object appears as a normal file.

Important: It is recommended to disable symbolic links support if you do not have versioned symbolic links in your repository, since the SVN operations will work faster. However, you should not disable this option when you do have versioned symbolic links in repository. In that case a workaround would be to reference the working copy by its real path, instead of a path that includes a symbolic link.

Allow unversioned obstructions

Controls how to handle a situation where working copy resources are ignored / unversioned when performing an update operation and incoming files (from the repository) with the same name and location intersect with

those being ignored / unversioned. If the option is selected, the incoming items will become BASE revisions of the ones already present in the working copy, and those present will be made versioned resources and will be marked as modified (exactly as if the user first made the update operation and then modified the files). If the option is not selected, the update operation will fail when encountering files in this situation, possibly leaving other files not updated. By default, this option is selected.

Use unsafe copy operations

Sometimes when the working copy is accessed through Samba and the SVN client cannot make a safe copy of the committed file due to a delay in getting a write permission, the result is that the committed file will be saved with zero length (the content is removed) and an error will be reported. In this case, this option should be selected so that the SVN client does not try to make the safe copy.

HTTPS encryption protocols (*available if you are using Java version 1.6 or older*)

Sets a specific encryption protocol to be used when the [application accesses a repository through HTTPS protocol](#). You can choose one of the following values:

- **SSLv3, TLSv1** (default value)
- **SSLv3 only**
- **TLSv1 only**

Results Console

Specifies the maximum number of lines displayed in the **Console** view. The default value is 1000.

Annotations View

Sets the color used in the editor panel for highlighting all the changes contributed to a resource by the revision selected in [the Annotations view](#).

Revision Graph

Enables caching for the action of computing a revision graph. When a new revision graph is requested, one of the caches from the previous actions may be used that will avoid running the whole query again on the SVN server. If a cache is used, it will finish the action much faster.

Working Copy Preferences

To configure the **Working Copy** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **SVN > Working Copy**. The options in this preferences page are specific to SVN working copies and they include the following:

Working copies location

Allows you to define a location where you keep your working copies. This location is automatically suggested when you checkout a new working copy.

Working copy administrative directory

Allows you to customize the directory name where the SVN entries are kept for each directory in the working copy.

When loading an old format working copy

You can instruct the SVN client to do one of the following:

- **Always ask** - You are notified when such a working copy is used and you are allowed to choose what action to be taken - to upgrade or not the format of the current working copy.
- **Never upgrade** - Older format working copies are left untouched. No attempt to upgrade the format is made.

Note: SVN 1.6 and older working copies still need to be upgraded before loading them.

Enable working copy caching

If selected, the content of the working copies is cached for refresh operations.

Automatically refresh the working copy

If selected, the working copy is refreshed from cache. Only the new changes (modifications with a date/time that follows the last refresh operation) are refreshed from disk. This option is not selected by default.

Allow moving/renaming mixed revision directories

If selected, Oxygen XML Developer will allow you to move or rename a directory even if its child items have a different revision. Otherwise, an error message is displayed when there are multiple revisions to avoid unnecessary conflicts. It is recommended to leave this option deselected and to **Update** the subtree to a single revision before moving or renaming it.

When synchronizing with repository

The action that will be executed automatically after the **Synchronize** action. The possible actions are:

- **Always switch to 'Modified' mode** - The **Synchronize** action is followed automatically by a switch to **Modified** mode of **Working Copy** view, if **All Files** mode is currently selected.
- **Never switch to 'Modified' mode** - Keeps the currently selected view mode unchanged.
- **Always ask** - The user is always asked if they want to switch to **Modified** mode.

Application global ignores

Allows you to set file patterns that may include the * and ? wildcards for unversioned files and folders that must be ignored when displaying the working copy resources in the **Working Copy** view. These patterns are case-sensitive. For example, *.txt matches file.txt, but does not match file.TXT.

Diff Preferences

To configure the SVN Diff options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Diff**.

The following option is available:

Compare With External Application

Specifies an external application to be launched for compare operations in the following cases:

- When two history revisions are compared.
- When the working copy file is compared with a history revision.
- When a conflict is edited.

The parameters **\${firstFile}** and **\${secondFile}** specify the positions of the two compared files in the command line for the external diff application. The parameter **\${ancestorFile}** specifies the common ancestor (that is, the BASE revision of a file) in a three-way comparison. The working copy version of a file is compared with the repository version, with the BASE revision (the latest revision read from the repository by an Update or Synchronize operation) being the common ancestor of these two compared versions.

Important: If the path to the external compare application includes spaces (or any of the subsequent options or arguments), then each of these paths or *tokens* must be double-quoted for the Oxygen XML Developer to correctly parse and identify them. For example, C:\Program Files\compareDir\app name.exe must be written as "C:\Program Files\compareDir\app name.exe".

Messages Preferences

The **Messages** preferences page allows you to disable certain warning messages that may appear in the application. To configure these options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **SVN > Messages**.

This preferences page allows you to disable the following warning messages:

Show confirmation dialog when using the "Update All" action

Allows you to avoid performing accidental update operations by requesting you to confirm them before execution.

Show confirmation dialog for drag and drop actions in Working Copy

This option avoids doing a drag and drop when you just want to select multiple files in the **Working Copy** view.

Show warning dialog when editing conflicts

When the **Edit Conflicts** action is executed, a warning dialog box notifies you that the action overwrites the conflicted version of the file created by an update operation. The conflicted file is overwritten with the version of the same file that existed in the working copy before the update operation and then [proceeds with the visual editing of the conflicting file](#).

Show warning dialog when "svn:externals" definitions are ignored

A warning dialog box is displayed when "svn:externals" definitions are ignored before performing any operation that updates resources of the working copy (such as *Update* and *Override and Update*).

Diff Preferences

The Diff Preferences Page has sub-pages for configuring File Comparisons and Directory Comparisons.

Files Comparison Preferences

To configure the **Files Comparison** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Diff > Files Comparison**.

This preferences page allows you to configure the following options:

Enable file comparison in Author mode

When selected, a visual **Author** mode is available in the file comparison tool. It displays the files in a visual mode similar to the **Author** editing mode in *Oxygen XML Editor/Author*. This visual mode is available when both compared files are detected as being XML and from a recognized document type.

Ignore Whitespaces

If selected, before performing the comparison, the application normalizes the content (collapses any sequence of whitespace characters into a single space) and trims its leading and trailing whitespaces.

Note: If the **Ignore Whitespaces** checkbox is selected, comparing the a b sequence with a b, Oxygen XML Developer finds no differences, because after normalization, all whitespaces from the first sequence are collapsed into a single space character. However, when comparing a b with ab (no whitespace between a and b), Oxygen XML Developer signals a difference.

Two-Way Diff section

Default algorithm

The default algorithm used for comparing two files. The following options are available:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level, meaning that it compares two files or fragments looking for identical characters.
- **Words** - Computes the differences at word level, meaning that it compares two files or fragments looking for identical words.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **Syntax Aware** - Computes differences for the file types or fragments known by Oxygen XML Developer, taking the syntax (the specific types of tokens) into consideration.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

Algorithm strength

Controls the amount of resources allocated to the application to perform the comparison. The algorithm stops searching more differences when reaches the maximum allowed resources. A dialog box is displayed when this limit is reached and partial results are displayed. Four settings are available: **Low**, **Medium** (default), **High** and **Very High**.

Three-Way Diff section

Default algorithm

The default algorithm used for performing a three-way comparison. The following options are available:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).

- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

Algorithm strength

Controls the amount of resources allocated to the application to perform the comparison. The algorithm stops searching more differences when reaches the maximum allowed resources. A dialog box is displayed when this limit is reached and partial results are displayed. Four settings are available: **Low**, **Medium** (default), **High** and **Very High**.

Show pseudo conflicts

Specifies whether or not the file comparison displays pseudo-conflicts. A pseudo-conflict occurs when two users make the same change (for example, when they both add or remove the same line of code).

XML Diff section

Ignore

Allows you to specify the types of XML nodes that will be ignored in the file comparison for the **XML Fast** and **XML Accurate** algorithms.

Ignore nodes by XPath

If selected, you can enter an [XPath expression](#) to ignore certain nodes from the comparison. It will be processed as XPath version 2.0. The XPath expression specified in this option is used as the default ignore instructions **only** when the application is started. If you enter an XPath expression in the similar option on the **Diff Files** toolbar, that expression will be used instead.

Merge adjacent differences

If selected, the application considers two adjacent differences as one when the differences are painted in the side-by-side editors. If not selected, every difference is represented separately.

Mark end tags as different for modified elements

If selected, end tags of modified elements are also presented as differences. Otherwise, only the start tags are presented as differences.

Ignore expansion state for empty elements

If selected, empty elements in both expansion states are considered matched (that is `<element/>` and `<element></element>` are considered equal).

Appearance Preferences

To configure the appearance options for the Files Comparison tool, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Diff > Files Comparison > Appearance**. This preferences page offers the following options:

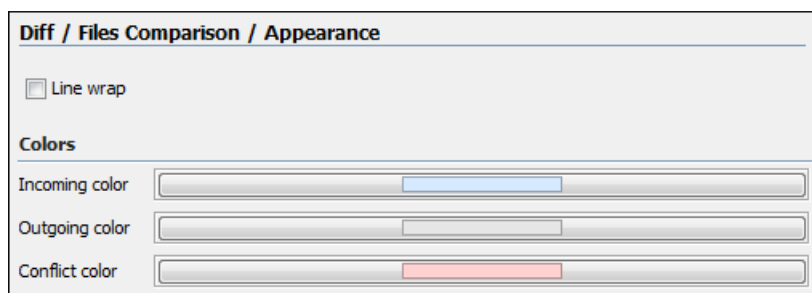


Figure 33: Files Comparison Appearance Preferences Panel

Line wrap

Wraps the lines presented in the two diff panels at the right margin of each panel, so no horizontal scrollbar is necessary.

Incoming color

Specifies the color used on the vertical bar for incoming changes.

Outgoing color

Specifies the color used on the vertical bar for outgoing changes.

Conflict color

Specifies the color used on the vertical bar for conflicts between the compared files.

Directories Comparison Preferences

To configure the **Directories Comparison** preferences, open the **Preferences** dialog box (**Options > Preferences**) and go to **Diff > Directories Comparison**.

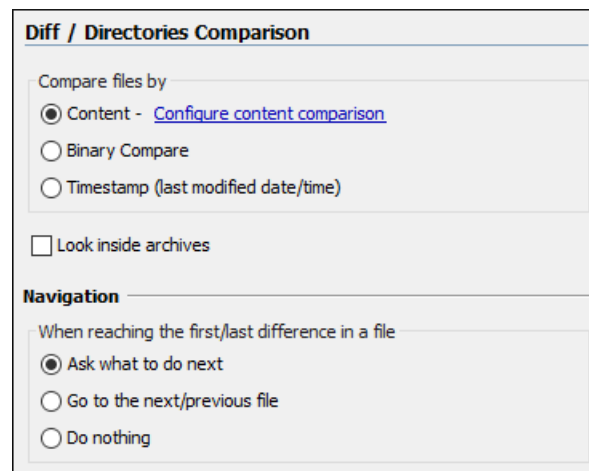


Figure 34: Diff Preferences Page

You can specify the following options for the directories comparison tool:

Compare files by

Controls the method used for comparing two files:

- **Content** - The file content is compared using the current [diff algorithm](#). This option is applied for a pair of files only if that file type is associated with a built-in editor type (either associated by default or associated by the user when prompted to do so on opening a file of that type for the first time).

You can use the **Configure content comparison** link to open the [Files Comparison preferences page](#) where you can configure options for comparing files. However, the **Ignore nodes by XPath** option is ignored when using the **Compare Directories** tool.

- **Binary Compare** - The files are compared at byte level.
- **Timestamp (last modified date / time)** - The files are compared only by their last modified timestamp.

Look in archives

If selected, [known archive types](#) are considered directories and their content is compared just like regular files.

Navigation

This options control the behavior of the differences traversal actions (**Go to previous modification**, **Go to next modification**) when the first or last difference in a file is reached:

- **Ask what to do next** - A dialog box is displayed asking you to confirm that you want the application to display modifications from the previous or next file.
- **Go to the next/previous file** - The application opens the next or previous file without waiting for your confirmation.
- **Do nothing** - No further action is taken.

Appearance Preferences

To configure the appearance options for the Directories Comparison tool, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Diff > Directories Comparison > Appearance**.

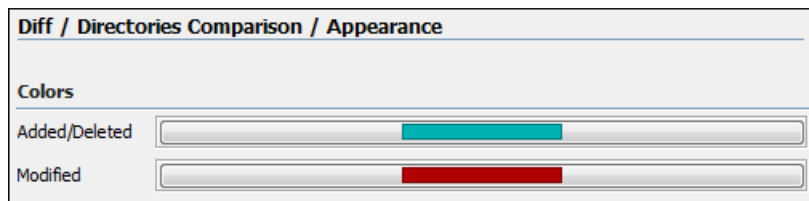


Figure 35: Diff Appearance Preferences Panel

- **Added/Deleted** - Color used for marking added or deleted files and folders.
- **Modified** - Color used for marking modified files.

Archive Preferences

To configure *Archive* options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Archive**.

The following options are available in the **Archive** preferences page:

Archive backup options

Controls if the application makes backup copies of the modified archives. The following options are available:

- **Always create backup copies of modified archives** - When you modify an archive, its content is backed up.
- **Never create backup copies of modified archives** - No backup copy is created.
- **Ask for each archive once per session** - Once per application session for each modified archive, user confirmation is required to create the backup. This is the default setting.

Note: Backup files have the name `originalArchiveFileName.bak` and are located in the same folder as the original archive.

Archive types

This table contains all known archive extensions mapped to known archive formats. Each row maps a list of extensions to an archive type supported in Oxygen XML Developer. You can use the **Edit** button at the bottom of the table to edit an existing mapping or the **New** button to create a new one and associate your own list of extensions to an archive format.

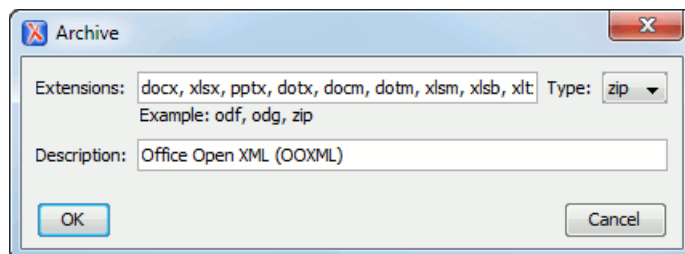


Figure 36: Edit Archive Extension Mappings

Important: You have to restart Oxygen XML Developer after removing an extension from the table for that extension to not be recognized as an archive extension.

Store Unicode file names in Zip archives

Use this option when you archive files that contain international (non-English) characters in file names or file comments. If this option is selected and an archive is modified in any way, UTF-8 characters are used in the names of all files in the archive.

Plugins Preferences

You can add [plugins](#) that extend the functionality of Oxygen XML Developer. The *plugins* are shipped as separate packages. To check for new *plugins*, go to http://www.oxygenxml.com/oxygen_sdk.html.

A *plugin* consists of a separate sub-folder in the Plugins folder of the Oxygen XML Developer installation folder (for example, `[OXYGEN_INSTALL_DIR]/plugins/myPlugin`). This sub-folder must contain a valid `plugin.xml` file in accordance with the `plugin.dtd` file located in the Plugins folder.

Oxygen XML Developer automatically detects and loads *plugins* installed correctly in the Plugins folder and displays them in the **Plugins** preferences page. To configure *plugins*, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Plugins**.

You can use the checkboxes in front of each *plugin* to enable or disable them. To display the properties of a *plugin* in the second section of the **Plugins** preferences page, click the name of the *plugin*.

Also, you can install a *plugin* as an add-on. For further details about this, go to [Deploying Add-ons](#)

External Tools Preferences

A command-line tool can be started in the Oxygen XML Developer user interface as if from the command line of the operating system shell. The **External Tools** preferences page allows you to add and configure these external tools that could be used while working with Oxygen XML Developer. To access this preferences page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **External Tools** (or select **Configure** from the **Tools > External Tools** menu).

This preferences page presents a list of the external tools that have been configured. You can use the buttons at the bottom of the page to configure the items in the list. Once a tool has been configured, you can open it by selecting it from the **Tools > External Tools** menu or from the  **External Tools** drop-down menu on the toolbar (the **Tools** toolbar needs to be selected in the [Configure Toolbars dialog box](#)).

How to Configure an External Tool

To configure an external tool in the **External Tools** preferences page, use any of the following buttons at the bottom of the page:

- **New** - Adds a new external tool to the list.
- **Edit** - Allows you to configure an existing external tool, selected from the list.
- **Duplicate** - Duplicates an existing external tool, selected from the list, to use as a template for configuring a similar tool.

Any of those three buttons opens the **External Tools** configuration dialog box.

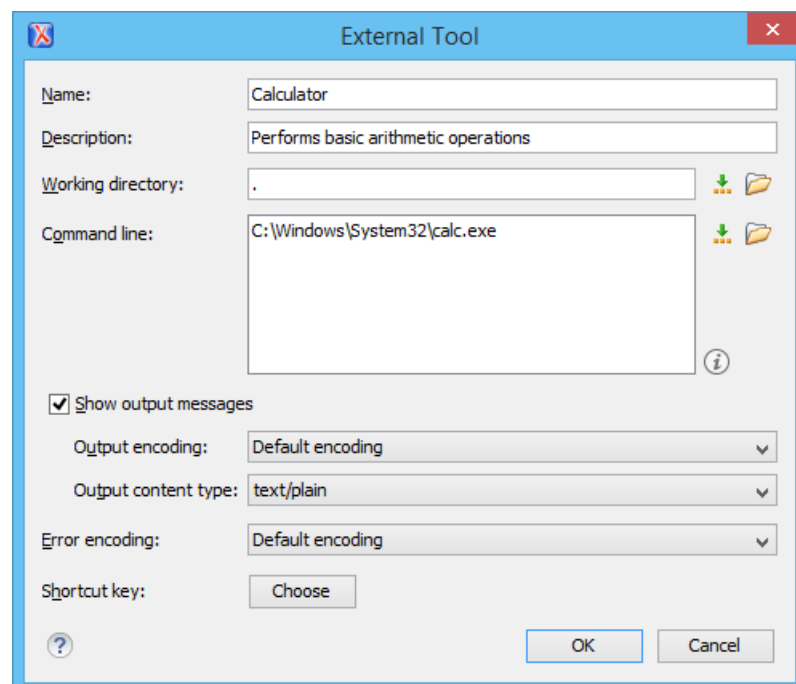


Figure 37: External Tools Configuration Dialog Box

This configuration dialog box includes the following options:

Name

The name of tool that will be displayed in the **Tools > External Tools** menu and in the  **External Tools** drop-down menu on toolbar.

Description

A description of the tool displayed as a tooltip where the tool name is used.

Working directory

The directory that the external tool will use to store intermediate and final results. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button. You can use one of the following editor variables: `${cfd}`, `${pd}`, `${oxygenInstallDir}`, `${homeDir}`, `${system(var.name)}`, `${date(pattern)}`, `${xpath_eval(expression)}`. You can also use the browsing tools to select the directory.

Command line

The command line that will start the external tool. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button. You can use one of the following editor variables: `${homeDir}`, `${home}`, `${cfn}`, `${cfne}`, `${cf}`, `${currentFileURL}`, `${cfd}`, `${cfdu}`, `${tsf}`, `${pd}`, `${pdu}`, `${oxygenInstallDir}`, `${oxygenHome}`, `${frameworksDir}`, `${frameworks}`, `${ps}`, `${timeStamp}`, `${uuid}`, `${id}`, `${afn}`, `${afne}`, `${af}`, `${afu}`, `${afd}`, `${afdu}`, `${ask('message', type, 'default_value')}`, `${dbgXML}`, `${dbgXSL}`, `${env(VAR_NAME)}`, `${system(var.name)}`, `${date(pattern)}`, and `${xpath_eval(expression)}`. You can also use the browsing tools to select a file path.

Show output messages

When this option is selected, all the messages emitted by the external tool are displayed in the **Results view**. When this option is not selected, only the error messages are displayed. You can also choose the output encoding and content type:

- **Output encoding** - The encoding of the output stream of the external tool that will be used by Oxygen XML Developer to read the output of the tool.
- **Output content type** - A list of predefined content type formats that instruct Oxygen XML Developer how to display the generated output. For example, setting the **Output content type** to `text/xml` enables the syntax coloring of XML output.

Error Encoding

The encoding of the error stream of the external tool that will be used by Oxygen XML Developer to read the error stream.

Shortcut key

You can choose a keyboard shortcut that can be used to launch the external tool.

Menu Shortcut Keys Preferences

You can use the **Menu Shortcut Keys** preferences page to configure shortcut keys for the actions available in Oxygen XML Developer. The shortcuts assigned to actions are displayed in a table in this preference page. To access the full list of shortcut keys, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Menu Shortcut Keys** (or simply go to **Options > Menu Shortcut Keys**).

For a list of the most commonly used shortcuts, see [Frequently Used Shortcut Keys](#) on page 10.

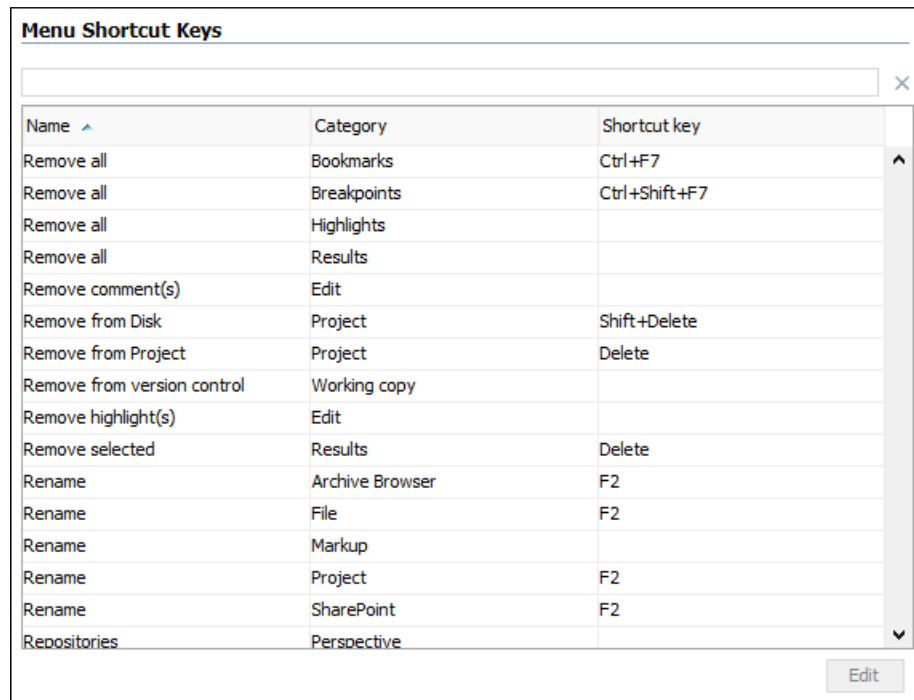


Figure 38: Menu Shortcut Keys Preferences Page

The **Menu Shortcut Keys** preferences page also contains the [shortcuts that you define at document type level](#).

Note: A shortcut defined at *document type* level overwrites a default shortcut.

To find a specific action, you can use the filter text field to search through any of the columns in the table. You can also press shortcut key combinations on your keyboard to filter the list and click on a column header to sort that column.

The table includes the following columns or options:

- **Description** - A short description of the action.
- **Category** - A classification of the actions in categories for easier management and more flexibility in assigning multiple keys for the same action.
- **Shortcut key** - The combination of keyboard keys that can be used to launch the action. To add or change a shortcut key, you can either double-click a row or select the row and press the **Edit** button.
- **'Home' and 'End' keys are applied at line level** (available on Mac OS X only) - Controls the way the HOME and END keys are interpreted. If selected, the default behavior of these keys is overridden and the cursor only moves on the current line.

How to Assign a Shortcut Key or Edit an Existing Shortcut

To assign a shortcut key to an action or edit an existing shortcut configuration, follow these steps:

1. Select the action in the table.
2. Click the **Edit** button.

Step Result: The **Shortcut key** configuration dialog box is displayed.

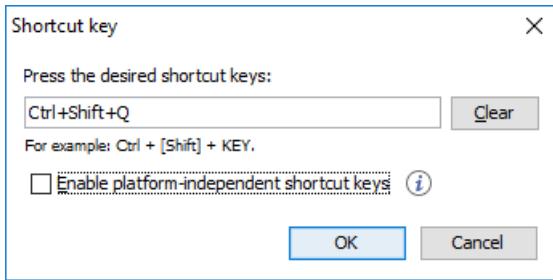


Figure 39: Shortcut Key Configuration Dialog Box

3. Press the desired shortcut keys on your keyboard.
4. If you need the shortcut to work on multiple platforms, select the **Enable platform-independent shortcut keys** option. In this case, the following modifiers are used:
 - M1 represents the **Command** key on MacOS X, and the **Ctrl** key on other platforms.
 - M2 represents the **Shift** key.
 - M3 represents the **Option** key on MacOS X, and the **Alt** key on other platforms.
 - M4 represents the **Ctrl** key on MacOS X, and is undefined on other platforms.
5. Click **OK** to save your configuration.

Related Information:

[Frequently Used Shortcut Keys](#) on page 10

File Types Preferences

Oxygen XML Developer offers built-in editing support for a wide variety of file types, but you can also add new file extensions and associate them with whatever editor type fits your needs. The associations set here between a file extension and the type of editor will determine which editor will be opened for editing purposes when that type of file is created or opened.

To configure the **File Types** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **File Types**.

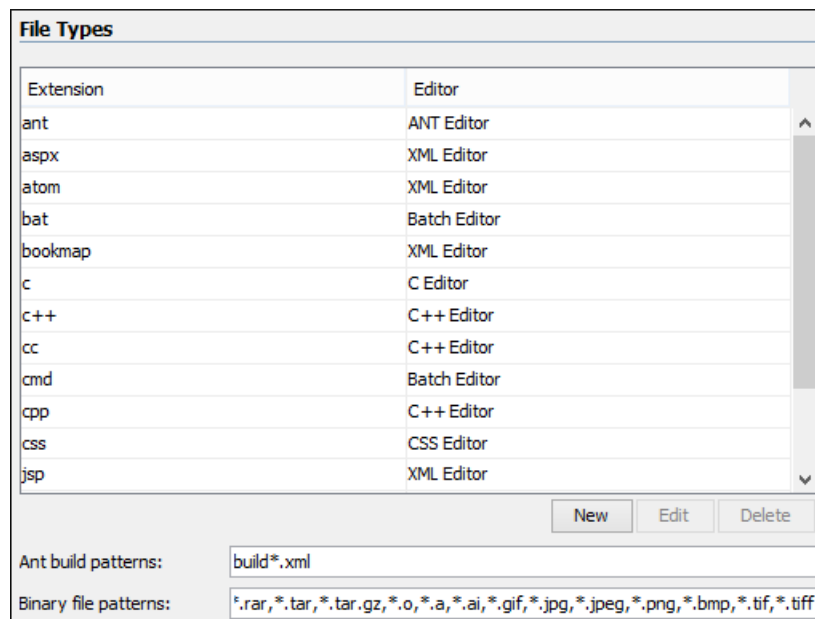


Figure 40: File Types Preferences Page

The table contains the following columns:

- **Extension** - The extensions of the files that will be associated with an editor type.

- **Editor** - The type of editor which the extensions will be associated with. Some editors provide easy access to frequent operations via toolbars (XML editor, XSL editor, DTD editor) while others provide just a syntax highlight scheme (Java editor, SQL editor, Shell editor, etc.).

If the editor set here is not one of the XML editors (XML editor, XSL editor, XSD editor, RNG editor, WSDL editor) then the encoding set in the [Encoding for non XML files option](#) is used for opening and saving a file of this type.

The files that match the **Ant build patterns** will be associated with the Ant editor.

The files that match the **Binary file patterns** patterns are handled as binary and opened in the associated system application. Also, they are excluded from the following actions available in the [Project view](#): **File/Replace in Files**, **Check Spelling in Files**, **Validate**.

Open/Find Resource Preferences Page

You can configure various options that pertain to the [Open/Find Resource dialog box](#) and [Open/Find Resource view](#). To access these options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Open/Find Resource**.

The following options are available in this **Open/Find Resource** preferences page:

Limit search results to

Specifies the maximum number of results that are displayed in the [Open/Find Resource dialog box/view](#).

Enable searching in content

This option is selected by default and it allows you to use the [Open/Find Resource dialog box/view](#) to search in content or reviews, as well as in file paths. If this option is not selected, you can only use the **Open/Find Resource** feature to search in file paths.

Content search scope section

Ignore content of these files

Allows you to select specific directories, files, or file types that are ignored when you perform a search. For example, *.txt ignores all the .txt files, */topics/* ignores all the files from the topics directory, regardless of their depth, and file:/C:/tmp/* ignores everything from the tmp directory.

Note: The specified pattern must begin with the desired protocol (in our case *file*) and also contain forward slash (/).

Index the content of remote resources

Controls the indexing of resources that are not local. For example, the resources referenced in a [DITA map](#) opened from a remote server (from a CMS or from a WebDAV location) are not indexed by default. To index the content of these resources, select this option.

Note: Selecting this option may lead to delays when the indexing is computed.

Content search options section

Content language

Use this option to specify a language for the search engine to use for the current document. This is helpful if you have multiple languages within the content of a document. The search engine will use a set of *stop words* and analyzers tuned specifically for that specific language. By default, it is mapped to the [UI language specified in the Global preferences page](#). Therefore, you need to change this option only if the language of the text you want to perform the search in differs from the UI language.

Tip: If you select **<Generic language (no stemming)>** from the drop-down list, no word stemming is performed when creating the index. This might be useful if your content has many technical terms that should be indexed as they are.

Stop words

A list of *stop words* that will be filtered out of the search processing. The list is automatically populated based upon the specified **Content language**, but you can add or remove words from the list.

When searching in content, return

This option specifies how matches are returned when doing searches in content. You can choose between two options:

- **Exact matches** - The search results match the exact whole words that you enter in the search field of the **Open/Find Resource** dialog box/view.
- **Prefix matches** (default) - The search results match documents that contain words starting with the search terms. For instance, searching for "pref page" will also find documents containing "preference page".

Automatically join search terms using:

Allows you to select the default boolean operator that Oxygen XML Developer applies when you perform a search. For example, if the AND operator is selected and you search for "car assembly", the matches must contain both of the words. If you choose OR, the matches must contain one of the selected search terms and results that contain both words are promoted to the top of the list.

Enable XML-aware searching

When selected, you can perform [XML-specific searches](#) for XML elements and attributes.

Note: Selecting this option may slow down the indexing of your documents and increase the index size on the disk.

Index files with size less than (KB)

Since indexing can be slowed down when the [Enable XML-aware searching option](#) is active, you can use this option to set a maximum file size to be indexed.

Stop Words

A list of comma separated *stop words*, meaning that the words added in this list are filtered out prior to processing a search query.

Related Information:

[Open/Find Resource View](#) on page 194

[Open/Find Resource Dialog Box](#) on page 308

Custom Editor Variables Preferences

An [editor variable](#) is useful for making a transformation scenario, validation scenario, or other tool independent of its file path. An editor variable is specified as a parameter in a transformation scenario, validation scenario, or command line of an external tool. Such a variable is defined by a name, a string value, and a text description. A custom editor variable is defined by the user and can be used in the same expressions as the [built-in editor variables](#).

Custom editor variables are created and configured in the **Custom Editor Variables** preferences page. To access this page, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Custom Editor Variables**.

This preferences page displays a table of all the custom editor variables that have been defined. The table includes three columns for the editor variable **Name**, its **Value**, and its **Description**. To create a new variable, click the **New** button at the bottom of the table and define your custom editor variable in the subsequent dialog box. To edit an existing custom editor variable, click the **Edit** button and configure the variable in the subsequent dialog box. You can also use the **Delete** button to remove custom editor variables that are no longer needed.

Custom Editor Variables		
Name	Value	Description
\${startDir}	../bin	Start directory of command line validator
\${standardParams}	-c config.xml -v -level 5 -list	List of command line standard parameters
New Edit Delete		

Figure 41: Custom Editor Variables Table

Network Connection Settings Preferences

This section presents the options available in the **Network Connection Settings** preferences pages.

Proxy Preferences

Some networks use proxy servers to provide internet services to LAN clients. Therefore, clients behind the proxy may only connect to the Internet via the proxy service. If you are not sure if your computer is required to use a proxy server to connect to the Internet or you do not know the proxy parameters, consult your network administrator.

To configure the **Proxy** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Network Connection Settings > Proxy**. The following options are available:

Proxy section

Specifies how HTTP(S) connections go through the proxy server. You can choose between the following three options:

- **Direct connection** - HTTP(S) connections will go directly to the target host without going through a proxy server.
- **Use system settings** (default setting) - HTTP(S) connections will go through the proxy server set in the operating system.



Attention: The system settings for the proxy cannot be read correctly from the operating system on some Linux systems. The system settings option should work properly on Gnome based Linux systems, but it does not work on KDE based ones as the Java virtual machine does not offer the necessary support yet.

- **Manual proxy configuration** - HTTP(S) connections will go through the proxy server specified in the **Web Proxy (HTTP/HTTPS)** section.

Web Proxy (HTTP/HTTPS) section

Address

The address of the proxy server used for manual configurations.

Port

The port of the proxy server used for manual configurations.

No proxy for

Specifies the hosts that the connections must not go through a proxy server. A host needs to be written as a fully qualified domain name (for example, myhost.example.com) or as a domain name (for example, example.com). Use a comma to separate multiple hosts.

User

The user name for authentication with the proxy server.

Password

The password for authentication with the proxy server.

SOCKS Proxy section

Address

The address of a SOCKS proxy that all connections will pass through. If this field is empty, the connections do not use a SOCKS proxy.

Port

The port of a SOCKS proxy that all connections will pass through.

Using a Proxy Auto-Configuration Script (PAC)

If you have set up the path to a Proxy auto-configuration script in your system, Oxygen XML Developer cannot detect this setting out of the box.

You can create a new folder (`[OXYGEN_INSTALL_DIR]\lib\endorsed`) in which you should copy two additional Java libraries: `deploy.jar` and `plugin.jar`. These libraries can be found in the `[OXYGEN_INSTALL_DIR]\jre\lib` folder if the application came with a bundled Java VM (otherwise, in the Java VM installation used to run the application).

HTTP(S)/WebDAV Preferences

To set the **HTTP(S)/WebDAV** preferences, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Network Connection Settings > HTTP(S)/WebDAV**. The following options are available:

Maximum number of simultaneous connections per host

Defines the maximum number of simultaneous connections established by the application with a distinct host. Servers might consider multiple connections opened from the same source to be a **Denial of Service** attack. You can avoid that by lowering the value of this option.

Note: The minimum value that can be set in this option is 5.

Read Timeout (seconds)

The period (in seconds) after which the application considers that an HTTP server is unreachable if it does not receive any response from that server.

Enable HTTP 'Expect: 100-continue' handshake (for HTTP/1.1 protocol)

Activates *Expect: 100-Continue* handshake. The purpose of the *Expect: 100-Continue* handshake is to allow a client that is sending a request message with a request body to determine if the origin server is willing to accept the request (based on the request headers) before the client sends the request body. The use of the *Expect: 100-continue* handshake can result in noticeable performance improvement when working with databases. The *Expect: 100-continue* handshake should be used with caution, as it may cause problems with HTTP servers and proxies that do not support the HTTP/1.1 protocol.

Use the 'Content-Type' header field to determine the content type

When selected, Oxygen XML Developer tries to determine a resource type using the **Content-Type** header field. This header indicates the *Internet media type* of the message content, consisting of a type and subtype. For example:

```
Content-Type: text/xml
```

When unchecked, the resource type is determined by analyzing its extension. For example, a file ending in `.xml` is considered to be an XML file.

Automatic retry on recoverable error

When selected, if an HTTP error occurs when Oxygen XML Developer communicates with a server via HTTP (for example, sending or receiving a SOAP request to or from a Web services server) and the error is recoverable, Oxygen XML Developer tries to re-send the request to the server.

Automatically accept a security certificate, even if invalid

When selected, the HTTPS connections that Oxygen XML Developer attempts to establish with will accept all security certificates, even if they are invalid.

Important: By accepting an invalid certificate, you accept (at your own risk) a potential security threat, since you cannot verify the integrity of the certificate's issuer.

Lock WebDAV files on open

If selected, the files opened through WebDAV are locked on the server so that they cannot be edited by other users while the lock placed by the current user still exists on the server.

(S)FTP Preferences

To configure the (S)FTP options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Network Connection Settings > (S)FTP**. You can customize the following options:

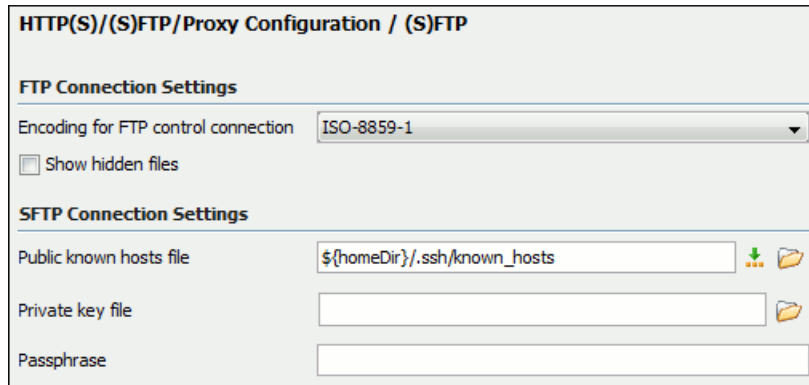


Figure 42: (S)FTP Configuration Preferences Panel

- **Encoding for FTP control connection** - The encoding used to communicate with FTP servers: either ISO-8859-1 or UTF-8. If the server supports the UTF-8 encoding Oxygen XML Developer will use it for communication. Otherwise, it will use ISO-8859-1.
- **Public known hosts file** - File containing the list of all SSH server host keys that you have determined are accurate. The default value is `$ {homeDir} /.ssh/known_hosts`.
- **Private key file** - The path to the file containing the private key used for the private key method of authentication of the secure FTP (SFTP) protocol. The user / password method of authentication has precedence if it is used in [the Open URL dialog box](#).
- **Passphrase** - The passphrase used for the private key method of authentication of the secure FTP (SFTP) protocol. The user / password method of authentication has precedence if it is used in [the Open URL dialog box](#).

Trusted Hosts Preferences

This preferences page contains a list of domains that have been identified as trusted. You can add or remove domains from the list and Oxygen XML Developer will allow connections to the listed hosts without requesting user confirmation.

To configure the **Trusted Hosts** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Network Connection Settings > Trusted Hosts**. The following options are available:

- **New** - Allows you to manually add a new entry to the list of trusted hosts.
Tip: You can specify a specific port at the end of the URL (for instance, `www.example.com:8080`). Otherwise, if no port is specified, connections will be allowed on all ports for the particular host.
- **Delete** - Allows you to remove an entry from the list of trusted hosts.

SSH Preferences

To configure the **SSH** options, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Connection settings > SSH**. The following options are available:

- **SSH** - Specifies the command line for an external SSH client that will be used when connecting to a SVN +SSH repository. Absolute paths are recommended for the SSH client executable and the file paths given as arguments (if any). Depending on the SSH client used and your SSH server configuration, you may need to specify the user name and/or private key/passphrase in the command line. You can also choose whether

to use the **Default SVN user** (the same user name as the SSH client user) or **Prompt for a SVN user** for SVN repository operations whenever SVN authentication is required. For example, on Windows the following command line uses the `plink.exe` tool as the external SSH client for connecting to the SVN repository with SVN+SSH:

```
C:\plink-install-folder\plink.exe -l username -pw password -ssh -batch  
host_name_or_IP_address_of_SVN_server
```

XML Structure Outline Preferences

To configure options in regards to the **Outline view**, open the **Preferences dialog box (Options > Preferences)** and go to **XML Structure Outline**. It contains the following options:

Preferred attribute names for display

The preferred attribute names when displaying the attributes of an element in the **Outline view**. If there is no preferred attribute name specified, the first attribute of an element is displayed.

Enable outline drag and drop

Drag and drop is disabled for the tree displayed in the **Outline view** only if there is a possibility to accidentally change the structure of the document by such operations.

Views Preferences

The **Views** preferences page allows you to configure some options in regards to certain views. To edit these options, open the **Preferences dialog box (Options > Preferences)** and go to **Views**.

The following options are available:

Project view section

Enable drag-and-drop in Project view

Enables drag and drop support in the **Project view**. It should be disabled only if there is a possibility of accidentally changing the structure of the project by drag and drop actions.

Information view section

Maximum number of lines

Specifies the maximum number of lines that can be written in the **Information view**.

Messages Preferences

The **Messages** preference page allows you to specify whether or not certain messages are displayed. To configure these options, open the **Preferences dialog box (Options > Preferences)** and go to **Messages**.

The following warning messages can be enabled or disabled:

Show Java vendor warning at startup

If this option is selected, Oxygen XML Developer displays a warning on startup if a non-recommended version of the Java virtual machine is being used.

Show confirmation dialog when moving resources

Specifies whether or not to display a confirmation dialog box when you move a resource in the **Project view**, **Data Source Explorer view**, and **Archive Browser**. In the confirmation dialog box, there is an option to choose to not show this dialog box in the future. To reset that behavior, simply select **Restore Defaults** at the bottom of this preferences page.

Show warning when adding resources already included in the project

Specifies whether or not to display a dialog box that warns you if you try to add files that already exist in your project.

Show warning for document size limit for bidirectional text, Asian languages, and other special characters

Specifies whether or not to display a warning message when an opened file that contains bidirectional characters is too large and bidirectional support is disabled.

Show warning message when changing the text orientation in the editor

Specifies whether or not to display a warning message when you change the text orientation in the editor.

Show warning when editing long expressions in the XPath toolbar

Specifies whether or not to display an information dialog box that allows you to specify if you want to use the [XPath/XQuery Builder](#) view when editing long XPath expressions.

Show SFTP certificate warning dialog

Specifies whether or not to display a warning dialog box each time the authenticity of the SFTP server host cannot be established.

Show Enterprise license related message when trying to connect to a Microsoft SharePoint server

Specifies whether or not to display an error message if you try to connect to a Microsoft SharePoint server without having the proper license.

Convert DB Structure to XML Schema

When tables from a database schema are selected in the **Select database table** section of the [Convert DB Structure to XML Schema](#) dialog box and another database schema is expanded, a confirmation is needed since the previous selection will be discarded. This option specifies whether or not you are always asked if you want the other database schema to always be expanded without asking you, or it is never expanded.

Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions

Specifies whether or not to display a dialog box that allows you to choose a specific encoding whenever you use the **Encode Selection** or **Decode Selection** actions for [Base64](#), [Base32](#), or [Hex conversions](#). In the dialog box, there is an option to choose to not show this dialog box in the future. To reset that behavior, simply select **Restore Defaults** at the bottom of this preferences page.

Configuring Options

A set of options controls the behavior of Oxygen XML Developer, allowing you to configure most of the features. To offer you the highest degree of flexibility in customizing the application to fit the needs of your organization, Oxygen XML Developer includes several distinct layers of option values.

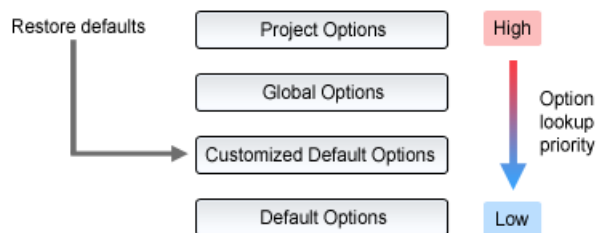


Figure 43: Option Lookup Priority

The option layers are as follows (sorted from high priority to low):

- **Project Options**

Allows project managers to establish a set of rules for a specific project. These rules standardize the information exchanged by the team members (for example, if the project is stored in a repository, a common set of formatting rules avoid conflicts that may appear when documents modified by various team members are committed to the repository).

- **Global Options**

Allows individual users to personalize Oxygen XML Developer according to their specific needs.

- **Customized Default Options**

Designed to customize the initial option values for a group of users, this layer allows an administrator to deploy the application preconfigured with a standardized set of option values.

Note: Once this layer is set, it represents the initial state of Oxygen XML Developer when an end-user uses the [Restore defaults](#) or [Reset Global Options](#) actions.

- **Default Options**

The predefined default or built-in values, tuned so that Oxygen XML Developer behaves optimally in most working environments.

Important: If you set a specific option in one of the layers, but it is not applied in the application, make sure that one of the higher priority layers does not overwrite it.

Customizing Default Options

Oxygen XML Developer has an extensive set of options that you can configure. When Oxygen XML Developer is installed, these options are set to default values. You can provide a different set of default values for an installation using an XML *options file*.

Creating an XML Options File

To create an *options file*, follow these steps:

1. It is recommended that you use a fresh install for this procedure, to make sure that you do not copy personal or local preferences.
2. Open Oxygen XML Developer and [open the Preferences dialog box \(Options > Preferences\)](#).
3. Go through the options and set them to the desired defaults. Make sure that [Global Options](#) is selected in each page.
4. Click **OK** and close the **Preferences** dialog box.
5. Go to **Options > Export Global Options** to create an XML options file.

Controlling Which Options are Stored in the Default Options File

If you want to control exactly which option pages will be stored in the default options file, you can choose to attach them to a project file (.xpr file extension) by following this procedure:

1. You may want to use a fresh install for this procedure, to make sure that you do not copy personal or local preferences.
2. In the [Project view](#), create a project or open an existing one.
3. [Open the Preferences dialog box \(Options > Preferences\)](#).
4. Configure the options in each preferences page that you want to be included in the project file and switch the storage preference to [Project Options](#) in each page.

Note: Some pages do not have the **Project Options** button, since the options they host might contain sensitive data (such as passwords, for example) that is unsuitable for sharing with other users.

5. Click **OK** and close the **Preferences** dialog box.

All explicitly set values are now saved in the project file. You can then share the project file so that your team will have the same option configuration that you stored in the project file.

Note: The project file extension (.xpr) must be preserved when the file is distributed to others.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Configuring an Installation to Use Customized Default Options

There are several methods that you can use to configure an Oxygen XML Developer installation to use the customized default options from the created XML options file.



Warning: The disadvantage of customizing the default options is that if the end user manually changes an option, the default value will no longer be used. An alternative would be to [use a plugin to impose a set of options](#).

The possible methods for using customized default options during an installation include:

- **Copy the XML Options File to the Installation Directory**

In the `[OXYGEN_INSTALL_DIR]`, create a folder called `preferences` and copy the created XML options file into it (for example, `[OXYGEN_INSTALL_DIR]/preferences/default.xml`).

- **Specify a Path to the XML Options File in a Startup Parameter**

Set the path to the XML options file as the value of the `com.oxygenxml.default.options` system property in the [startup parameters](#). The path can be specified with any of the following:

- A URL or file path relative to the application installation folder. For example:

```
-Dcom.oxygenxml.default.options=options/default.xml
```

- A system variable that specifies the file path. For example:

```
com.oxygenxml.default.options=${system(CONFIG)}/default.xml
```

- An environmental variable that specifies the file path. For example:

```
com.oxygenxml.default.options=${env(CONFIG)}/default.xml
```

Note: If you are using the [Java Webstart distribution](#), use the [optionsDir property](#) to specify the path of the options file (in this case, the file must be named `default.xml`), or you can edit the [.jnlp file](#) that launches the application and set the `com.oxygenxml.default.options` parameter using a property element, as in the following example:

```
<property name="oxy:com.oxygenxml.default.options"
  value="http://host/path/to/default.xml"/>
```

Impose a Set of Options Using a Plugin

The [Oxygen XML SDK](#) includes a sample Java-based **oxygen-sample-plugin-impose-options** plugin that shows how to impose a set of options for the end users every time the API is called. It is possible to use this plugin to impose options but still allow the end user to change options by calling the API only once, the first time the plugin starts alongside Oxygen XML Developer.

A similar JavaScript-based sample **impose-options** plugin is also available here: <https://github.com/oxygenxml/wsaccess-javascript-sample-plugins>. This plugin imports a fixed set of options (saved in XML format) when Oxygen XML Developer starts.

Related Information:

[Sharing Application Settings](#) on page 144

Storing Global and Project Level Options

When you configure the Oxygen XML Developer options, you can store them globally or bind them to a specific project by choosing the appropriate setting in the preferences pages. They can then be [shared with others by exporting the global options](#) or by [sharing the stored project-level files](#). The same is true with transformation and validation scenarios.

For each preferences page, you can choose between **Global Options** and **Project Options** depending upon how you want to store the options in that particular preferences page.

Notice: Some pages do not have the **Project Options** button, since the options they host might contain sensitive data (passwords, for example), unsuitable for sharing with other users.

If changes have been made to the options in a preferences page and you switch between **Project Options** and **Global Options**, a dialog box will be displayed that allows you to select one of the following:

- **Overwrite** - The existing options from the current preferences page will be overwritten.
- **Preserve** - The existing options from the current preferences page will be preserved.




Figure 44: Controlling the Storage Options for the Preferences

Global Options

By default, **Global Options** is selected in the preferences pages, meaning that the options are stored locally on your computer and are not accessible to other users (unless you [export them into an XML options file that can then be shared](#)).

Global options are stored locally in option files (for example, oxyOptionsSa19.1.xml for a standalone distribution of Oxygen XML Developer version 19.1) located in the following directories:

- **Windows (Vista, 7, 8, 10)** - [user_home_directory]\AppData\Roaming\com.oxygenxml
- **Windows XP** - [user_home_directory]\Application Data\com.oxygenxml
- **Mac OS X** - [user_home_directory]/Library/Preferences/com.oxygenxml
- **Linux/Unix** - [user_home_directory]/.com.oxygenxml

Project Options

If you select **Project Options**, the preferences are stored in the project file (.xpr), which can easily be [shared with other users](#).

Notice: Some pages do not have the **Project Options** button, since the options they host might contain sensitive data (passwords, for example), unsuitable for sharing with other users.

Related Information:

[Sharing Application Settings](#) on page 144

[Customizing Default Options](#) on page 142

[Importing/Exporting/Resetting Global Options](#) on page 145

Sharing Application Settings

There are a variety of ways that you can share the settings in Oxygen XML Developer with other members of your team so that you all use a common set of options. This topic describes various possibilities.

Share Settings Through a Project File

Most of the preference pages in Oxygen XML Developer include a [Project Options](#) button that allows you to pass changes to the settings to the current project file that is opened in the [Project view](#). That project file can then be shared with other users. For instance, if your project file is saved on a version control system (such as SVN, CVS, or Source Safe) or in a shared folder, your team will have access to the same option configuration that you stored in the project file.

For more information about sharing projects, see [Sharing a Project - Team Collaboration](#) on page 300.

Share Settings by Exporting/Importing Global Options

Oxygen XML Developer includes actions in the **Options** menu that allow you to export and import the [global settings](#). The **Export Global Options** action will save the global settings as an XML properties file. You can then share those settings with others by using the **Import Global Options** action to import that properties file on their computer.

For more information about global options, see [Importing/Exporting/Resetting Global Options](#) on page 145.

Share Settings with a Custom Options File During Installation

When Oxygen XML Developer is installed, all the settings are set to default values. You can customize the set of default values by creating an XML *options file* that you will use when installing Oxygen XML Developer on each computer. You can then copy the XML options file to the installation directory or specify its path in a startup parameter.

For more information about creating and referencing a custom options file, see [Customizing Default Options](#) on page 142.

Share Settings by Imposing Fixed Options with an API

The Maven-based [Oxygen XML SDK](#) includes a sample *plugin* called **ImposeOptions** that imposes a fixed set of options when the application starts. This can be achieved by using the *PluginWorkspaceProvider.getPluginWorkspace().setGlobalObjectProperty(key, value)* API method.

For more information about this API, see [PluginWorkspaceProvider Class](#).

Related Information:

[Sharing a Project - Team Collaboration](#) on page 300

[Sharing Transformation Scenarios](#) on page 799

[Sharing Validation Scenarios](#) on page 417

[Customizing Default Options](#) on page 142

[Importing/Exporting/Resetting Global Options](#) on page 145

Importing/Exporting/Resetting Global Options

Actions for importing, exporting, and resetting global options are available in the **Options** menu. The export operation allow you to save [global preferences](#) as an XML properties file and the import operation allows you to load the property file. You can use this file to reload saved options on your computer or to [share with others](#).

The following actions are available in the **Options** menu:

Reset Global Options

Restores the preference to the factory defaults or to [customized defaults](#). This action also resets the transformation and validation scenarios to the default scenarios and clears recently used document templates.

Import Global Options

Allows you to import a set of *Global Options* from an exported XML properties file. You can also select a [project-level options file](#) (.xpr) to import all the *Global Options* that are set in that project file. After you select a file, the **Import Global Options** dialog box is displayed, and it informs you that the operation will only override the options that are included in the imported file. You can select the **Reset all other options to their default values** option to reset all options to the default values before the file is imported.

Export Global Options

Allows you to export *Global Options* to an XML properties file. Some user-specific options that are private are not included. For example, passwords and the name of the *Review Author* is not included in the export operation.

Oxygen XML Developer automatically stores your global options in an XML properties file. Depending on the platform you are using, this file is located in the following directories:

- [user-home-folder]\AppData\Roaming\com.oxygenxml.developer for Windows
- [user-home-folder]/Library/Preferences/com.oxygenxml.developer for OS X
- [user-home-folder]/.com.oxygenxml.developer for Linux

The name of the options file of Oxygen XML Developer 20.0 is oxyDeveloperOptionsSa20.0.xml.

Associating a File Extension with Oxygen XML Developer

To associate a file extension with Oxygen XML Developer on Windows:

1. Go to the Windows **Start** menu and open **Control Panel**.
2. Go to **Default Programs**.
3. Click **Associate a file type or protocol with a program**.
4. Click the file extension you want to associate with Oxygen XML Developer, then click the **Change program** button.
5. In the subsequent dialog box, browse for and choose Oxygen XML Developer.
6. Click **OK**.

To associate a file extension with Oxygen XML Developer on Mac OS:

1. In **Finder**, select a file and from the contextual menu select **Get Info**.
2. In the **Open With** subsection, select **Other** from the application combo box.
3. Browse to and select Oxygen XML Developer.
4. Select the **Always Open With** option, then click **Add**.
5. If you want all files of that type to be opened in Oxygen XML Developer, click the **Change All** button and then the **Continue** button in the subsequent confirmation dialog box.

Configuring the Layout of the Views and Editors

All the Oxygen XML Developer views available in the [Editor](#), [XSLT Debugger](#), and [XQuery Debugger perspectives](#) are [dockable](#) and there are various ways to configure and arrange the layout of the views and editing panes. You can also [configure the layout of the toolbars](#).

To open a view, select it from the **Window > Show View** menu. You can hide a view by closing it with the **X** button at the top-right corner of the view, or with the **Window > Hide current view** action.

Arranging the Layout

You can drag any view to any margin of another view or editor inside the Oxygen XML Developer window. Once you create a layout that suites your needs, you can save it from **Window > Export Layout**. Oxygen XML Developer creates a layout file containing the preferences of the saved layout. To load a layout, go to **Window > Load Layout**. To reset it, select **Window > Reset Layout**.

Note: The **Load Layout** menu lets you select between the default layout, a predefined layout, or a custom layout. The changes you make using the **Load Layout** menu are also reflected in the **Application Layout** preferences page.

The changes you make to any layout are preserved between working sessions. The predefined layout files are saved in the [preferences directory](#) of Oxygen XML Developer.

To gain more editing space in the Oxygen XML Developer window, click  **Toggle auto-hide** in any view. This button sets the view in the *auto-hide* state, making it visible only as a vertical tab, at the margins of the Oxygen XML Developer window. To display a view in the *auto-hide* state, hover its side-tab with your cursor, or click it to keep the view visible until you click elsewhere. A view can also be set to a floating state by using the **Toggle floating** action, making it independent from the rest of the Oxygen XML Developer window.

You can drag the editors and arrange them in any order, both horizontally and vertically.

The following image presents two editors arranged as horizontal tiles. To arrange them vertically, drag one of them on top of the other. In this example, the `personal.xml` file was dragged over the `personal-schema.xml` file. When doing this, a dark gray rectangle marks the rearranged layout.

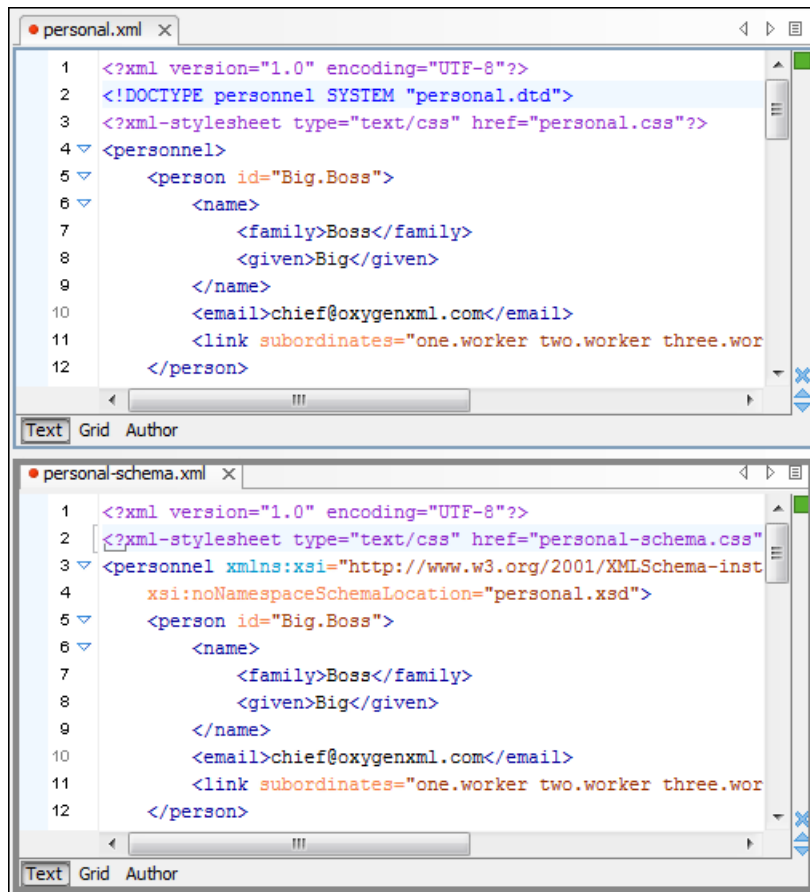


Figure 45: Drag and Drop Editors

Tile/Stack Editor Actions

You can also tile or stack all open editors, both in the [Editor perspective](#) or in the [Database perspective](#), using the following actions from the **Editor** toolbar or **Window** menu:

Tile Editors Horizontally

Splits the editing area into horizontal tiles, one for each open file.

Tile Editors Vertically

Splits the editing area into vertical tiles, one for each open file.

Stack Editors

The reverse of the **Tile Editors Horizontally/Vertically** actions. Stacks all open editors.

Synchronous Scrolling

Select this action to scroll through the tiled editors at the same time.

Note: When tiled, you can still drag and drop the editors, but note that they are docked in the same way as a window/view (instead of just tabs). You are actually rearranging the editor windows, so drag the editor tab and drop it to one of the sides of an editor (left/right/top/bottom). While dragging, you will see the dark gray rectangle aligned to one of the sides of the editor, or around the entire editor window. If you drop it to one of the sides it will dock to that side of the editor. If you drop it when the rectangle is around the entire window of the editor it will get stacked on top of that editor. You can also grab one of the stacked editors and tile it to one of the sides.

Split Editor Actions

You can divide the editing area vertically and horizontally using the following actions available in the **Editor** toolbar and **Window** menu:

-  **Split Editor Horizontally** - Splits the editor horizontally. This is useful for comparing and merging content between two documents.
-  **Split Editor Vertically** - Splits the editor vertically. This is useful for comparing and merging content between two documents.
-  **Unsplit Editor** - Removes a split action on the editing area.

To maximize or restore the editors, go to **Window > Maximize/Restore Editor Area**.

Switch or Move Editor Tabs

Each file that has been opened has a tab at the top of the editing pane and there are several ways to switch between tabs or move them.

Switching Editor Tabs

You can switch between editor tabs by using any of the following methods:

Mouse and Scroll Wheel

Of course, you can switch to a different editor tab by left-clicking the tab with your mouse, but when there are too many tabs opened to fit on the screen, you can hover over the tab stripe and use the scroll wheel on your mouse to scroll to the left or right (same as using the two arrows on the far-right of the tab stripe).

Buttons on the Far-Right of the Tab Stripe (◀▶☰)

You can use the arrow buttons (◀▶) on the right side of the tab stripe to scroll to the left or right and the ☰ **Show List** button opens a pop-up window that displays all the opened file tabs and allows you to select and switch to a specific opened file.

Ctrl + Tab (Command + Tab on OS X) [NOTE: Ctrl + Page Down (Ctrl + Alt + Right Arrow on OS X) does the same]

Switches to the next opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Ctrl + Shift + Tab (Command + Shift + Tab on OS X) [NOTE: Ctrl + Page Up (Ctrl + Alt + Left Arrow on OS X) does the same]

Switches to the previous opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Window > Switch editor tab (Ctrl + F9 (Command + F9 on OS X))

This action opens a dialog box that allows you to switch to a particular editor tab by selecting it from a filterable list. This is especially helpful when you have a large amount of file tabs opened and you want to switch to a certain tab this is not shown on the screen. It includes a search filter field and several options to help you find specific opened file tabs.

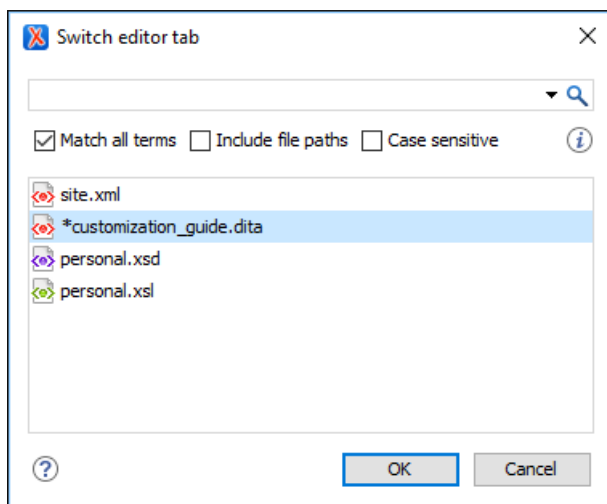


Figure 46: Switch Editor Tab Dialog Box

The **Switch Editor Tab** dialog box contains the following options and features:

Search Filter

You can enter text in the filter field at the top of the dialog box to filter the list and search for specific opened files. You can enter any number of terms, separated by space, and wildcards are allowed (for example, * to match any sequence of characters or ? to match a single character). This field also has a history drop-down that allows you to select previously used search terms.

Match all terms

If this option is selected, only the files that match all of your search terms will be displayed. If you use a wildcard in the search filter, this option is automatically disabled.

Include file paths

If this option is selected, the search is expanded to include file paths, and also the paths are displayed in this dialog box.

Case sensitive

If this option is selected, the search operation will be case-sensitive.

List of Opened File Tabs

All files that are currently opened are displayed in the main pane of the dialog box. Files that have been modified but not yet saved are prefixed by an asterisk. To switch to a particular file tab, double-click the file or select it and click **OK**.

Moving Editor Tabs

You can move editor tabs by using any of the following methods:

Mouse Drag

You can use your mouse to drag editor tabs to a new location on the tab stripe.

Ctrl + Alt + Comma

Moves the current file tab one position to the left.

Ctrl + Alt + Period

Moves the current file tab one position to the right.

For more information about configuring the interface of Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/anwjepfAdEk>

Related Information:

[Configuring Toolbars](#) on page 149

Configuring Toolbars

You can configure the toolbars in Oxygen XML Developer to personalize the interface for your specific needs. You can choose which toolbars to show or hide in the current editor mode (**Text**, **Design**, or **Grid**) and in the current *perspective* (**Editor**, **XSLT Debugger**, **XQuery Debugger**, or **Datbase**). You can also choose which actions to display in each toolbar, add actions to toolbars, and customize the layout of the toolbars.

To configure the toolbars, open the **Configure Toolbars** dialog box by doing one of the following:

- Right-click any toolbar and select **Configure Toolbars**.
- Select **Configure Toolbars** from the **Window** menu.

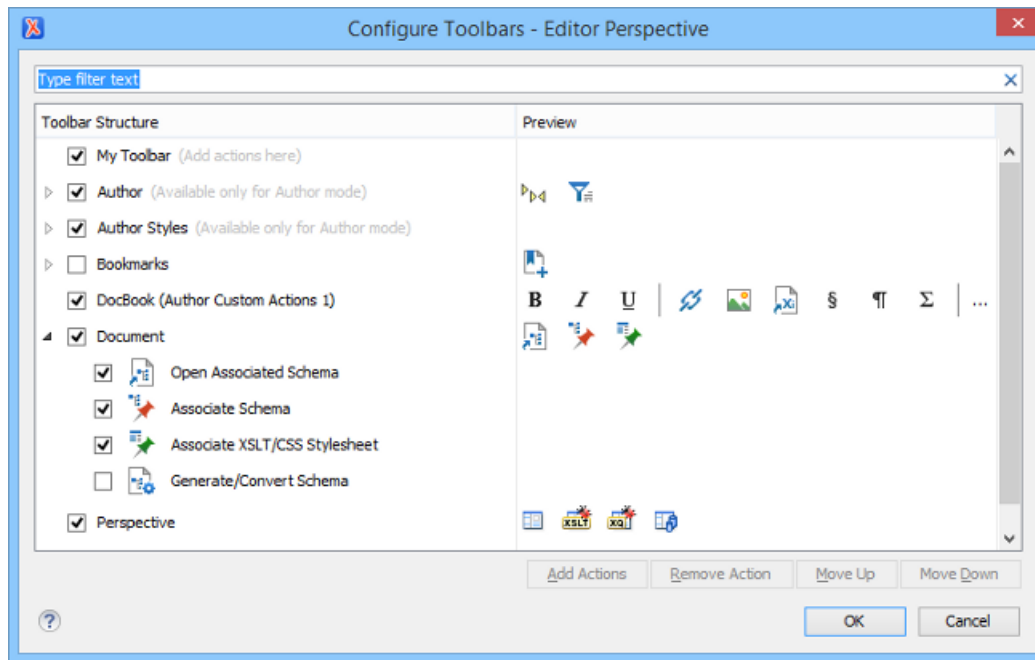


Figure 47: Configure Toolbars Dialog Box

The **Configure Toolbars** dialog box provides the following features:

Filter Text Box

You can use the filter text box at the top of the dialog box to search for a specific toolbar or action.

Show or Hide Toolbars

You can choose whether to show or hide a toolbar by using the checkbox next to the toolbar name. This checkbox is only available for toolbars that are available for the current *perspective* and editing mode.

Show or Hide Actions in a Toolbar

To show or hide actions in a toolbar, expand it by clicking the arrow next to the toolbar name, then use the checkbox to select or deselect the appropriate actions. The toolbar configuration changes in the **Preview** column according to your changes.

Add Actions to a Toolbar

Use the **Add Actions** button to open the **Add Actions** dialog box that displays all the actions that can be added to any of the toolbars, with the exception of those that are contributed from *frameworks* or 3rd party *plugins*.

Remove Actions from a Toolbar

You can remove actions that you have previously added to toolbars by using the **Remove Action** button.

Move Actions in a Toolbar

Use the **Move Up** and **Move Down** actions to change the order of the actions in a toolbar.


The **Configure Toolbars** dialog box also provides a variety of other ways to customize the layout in Oxygen XML Developer.

Customize My Toolbar

You can customize the **My Toolbar** to include your most commonly used actions. By default, this toolbar is listed first. Also, it is hidden until you add actions to it and you can easily hide it with the **Hide "My Toolbar" Toolbar** action that is available when you right-click anywhere in the toolbar area.

Drop-down Menu Actions

Composite actions that are usually displayed as a drop-down menu can only be selected in one toolbar at a time. These actions are displayed in the **Configure Toolbars** dialog box with the name in brackets.



Configure External Tools Action

There is a  **Configure external tools** composite action that appears in the toolbar called **Tools**. It is a drop-down menu that contains any external tools that are configured in the **External Tools** preferences page.

Note: If no external tools are configured, this drop-down menu is not shown in the toolbar.

Additional actions are available from the **Window** menu or contextual menu when invoked from a toolbar that allows you to further customize your layout. These actions include:

Reset Toolbars

To reset the layout of toolbars to the default setting, select the **Reset Toolbars** action from the contextual menu or **Window** menu.

Reset Layout

To reset the entire layout (including toolbars, editing modes, views, etc.) to the default setting, select **Reset Layout** from the contextual menu or **Window** menu.

Export Layout

You can use the **Export Layout** action that is available in the **Window** menu to export the entire layout of the application to share it with other users.

Hide Toolbars

You can use the **Hide Toolbar** action from the contextual menu to easily hide a displayed toolbar. When you right-click a toolbar it will be highlighted to show you which actions are included in that toolbar.

Related Information:

[Configuring the Layout of the Views and Editors](#) on page 146

Import/Export Transformation or Validation Scenarios

You can export global transformation and validation scenarios into specialized *scenarios* files. You can import transformation and validation scenarios from various sources (such as project files, *framework* option files, or exported scenario files). The import and export scenario actions are available in the **Options** menu. The following actions are available:

Import Transformation Scenarios

Loads a set of transformation scenarios from a project file, *framework* options file, or exported scenarios file.

Export Global Transformation Scenarios

Stores a set of global transformation scenarios in a specialized *scenarios* file.

Import Validation Scenarios

Loads a set of validation scenarios from a project file, *framework* options file, or exported scenarios file.

Export Global Validation Scenarios

Stores a set of global validation scenarios in a specialized *scenarios* file.

The **Export Global Transformation Scenarios** and **Export Global Validation Scenarios** options are used to store all the scenarios in a separate file. Associations between document URLs and scenarios are also saved in this file. You can load the saved scenarios using the **Import Transformation Scenarios** and **Import Validation Scenarios** actions. To distinguish the existing scenarios and the imported ones, the names of the imported scenarios contain the word *import*.

Editor Variables

An editor variable is a shorthand notation for context-dependent information, such as a file or folder path, a time-stamp, or a date. It is used in the definition of a command (for example, the input URL of a transformation, the output file path of a transformation, or the command line of an external tool) to make a command or a parameter generic and re-usable with other input files. When the same command is applied to multiple files, the notation is expanded at the execution of the command so that the same command has different effects depending on the actual file.

Oxygen XML Developer includes a variety of built-in editor variables. You can also create your own [custom editor variables](#) by using the [Custom Editor Variables preferences page](#).

You can use the following editor variables in Oxygen XML Developer commands of external engines or other external tools, and in various places in the application, such as in transformation scenarios, and validation scenarios:

- **\${activeConditionSet}** - Current active profiling condition set name. If there is no active condition set, the variable will be replaced with an *empty string*.
- **\${af}** - The local file path of the ZIP archive that includes the current edited document.
- **\${afd}** - The local directory path of the ZIP archive that includes the current edited document.
- **\${afdu}** - The URL path of the directory of the ZIP archive that includes the current edited document.
- **\${afn}** - The file name (without parent directory and without file extension) of the zip archive that includes the current edited file.
- **\${afne}** - The file name (with file extension, for example .zip or .epub, but without parent directory) of the zip archive that includes the current edited file.
- **\${afu}** - The URL path of the ZIP archive that includes the current edited document.
- **\${ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default_value')}**
- To prompt for values at runtime, use the `ask('message', type, ('real_value1':'rendered_value1'; 'real_value2':'rendered_value2'; ...), 'default-value')` editor variable. You can set the following parameters:
 - **'message'** - The displayed message. Note the quotes that enclose the message.
 - **'default-value'** - Optional parameter. Provides a default value.
 - **type** - Optional parameter, with one of the following values:

Note: The title of the dialog box will be determined by the type of parameter and as follows:

- For *url* and *relative_url* parameters, the title will be the name of the parameter and the value of the *'message'*.
- For the other parameters listed below, the title will be the name of that respective parameter.
- If no parameter is used, the title will be "Input".

Parameter	
url	Format: <code>\${ask('message', url, 'default_value')}</code>
	Description: Input is considered a URL. Oxygen XML Developer checks that the provided URL is valid.
	Example: • <code>\${ask('Input URL', url)}</code> - The displayed dialog box has the name <i>Input URL</i>. The expected input type is URL. • <code>\${ask('Input URL', url, 'http://www.example.com')}</code> - The displayed dialog box has the name <i>Input URL</i>. The expected input type is URL. The input field displays the default value <i>http://www.example.com</i>.
password	Format: <code>\${ask('message', password, 'default')}</code>
	Description: The input is hidden with bullet characters.
	Example: • <code>\${ask('Input password', password)}</code> - The displayed dialog box has the name <i>Input password</i> and the input is hidden with bullet symbols. • <code>\${ask('Input password', password, 'abcd')}</code> - The displayed dialog box has the name <i>Input password</i> and the input hidden with bullet symbols. The input field already contains the default abcd value.
generic	Format: <code>\${ask('message', generic, 'default')}</code>
	Description: The input is considered to be generic text that requires no special handling.

Parameter	
	Example: • <code>\${ask('Hello world!')}</code> - The dialog box has a <i>Hello world!</i> message displayed. • <code>\${ask('Hello world!', generic, 'Hello again!')}</code> - The dialog box has a <i>Hello world!</i> message displayed and the value displayed in the input box is <i>Hello again!</i>.
relative_url	Format: <code>\${ask('message', relative_url, 'default')}</code> Description: Input is considered a URL. Oxygen XML Developer tries to make the URL relative to that of the document you are editing. Note: If the <code>\$ask</code> editor variable is expanded in content that is not yet saved (such as an <i>untitled</i> file, whose path cannot be determined), then Oxygen XML Developer will transform it into an absolute URL. Example: • <code>\${ask('File location', relative_url, 'C:/example.txt')}</code> - The dialog box has the name <i>File location</i>. The URL inserted in the input box is made relative to the current edited document location.
combobox	Format: <code>\${ask('message', combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a drop-down menu. The drop-down menu is populated with the given <i>rendered_value</i> values. Choosing such a value will return its associated value (<i>real_value</i>). Note: The <i>'default'</i> parameter specifies the default selected value and can match either a key or a value. Example: • <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'osx')}</code> - The dialog box has the name <i>Operating System</i>. The drop-down menu displays the three given operating systems. The associated value will be returned based upon your selection. Note: In this example, the default value is indicated by the <i>osx</i> key. However, the same result could be obtained if the default value is indicated by <i>Mac OS X</i>, as in the following example: <code>\${ask('Operating System', combobox, ('win':'Microsoft Windows';'osx':'Mac OS X';'lnx':'Linux/UNIX'), 'Mac OS X')}</code> • <code>\${ask('Mobile OS', combobox, ('win':'Windows Mobile';'ios':'iOS';'and':'Android'), 'Android')}</code>
editable_combobox	Format: <code>\${ask('message', editable_combobox, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default')}</code> Description: Displays a dialog box that offers a drop-down menu with editable elements. The drop-down menu is populated with the given <i>rendered_value</i> values. Choosing such a value will return its associated real value (<i>real_value</i>) or the value inserted when you edit a list entry. Note: The <i>'default'</i> parameter specifies the default selected value and can match either a key or a value.

Parameter	
	Example: <code>\${ask('Operating System', editable_combobox, ('win':'Microsoft Windows','osx':'Mac OS X','lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The drop-down menu displays the three given operating systems and also allows you to edit the entry. The associated value will be returned based upon your selection or the text you input.
radio	Format: <code>\${ask('message', radio, ('real_value1':'rendered_value1';...;'real_valueN':'rendered_valueN'), 'default'))}</code> Description: Displays a dialog box that offers a series of radio buttons. Each radio button displays a <i>rendered_value</i> and will return an associated <i>real_value</i>. Note: The <i>'default'</i> parameter specifies the default selected value and can match either a key or a value. Example: <code>\${ask('Operating System', radio, ('win':'Microsoft Windows','osx':'Mac OS X','lnx':'Linux/UNIX'), 'osx'))}</code> - The dialog box has the name 'Operating System'. The radio button group allows you to choose between the three operating systems. Note: In this example Mac OS X is the default selected value and if selected it would return osx for the output.

- **`\${caret}** - The position where the cursor is located. This variable can be used in a code template, in **Author** mode operations, or in a **selection plugin**.
 - **`\${cf}** - Current file as file path, that is the absolute file path of the current edited document.
 - **`\${cfd}** - Current file folder as file path, that is the path of the current edited document up to the name of the parent folder.
 - **`\${cfdu}** - Current file folder as URL, that is the path of the current edited document up to the name of the parent folder, represented as a URL.
 - **`\${cfn}** - Current file name without extension and without parent folder. The current file is the one currently opened and selected.
 - **`\${cfne}** - Current file name with extension. The current file is the one currently opened and selected.
 - **`\${configured.ditaot.dir}** - The default directory of the DITA Open Toolkit distribution, as configured in the [DITA preferences page](#).
 - **`\${cp}** - Current page number. Used to display the current page number on each printed page in the **Editor / Print Preferences** page.
 - **`\${currentFileURL}** - Current file as URL, that is the absolute file path of the current edited document represented as URL.
 - **`\${date(pattern)}** - Current date. The allowed patterns are equivalent to the ones in the [Java SimpleDateFormat class](#). **Example:** `yyyy-MM-dd`;
- Note:** This editor variable supports both the **xs:date** and **xs:datetime** parameters. For details about **xs:date**, go to <http://www.w3.org/TR/xmlschema-2/#date>. For details about **xs:datetime**, go to <http://www.w3.org/TR/xmlschema-2/#dateTime>.
- **`\${dbgXML}** - The local file path to the XML document that is current selected in the Debugger source combo box (for tools started from the XSLT/XQuery Debugger).
 - **`\${dbgXSL}** - The local file path to the XSL/XQuery document that is current selected in the Debugger stylesheet combo box (for tools started from the XSLT/XQuery Debugger).
 - **`\${dita.dir.url}** - A special local contextual editor variable that gets expanded only in the **Libraries** dialog box that is accessible from the **Advanced** tab of DITA transformation scenarios. The **Libraries** dialog box allows you to specify additional libraries ([JAR](#) files or additional class paths) to be used by the transformer. This ``${dita.dir.url}` editor variable gets expanded to the value of the *dita.dir* parameter from the **Parameters** tab of the DITA transformation scenario.

- **\${ds}** - The path of the detected schema as a local file path for the current validated XML document.
- **\${dsu}** - The path of the detected schema as a URL for the current validated XML document.
- **\${env(VAR_NAME)}** - Value of the *VAR_NAME* environment variable. The environment variables are managed by the operating system. If you are looking for Java System Properties, use the **\${system(var.name)}** editor variable.
- **\${framework(fr_name)}** - The path (as URL) of the *fr_name* framework.
- **\${framework}** - The path (as URL) of the current *framework*, as part of the `[OXYGEN_INSTALL_DIR]/frameworks` directory.
- **\${frameworkDir(fr_name)}** - The path (as file path) of the *fr_name* framework.

Note: Since multiple *frameworks* might have the same name (although it is not recommended), for both **\${framework(fr_name)}** and **\${frameworkDir(fr_name)}** editor variables Oxygen XML Developer employs the following algorithm when searching for a given *framework* name:

- All *frameworks* are sorted, from high to low, according to their **Priority** setting from the **Document Type configuration dialog box**. Only *frameworks* that have the **Enabled** checkbox selected are taken into account.
- Next, if the two or more *frameworks* have the same name and priority, a further sorting based on the **Storage** setting is made, in the exact following order:
 - *Frameworks* stored in the internal Oxygen XML Developer options.
 - Additional *frameworks* added in the **Locations preferences page**.
 - *Frameworks* installed using the add-ons support.
 - *Frameworks* found in the **main framework location (Default or Custom)**.
- **\${frameworkDir}** - The path (as file path) of the current *framework*, as part of the `[OXYGEN_INSTALL_DIR]/frameworks` directory.
- **\${frameworks}** - The path (as URL) of the `[OXYGEN_INSTALL_DIR]` directory.
- **\${frameworksDir}** - The path (as file path) of the `[OXYGEN_INSTALL_DIR]/frameworks` directory.
- **\${home}** - The path (as URL) of the user home folder.
- **\${homeDir}** - The path (as file path) of the user home folder.
- **\${i18n(key)}** - Editor variable used only at *framework*-level to allow translating names and descriptions of **Author** mode actions in multiple actions.
- **\${id}** - Application-level unique identifier. It is a short sequence of 10-12 letters and digits that is not guaranteed to be universally unique.
- **\${makeRelative(base,location)}** - Takes two URL-like paths as parameters and tries to return a relative path. A use-case would be to insert content references to a certain reusable component when defining code templates.

Example:

```
${makeRelative(${currentFileURL}, ${dictionaryURL}#gogu)}
```

- **\${oxygenHome}** - Oxygen XML Developer installation folder as URL.
- **\${oxygenInstallDir}** - Oxygen XML Developer installation folder as file path.
- **\${pd}** - The file path to the folder that contains the current project file (.xpr).
- **\${pdu}** - The URL path to the folder that contains the current project file (.xpr).
- **\${pluginDir(pluginID)}** - Each plugin has an ID specified in its `plugin.xml` file. This editor variable expands to the file path of the folder that contains the `plugin.xml` file where that specific plugin ID is located.
- **\${pluginDirURL(pluginID)}** - Each plugin has an ID specified in its `plugin.xml` file. This editor variable expands to the URL path of the folder that contains the `plugin.xml` file where that specific plugin ID is located.
- **\${pn}** - Current project name.
- **\${ps}** - Path separator, which is the separator that can be used on the current platform (Windows, OS X, Linux) between library files specified in the class path.
- **\${rootMapDir}** - Will be expanded to the current root map parent directory file path.
- **\${rootMapDirURL}** - Will be expanded to the current root map parent directory URL.
- **\${rootMapFile}** - Will be expanded to the current root map file path.
- **\${rootMapURL}** - Will be expanded to the current root map URL.

- **\${selection}** - The current selected text content in the current edited document. This variable can be used in a code template, in **Author** mode operations, or in a **selection plugin**.
- **\${system(var.name)}** - Value of the *var.name* Java System Property. The Java system properties can be specified in the command line arguments of the Java runtime as *-Dvar.name=var.value*. If you are looking for operating system environment variables, use the **\${env(VAR_NAME)}** editor variable instead.
- **\${timeStamp}** - Time stamp, that is the current time in Unix format. For example, it can be used to save transformation results in multiple output files on each transformation.
- **\${tp}** - Total number of pages in the document. Used to display the total number of pages on each printed page in the **Editor / Print** Preferences page.
- **\${tsf}** - The transformation result file path. If the current opened file has an associated scenario that specifies a transformation output file, this variable expands to it.
- **\${uuid}** - Universally unique identifier, a unique sequence of 32 hexadecimal digits generated by the Java [UUID](#) class.
- **\${xmlCatalogFilesList}** - A list of file paths that point to all known XML catalog files, separated by semi-colons (;).
- **\${xpath_eval(expression)}** - Evaluates an XPath 3.0 expression. Depending on the context, the expression can be:
 - **static** - When executed in a non-XML context. For example, you can use such static expressions to perform string operations on other editor variables for composing the name of the output file in a transformation scenario's **Output** tab.

Example:

```
${xpath_eval(upper-case(substring('${cfn}', 1, 4)))}
```

- **dynamic** - When executed in an XML context. For example, you can use such dynamic expression in a code template or as a value of a parameter of an **Author** mode operation.

Example:

```
${ask('Set new ID attribute', generic, '${xpath_eval(@id)}')}
```

Custom Editor Variables

An [editor variable](#) can be created and included in any user-defined expression where a built-in editor variable is also allowed. For example, a custom editor variable may be necessary for configuring the command line of an external tool, the working directory of a custom validator, the command line of a custom XSLT engine, or a custom FO processor.

You can create or configure custom editor variables in the [Custom Editor Variables preferences page](#). To create a custom editor variable, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Custom Editor Variables**.
2. Click the **New** button at the bottom of the table.
3. Use the subsequent dialog box to specify the **Name**, **Value**, and **Description** for the new editor variable.
4. Click **OK** to save your configuration.

Related Information:

[Editor Variables](#) on page 151

Custom System Properties

A variety of Java system properties can be set in the application to influence its behavior. For information about how to do this, see [Setting a system property](#) on page 161.

com.oxygenxml.disable.http.protocol.handlers

- **Allowed Values:** true or false
- **Default Value:** false

- **Purpose:** By default, Oxygen XML Developer uses the open source Apache HTTP Client software for HTTP(S) connections. If set to True, the default Java Sun HTTP(S) will be used instead. You will also lose WebDAV support and possibly other related features.

com.oxygenxml.present.license.reminders

- **Allowed Values:** true or false
- **Default Value:** true
- **Purpose:** When set to false, Oxygen XML Developer will not display the messages that remind you to renew your Support and Maintenance Pack that covers your current license.

com.oxygenxml.enable.content.reference.caching

- **Allowed Values:** true or false
- **Default Value:** true
- **Purpose:** Enables content reference caching.

com.oxygenxml.eclipse.remove.grid.editing.mode

- **Allowed Values:** true or false
- **Default Value:** false
- **Purpose:** When set to false, Oxygen XML Developer does not show the Grid editing mode when opening an XML document.

com.oxygenxml.default.java.accessibility

- **Allowed Values:** true or false
- **Default Value:** false
- **Purpose:** System property that can be set to true to force the default detection of java accessibility. If *com.sun.java.accessibility.AccessBridge* cannot be loaded, Oxygen XML Developer forces the Java accessibility to be disabled.

com.oxygenxml.floating.license.timeout

- **Allowed Values:** An integer (minutes)
- **Default Value:** 120
- **Purpose:** Stores the time interval (in minutes) before floating licenses are released in case of application's inactivity.

com.oxygenxml.language

- **Allowed Values:** Language code (for example, en-us)
- **Default Value:** N/A
- **Purpose:** Property that holds the language code set during installation.

com.oxygenxml.default.options

- **Allowed Values:** A URL-type relative or absolute path.
- **Default Value:** N/A
- **Purpose:** Provides the path to an XML file containing default application options. For more details, see [Customizing Default Options](#) on page 142.

com.oxygenxml.customOptionsDir

- **Allowed Values:** A file system absolute path pointing to a folder.
- **Default Value:** N/A
- **Purpose:** Sets a folder to be used by the application to load and save preference files. The default location where the options are saved varies according to the operating system. See [Importing/Exporting/Resetting Global Options](#) on page 145.

com.oxygenxml.ApplicationDataFolder (Windows only)

- **Allowed Values:** A file system absolute path pointing to a folder.
- **Default Value:** %APPDATA%

- **Purpose:** When the application runs on Windows, you can set this property to change the location where the application considers that the *APPDATA* folder is located.

com.oxygenxml.editor.frameworks.url

- **Allowed Values:** A URL-type absolute path.
- **Default Value:** OXYGEN_DIR \frameworks
- **Purpose:** Changes the folder where the application considers that the main *frameworks* are installed. It has the same effect as changing the custom *frameworks* directory value in the [Location preferences page](#).

com.oxygenxml.MultipleInstances

- **Allowed Values:** true or false
- **Default Value:** false
- **Purpose:** If set to true, multiple instances of the application are allowed to be started.

com.oxygenxml.xep.location

- **Allowed Values:** A file system absolute path pointing to a folder.
- **Default Value:** N/A
- **Purpose:** Points to a folder where RenderX XEP is installed. Has the same effect as configuring XEP in the [FO Processors preferences page](#).

com.oxygenxml.additional.classpath

- **Allowed Values:** A list of [JAR](#)-type resources separated by a classpath separator.
- **Default Value:** N/A
- **Purpose:** An additional list of libraries to be used in the application's internal class loader in addition to the libraries specified in the *lib* folder.

com.oxygenxml.user.home (Windows only)

- **Allowed Values:** A file system absolute path pointing to a folder.
- **Default Value:** USERPROFILE folder
- **Purpose:** Overwrites the user home directory that was implicitly detected for the application.

com.oxygenxml.use.late.delegation.for.author.extensions

- **Allowed Values:** true or false
- **Default Value:** true
- **Purpose:** All Java extensions in a *framework* configuration are instantiated in a separate class loader. When **true**, the *JAR* libraries used in a certain document type will have priority to resolve classes before delegating to the parent class loader. When **false**, the parent class loader will take precedence.

com.oxygenxml.stack.size.validation.threads

- **Allowed Values:** The number of bytes used for validation threads.
- **Default Value:** 5*1024*1024
- **Purpose:** Some parts of the application (validation, content completion) that use the Relax NG parser sometimes require a larger *Thread* stack size to parse complex schemas. The default value should be more than enough.

com.oxygenxml.jing.skip.validation.xhtml.data.attrs

- **Allowed Values:** true or false
- **Default Value:** true
- **Purpose:** By default, the Relax NG validation was configured to skip validation for XHTML attributes that start with "data-", which should be skipped from validation according to the XHTML 5 specification.

com.oxygenxml.report.problems.url

- **Allowed Values:** User defined URL
- **Default Value:** N/A
- **Purpose:** The URL where a problem reported through the **Report Problem** dialog box is sent. The report is sent in XML format using the **report** parameter with the POST HTTP method.

com.oxygenxml.parallel.title.computing.threads

- **Allowed Values:** Integers
- **Default Value:** 4
- **Purpose:** The number of parallel threads that will be used to compute referenced topic titles. Increasing this value reduces the amount of time it takes to compute topic titles in the **DITA Maps Manager** view.

com.oxygenxml.hidpi.scaling

- **Allowed Values:** Numerical values between 1 and 2 (1, 1.5, and 2 have been tested, and for example, 1.5 is for 150% scaling)
- **Default Value:** N/A
- **Purpose:** Used to override the HiDPI scaling detection to force a specific scaling setting. This is helpful if you encounter scaling detection issues in Windows or Linux.

Related Information:

[Setting a system property](#) on page 161

Localizing the User Interface

Oxygen XML Developer comes with the following built-in languages: English, French, German, Japanese, and Dutch. To change the interface language, go to **Options > Preferences > Global** preferences page, then choose the appropriate language from the **Language** drop-down menu.

You can also localize the interface in another language by creating an interface localization file.

How to Create an Interface Localization File

You can change the language of the Oxygen XML Developer user interface by creating an interface localization file:

1. Identify the code for the new language you want to translate the interface. It is composed from a language code (two or three lowercase letters that conform to the [ISO 639 standard](#)), followed by an underscore character, and a region code (two or three uppercase letters that conform to the [ISO 3166 standard](#)).
2. Write an email to the Oxygen XML Developer support team and ask them to send you the `translation.xml` sample file.
3. Open the `translation.xml` file in Oxygen XML Developer. The file contains all the interface messages that can be translated and is updated at every new release with the latest additions. Here is a small sample of its content:

```
<translation>
  <languageList>
    <language description="English" lang="en_US"/>
  </languageList>
  <key value="New">
    <comment>The File/New action. Creates a new document.</comment>
    <val lang="en_US">New</val>
  </key>
  <key value="New_folder">
    <comment>Creates a folder in the Project View.</comment>
    <val lang="en_US">New Folder</val>
  </key>
  ....
</translation>
```

4. Update the language element to reflect the new language. For example, set the description attribute to Spanish and the lang attribute to es_ES.
5. For each key element, translate the comment (optional) and val elements. For example, set the lang attribute to es_ES.

Note: After you are finished, the file should look like this:

```
<translation>
  <languageList>
    <language description="Español" lang="es_ES"/>
  </languageList>
  <key value="New">
    <comment>El Archivo / Nueva acción. Crea un nuevo documento.</comment>
    <val lang="es_ES">Nuevo</val>
```



```

</key>
<key value="New_folder">
  <comment>Crea una carpeta en la vista del proyecto.</comment>
  <val lang="es_ES">Nueva carpeta</val>
</key>
.....
</translation>

```

6. Open the **Preferences** dialog box (**Options > Preferences**), go to **Global**, and select the **Other language** option. Browse for the `translation.xml` file.
7. Restart the application.

Adding New Languages to the Interface

Oxygen XML Developer provides a *plugin* extension is available in the **Oxygen SDK** that provides the ability to contribute a new translation language to the interface. By using this *plugin* extension, you can bundle the new language translation and that new language will be available in the **Languages** drop-down menu in the **Options > Preferences > Global** preferences page.

Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer

You can set Java Virtual Machine parameters (for example, if you want to increase the maximum amount of memory available) for the Oxygen XML Developer [application launchers](#) or [command-line scripts](#). You can also create a [custom startup parameters file](#).

Setting Parameters for the Application Launchers

Increasing the amount of memory that Oxygen XML Developer uses on Windows and Linux

For Windows and Linux installations of Oxygen XML Developer, the startup launchers for the application and its executable internal tools (**Tree Editor**, **XML Schema Regular Expressions Builder**, **Large File Viewer**, **SVN Client**, **Compare Directories**, and **Compare Files**) include a default `.vmoptions` file in the installation directory that contain some startup parameters (such the **-Xmx** parameter, which is used for allocating memory for that particular application). If your installation contains these `.vmoptions` files, you can edit the parameters in them so that the applications will launch with your desired values. However, if you re-install the application, install an update for the application, or deploy it to other users or machines, those parameters will be reset to their default values.

To increase the memory available to Oxygen XML Developer on Windows:

- Browse to the installation directory of Oxygen XML Developer.
- Locate the **-Xmx** parameter in the `oxygenDeveloper20.0.vmoptions` file.

Note: For 32-bit Windows modify the parameter to **-Xmx1024m** or larger, but not over **-Xmx1200m**. Make sure you do not exceed your physical RAM. For 64-bit Windows modify the parameter to a larger value (for example, **-Xmx2048m**). We recommended you to not use more than half of your existing physical RAM.

Restart Oxygen XML Developer. Go to **Help > About** and verify the amount of memory that is actually available (see the **JVM Memory Used** in the last row in the **Copyright** tab). If Oxygen XML Developer does not start and you receive an error message saying that it could not start the JVM, decrease the **-Xmx** parameter and try again.

For Windows Vista/7/8/10, copy the `oxygenDeveloper20.0.vmoptions` to your desktop (or to any other folder with write access), modify it there, then copy it back to the Oxygen XML Developer installation folder.

Note: The parameters from the `.vmoptions` file are used when you start Oxygen XML Developer with the `oxygen` launcher (or with the desktop shortcut). In case you use the command line script `oxygen.bat/oxygen.sh`, modify the **-Xmx** parameter in the script file.

Increasing the amount of memory that Oxygen XML Developer uses on OS X

To increase the memory available to Oxygen XML Developer on OS X:

- **Ctrl + Single-Click (Command + Single-Click on OS X)** (or right-click) the Oxygen XML Developer icon in **Finder**.

- From the contextual menu, select **Show Package Contents**.
- Go to the contents directory and edit the `Info.plist` file.

Note: You can open this file either with the **Property List Editor**, or the **TextEdit**.

- Look for the **VMOptions** key and adjust the **-Xmx** parameter to a larger value (for example, **-Xmx1500m**)

Note: For a Mac kit bundled with Java 8, look for the **VMOptionArray** key and add the **-Xmx** parameter in a new string element from the array element. For example, for 1500 MB use the following:

```
<string>-Xmx1500m</string>
```

Tip: Try not to use more than half of your existing physical RAM if possible.

Setting a system property

To set a system property, edit the application launcher and add a parameter after the `%OXYGEN_JAVA%` token, using the following form:

```
-Dproperty.name=value
```

You can also set a system property through a parameter prefixed with `-Doxy` in the command line used to start the application:

```
oxygenDeveloper20.0.exe "-Doxyproperty.name=value"
```

All system properties are displayed in the **System properties** tab of the **About** dialog box.

To view the list of Oxygen XML Developer system properties, go to [Custom System Properties](#) on page 156.

Disabling DPI Scaling

Some users may prefer the look of smaller icons in an HiDPI display. To achieve this, display scaling needs to be disabled for high DPI settings. To disable the DPI scaling, set the following property in `.vmoptions` (or in the `.bat` script):

```
sun.java2d.dpiaware=false
```

Setting Parameters in the Command Line Scripts

If you start Oxygen XML Developer with the `oxygenDeveloper.bat` command line script, you have to add or modify the **-Xmx** parameter to the java command at the end of the script.

For example, to set the maximum amount of Java memory to 600 MB in **Windows**, modify the **-Xmx** parameter like this:

```
java -Xmx600m -Dsun.java2d.noddraw=true ...
```

On **Mac OS X**, the java command should look like this:

```
java "-Xdock:name=Developer" \
-Dcom.oxygenxml.editor.plugins.dir="$DEVELOPER_HOME/plugins" \
-Xmx600m \
...
```

On **Linux**, the Java command should look like this:

```
java -Xmx600m \
"-Dcom.oxygenxml.editor.plugins.dir=$DEVELOPER_HOME/plugins"
```

Creating Custom Startup Parameters File

You can create your own custom `.vmoptions` files and the application and the executable tools will automatically include your custom parameters at startup. The following custom files are recognized by the application and the executable tools:

- `custom_commons.vmoptions` - The parameters and their values of this file will be included in all the startup launchers.
- `custom_<app name>.vmoptions` - The `<app name>` is the name of the executable application or tool (for example, `custom_diffFiles.vmoptions` for the **Compare Files** tool). The parameters and their values of this file will be included in the startup launcher for this particular executable.

For example: To specify a different language for all launchers you can use the custom `vmoptions` file called `custom_commons.vmoptions` and the content would look like this:

```
-Dcom.oxygenxml.language=French
```

For example: To increase the memory available for a specific tool, such as the **Compare Files** tool (`diffFiles.exe`), you can use a custom `vmoptions` file called `custom_diffFiles.vmoptions` and the content would look like this:

```
-Xmx1000m
```

To be recognized and included, these custom startup parameter files must be saved in the installation directory of Oxygen XML Developer.

How to Increase the Amount of Available Memory

Determining how to increase the amount of memory that is allocated to Oxygen XML Developer depends on how you launch the application.

- **Windows/Linux Application Launcher** - If you start Oxygen XML Developer using the default startup launcher that was created during a Windows or Linux installation, see [Increasing the amount of memory that Oxygen XML Developer uses on Windows and Linux](#) on page 160.
- **Mac OS X Application Launcher** - If you start Oxygen XML Developer using the default startup launcher that was created during a Mac OS X installation, see [Increasing the amount of memory that Oxygen XML Developer uses on OS X](#) on page 160.
- **Command Line Script** - If you start Oxygen XML Developer using a command line script, see [Setting Parameters in the Command Line Scripts](#) on page 161.
- **Custom Startup Parameters File** - You can also create your own custom startup parameters file and increase the memory using this file. For more information, see [Creating Custom Startup Parameters File](#) on page 161.

Perspectives

Topics:

- [Editor Perspective](#)
- [XSLT Debugger Perspective](#)
- [XQuery Debugger Perspective](#)
- [Database Perspective](#)

An Oxygen XML Developer *perspective* is an interface layout geared towards a specific use. The Oxygen XML Developer interface uses standard interface conventions and components to provide a familiar and intuitive editing environment across all operating systems. There are several *perspectives* that you can use to work with documents in Oxygen XML Developer. You can change the *perspective* by selecting the respective icon (   ) in the top-right corner of Oxygen XML Developer or by selecting the *perspective* from the **Window > Open Perspective** menu.

Editor Perspective

The **Editor perspective** is the most commonly used *perspective* and it is the default *perspective* when you start Oxygen XML Developer for the first time. It is the *perspective* that you will use to edit the content of your XML documents.

To switch the focus to this *perspective*, select the  **Editor** button in the top-right corner of Oxygen XML Developer (or select **Editor** from the **Window > Open perspective** menu)

The layout of this *perspective* is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in Oxygen XML Developer. Most of the menus are common for all types of documents. However, Oxygen XML Developer also includes some context-sensitive and *framework*-specific menus that are only available for a specific context or type of document.

Toolbars

Provides easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. The [toolbars can be configured](#) to suit your specific needs.

Editor Pane

The main editing pane where you spend most of your time reading, editing, applying markup, and validating your documents.

Views

Oxygen XML Developer includes a large variety of *dockable* views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. The most commonly used views are displayed by default and you can choose to display others by selecting them from the **Window > Show View** menu. The [layout of the views can also be configured](#) according to your preferences.

When two or more views are displayed, the application provides divider bars. Divider bars can be dragged to a new position increasing the space occupied by one panel while decreasing it for the other.

As the majority of the work process centers around the Editor area, other views can be hidden using the toggle controls located on the top corner of the view ( [ on Mac OS X]).

Some of the most helpful views in the **Editor perspective** include the following:

- **Project view** - Enables the definition of projects and logical management of the documents they contain.

- **Open/Find Resource view** - Designed to offer advanced search capabilities in various scopes.
- **Outline view** - It provides an XML tag overview and offers a variety of functions, such as modifications follow-up, document structure change, document tag selection, and elements filtering.
- **Results view** - Displays the messages generated as a result of user actions such as [validations](#), [transformation scenarios](#), [spell checking in multiple files](#), search operations, and others. Each message is a link to the location related to the event that triggered the message.
- **Attributes view** - Presents all possible attributes of the current element and allows you to edit attribute values. You can also use this view to insert attributes in **Text** mode.
- **Model view** - Presents the current edited element structure model and additional documentation as defined in the schema.
- **Elements view** - Presents a list of all defined elements that you can insert at the current cursor position according to the document's schema.
- **Entities view** - Displays a list with all entities declared in the current document as well as built-in ones.
- **Transformation Scenarios view** - Displays a list with all currently configured transformation scenarios.
- **XPath/XQuery Builder view** - Displays the results from running an XPath expression.
- **WSDL SOAP Analyzer view** - Provides a tool that helps you test if the messages defined in a Web Service Descriptor (WSDL) are accepted by a Web Services server.

Related Information:

[Editing Specific Document Types](#) on page 359

[Editing Modes](#) on page 168

[Configuring the Layout of the Views and Editors](#) on page 146

XSLT Debugger Perspective

The **XSLT Debugger perspective** allows you to detect problems in an XSLT transformation by executing the process step by step in a controlled environment. To switch the focus to this *perspective*, select the  **XSLT Debugger** button in the top-right corner of the interface or **Window > Open perspective > XSLT Debugger**.

The workspace in this *perspective* is organized as an editing area assisted by special helper views. The editing area contains editor panels that you can [split horizontally or vertically](#) in a stack of XML editor panels and a stack of XSLT editor panels. The XML files and XSL files can be edited in **Text mode** only.

The layout of this *perspective* is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XSLT Debugger**.

Toolbars

Contains all actions needed to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

XML Source Pane

The editing pane where you can display and edit data or document-oriented XML documents.

XSL Source Pane

The editing pane where you can display and edit XSL stylesheets.

Output View

Displays the transformed output that results from the input of a selected document (XML) and selected stylesheet (XSL) to the transformer. The result of transformation is dynamically written as the transformation is processed. There are three types of views for the output: a text view (with XML syntax highlight), an XHTML view, and one text view for each `xs1:result`-document element used in the stylesheet (if it is an XSLT 2.0 / 3.0 stylesheet).

Debugging Information Views

Presented in two panes, they display various types of information that can be used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This allows you to obtain a

clear view of the transformation progress. See the [Debugging Information Views](#) topic for a list of all the information views (and links to more details on each view).

Note: You can add XPath expression automatically in the **XWatch** view using the **Watch expression** action from the contextual menu. In case you select an expression or a fragment of it and then click **Watch expression** in the contextual menu, the entire selection is presented in the **XWatch** view. Using **Watch expression** without selecting an expression displays the value of the attribute from the cursor position in the **XWatch** view. Variables detected at the cursor position are also displayed. Expressions displayed in the **XWatch** view are *normalized* (unnecessary white spaces are removed from the expression).

For more information about the XSLT debugging capabilities in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/m9d8c4V-LJw>

Related Information:

[Debugging XSLT Stylesheets and XQuery Documents](#) on page 1022

[XQuery Debugger Perspective](#) on page 165

XQuery Debugger Perspective

The **XQuery Debugger perspective** allows you to detect problems in an XQuery transformation process by executing the process step by step in a controlled environment and inspecting the information provided in the special views. To switch the focus to this *perspective*, select the  **XQuery Debugger** button in the top-right corner of the interface or **Window > Open perspective > XQuery Debugger**.

The workspace in this *perspective* is organized as an editing area assisted by special helper views. The editing area contains editor panels that you can [split horizontally or vertically](#) in a stack of XML editor panels and a stack of XQuery editor panels. The XML files and XQuery files can be edited in **Text mode** only.

The layout of this *perspective* is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XQuery Debugger**.

Toolbars

Contains all actions needed to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

XML Source Pane

The editing pane where you can display and edit data or document-oriented XML documents.

XQuery Source Pane

The editing pane where you can display and edit XQuery files.

Output View

Displays the transformed output that results from the input of a selected document (XML) and selected XQuery document to the XQuery transformer. The result of transformation is dynamically written as the transformation is processed. There are two types of views for the output: a text view (with XML syntax highlight) and an XHTML view.

Debugging Information Views

Presented in two panes, they display various types of information that can be used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This allows you to obtain a clear view of the transformation progress. See the [Debugging Information Views](#) topic for a list of all the information views (and links to more details on each view).

Note: You can add XPath expression automatically in the **XWatch** view using the **Watch expression** action from the contextual menu. If you select an expression, or a fragment of it, and then click **Watch expression** in the contextual menu, the entire selection is presented in the **XWatch** view. Expressions displayed in the **XWatch** view are normalized (unnecessary white spaces are removed from the expression).

For more information about the XQuery debugging capabilities in Oxygen XML Developer, watch our video demonstration:

https://www.youtube.com/embed/o5_M2kbyipU

Related Information:

[Debugging XSLT Stylesheets and XQuery Documents](#) on page 1022

[XSLT Debugger Perspective](#) on page 164

Database Perspective

The **Database perspective** allows you to manage databases. To switch the focus to this *perspective*, select the  **Database** button in the top-right corner of Oxygen XML Developer or **Window > Open perspective > Database** from the **Window > Open perspective** menu.

The **Database perspective** offers various helpful features, including:

- Support for browsing multiple connections at the same time.
- Support for both *Relational* and *Native XML* databases.
- Browsing the structure of databases.
- Viewing tables from databases.
- Inspecting or modifying data.
- Specifying XML Schemas for XML fields.
- SQL execution.
- XQuery execution.
- Data export to XML.

Supported Databases

Oxygen XML Developer supports numerous types of databases, including:

- Oracle Berkeley DB XML Database
- eXist XML Database
- IBM DB2 (Enterprise edition only)
- JDBC-ODBC Bridge
- MarkLogic (Enterprise edition only)
- Microsoft SQL Server 2005 and Microsoft SQL Server 2008 (Enterprise edition only)
- MySQL
- Oracle 11g (Enterprise edition only)
- PostgreSQL 8.3 (Enterprise edition only)
- Documentum xDB (X-Hive/DB) 10 XML Database (Enterprise edition only)
- SharePoint (CMS)

Note: For the databases marked with "Enterprise edition only", the XML capabilities are only available in the Enterprise edition of Oxygen XML Developer. For a detailed feature matrix that compares the Academic, Professional, and Enterprise editions of Oxygen XML Developer [go to the Oxygen XML Developer website](#).

Supported Capabilities

The supported non-XML capabilities are as follows:

- Browsing the structure of the database instance.
- Opening a database table in the **Table Explorer** view.
- Handling the values from **XML Type** columns as String values.

Note: The non-XML capabilities are available in the Enterprise, Academic, and Professional editions of Oxygen XML Developer by registering the database driver as a *Generic JDBC* type driver when defining the data source for accessing the database. For more information, see [Database Connection Support](#) on page 957.

The supported XML capabilities are as follows:

- Displaying an XML Schema node in the tree of the database structure (for databases with an XML-specific structure) with actions for opening, editing, and validating the schemas in an Oxygen XML Developer editor panel.
- Handling the values from **XML Type** columns as XML instance documents that can be opened and edited in an Oxygen XML Developer editor panel.
- Validating an XML instance document added to an XML Type (column of a table, etc.)

Tip: Connections configured on relational data sources can be used to import data to XML or to generate XML schemas.

Layout of the Database Perspective

The layout of this *perspective* is composed of the following components:

Menus

Provides menu driven access to all the features and functions available in the **XQuery Debugger**.

Toolbars

Contains all actions needed to configure and control the debugging process. The [toolbars can be configured](#) to suit your specific needs.

Editor Pane

The main editing pane where you spend most of your time reading, editing, applying markup, and validating your documents.

Data Source Explorer View

Provides browsing support for the configured connections.

Table Explorer View

Provides table content editing support for inserting new rows, deleting table rows, editing cell values, exporting to an XML file, and more.

Related Information:

[Working with Databases](#) on page 953

[Data Source Explorer View](#) on page 953

[Table Explorer View](#) on page 954

Editing Modes

Topics:

- [Text Editing Mode](#)
- [Grid Editing Mode](#)
- [Design Editing Mode \(XML Schema Diagram Editor\)](#)

The main editing area in Oxygen XML Developer includes several editing modes to suit the type of editing that you want to perform. You can easily switch between modes by clicking on the desired mode at the bottom of the main editing pane. Oxygen XML Developer offers the following editing modes:

- **Text** - This mode presents the source of an XML document.
- **Grid** - This mode displays an XML document as a structured grid of nested tables.
- **Design** - This mode is found in the schema editor and represents the schema as a diagram.

The default editing mode that will be initially opened for each type of document can be set in two ways:

- If the [Allow Document Type specific edit mode setting to override the general mode setting](#) option is selected in the **Edit Modes** preferences page, then the edit mode specified in the [Document Type configuration dialog box](#) is used when that particular type of document is initially opened.
- If the [Allow Document Type specific edit mode setting to override the general mode setting](#) option is not selected, then the edit mode specified in the [table in the Edit Modes preferences page](#) is used when that particular type of document is initially opened.

Text Editing Mode

The **Text** mode editor in Oxygen XML Developer is designed to be a simple, yet powerful, XML source editor. It provides support to help you edit, transform, and debug XML-based documents. It is similar to other common text editors, but Oxygen XML Developer also includes specialized editing actions, a powerful [Content Completion Assistant](#), a helpful [Outline view](#), and many other unique features.

To switch to this mode, select **Text** at the bottom of the editing area.



Related Information:

[Editing XML Documents in Text Mode](#) on page 359

Navigating the Document Content in Text Mode

Oxygen XML Developer includes some useful features to help you navigate XML documents in **Text** mode.

Using the Keyboard

Oxygen XML Developer allows you to quickly navigate through a document using the **Ctrl + CloseBracket (Command + CloseBracket on OS X)** key to go to the next XML node and **Ctrl + OpenBracket (Command + OpenBracket on OS X)** to go to the previous one.

To navigate one word forward or backwards, use **Ctrl + RightArrow (Command + RightArrow on OS X)**, and **Ctrl + LeftArrow (Command + LeftArrow on OS X)**, respectively. To position the cursor at the beginning or end of the document you can use **Ctrl + Home (Command + Home on OS X)**, and **Ctrl + End (Command + End on OS X)**, respectively.

Navigation Buttons

Oxygen XML Developer includes some actions that help you to quickly navigate to a particular modification. These navigation buttons are available in the main toolbar and the actions can also be accessed from the **Find** menu. The three actions include:

-  **Last Modification** - Moves the cursor to the last modification in any opened document.
-  **Back** - Moves the cursor to the previous position.
-  **Forward** - Moves the cursor to the next position. Available after you use the **Back** button at least once.

Navigating with the Outline View

Oxygen XML Developer includes a very useful **Outline view** that displays a hierarchical tag overview of the currently edited XML Document.

You can use this view to quickly navigate through the current document by selecting nodes in the outline tree. It is synchronized with the editor area, so when you make a selection in the **Outline** view, the corresponding nodes are highlighted in the editor area.

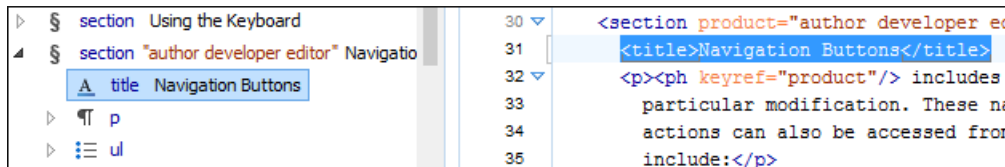


Figure 48: Outline View Navigation in Text Mode

Using the Breadcrumb to Navigate

A *breadcrumb* on the top stripe indicates the path from the document root element to the current element. It can also be used as a helpful tool to navigate to specific elements throughout the structure of the document.




Figure 49: Breadcrumb in Text Mode

The last element listed in the *breadcrumb* is the element at the current cursor position. The current element is also highlighted by a thin light blue bar for easy identification. Clicking an element from the *breadcrumb* selects the entire element and navigates to it in the editor area.

Navigating with the Go To Dialog Box

In **Text** mode, you can navigate precisely to a location in the document you are editing by using the **Go to** dialog box. To open this dialog box, go to **Find > Go to (Ctrl+L (Command+L on OS X))**.

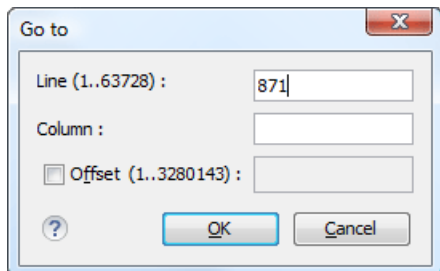


Figure 50: Go to Dialog Box

The dialog box includes the following fields for specifying a specific navigation location:

- **Line** - Destination line in the current document.
- **Column** - Destination column in the current document.
- **Offset** - Destination offset relative to the beginning of document.

Navigating with Bookmarks

By using *bookmarks*, you can mark positions in an edited document so that you can return to it later. This is especially helpful for navigating through large documents or while editing multiple documents. You can place up to nine distinct *bookmarks* in any document. Shortcut keys are available to place the *bookmarks* or to return to any of the marked positions. You can configure these shortcut keys in the [Options > Menu Shortcut Keys](#) menu.

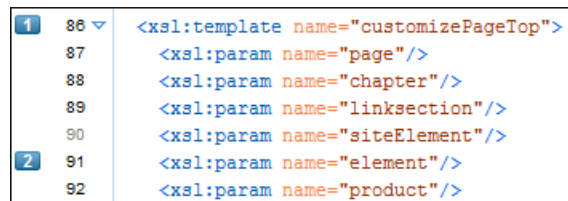


Figure 51: Editor Bookmarks

A *bookmark* can be inserted in **Text** mode by doing one of the following:

- Click in the vertical stripe on the left side of the editor (to the left of the line number).
- Select the  **Create Bookmark (F9)** action from the **Edit > Bookmarks** menu.

A *bookmark* can be removed by right-clicking its icon on the vertical stripe and selecting **Remove** or **Remove all (Ctrl+F7 (Command+F7 on OS X))**.

You can navigate the *bookmarks* by using one of the actions available on the **Edit > Bookmarks > Go to** menu or by using the shortcut keys that are listed in that menu.

Smart Editing in Text Mode

Oxygen XML Developer includes *smart editing* features to help you edit XML documents in **Text** mode. The following smart editing features are included:

- **Closing tag auto-expansion** - This feature helps save some keystrokes by automatically inserting a closing tag when you insert a complete start tag and the cursor is automatically placed in between the start and end tags. For instance, after entering a start `<tag>`, the corresponding closing `</tag>` is automatically inserted and the cursor is placed between the two (`<tag>|</tag>`).
- **Auto-rename matching tag** - When you edit the name of a start tag, Oxygen XML Developer will mirror-edit the name of the matching end tag. This feature can be controlled from the [Content Completion option page](#).
- **Auto-breaking the edited line** - The [Hard line wrap option](#) automatically breaks the edited line when its length exceeds the maximum line length [defined for the format and indent operation](#).
- **Indent on Enter** - The [Indent on Enter option](#) indents the new line inserted when you press **Enter**.
- **Smart Enter** - The [Smart Enter option](#) inserts an empty line between the start and end tags. If you press **Enter** between a start and end tag, the action places the cursor in an indented position on the empty line between the lines that contain the start and end tag.
- **Double-click** - A double-click selects certain text, depending on the position of the click in the document:
 - If the click position is on a start tag or end tag, then the element name is selected.
 - If the click position is immediately after the opening quote or immediately before the closing quote of an attribute value, then the entire attribute value is selected.
 - Otherwise, a double-click selects contiguous text.
- **Triple-click** - A triple-click selects entire regions of text, depending on the click position:
 - If the click position is on a start or end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is after a start tag or before an end tag, then the entire content of the element without the start and end tags is selected.
 - If the click position is before a start tag or after an end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is immediately before an attribute, then the entire attribute and its value is selected.
 - If the click position is in between the opening and closing quotes of an attribute value, then the entire attribute value is selected.

- Otherwise, it selects the entire current line.

Shortcut Actions in Text Mode

Oxygen XML Developer includes numerous shortcut actions to help you edit content in the **Text** editing mode.

Changing the Font Size (Zoom)

The font size of the editor panel can be changed with the following actions that are available with shortcuts or in the **Document > Font size** menu:

Increase editor font (Ctrl + NumPad+ (Command + NumPad+ on OS X) or Ctrl + MouseWheelForward (Windows/Linux))

Increases the font size (zooms in) with one point for each execution of the action.

Note: For Mac OS X, if you activate the [Enable mouse-wheel zooming option](#) in the **Editor** preferences page, you can use **Command + MouseWheelForward** to increase the font size (zoom in). It is disabled by default due to the way inertia affects the mouse wheel on Mac OS X.

Decrease editor font (Ctrl + NumPad- (Command + NumPad- on OS X) or Ctrl + MouseWheelBackwards (Windows/Linux))

Decreases the font size (zooms out) with one point for each execution of the action.

Note: For Mac OS X, if you activate the [Enable mouse-wheel zooming option](#) in the **Editor** preferences page, you can use **Command + MouseWheelBackwards** to decrease the font size (zoom out). It is disabled by default due to the way inertia affects the mouse wheel on Mac OS X.

Normal editor font (Ctrl + 0 (Command + 0 on OS X))

Resets the font size to [the value of the editor font set in the Fonts preferences page](#).

Undo/Redo Actions

The typical undo and redo actions are available with shortcuts or in the **Edit** menu:

Undo (Ctrl + Z (Command + Z on OS X))

Reverses a maximum of 200 editing actions (configurable with the [Undo history size option](#) in the **Editor** preferences page) to return to the preceding state.

Note: Complex operations such as **Replace All** or **Indent selection** count as single undo events.

Redo (Ctrl + Y (Command + Shift + Z on OS X, Ctrl + Shift + Z on Linux/Unix))

Recreates a maximum of 100 editing actions that were undone by the **Undo** function.

Copy and Paste Actions

The typical copying and pasting actions are available with shortcuts or in the contextual menu (or the **Edit** menu):

Cut (Ctrl + X (Command + X on OS X))

Removes the current selected content from the document and places it in the clipboard.

Copy (Ctrl + C (Command + C on OS X))

Places a copy of the current selected content in the clipboard.

Paste (Ctrl + V (Command + V on OS X))

Inserts the current clipboard content into the document at the cursor position.

Select All (Ctrl + A (Command + A on OS X))

Selects the entire content of the current document.

Moving XML Nodes

You can use the following shortcuts to move XML elements or XSLT variables up or down in **Text** mode:

Ctrl + Alt + UpArrow (Command + Alt + UpArrow on OS X)

Moves the node up one line.

Ctrl + Alt + DownArrow (Command + Alt + DownArrow on OS X)

Moves the node down one line.

Note: The requirements for these node moving actions to work are as follows:

- The mechanism is designed to work without a selection. If you use these actions on a selection of content, it moves the entire selection. To make this mechanism work as intended, simply position the cursor somewhere on the line that you want to move.
- A start tag must be the first text occurrence on the line where the cursor is positioned.
- On the line where the element ends, only whitespaces are allowed after the end tag.

Miscellaneous Shortcut Actions in Text Mode

Oxygen XML Developer also includes the following other miscellaneous shortcut actions in **Text** mode:

Ctrl + Delete (Command + Delete on OS X)

Deletes the next word.

Ctrl + Backspace (Command + Backspace on OS X)

Deletes the previous word.

Ctrl + W (Command + W on OS X)

Cuts the previous word.

Ctrl + K (Command + K on OS X)

Cuts to end of line.

Ctrl + Single-Click (Command + Single-Click on OS X)

Use this shortcut to open any of the following:

- Any absolute URL (URLs that have a protocol), regardless of their location in the document.
- URI attributes such as: `schemaLocation`, `noNamespaceSchemaLocation`, `href` and others.
- Processing instructions used for associating resources, `xml-models`, `xml-stylesheets`.

Ctrl + Shift + Y (Command + Shift + Y on OS X) (Document > Edit > Toggle Line Wrap)

Enables or disables line wrapping. When enabled, if text exceeds the width of the displayed editor, content is wrapped so that you do not have to scroll horizontally.

Related Information:

[Frequently Used Shortcut Keys](#) on page 10

Editing XML Markup in Text Mode

Oxygen XML Developer includes some useful actions that allow you to easily edit XML markup in **Text** mode. These actions are available in the **Refactoring** submenu of the contextual menu and in the **Document > Markup** menu, and many of the actions can also be done with simple keyboard shortcuts.

Using the Breadcrumb

A *breadcrumb* on the top stripe indicates the path from the document root element to the current element. It can also be used as a helpful tool to insert and edit specific elements in the document structure.




Figure 52: Breadcrumb in Text Mode

The last element listed in the *breadcrumb* is the element at the current cursor position. The current element is also highlighted by a thin light blue bar for easy identification. Clicking an element in the *breadcrumb* selects the entire element in the editor area. Also, each element provides a contextual menu with access to the following actions:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens an editing window that allows you to edit the attributes of the currently selected element.

Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

Cut

Removes the selected element and copies it to the clipboard.

Copy

Copies the selected element to the clipboard.

Delete

Deletes the currently selected element.

Move Nodes

You can easily move XML nodes in the current document by using the following shortcut keys:

Alt + UpArrow

Moves the current node or selected nodes in front of the previous node.

Alt + DownArrow

Moves the current node or selected nodes after the subsequent node.

Rename Elements

You can rename elements by using the following actions in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Rename Element

The element from the cursor position, and any elements with the same name, can be renamed according with the options from the **Rename** dialog box.

Rename Prefix (**Alt + Shift + P** (**Command + Shift + P** on OS X))

The prefix of the element from the cursor position, and any elements with the same prefix, can be renamed according with the options from the **Rename** dialog box.

- If you select the **Rename current element prefix** option, the application will recursively traverse the current element and all its children. *For example*, to change the `xmlns:p1="ns1"` association in the current element to `xmlns:p5="ns1"`, if the `xmlns:p1="ns1"` association is applied on the parent element, then Oxygen XML Developer will introduce `xmlns:p5="ns1"` as a new declaration in the current element and will change the prefix from p1 to p5. If p5 is already associated with another namespace in the current element, then the conflict will be displayed in a dialog box. By pressing **OK**, the prefix is modified from p1 to p5 without inserting a new declaration.
- If you select the **Rename current prefix in all document** option, the application will apply the change on the entire document.

- To also apply the action inside attribute values, select the **Rename also attribute values that start with the same prefix** checkbox.

Surround Content with Tags (Wrap)

You can surround a selection of content with tags (*wrap* the content) by using the following action in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Surround with submenu

Presents a drop-down menu that allows you to choose a tag to surround a selected portion of content.

Surround with Tags (**Ctrl + E (Command + E on OS X)**)

Allows you to choose a tag that encloses a selected portion of content. If there is no selection, the start and end tags are inserted at the cursor position.

- If the **Position cursor between tags option** is selected in the **Content Completion** preferences page, the cursor is placed between the start and end tag.
- If the **Position cursor between tags option** is not selected in the **Content Completion** preferences page, the cursor is placed at the end of the start tag, in an insert-attribute position.

Surround with '[tag]' (**Ctrl + ForwardSlash (Command + ForwardSlash on OS X)**)

Surround the selected content with the last tag used.

Unwrap the Content of Elements

You can unwrap the content of an element by using the following action in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Delete element tags (**Alt + Shift + X (Command + Alt + X on OS X)**)

Deletes the start and end tag of the current element.

Join or Split Elements

You can join or split elements in the current document by using the following actions in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Join elements (**Alt + Shift + J (Command + Alt + J on OS X)**)

Joins the left and right elements relative to the current cursor position. The elements must have the same name, attributes, and attributes values.

Split element (**Alt + Shift + D (Ctrl + Alt + D on OS X)**)

Split the element from the cursor position into two identical elements. The cursor must be inside the element.

Other Refactoring Actions

You can also manage the structure of the markup by using the other specific XML refactoring actions that are available in the **Refactoring** submenu of the contextual menu:

Attributes Refactoring Actions

Contains predefined XML refactoring operations that pertain to attributes with some of the information preconfigured based upon the current context.

Add/Change attribute

Allows you to change the value of an attribute or insert a new one.

Convert attribute to element

Allows you to change an attribute into an element.

Delete attribute

Allows you to remove one or more attributes.

Rename attribute

Allows you to rename an attribute.

Replace in attribute value

Allows you to search for a text fragment inside an attribute value and change the fragment to a new value.

Comments Refactoring Actions

Contains predefined XML refactoring operations that pertain to comments with some of the information preconfigured based upon the current context.

Delete comments

Allows you to delete comments found inside one or more elements.

DITA Refactoring Actions

A variety of predefined XML refactoring operations that pertain to DITA documents with some of the information preconfigured based upon the current context.

Change Topic ID to File Name

Use this operation to change the ID of a topic to be the same as its file name.

Convert CALS Tables to Simple Tables

Use this operation to convert DITA CALS tables to simple tables.

Convert conrefs to conkeyrefs

Use this operation to convert conref attributes to conkeyref attributes.

Convert Simple Tables to CALS Tables

Use this operation to convert DITA simple tables to CALS tables.

Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task). A DITA *General Task* is a less restrictive alternative to the *Strict Task* information type.

Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

Elements Refactoring Actions

Contains predefined XML refactoring operations that pertain to elements with some of the information preconfigured based upon the current context.

Delete element

Allows you to delete elements.

Delete element content

Allows you to delete the content of elements.

Insert element

Allows you to insert new elements.

Rename element

Allows you to rename elements.

Unwrap element

Allows you to remove the surrounding tags of elements, while keeping the content unchanged.

Wrap element

Allows you to surround elements with element tags.

Wrap element content

Allows you to surround the content of elements with element tags.

Fragments Refactoring Actions

Contains predefined XML refactoring operations that pertain to XML fragments with some of the information preconfigured based upon the current context.

Insert XML fragment

Allows you to insert an XML fragment.

Replace element content with XML fragment

Allows you to replace the content of elements with an XML fragment.

Replace element with XML fragment

Allows you to replace elements with an XML fragment.

JATSKit Refactoring Actions

Contains predefined XML refactoring operations that pertain to JATS documents with some of the information preconfigured based upon the current context.

Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Adds an NLM 'BITS' 2.0 DOCTYPE declaration.

Add Blue DOCTYPE - NISO JATS Publishing 1.1

Adds a JATS 'Blue' 1.1 DOCTYPE declaration.

Normalize IDs

Assigned IDs are normalized and IDs are assigned to some elements that are missing them.

Related Information:

[Refactoring XML Documents](#) on page 437

[Contextual Menu Actions in Text Mode](#) on page 388

[Frequently Used Shortcut Keys](#) on page 10

Folding XML Elements in Text Mode

When working with a large document, the [folding](#) support in Oxygen XML Developer can be used to collapse some element content leaving only those that you need to edit in focus. Expanding and collapsing works on individual elements. Expanding an element leaves the child elements unchanged.

By default, the [folding](#) feature is enabled in Oxygen XML Developer, but it can be disabled in the **Text** preferences page with the [Enable folding option](#).



Figure 53: Folding of XML Elements in Text Mode

The fact that the folds are persistent is a unique feature of Oxygen XML Developer. The next time you open the document the folds are restored to its last state.

Folding Actions in Text Mode

Element folds are marked with a small triangle (▾ / ▸) in the left stripe. To toggle the fold, simply click the icon. Also, if you right-click the icon, the following actions are available:

Collapse Other Folds (Ctrl + NumPad/ (Command + NumPad/ on OS X))

Folds all the elements except the current element.

Collapse Child Folds (Ctrl + NumPad. (Command + NumPad. on OS X))

Folds the child elements that are indented one level inside the current element.

Expand Child Folds

Unfolds all child elements of the currently selected element.

Expand All (Ctrl + NumPad* (Command + NumPad* on OS X))

Unfolds all elements in the current document.

For more information about the *folding* support in Oxygen XML Developer, watch our video demonstration:

https://www.youtube.com/embed/eR9HfN_peAE

Drag and Drop in Text Mode

To move a whole region of text to other location in the same edited document, just select the text, drag the selection by holding down the left mouse button and drop it to the target location.

You can also copy content from other applications and paste it into the document.

Selecting Content in Text Mode

Oxygen XML Developer includes a variety of keyboard shortcuts that allow you to select content in **Text** mode. These include numerous standard continuous selection possibilities that are common to many text editors, as well as a selection feature that allows you to select a rectangular area within a document in **Text** mode.

Standard Continuous Selection Shortcuts

Ctrl + A (Meta + A on Mac OS X)

Selects all content in the document.

Shift + Left/Right Arrow Keys

Begins a continuous selection at the cursor position and extends it one character at a time in the direction that you press the arrow keys.

Shift + Up/Down Arrow Keys

Begins a continuous selection at the cursor position and extends it one line at a time in the direction that you press the arrow keys.

Ctrl + Shift + Left/Right Arrow Keys (Meta + Shift + Left/Right Arrow Keys on Mac OS X)

Begins a continuous selection at the cursor position and extends it one word at a time in the direction that you press the arrow keys.

Shift + Home

Begins a continuous selection at the cursor position and extends it to the beginning of the current line (on Mac OS X, it extends to the beginning of the document).

Shift + End

Begins a continuous selection at the cursor position and extends it to the end of the current line (on Mac OS X, it extends to the end of the document).

Ctrl + Shift + Home

Begins a continuous selection at the cursor position and extends it to the beginning of the document.

Ctrl + Shift + End

Begins a continuous selection at the cursor position and extends it to the end of the document.

Shift + PageUp

Begins a continuous selection at the cursor position and extends it up one screen page.

Shift + PageDown

Begins a continuous selection at the cursor position and extends it down one screen page.

Double-Click

Selects certain text, depending on the position of the click in the document. See [Smart Editing Double-Click](#) for the specifics.

Triple-Click

Selects entire regions of text, depending on the position of the click in the document. See the [Smart Editing Triple-Click](#) for the specifics.

Right-Click > Select > Element

Selects the entire element at the current cursor position.

Right-Click > Select > Content

Selects the entire content of the element at the current cursor position, excluding the start and end tag. Performing this action repeatedly will result in the selection of the content of the ancestor of the currently selected element content.

Right-Click > Select > Attributes

Selects all the attributes of the element at the current cursor position.

Right-Click > Select > Parent

Selects the entire parent element at the current cursor position.

Rectangular Selection Shortcuts

Oxygen XML Developer also includes some keyboard shortcuts that allow you to select a rectangular block of content in **Text** mode and you can then copy, cut, paste, delete, or edit the selection.



Attention: The rectangular selection shortcuts will not work if the [Line Wrap option](#) is selected in the **Text** preferences page.

The following shortcuts can be used to create a rectangular selection:

Alt + Mouse Click + Mouse Movement (Alt + Meta + Mouse Click + Mouse Movement on Mac OS X)

Begins a rectangular selection at the mouse click position and extends it in the direction that you move the mouse. Release **Alt** (**Alt + Meta** on Mac OS X) to enter the [in-place editing mode](#).

- After you press the `<` character when inserting an element, it is automatically activated after a short delay. You can adjust the activation delay with the [Activation delay of the proposals window \(ms\)](#) option from the **Content Completion** preferences page.
- After typing a partial element or attribute name, you can manually activate it by pressing **Ctrl + Space** (**Command + Space on OS X**) or **Alt + ForwardSlash** (**Command + Alt + ForwardSlash on OS X**). If there is only one valid proposal at the current location, it is inserted without displaying the list of proposals.

You can navigate through the list of proposals by using the **Up** and **Down** keys on your keyboard. In some cases, the *Content Completion Assistant* displays a documentation window with information about the particular proposal and some of them have links to additional information (for example, DITA elements might have a link to the DITA Style Guide). You can also change the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected proposal in **Text** mode, do one of the following:

- Press **Enter** or **Tab** to insert both the start and end tags and position the cursor inside the start tag in a position suitable for inserting attributes.
- Press **Ctrl + Enter** (**Command + Enter on OS X**) to insert both the start and end tags and positions the cursor between the tags in a position where you can start typing content.

Note: When the DTD, XML Schema or RELAX NG schema specifies required child elements for the newly added element, they are inserted automatically only if the [Add Element Content](#) option (in the **Content Completion** preferences page) is selected. The *Content Completion Assistant* can also add optional content and first choice particle, as specified in the DTD, XML Schema, or RELAX NG schema. To activate these features, select the [Add optional content](#) and [Add first Choice particle](#) options in the **Content Completion** preferences page.

After inserting an element, the cursor is positioned:

- Before the `>` character of the start tag, if the element allows attributes, to allow rapid insertion of any of the attributes supported by the element. Pressing the space bar displays the Content Completion list once again. This time it contains the list of allowed attribute names. If the attribute supports a fixed set of parameters, the assistant list displays the list of valid parameters. If the parameter setting is user-defined and therefore variable, the assistant is closed to allow manual insertion. The values of the attributes can be learned from the same elements in the current document
- After the `>` character of the start tag if the element has no attributes.

Where the Content Completion Assistant is Displayed

The *Content Completion Assistant* is displayed:

- Anywhere within a tag name or at the beginning of a tag name in an XML document, XML Schema, DTD, or Relax NG (full or compact syntax) schema.
- Anywhere within an attribute name or at the beginning of an attribute name in any XML document with an associated schema.
- Within attribute values or at the beginning of attribute values in XML documents where lists of possible values have been defined for that element in the schema associated with the document.

Types of Proposals Listed in the Content Completion Assistant

The following things are considered for determining the proposals that are listed in the content completion window:

Element Structure Specified in DTD or Schema

The proposals that populate the *Content Completion Assistant* depend on the element structure specified in the DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema associated with the edited document.

Note: The *Content Completion Assistant* is able to offer elements defined both by XML Schemas version 1.0 and 1.1.

Current Cursor Position

The number and type of elements displayed by the *Content Completion Assistant* is dependent on the cursor's current position in the structured document. The child elements displayed within a given element are defined

by the structure of the specified DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema.

Unique ID Attribute Values

A schema may declare certain attributes as *ID* or *IDREF/IDREFS*. When the document is validated, Oxygen XML Developer checks the uniqueness and correctness of the ID attributes. It also collects the attribute values declared in the document to prepare the list of proposals. This is available for documents that use DTD, XML Schema, and Relax NG schema.

Values for *xml:id* Attributes

Values of all the *xml:id* attributes are handled as ID attributes. They are collected and displayed by the *Content Completion Assistant* as possible values for *anyURI* attributes defined in the schema of the edited document. This works only for XML Schema and Relax NG schemas.

Links/References in DITA

When entering values for the various types of links and references in DITA (for example, values for *href* or *conref* elements), the *Content Completion Assistant* will propose potential targets when you use the forward slash key (*/*).

ID Values for DITA Key References

In DITA, when inserting key references (*keyref*) or content key references (*conkeyref*), the ID values that are defined in the key reference are presented as possible targets. The *Content Completion Assistant* will only propose targets that are valid in the current context.

Element and Attribute Values

For documents that use an XML Schema or Relax NG schema, the *Content Completion Assistant* offers proposals for attribute and element values as long as the allowed values are defined in the schema. Also, if a default value or fixed value is defined in the schema, then that value is offered in the *Content Completion Assistant*.

Related Information:

Set Schema to be Used for Content Completion in Text Mode

The list of proposals in the *Content Completion Assistant* depend on the associated schemas. The DTD, XML Schema, Relax NG, or NVDL schema used to populate the *Content Completion Assistant* is specified in the following methods, in the order of their precedence:

- The [schema specified explicitly in the document](#). In this case, Oxygen XML Developer reads the beginning of the document and resolves the location of the DTD, XML Schema, Relax NG schema, or NVDL schema.
- The [default schema declared](#) in the [Document Type configuration dialog box](#) that matches the edited document type.
- For XSLT stylesheets, the schema specified in the Oxygen XML Developer [XSL preferences page](#). Oxygen XML Developer will read the content completion settings when the prolog fails to provide or resolve the location of a DTD, XML Schema, Relax NG, or NVDL schema.
- For XML Schemas, the schema specified in the Oxygen XML Developer [XSD preferences page](#). Oxygen XML Developer will read the content completion settings and the specified schema will enhance the content completion inside the *xs:annotation/xs:appinfo* elements of the XML Schema.

Oxygen XML Developer creates the content completion lists by analysing the detected schema and the current context (the position in the editor). If you change the schema, then the list of tags to be inserted is also updated.

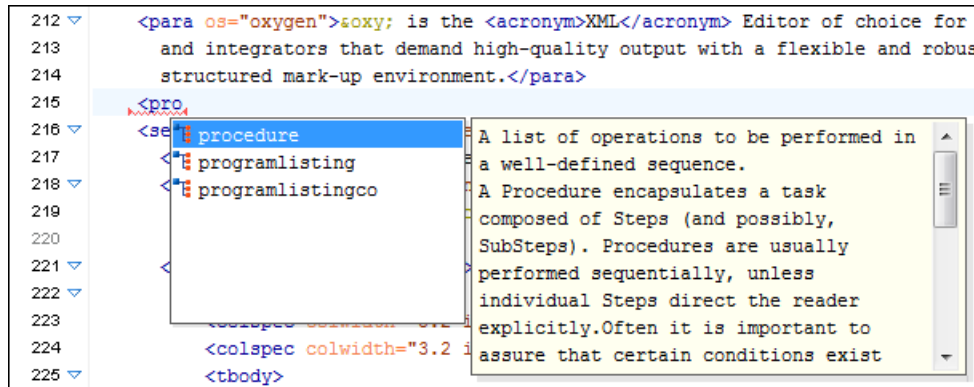


Figure 55: Example: Content Completion Driven by DocBook DTD

Schema Annotations in Text Mode

A schema annotation is a documentation snippet associated with the definition of an element or attribute in a schema. If such a schema is associated with an XML document, the annotations are displayed in:

- The [Content Completion Assistant](#).
- A small tooltip window shown when the mouse hovers over an element or attribute. The tooltip window can be invoked at any time by using the **F2** shortcut.

The schema annotations support is available if the schema type is one of the following:

- XML Schema
- Relax NG
- NVDL schema
- DTD

This feature is enabled by default, but you can disable it by deselecting the [Show annotations in Content Completion Assistant](#) option in the **Annotations** preferences page.

Styling Annotations with HTML

You can use HTML format in the annotations you add in an XML Schema or Relax NG schema. This improves the visual appearance and readability of the documentation window displayed when editing XML documents validated against such a schema. An annotation is recognized and displayed as HTML if it contains at least one HTML element (such as `div`, `body`, `p`, `br`, `table`, `ul`, or `ol`).

The HTML rendering is controlled by the [Show annotations using HTML format, if possible](#) option in the **Annotations** preferences page. When this option is deselected, the annotations are converted and displayed as plain text and if the annotation contains one or more HTML tags (`p`, `br`, `ul`, `li`), they are rendered as an HTML document loaded in a web browser. For example, `p` begins a new paragraph, `br` breaks the current line, `ul` encloses a list of items, and `li` encloses an item of the list.

Collecting Annotations from XML Schemas

In an XML Schema, the annotations are specified in an `<xs:annotation>` element like this:

```
<xs:annotation>
  <xs:documentation>
    Description of the element.
  </xs:documentation>
</xs:annotation>
```

If an element or attribute does not have a specific annotation, then Oxygen XML Developer looks for an annotation in the type definition of that element or attribute.

Collecting Annotations from Relax NG Schemas

For Relax NG schema, element and attribute annotations are made using the `<documentation>` element from the `http://relaxng.org/ns/compatibility/annotations/1.0` namespace like this:

```
<define name="person" >
  <element name="person">
    <a:documentation xmlns:a="http://relaxng.org/ns/compatibility/annotations/1.0">
      Information about a person. </a:documentation>
    <ref name="name" />
    <zeroOrMore>
    <ref name="email" />
    </zeroOrMore>
  </element>
</define>
```

However, any element outside the Relax NG namespace (`http://relaxng.org/ns/structure/1.0`) is handled as annotation and the text content is displayed in the annotation window. To activate this behavior, select the [Use all Relax NG annotations as documentation](#) option in the **Annotations** preferences page.

Collecting Annotations from Relax NG Compact Syntax Schemas

For Relax NG Compact Syntax schema, annotations are made using comments like this:

```
## Information about a person.
element person { name, email*}
```

Collecting Annotation from DTDs

For DTD, Oxygen XML Developer defines a custom mechanism for annotations using comments enabled by the [Prefer DTD comments that start with "doc:" as annotations](#) option in the **Annotations** preferences page. The following is an example of a DTD annotation:

```
<!--doc:Description of the element. -->
```

Content Completion Helper Views

Information about the current element being edited is also available in various *dockable* views, such as the [Model view](#), [Attributes view](#), [Elements view](#), and [Entities view](#). By default, they are located on the right-hand side of the main editor window. These views, along with the powerful [Outline view](#), provide spatial and insight information about the edited document and the current element. If any particular view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Model View

The **Model** view presents the structure of the currently selected tag, and its documentation, defined as annotation in the schema of the current document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

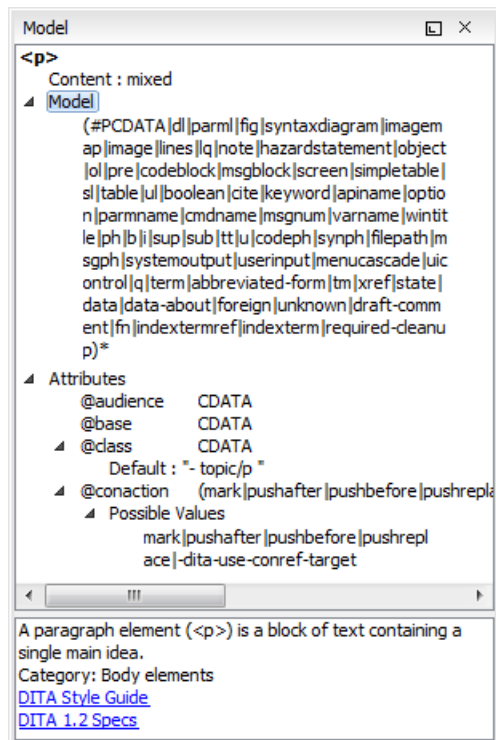


Figure 56: Model View

The **Model** view is comprised of two sections, an element structure panel and an annotations panel.

Element Structure Panel

The element structure panel displays the structure of the currently edited or selected tag in a tree-like format. The information includes the name, model, and attributes of the current tag. The allowed attributes are shown along with imposed restrictions, if any.

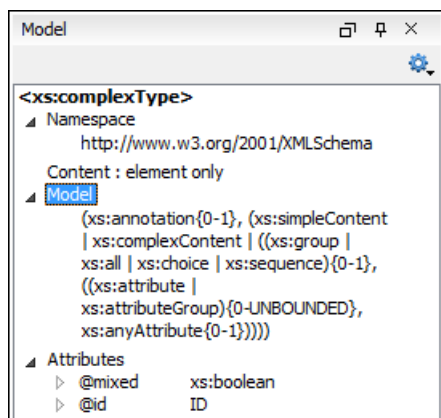


Figure 57: Element Structure Panel

Annotation Panel

The **Annotation** panel displays the annotation information for the currently selected element. This information is collected from the XML schema.

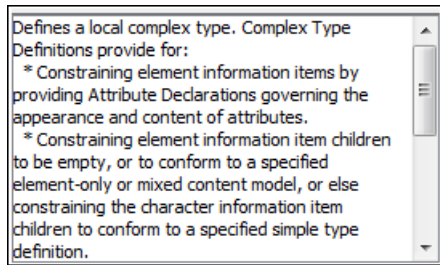


Figure 58: Annotation panel

Attributes View in Text Mode

The **Attributes** view presents all the attributes of the current element determined by the schema of the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened from the **Window > Show View** menu.

You can use the **Attributes** view to insert attributes, edit their values, or add values to existing attributes.

The attributes are rendered differently depending on their state:

- The names of the attributes are rendered with a bold font, and their values with a plain font.
- Default values are rendered with a plain font, painted gray.
- Empty values display the text "[empty]", painted gray.
- Invalid attributes and values are painted red.

To edit the value of the corresponding attribute, double-click a cell in the **Value** column. If the possible values of the attribute are specified as `list` in the schema of the edited document, the **Value** column acts as a combo box that allows you to either select the value from a list or manually enter it.

You can sort the attributes table by clicking the **Attribute** column header. The table contents can be sorted as follows:

- By attribute name in ascending order.
- By attribute name in descending order.
- Custom order, where the used attributes are displayed at the beginning of the table sorted in ascending order, followed by the rest of the allowed elements sorted in ascending order.

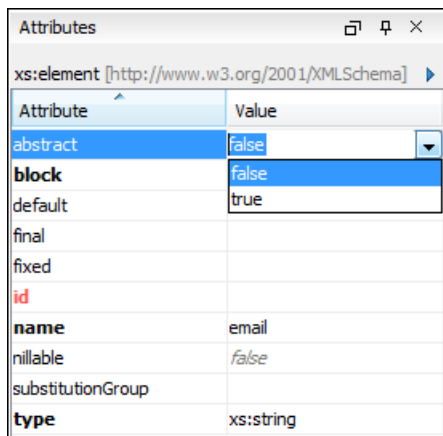


Figure 59: Attributes View

Expand/Collapse Button

There is an **Expand/Collapse** () button at the top-right of the view. When expanded, this presents the following additional combo boxes:

Name Combo Box

Use this combo box to select an attribute. The drop-down list displays the list of possible attributes allowed by the schema of the document, as in the **Attributes** view. You can use the  **Remove** button to delete an attribute and its value from the selected element.

Value Combo Box

Use this combo box to add, edit, or select the value of an attribute. If the selected attribute has predefined values in the schema, the drop-down list displays those possible values. You can use the  **Browse** button to select a URL for the value of an attribute. You can also press **Ctrl + Space** to open a content completion window that offers a list of possible choices and allows you to select multiple values. After you have entered or selected a value, use the  **Update** button (or press **Enter**) to add the value to the attribute.

Contextual Menu Actions in the Attributes View

The following actions are available in the contextual menu of the **Attributes** view when editing in **Text** mode:

Add

Allows you to insert a new attribute.

Set empty value

Specifies the current attribute value as empty.

Remove

Removes the attribute (action available only if the attribute is specified). You can invoke this action by pressing the **(Delete)** or **(Backspace)** keys.

Copy

Copies the `attrName="attrValue"` pair to the clipboard. The `attrValue` can be:

- The value of the attribute.
- The value of the default attribute, if the attribute does not appear in the edited document.
- Empty, if the attribute does not appear in the edited document and has no default value set.

Paste

Depending on the content of the clipboard, the following cases are possible:

- If the clipboard contains an attribute and its value, both of them are introduced in the **Attributes** view. The attribute is selected and its value is changed if they exist in the **Attributes** view.
- If the clipboard contains an attribute name with an empty value, the attribute is introduced in the **Attributes** view and you can start editing it. The attribute is selected and you can start editing it if it exists in the **Attributes** view.
- If the clipboard only contains text, the value of the selected attribute is modified.

Elements View in Text Mode

The **Elements** view presents a list of all defined elements that are valid at the current cursor position according to the schema associated to the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking any of the listed elements inserts that element into the edited document, at the current cursor position. Pressing **F2** with an element selected will display information about that particular element.



Figure 60: Elements View in Text Mode

Entities View

Entities provide abbreviated entries that can be used in XML files when there is a need of repeatedly inserting certain characters or large blocks of information. An *entity* is defined using the ENTITY statement either in the DOCTYPE declaration or in a DTD file associated with the current XML file.

There are three types of entities:

- **Built-in or Predefined** - Entities that are part of the predefined XML markup (&lt ;, &gt ;, &amp ;, &apos ;, &quot ;).
- **Internal** - Defined in the DOCTYPE declaration header of the current XML.
- **External** - Defined in an external DTD module included in the DTD referenced in the XML DOCTYPE declaration.

Note: If you want to add internal entities, you would need to switch to the Text editing mode and manually modify the DOCTYPE declaration. If you want to add external entities, you need to open the DTD module file and modify it directly.

The **Entities** view displays a list with all entities declared in the current document, as well as built-in ones. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking one of the entities will insert it at the current cursor position in the XML document. You can also sort entities by name and value by clicking the column headers.

Name	Value
lt	<
gt	>
amp	&
apos	'
quot	"
abbrev-d-att	(topic abbrev-d)
concept-att	(topic concept)
hazard-d-att	(topic hazard-d)
hi-d-att	(topic hi-d)
included-domains	&concept-att; ...
indexing-d-att	(topic indexing-d)
nbsp	
pr-d-att	(topic pr-d)
sw-d-att	(topic sw-d)
ui-d-att	(topic ui-d)
ut-d-att	(topic ut-d)

Figure 61: Entities View

The view features a filtering capability that allows you to search an entity by name, value, or both. Also, you can choose to display the internal or external entities.

Note: When entering filters, you can use the ? and * wildcards. Also, you can enter multiple filters by separating them with a comma.

Code Templates

Code templates are code fragments that can be inserted quickly at the current editing position. Oxygen XML Developer includes a set of built-in code templates for CSS, Schematron, XSL, XQuery, and XML Schema document types. You can also [define your own code templates for any type of file and share them with others](#).

To get a complete list of available code templates, press **Ctrl + Shift + Space** in **Text** mode. To enter the code template, select it from the list or type its code and press **Enter**. If a shortcut key has been assigned to the code template, you can also use the shortcut key to enter it. Code templates are displayed with a  symbol in the content completion list.

When the [Content Completion Assistant](#) is invoked (**Ctrl + Space (Command + Space on OS X)** in **Text** mode or **Enter** in **Author** mode), it also presents a list of code templates specific to the type of the active editor.

For more information about code templates, watch our video demonstration:

<https://www.youtube.com/embed/eNOMCJSzlu8>

Text Mode Views

There is a variety of [dockable](#) helper views that are displayed by default in **Text** mode. There are also a large selection of additional views available in the **Window > Show View** menu. This section presents some of the most helpful views for editing in **Text** mode.

Project View

The **Project** view is designed to assist you with organizing and managing related files grouped in the same XML project. The actions available in the contextual menu and on the toolbar associated to this panel allow you to create XML projects and provide shortcuts to various operations for the project documents.

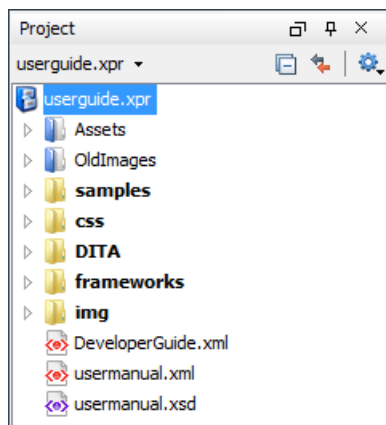


Figure 62: Project View

By default, the view is positioned on the left side of the Oxygen XML Developer window, above the [Outline view](#). If the view has been closed, it can be reopened at any time from the **Window > Show View** menu (or using the **Show Project View** action from the **Project** menu).

The tree structure occupies most of the view area. In the upper left side of the view, there is a drop-down menu that contains all recently used projects and project management actions:

Open Project (Ctrl + F2 (Command + F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

New Project

Creates a new, empty project.

The following actions are grouped in the upper right corner:

Collapse All

Collapses all project tree folders. You can also collapse/expand a project tree folder if you select it and press the **Enter** key or **Left Arrow** to collapse and **Right Arrow** to expand.

Link with Editor

When selected, the project tree highlights the currently edited file, if it is found in the project files.

Note: This button is disabled automatically when you move to the **Debugger perspective**.

Settings

A submenu that contains the following actions:

Filters

Allows you to filter the information displayed in the **Project** view. Click the toolbar button to set filter patterns for the files you want to show or hide. Also, you can set filter patterns for the linked directories that are hidden.

Show Full Path

When selected, linked files and folders are presented with a full file path.

Enable Master Files Support

Select this option to enable the **Master Files support**.

Change Search and Refactor operations scope

Allows you to change the collection of documents that define the context of the **search and refactor operations**.

- **Use only Master Files, if enabled** - Restricts Oxygen XML Developer to perform the search and refactor operations starting from the **master files** that are defined for the current resource. This option is available when you select **Project** in the **Select the scope for Search and Refactor operations** dialog box and the **Master Files** support is enabled.
- **Working sets** - Allows you to specify the set of files that will be used for the scope of the search and refactor operations.

The files are usually organized in an XML project as a collection of folders. There are three types of resources displayed in the **Project** view:

- **Logical folders** - marked with a blue icon on Windows and Unix/Linux () and a magenta icon on Mac OS X (). They help you group files within the project. This folder type has no correspondent on the physical disk, since they are used as containers for related items. Creating and deleting them does not affect the file system on disk. They are created on the project root or inside other logical folders by using the contextual action **New > Logical Folder**. The contextual menu action  **Remove from Project** can be used to remove them from the project.
- **Physical folders and files** - marked with the operating system-specific icon for folders (usually a yellow icon on Windows and a blue icon on Mac OS X). These folders and files are mirrors of real folders or files that exist in the local file system. They are created or added to the project by using contextual menu actions (such as **New > File**, **New > Folder**, **Add Folder**, etc.) Also, the contextual menu action  **Remove from Disk (Shift +Delete)** can be used to remove them from the project and local file system.
- **Shortcut folders and files** - the icons for file shortcuts include a shortcut symbol and names of folder shortcuts are displayed in bold text. All files and folders that appear as direct descendants of a logical folder are considered shortcuts. They are created and added with the contextual actions **Add Files** and **Add Folder** from the project root. Both contextual menu actions  **Remove from Project** and  **Remove from Disk (Shift**

+Delete) are available for shortcuts. **✕ Remove from Project** just removes the shortcut from the project, while **🗑 Remove from Disk (Shift+Delete)** removes the shortcut and the physical resource from the local file system.

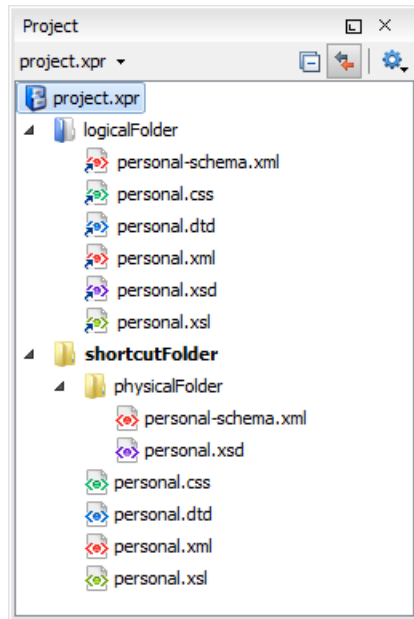


Figure 63: Project View with Examples of all Three Types of Resources

Creating New Projects

The following action is available in the **Project** menu, the **New** menu in the contextual menu, or from the drop-down menu in the top-left of the **Project** view:

New Project

Creates a new, empty project.

Creating New Project Items

The following actions are available by selecting **New** from the contextual menu, when invoked from the **Project** view:

New > File

Opens a **New file dialog box** that helps you create a new file and adds it to the project structure.

New > Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

New > Logical Folder

Available when invoked from the *project root*, this action creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > Logical Folders from Web

Available when invoked from the *project root*, this action replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Managing Physical Folders and Files

You can create physical folders by selecting **New > Folder** from the contextual menu.

When adding files to a project, the default target is the project root. To change a target, select a new folder. Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

Removing Files and Folders

To remove one or more linked files or folders, select them in the project tree and press the **Delete** key, or select the contextual menu action **✕ Remove from Project**. To remove a linked file or folder from both project and local file system, select the contextual menu action **🗑 Remove from Disk (Shift+Delete)**. The **🗑 Remove from Disk (Shift+Delete)** action is also used to remove physical files or folders.



CAUTION: In most cases this action is irreversible, deleting the file permanently. Under particular circumstances (if you are running a Windows installation of Oxygen XML Developer and the *Recycle Bin* is active) the file is moved to *Recycle Bin*.

Moving Files and Folders

You can **move the resources of the project** with drag and drop operations on the files and folders of the tree (the **Enable drag-and-drop in Project view** option must be selected in the [View preferences page](#)).

You can also use the usual **✂ Cut**, **📄 Copy**, and **📄 Paste** actions to move resources in the **Project** view.

Renaming Files and Folders

There are three ways you can **rename an item in the Project view**. Select the item in the **Project** view and do one of the following:

- Invoke the **Rename** action from the contextual menu.
- Press **F2** and type the new name.
- Click the selected item and type the new name.

To finish editing the item name, press **Enter**.

Note: The **Rename** action is also available on *logical* files.

Locating and Opening Files

If a project folder contains a lot of documents, a certain document can be located quickly in the project tree by selecting the folder containing the desired document and typing the first few characters of the document name. The desired document is automatically selected as soon as the typed characters uniquely identify its name in the folder.

The selected document can be opened by pressing the **Enter** key, by double-clicking it, or with one of the **Open** actions from the contextual menu. The files with known document types are opened in the associated editor, while binary files are opened with the associated system application. To open a file with a known document type in an editor other than the default one, use the **Open with** action. Also, dragging and dropping files from the project tree to the editor area results in the files being opened.

Saving the Project

The project file is automatically saved every time the content of the **Project** view is saved or modified by actions such as adding or removing files and drag and drop.

Linked Folders

You can create linked folders (shortcuts) by dragging and dropping folders from a system explorer to the project tree (the **Enable drag-and-drop in Project view** option must be selected in the [Views preferences page](#)), or by selecting **Add Folder** in the contextual menu from the project root.

To create a file inside a linked folder, select the **New > 📄 File** action from the contextual menu. This opens the [New Document wizard](#).

Note: The linked files presented in the **Project** view are marked with a special icon. Linked folders are displayed in bold text.

Logical Folders

The project itself is considered a logical folder. You can add content to a logical folder using one of the actions available in the contextual menu, when invoked from the *project root*:

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X .

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Validate Files

The currently selected files in the **Project** view can be checked to be XML well-formed or validated against a schema (DTD, XML Schema, Relax NG, Schematron or NVDL) with one of the following contextual menu actions found in the **Validate** submenu:

Check Well-Formedness

Checks if the selected file or files are well-formed.

Validate

Validates the selected file or files against their associated schema. EPUB files make an exception, because this action triggers a **Validate and Check for Completeness** operation.

Validate with Schema

Validates the selected file or files against a specified schema.

Configure Validation Scenario(s)

Allows you to configure and run a [validation scenario](#).

Applying Transformation Scenarios

The currently selected files in the **Project** view can be transformed in one step with one of the following actions available from contextual menu in the **Transform** submenu:

Apply Transformation Scenario(s)

Obtains the output with one of the [built-in scenarios](#).

Configure Transformation Scenario(s)

Opens a [dialog box](#) that allows you to configure pre-defined transformation scenarios.

Transform with

Allows you to select a transformation scenario to be applied to the currently selected files.

Along with the logical folder support, this allows you to group your files and transform them very easily.

Refactoring Actions (Available for certain document types (such as XML, XSD, and XSL))

Oxygen XML Developer includes some refactoring operations that help you manage the structure of your documents. The following actions are available from the contextual menu in the **Refactoring** submenu:

Rename resource

Allows you to change the name of a resource.

Move resource

Allows you to change the location on disk of a resource.

XML Refactoring

Opens the [XML Refactoring tool wizard](#) that presents refactoring operations to assist you with managing the structure of your XML documents.

Other XML Refactoring Actions

For your convenience, the last 5 [XML Refactoring tool operations](#) that were finished or previewed will also appear in this submenu.

Other Contextual Menu Actions

Other actions that are available in the contextual menu from the project tree include:

Open

Opens the selected files in the corresponding editor.

Open with submenu

This submenu allows you to open the selected file with the internal editor, a system application, or other internal tools: [Archive Browser](#), [Generate/Convert Schema](#), [WSDL/SOAP Analyzer](#), [Large File Viewer](#), [Hex Viewer](#), [SVG Viewer](#).

Show in Explorer (or Show in Finder on OS X)

In Windows, the content of the selected folder or file is presented in a specific explorer window. On MAC OS X, the parent folder is opened and the selected folder is highlighted in a specific finder window.

Copy Location

Copies an application-specific URL for the selected resource to the clipboard.

Refresh

Refreshes the content and the dependencies between the resources in [the Master Files directory](#).

Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files.

XPath in Files

Opens the [XPath/XQuery Builder view](#) that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.

Open/Find Resource

Opens the [Open/Find Resource dialog box](#).

Check Spelling in Files

Allows you to [check the spelling of multiple files](#).

Format and Indent Files

Opens the [Format and Indent Files dialog box](#) that allows you to configure the format and indent ([pretty-print](#)) action that will be applied on the selected documents.

Open in SVN Client

[Syncro SVN Client](#) tool is opened and it highlights the selected resource in its corresponding working copy.

Compare

Allows you to compare multiple files or directories and the order of your selection determines where they are opened in the [Compare Files](#) or [Compare Directories](#) tool. If you select two files or folders, your first selection will be opened in the left panel and the other one in the right panel.

You can also select 3 files and the tool will automatically be opened in the [three-way comparison mode](#). If you select three files, your first selection will be opened in the left panel, the second in the right panel, and the third selection will be the base (ancestor) file.

Generate Documentation > XML Schema Documentation

Opens [the XML Schema Documentation Dialog Box](#).

Generate Documentation > XSLT Stylesheet Documentation

Opens [the XSLT Stylesheet Documentation Dialog Box](#).

Generate Documentation > XQuery Documentation

Opens [the XQuery Documentation Dialog Box](#).

Generate Documentation > WSDL Documentation

Opens [the WSDL Documentation Dialog Box](#).

Properties

Displays the properties of the current file in a **Properties** dialog box.

Menu Level Actions

The following actions are available in the **Project** menu:

New Project

Creates a new, empty project.

Open Project (Ctrl + F2 (Command + F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Save Project As

Allows you to save the current project under a different name.

Validate all project files

Checks if the project files are well-formed and their mark-up conforms with the specified DTD, XML Schema, or Relax NG schema rules. It returns an error list in the message panel.

Filters

Opens the **Project filters** dialog box that allows you to decide which files and directories will be shown or hidden.

Enable Master Files Support

Allows you to enable the [Master Files Support](#) for each project you are working on.

Change Search and Refactor operations scope

Opens a dialog box that allows you to define the context of search and refactor operations.

Show Project View

Displays the **Project** view.

Reopen Project

Contains a list of links of previously used projects. This list can be emptied by invoking the **Clear history** action.

Open/Find Resource View

The **Open/Find Resource** view is designed to offer advanced search capabilities either by using a simple text search or by using the [Apache Lucene - Query Parser Syntax](#). By default, the view is presented in the left side of the Oxygen XML Developer layout, next to the [Project view](#). If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.



Figure 64: Open/Find Resource View

You can use this view to find a file in the current Oxygen XML Developer project by typing only a few letters of the file name of a document or a fragment of the content you are searching for. The **Open/Find Resource** view also supports searching in document edits (comments, tracked change insertions/deletions, and highlighted content) by selecting the **In reviews** option.

Note: Full support for searching in document edits (the **In reviews** option) is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers limited support to search through a maximum of 10 edits.

Search Results

Search results are presented instantly, after you finish typing the content. The matching fragments of text are highlighted in the results list displayed in the dialog box. When you open one of the documents from the results list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document, close the corresponding tab in the **Results view** at the bottom of the editor. To display the search history, position the cursor in the search field and press **Ctrl + DownArrow (Command + DownArrow on OS X)** or **Ctrl + UpArrow (Command + UpArrow on OS X)** on your keyboard. Pressing only the **DownArrow** key moves the selection to the list of results.

Note: Searches are not case sensitive. For example, if you search for car you get the same results as when you search for Car.

Tip: Suffix searches are also supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search for **ing* with the **in content** option selected, you will find documents that contain the word *presenting*. If you search for **/samples/*.gif* with the **in file paths** option selected, you will find all the *gif* images from the *samples* directory.

Options Available in the View

The **Open/Find Resource** view offers the following options:

-  **Settings** - Drop-down menu that includes the following settings for the view:
 - **Clear Index** - Clears the index.

- **Show description** - Presents the search results in a more compact form, displaying only the title and the location of the resources.
- **Options** - Opens the [Open/Find Resource preferences page](#) where you can configure various search options. For example, you can specify a **Content language** that differs from the default UI language in case your document contains multiple languages.
- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, *tracked change* insertions/deletions, or highlights in your resources.
- **Reindex** - Use this option to reindex your resources.

Contextual Menu Actions

A contextual menu is available on each search result and provides actions applicable to that particular document. These actions include:

- **Open** - Opens the document in one of Oxygen XML Developer internal editors.
- **Open with** - Allows you to choose to open the document in the **Internal editor** or an external **System application**.
- **Show in Explorer** - Identifies the document in the system file explorer.
- **Copy Location** - Copies the file path and places it in the clipboard.

Indexing Process

The content of the resources used to search in is parsed from an index. The indexing is performed both automatically and on request. Automatic indexing is performed when you modify, add, or remove resources in the currently indexed project. If the index was never initialized, the index is not updated on project changes.

To improve performance, the indexing process skips the following set of common English words (the so-called **stop words**): *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*. This means that if you are searching for any of these words, the indexing process will not be able to match any of them. However, you can configure the list of **stop words** in the [Open/Find Resource preferences page](#).

Caching Mechanism

When you perform a search, a caching mechanism is used to gather the paths of all files linked in the current project. When the first search is performed, all project files are indexed and added to the cache. The next search operation uses the information extracted from the cache, thus improving the processing time. The cache is kept for the currently loaded project only, so when you perform a search in a new project, the cache is rewritten. Also, the cache is reset when you press the **Reindex** button.

Important: Files larger than 2GB are not indexed.

If there is no file found that matches your file pattern or text search, a possible cause is that the file you are searching for was added to the Oxygen XML Developer project after the last caching operation. In this case, re-indexing the project files with the **Reindex** button enables the file to be found. The date and time of the last index operation are displayed below the file list.

Opening the Results

Once you find the files that you want to open, select them in the list and press the **Open** button (or double-click them). Each of the selected files is opened in [the editor associated with the type of the file](#).

Note: You can drag a resource from the **Open/Find Resource** view and drop it in a DocBook, DITA, TEI or XHTML document to create a link to that resource.

For more information about the **Open/Find Resource** feature and its search capabilities, watch our video demonstration:

<https://www.youtube.com/embed/PENoDNdaGao>

Related Information:

[Open/Find Resource Dialog Box](#) on page 308

Outline View in Text Mode

The **Outline** view in **Text** mode displays a general tag overview of the currently edited XML Document. When you edit a document, the **Outline** view dynamically follows the changes that you make, displaying the node that you modify. This functionality gives you great insight on the location of your modifications in the current document. It also shows the correct hierarchical dependencies between elements. This makes it easy for you to be aware of the document structure and the way element tags are nested.

Outline View Features

The **Outline** view allows you to:

- Quickly navigate through the document by selecting nodes in the **Outline** tree.
- Insert or delete nodes using contextual menu actions.
- Move elements by dragging them to a new position in the tree structure.
- Highlight elements in the editor area. It is synchronized with the editor area, so when you make a selection in the editor area, the corresponding nodes are highlighted in the **Outline** view, and vice versa.
- View document errors, as they are highlighted in the **Outline** view. A tooltip also provides more information about the nature of the error when you hover over the faulted element.

Outline View Interface

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

It also includes a  **Settings** menu in the top-right corner that presents a variety of options to help you filter the view even further.

Drop and Drop Actions in the Outline View

Entire XML elements can be moved or copied in the edited document using only the mouse in the **Outline** view with drag-and-drop operations. Several drag and drop actions are possible:

- If you drag an XML element in the **Outline** view and drop it on another node, then the dragged element will be moved after the drop target element.
- If you hold the mouse pointer over the drop target for a short time before the drop then the drop target element will be expanded first and the dragged element will be moved inside the drop target element after its opening tag.
- You can also drop an element before or after another element if you hold the mouse pointer towards the upper or lower part of the targeted element. A marker will indicate whether the drop will be performed before or after the target element.
- If you hold down the **(Ctrl (Command on OS X))** key after dragging, a copy operation will be performed instead of a move.

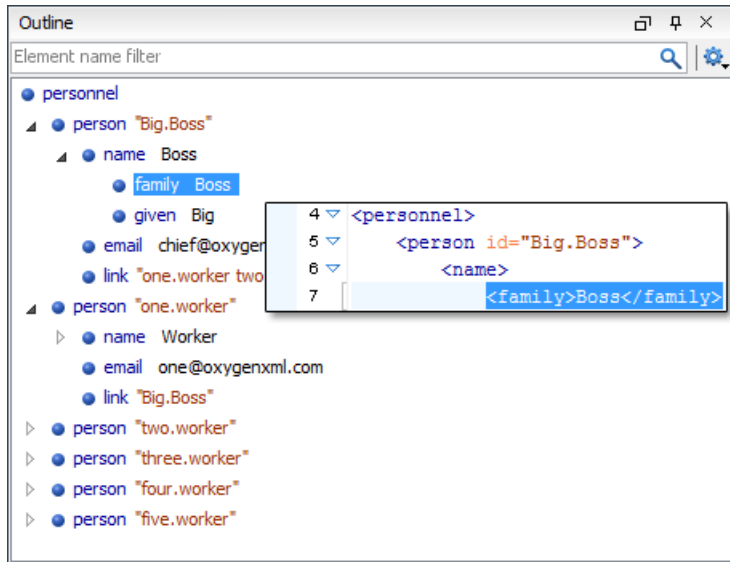


Figure 65: Outline View in Text Mode

Outline View Filters in Text Mode

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

The following actions are available in the **Settings** menu of the **Outline** view when editing in **Text** mode:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.

Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

Outline View Contextual Menu Actions in Text Mode

The following actions are available from the contextual menu in the **Outline** view in **Text** mode:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

Attributes View in Text Mode

The **Attributes** view presents all the attributes of the current element determined by the schema of the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened from the **Window > Show View** menu.

You can use the **Attributes** view to insert attributes, edit their values, or add values to existing attributes.

The attributes are rendered differently depending on their state:

- The names of the attributes are rendered with a bold font, and their values with a plain font.
- Default values are rendered with a plain font, painted gray.
- Empty values display the text "[empty]", painted gray.
- Invalid attributes and values are painted red.

To edit the value of the corresponding attribute, double-click a cell in the **Value** column. If the possible values of the attribute are specified as `list` in the schema of the edited document, the **Value** column acts as a combo box that allows you to either select the value from a list or manually enter it.

You can sort the attributes table by clicking the **Attribute** column header. The table contents can be sorted as follows:

- By attribute name in ascending order.
- By attribute name in descending order.
- Custom order, where the used attributes are displayed at the beginning of the table sorted in ascending order, followed by the rest of the allowed elements sorted in ascending order.

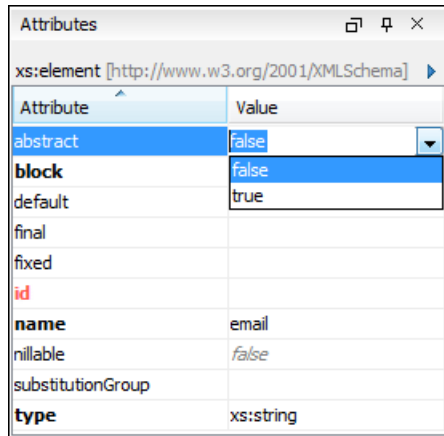


Figure 66: Attributes View

Expand/Collapse Button

There is an **Expand/Collapse** () button at the top-right of the view. When expanded, this presents the following additional combo boxes:

Name Combo Box

Use this combo box to select an attribute. The drop-down list displays the list of possible attributes allowed by the schema of the document, as in the **Attributes** view. You can use the  **Remove** button to delete an attribute and its value from the selected element.

Value Combo Box

Use this combo box to add, edit, or select the value of an attribute. If the selected attribute has predefined values in the schema, the drop-down list displays those possible values. You can use the  **Browse** button to select a URL for the value of an attribute. You can also press **Ctrl + Space** to open a content completion window that offers a list of possible choices and allows you to select multiple values. After you have entered or selected a value, use the  **Update** button (or press **Enter**) to add the value to the attribute.

Contextual Menu Actions in the Attributes View

The following actions are available in the contextual menu of the **Attributes** view when editing in **Text** mode:

Add

Allows you to insert a new attribute.

Set empty value

Specifies the current attribute value as empty.

Remove

Removes the attribute (action available only if the attribute is specified). You can invoke this action by pressing the **(Delete)** or **(Backspace)** keys.

Copy

Copies the `attrName="attrValue"` pair to the clipboard. The `attrValue` can be:

- The value of the attribute.
- The value of the default attribute, if the attribute does not appear in the edited document.
- Empty, if the attribute does not appear in the edited document and has no default value set.

Paste

Depending on the content of the clipboard, the following cases are possible:

- If the clipboard contains an attribute and its value, both of them are introduced in the **Attributes** view. The attribute is selected and its value is changed if they exist in the **Attributes** view.

Annotation Panel

The **Annotation** panel displays the annotation information for the currently selected element. This information is collected from the XML schema.

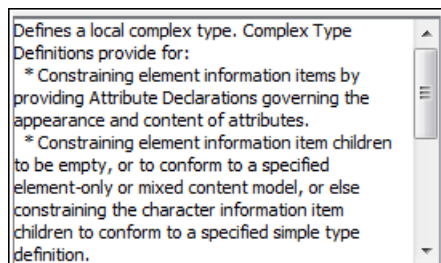


Figure 69: Annotation panel

Elements View in Text Mode

The **Elements** view presents a list of all defined elements that are valid at the current cursor position according to the schema associated to the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking any of the listed elements inserts that element into the edited document, at the current cursor position. Pressing **F2** with an element selected will display information about that particular element.



Figure 70: Elements View in Text Mode

Entities View

Entities provide abbreviated entries that can be used in XML files when there is a need of repeatedly inserting certain characters or large blocks of information. An *entity* is defined using the ENTITY statement either in the DOCTYPE declaration or in a DTD file associated with the current XML file.


There are three types of entities:

- **Built-in or Predefined** - Entities that are part of the predefined XML markup (&lt ; , &gt ; , &amp ; , &apos ; , &quot ; ;).
- **Internal** - Defined in the DOCTYPE declaration header of the current XML.
- **External** - Defined in an external DTD module included in the DTD referenced in the XML DOCTYPE declaration.

Note: If you want to add internal entities, you would need to switch to the Text editing mode and manually modify the DOCTYPE declaration. If you want to add external entities, you need to open the DTD module file and modify it directly.

The **Entities** view displays a list with all entities declared in the current document, as well as built-in ones. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking one of the entities will insert it at the current cursor position in the XML document. You can also sort entities by name and value by clicking the column headers.

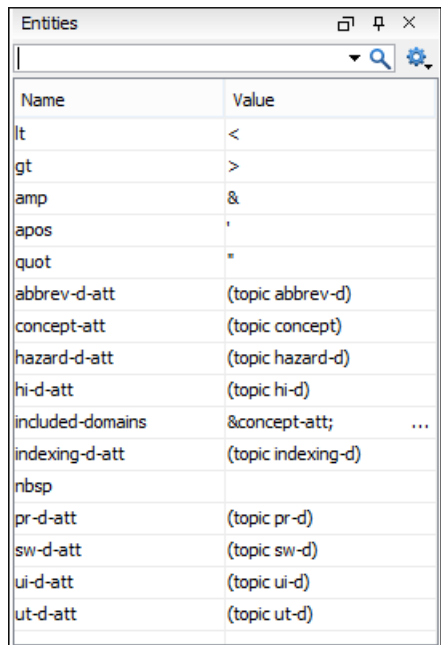

Name	Value
lt	<
gt	>
amp	&
apos	'
quot	"
abbrev-d-att	(topic abbrev-d)
concept-att	(topic concept)
hazard-d-att	(topic hazard-d)
hi-d-att	(topic hi-d)
included-domains	&concept-att; ...
indexing-d-att	(topic indexing-d)
nbsp	
pr-d-att	(topic pr-d)
sw-d-att	(topic sw-d)
ui-d-att	(topic ui-d)
ut-d-att	(topic ut-d)

Figure 71: Entities View

The view features a filtering capability that allows you to search an entity by name, value, or both. Also, you can choose to display the internal or external entities.

Note: When entering filters, you can use the ? and * wildcards. Also, you can enter multiple filters by separating them with a comma.

Results View

The **Results** view displays the messages generated as a result of user actions such as validations, transformations, search operations, and others. Each message is a link to the location related to the event that triggered the message. Double-clicking a message opens the file containing the location and positions the cursor at the location offset. The **Results** view is automatically opened when certain actions generate result messages.

Tip: To shift focus to the opened **Results** view without using the mouse, there is an action in the **Window > Results** menu called **Focus Results** that can be used for this purpose and you can [assign a keyboard shortcut](#) to this action.

The actions that contribute messages to this view include:

- [Validation](#) actions
- [Transformation](#) actions
- [Check Spelling in Files](#) action
- **Find All** action from the [Find/Replace](#) dialog box
- [Find/Replace in Files](#) dialog box
- [Search References](#) action
- XPath expression results
- SQL results

Description - 12 items	Resource	Location
- D:\Projects\UserGuide\DITA\topics\batch-transformation.dita (2 items) - href="results-view.dita#results-view" format="dita">Results View</xref>. All entries in the Results View point to the location of the code that triggered them. </p>	batch-transformation.dita	29:61
- D:\Projects\UserGuide\DITA\topics\editor-perspective.dita (1 item) <uicontrol>Results view</uicontrol> - Displays result messages obtained by performing user	editor-perspective.dita	52:22
- D:\Projects\UserGuide\DITA\topics\oxygen-xpath-view.dita (1 item) <title>The XPath Results View</title>	oxygen-xpath-view.dita	12:30

Figure 72: Results View

Results View Toolbar Actions

The view includes a toolbar with the following actions:

Grouping options drop-down menu

A set of **Group by** toggle actions that allow you to group the messages according to a selected criteria so that they can be presented in a hierarchical layout. The criteria used for grouping can be the severity of the errors (error, warning, info message, etc.), the resource name, the description of the message, and so on.

This drop-down menu also includes the following additional grouping actions:

Ungroup all

Removes the grouping rules so that the messages are presented in a continuous list.

Show group columns

If any of the **Group by** options are selected, you can use this option to show or hide grouping columns.

Restore Defaults

Restores the column size for each column and the grouping rules that were saved in the user preferences the last time when this view was used. If it is the first time this view is used, the action sets an initial default column size for each column and a grouping rule that is appropriate for the type of messages. For example:

- Group the messages by the path of the validated file if there are error messages from a validation action or spelling errors reported by the [Check Spelling in Files action](#).
- No grouping rule for the results of [applying an XPath expression](#).

Highlight all results in editor

Oxygen XML Developer highlights all matches obtained after executing an XPath expression, or performing one of the following operations: **Find All**, **Find in Files**, **Search References**, and **Search Declarations**. Click **Highlight all results in editor** again to turn off highlighting.

Note: To customize highlighting behavior, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Highlights category**. You can do the following customizations:

- Set a specific color of the highlights depending on the type of action you make.
- Set a maximum number of highlights that the application displays at any given time.

Remove selected

Removes the current selection from the view. This can be helpful if you want to reduce the number of messages or remove those that have already been addressed or not relevant to your task.

Remove all

Removes all messages from the view.

Results View Contextual Menu Actions

The following actions are available when the contextual menu is invoked in this view:

Show message

Displays a dialog box with the full error message, which is useful for a long message that does not have enough room to be displayed completely in the view.

↑ Previous message

Navigates to the message above the current selection.

↓ Next message

Navigates to the message below the current selection.

✕ Remove selected

Removes selected messages from the view.

* Remove all

Removes all messages from the view.



Copy

Copies information associated with the selected messages. For example:

- The file path of the document that triggered the output message.
- The path of the [master file](#) (in the case of a [validation scenario](#), it is the path of the file from which the validation starts and can be different from the validated file).
- Error severity (error, warning, info message, etc.)
- Name of validating processor.
- Name of [validation scenario](#).
- The line and column in the file that triggered the message.

Copy Description

Copies the description values for all selected items. It is possible to [assign a shortcut key](#) for this action.

Select All

Extends the selection to all the messages from the view.

Print Results

Sends the complete list of messages to a printer. For each message, the included details are the same as the ones for the [Copy action](#). This action is also available in the **Window > Results** menu.

Save Results

Saves the complete list of messages in a file in text format. For each message, the included details are the same as the ones for the [Copy action](#). This action is also available in the **Window > Results** menu.

Save Results as XML

Saves the complete list of messages in a file in XML format. For each message, the included details are the same as the ones for the [Copy action](#).

Save Results as HTML

Saves the complete list of messages in a file in HTML format. For each message, the included details are the same as the ones for the [Copy action](#).

Group by

A set of **Group by** toggle actions that allow you to group the messages according to a selected criteria so that they can be presented in a hierarchical layout. The criteria used for grouping can be the severity of the errors (error, warning, info message, etc.), the resource name, the description of the message, and so on.



Ungroup all

Removes the grouping rules so that the messages are presented in a continuous list.

Show group columns

If any of the **Group by** options are selected, you can use this option to show or hide grouping columns.

Restore Defaults

Restores the column size for each column and the grouping rules that were saved in the user preferences the last time when this view was used. If it is the first time this view is used, the action sets an initial default column size for each column and a grouping rule that is appropriate for the type of messages. For example:

- Group the messages by the path of the validated file if there are error messages from a validation action or spelling errors reported by the [Check Spelling in Files](#) action.
- No grouping rule for the results of [applying an XPath expression](#).

Expand All

Expands all the nodes of the tree, which is useful when the messages are presented in a hierarchical mode.

Collapse All

Collapses all the nodes of the tree, which is useful when the messages are presented in a hierarchical mode.

Making a Persistent Copy of Results

The [Results](#) view displays the results from the following operations:

- [Document validation](#)
- [Checking the form of documents](#)
- [XSLT or FO transformations](#)
- [Finding all occurrences of a string in a file](#)
- [Finding all occurrences of a string in multiple files](#)
- [Applying an XPath expression to the current document](#)

To make a persistent copy of the [Results](#) view, use one of these actions:

File > Save Results

Displays the **Save Results** dialog box, used to save the result list of the current message tab. The action is also available on the right-click menu of the **Results** panel.

File > Print Results

Displays the **Page Setup** dialog box used to define the page size and orientation properties for printing the result list of the current **Results** panel. The action is also available on the right-click menu of the **Results** panel.

Save Results as XML from the contextual menu

Saves the content of the **Results** panel in an XML file with the format:

```
<Report>
  <Incident>
    <engine>The engine who provide the error.</engine>
    <severity>The severity level</severity>
    <Description>Description of output message.</Description>
    <SystemID>The location of the file linked to the message.</SystemID>
    <Location>
      <start>
        <line>Start line number in file.</line>
        <column>Start column number in file</column>
      </start>
      <end>
        <line>End line number in file.</line>
        <column>End column number in file</column>
      </end>
    </Location>
  </Incident>
</Report>
```

Related Information:

[Results View](#) on page 203

Syntax Highlighting in XML Documents

Oxygen XML Developer supports syntax highlighting in XML documents to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for XML files, follow these steps:

1. Open the [Preferences](#) dialog box ([Options > Preferences](#)).
2. Go to [Editor > Syntax Highlight](#).
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

Syntax Highlight Depending on Namespace Prefix

The [syntax highlight scheme of an XML file type](#) allows the configuration of a color per each type of token that can appear in an XML file. Distinguishing between the XML tag tokens based on the namespace prefix brings additional visual help in editing some XML file types. For example, in XSLT stylesheets, elements from various namespaces (such as XSLT, XHTML, XSL:FO, or XForms) are inserted in the same document and the editor panel can become cluttered. [Marking tags with different colors based on the namespace prefix](#) allows easier identification of the tags.

```
3 <xsl:template match="name">
4   <fo:list-item>
5     <fo:list-item-label end-indent="label-end()">
6       <fo:block text-align="end" font-weight="bold">Full Name</fo:block>
7     </fo:list-item-label>
8     <fo:list-item-body start-indent="body-start()">
9       <xsl:apply-templates select="*" />
10    </fo:list-item-body>
11  </fo:list-item>
12</xsl:template>
```

Figure 73: Example of Coloring XML Tags by Prefix

Related Information:

[Changing the colors displayed in the Text Mode Editor](#) on page 86

Presenting Validation Errors in Text Mode

Oxygen XML Developer can be configured to [automatically validate documents](#) while editing in the **Text** mode, and actions are also available to [manually validate documents](#) on-request.

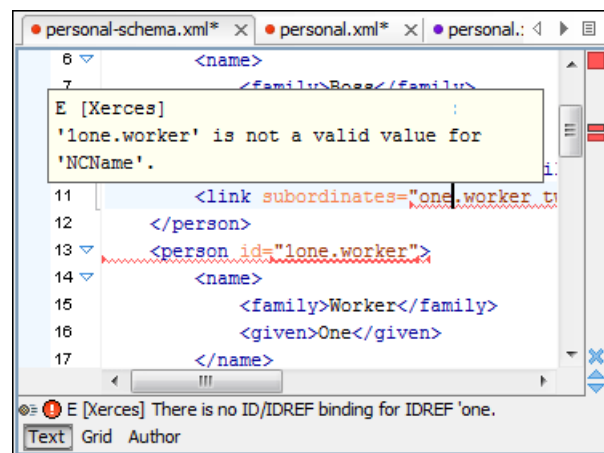


Figure 74: Presenting Validation Errors in Text Mode

Validation Marker Locations

In **Text** mode, validation issues are marked in the following locations:

- In the main editing pane, with the issue underlined in a color according to the type of issue.
- In the right-side vertical stripe, with a marker that is colored according to the type of issue.

- For attributes with detected issues, in the [Attributes view](#), with the attribute and its value colored according to the type of issue.

Validation Marker Colors

The colors for each type of issue are as follows:

- **Validation Errors** [Red] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in red.
- **Validation Warnings** [Yellow] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in yellow.
- **Validation Info** [Blue] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in blue.

You can configure the color for each type in the [Document Checking preferences page](#).

Validation Markers in the Right-Side Stripe

Also, the stripe on the right side of the editor panel is designed to display the issues found during the validation process and to help you locate them in the document. The stripe contains the following:

Upper Part of the Stripe

A success indicator square will turn green if the validation is successful or only info messages are found, red if validation errors are found, or yellow if only validation warnings are found. More details about the issues are displayed in a tool tip when you hover over indicator square. If there are numerous problems, only the first three are presented in the tool tip.

Middle Part of the Stripe

Errors are depicted with red markers, warnings with yellow markers, and info message with blue markers. If you want to limit the number of markers that are displayed, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document checking**, and specify the desired limit in the [Maximum number of validation highlights](#) option.

Clicking a marker will highlight the corresponding text area in the editor. The validation message is also displayed both in a tool tip (when hovering over the marker) and in the message area on the bottom of the editor panel (clicking the  **Document checking options** button opens the [Document Checking preferences page](#)).

Bottom Part of the Stripe

Two navigation arrows () allow you to jump to the next or previous issue. The same actions can be triggered from **Document > Automatic validation > Next error** (**Ctrl + Period** (**Command + Period on OS X**)) and **Document > Automatic validation > Previous error** (**Ctrl + Comma** (**Command + Comma on OS X**)). Also, the  **Remove All** button can be used to clear all the validation markers.

Hovering Over Validation Issues

Hovering over a validation issue presents a tooltip message with more details about the problem and [possible quick fixes](#) (if available for that issue). Also, when hovering over an issue, pressing **F2** will change the focus to the tooltip where you can use **Tab** and **Shift + Tab** to navigate between quick fixes and **Space** to trigger them.

Details About Validation Issues

- Information about the issue is also displayed in the message area on the bottom of the editor panel (clicking the  **Document checking options** button opens the [Document Checking preferences page](#) where you can configure some validation options (such as the colors used to present the validation issues).
- Status messages from every validation action are also logged in the [Information view](#).
- If you want to see all the validation messages grouped in the [Results panel](#), you should use the  **Validate** action from the toolbar or **Document > Validate** menu..

Related Information:

[Validating XML Documents Against a Schema](#) on page 403
[Presenting Schematron Validation Issues](#)

Special Character Support in Text Mode

If bidirectional text, such as Arabic or Hebrew languages, certain Asian languages (such as Devanagari, Bengali, Gurmukhi, Gujarati, Oriya, Tamil, Telugu, Kannada, Malayalam, Sinhala, Thai, Khmer), or other special characters (such as combining characters) are detected in a document, Oxygen XML Developer displays a **Special Characters Detected** dialog box that prompts you to **Enable** or **Disable** support for these special characters (you can also enable or disable the support for special characters in the [Open/Save preferences page](#)).

Enabled

If you choose to enable support for special characters and as long as you [chose a font](#) that supports the particular special characters, this means that the *glyphs* will be rendered properly in **Text** mode and the cursor navigation mechanism will recognize them as they are shown.

Example: The Â glyph could be inserted using a consecutive combination of two characters (**U+00C2** followed by **U+0323**). With the special characters support enabled and the **SansSerif** font chosen, that glyph will be rendered properly (a capital letter A with a circumflex above it and a dot below) and you can navigate through the glyph in one step (pressing the right/left arrow key once).

Restriction: When support for special characters is enabled, the [folding support](#) is not available.

Disabled

If you choose to disable support for special characters, it may affect text rendering, cursor navigation, and text management operations. However, this is helpful if you need to open [very large documents](#) since disabling the bidirectional editing support can enhance performance.

Example: The Â glyph could be inserted using a consecutive combination of two characters (**U+00C2** followed by **U+0323**). With the special characters support disabled, that glyph may or may not be rendered properly and when navigating through the glyph, it would take two steps (pressing the right/left arrow key twice).

Restriction: Bidirectional content in the **Text** mode cannot be rendered using **Bold** or **Italic**.

Related Information:

[Special Character Support in Grid Mode](#) on page 226

[Inserting Special Characters](#) on page 327

Inserting or Opening a File at Cursor Location

When editing content in **Text** mode, the following actions (in regards to inserting, opening, or comparing files) are available in the **Document > File** menu:

Insert File

Inserts the content of the file with the specified file path into the current document, at the current position of the cursor.

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Adjusting the Transparency of XML Markup

Most of the time you want the content of a document displayed on screen with zero transparency. However, if you want to focus your attention only on editing text content inside XML markup, Oxygen XML Developer offers the option of reducing the visibility of the markup by increasing their transparency when displayed in **Text** mode.

To change the level of transparency, use the  **Tags Transparency Selector** drop-down menu that is available from the **Source** toolbar. By default, this drop-down menu is not visible. You can add it to the toolbar by using the [Configure Toolbars](#) action. There are several levels of transparency that can be adjusted to make the content more or less visible:

-  **Normal Contrast** - Resets the transparency level back to normal.
-  **Semi-transparent Text** - Slightly reduces the visibility of text to place greater emphasis on the visibility of the XML markup.
-  **Transparent Text** - Greatly reduces the visibility of text to place even greater emphasis on the visibility of the XML markup.
-  **Semi-transparent Markup** - Slightly reduces the visibility of the XML markup to place greater emphasis on the visibility of the text.
-  **Transparent Markup** - Greatly reduces the visibility of the XML markup to place even greater emphasis on the visibility of the text.

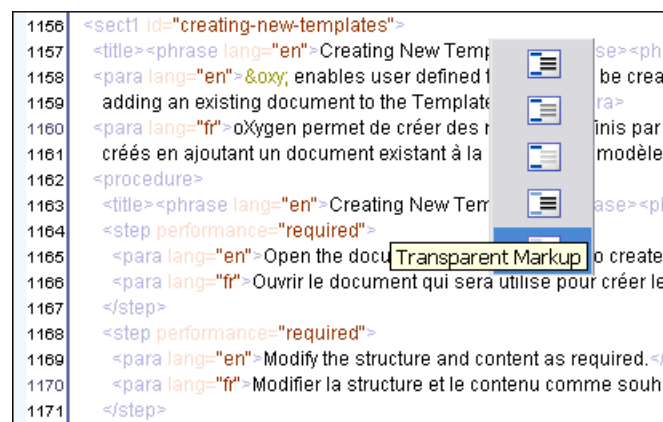


Figure 75: Tags Transparency Selector

Locking and Unlocking XML Markup

For documents with fixed markup, such as forms in which the XML tags are not allowed to be modified (only their text content), the possibility to edit the XML tag names can be toggled on or off with the  **Lock / Unlock the XML tags** action available in **Text** editing mode from the **Source** submenu from the contextual menu (or **Document > Source** menu).

You can set the default lock state for all opened editors using the [Lock the XML tags option in the Text preferences page](#).

Formatting and Indenting XML Documents

Oxygen XML Developer creates XML documents using several [edit modes](#). In **Text mode**, you as the author decide how the XML file is formatted and indented. In the other modes, and when you switch between modes, Oxygen XML Developer must decide how to format and indent the XML. Oxygen XML Developer will also format and indent your XML for you in **Text** mode if you use one of the Format and Indent options:

- **Document > Source >  Format and Indent** - Formats and indents the whole document.
- **Document > Source >  Indent Selection** - Indents the current selection (but does not add line breaks). This action is also available in the **Source** submenu of the contextual menu.
- **Document > Source >  Format and Indent Element** - Formats and indents the current element (the inmost nested element that currently contains the cursor) and its child-elements. This action is also available in the **Source** submenu of the contextual menu.

A number of settings affect how Oxygen XML Developer formats and indents XML. Many of these settings have to do with how whitespace is handled.

Significant and insignificant whitespace in XML

XML documents are text files that describe complex documents. Some of the white space (spaces, tabs, line feeds, etc.) in the XML document belongs to the document it describes (such as the space between words in a paragraph) and some of it belongs to the XML document (such as a line break between two XML elements). Whitespace belonging to the XML file is called *insignificant whitespace*. The meaning of the XML would be the same if the insignificant whitespace were removed. Whitespace belonging to the document being described is called *significant whitespace*.

Knowing when whitespace is significant or insignificant is not always easy. For instance, a paragraph in an XML document might be laid out like this:

```
<p>NO Free man shall be taken or imprisoned, or be stripped of his Freedom,
or Liberties, or free Customs, or be outlawed, or exiled, or any otherwise
destroyed; nor will we not pass upon him, nor condemn him, but by lawful
judgment of his Peers, or by the <xref
href="http://en.wikipedia.org/wiki/Law_of_the_land" format="html"
scope="external">Law of the land</xref>.
We will sell to no man, we will not deny to any man either Justice or Right.</p>
```

By default, XML considers a single whitespace between words to be significant, and all other whitespace to be insignificant. The paragraph above could have been written on one line because the XML parser would see it as exactly the same paragraph since all multiple consecutive whitespaces will be replaced with a single whitespace. Removing the insignificant space in markup like this is called *normalizing space*.

In some cases, all the spaces inside an element should be treated as significant. For example, in a code sample:

```
<codeblock>
class HelloWorld
{
    public static void main(String args[])
    {
        System.out.println("Hello World");
    }
}
</codeblock>
```

Here every whitespace character between the codeblock tags should be treated as significant.

How Oxygen XML Developer determines when whitespace is significant

When Oxygen XML Developer formats and indents an XML document, it introduces or removes insignificant whitespace to produce a layout with reasonable line lengths and elements indented to show their place in the hierarchy of the document. To correctly format and indent the XML source, Oxygen XML Developer needs to know when to treat whitespace as significant and when to treat it as insignificant. However it is not always possible to tell this from the XML source file alone. To determine what whitespace is significant, Oxygen XML Developer assigns each element in the document to one of four categories:

Ignore space

In the ignore space category, all whitespace is considered insignificant. This generally applies to content that consists only of elements nested inside other elements, with no text content.

Normalize space

In the normalize space category, a single whitespace character between character strings is considered significant and all other spaces are considered insignificant. Therefore, all consecutive whitespaces will be replaced with a single space. This generally applies to elements that contain text content only.

Mixed content

In the mixed content category, a single whitespace between text characters is considered significant and all other spaces are considered insignificant. However,

- Whitespace between two child elements embedded in the text is normalized to a single space (rather than to zero spaces as would normally be the case for a text node with only whitespace characters, or the space between elements generally).
- The lack of whitespace between a child element embedded in the text and either adjacent text or another child element is considered significant. That is, no whitespace can be introduced here when formatting and indenting the file.

For example:

```
<p>The file is located in <i>HOME</i>/<i>USER</i>/hello.  
This is a <strong>big</strong>  
<emphasis>deal</emphasis>.  
</p>
```

In this example, whitespace should not be introduced around the `i` tags as it would introduce extra significant whitespace into the document. The space between the end `</strong>` tag and the beginning `<emphasis>` tag should be normalized to a single space, not zero spaces.

Preserve space

In the preserve space category, all whitespace in the element is regarded as significant. No changes are made to the spaces in elements in this category. However, child elements may be in another category, and may be treated differently.

Attribute values are always in the preserve space category. The spaces between attributes in an element tag are always in the default space category.

Oxygen XML Developer consults several pieces of information to assign an element to one of these categories. An element is always assigned to the most restrictive category (from Ignore to Preserve) that it is assigned to by any of the sources Oxygen XML Developer consults. For instance, if the element is named on the **Default elements** list (as described below) but it has an `xml:space="preserve"` attribute in the source file, it will be assigned to the preserve space category. If an element has the `xml:space="default"` attribute in the source, but is listed on the **Mixed content** elements list, it will be assigned to the mixed content category.

To assign elements to these categories, Oxygen XML Developer consults information from the following sources:

xml:space

If the XML element contains the `xml:space` attribute, the element is promoted to the appropriate category based on the value of the attribute.

Schema aware formatting

If a schema is available for the XML document, Oxygen XML Developer can use information from the schema to promote the element to the appropriate category. For example:

- If the schema declares an element to be of type `xs:string`, the element will be promoted to the preserve space category because the string built-in type has the whitespace facet with the value preserve.
- If the schema declares an element to be mixed content, it will be promoted to the mixed content category.

Schema aware formatting can be turned on and off.

- To turn it on or off for the **Text** editing mode, open the **Preferences** dialog box (**Options > Preferences**), go to **Editor > Format > XML**, and select/deselect the **Schema aware format and indent** option.

Preserve space elements list

If an element is listed in the **Preserve space** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the preserve space category.

Default space elements list

If an element is listed in the **Default space** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the default space category.

Mixed content elements list

If an element is listed in the **Mixed content** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the mixed content category.

Element content

If an element contains mixed content, that is, a mix of text and other elements, it is promoted to the mixed content category. (Note that, in accordance with these rules, this happens even if the schema declares the element to have element only content.)

If an element contains text content, it is promoted to the default space category.

Text node content

If a text node contains any non-whitespace characters then the text node is promoted to the normalize space category.

How Oxygen XML Developer formats and indents XML

You can control how Oxygen XML Developer formats and indents XML documents. This can be particularly important if you store your XML document in a version control system, as it allows you to limit the number of trivial changes in spacing between versions of an XML document. The following preference pages include options that control how XML documents are formatted:

- [Format preferences page](#)
- [XML Formatting preferences page](#)
- [Whitespaces preferences page](#)

When Oxygen XML Developer formats and indents XML

Oxygen XML Developer formats and indents a document, or part of it, on the following occasions:

- In **Text** mode when you select one of the format and indent actions (**Document > Source > Format and Indent**, **Document > Source > Indent Selection**, or **Document > Source > Format and Indent Element**).
- When saving documents in **Design** mode.
- When switching from **Design** mode to another mode.
- When saving or switching to **Text** mode from **Grid** mode, if the [Format and indent when passing from grid to text or on save option](#) is selected in the **Grid** preferences page.

Setting an Indent Size to Zero

Oxygen XML Developer will automatically [format and indent](#) documents at certain times. This includes indenting the content from the margin to reflect its structure. In some cases, you may not want your content indented. To avoid your content being indented, you can set an indent size of zero.

Note: Changing the indent size does not override the rules that Oxygen XML Developer uses for handling whitespace when formatting and indenting XML documents. Therefore, changing the indent size will have no effect on elements that require whitespaces to be maintained.

There are two cases to consider.

Maintaining zero indent in documents with zero indent

If you have existing documents with zero indent and you want Oxygen XML Developer to maintain a zero indent when editing or formatting those documents:

1. Open the [Preferences dialog box \(Options > Preferences\)](#) and go to [Editor > Format](#).
2. Select **Detect indent on open**.
3. Select **Use zero-indent if detected**.

Oxygen XML Developer will examine the indent of each document as it is opened and if the indent is zero for all lines, or for nearly all lines, a zero indent will be used when formatting and indenting the document. Otherwise, Oxygen XML Developer will use the indent closest to what it detects in the document.

Enforcing zero indent for all documents

If you want all documents to be formatted with zero indent, regardless of their current indenting:

1. Open the [Preferences dialog box \(Options > Preferences\)](#) and go to [Editor > Format](#).
2. Deselect **Detect indent on open**.
3. Set **Indent size** to 0.

All documents will be formatted and indented with an indent of zero.



Warning: Setting the indent size to zero can change the meaning of some file types, such as Python source files.

Format and Indent (Pretty-Print) Multiple Files

Oxygen XML Developer provides support for formatting and indenting (*pretty-print*) multiple files at once. This action is available for any document in XML format, as well as for XQuery, CSS, JavaScript, and JSON documents.

To format and indent multiple files, use the  **Format and Indent Files** action that is available in the contextual menu of the **Project view** or from the **Tools** menu. This opens the **Format and Indent Files** dialog box that allows you to configure options for the action.

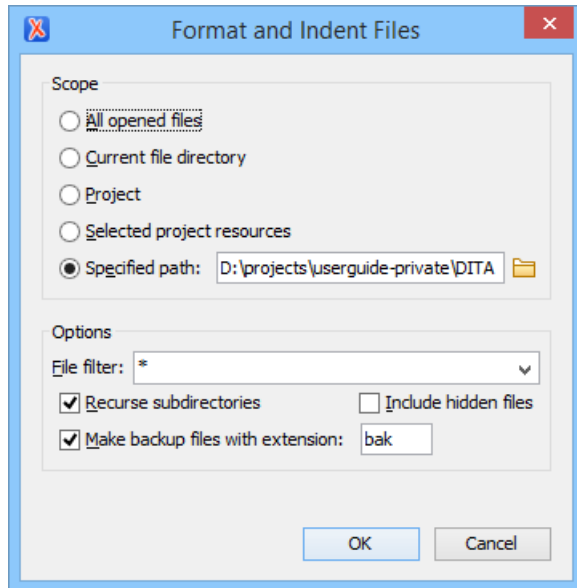


Figure 76: Format and Indent Files Dialog Box

The **Scope** section allows you choose from the following scopes:

- **All opened files** - The *pretty-print* is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - the *pretty-print* is performed in the files located at a specified path.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When selected, the *pretty-print* is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When selected, the *pretty-print* is also performed in the hidden files.
- **Make backup files with extension** - When selected, Oxygen XML Developer makes backup files of the modified files. The default extension is .bak, but you can change the extension as you prefer.

Managing Highlighted Content

While working with XML documents you often have frequent changes to the structure and content. You are often faced with a situation where you need to make a slight change in multiple places in the same document. Oxygen XML Developer includes a feature, **Manage Highlighted Content**, that is designed to help you achieve this.

When you are in **Text** mode and you perform a search operation or apply an XPath that highlights multiple results, you can select the **Manage Highlighted Content** action from the contextual menu of any highlight in the document, and the following options are available in its submenu:

- **Modify All** - Use this option to modify (in-place) all the occurrences of the selected content. When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Note: If you select a very large number of highlights that you want to modify using this feature, a dialog box informs you that you may experience performance issues. You have the option to either use the [Find/Replace operation](#), or continue the operation.

- **Surround All** - Use this option to surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.
- **Remove All** - Removes all the highlighted content.

If you right-click content in another part of the document, other than a highlight, you have the option to select the following option:

- **Modify All Matches** - Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment in which the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Quick Assist Support for IDs and IDREFS

The [Quick Assist support](#) is activated automatically when you place the cursor inside an ID or IDREF in **Text** mode. To access it, click the yellow bulb help marker placed on the current line, in the line number stripe of the editor. You can also invoke the *Quick Assist* menu from the contextual menu or by pressing **Alt+1** (**Command+Alt+1** on **Mac OS X**) on your keyboard.

The following actions are available:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Change scope

Opens the [Select the scope for the Search and Refactor operations](#) dialog box.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.

Search Occurrences

Searches for the declaration and references of the ID located at the cursor position in the current document.

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Highlight ID Occurrences in Text Mode

To see the occurrences of an ID in an XML document in the **Text** mode, place the cursor inside the ID declaration or reference. The occurrences are marked in the vertical side bar at the right of the editor. Click a marker on the side bar to jump to the occurrence that it corresponds to. The occurrences are also highlighted in the editing area.

Note: Highlighted ID declarations are rendered with a different color than highlighted ID references. To customize these colors or disable this feature, [open the Preferences dialog box \(Options > Preferences\)](#) and go to [Editor > Mark Occurrences](#).

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Contextual Menu Actions in Text Mode

When editing XML documents in **Text** mode, Oxygen XML Developer provides the following actions in the contextual menu (many of them also appear in the submenus of the **Document** menu):

 **Cut**,  **Copy**,  **Paste**

Executes the typical editing actions on the currently selected content.

Copy XPath

Copies the XPath expression of the current element or attribute from the current editor to the clipboard.

Toggle Comment (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Comments the current selection of the current editor. If the selection already contains a comment the action removes the comment from around the selection. If there is no selection in the current editor and the cursor is not positioned inside a comment the current line is commented. If the cursor is positioned inside a comment then the commented text is uncommented.

Go to submenu

This submenu includes the following actions:

Go to Matching Tag (Ctrl + Shift + G)

Moves the cursor to the end tag that matches the start tag, or vice versa.

Go after Next Tag (Ctrl + CloseBracket (Command + CloseBracket on OS X))

Moves the cursor to the end of the next tag.

Go after Previous Tag (Ctrl + OpenBracket (Command + OpenBracket on OS X))

Moves the cursor to the end of the previous tag.

Select submenu

This submenu allows you to select the following:

Element

Selects the entire element at the current cursor position.

Content

Selects the entire content of the element at the current cursor position, excluding the start and end tag. Performing this action repeatedly will result in the selection of the content of the ancestor of the currently selected element content.

Attributes

Selects all the attributes of the element at the current cursor position.

Parent

Selects the parent element at the current cursor position.

Source submenu

This submenu includes the following actions:

Shift Right (Tab)

Shifts the currently selected block to the right.

Shift Left (Shift + Tab)

Shifts the currently selected block to the left.

Indent selection (Ctrl + I (Command + I on OS X))

Corrects the indentation of the selected block of lines if it does not follow the current [indenting preferences](#).

Escape Selection

Escapes a range of characters by replacing them with the corresponding character entities.

Unescape Selection

Replaces the character entities with the corresponding characters.

Format and Indent Element (Ctrl + Shift + I (Command + Shift + I on OS X))

[Pretty-prints](#) the element that surrounds the current cursor position.

To Upper Case

Converts the selected content to upper case characters. This works with contiguous and multiple selections.

To Lower Case

Converts the content selection to lower case characters. This works with contiguous and multiple selections.

Capitalize Lines

It capitalizes the first letter found on every new line that is selected. Only the first letter is affected, the rest of the line remains the same. If the first character on the new line is not a letter then no changes are made.

Convert Hexadecimal Sequence to Character (Ctrl + Shift + X (Command + Shift + X on OS X))

Converts a sequence of hexadecimal characters to the corresponding Unicode character. The action can be invoked if there is a selection containing a valid hexadecimal sequence or if the cursor is placed at the right side of a valid hexadecimal sequence. A valid hexadecimal sequence can be composed of 2 to 4 hexadecimal characters and may or may not be preceded by the 0x or 0X prefix. Examples of valid sequences and the characters they will be converted to:

- 0x0045 will be converted to E
- 0X0125 to ĥ
- 265 to #
- 2190 to #

Base64 Encode/Decode submenu

This submenu include the following actions for encoding or decoding **base64** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the

[Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Base32 Encode/Decode submenu

This submenu include the following actions for encoding or decoding **base32** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Hex Encode/Decode submenu

This submenu include the following actions for encoding or decoding **hex** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the

[Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Join and Normalize Lines (Ctrl + J (Command + J on OS X))

For the current selection, this action joins the lines by replacing the *line separator* with a single space character. It also normalizes the whitespaces by replacing a sequence of such characters with a single space.

Insert new line after (Ctrl + Alt + Enter (Command + Alt + Enter on OS X))

This action has the same result as moving the cursor to the end of the current line and pressing the *ENTER* key.

Insert XInclude

Displays a dialog box that allows you to browse and select the content to be included and automatically generates the corresponding XInclude instruction.

Note: In the **Author** mode, this dialog box presents a preview of the inserted document as an author page in the **Preview** tab and as a text page in the **Source** tab. In the **Text** mode, the **Source** tab is presented.

Import entities list

Displays a dialog box that allows you to select a list of files as sources for external DTD entities. The internal subset of the DOCTYPE declaration of your document will be updated with the chosen entities. For instance, choosing the files `chapter1.xml` and `chapter2.xml` inserts the following section in the DOCTYPE:

```
<!ENTITY chapter1 SYSTEM "chapter1.xml">
<!ENTITY chapter2 SYSTEM "chapter2.xml">
```

Lock / Unlock the XML Tags

Disables or enables the ability to edit XML tags.

Canonicalize

Opens the **Canonicalize** dialog box that allows you to select a [canonicalization](#) algorithm to standardize the format of the document.

Sign

Opens the **Sign** dialog box that allows you to configure a digital signature for the document.

Verify Signature

Allows you to specify the location of a file to verify its digital signature.

Manage Highlighted Content submenu

This submenu is available from the contextual menu when it is invoked from a highlight after you perform a search operation or apply an XPath expression that highlights more than one result. The following options are available in this submenu:

Modify All

Allows you to modify (in-place) all the occurrences of the selected content. A thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Surround All

Surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.

Remove All

Removes all the highlighted content.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Go to Definition (Ctrl + Shift + Enter)

Moves the cursor to the definition of the current element or attribute in the schema (DTD, XML Schema, Relax NG schema) associated with the edited XML document. If the current attribute is a "type" belonging to the "<http://www.w3.org/2001/XMLSchema-instance>" namespace, the cursor is moved in the XML schema to the definition of the type referenced in the value of the attribute.

Refactoring submenu

This submenu includes the following actions:

Rename Element

The element from the cursor position, and any elements with the same name, can be renamed according with the options from the **Rename** dialog box.

Rename Prefix (Alt + Shift + P (Command + Shift + P on OS X))

The prefix of the element from the cursor position, and any elements with the same prefix, can be renamed according with the options from the **Rename** dialog box.

- If you select the **Rename current element prefix** option, the application will recursively traverse the current element and all its children. *For example*, to change the `xmlns:p1="ns1"` association in the current element to `xmlns:p5="ns1"`, if the `xmlns:p1="ns1"` association is applied on the parent element, then Oxygen XML Developer will introduce `xmlns:p5="ns1"` as a new declaration in the current element and will change the prefix from p1 to p5. If p5 is already associated with another namespace in the current element, then the conflict will be displayed in a dialog box. By pressing **OK**, the prefix is modified from p1 to p5 without inserting a new declaration.
- If you select the **Rename current prefix in all document** option, the application will apply the change on the entire document.
- To also apply the action inside attribute values, select the **Rename also attribute values that start with the same prefix** checkbox.

Surround with submenu

Presents a drop-down menu that allows you to choose a tag to surround a selected portion of content.

Surround with Tags (Ctrl + E (Command + E on OS X))

Allows you to choose a tag that encloses a selected portion of content. If there is no selection, the start and end tags are inserted at the cursor position.

- If the **Position cursor between tags** option is selected in the **Content Completion** preferences page, the cursor is placed between the start and end tag.
- If the **Position cursor between tags** option is not selected in the **Content Completion** preferences page, the cursor is placed at the end of the start tag, in an insert-attribute position.

 Surround with '[tag]' (Ctrl + ForwardSlash (Command + ForwardSlash on OS X))

Surround the selected content with the last tag used.

 Delete element tags (Alt + Shift + X (Command + Alt + X on OS X))

Deletes the start and end tag of the current element.

 Split element (Alt + Shift + D (Ctrl + Alt + D on OS X))

Split the element from the cursor position into two identical elements. The cursor must be inside the element.

 Join elements (Alt + Shift + J (Command + Alt + J on OS X))

Joins the left and right elements relative to the current cursor position. The elements must have the same name, attributes, and attributes values.

Attributes Refactoring Actions

Contains predefined XML refactoring operations that pertain to attributes with some of the information preconfigured based upon the current context.

Add/Change attribute

Allows you to change the value of an attribute or insert a new one.

Convert attribute to element

Allows you to change an attribute into an element.

Delete attribute

Allows you to remove one or more attributes.

Rename attribute

Allows you to rename an attribute.

Replace in attribute value

Allows you to search for a text fragment inside an attribute value and change the fragment to a new value.

Comments Refactoring Actions

Contains predefined XML refactoring operations that pertain to comments with some of the information preconfigured based upon the current context.

Delete comments

Allows you to delete comments found inside one or more elements.

DITA Refactoring Actions

A variety of predefined XML refactoring operations that pertain to DITA documents with some of the information preconfigured based upon the current context.

Change Topic ID to File Name

Use this operation to change the ID of a topic to be the same as its file name.

Convert CALS Tables to Simple Tables

Use this operation to convert DITA CALS tables to simple tables.

Convert conrefs to conkeyrefs

Use this operation to convert conref attributes to conkeyref attributes.

Convert Simple Tables to CALS Tables

Use this operation to convert DITA simple tables to CALS tables.

Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task). A DITA *General Task* is a less restrictive alternative to the *Strict Task* information type.

Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

Elements Refactoring Actions

Contains predefined XML refactoring operations that pertain to elements with some of the information preconfigured based upon the current context.

Delete element

Allows you to delete elements.

Delete element content

Allows you to delete the content of elements.

Insert element

Allows you to insert new elements.

Rename element

Allows you to rename elements.

Unwrap element

Allows you to remove the surrounding tags of elements, while keeping the content unchanged.

Wrap element

Allows you to surround elements with element tags.

Wrap element content

Allows you to surround the content of elements with element tags.

Fragments Refactoring Actions

Contains predefined XML refactoring operations that pertain to XML fragments with some of the information preconfigured based upon the current context.

Insert XML fragment

Allows you to insert an XML fragment.

Replace element content with XML fragment

Allows you to replace the content of elements with an XML fragment.

Replace element with XML fragment

Allows you to replace elements with an XML fragment.

JATSKit Refactoring Actions

Contains predefined XML refactoring operations that pertain to JATS documents with some of the information preconfigured based upon the current context.

Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Adds an NLM 'BITS' 2.0 DOCTYPE declaration.

Add Blue DOCTYPE - NISO JATS Publishing 1.1

Adds a JATS 'Blue' 1.1 DOCTYPE declaration.

Normalize IDs

Assigned IDs are normalized and IDs are assigned to some elements that are missing them.

Manage IDs submenu

This submenu is available for XML documents that have an associated DTD, XML Schema, or Relax NG schema. It includes the following actions:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.

Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search References in

Searches for the references of the ID. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search Declarations in

Searches for the declaration of the ID reference. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Search Occurrences in file

Searches for the declaration and references of the ID in the current document.

Quick Assist (**Alt + 1** (**Command + Alt + 1** on OS X))

Available when the cursor is inside an ID or IDREF, this action opens the [Quick Assist](#) window that allows you to select some search and refactoring actions for the selected ID or IDREF.

Open submenu

The following actions are available in this submenu:

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Resource Hierarchy

Opens the [Resource Hierarchy/Dependencies view](#) that allows you to see the resource hierarchy for an XML document.

Resource Dependencies

Opens the [Resource Hierarchy/Dependencies view](#) that allows you to see the resource dependencies for an XML document.

Grid Editing Mode

The Oxygen XML Developer **Grid** editing mode displays the XML document as a structured grid of nested tables where the text content can be modified without directly interacting with the XML markup. This is helpful for non-technical users who want to edit text content without modifying the XML markup. You can easily expand or collapse elements within the table and the document structure can be changed with simple drag/drop or copy/paste operations.

To switch to this mode, select **Grid** at the bottom of the editing area.

Text **Grid** Author

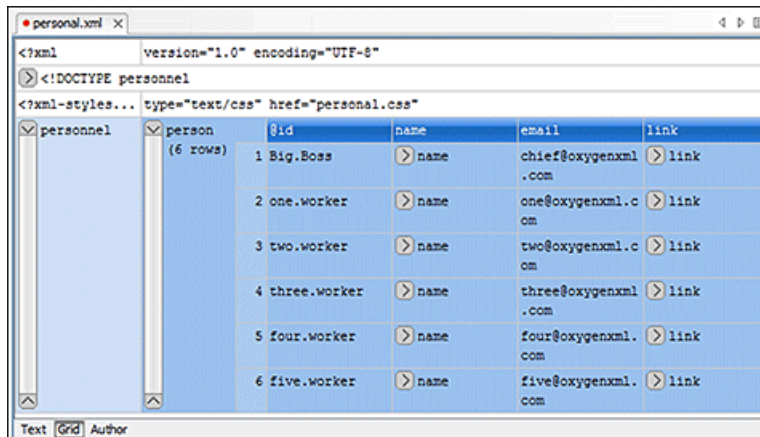


Figure 77: Grid Editing Mode

For more information about some of the features available in the **Grid** editor, watch our video demonstration:

<https://www.youtube.com/embed/PoYm2VqisWk>

Related Information:

[Editing XML Documents in Grid Mode](#) on page 397

Layouts: Grid and Tree

The **Grid** editor offers two layout modes. The default one is the grid layout. This smart layout detects the recurring elements in the XML document and creates tables having the children (including the attributes) of these elements as columns. This way, it is possible to have tables nested in other tables, reflecting the structure of your document.

<?xml	version="1.0" encoding="UTF-8"				
test	table	tr	@id	first	last
		(3 rows)			
		1	10001	Jhon	Doe
		2	10002	Mark	Ewing
		3	10003	Dave	Flint

Figure 78: Grid Layout

The other layout mode is tree-like. It does not create any tables and it only presents the structure of the document.

<?xml version="1.0" encoding="UTF-8"				
test	table	tr	@id	10001
			first	Jhon
			last	Doe
		tr	@id	10002
			first	Mark
			last	Ewing
		tr	@id	10003
			first	Dave
			last	Flint

Figure 79: Tree Layout

To switch between the two modes, select **Document > Grid Layout > Grid mode/Tree mode**.

Grid Mode Navigation

When you first open a document in **Grid** mode, the content is collapsed. Only the root element and its attributes are displayed. An arrow sign (⌵) displayed at the left of the node name indicates that this node has child nodes. To display the children, click this arrow sign. To collapse a node, click the reverse arrow sign (⌶). The expand/collapse actions can also be invoked with the **NumPad+** and **NumPad-** keys, or from the **Expand/Collapse** submenu of the contextual menu or from **Document > Grid Expand/Collapse**.

Expand/Collapse Submenu

The following actions are available on the **Expand/Collapse** submenu:

Expand All

Expands the selection and all its children.

Collapse All

Collapses the selection and all its children.

Expand Children

Expands all the children of the selection but not the selection.

Collapse Children

Collapses all the children of the selection but not the selection.

Collapse Others

Collapses all the siblings of the current selection but not the selection.

Keyboard Shortcuts

A variety of other keyboard shortcuts are also available in **Grid** mode:

Table 7: Shortcuts in the Grid Mode

Key	Action
Tab	Moves the cursor to the next editable value in a table row.
Shift + Tab	Moves the cursor to the previous editable value in a table row.
Enter	Begins editing and lets you insert a new value. Also commits the changes after you finish editing.
UpArrow/PageUp	Navigates toward the beginning of the document.

Key	Action
DownArrow/PageDown	Navigates toward the end of the document.
Shift	Used in conjunction with the navigation keys to create a continuous selection area.
Ctrl (Command on OS X) key	Used in conjunction with the mouse cursor to create discontinuous selection areas.

The following key combinations can be used to scroll the grid:

- **Ctrl + UpArrow (Command + UpArrow on OS X)** - scrolls the grid upwards.
- **Ctrl + DownArrow (Command + DownArrow on OS X)** - scrolls the grid downwards.
- **Ctrl + LeftArrow (Command + LeftArrow on OS X)** scrolls the grid to the left.
- **Ctrl + RightArrow (Command + RightArrow on OS X)** scrolls the grid to the right.

Related Information:

[Editing Actions in Grid Mode](#) on page 397

Special Character Support in Grid Mode

If you are editing documents with a bidirectional text orientation or other special characters (such as combining characters), you can change the way the text is rendered and edited in the grid cells by using the **Change Text Orientation**(**Ctrl + Shift + O (Command + Shift + O on OS X)**) action that is available from the **Edit** menu in the **Grid** editing mode. Use this action to switch from the default left to right text orientation to the right to left orientation, and vice versa.

Note: This change applies only to the text from the cells, and not to the layout of the grid editor.

<?xml	version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	世界的に話すなら、Unicode です。
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 80: Default left to right text orientation

<?xml	"version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	。世界的に話すなら、Unicode です
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 81: Right to left text orientation

Related Information:

[Special Character Support in Text Mode](#) on page 209

[Inserting Special Characters](#) on page 327

Editing Actions in Grid Mode

Since **Grid** mode presents XML content in a structured grid of nested tables, editing content in this mode can be done with a combination of the [Content Completion Assistant](#) and actions that allow you to work with the structure or content of the nested tables much like you would with any table. Oxygen XML Developer provides ways to edit content in the cells of the nested tables or to edit the structure of the tables.

Tip: There are two different types of layouts available in **Grid** mode. Most people prefer to leave it on the default **Grid mode** layout, but there is also a **Tree mode** layout that presents the structure of the document in more of a vertical tree-like manner. You can switch between the two layouts to see which one works best for you particular situation from the **Document > Grid Layout** menu.

Expanding/Collapsing Nodes

An arrow sign () displayed at the left of a node indicates that it has child nodes. To display the children, click this arrow sign. To collapse a node, click the reverse arrow sign (). The expand/collapse actions can also be invoked with the **NumPad+** and **NumPad-** keys, or from the **Expand/Collapse** submenu of the contextual menu.

To expand all child nodes, right-click the cell that contains the parent node and select  **Expand All** from the **Expand/Collapse** submenu. To collapse all node, right-click any cell and select  **Collapse All** from the **Expand/Collapse** submenu.

Editing Elements or Attributes

To edit elements or attributes in **Grid** mode, simply double-click the cell that contains the element or attribute (or select the cell and press **(Enter)**) to invoke the [Content Completion Assistant](#). This opens a pop-up window that offers a list of proposals that are valid for that particular node.

Editing Text Content in Cells

To edit the text value of a cell, simply select the grid cell and press **Enter** (or double-click the cell), and start editing.

To stop editing a cell value, press **Enter** again.

To cancel the editing without saving the current changes in the document, press the **Esc** key.

Editing the Structure of the Nested Tables

To edit the structure of the nested tables in **Grid** mode, Oxygen XML Developer provides the following actions in the contextual menu (many of them also appear in the submenus of the **Document** menu, or the toolbar):

 **Cut**,  **Copy**,  **Paste**,  **Delete** common editing actions

Executes the typical editing actions on the currently selected elements. The **Cut** and **Copy** operations preserve the styles of the copied content.

Paste as Child

Pastes the copied content as the last child of the current selection.

Duplicate

Creates a new node by duplicating the currently selected one.

Insert Before

Offers a list of valid nodes, depending on the context, and inserts your selection before the currently selected node, as a sibling.

Insert After

Offers a list of valid nodes, depending on the context, and inserts your selection after the currently selected node, as a sibling.

Append Child

Offers a list of valid nodes, depending on the context, and appends your selection as a child of the currently selected node.

Sort Ascending, Sort Descending

The sorting result depends on the data type of the column content. It could be a numerical sorting for numbers or an alphabetical sorting for text information. The editor automatically analyzes the content and decides what type of sorting to apply. When a mixed set of values is present in the sorted column, a dialog box is displayed that allows you to choose the desired type of sorting between *numerical* and *alphabetical*.

Insert Row

Inserts a new row below the current selection. To insert a new row, you could also select the row header (the zone to the left of the row that holds the row number) and press **Enter**.

Insert Column

Inserts a column after the current selection.

Clear Content

Removes all content from the current cell.

Expand/Collapse > Expand All

Expands the selection and all its children.

Expand/Collapse > Collapse All

Collapses the selection and all its children.

Expand/Collapse > Expand Children

Expands all the children of the selection but not the selection.

Expand/Collapse > Collapse Children

Collapses all the children of the selection but not the selection.

Expand/Collapse > Collapse Others

Collapses all the siblings of the current selection but not the selection.

Refresh Selected

Forces the layout to be recomputed.

Related Information:

[Grid Mode Navigation](#) on page 225

[Copy and Paste in the Grid Editing Mode](#) on page 399

[Drag and Drop in the Grid Editing Mode](#) on page 398

[Content Completion Assistant in Grid Mode](#) on page 401

Drag and Drop in the Grid Editing Mode

You can easily arrange sections in your XML document in the **Grid** mode by using drag and drop actions.

You can do the following with drag and drop:

- Copy or move a set of nodes.
- Change the order of columns in the tables.
- Move the rows from the tables.

These operations are available for both single and multiple selections. To deselect one of the selected fragments, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.

While dragging, the editor paints guide-lines showing the locations where you can drop the nodes. You can also drag nodes outside the **Grid** editor and text from other applications into the **Grid**.

Tip: When using drag and drop to reorganize the document, the resulting layout can be different from what you expected. For instance, the layout can contain a set of sibling tables that can be joined together. To force the layout to be recomputed, you can use the **Refresh Selected** action that is available in the contextual menu and in the **Document > Grid Edit** menu.

Copy and Paste in the Grid Editing Mode

Selecting content in the **Grid** mode is similar to working with any table with a little more complexity. Specifically, depending on the type of node, when you select a cell, the selection may automatically include additional cells that are implied by the currently selected node. For example, if you click a node that contains any child nodes, all cells that contain the parent and child nodes will be selected. In this case, the currently selected cell is painted with a color that is different from the rest of the selection.

You can also select discontinuous regions of nodes and place them in the clipboard with the copy action. To deselect one of the selected fragments, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.

Pasting Content Within Grid Mode

You can paste copied nodes relative to the currently selected cell using one of the following actions (available in the contextual menu):

- **Paste (Ctrl + V (Command + V on OS X))** - Pastes copied content, as a sibling, just below (after) the current selection.
- **Paste as Child** - Pastes copied content as the last child of the current selection.

Pasting Content from Grid Mode to Other Editors

Nodes that are copied from the **Grid** editor can also be pasted into **Text** mode or other external applications. When pasting copied content from **Grid** mode, the inserted string represents the nodes serialization. The nodes from tables can be copied using HTML or RTF in table format. The resulting cells contain only the concatenated values of the text nodes.

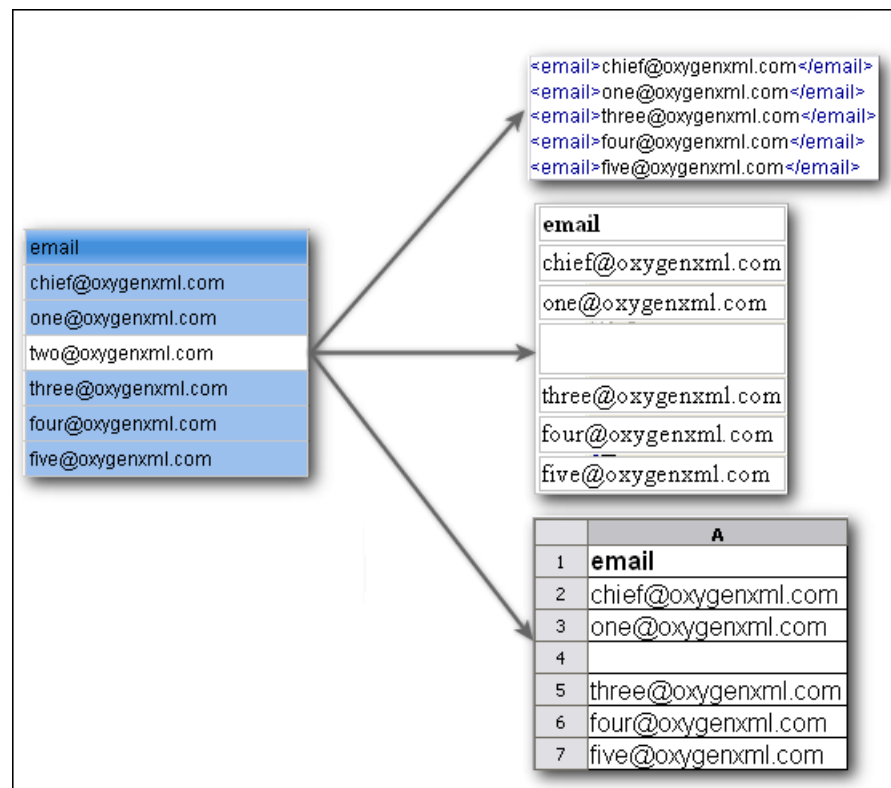


Figure 82: Copying from Grid to Other Editors

Pasting Content from Other Editors into Grid Mode

You can also paste well-formed XML content or tab-separated values from other editors into the **Grid** editor. If you paste XML content, the result will be the insertion of the nodes obtained by parsing this content.

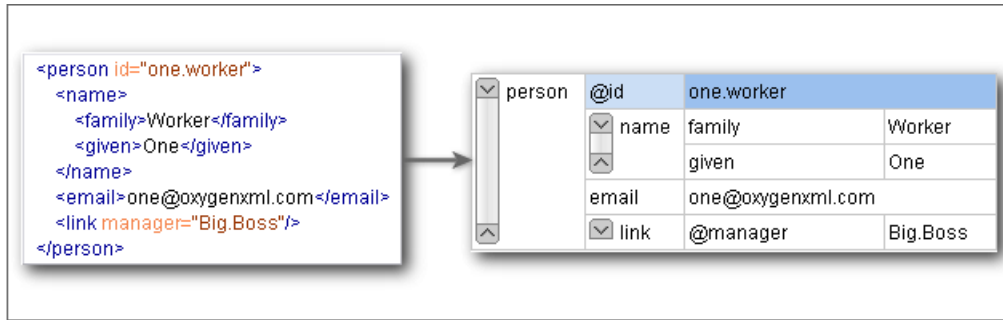


Figure 83: Pasting XML Data into Grid

If the pasted text contains multiple lines of tab-separated values, it can be considered as a matrix of values. By pasting this matrix of values into the **Grid** editor, the result will be a matrix of cells. If the operation is performed inside existing cells, the existing values will be overwritten and new cells will be created when needed.



Figure 84: Pasting Tab-Separated Values into Grid

If you need to add copied content to your existing content (rather than overwriting existing cells), you need to first insert new cells by using the **Insert row** or **Insert column** actions from the contextual menu. This is useful, for example, when trying to transfer data from spreadsheet-like editors to the **Grid** editor.

Content Completion Assistant in Grid Mode

If the edited document is associated with a schema (DTD, XML Schema, Relax NG, etc.), the **Grid** editing mode offers a *Content Completion Assistant* for the names and values of elements and attributes. If you choose to insert an element that has required content, the sub-tree of needed elements and attributes are also automatically included.

To display the content completion pop-up menu, simply double-click a cell that contains an element or attribute (or press **Enter** on your keyboard).

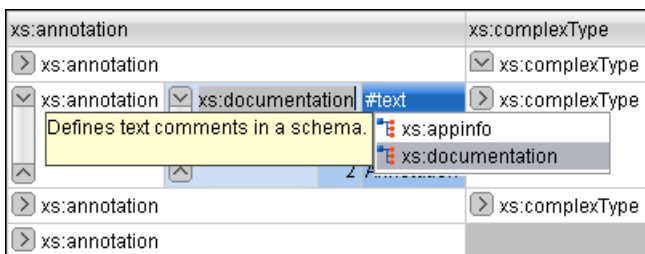


Figure 85: Content Completion in Grid Editing Mode

Exporting XML Content to Excel

For use-cases where you have XML content that needs to be exported to Excel (or any other spreadsheet application) but the content is not already in some sort of table format, **Grid** mode offers you a way to display the content of an XML document as a structured grid of nested tables and you can work with the cells in those

tables much like you would with any spreadsheet application. This makes it possible to export content to Excel by copying cells that contain the specific content and then pasting the copied cells in Excel the same as you would when working with any table or spreadsheet.

To export XML content from **Grid** mode to Excel or other spreadsheet applications, follow this procedure:

1. Open the XML document in Oxygen XML Developer and switch to **Grid** mode.
2. [Expand the nodes](#) to gain access to the particular nested table that contains the content you want to export.
3. Copy the cells that contain the content you want to export ( **Copy** from the contextual menu or **Ctrl+C**).
4. Switch to your spreadsheet application and paste the copied cells.
5. You may need to make some manual adjustments depending on the complexity of the structure in the original XML document.

Note that Oxygen XML Developer also supports the reverse scenario (copying cells from a spreadsheet application and pasting them in **Grid** mode). For more information, see [Import from MS Excel Files – Grid Mode Method](#).

For more information about exchanging data between Oxygen XML Developer and spreadsheet applications, watch our video demonstration:

<https://www.youtube.com/embed/8VwsF58zLkU>

Related Information:

[Import from MS Excel Files - Grid Mode Method](#) on page 1014

[Pasting Content from Other Editors into Grid Mode](#) on page 400


Design Editing Mode (XML Schema Diagram Editor)

XML Schemas allow document designers to specify the allowed structure and content of an XML document and to check if an XML document is valid.

Oxygen XML Developer provides a simple and expressive XML Schema diagram editor (**Design** mode) for editing XML Schemas. The schema diagram helps both the content authors who want to understand a schema and schema designers who develop complex schemas.

The diagram font can be increased using the usual Oxygen XML Developer shortcuts: **(Ctrl (Meta on Mac OS) + "+")**, **(Ctrl (Meta on Mac OS) + "-")**, **(Ctrl (Meta on Mac OS) + 0)** or **(Ctrl (Meta on Mac OS) - mouse wheel)**. The whole diagram can also be zoomed with one of the predefined factors [available in the Schema preferences panel](#). The same zoom factor is applied for the print and save actions.

To switch to this mode, select **Design** at the bottom of the editing area.



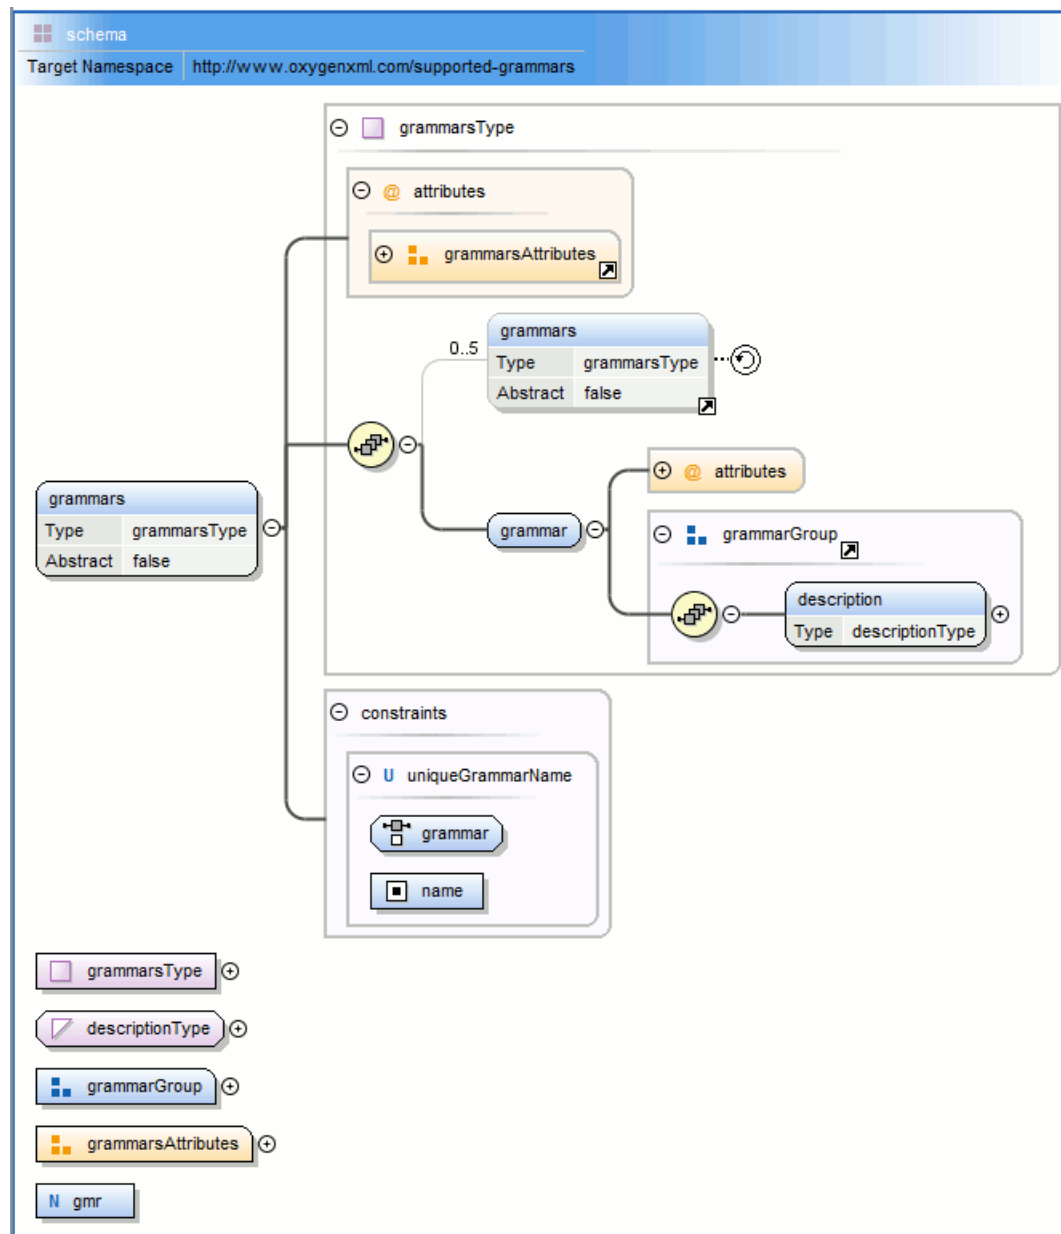


Figure 86: XML Schema Diagram

For more information about designing XML Schemas, watch our video demonstration:

<https://www.youtube.com/embed/vz1eIZELQgc>

Navigation in the XML Schema Design Mode

The following editing and navigation features work for all types of schema components in the XML Schema **Design** mode:

- Move/reference components in the diagram using drag-and-drop actions.
- Select consecutive components on the diagram (components from the same level) using the *Shift* key. You can also make discontinuous selections in the schema diagram using the **Ctrl (Meta on Mac OS)** key. To deselect one of the components, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.
- Use the arrow keys to navigate the diagram vertically and horizontally.
- Use *Home/End* keys to jump to the first/last component from the same level. Use **Ctrl + Home (Command + Home on OS X)** key combination to go to the diagram root and **Ctrl + End (Command + End on OS X)** to go to the last child of the selected component.

- You can easily go back to a previously visited component while moving from left to right. The path will be preserved only if you use the left arrow key or right arrow key. For example, if the current selection is on the second attribute from an attribute group and you press the left arrow key to jump to the attribute group, when you press the right arrow key, then the selection will be moved to the second attribute.
 - Go back and forward between components viewed or edited in the diagram by selecting them in the [Outline view](#):
 -  **Back** (go to previous schema component).
 -  **Forward** (go to next schema component).
 -  **Go to Last Modification** (go to last modified schema component).
 - Copy, reference, or move global components, attributes, and identity constraints to another position and from one schema to another using the **Cut/Copy** and **Paste/Paste as Reference** actions.
 - Go to the definition of an element or attribute with the **Go to Definition** action.
 - Search in the diagram using the [Find/Replace dialog box](#) or the [Quick find toolbar](#). You can find/replace components only in the current file scope.
 - You can expand and see the contents of the imports/includes/redefines in the diagram. In order to edit components from other schemas the schema for each component will be opened as a separate file in Oxygen XML Developer.
- Tip:** If an XML Schema referenced by the current opened schema was modified on disk, the change will be detected and you will be asked to refresh the current schema contents.
- Recursive references are marked with a *recurse symbol* (). Click this symbol to navigate between the element declaration and its reference.




Figure 87: Recursive Reference

XML Schema Outline View

The **Outline** view for XML Schemas presents all the global components grouped by their location, namespace, or type. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

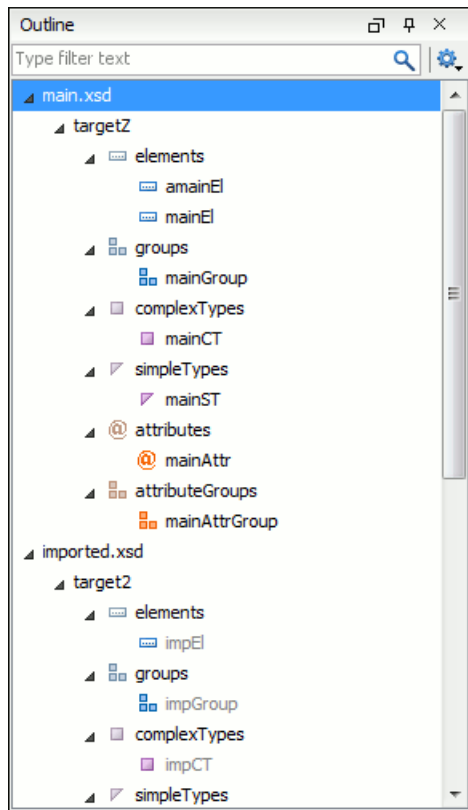


Figure 88: Outline View for XML Schema

The **Outline** view provides the following options in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;

Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram is also selected in the **Outline** view.

Sort

Allows you to sort alphabetically the schema components.

Show all components

Displays all components that were collected starting from the *master files*. Components that are not referable from the current file are marked with an orange underline. To reference them, add an import directive with the componentNS namespace.

Show referable components

Displays all components (collected starting from the *master files*) that can be referenced from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

These three operations allow you to group the components by location, namespace, or type. When grouping by namespace, the main schema target namespace is the first presented in the **Outline** view.

The following contextual menu actions are available in the **Outline** view:

Remove (Delete)

Removes the selected item from the diagram.

Search References (Ctrl (Meta on Mac OS)+Shift+R)

Searches all references of the item found at current cursor position in the defined scope, if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

Component Dependencies (Ctrl (Meta on Mac OS)+Shift+F4)

Opens the [Component Dependencies view](#) that allows you to see the dependencies for the current selected component.

Resource Hierarchy (F4)

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the hierarchy for the current selected resource.

Resource Dependencies (Shift + F4)

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the dependencies for the current selected resource.

Rename Component in

Renames the selected component.

Generate Sample XML Files

Generate XML files using the current opened schema. The selected component is the XML document root.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search will be searched as a partial match.

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Related Information:

[Searching and Refactoring Actions in XML Schemas](#) on page 548

[XML Schema Component Dependencies View](#) on page 546

[XML Schema Resource Hierarchy / Dependencies View](#) on page 544

[Generating Sample XML Files](#) on page 550

[Editing Relax NG Schema in the Master Files Context](#) on page 608

XML Schema Attributes View

The **Attributes** view for XML Schemas presents the properties for the selected component in the schema diagram. By default, it is displayed on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Name	family
Type	[ST - union]
Member Types	
Member	xs:string
Default	
Fixed	
Substitution Group	
Abstract	false
Nillable	false
Block	
Final	
ID	
Component	element
Namespace	
System ID	personal.xsd

Figure 89: Attributes View

The default value of a property is presented in the **Attributes** view with blue foreground. The properties that can not be edited are rendered with gray foreground. A non-editable category that contains at least one child is rendered with bold. Bold properties are properties with values set explicitly to them.

Properties for components that do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a property by double-clicking by pressing Enter. For most properties you can choose valid values from a list or you can specify another value. If a property has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default, properties with errors are highlighted with red and the properties with warnings are highlighted with yellow. You can customize these colors from the [Document checking user preferences](#).

For imports, includes and redefines, the properties are not edited directly in the **Attributes** view. A dialog box will open that allows you to specify properties for them.

The schema namespace mappings are not presented in **Attributes** view. You can view/edit these by choosing **Edit Schema Namespaces** from the contextual menu on the schema root. See more in the [Edit Schema Namespaces](#) section.

The **Attributes** view has five actions available on the toolbar and also on the contextual menu:

+ Add

Allows you to add a new member type to an union's member types category.

✕ Remove

Allows you to remove the value of a property.

↑ Move Up

Allows you to move up the current member to an union's member types category.

↓ Move Down

Allows you to move down the current member to an union's member types category.

📄 Copy

Copy the attribute value.

🔍 Go to Definition

Shows the definition for the selected type.

Show Facets

Allows you to edit the facets for a simple type.

XML Schema Facets View

The **Facets** view for XML Schemas presents the facets for the selected component, if available. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

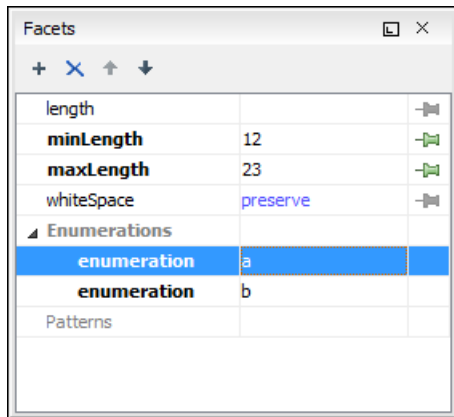


Figure 90: Facets View

The default value of a facet is rendered in the **Facets** view with a blue color. The facets that can not be edited are rendered with a gray color. The grouping categories (for example: **Enumerations** and **Patterns**) are not editable. If these categories contain at least one child they are rendered with bold. Bold facets are facets with values set explicitly to them.

Important: Usually inherited facets are presented as default in the **Facets** view but if patterns are inherited from a base type and also specified in the current simple type only the current specified patterns will be presented. You can see the effective pattern value obtained by combining the inherited and the specified patterns as a tooltip on the **Patterns** category.

Facets for components that do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a facet by double-clicking it or by pressing Enter, when that facet is selected. For some facets you can choose valid values from a list or you can specify another value. If a facet has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default, facets with errors are presented with red and the facets with warnings with yellow. You can customize the error colors from the [Document Checking user preferences](#).

The **Facets** view provides the following actions in its toolbar and contextual menu:

+ Add

Allows you to add a new enumeration or a new pattern.

✕ Remove

Allows you to remove the value of a facet.

Edit Annotations

Allows you to edit an annotation for the selected facet.

↑ Move Up

Allows you to move up the current enumeration/pattern in **Enumerations/Patterns** category.

↓ Move Down

Allows you to move down the current enumeration/pattern in **Enumerations/Patterns** category.

📄 Copy

Copy the attribute value.

Open in Regular Expressions Builder

Rather than editing regular expressions manually, this action allows you to open the pattern in the [XML Schema Regular Expressions Builder](#) that guides you through the process of testing and constructing the pattern..

Facets can be fixed to prevent a derivation from modifying its value. To fix a facet value just press the  **Pin** button.

XML Schema Palette View

The **Palette** view is designed to offer quick access to XML Schema components and to improve the usability of the XML Schema diagram builder. You can use the **Palette** to drag and drop components in the **Design** mode. The components offered in the **Palette** view depend on the XML schema version set in the [XML Schema preferences page](#). If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

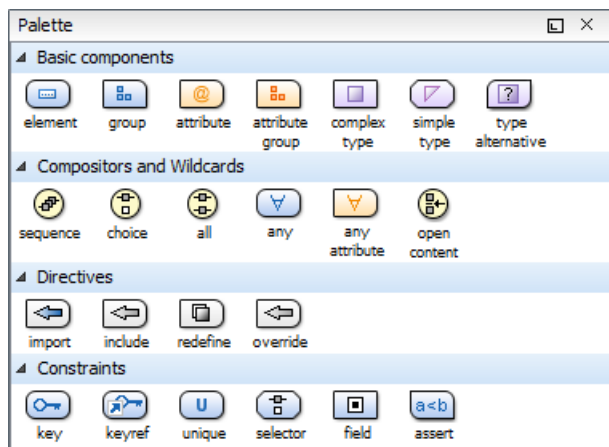


Figure 91: Palette View

Components are organized functionally into 4 collapsible categories:

- Basic components: *elements, group, attribute, attribute group, complex type, simple type, type alternative.*
- Compositors and Wildcards: *sequence, choice, all, any, any attribute, open content.*
- Directives: *import, include, redefine, override.*
- Identity constraints: *key, keyref, unique, selector, field, assert.*

Note: The *type alternative, open content, override, and assert* components are available for XML Schema 1.1.

To add a component to the edited schema:

- Click and hold a graphic symbol from the **Palette** view, then drag the component into the **Design** view.
- A line dynamically connects the component with the XML schema structure.
- Release the component into a valid position.

Note: You cannot drop a component into an invalid position. When you hover the component into an invalid position, the mouse cursor changes its shape into . Also, the connector line changes its color from the usual dark gray to the color defined in the [Validation error highlight color option](#) (default color is red).

For more information about the Schema palette, watch our video demonstration:

<https://www.youtube.com/embed/KalHUXmpuAA>

Schema Editing Actions

You can edit an XML schema using drag and drop operations or contextual menu actions.

Drag and drop is the easiest way to move the existing components to other locations in an XML schema. For example, you can quickly insert an element reference in the diagram with a drag and drop from the [Outline view](#) to

a compositor in the diagram. Also, the components order in an `xs:sequence` can be easily changed using drag and drop.

If this property has not been set, you can easily set the attribute/element type by dragging over it a simple type or complex type from the diagram. If the type property for a simple type or complex type is not already set, you can set it by dragging over it a simple or complex type.

Depending on the drop area, various actions are available:

- **move** - Context dependent, the selected component is moved to the destination.
- **reference** - Context dependent, the selected component is referenced from the parent.
- **copy** - If **(Ctrl (Meta on Mac OS))** key is pressed, a copy of the selected component is inserted to the destination.

Visual clues about the operation type are indicated by the mouse pointer shape:

-  - When moving a component.
-  - When referencing a component.
-  - When copying a component.

You can edit some schema components directly in the diagram. For these components, you can edit the name and the additional properties presented in the diagram by double clicking the value you want to edit. If you want to edit the name of a selected component, you can also press **(Enter)**. The list of properties that can be displayed for each component can be customized [in the Preferences](#).

When editing references, you can choose from a list of available components. Components from an imported schema for which the target namespace does not have an associated prefix is displayed in the list as `componentName#targetNamespace`. If the reference is from a target namespace that was not yet mapped, you are prompted to add prefix mappings for the inserted component namespace in the current edited schema.

You can also change the compositor by double-clicking it and choose the compositor you want from the proposals list.

There are some components that cannot be edited directly in the diagram: imports, includes, redefines. The editing action can be performed if you double-click or press **(Enter)** on an import/include/replace component. An edit dialog box is displayed, allowing you to customize the directives.

Related Information:

[Searching and Refactoring Actions in XML Schemas](#) on page 548

[XML Schema Component Dependencies View](#) on page 546

[XML Schema Resource Hierarchy / Dependencies View](#) on page 544

[Generating Sample XML Files](#) on page 550

[Schema Design Preferences](#) on page 74

Contextual Menu Actions in the Design Mode

The contextual menu of the **Design** mode includes the following actions:

Go to Definition (Ctrl + Shift + Enter)

Shows the definition for the current selected component. For references, this action is available by clicking the arrow displayed in its bottom right corner.

Open Schema (Ctrl + Shift + Enter)

Opens the selected schema. This action is available for `xsd:import`, `xsd:include` and `xsd:redefine` elements. If the file you try to open does not exist, a warning message is displayed and you have the possibility to create the file.

Edit Attributes ()

Allows you to edit the attributes of the selected component in a small in-place editor that presents the same attributes as in the [Attributes view](#) and the [Facets view](#). The actions that can be performed on attributes in this dialog box are the same actions presented in the two views.

Append child

Offers a list of valid components, depending on the context, and appends your selection as a child of the currently selected component. You can set a name for a named component after it has been added in the diagram.

Insert before

Offers a list of valid components, depending on the context, and inserts your selection before the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

Insert after

Offers a list of valid components, depending on the context, and inserts your selection after the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

New global

Inserts a global component in the schema diagram. This action does not depend on the current context. If you choose to insert an import you have to specify the URL of the imported file, the target namespace and the import ID. The same information, excluding the target namespace, is requested for an `xsd:include` or `xsd:redefine` element.

Note: If the imported file has declared a target namespace, the field **Namespace** is completed automatically.

Edit Schema Namespaces

When performed on the schema root, it allows you to edit the schema target namespace and namespace mappings. You can also invoke the action by double-clicking the target namespace property from [Attributes view](#) for the schema or by double-clicking the schema component.

Edit Annotations

Allows you to edit the annotation for the selected schema component in the **Edit Annotations** dialog box. You can perform the following operations in the dialog box:

- **Edit all appinfo/documentation items for a specific annotation** - All appinfo/documentation items for a specific annotation are presented in a table and can be easily edited. Information about an annotation item includes: type (documentation/appinfo), content, source (optional, specify the source of the documentation/appinfo element) and `xml:lang`. The content of a documentation/appinfo item can be edited in the **Content** area below the table.
- **Insert/Insert before/Remove documentation/appinfo**. The  **Add** button allows you to insert a new annotation item (documentation/appinfo). You can add a new item before the item selected in table by pressing the  **Insert Before** button. Also, you can delete the selected item using the  **Remove** button.
- **Move items up/down** - to do this use the  **Move up** and  **Move down** buttons.
- **Insert/Insert before/Remove annotation** - Available for components that allow multiple annotations such as schemas or redefines.
- **Specify an ID for the component annotation**. An optional identifier for the annotation.

Annotations are rendered by default under the graphical representation of the component. When you have a reference to a component with annotations, these annotations are presented in the diagram also below the reference component. The **Edit Annotations** action invoked from the contextual menu edit the annotations for the reference. If the reference component does not have annotations, you can edit the annotations of the referenced component by double-clicking the annotations area. Otherwise, you can edit the referenced component annotations only if you go to the definition of the component.

Note: For imported/included components that do not belong to the currently edited schema, the **Edit Annotations** dialog box presents the annotation as read-only. To edit its annotation, open the schema where the component is defined.

Extract Global Element

Action that is available for local elements. A local element is made global and is replaced with a reference to the global element. The local element properties that are also valid for the global element declaration are kept.

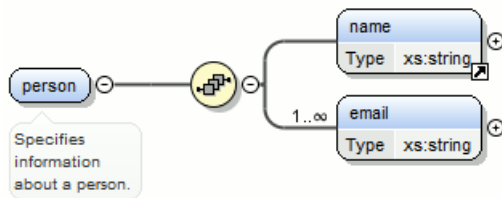


Figure 92: Extracting a Global Element

If you use the **Extract Global Element** action on a name element , the result is:

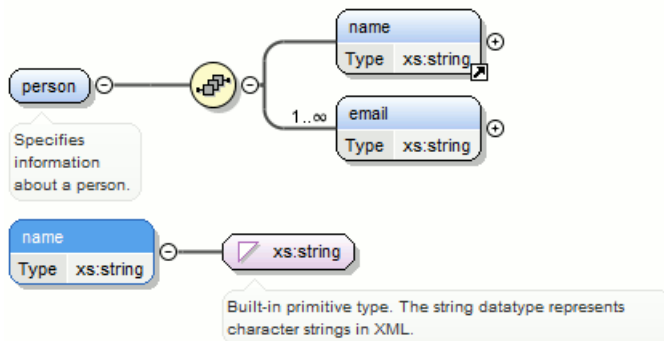


Figure 93: Extracting a Global Element on a name Element

Extract Global Attribute

Action available for local attributes. A local attribute is made global and replaced with a reference to the global attribute. The properties of local attribute that are also valid in the global attribute declaration are kept.

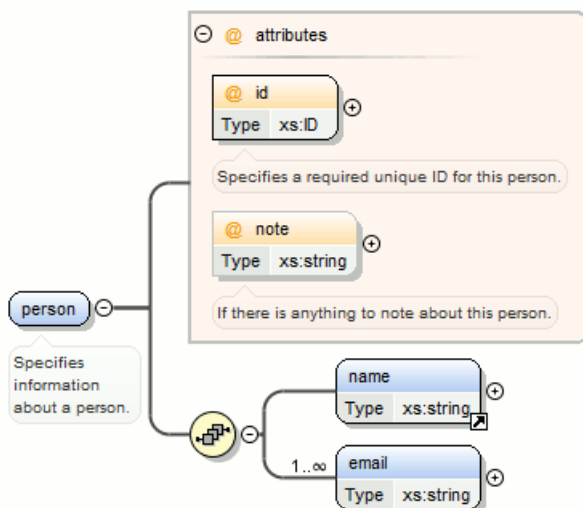


Figure 94: Extracting a Global Attribute

If you use the **Extract Global Attribute** action on a note attribute, the result is:


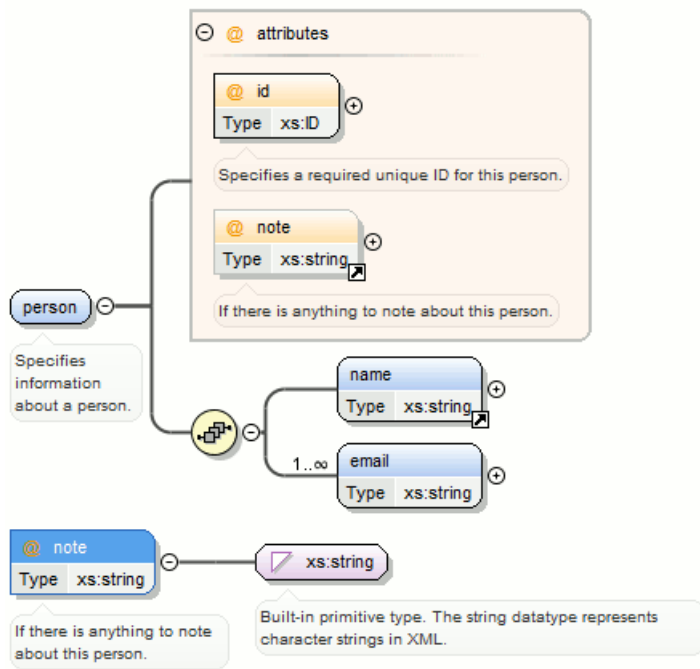


Figure 95: Extracting a Global Attribute on a note Attribute

Extract Global Group

Action available for compositors (sequence, choice, all). This action extracts a global group and makes a reference to it. The action is available only if the parent of the compositor is not a group.

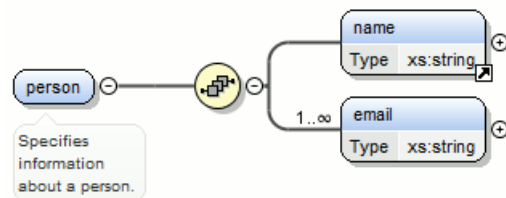

If you use the **Extract Global Group** action on the sequence element, the **Extract Global Component** dialog box is displayed and you can choose a name for the group. If you type **personGroup**, the result is:

Figure 96: Extracting a Global Group

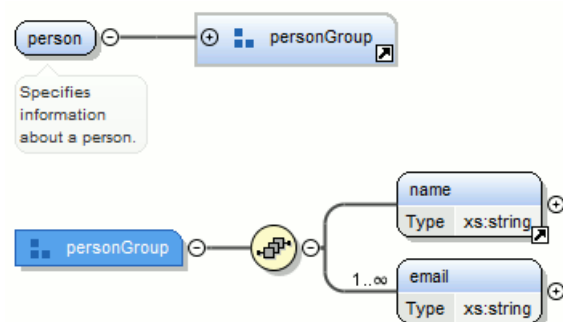


Figure 97: Extracting a Global Group on a sequence Element

Extract Global Type

Action used to extract an anonymous simple type or an anonymous complex type as global. For anonymous complex types, the action is available on the parent element.

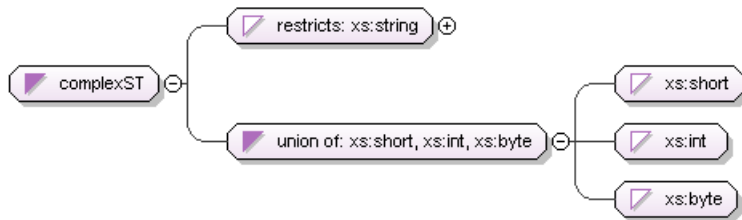


Figure 98: Extracting a Global Simple Type

If you use the action on the union component and choose `numericST` for the new global simple type name, the result is:

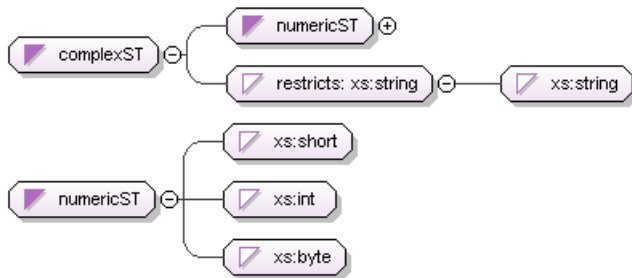


Figure 99: Extracting a Global Simple Type on a union Component

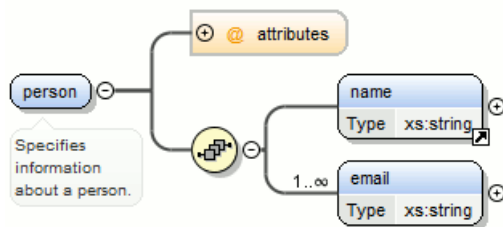


Figure 100: Extracting a Global Complex Type

If you use the action on a `person` element and choose `person_type` for the new complex type name, the result is:

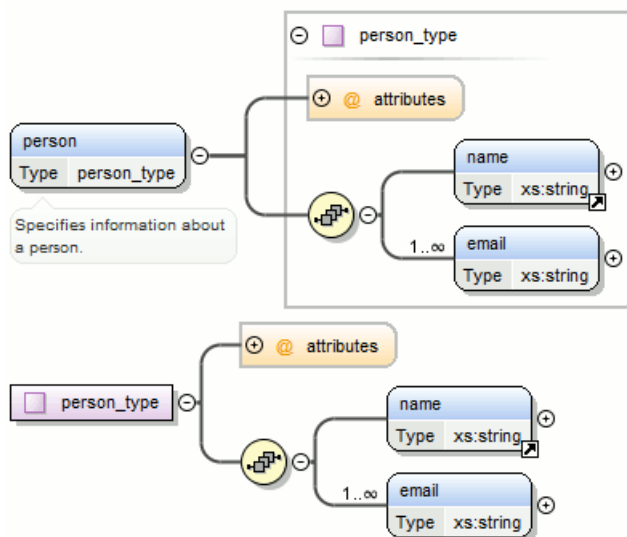


Figure 101: Extracting a Global Complex Type on a person Element

Rename Component in

Rename the selected component.

Cut Ctrl + X (Command + X on OS X)

Cut the selected component(s).

Copy Ctrl + C (Command + C on OS X)

Copy the selected component(s).

Copy XPath

This action copies an XPath expression that identifies the selected element or attribute in an instance XML document of the edited schema and places it in the clipboard.

Paste Ctrl + V (Command + V on OS X)

Paste the component(s) from the clipboard as children of the selected component.

Paste as Reference

Create references to the copied component(s). If not possible a warning message is displayed.

Remove (Delete)

Remove the selected component(s).

Override component

Copies the overridden component in the current XML Schema. This option is available for `xs:override` components.

Redefine component

The referenced component is added in the current XML Schema. This option is available for `xs:redefine` components.

Optional

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `minOccurs` property is set to 0 and the `use` property for attributes is set to `optional`.

Unbounded

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `maxOccurs` property is set to `unbounded` and the `use` property for attributes is set to `required`.

Search

Can be performed on local elements or attributes. This action makes a reference to a global element or attribute.

Search References

Searches all references of the item found at current cursor position in the defined scope if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

Search Occurrences in File

Searches all occurrences of the item found at current cursor position in the current file.

Component Dependencies

Opens the [Component Dependencies view](#) that allows you to see the dependencies for the current selected component.

Resource Hierarchy

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the hierarchy for the current selected resource.

Flatten Schema

Recursively adds the components of included Schema files to the main one. It also flattens every imported XML Schema from the hierarchy.

Resource Dependencies

Allows you to see the dependencies for the current selected resource.

Expand All

Recursively expands all sub-components of the selected component.

Collapse All

Recursively collapses all sub-components of the selected component.

Save as Image

Save the diagram as image, in JPEG, BMP, SVG or PNG format.

Generate Sample XML Files

Generate XML files using the current opened schema. The selected component is the XML document root. See more in the [Generate Sample XML Files](#) section.

Options

Show the [Schema preferences panel](#).

XML Schema Components

A schema diagram contains a series of interconnected components. To quickly identify the relation between two connected components, the connection is represented as:

- A thick line to identify a connection with a required component (in the following image, `family` is a required element).

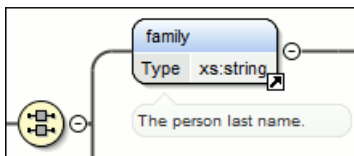


Figure 102: Example: Required Component

- A thin line to identify a connection with an optional component (in the following image, `email` is an optional element).




Figure 103: Example: Optional Component

The following topics explain in detail all available components and their symbols as they appear in an XML schema diagram.

`xs:schema`




Figure 104: The `xs:schema` Component

Defines the root element of a schema. A schema document contains representations for a collection of schema components, such as type definitions and element declarations, that have a common target namespace. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-schema>.

By default, it displays the `targetNamespace` property when rendered.

Table 8: *xs:schema* Properties

Property Name	Description	Possible Values
Target Namespace	The schema target namespace.	Any URI
Element Form Default	Determining whether or not local element declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Attribute Form Default	Determining whether or not local attribute declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Block Default	Default value of the <i>block</i> attribute of <i>xs:element</i> and <i>xs:complexType</i> .	#all, extension, restriction, substitution, restriction extension, restriction substitution, extension substitution, restriction extension substitution, [Empty].
Final Default	Default value of the <i>final</i> attribute of <i>xs:element</i> and <i>xs:complexType</i> .	#all, restriction, extension, restriction extension, [Empty].
Default Attributes	Specifies a set of attributes that apply to every complex Type in a schema document.	Any.
Xpath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
Version	Schema version	Any token.
ID	The schema ID	Any ID.
Component	The edited component name.	Not editable property.
SystemID	The schema system ID	Not editable property.

xs:elementFigure 105: The *xs:element* Component

Defines an element. An element declaration is an association of a name with a type definition, either simple or complex, an (optional) default value and a (possibly empty) set of identity-constraint definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-element>.

An element by default displays the following properties when rendered in the diagram: *default*, *fixed*, *abstract* and *type*. When referenced or declared locally, the element graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the element are drawn using dotted lines if the element is optional.

Table 9: *xs:element* Properties

Property Name	Description	Possible Values	Mentions
Name	The element name. Always required.	Any NCName for global or local elements, any <i>QName</i> for element references.	If missing, will be displayed as '[element]' in diagram.

Property Name	Description	Possible Values	Mentions
Is Reference	When set, the local element is a reference to a global element.	true/false	Appears only for local elements.
Type	The element type.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].	For all elements. For references, the value is set in the referenced element.
Base Type	The extended/restricted base type.	All declared or built-in types	For elements with complex type, with simple or complex content.
Mixed	Defines if the complex type content model will be mixed.	true/false	For elements with complex type.
Content	The content of the complex type.	simple/complex	For elements with complex type that extends/restricts a base type. It is automatically detected.
Content Mixed	Defines if the complex content model will be mixed.	true/false	For elements with complex type that has a complex content.
Default	Default value of the element. A default value is automatically assigned to the element when no other value is specified.	Any string	The fixed and default attributes are mutually exclusive.
Fixed	A simple content element may be fixed to a specific value using this attribute. A fixed value is also automatically assigned to the element and you cannot specify another value.	Any string	The fixed and default attributes are mutually exclusive.
Min Occurs	Minimum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements
Max Occurs	Maximum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements
Substitution Group	Qualified name of the head of the substitution group that this element belongs to.	All declared elements. For XML Schema 1.1 this property supports multiple values.	For global and reference elements

Property Name	Description	Possible Values	Mentions
Abstract	Controls whether or not the element may be used directly in instance XML documents. When set to true, the element may still be used to define content models, but it must be substituted through a substitution group in the instance document.	true/false	For global elements and element references
Form	Defines if the element is "qualified" (belongs to the target namespace) or "unqualified" (doesn't belong to any namespace).	unqualified/qualified	Only for local elements
Nilable	When this attribute is set to true, the element can be declared as nil using an <i>xsi:nil</i> attribute in the instance documents.	true/false	For global elements and element references
Target Namespace	Specifies the target namespace for local element and attribute declarations. The namespace URI may be different from the schema target namespace. This property is available for local elements only.	Not editable property.	For all elements.
Block	Controls if the element can be subject to a type or substitution group substitution. '#all' blocks any substitution, 'substitution' blocks any substitution through substitution groups and 'extension'/'restriction' block any substitution (both through <i>xsi:type</i> and substitution groups) by elements or types, derived respectively by extension or restriction from the type of the element. Its default value is defined by the <i>blockDefault</i> attribute of the parent <i>xs:schema</i> .	#all, restriction, extension,substitution, extension restriction, extension substitution, restriction substitution, restriction extension substitution	For global elements and element references

Property Name	Description	Possible Values	Mentions
Final	Controls whether the element can be used as the head of a substitution group for elements whose types are derived by extension or restriction from the type of the element. Its default value is defined by the <i>finalDefault</i> attribute of the parent <i>xs:schema</i> .	#all, restriction, extension, restriction extension, [Empty]	For global elements and element references
ID	The component ID.	Any ID	For all elements.
Component	The edited component name.	Not editable property.	For all elements.
Namespace	The component namespace.	Not editable property.	For all elements.
System ID	The component system ID.	Not editable property.	For all elements.

xs:attribute



Figure 106: The *xs:attribute* Component

Defines an attribute. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attribute>.

An attribute by default displays the following properties when rendered in the diagram: *default*, *fixed*, *use* and *type*. Connectors to the attribute are drawn using dotted lines if the attribute use is optional. The attribute name is stroked out if prohibited.

Table 10: *xs:attribute* Properties

Property Name	Description	Possible Value	Mentions
Name	Attribute name. Always required.	Any NCName for global/local attributes, all declared attributes' <i>QName</i> for references.	For all local or global attributes. If missing, will be displayed as '[attribute]' in the diagram.
Is Reference	When set, the local attribute is a reference.	true/false	For local attributes.
Type	Qualified name of a simple type.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for creating anonymous simple types more easily.	For all attributes. For references, the type is set to the referenced attribute.

Property Name	Description	Possible Value	Mentions
Default	Default value. When specified, an attribute is added by the schema processor (if it is missing from the instance XML document) and it is given this value. The default and fixed attributes are mutually exclusive.	Any string	For all local or global attributes. For references the value is from the referenced attribute.
Fixed	When specified, the value of the attribute is fixed and must be equal to this value. The default and fixed attributes are mutually exclusive.	Any string	For all local or global attributes. For references the value is from the referenced attribute.
Use	Possible usage of the attribute. Marking an attribute "prohibited" is useful to exclude attributes during derivations by restriction.	optional, required, prohibited	For local attributes
Form	Specifies whether or not the attribute is qualified (must have a namespace prefix in the instance XML document). The default value for this attribute is specified by the <i>attributeFormDefault</i> attribute of the <i>xs:schema</i> document element.	unqualified/qualified	For local attributes.
Inheritable	Specifies if the attribute is inheritable. Inheritable attributes can be used by <alternative> element on descendant elements.	true/false	For all local or global attributes. The default value is false. This property is available for XML Schema 1.1.
Target Namespace	Specifies the target namespace for local attribute declarations. The namespace URI may be different from the schema target namespace.	Any URI	Setting a target namespace for local attribute is useful only when restricts attributes of a complex type that is declared in other schema with a different target namespace. This property is available for XML Schema 1.1.
ID	The component ID.	Any ID	For all attributes.
Component	The edited component name.	Not editable property.	For all attributes.
Namespace	The component namespace.	Not editable property.	For all attributes.

Property Name	Description	Possible Value	Mentions
System ID	The component system ID.	Not editable property.	For all attributes.

xs:attributeGroup



Figure 107: The *xs:attributeGroup* Component

Defines an attribute group to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attributeGroup>.

Table 11: *xs:attributeGroup* Properties

Property Name	Description	Possible Values	Mentions
Name	Attribute group name. Always required.	Any NCName for global attribute groups, all declared attribute groups for reference.	For all global or referenced attribute groups. If missing, will be displayed as '[attributeGroup]' in diagram.
ID	The component ID.	Any ID	For all attribute groups.
Component	The edited component name.	Not editable property.	For all attribute groups.
Namespace	The component namespace.	Not editable property.	For all attribute groups.
System ID	The component system ID.	Not editable property.	For all attribute groups.

xs:complexType




Figure 108: The *xs:complexType* Component

Defines a top level complex type. Complex Type Definitions provide for: See more data at <http://www.w3.org/TR/xmlschema11-1/#element-complexType>.

- Constraining element information items by providing Attribute Declarations governing the appearance and content of attributes.
- Constraining element information item children to be empty, or to conform to a specified element-only or mixed content model, or else constraining the character information item children to conform to a specified simple type definition.
- Using the mechanisms of Type Definition Hierarchy to derive a complex type from another simple or complex type.
- Specifying post-schema-validation info set contributions for elements.
- Limiting the ability to derive additional types from a given complex type.
- Controlling the permission to substitute, in an instance, elements of a derived type for elements declared in a content model to be of a given complex type.

Tip: A complex type that is a base type to another type will be rendered with yellow background.

Table 12: *xs:complexType* Properties

Property Name	Description	Possible Values	Mentions
Name	The name of the complex type. Always required.	Any NCName	Only for global complex types. If missing, will be displayed as '[complexType]' in diagram.
Base Type Definition	The name of the extended/restricted types.	Any from the declared simple or complex types.	For complex types with simple or complex content.
Derivation Method	The derivation method.	restriction/ extension	Only when base type is set. If the base type is a simple type, the derivation method is always extension.
Content	The content of the complex type.	simple/ complex	For complex types that extend/restrict a base type. It is automatically detected.
Content Mixed	Specifies if the complex content model will be mixed.	true/false	For complex contents.
Mixed	Specifies if the complex type content model will be mixed.	true/false	For global and anonymous complex types.
Abstract	When set to <i>true</i> , this complex type cannot be used directly in the instance documents and needs to be substituted using an <i>xsi:type</i> attribute.	true/false	For global and anonymous complex types.
Block	Controls if a substitution (either through a <i>xsi:type</i> or substitution groups) can be performed for a complex type, which is an extension or a restriction of the current complex type. This attribute can only block such substitutions (it cannot "unblock" them), which can also be blocked in the element definition. The default value is defined by the <i>blockDefault</i> attribute of <i>xs:schema</i> .	all, extension, restriction, extension restriction, [Empty]	For global complex types.
Final	Controls whether the complex type can be further derived by extension or restriction to create new complex types.	all, extension, restriction, extension restriction, [Empty]	For global complex types.

Property Name	Description	Possible Values	Mentions
Default Attributes Apply	The <i>schema</i> element can carry a <i>defaultAttributes</i> attribute, which identifies an attribute group. Each <i>complexType</i> defined in the schema document then automatically includes that attribute group, unless this is overridden by the <i>defaultAttributesApply</i> attribute on the <i>complexType</i> element.	true/false	This property is available only for XML Schema 1.1.
ID	The component ID.	Any ID	For all complex types.
Component	The edited component name.	Not editable property.	For all complex types.
Namespace	The component namespace.	Not editable property.	For all complex types.
System ID	The component system ID.	Not editable property.	For all complex types.

xs:simpleType



Figure 109: The *xs:simpleType* Component

Defines a simple type. A simple type definition is a set of constraints on strings and information about the values they encode, applicable to the normalized value of an attribute information item or of an element information item with no element children. Informally, it applies to the values of attributes and the text-only content of elements. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-simpleType>.

Tip: A simple type that is a base type to another type will be rendered with yellow background.

Table 13: *xs:simpleType* Properties

Name	Description	Possible Values	Scope
Name	Simple type name. Always required.	Any NCName.	Only for global simple types. If missing, will be displayed as '[simpleType]' in diagram.
Derivation	The simple type category: restriction, list or union.	restriction,list or union	For all simple types.
Base Type	A simple type definition component. Required if derivation method is set to restriction.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to restriction.

Name	Description	Possible Values	Scope
Item Type	A simple type definition component. Required if derivation method is set to list.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to list. Derivation by list is the process of transforming a simple datatype (named the item type) into a whitespace-separated list of values from this datatype. The item type can be defined inline by adding a simpleType definition as a child element of the list element, or by reference, using the itemType attribute (it is an error to use both).
Member Types	Category for grouping union members.	Not editable property.	For global and anonymous simple types with the derivation method set to union.
Member	A simple type definition component. Required if derivation method is set to union.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to union. Deriving a simple datatype by union merges the lexical spaces of several simple datatypes (called member types) to create a new simple datatype. The member types can be defined either by reference (through the memberTypes attribute) or embedded as simple datatype local definitions in the xs:union element. Both styles can be mixed.
Final	Blocks any further derivations of this datatype (by list, union, derivation or all).	#all, list, restriction, union, list restriction, list union, restriction union. In addition, [Empty] proposal is present for set empty string as value.	Only for global simple types.
ID	The component ID.	Any ID.	For all simple types
Component	The name of the edited component.	Not editable property.	Only for global and local simple types
Namespace	The component namespace.	Not editable property.	For global simple types.

Name	Description	Possible Values	Scope
System ID	The component system ID.	Not editable property.	Not present for built-in simple types..

xs:alternative

The *type alternatives* mechanism allows you to specify type substitutions on an element declaration.

Note: *xs:alternative* is available for XML Schema 1.1.




Figure 110: The *xs:alternative* Component

Table 14: *xs:alternative* Properties

Name	Description	Possible Values
Type	Specifies type substitutions for an element, depending on the value of the attributes.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	Specifies the type of XML schema component.	Not editable property.
System ID	Points to the document location of the schema.	Not editable property.

xs:group



Figure 111: The *xs:group* Component

Defines a group of elements to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-group>.

When referenced, the graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the group are drawn using dotted lines if the group is optional.

Table 15: *xs:group* Properties

Property Name	Description	Possible Values	Mentions
Name	The group name. Always required.	Any NCName for global groups, all declared groups for reference.	If missing, will be displayed as '[group]' in diagram.
Min Occurs	Minimum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
Max Occurs	Maximum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
ID	The component ID.	Any ID	For all groups.
Component	The edited component name.	Not editable property.	For all groups.
Namespace	The component namespace.	Not editable property	For all groups.
System ID	The component system ID.	Not editable property.	For all groups.

xs:include




Figure 112: The *xs:include* Component

Adds multiple schemas with the same target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-include>.

Table 16: *xs:include* properties

Property Name	Description	Possible Values
Schema Location	Included schema location.	Any URI
ID	Include ID.	Any ID
Component	The component name.	Not editable property.

xs:import




Figure 113: The *xs:import* Component

Adds multiple schemas with a different target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-import>.

Table 17: *xs:import* Properties

Property Name	Description	Possible Values
Schema Location	Imported schema location	Any URI
Namespace	Imported schema namespace	Any URI

Property Name	Description	Possible Values
ID	Import ID	Any ID
Component	The component name	Not editable property.

xs:redefine



Figure 114: The *xs:redefine* Component

Redefines simple and complex types, groups, and attribute groups from an external schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-redefine>.

Table 18: *xs:redefine* Properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID
Component	The component name.	Not editable property.

xs:override



Figure 115: The *xs:override* Component

The override construct allows replacements of old components with new ones without any constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-override>.

Table 19: *xs:override* Properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID

xs:notation



Figure 116: The *xs:notation* Component

Describes the format of non-XML data within an XML document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-notation>.

Table 20: *xs:notation* Properties

Property Name	Description	Possible values	Mentions
Name	The notation name. Always required.	Any NCName.	If missing, will be displayed as '[notation]' in diagram.
System Identifier	The notation system identifier.	Any URI	Required if public identifier is absent (otherwise, optional).

Property Name	Description	Possible values	Mentions
Public Identifier	The notation public identifier.	A Public ID value	Required if system identifier is absent (otherwise, optional).
ID	The component ID.	Any ID	For all notations.
Component	The edited component name.	Not editable property.	For all notations.
Namespace	The component namespace.	Not editable property.	For all notations.
System ID	The component system ID.	Not editable property.	For all notations.

xs:sequence / xs:choice / xs:all



Figure 117: xs:sequence

xs:sequence specifies that the child elements must appear in a sequence. Each child element can occur from 0 to any number of times. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-sequence>.



Figure 118: xs:choice

xs:choice allows only one of the elements contained in the declaration to be present within the containing element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-choice>.



Figure 119: xs:all

xs:all specifies that the child elements can appear in any order. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-all>.

The compositor graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the compositor are drawn using dotted lines if the compositor is optional.

Table 21: xs:sequence, xs:choice, xs:all Properties

Property Name	Description	Possible Values	Mentions
Compositor	Compositor type.	sequence, choice, all.	'all' is only available as a child of a group or complex type.
Min Occurs	Minimum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
Max Occurs	Maximum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
ID	The component ID.	Any ID	For all compositors.
Component	The edited component name.	Not editable property.	For all compositors.

Property Name	Description	Possible Values	Mentions
System ID	The component system ID.	Not editable property.	For all compositors.

xs:any



Figure 120: The xs:any Component

Enables the author to extend the XML document with elements not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-any>.

The graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the wildcard are drawn using dotted lines if the wildcard is optional.

Table 22: xs:any Properties

Property Name	Description	Possible Values
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
notNamespace	Specifies the namespace that extension elements or attributes cannot come from.	##local, ##targetNamespace
notQName	Specifies an element or attribute that is not allowed.	##defined
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
Min Occurs	Minimum occurrences of any	A numeric positive value. Default is 1.
Max Occurs	Maximum occurrences of any	A numeric positive value. Default is 1.
ID	The component ID.	Any ID.
Component	The name of the edited component.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:anyAttribute




Figure 121: The xs:anyAttribute Component

Enables the author to extend the XML document with attributes not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-anyAttribute>.

Table 23: *xs:anyAttribute* Properties

Property Name	Description	Possible Value
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
ID	The component ID.	Any ID.
Component	The name of the edited component.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:unique




Figure 122: The *xs:unique* Component

Defines that an element or an attribute value must be unique within the scope. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-unique>.

Table 24: *xs:unique* Properties

Property Name	Description	Possible Values
Name	The unique name. Always required.	Any NCName.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:key




Figure 123: The *xs:key* Component

Specifies an attribute or element value as a key (unique, non-nullable and always present) within the containing element in an instance document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-key>.

Table 25: *xs:key* Properties

Property Name	Description	Possible Value
Name	The key name. Always required.	Any NCName.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:keyRef




Figure 124: The *xs:keyRef* Component

Specifies that an attribute or element value corresponds to that of the specified key or unique element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-keyref>.

A keyref by default displays the *Referenced Key* property when rendered.

Table 26: *xs:keyRef* Properties

Property Name	Description	Possible Values
Name	The keyref name. Always required.	Any NCName.
Referenced Key	The name of referenced key.	any declared element constraints.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:selector



Figure 125: The *xs:selector* Component

Specifies an XPath expression that selects a set of elements for an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-selector>.

Table 27: *xs:selector* Properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the element that the constraint applies to.	An XPath expression.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:field



Figure 126: The *xs:field* Component

Specifies an XPath expression that specifies the value used to define an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-field>.

Table 28: *xs:field* Properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the field(s) composing the key, key reference, or unique constraint.	An XPath expression.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:assert

Assertions provide a flexible way to control the occurrence and values of elements and attributes available in an XML Schema.

Note: *xs:assert* is available for XML Schema 1.1.




Figure 127: The *xs:assert* Component

Table 29: *xs:assert* Properties

Property Name	Description	Possible Values
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:openContentFigure 128: The *xs:openContent* Component

The *openContent* element enables instance documents to contain extension elements to be inserted amongst the elements declared by the schema. You can declare open content for your elements at one place (within the *complexType* definition) or at the schema level.

For further details about the *openContent* component, go to <http://www.w3.org/TR/xmlschema11-1/#element-openContent>.

Table 30: *xs:openContent* Properties

Property Name	Description	Possible Value
Mode	Specifies where the extension elements can be inserted.	The value can be: "interleave", "suffix" or "none". The default value is "interleave".
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

Note: This component is available for XML Schema 1.1 only. To change the version of the XML Schema, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema**.

Constructs Used to Group Schema Components

This section explains the components that can be used for grouping other schema components:

- [Attributes](#)
- [Constraints](#)

- [Substitutions](#)

Attributes




Figure 129: Attributes Construct

Groups all attributes and attribute groups belonging to a complex type.

Table 31: *attributes* Properties

Property Name	Description	Possible Values
Component	The element for which the attributes are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Constraints




Figure 130: Constraints Construct

Groups all constraints ([xs:key](#), [xs:keyRef](#) or [xs:unique](#)) belonging to an element.

Table 32: *constraints* Properties

Property Name	Description	Possible Values
Component	The element for which the constraints are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Substitutions

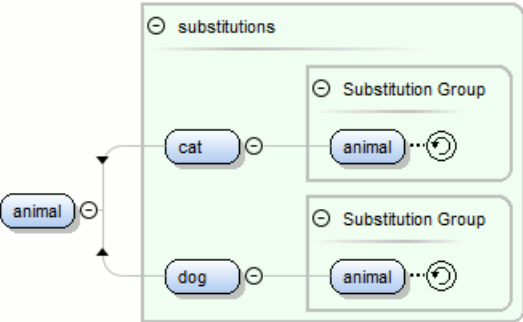


Figure 131: Substitutions Construct

Groups all elements that can substitute the current element.

Table 33: *substitutions* Properties

Property Name	Description	Possible Values
Component	The element for which the substitutions are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Schema Validation

Validation for the **Design** mode is seamlessly integrated in the Oxygen XML Developer [XML documents validation](#) capability.

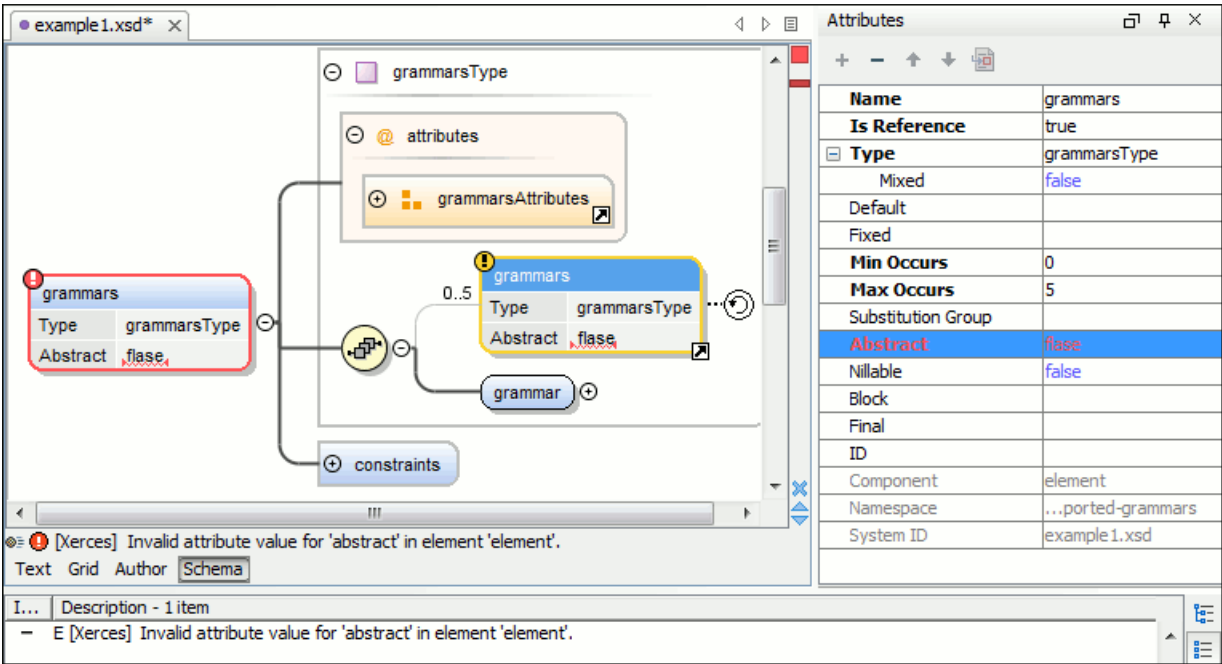


Figure 132: XML Schema Validation

A schema validation error is presented by highlighting the invalid component:

- In the [Attributes View](#).
- In the diagram by surrounding the component that has the error with a red border.
- A marker on the errors stripe at the right of the diagram view.
- A status label with a red icon (❗) below the diagram view.

Invalid facets for a component are highlighted in the [Facets View](#).

Components with invalid properties are rendered with a red border. This is a default color, but you can customize it in the [Document checking user preferences](#). When hovering an invalid component, the tooltip will present the validation errors associated with that component.

When editing a value that is supposed to be a qualified or unqualified XML name, the application provides automatic validation of the entered value. This proves to be very useful in avoiding setting invalid XML names for the given property.

If you validate the entire schema using the  **Validate** action from the **Document > Validate** menu or from the  **Validation** toolbar drop-down menu, all validation errors will be presented in the **Errors** tab. To resolve an error, just click it (or double-click for errors located in other schemas) and the corresponding schema component will be displayed as the diagram root so that you can easily correct the error.

Important: If the schema imports only the namespace of other schema without specifying the schema location and a [catalog is set-up](#) that maps the namespace to a certain location both the validation and the diagram will correctly identify the imported schema.

Tip: If the validation action finds that the schema contains unresolved references, the application will suggest the use of validation scenarios, but only if the current edited schema is an XML Schema module.

Edit Schema Namespaces

You can use the **XML Schema Namespaces** dialog box to easily set a target namespace and define namespace mappings for a newly created XML Schema. In the **Design** mode these namespaces can be modified anytime by choosing **Edit Schema Namespaces** from the contextual menu. You can also do this by double-clicking the schema root in the diagram.

The **XML Schema Namespaces** dialog box allows you to edit the following information:

- **Target namespace** - The target namespace of the schema.
- **Prefixes** - The dialog box displays a table with namespaces and the mapped prefixes. You can add a new prefix mapping or remove an already existing one.

Working with Documents

Topics:

- [Getting Familiar with the Interface](#)
- [Creating and Working with Documents](#)
- [Simple Text Editor](#)
- [Using Projects to Group Documents](#)
- [Searching Documents](#)
- [Finding and Replacing Text](#)
- [Spell Checking](#)
- [Working with Special Characters](#)
- [Loading Large Documents](#)
- [Documents with Long Lines](#)
- [Handling Read-Only Files](#)
- [Scratch Buffer](#)
- [Compare Files or Directories](#)
- [Viewing Status Information](#)
- [Editor Highlights](#)
- [Printing a Document](#)

Oxygen XML Developer includes a variety of general features that can be used when working with any type of document. More specialized features are available when working with specific type of documents, such as the various types of XML documents, CSS, JavaScript, Markdown, and more. For details about those specialized features for specific types of documents, see [Editing Specific Document Types](#) on page 359.

This chapter includes information about how to create and work with documents, working with projects, and various editing features that are provided in Oxygen XML Developer for all document types. This chapter also includes information about some of the special tools that are included in Oxygen XML Developer, such as the file and directory comparison tools.

Getting Familiar with the Interface

Oxygen XML Developer includes several [perspectives](#) and [editing modes](#) to help you accomplish a wide range of tasks. Each *perspective* and editing mode also includes a large variety of helper view, menu actions, toolbars, and contextual menu functions.

There are various ways that you can [configure the layout of the views or editors](#), and you can [customize the toolbars](#).

Regardless of the [perspective](#) or [editing mode](#) that you are working with, the default layout consists of the following areas:

Menus

Menu driven access to all the features and functions available in Oxygen XML Developer. Most of the menus are common for all types of documents, but Oxygen XML Developer also includes some context-sensitive and *framework*-specific menus and actions that are only available for a specific context or type of document.

Toolbars

Easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function. Some of the toolbars are common for all *perspectives*, editing modes, and types

of documents, while others are specific to the particular *perspective* or mode. Some toolbars are also *framework*-specific, depending on the type of document that is being edited. All the [toolbars can be configured](#) to suit your specific needs.

Helper Views

Oxygen XML Developer includes a large variety of [dockable](#) views to assist you with editing, viewing, searching, validating, transforming, and organizing your documents. Many of the views also contain useful contextual menu actions, toolbar buttons, or menus. The most commonly used views for each *perspective* and editing mode are displayed by default and you can choose to display others to suit your specific needs. The [layout of the views can also be configured](#) according to your preferences.

Editor Pane

The main editing area in the center of the application. Each [editing mode](#) provides a main editor pane where you spend most of your time reading, editing, applying markup, and validating your documents. The editor pane in each [editing mode](#) also includes a variety of contextual menu actions and other features to help streamline your editing tasks. Each file that has been opened has a tab at the top of the editing pane and there are [several ways to switch between tabs or move them](#).

Perspectives

Oxygen XML Developer includes [several different perspectives](#) that you can use to work with your documents. The **Editor** *perspective* is the most commonly used *perspective* used for displaying and editing the content of your XML documents, and it is the default *perspective* when you start Oxygen XML Developer for the first time. Oxygen XML Developer also includes a **Database** *perspective* that allows you to manage databases and their connections and a few debugging *perspectives* that allow you to detect problems in XSLT or XQuery transformations.

Status Bar

The status bar at the bottom of the application contains some useful information when you are working with documents. It includes the following information, in the order it is displayed from left to right:

- The path of the current document.
- The [Unicode value](#) for the character directly to the right of the current cursor position.
- The status of the current document. The status of **Modified** is displayed for documents that have not yet been saved. Otherwise, this section is left blank.
- In [Text editing mode](#), the current line and character position is displayed.
- If the [Check for notifications option](#) is selected, this section will show you when new messages have been received. The types of messages include the addition of new videos on the Oxygen XML Developer website, the announcement of upcoming webinars and conferences where the Oxygen XML Developer team will participate, and more.
- The memory consumption, including the memory used by the application and the maximum amount that is allocated to the application.
- If the [Show memory status option](#) is selected, a  **Free unused memory** icon is displayed in the bottom-right corner and you can use this icon to free up unused memory.

Configuring the Layout of the Views and Editors

All the Oxygen XML Developer views available in the [Editor](#), [XSLT Debugger](#), and [XQuery Debugger perspectives](#) are [dockable](#) and there are various ways to configure and arrange the layout of the views and editing panes. You can also [configure the layout of the toolbars](#).

To open a view, select it from the **Window > Show View** menu. You can hide a view by closing it with the  button at the top-right corner of the view, or with the **Window > Hide current view** action.

Arranging the Layout

You can drag any view to any margin of another view or editor inside the Oxygen XML Developer window. Once you create a layout that suites your needs, you can save it from **Window > Export Layout**. Oxygen XML Developer creates a layout file containing the preferences of the saved layout. To load a layout, go to **Window > Load Layout**. To reset it, select **Window > Reset Layout**.

Note: The **Load Layout** menu lets you select between the default layout, a predefined layout, or a custom layout. The changes you make using the **Load Layout** menu are also reflected in the **Application Layout** preferences page.

The changes you make to any layout are preserved between working sessions. The predefined layout files are saved in the [preferences directory](#) of Oxygen XML Developer.

To gain more editing space in the Oxygen XML Developer window, click  **Toggle auto-hide** in any view. This button sets the view in the *auto-hide* state, making it visible only as a vertical tab, at the margins of the Oxygen XML Developer window. To display a view in the *auto-hide* state, hover its side-tab with your cursor, or click it to keep the view visible until you click elsewhere. A view can also be set to a floating state by using the **Toggle floating** action, making it independent from the rest of the Oxygen XML Developer window.

You can drag the editors and arrange them in any order, both horizontally and vertically.

The following image presents two editors arranged as horizontal tiles. To arrange them vertically, drag one of them on top of the other. In this example, the `personal.xml` file was dragged over the `personal-schema.xml` file. When doing this, a dark gray rectangle marks the rearranged layout.

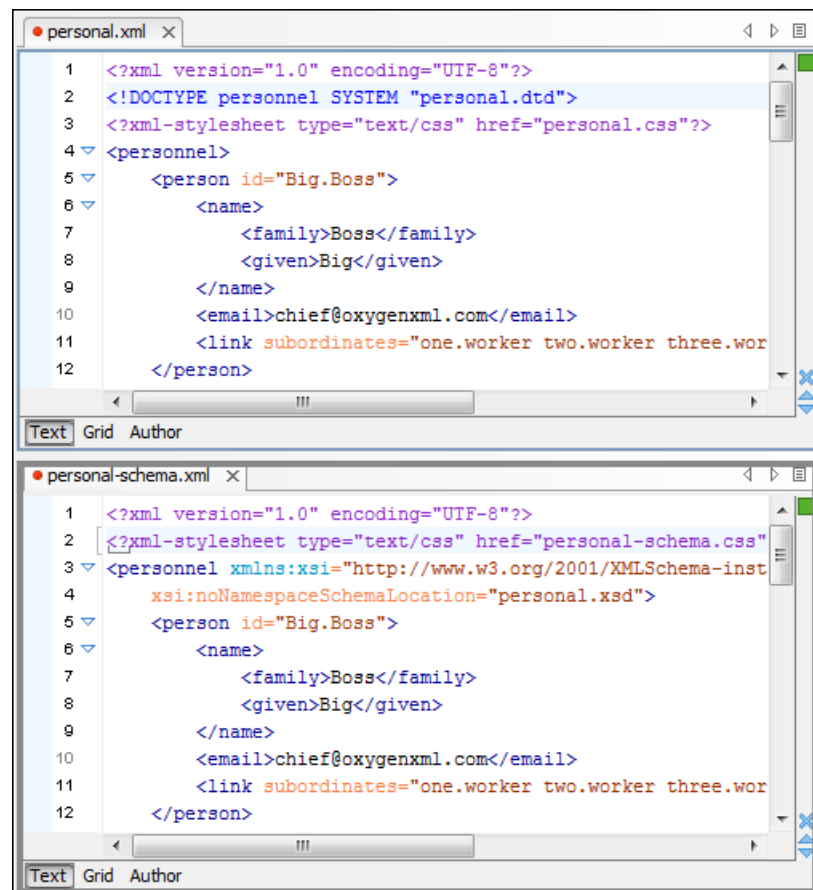


Figure 133: Drag and Drop Editors

Tile/Stack Editor Actions

You can also tile or stack all open editors, both in the [Editor perspective](#) or in the [Database perspective](#), using the following actions from the **Editor** toolbar or **Window** menu:

Tile Editors Horizontally

Splits the editing area into horizontal tiles, one for each open file.

Tile Editors Vertically

Splits the editing area into vertical tiles, one for each open file.

Stack Editors

The reverse of the **Tile Editors Horizontally/Vertically** actions. Stacks all open editors.

Synchronous Scrolling

Select this action to scroll through the tiled editors at the same time.

Note: When tiled, you can still drag and drop the editors, but note that they are docked in the same way as a window/view (instead of just tabs). You are actually rearranging the editor windows, so drag the editor tab and drop it to one of the sides of an editor (left/right/top/bottom). While dragging, you will see the dark gray rectangle aligned to one of the sides of the editor, or around the entire editor window. If you drop it to one of the sides it will dock to that side of the editor. If you drop it when the rectangle is around the entire window of the editor it will get stacked on top of that editor. You can also grab one of the stacked editors and tile it to one of the sides.

Split Editor Actions

You can divide the editing area vertically and horizontally using the following actions available in the **Editor** toolbar and **Window** menu:

-  **Split Editor Horizontally** - Splits the editor horizontally. This is useful for comparing and merging content between two documents.
-  **Split Editor Vertically** - Splits the editor vertically. This is useful for comparing and merging content between two documents.
-  **Unsplit Editor** - Removes a split action on the editing area.

To maximize or restore the editors, go to **Window > Maximize/Restore Editor Area**.

Switch or Move Editor Tabs

Each file that has been opened has a tab at the top of the editing pane and there are several ways to switch between tabs or move them.

Switching Editor Tabs

You can switch between editor tabs by using any of the following methods:

Mouse and Scroll Wheel

Of course, you can switch to a different editor tab by left-clicking the tab with your mouse, but when there are too many tabs opened to fit on the screen, you can hover over the tab stripe and use the scroll wheel on your mouse to scroll to the left or right (same as using the two arrows on the far-right of the tab stripe).

Buttons on the Far-Right of the Tab Stripe (◀▶⌵)

You can use the arrow buttons (◀▶) on the right side of the tab stripe to scroll to the left or right and the  **Show List** button opens a pop-up window that displays all the opened file tabs and allows you to select and switch to a specific opened file.

Ctrl + Tab (Command + Tab on OS X) [NOTE: Ctrl + Page Down (Ctrl + Alt + Right Arrow on OS X) does the same]

Switches to the next opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Ctrl + Shift + Tab (Command + Shift + Tab on OS X) [NOTE: Ctrl + Page Up (Ctrl + Alt + Left Arrow on OS X) does the same]

Switches to the previous opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Window > Switch editor tab (Ctrl + F9 (Command + F9 on OS X))

This action opens a dialog box that allows you to switch to a particular editor tab by selecting it from a filterable list. This is especially helpful when you have a large amount of file tabs opened and you want to switch to a certain tab this is not shown on the screen. It includes a search filter field and several options to help you find specific opened file tabs.

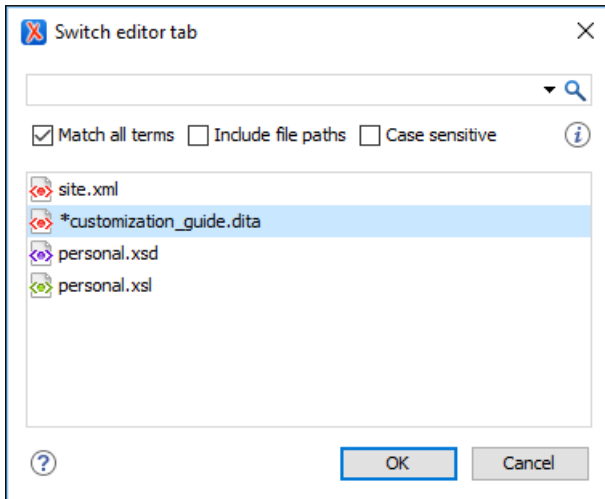


Figure 134: Switch Editor Tab Dialog Box

The **Switch Editor Tab** dialog box contains the following options and features:

Search Filter

You can enter text in the filter field at the top of the dialog box to filter the list and search for specific opened files. You can enter any number of terms, separated by space, and wildcards are allowed (for example, * to match any sequence of characters or ? to match a single character). This field also has a history drop-down that allows you to select previously used search terms.

Match all terms

If this option is selected, only the files that match all of your search terms will be displayed. If you use a wildcard in the search filter, this option is automatically disabled.

Include file paths

If this option is selected, the search is expanded to include file paths, and also the paths are displayed in this dialog box.

Case sensitive

If this option is selected, the search operation will be case-sensitive.

List of Opened File Tabs

All files that are currently opened are displayed in the main pane of the dialog box. Files that have been modified but not yet saved are prefixed by an asterisk. To switch to a particular file tab, double-click the file or select it and click **OK**.

Moving Editor Tabs

You can move editor tabs by using any of the following methods:

Mouse Drag

You can use your mouse to drag editor tabs to a new location on the tab stripe.

Ctrl + Alt + Comma

Moves the current file tab one position to the left.

Ctrl + Alt + Period

Moves the current file tab one position to the right.

For more information about configuring the interface of Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/anwjepfAdEk>

Related Information:

[Configuring Toolbars](#) on page 149

Configuring Toolbars

You can configure the toolbars in Oxygen XML Developer to personalize the interface for your specific needs. You can choose which toolbars to show or hide in the current editor mode (**Text**, **Design**, or **Grid**) and in the current *perspective* (**Editor**, **XSLT Debugger**, **XQuery Debugger**, or **Database**). You can also choose which actions to display in each toolbar, add actions to toolbars, and customize the layout of the toolbars.

To configure the toolbars, open the **Configure Toolbars** dialog box by doing one of the following:

- Right-click any toolbar and select **Configure Toolbars**.
- Select **Configure Toolbars** from the **Window** menu.

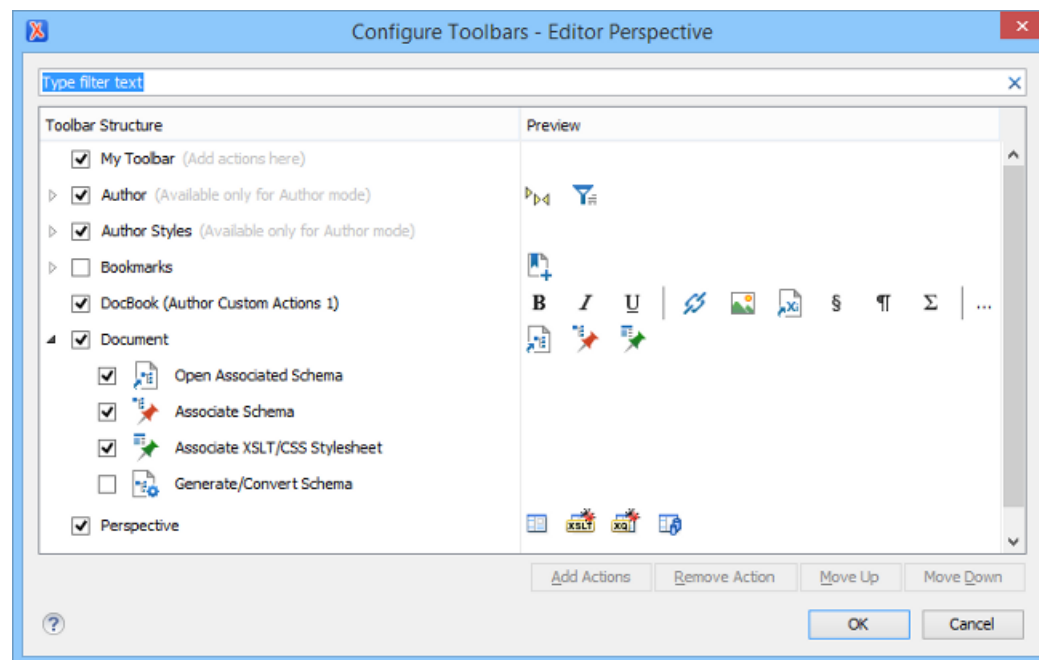


Figure 135: Configure Toolbars Dialog Box

The **Configure Toolbars** dialog box provides the following features:

Filter Text Box

You can use the filter text box at the top of the dialog box to search for a specific toolbar or action.

Show or Hide Toolbars

You can choose whether to show or hide a toolbar by using the checkbox next to the toolbar name. This checkbox is only available for toolbars that are available for the current *perspective* and editing mode.

Show or Hide Actions in a Toolbar

To show or hide actions in a toolbar, expand it by clicking the arrow next to the toolbar name, then use the checkbox to select or deselect the appropriate actions. The toolbar configuration changes in the **Preview** column according to your changes.

Add Actions to a Toolbar

Use the **Add Actions** button to open the **Add Actions** dialog box that displays all the actions that can be added to any of the toolbars, with the exception of those that are contributed from *frameworks* or 3rd party *plugins*.

Remove Actions from a Toolbar

You can remove actions that you have previously added to toolbars by using the **Remove Action** button.

Move Actions in a Toolbar

Use the **Move Up** and **Move Down** actions to change the order of the actions in a toolbar.


The **Configure Toolbars** dialog box also provides a variety of other ways to customize the layout in Oxygen XML Developer.

Customize My Toolbar

You can customize the **My Toolbar** to include your most commonly used actions. By default, this toolbar is listed first. Also, it is hidden until you add actions to it and you can easily hide it with the **Hide "My Toolbar" Toolbar** action that is available when you right-click anywhere in the toolbar area.

Drop-down Menu Actions

Composite actions that are usually displayed as a drop-down menu can only be selected in one toolbar at a time. These actions are displayed in the **Configure Toolbars** dialog box with the name in brackets.



Configure External Tools Action

There is a  **Configure external tools** composite action that appears in the toolbar called **Tools**. It is a drop-down menu that contains any external tools that are configured in the **External Tools** preferences page.

Note: If no external tools are configured, this drop-down menu is not shown in the toolbar.

Additional actions are available from the **Window** menu or contextual menu when invoked from a toolbar that allows you to further customize your layout. These actions include:

Reset Toolbars

To reset the layout of toolbars to the default setting, select the **Reset Toolbars** action from the contextual menu or **Window** menu.

Reset Layout

To reset the entire layout (including toolbars, editing modes, views, etc.) to the default setting, select **Reset Layout** from the contextual menu or **Window** menu.

Export Layout

You can use the **Export Layout** action that is available in the **Window** menu to export the entire layout of the application to share it with other users.

Hide Toolbars

You can use the **Hide Toolbar** action from the contextual menu to easily hide a displayed toolbar. When you right-click a toolbar it will be highlighted to show you which actions are included in that toolbar.

Related Information:

[Configuring the Layout of the Views and Editors](#) on page 146

Creating and Working with Documents

Oxygen XML Developer includes various features, actions, and wizards to assist you with creating new files and working with existing files. This section explains many of these features, including information on creating new documents, opening, saving, and closing existing files, searching documents, viewing file properties, and more.

Creating New Documents and Templates

Oxygen XML Developer includes a helpful **New Document** wizard that allows you to customize and create new files from a large list of document types and predefined templates. You can also create your own templates and share them with others.

New Document Wizard

Oxygen XML Developer supports a wide range of document types. The **New Document** wizard presents the default associations between a file extension and the type of editor that opens the file. To customize these default associations, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **File Types**.

The **New Document** wizard creates a skeleton document that may contain a root element, the document prolog, and possibly other child elements depending on options that are specific for each schema type. You can also [create your own custom document templates](#) and select them from this wizard.

New Document Wizard

To create a new document using this wizard, follow these steps:

1. Click the  **New** button on the toolbar or select **File > New**.

Result: The **New Document** wizard is displayed:

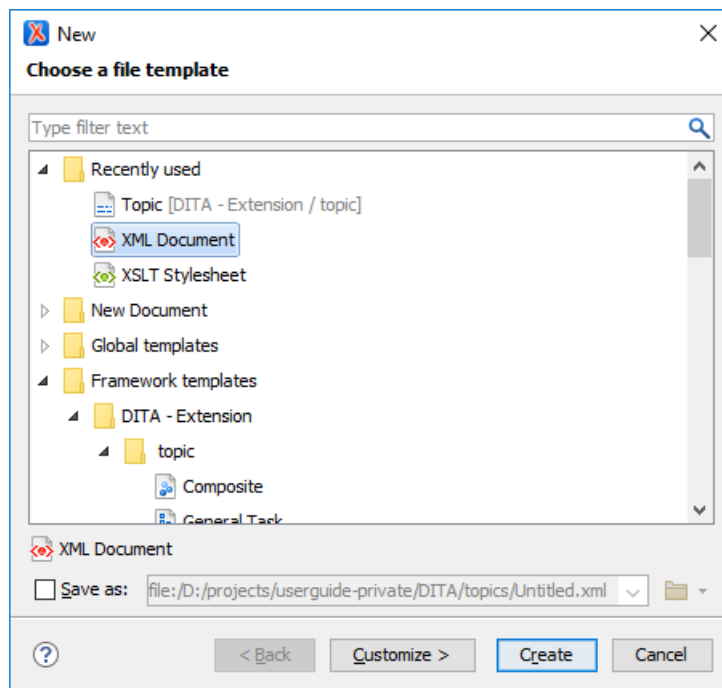


Figure 136: New Document Wizard

The first page of the wizard displays the supported document types and groups them in the following categories:

- **Recently Used** - Contains the list of the most recently used file types.
 - **New Document** - Contains the list of all supported document types. This list includes XML, XSL, XML Schema, Document Type Definition, Relax NG Schema, XQuery, web Services Definition Language, Schematron Schema, CSS, Text, PHP, JavaScript, Java, C, C++, Batch, Shell, Properties, SQL, *XML Catalog*, PERL, and more.
 - **Global Templates** - Contains the list of predefined templates as well as user-defined custom templates. You can [create your own custom document templates](#) and add them to the templates folder of the Oxygen XML Developer installation directory.
 - **Framework Templates** - Contains the list of templates defined in the [Document Type configuration dialog box \(Templates tab\)](#) for each *framework*.
 - **User-defined template directory** - You can add your own custom templates by [creating template files](#) in a directory and then add that directory to the list of template directories that Oxygen XML Developer uses in the [Document Templates preferences page](#). This user-defined directory will also appear in the **New Document** wizard.
2. Select the type of document that you want to create.
Tip: You can use the text filter field at the top of the dialog box to search for a specific template.
 3. If you want to change the default name and path of the file, select the **Save as** option and specify the file path (the [Show "Save as" option to save newly created documents in the "New" document wizard option](#) must be selected in the **Open/Save** preferences page). Otherwise, the file will be opened in a new tab with a default *untitled* name and the document path will not yet exist until you save it.
Note: For DITA documents, the dialog box includes some additional options for generating a title, file name, and root ID attribute.
 4. If you want to use the default settings in the creation process, select **Create** at the bottom of the dialog box.

Result: The document is created using the default settings and the new file is opened in the appropriate editor.

5. If you want to configure properties before creating the file, select **Customize**. This action is available for XML, XML Schema, Schematron, and XSL documents.

Result: A new file configuration dialog box is opened that allows you to customize various options, depending on the document type you selected. After configuring the options in this wizard, click **Create** to create the file and open it in the appropriate editor.

XML Document Configuration Page

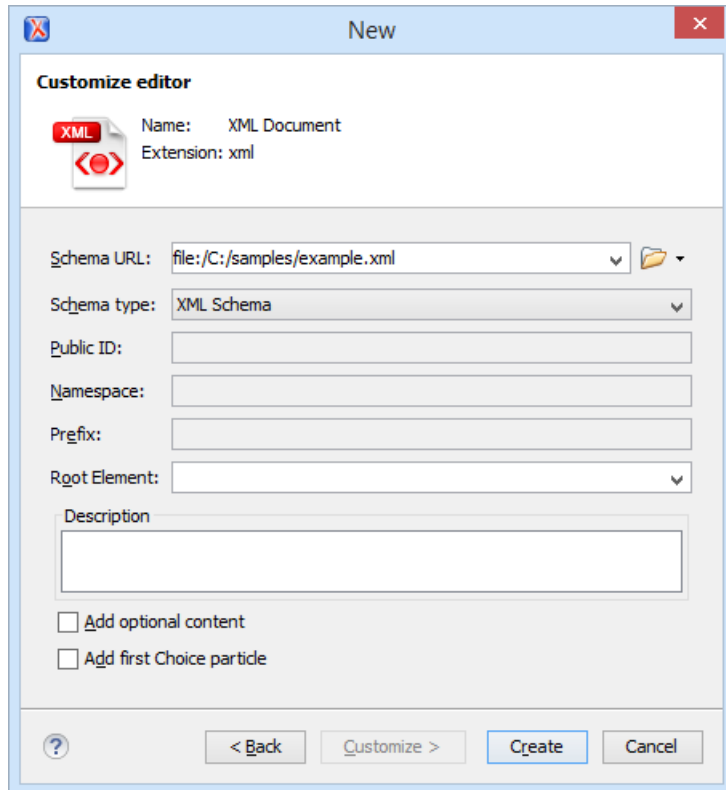


Figure 137: New XML Document Configuration Wizard Page

If you selected  **XML Document** for the type of file you want to create and selected the **Customize** option, the configuration dialog box will include the following options:

- **Schema URL** - Specifies the path to the schema file. When you select a file, Oxygen XML Developer analyzes its content and tries to fill in the rest of the dialog box.
- **Schema Type** - Allows you to select the schema type. The following options are available: XML Schema, DTD, RelaxNG XML syntax, RelaxNG compact syntax, and NVDL.
- **Public ID** - Specifies the PUBLIC identifier declared in the document prolog.
- **Namespace** - Specifies the document namespace.
- **Prefix** - Specifies the prefix for the namespace of the document root.
- **Root Element** - Populated with elements defined in the specified schema, enables selection of the element used as document root.
- **Description** - A small description of the selected document root.
- **Add Optional Content** - If you select this option, the elements and attributes defined in the XML Schema as optional are generated in the skeleton XML document.
- **Add First Choice Particle** - If you select this option, Oxygen XML Developer generates the first element of an `xs:choice` schema element in the skeleton XML document. Oxygen XML Developer creates this document in a new editor panel when you click **OK**.

XSLT Document Configuration Page

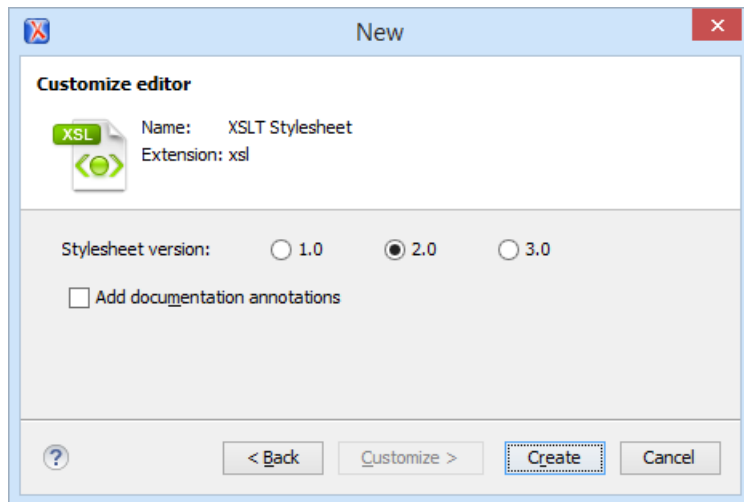


Figure 138: New XSLT Stylesheet Configuration Wizard Page

If you selected **XSLT Stylesheet** for the type of file you want to create and selected the **Customize** option, the configuration dialog box will include the following options:

- **Stylesheet version** - Allows you to select the Stylesheet version number. You can select from: 1 . 0, 2 . 0, and 3 . 0.
- **Add documentation annotations** - Select this option to generate the stylesheet annotation documentation.

XML Schema Document Configuration Page

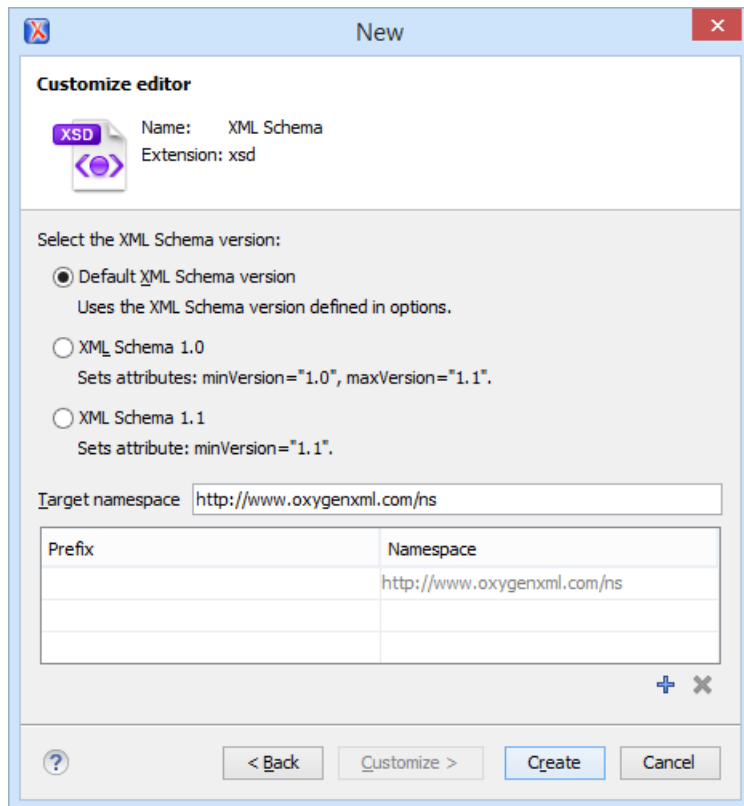


Figure 139: New XML Schema Configuration Wizard Page

If you selected **XML Schema** for the type of file you want to create and selected the **Customize** option, the configuration dialog box will include the following options:

- **Default XML Schema version** - Uses the XML Schema version defined in the [XML Schema preferences page](#).
- **XML Schema 1.0** - Sets the minVersion attribute to **1.0** and the maxVersion attribute to **1.1**.
- **XML Schema 1.1** - Sets the minVersion attribute to **1.1**.
- **Target namespace** - Allows you to specify the schema target namespace.
- **Namespace prefix declaration table** - This table contains namespace prefix declarations. Table information can be managed using the **+ New** and **✕ Delete** buttons.

Tip: For further details on how you can set the version of an XML Schema, go to [Setting the XML Schema Version](#).

Schematron Document Configuration Page

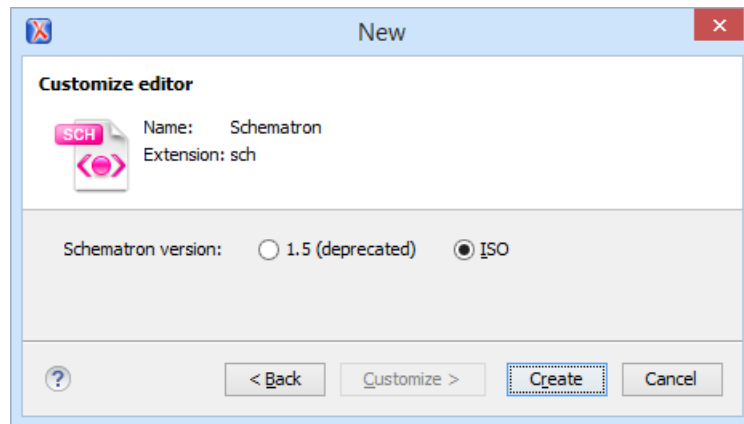


Figure 140: New Schematron Configuration Wizard Page

If you selected **Schematron** for the type of file you want to create and selected the **Customize** option, the configuration dialog box will include the following option:

- **Schematron version** - Specifies the Schematron version. Possible options: 1.5 (deprecated) and ISO.

Note: Starting with version 16.0 of Oxygen XML Developer, the support for Schematron 1.5 is deprecated. It is recommended to use ISO Schematron instead.

Creating New Document Templates

Oxygen XML Developer allows you to create your own custom document templates and they will appear in the **Global templates** folder (or another specified folder) within the [New document wizard](#).

Creating a New Document Template

To create your own custom document template and have it appear in the new document wizard, follow these steps:

1. Create a new file (whatever type of document you need) and customize it to become a starting point for creating new files of this type.

Tip: You can use [editor variables](#) in the template file content and they will be expanded when the files are opened.
2. Save the new document template in one of the following locations:
 - The templates directory of the Oxygen XML Developer installation directory (`[OXYGEN_INSTALL_DIR] / templates`). Document templates saved in this directory will appear in the **Global templates** category in the [New document wizard](#).
 - You can also use any other directory of your choice, but you must add that directory to the list of templates in the [Document Templates preferences page](#). This user-defined directory will appear in the [New document wizard](#) along with all the new document templates that you save inside it.



Attention: The name that you use to save the template will be the name that appears in the new document wizard, including capitalization, space, and characters (for example, My Custom Template1.xml will appear in the new file wizard as **My Custom Template1**).

3. Open the new document wizard ( **New** toolbar button or **File > New**) and you should see your custom template in the appropriate folder.

Note: For DITA templates, they will also appear in the dialog box for creating new DITA topics, but if you [customize the template](#), you need to set the type property to **dita** in the corresponding properties file.

Related Information:

[Customizing Document Templates](#) on page 278

Customizing Document Templates

Oxygen XML Developer allows you to customize certain aspects of predefined or custom document templates. For example, you can customize the icons or specify a prefix/suffix that will be used for the proposed file name in the [New document wizard](#).

Customizing the Icons for a Document Template

If you want to customize the icons to be used for document templates, use a properties file to specify the icons using the following procedure:

1. Create a new properties file or edit an existing one.
 - If you create a new properties file, use the same name as the template file except with a `.properties` extension (for example, `MyTemplate.properties`). This properties file will specify the paths to the icons that will be used in the new file wizard. You can find some examples in the `templates` directory of the Oxygen XML Developer installation directory to help you get started.

When defining the icons, the properties file should look like this:

```
type=general
smallIcon=../icons/Article_16.png
bigIcon=../icons/Article_48.png
```

Important: For DITA files, the type property needs to be set to **dita**. Otherwise, the template will not appear in the dialog box for creating new DITA topics. For all other types of files, set it to **general**. The icons specified in this properties file will only be used for the new file wizards and not in any other part of the interface.

Note: If you created a new template and chose to use a custom directory for the new template (in [step 2 of the new template procedure](#)), make sure the path to the icons is relative to that directory.

- If you edit an existing template, simply define the icon paths as specified [above](#).
2. Save the properties file in the same directory as the document template.
 3. Open the new file wizard (**File > New**) and you should see your custom icons next to the document template in the appropriate folder.

Add a Prefix or Suffix to File Names for a Document Template

You can use a properties file for each document template to add a prefix or suffix to the file name that is proposed in certain dialog boxes when you create a new file from that template. This applies to the following new document dialog boxes:

- The new document dialog box that appears when you click the  **New** button on the toolbar (or **File > New**). The prefix or suffix is added to the name of the file in the **Save as** field.
- The new document dialog box that appears when you select **New > File** from the contextual menu in the [Project view](#). The prefix or suffix is added to the name of the file in the **File name** field.

To add a prefix or suffix to the file names for a document template, follow these steps:

1. Create a new properties file or edit an existing one.

- If you create a new properties file, use the same name as the template file except with a `.properties` extension (for example, `MyTemplate.properties`). This properties file will specify the prefix/suffix that will be used to propose the file name in the new file wizards.

When defining the prefix/suffix, the properties file should look something like this:

```
type=general
filenamePrefix=prod_
filenameSuffix=_test
```

Important: For DITA files, the `type` property needs to be set to **dita**. For all other types of files, set it to **general**.

- If you edit an existing template, simply define the prefix/suffix as specified [above](#).
2. Save the properties file in the same directory as the document template.
 3. Open the new document wizard ([using the methods described above](#)) and when you select the appropriate template, you should see your prefix or suffix in the file name that is proposed in that dialog box.

Configure the Displayed Names for Document Templates

To change the name that is displayed for a document template, use the following procedure:

1. Create a new properties file or edit an existing one. If you create a new properties file, use the same name as the template file except with a `.properties` extension (for example, `MyTemplate.properties`).
2. Add a `displayName` property in the properties file:

```
displayName=myTemplateName
```

Tip: The names for [framework](#)-specific document templates (such as DITA *Topic* or DocBook *Article* as you would see in the **Framework templates** section in the **New** file wizard) can be translated via the internationalization support. In this case, the properties file should contain something like:

```
displayName=${i18n(tag)}
```

where *tag* refers to an entry in the `translation.xml` file for that specific framework (for example, `OXYGEN_INSTALL_DIR/frameworks/dita/i18n/translation.xml` for DITA).

3. Save the properties file in the same directory as the document template.
4. Open the new file wizard (**File > New**) and you should see the new name for the template.

Adding Placeholders or Hints in a Document Template

Document templates sometimes contain empty elements and it may not be clear to the Author what should be inserted. You can define placeholders in document templates that provide hints for Authors to help them understand what type of content should be added in any particular empty element within the document. The placeholder text is specified using a processing instruction and the placeholders are removed when the Author inserts content in the corresponding element.

To define placeholders in a document template to provide authors with hints, follow this procedure:

1. Edit the document template.
2. Add placeholders in the form of processing instructions within the elements where you want hints to be displayed when an Author creates a document from the template. For example:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE topic PUBLIC "-//OASIS//DTD DITA Topic//EN" "topic.dtd">
<topic id="pi">
  <title><?oxy-placeholder content="Please give a title"?></title>
  <shortdesc><?oxy-placeholder content="Writing short descriptions
induces the writer to clarify the main thesis of the topic.
We recommended a 50 word limit."?></shortdesc>
  <body>
    <p><?oxy-placeholder content="A paragraph element should be a self-contained
unit dealing with one idea or point."?></p>
  </body>
</topic>
```

3. Save the template file.

4. Use the [New document wizard](#) to create a new document using your customized template and you should see the hints in the opened document.

Related Information:

[Creating New Document Templates](#) on page 277

Opening Documents

To open a document in Oxygen XML Developer, do one of the following:

- Go to **File** >  **Open (Ctrl + O (Command + O on OS X))** or click the  **Open** toolbar button to display the **Open File** dialog box. The start folder of the **Open** dialog box can be either the last folder visited by this dialog box or the folder of the currently edited file. This can be [configured in the user preferences](#).
- Go to **File** > **Open URL** or click the  **Open URL** toolbar button to display a dialog box where you can specify a URL (defined by a protocol, host, resource path, and an optional port) or use the browsing tools in the  **Browse for remote file** drop-down menu.
- Click the  **Open/Find Resource** toolbar button to search for a file to open.
- Go to **File** >  **Reload** to load the last saved file content. All unsaved modifications are lost.
- Go to **File** > **Reopen** to reopen one of the recently opened document files. The list containing recently opened files can be emptied by invoking the **Clear history** action.
- Select the **Open** or **Open with** action from the contextual menu of the [Project view](#).

Related Information:

[Opening Local Files at Start-up](#) on page 280

Opening the Current Document in a System Application

To open the currently edited document in the associated system application, use the  **View in Browser/System Application** action that is available in the **File** menu and on the **File** toolbar. If you want to open XML files in a specific internet browser, instead of the associated system application, you can specify the internet browser to be used. To do so, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

Opening Local Files at Start-up

There are two possibilities for opening local files at startup from a command line by adding their file paths as parameters:

- `scriptName [pathToXMLFile1] [pathToXMLFile2]`
 - **scriptName** is the name of the startup script for your platform (`oxygenDeveloper.bat` on Windows, `oxygenDeveloper.sh` on Mac OS X and Linux).
 - **pathToXMLFileN** is the name of a local XML file.
- An XML file and a schema file to be associated automatically to the file and used for validation and content completion:

```
scriptName -instance pathToXMLFile -schema pathToSchemaFile -schemaType
XML_SCHEMA|DTD_SCHEMA|RNG_SCHEMA|RNC_SCHEMA -dtName documentTypeName
```

- **scriptName** is the name of the startup script for your platform (`oxygen.bat` on Windows, or `oxygen.sh` on Mac OS X and Linux).
- **pathToXMLFile** is the name of a local XML file.
- **pathToSchemaFile** is the name of the schema that you want to associate to the XML file, the four constants (`XML_SCHEMA`, `DTD_SCHEMA`, `RNG_SCHEMA`, `RNC_SCHEMA`) are the possible schema types (W3C XML Schema, DTD, Relax NG schema in full syntax, Relax NG schema in compact syntax).
- **documentTypeName** specifies the name of the document type for which the schema is defined. If the document type is already set in preferences, its schema and type are updated.

Tip: You can use the `-h` or `--help` parameters to see more detailed information about possible values.

Related Information:

[Opening a File at a Specific Location Using the Command Line Interface](#) on page 281

Opening a File at a Specific Location Using the Command Line Interface

Oxygen XML Developer offers support for opening a file at a specific position using the command line interface, by transmitting parameters to the Oxygen XML Developer batch script file. The following methods are available, depending on how you identify the position that is needed:

1. Specific position values (line and column number, or character offset)

Oxygen XML Developer supports the following position parameters:

- `line` - The line number.
- `column` - The column number (has meaning if the `line` parameter is also defined).
- `char` - The character offset.

Examples for Windows:

The following examples show how you can open an XML document in Oxygen XML Developer:

```
developer.bat file:samples/personal.xml#line=4
developer.bat file:samples/personal.xml#line=4column=5
developer.bat file:samples/personal.xml#line=4;column=5
developer.bat file:samples/personal.xml#char=334
```

2. Simplified XPath index path

Oxygen XML Developer will open an XML file and select one of its elements identified by a simplified XPath index path. For example, an index path of the form `1/5/7` identifies the seventh child of the fifth child of the root element.

Restriction: Oxygen XML Developer will display a selection that starts with the first character of the content of the identified element and spans until the end of the line.

Examples for Windows:

The following example shows how you can open an XML document in Oxygen XML Developer and select the third child of the root element:

```
developer.bat file:samples/personal.xml#element(1/3)
```

3. Anchors identified by ID attribute values

Oxygen XML Developer will open an XML file and select the element whose `id` attribute value is an exact match of the [anchor](#) attached to a command line instruction.

Examples for Windows:

The following example shows how you can open an XML document in Oxygen XML Developer and select the element that has the `id` element set to `titleID`:

```
developer.bat file:samples/personal.xml#titleID
```

Related Information:

[Opening Local Files at Start-up](#) on page 280

Saving Documents

You can save the document you are editing with one of the following actions:

- **File >  Save.**
- ** Save** toolbar button - If the document was not yet saved, it displays the **Save As** dialog box.
- **File > Save As** - Displays the **Save As** dialog box, used either to name and save an open document to a file or to save an existing file with a new name.

- **File > Save To URL** - Displays a **Save to URL** dialog box that can be used to save a file identified by its URL (defined by a protocol, host, resource path, and an optional port). You can also use the browsing tools in the  **Browse for remote file** drop-down menu.
- **File > Save All** - Saves all open documents. If any document does not have a file, displays the **Save As** dialog box.

Opening and Saving Remote Documents

Oxygen XML Developer supports editing remote files, using the FTP, SFTP, WebDAV, SharePoint, and SharePoint Online for Office 365 protocols. You can edit remote files in the same way you edit local files. For example, you can add remote files to a project, or use them in XSL and FO transformations.

You can open one or more remote files in [the Open URL dialog box](#).

A WebDAV resource can be locked when it is opened in Oxygen XML Developer by selecting the **Lock WebDAV files on open option** to prevent other users to modify it concurrently on the server. If a user tries to edit a locked file, Oxygen XML Developer displays an error message that contains the lock owner's name. The lock is released automatically when the editor for that resource is closed in Oxygen XML Developer.

To avoid conflicts with other users when you edit a resource stored on a SharePoint server, you can **Check Out** the resource.

To improve the transfer speed, the content exchanged between Oxygen XML Developer and the HTTP / WebDAV server is compressed using the GZIP algorithm.

The current [WebDAV Connection](#) details can be saved by switching to the **Database perspective** and then you can browse and manage the connection in the [Data Source Explorer view](#).

Open URL

To open this dialog box, go to **File >  Open URL** (or click the  **Open URL** toolbar button), then choose the  **Browse for remote file** option from the drop-down action list.

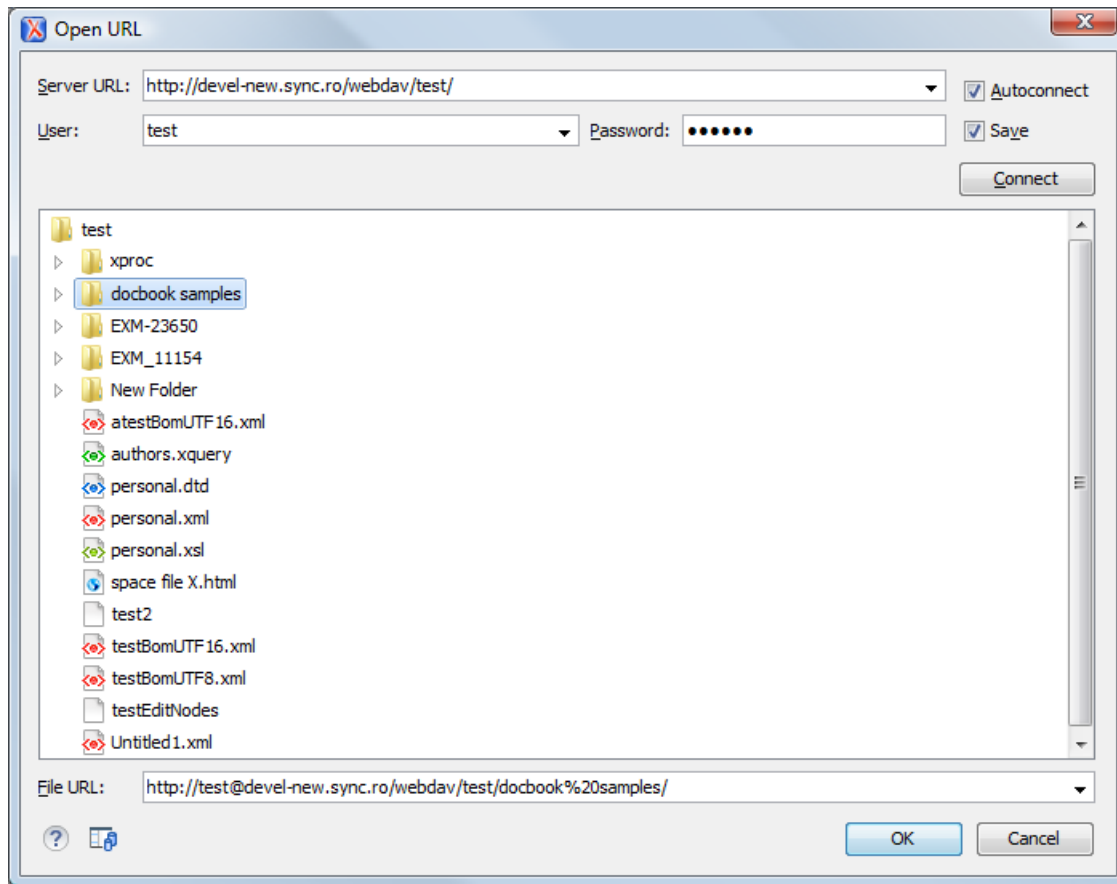


Figure 141: Open URL Dialog Box

The displayed dialog box is composed of the following:

Server URL

Specifies the protocol (HTTP, HTTPS or FTP) and the host name or IP of the server.

Tip: When specifying a URL, follow these rules:

- To access an FTP server, write the protocol, host, and port (if using a non-standard one). For example, `ftp://server.com` or `ftp://server.com:7800/`.
- To access a WebDAV server, write the path to the directory of the WebDAV repository along with the protocol and the host name. For example, `https://www.some-webdav-server.com:443/webdav-repository/`.

Important: Make sure that the repository directory ends in a slash "/". For example, `https://www.some-webdav-server.com:443/webdav-repository/`

Autoconnect

If selected, the browse action is performed every time when you open the dialog box.

User and Password

To browse for a file on a server, you have to specify the user and password for the server. This information is bound to the selected URL displayed in the **File URL** combo box, and used further in opening/saving the file. If the **Save** option is selected, then the user and password are saved between editing sessions. The password is kept encrypted in the options file.

Note: Your password is well protected. If the options file is used on another machine by a user with a different username, the password will become unreadable since the encryption is dependent on the username. This is also true if you add URLs that contain a username and password to your project.

Connect

When you press this button, the directory listing will be shown in the main section of the dialog box. If the selected URL points to a SharePoint server, a dedicated SharePoint browsing component is presented.

Browser view

- If you are browsing a WebDAV or FTP repository, the items are presented in a tree-like fashion. You can browse the directories, and make multiple selections. Additionally, you may use the **Rename**, **Delete**, and **New Folder** actions to manage the file repository.

Note: The file names are sorted in a case-insensitive way.

- When you browse a SharePoint repository, a specialized component renders the SharePoint site content.

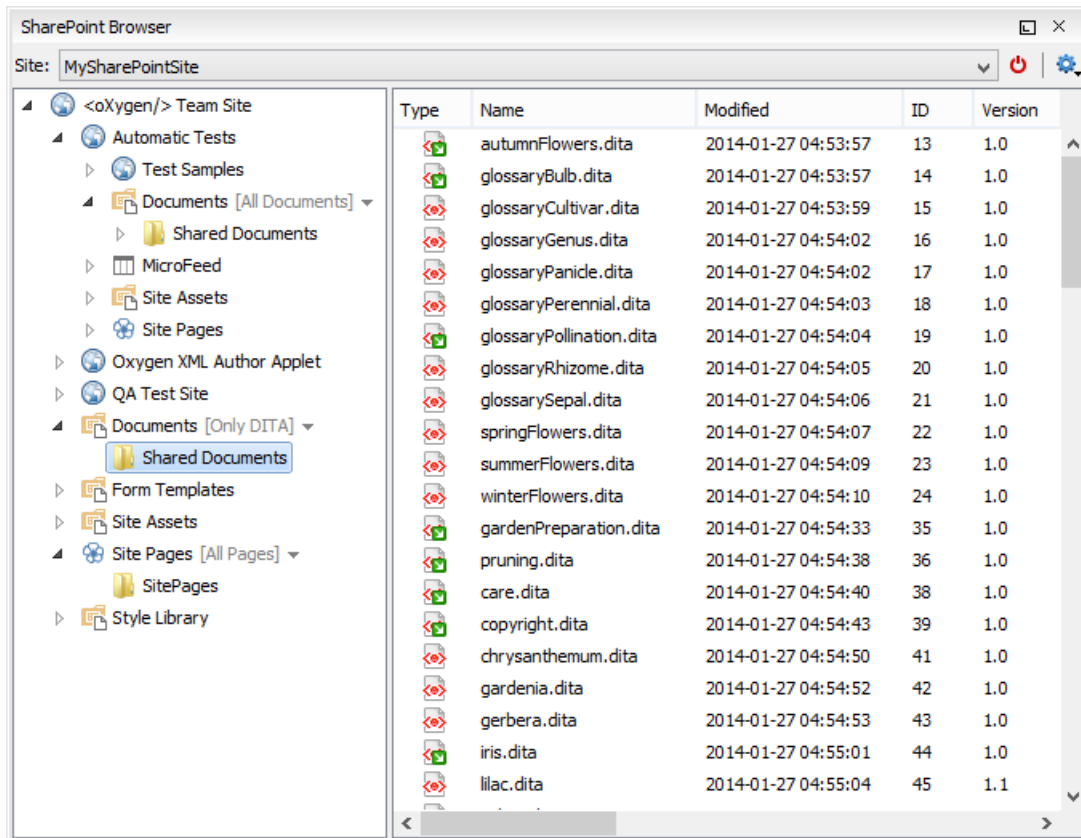


Figure 142: Browsing a SharePoint Repository

The left side navigation area presents the SharePoint site structure in a tree-like fashion with various node types (such as *sites*, *libraries*, and *folders*).

Depending on the type of node, a contextual menu offers customized actions that can be performed on that node. The contextual menu of a folder allows you to create new folders and documents, import folders and files, and to rename and delete the folder.

Note: The rename and delete actions are not available for library root folders (folders located at first level in a SharePoint library).

Each library node displays a drop-down menu next to its name where you can select what you want to display for the current library node. This functionality is also available on the contextual menu of the node.




Figure 143: Drop-Down Menu to Select Which Items to Display

The content of a folder is displayed in a tabular form, where each row represents the properties of a folder or document. The list of columns and the way the documents and folders are organized depends on the currently selected view of the parent library.

You can filter and sort the displayed items. To display the available filters of a column, click the filter widget located on the column header. You can apply multiple filters at the same time.

Note: A column can be filtered or sorted only if it was configured this way on the server side.

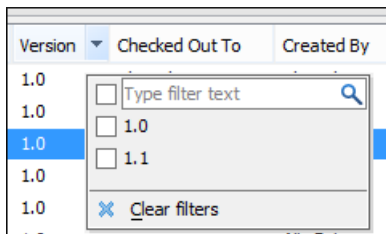


Figure 144: Column Filter

File URL

You can use this combo box to directly specify the URL to be opened or saved. You can type a URL such as `http://some.site/test.xml` (if the file is accessible through normal HTTP protocol), or `ftp://anonymous@some.site/home/test.xml` (if the file is accessible through anonymous FTP).

This combo box also displays the current selection when the user changes selection by browsing the tree of folders and files on the server.

Changing File Permissions on a Remote FTP Server

Some FTP servers allow the modification of permissions of the files served over the FTP protocol. This protocol feature is accessible directly in the FTP/WebDAV file browser dialog box by right-clicking a tree node and selecting the *Change permissions* menu item.

In this dialog box, the usual Unix file permissions *Read*, *Write*, and *Execute* are granted or denied for the file owner, owner group, and the rest of the users. The aggregate number of permissions is updated in the *Permissions* text field when it is modified with one of the checkboxes.

WebDAV over HTTPS

If you want to access a WebDAV repository across a non-secure network, Oxygen XML Developer allows you to load and save the documents over the HTTPS protocol (if the server understands this protocol) so that any data exchange with the WebDAV server is encrypted.

When a WebDAV repository is first accessed over HTTPS, the server hosting the repository will present a security certificate as part of the HTTPS protocol, without any user intervention. Oxygen XML Developer will use this certificate to decrypt any data stream received from the server. For the authentication to succeed you should make sure the security certificate of the server hosting the repository can be read by Oxygen XML Developer. This means that Oxygen XML Developer can find the certificate in the key store of the Java Runtime Environment in which it runs. You know the server certificate is not in the JRE key store if you get the error *No trusted certificate found* when trying to access the WebDAV repository.

Troubleshooting HTTPS

When Oxygen XML Developer cannot connect to an HTTPS-capable server, most likely there is no certificate set in the *Java Runtime Environment (JRE)* that Oxygen XML Developer runs into. The following procedure describes how to:

- Export a certificate to a local file using any HTTPS-capable Web browser (for example, Internet Explorer).
- Import the certificate file into the JRE using the *keytool* that comes bundled with Oxygen XML Developer.

Tip: To make Oxygen XML Developer accept a certificate even if it is invalid, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Connection settings > HTTP(S)/WebDAV**, and select the **Automatically accept a security certificate, even if invalid** option.

1. Export the certificate into a local file

- a) Point your HTTPS-aware Web browser to the repository URL.

If this is your first visit to the repository it will be displayed a security alert stating that the security certificate presented by the server is not trusted.

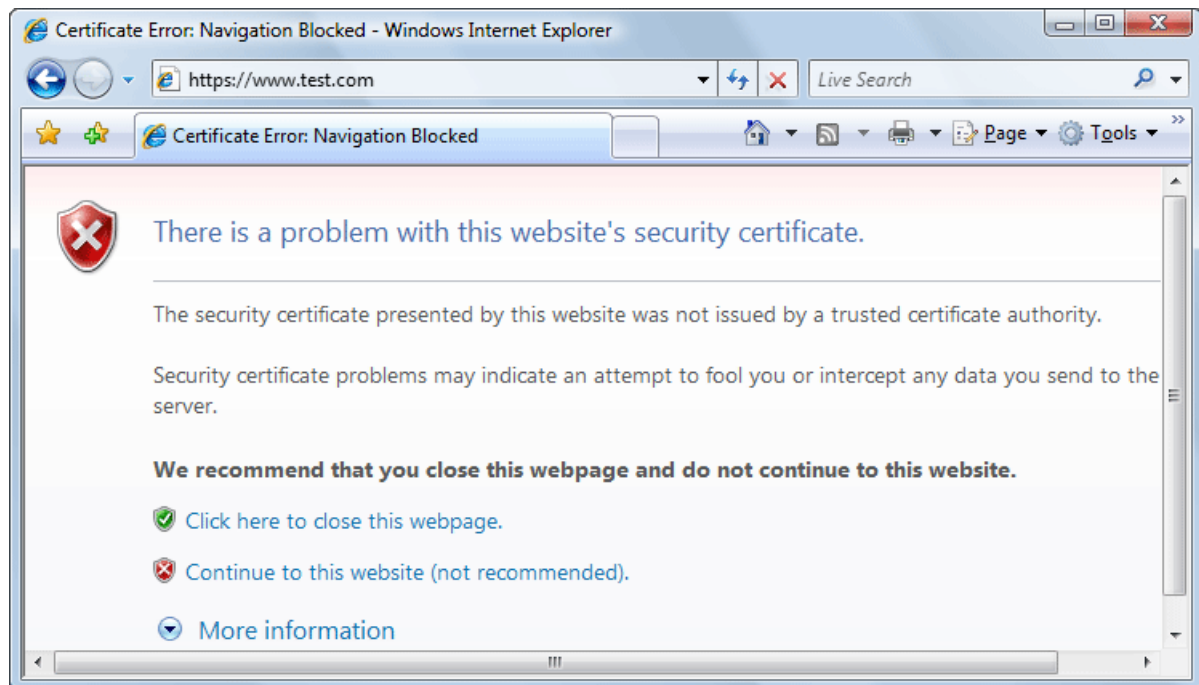


Figure 145: Security alert - untrusted certificate

- b) Go to menu **Tools > Internet Options**.
Internet Options dialog box is opened.
- c) Select **Security** tab.
- d) Select **Trusted sites** icon.
- e) Press **Sites** button.
This will open **Trusted sites** dialog box.
- f) Add repository URL to **Websites** list.
- g) Close the **Trusted sites** and **Internet Options** dialog boxes.
- h) Try again to connect to the same repository URL in Internet Explorer.
The same error page as above will be displayed.
- i) Select **Continue to this website** option.
A clickable area with a red icon and text **Certificate Error** is added to Internet Explorer address bar.
- j) Click the **Certificate Error** area.
A dialog box containing a **View certificates** link is displayed.
- k) Click the **View certificates** link.
Certificate dialog box is displayed.
- l) Select **Details** tab of **Certificate** dialog box.
- m) Press **Copy to File** button.
Certificate Export Wizard is started.
- n) Follow indications of wizard for DER encoded binary X.509 certificate. Save certificate to local file server .cer.
2. Import the local file into the JRE running Oxygen XML Developer.
- a) Open a text-mode console with administrative rights.
If Oxygen XML Developer has been installed in a user's home directory and includes a bundled JRE, administrative rights are not required. In all other cases administrative rights will be required.
- b) Go to the **lib/security** directory of the JRE running Oxygen XML Developer. You find the home directory of the JRE in the **java.home** property that is displayed in the **About** dialog box (**System properties** tab).
On Mac OS X systems, the **lib/security** directory is usually located in **/System/Library/Java/JavaVirtualMachines/1.6.0.jdk/Contents/Home** directory.

On OS X, if you have installed a distribution of Oxygen XML Developer that is not bundled with a JRE, a JRE from Apple is required. The Apple Java version 1.6 stores the certificates in `/System/Library/Java/Support/CoreDeploy.bundle/Contents/Home/lib/security/cacerts` with a symbolic link pointing to it from `/System/Library/Java/JavaVirtualMachines/1.6.0.jdk/Contents/Home/lib/security/cacerts`.

On OS X, if you have installed a distribution of Oxygen XML Developer that bundles the JRE from Oracle, the JRE uses the `.install4j/jre.bundle/Contents/Home/jre/lib/security/cacerts` path within its installation directory.

c) Run the following command:

```
..\..\bin\keytool -import -trustcacerts -file server.cer -keystore cacerts
```

The `server.cer` file contains the server certificate, created during the previous step. The `keytool` requires a password before adding the certificate to the JRE [keystore](#). The default password is `changeit`. If someone changed the default password, then that person is the only one who can perform the import.

Tip: If you need to import multiple certificates, you need to specify a different alias for each additional imported certificate with the `-alias` command line argument, as in the following example:

```
..\..\bin\keytool -import -alias myalias1 -trustcacerts -file
server1.cer -keystore cacerts

..\..\bin\keytool -import -alias myalias2 -trustcacerts -file
server2.cer -keystore cacerts
```

3. Restart Oxygen XML Developer.

Related Information:

[HTTP\(S\)/WebDAV Preferences](#) on page 138

HTTP Authentication Schemes

Oxygen XML Developer supports the following HTTP authentication schemes:

- **Basic** - The *basic* authentication scheme defined in the [RFC2617 specifications](#).
- **Digest** - The *digest* authentication scheme defined in the [RFC2617 specifications](#).
- **NTLM** - The *NTLM* scheme is a proprietary Microsoft Windows Authentication protocol (considered to be the most secure among currently supported authentication schemes).

Note: For NTLM authentication, the user name must be preceded by the name of the domain it belongs to, as in the following example:

```
domain\username
```

- **Kerberos** - An authentication protocol that works on the basis of *tickets* to allow nodes communicating over a non-secure network to prove their identity to one another in a secure manner.

Single Sign-on

Oxygen XML Developer implements the *Single sign-on* property (meaning that you can log on once and gain access to multiple services without being prompted to log on for each of them), based on the **Kerberos** protocol and relies on a *ticket-granting ticket (TGT)* that Oxygen XML Developer obtains from the operating system.

Restriction: This *Single sign-on* support is not available for SharePoint integrations.

To turn on the **Kerberos**-based authentication, you need to add the following system property in the `.vmoptions` configuration file or start-up script:

```
-Djavax.security.auth.useSubjectCredsOnly=false
```

Related Information:

[Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer](#) on page 160

Switching and Moving Editor Tabs

Each file that has been opened has a tab at the top of the editing pane and there are several ways to switch between tabs or move them.

Switching Editor Tabs

You can switch between editor tabs by using any of the following methods:

Mouse and Scroll Wheel

Of course, you can switch to a different editor tab by left-clicking the tab with your mouse, but when there are too many tabs opened to fit on the screen, you can hover over the tab stripe and use the scroll wheel on your mouse to scroll to the left or right (same as using the two arrows on the far-right of the tab stripe).

Buttons on the Far-Right of the Tab Stripe (◀▶🔍)

You can use the arrow buttons (◀▶) on the right side of the tab stripe to scroll to the left or right and the 🔍 **Show List** button opens a pop-up window that displays all the opened file tabs and allows you to select and switch to a specific opened file.

Ctrl + Tab (Command + Tab on OS X) [NOTE: Ctrl + Page Down (Ctrl + Alt + Right Arrow on OS X) does the same]

Switches to the next opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Ctrl + Shift + Tab (Command + Shift + Tab on OS X) [NOTE: Ctrl + Page Up (Ctrl + Alt + Left Arrow on OS X) does the same]

Switches to the previous opened tab in the order specified in the [Order of switching between editor tabs](#) option.

Window > Switch editor tab (Ctrl + F9 (Command + F9 on OS X))

This action opens a dialog box that allows you to switch to a particular editor tab by selecting it from a filterable list. This is especially helpful when you have a large amount of file tabs opened and you want to switch to a certain tab this is not shown on the screen. It includes a search filter field and several options to help you find specific opened file tabs.

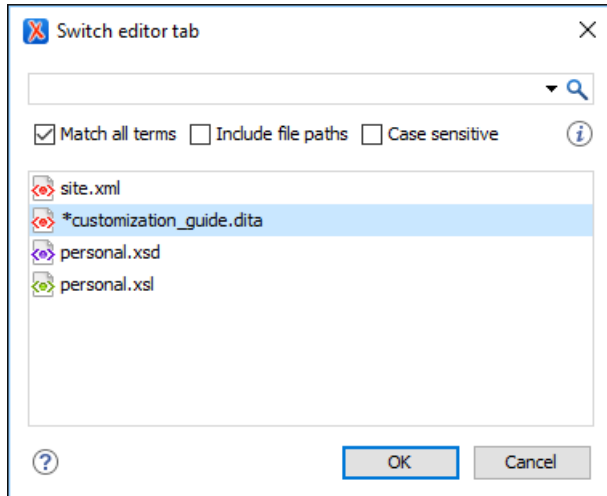


Figure 146: Switch Editor Tab Dialog Box

The **Switch Editor Tab** dialog box contains the following options and features:

Search Filter

You can enter text in the filter field at the top of the dialog box to filter the list and search for specific opened files. You can enter any number of terms, separated by space, and wildcards are allowed (for example, * to match any sequence of characters or ? to match a single character). This field also has a history drop-down that allows you to select previously used search terms.

Match all terms

If this option is selected, only the files that match all of your search terms will be displayed. If you use a wildcard in the search filter, this option is automatically disabled.

Include file paths

If this option is selected, the search is expanded to include file paths, and also the paths are displayed in this dialog box.

Case sensitive

If this option is selected, the search operation will be case-sensitive.

List of Opened File Tabs

All files that are currently opened are displayed in the main pane of the dialog box. Files that have been modified but not yet saved are prefixed by an asterisk. To switch to a particular file tab, double-click the file or select it and click **OK**.

Moving Editor Tabs

You can move editor tabs by using any of the following methods:

Mouse Drag

You can use your mouse to drag editor tabs to a new location on the tab stripe.

Ctrl + Alt + Comma

Moves the current file tab one position to the left.

Ctrl + Alt + Period

Moves the current file tab one position to the right.

Closing Documents

To close open documents, use one of the following actions that are available in the contextual menu of the current editor tab (or from the **File** menu):

Close (Ctrl + W (Command + W on OS X))

Closes the currently selected editor.

Close Other Files

If multiple files are opened, this action is available to close all opened editors in the current group/stack of tabs except for the one you are currently viewing. If this action is selected from the **File** menu, it closes all opened editors in **all** groups/stacks of tabs except for the current one.

Close Files to the Right


Available only from the contextual menu of the current editor tab and it closes all opened editors to the right of the currently selected editor.

Close All

If multiple files are opened, this action is available to close all opened editors in the current group/stack of tabs. If this action is selected from the **File** menu, it closes all opened editors in **all** groups/stacks of tabs.

Contextual Menu of the Current Editor Tab

A contextual menu is available when you right-click the current editor tab label.



The actions that are available depend on the context and the number of files that are opened. The menu includes the following actions:

Close (Ctrl + W (Command + W on OS X))

Closes the currently selected editor.

Close Other Files

If multiple files are opened, this action is available to close all opened editors in the current group/stack of tabs except for the one you are currently viewing.

Close Files to the Right

Closes all opened editors to the right of the currently selected editor.

Close All

If multiple files are opened, this action is available to close all opened editors.

Move editor tab to the left (**Ctrl + Alt + Comma**)

Moves the current editor tab one position to the left.

Move editor tab to the right (**Ctrl + Alt + Period**)

Moves the current editor tab one position to the right.

Reopen last closed editor **Ctrl + Alt + T (Command + Alt + T on OS X)**

Reopens the last closed editor.

Maximize/Restore Editor Area

Collapses all the side views and spans the editing area to cover the entire width of the main window.

Add to project

Adds the file you are editing to the current project.

Add all to project

If multiple files are opened, this action is available to add all the opened files in the current group/stack of tabs to the current project.

Copy Location

Copies the disk location of the file.

Show in Explorer (**Show in Finder on OS X**)

Opens the Explorer to the file path of the file.

Viewing File Properties

The **Properties** view displays information about the currently edited document. The information includes:

- Character encoding.
- Full path on the file system.
- Schema used for content completion and document validation.
- Document type name and path.
- Associated transformation scenario.
- Read-only state of a file.
- Bidirectional text (left to right and right to left) state.
- Total number of characters in the document.
- Line width.
- Indent with tabs state.
- Indent size.

The view can be accessed from **Window > Show View > Properties**.

To copy a value from the **Properties** view in the clipboard (for example, the full file path), use the **Copy** action available on the contextual menu of the view.

Simple Text Editor

While Oxygen XML Developer specializes in XML-related technologies, you can also use it to create and edit various types of non-XML files. Non-XML files are opened in a simple text editor and many of the helpful features that are commonly used when [editing XML files in the Oxygen XML Developer Text editing mode](#) are available in this simple editor.

Types of Non-XML Files That are Supported in the Simple Text Editor

Some of the types of non-XML files that can be created and edited in the simple text editor include:

- Java
- C++

- C
- PHP
- Perl
- Properties
- SQL
- Shell executables
- Batch
- Python
- Text

Features Available in the Simple Text Editor

When editing files in the simple text editor, the features that are available include the following:

- **Project Support** - The unique [features that are designed to help you work with projects](#) are available for all types of files.
- **Shortcut Actions** - Many of the [shortcut actions that are available in Text mode](#) are also available in the simple text editor.
- **Drag and Drop** - The normal drag and drop support is available in the simple text editor.
- **Content Selection Features** - The [content selection shortcuts](#) that are available in **Text** mode (including the *Rectangular Selection* feature) are also available in the simple text editor.
- **Bookmarks** - You can use [bookmarks to mark positions](#) in any type of file so that you can return to it later.
- **Convert Hexadecimal Characters** - You can [convert a sequence of hexadecimal characters to the corresponding Unicode character](#).
- **Encoding/Decoding Actions** - Contextual menu actions are available to [encode or decode Base64, Base 32, and Hex schemes](#).
- **Code Templates** - You can define your own [code templates](#) for any type of file and use the [Content Completion Assistant](#) to invoke them.
- **Syntax Highlighting** - Non-XML files also support syntax highlighting with dedicated coloring schemes. To customize them, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight**. Select and expand the appropriate section in the top pane for the type of file you are editing and you can see the effects of your changes in the **Preview** pane.
- **Find/Replace** - You can use the  [Find/Replace action](#) to find or replace all the occurrences of a word or string of characters in any type of file that you are editing.
- **File Comparison Tool** - The [Compare Files tool](#) can also be used to compare non-XML files.

Using Projects to Group Documents

Oxygen XML Developer includes a [Project view](#) that helps you organize your projects. Oxygen XML Developer offers a variety of helpful features for working with projects and makes it easy to share your projects with other members of your team. This section presents various unique features that will help you to create and work with projects.

Creating a New Project

Oxygen XML Developer allows you to organize your XML-related files into projects. This helps you manage and organize your files and also allows you to perform batch operations (such as validation and transformation) over multiple files. You can also [share your project settings and transformation/validation scenarios](#) with other users. Use the [Project view](#) to manage projects, and the files and folders contained within.

Creating a New Project

To create a new project, select  **New Project** from the **Project** menu, the **New** menu in the contextual menu, or the drop-down menu at the top-left of the **Project** view. This opens a dialog box that allows you to assign a name to the new project and adds it to the structure of the project in the [Project view](#).

Adding Items to the Project

To add items to the project, select any of the following actions that are available when invoking the contextual menu in the **Project** view:

New > File

Opens a **New** file dialog box that helps you create a new file and adds it to the project structure.

New > Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

The project itself is considered a logical folder. You can add a logical folder, or content to a logical folder, by using one of the following actions that are available in the contextual menu, when invoked from the *project root*:

New > Logical Folder

Creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > Logical Folders from Web

Replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X - ).

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Using Linked Folders (Shortcuts)

Another easy way to organize your XML working files is to place them in a directory and then to create a corresponding linked folder in you project. If you add new files to that folder, you can simply use the  **Refresh (F5)** action from the toolbar or contextual menu and the **Project view** will display the existing files and subdirectories. If your files are scattered amongst several folders, but represent the same class of files, you might find it useful to combine them in a logical folder.

You can create linked folders (shortcuts) by dragging and dropping folders from the Windows Explorer (Mac OS X Finder) to the project tree, or by selecting  **Add Folder** in the contextual menu from the *project root*. Linked folders are displayed in the **Project view** with bold text. To create a file inside a linked folder, select the **New >  File** action from the contextual menu. The linked files presented in the **Project view** are marked with a special icon.

Note: Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

For more information on managing projects and their content, see [Project View](#) on page 188.

For more details about how you can share projects with other users, see [Sharing a Project - Team Collaboration](#) on page 300.

Related Information:

[Using Projects to Group Documents](#) on page 291

Project View

The **Project** view is designed to assist you with organizing and managing related files grouped in the same XML project. The actions available in the contextual menu and on the toolbar associated to this panel allow you to create XML projects and provide shortcuts to various operations for the project documents.

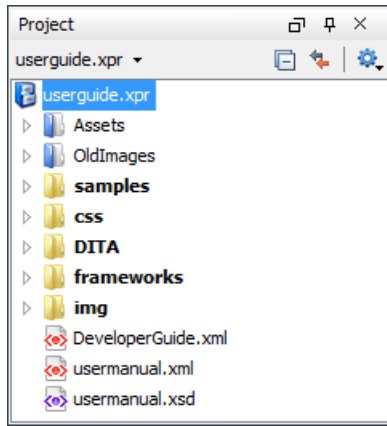


Figure 147: Project View

By default, the view is positioned on the left side of the Oxygen XML Developer window, above the [Outline view](#). If the view has been closed, it can be reopened at any time from the **Window > Show View** menu (or using the **Show Project View** action from the **Project** menu).

The tree structure occupies most of the view area. In the upper left side of the view, there is a drop-down menu that contains all recently used projects and project management actions:

Open Project (Ctrl + F2 (Command + F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

New Project

Creates a new, empty project.

The following actions are grouped in the upper right corner:

Collapse All

Collapses all project tree folders. You can also collapse/expand a project tree folder if you select it and press the **Enter** key or **Left Arrow** to collapse and **Right Arrow** to expand.

Link with Editor

When selected, the project tree highlights the currently edited file, if it is found in the project files.

Note: This button is disabled automatically when you move to the **Debugger perspective**.

Settings

A submenu that contains the following actions:

Filters

Allows you to filter the information displayed in the **Project** view. Click the toolbar button to set filter patterns for the files you want to show or hide. Also, you can set filter patterns for the linked directories that are hidden.

Show Full Path

When selected, linked files and folders are presented with a full file path.

Enable Master Files Support

Select this option to enable the [Master Files support](#).

Change Search and Refactor operations scope

Allows you to change the collection of documents that define the context of the [search and refactor operations](#).

- **Use only Master Files, if enabled** - Restricts Oxygen XML Developer to perform the search and refactor operations starting from the *master files* that are defined for the current resource. This option is available when you select **Project** in the **Select the scope for Search and Refactor operations** dialog box and the **Master Files** support is enabled.
- **Working sets** - Allows you to specify the set of files that will be used for the scope of the search and refactor operations.

The files are usually organized in an XML project as a collection of folders. There are three types of resources displayed in the **Project** view:

- **Logical folders** - marked with a blue icon on Windows and Unix/Linux (📁) and a magenta icon on Mac OS X (📁). They help you group files within the project. This folder type has no correspondent on the physical disk, since they are used as containers for related items. Creating and deleting them does not affect the file system on disk. They are created on the project root or inside other logical folders by using the contextual action **New > Logical Folder**. The contextual menu action **Remove from Project** can be used to remove them from the project.
- **Physical folders and files** - marked with the operating system-specific icon for folders (usually a yellow icon on Windows and a blue icon on Mac OS X). These folders and files are mirrors of real folders or files that exist in the local file system. They are created or added to the project by using contextual menu actions (such as **New > File**, **New > Folder**, **Add Folder**, etc.) Also, the contextual menu action **Remove from Disk (Shift+Delete)** can be used to remove them from the project and local file system.
- **Shortcut folders and files** - the icons for file shortcuts include a shortcut symbol and names of folder shortcuts are displayed in bold text. All files and folders that appear as direct descendants of a logical folder are considered shortcuts. They are created and added with the contextual actions **Add Files** and **Add Folder** from the project root. Both contextual menu actions **Remove from Project** and **Remove from Disk (Shift+Delete)** are available for shortcuts. **Remove from Project** just removes the shortcut from the project, while **Remove from Disk (Shift+Delete)** removes the shortcut and the physical resource from the local file system.

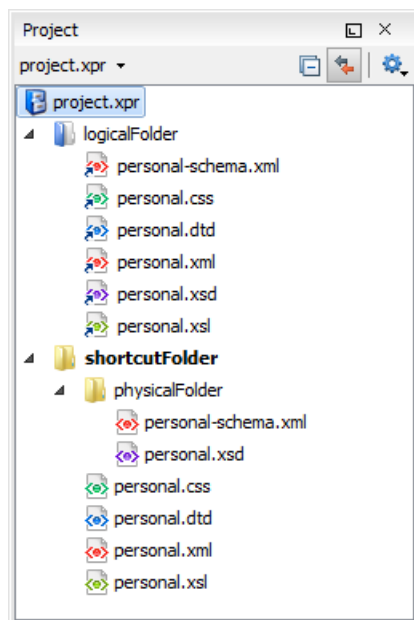


Figure 148: Project View with Examples of all Three Types of Resources

Creating New Projects

The following action is available in the **Project** menu, the **New** menu in the contextual menu, or from the drop-down menu in the top-left of the **Project** view:



New Project

Creates a new, empty project.

Creating New Project Items

The following actions are available by selecting **New** from the contextual menu, when invoked from the **Project** view:

New > File

Opens a [New file dialog box](#) that helps you create a new file and adds it to the project structure.

New > Folder

Opens a **New Folder** dialog box that allows you to specify a name for a new folder and adds it to the structure of the project.

New > Logical Folder

Available when invoked from the *project root*, this action creates a logical folder in the tree structure (the icon is a magenta folder on Mac OS X - ).

New > Logical Folders from Web

Available when invoked from the *project root*, this action replicates the structure of a remote folder accessible over FTP/SFTP/WebDAV, as a structure of logical folders. The newly created logical folders contain the file structure of the folder it points to.

Managing Physical Folders and Files

You can create physical folders by selecting **New > Folder** from the contextual menu.

When adding files to a project, the default target is the project root. To change a target, select a new folder. Files may have multiple instances within the folder system, but cannot appear twice within the same folder.

Removing Files and Folders

To remove one or more linked files or folders, select them in the project tree and press the **Delete** key, or select the contextual menu action  **Remove from Project**. To remove a linked file or folder from both project and local file system, select the contextual menu action  **Remove from Disk (Shift+Delete)**. The  **Remove from Disk (Shift+Delete)** action is also used to remove physical files or folders.



CAUTION: In most cases this action is irreversible, deleting the file permanently. Under particular circumstances (if you are running a Windows installation of Oxygen XML Developer and the *Recycle Bin* is active) the file is moved to *Recycle Bin*.

Moving Files and Folders

You can [move the resources of the project](#) with drag and drop operations on the files and folders of the tree (the **Enable drag-and-drop in Project view** option must be selected in the [View preferences page](#)).

You can also use the usual  **Cut**,  **Copy**, and  **Paste** actions to move resources in the **Project** view.

Renaming Files and Folders

There are three ways you can [rename an item in the Project view](#). Select the item in the **Project** view and do one of the following:

- Invoke the **Rename** action from the contextual menu.
- Press **F2** and type the new name.
- Click the selected item and type the new name.

To finish editing the item name, press **Enter**.

Note: The **Rename** action is also available on *logical* files.

Locating and Opening Files

If a project folder contains a lot of documents, a certain document can be located quickly in the project tree by selecting the folder containing the desired document and typing the first few characters of the document name. The desired document is automatically selected as soon as the typed characters uniquely identify its name in the folder.

The selected document can be opened by pressing the **Enter** key, by double-clicking it, or with one of the **Open** actions from the contextual menu. The files with known document types are opened in the associated editor, while binary files are opened with the associated system application. To open a file with a known document type in an editor other than the default one, use the **Open with** action. Also, dragging and dropping files from the project tree to the editor area results in the files being opened.

Saving the Project

The project file is automatically saved every time the content of the **Project** view is saved or modified by actions such as adding or removing files and drag and drop.

Linked Folders

You can create linked folders (shortcuts) by dragging and dropping folders from a system explorer to the project tree (the **Enable drag-and-drop in Project view** option must be selected in the [Views preferences page](#)), or by selecting **Add Folder** in the contextual menu from the project root.

To create a file inside a linked folder, select the **New** >  **File** action from the contextual menu. This opens the [New Document wizard](#).

Note: The linked files presented in the **Project** view are marked with a special icon. Linked folders are displayed in bold text.

Logical Folders

The project itself is considered a logical folder. You can add content to a logical folder using one of the actions available in the contextual menu, when invoked from the *project root*:

Add Folder

Adds a link to a physical folder, whose name and content mirror a real folder that exists in the local file system (the icon of this action is different on Mac OS X .

Add Files

Adds links to files on the local file system.

Add Edited File

Adds a link to the currently edited file in the project.

Validate Files

The currently selected files in the **Project** view can be checked to be XML well-formed or validated against a schema (DTD, XML Schema, Relax NG, Schematron or NVDL) with one of the following contextual menu actions found in the **Validate** submenu:

Check Well-Formedness

Checks if the selected file or files are well-formed.

Validate

Validates the selected file or files against their associated schema. EPUB files make an exception, because this action triggers a [Validate and Check for Completeness](#) operation.

Validate with Schema

Validates the selected file or files against a specified schema.

Configure Validation Scenario(s)

Allows you to configure and run a [validation scenario](#).

Applying Transformation Scenarios

The currently selected files in the **Project** view can be transformed in one step with one of the following actions available from contextual menu in the **Transform** submenu:

Apply Transformation Scenario(s)

Obtains the output with one of the [built-in scenarios](#).

Configure Transformation Scenario(s)

Opens a [dialog box](#) that allows you to configure pre-defined transformation scenarios.

Transform with

Allows you to select a transformation scenario to be applied to the currently selected files.

Along with the logical folder support, this allows you to group your files and transform them very easily.

Refactoring Actions (Available for certain document types (such as XML, XSD, and XSL))

Oxygen XML Developer includes some refactoring operations that help you manage the structure of your documents. The following actions are available from the contextual menu in the **Refactoring** submenu:

Rename resource

Allows you to change the name of a resource.

Move resource

Allows you to change the location on disk of a resource.

XML Refactoring

Opens the [XML Refactoring tool wizard](#) that presents refactoring operations to assist you with managing the structure of your XML documents.

Other XML Refactoring Actions

For your convenience, the last 5 [XML Refactoring tool operations](#) that were finished or previewed will also appear in this submenu.

Other Contextual Menu Actions

Other actions that are available in the contextual menu from the project tree include:

Open

Opens the selected files in the corresponding editor.

Open with submenu

This submenu allows you to open the selected file with the internal editor, a system application, or other internal tools: [Archive Browser](#), [Generate/Convert Schema](#), [WSDL/SOAP Analyzer](#), [Large File Viewer](#), [Hex Viewer](#), [SVG Viewer](#).

Show in Explorer (or Show in Finder on OS X)

In Windows, the content of the selected folder or file is presented in a specific explorer window. On MAC OS X, the parent folder is opened and the selected folder is highlighted in a specific finder window.

Copy Location

Copies an application-specific URL for the selected resource to the clipboard.

Refresh

Refreshes the content and the dependencies between the resources in the [Master Files directory](#).

Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files.

XPath in Files

Opens the [XPath/XQuery Builder view](#) that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.

Open/Find Resource

Opens the [Open/Find Resource dialog box](#).



Check Spelling in Files

Allows you to [check the spelling of multiple files](#).



Format and Indent Files

Opens the **Format and Indent Files** dialog box that allows you to configure the format and indent (*pretty-print*) action that will be applied on the selected documents.



Open in SVN Client

[Syncro SVN Client](#) tool is opened and it highlights the selected resource in its corresponding working copy.

Compare

Allows you to compare multiple files or directories and the order of your selection determines where they are opened in the **Compare Files** or **Compare Directories** tool. If you select two files or folders, your first selection will be opened in the left panel and the other one in the right panel.

You can also select 3 files and the tool will automatically be opened in the [three-way comparison mode](#). If you select three files, your first selection will be opened in the left panel, the second in the right panel, and the third selection will be the base (ancestor) file.

Generate Documentation > XML Schema Documentation

Opens [the XML Schema Documentation Dialog Box](#).

Generate Documentation > XSLT Stylesheet Documentation

Opens [the XSLT Stylesheet Documentation Dialog Box](#).

Generate Documentation > XQuery Documentation

Opens [the XQuery Documentation Dialog Box](#).

Generate Documentation > WSDL Documentation

Opens [the WSDL Documentation Dialog Box](#).



Properties

Displays the properties of the current file in a **Properties** dialog box.

Menu Level Actions

The following actions are available in the **Project** menu:



New Project

Creates a new, empty project.



Open Project (Ctrl + F2 (Command + F2 on OS X))

Opens an existing project. Alternatively, you can open a project by dropping an Oxygen XML Developer XPR project file from the file explorer into the **Project** panel.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Save Project As

Allows you to save the current project under a different name.



Validate all project files

Checks if the project files are well-formed and their mark-up conforms with the specified DTD, XML Schema, or Relax NG schema rules. It returns an error list in the message panel.



Filters

Opens the **Project filters** dialog box that allows you to decide which files and directories will be shown or hidden.

Enable Master Files Support

Allows you to enable the [Master Files Support](#) for each project you are working on.

Change Search and Refactor operations scope

Opens a dialog box that allows you to define the context of search and refactor operations.

Show Project View

Displays the **Project** view.

Reopen Project

Contains a list of links of previously used projects. This list can be emptied by invoking the **Clear history** action.

Moving/Renaming Resources in the Project View

The **Project view** allows you to move or rename files in the current project.

Moving Resources

To move a file or directory in the **Project view**, drag and drop it to the new location in the tree structure (the **Enable drag-and-drop in Project view** option must be selected in the [View preferences page](#)), or use the usual  **Cut**,  **Copy**, and  **Paste** actions from the contextual menu or **Edit** menu.

You can also move certain types of files (such as XML, XML Schema, Relax NG, WSDL, and XSLT) by using the **Refactoring > Move resource** action from the contextual menu. This action opens the **Move resource** dialog box that includes the following options:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, based upon the selected scope. You can [select or configure the scope](#) by using the  button.

Renaming Resources

To quickly rename a file or a directory, use the in-place editing either by pressing **F2** or by selecting **Rename** from the contextual menu.

You can also rename certain types of files (such as XML, XML Schema, Relax NG, WSDL, and XSLT) by using the **Refactoring > Rename resource** action from the contextual menu. This action opens the **Rename resource** dialog box that includes the following options:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references of the renamed resource** - Select this option to update the references to the resource you are renaming. You can [select or configure the scope](#) by using the  button.

Problems Updating References of Moved/Renamed Resources

In some cases, the references of a moved or a renamed resource can not be updated. For example, when a resource is resolved through an [XML Catalog](#) or when the path to the moved or renamed resource contains entities. For these cases, Oxygen XML Developer displays a warning dialog box.

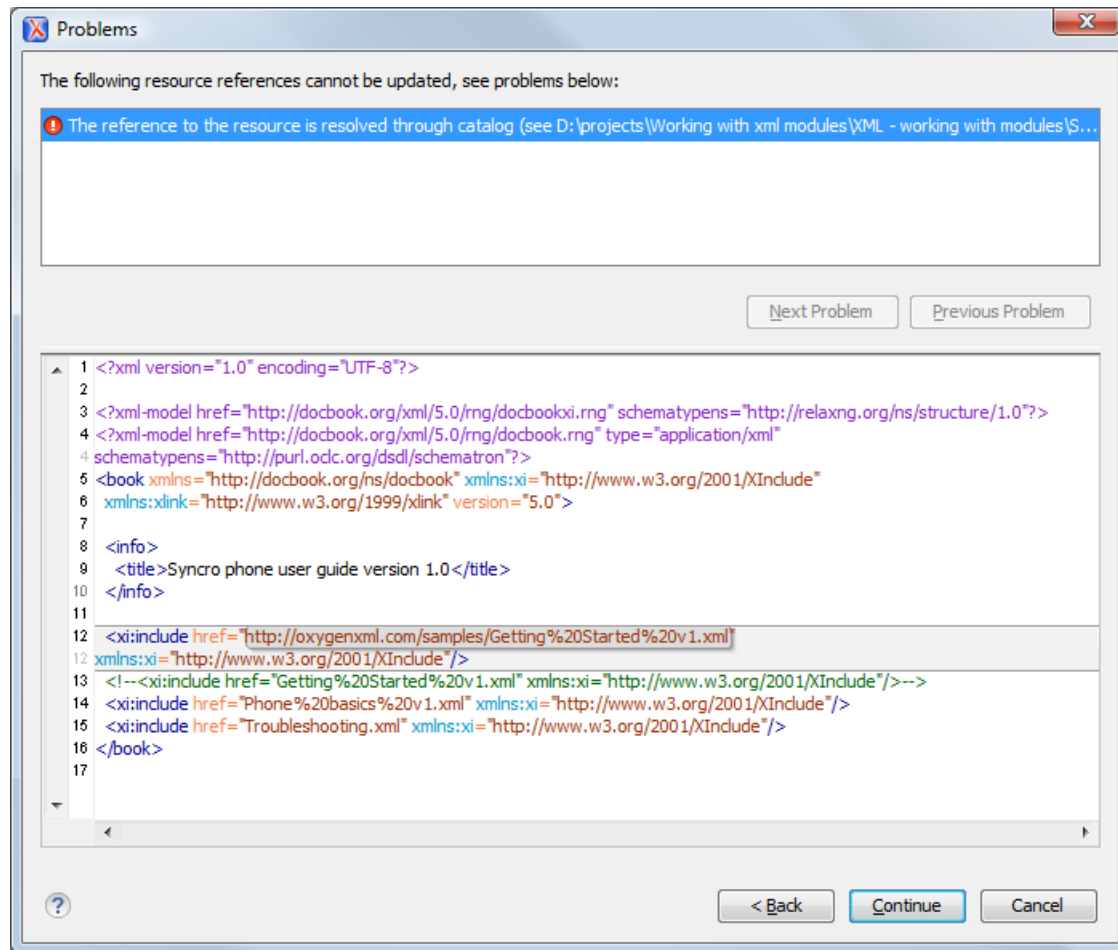


Figure 149: Problems Dialog Box

Image Preview from the Project View

Images and SVG files from the **Project view** can be previewed in a separate panel.

To preview an image, either double-click the image name or click the **Preview** action from the contextual menu of the **Project view**. Supported image types are GIF, JPEG/JPG, PNG, BMP. Once the image is displayed in the **Preview** panel using the actions from the contextual menu, you can scale the image to its original size (1:1 action) or scale it down to fit in the view's available area (**Scale to fit** action).

To preview an **SVG file**, click the **Preview** action from the contextual menu of the **Project view**. Once the SVG is displayed in the **Preview** panel, the following actions are available on the contextual menu: **Zoom in**, **Zoom out**, **Rotate** and **Refresh**.

Note: You can drag an image from the **Image Preview** view and drop it in a DITA, DocBook, or TEI document.

Sharing a Project - Team Collaboration

You can use XML projects to make team collaboration and synergy efficient and effective. Not only can you share the project files and folders, but Oxygen XML Developer also allows you to store preferences, transformation scenarios, and validation scenarios at **project level** in a *project file* (.xpr file extension). It can be saved on a version control system (such as SVN, CVS, or Source Safe) or in a shared folder, so that your team will have access to the same resources stored in the project file.

Sharing Preferences (Creating a Project-Level Options File)

To share options that are configured in certain preferences pages, you can store them in a *project file* (.xpr file extension) that can easily be shared with others. To do so, follow these steps:

1. You may want to use a fresh install for this procedure, to make sure that you do not copy personal or local preferences.
2. In the **Project view**, create a project or open an existing one.
3. Open the **Preferences** dialog box (**Options > Preferences**).
4. Configure the options in each preferences page that you want to be included in the project file and switch the storage preference to **Project Options** in each page.

Note: Some pages do not have the **Project Options** button, since the options they host might contain sensitive data (such as passwords, for example) that is unsuitable for sharing with other users.

5. Click **OK** and close the **Preferences** dialog box.

All explicitly set values are now saved in the project file. You can then share the project file so that your team will have the same option configuration that you stored in the project file.

Note: The project file extension (. xpr) must be preserved when the file is distributed to others.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Sharing Transformation Scenarios

To share created and edited transformation scenarios, you can store them in a *project file* (. xpr file extension) by following these steps:

1. In the **Project view**, create a project or open an existing one.
2. When you [create a new transformation scenario](#) or [edit an existing one](#), there is a **Storage** option. Switch the storage preference to **Project Options** in each transformation scenario you want to be included in the project file.
3. Click **OK** to store the scenario in the project file.

You can then share the project file so that your team will have access to the same transformation scenarios that you stored in the project file. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

Note: The project file extension (. xpr) must be preserved when the file is distributed to others.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Sharing Validation Scenarios

To share created and edited validation scenarios, you can store them in a *project file* (. xpr file extension) by following these steps:

1. In the **Project view**, create a project or open an existing one.
2. When you [create a new validation scenario](#) or [edit an existing one](#), there is a **Storage** option. Switch the storage preference to **Project Options** in each validation scenario you want to be included in the project file.
3. Click **OK** to store the scenario in the project file.

You can then share the project file so that your team will have access to the same validation scenarios that you stored in the project file. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

Note: The project file extension (. xpr) must be preserved when the file is distributed to others.

Notice: When a project is opened for the first time, a confirmation dialog box will be displayed that asks you to confirm that the project came from a trusted source. This is meant to help prevent potential security issues.

Syncro SVN Client (Apache Subversion™)

To assist you with team collaboration and sharing projects, Oxygen XML Developer includes an embedded [SVN \(Subversion\) Client](#). Even if you start developing a new project, or you want to migrate an existing one to Subversion, the Syncro SVN Client allows you to easily share it with the rest of your team.

It can be accessed from the **Tools** menu and can be used for synchronizing your working copy with a central repository.

It can also be started by selecting the  **Open in SVN Client** action from the contextual menu of the **Project view**. This action opens the Syncro SVN Client and shows the selected project file in the **Working Copy** view.

Related Information:

[Sharing Application Settings](#) on page 144

[Sharing Transformation Scenarios](#) on page 799

[Sharing Validation Scenarios](#) on page 417

Minimize Differences Between Versions Saved on Multiple Computers

The number of differences between versions of the same file saved by multiple content authors on multiple computers can be minimized by imposing the same set of formatting options when saving the file, for all the content authors. An example, the following procedure can be used to minimize the differences:

1. Create an Oxygen XML Developer project file (.xpr) that will be shared by all content authors.
2. Configure your own formatting preferences. To do this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Format**, configure the appropriate options in this page, then go to **Editor > Format > XML** and configure the options there.
3. Save the configured options into your project file by selecting [Project Options](#) in both of the preferences pages.
4. Save the project and commit the project file to your versioning system so all the content authors can use it.
5. Make sure the project is opened in the **Project view**.
6. Open and save your XML files in the **Author** mode.
7. Commit the saved XML files to your versioning system.

When other content authors change the files, only the changed lines will be displayed in your diff tool instead of one big change that does not allow you to see the changes between two versions of the file.

Master Files Support

Oxygen XML Developer allows you to define [Master Files](#) at project level. These *master files* are automatically used by Oxygen XML Developer to determine the context for operations such as validation, content completion, refactoring, or searches for XML, XSD, XSL, WSDL, and RNG modules. Oxygen XML Developer maintains the hierarchy of the *master files*, helping you to determine the editing context.

For more information about the *Master Files* support for XML documents, watch our video demonstrations:

<https://www.youtube.com/embed/e2oo4RWNxW8>

<https://www.youtube.com/embed/UZwg385RKNw>

<https://www.youtube.com/embed/FQNSsg57S4E>

https://www.youtube.com/embed/gn_YPD5xDCo

Master Files Benefits

Using the *Master Files* support in Oxygen XML Developer includes the following benefits:

- When the module is validated, Oxygen XML Developer automatically identifies the *master files* that include the module and validates all of them.
- The [Content Completion Assistant](#) presents all the components that are collected from the *master files* for the modules they include.
- The [Outline view](#) displays all the components that are defined in the *master files* hierarchy.
- The *master files* that are defined for the current module determines the [scope of the search and refactoring actions](#). Oxygen XML Developer performs the search and refactoring actions in the context that the *master files* determine, thus improving the speed of execution.

Enabling the Master Files Support

Oxygen XML Developer stores the *master files* in a folder located in the [Project view](#), as the first child of the project root. The *Master Files Support* is disabled by default and Oxygen XML Developer allows you to enable or disable the *Master Files Support* for each project you are working on.

To enable *Master Files* support, do one of the following:

- Select **Enable Master Files Support** from the  **Settings** menu in the top-right corner of the [Project view](#).
- Select **Enable Master Files Support** from the contextual menu of the project root folder in the [Project view](#). If a disabled *Master Files* folder exists, you can also select that option from its contextual menu.
- Click the **Enable** button in the tooltip located at the bottom of the [Project view](#). This tooltip window is displayed when the *Master Files* support is disabled. Clicking the **Read more** link takes you to the user guide. Clicking the **Enable** button opens the **Enable Master Files** dialog box. This dialog box contains general information about the **Master Files Support** and allows you to enable it. You can also use the **Detect and Enable** button in this dialog box to detect the *master files* from the current project.



Warning: Once you close this window tip, Oxygen XML Developer hides it for all projects. You can make the window tip reappear by [resetting Oxygen XML Developer to its default settings](#). However, doing so will result in you losing your customized options.

Related Information:

[Detecting Master Files](#) on page 303

[Adding Files to the Master File Directory](#) on page 304

Detecting Master Files

Oxygen XML Developer allows you to detect the *master files* using the  **Detect Master Files** option. This action applies to the folders you select in the project.

To detect *master files* over the entire project, do one of the following:

- Right-click the root of the project and select  **Detect Master Files**.
- Use the  **Detect Master Files from Project** option, available in the contextual menu of the *Master Files* folder.

Both of these options display the **Detect Master Files** wizard. In the first panel you can select the type of *master files* you want Oxygen XML Developer to detect. In the subsequent panel the detected *master files* are presented in a tree-like fashion. The resources are grouped into three categories:

- **Possible master files** - The files presented on the first level in this category are not imported or included from other files. These files are most likely to be set as *master files*.
Note: For DITA projects, only [DITA Maps](#) are reported as possible *master files*.
- **Cycles** - The files that are presented on the first level have circular dependencies between them. Any of the files presented on the first level of a cycle is a possible *master file*.
- **Standalone** - Files that do not include or import other files and are also not included or imported themselves. It is not necessary to set them as *master files*.

To set them as *master files*, simply select their checkboxes. Oxygen XML Developer marks all the children of a *master file* as modules. Modules are rendered in gray and their tool-tip presents a list of their *master files*. A module can be accessed from multiple *master files*.

The *master files* that are already defined in the project are automatically marked in the tree and cannot be removed. The only way to disable a *master file* is to delete it from the *Master Files* folder.

The next panel displays a list with the selected *master files*. Click the **Finish** button to add the *master files* in the *Master Files* folder.

You can use the **Select Master Files** option to automatically mark all *master files*. This action sets all the resources from the **Possible Master Files** category and the first resource of each **Cycle** as *master files*. The **Deselect All** button simply removes all of your selections.

Tip: We recommend that you to only add top-level files (files that are at the root of the include/import graph) in the Master Files directory. Keep the file set to a minimum and only add files that import or include other files.



Attention: If the **Master Files Support** is disabled, the Master Files directory is rendered only if it contains *master files*.

Related Information:

[Enabling the Master Files Support](#) on page 303

[Adding Files to the Master File Directory](#) on page 304

Adding Files to the Master File Directory

The Master Files directory only contains logical folders and linked files. To add files in the Master Files directory, use one of the following methods:

- Right-click a file from your project and select  **Add to Master Files** from the contextual menu.
- Select  **Add Files** or  **Add Edited File** from the contextual menu of the Master Files directory.
- Drag and drop files into the Master Files directory.
- From the contextual menu of the [Resource Hierarchy Dependencies view](#), use the  **Add to Master Files** action.

You can view the *master files* for the current resource by selecting  **Properties** from the contextual menu of the [Project view](#) and the *master files* for the current editor in the [Properties](#) and [Information](#) views.

Related Information:

[Enabling the Master Files Support](#) on page 303

[Detecting Master Files](#) on page 303

Project Validation and Transformation

The *Master Files Support* is also useful for [project-level](#) validation and transformation scenarios. When you hover the cursor over a file in the Master Files directory, Oxygen XML Developer displays the  **Validate** and  **Transform** buttons at the right of the file. Select one of these buttons to run a transformation or validation scenario. If the current node is selected, Oxygen XML Developer executes a batch transformation and validation. If the current node is not selected, Oxygen XML Developer executes the validation and transformation for the current node only. The behavior of these actions is the same as the behavior of the [corresponding actions that are available in the contextual menu](#).

Note: The tooltip of the  **Validate** and  **Transform** buttons displays the associated scenarios that you can apply.

When you hover the cursor over the Master Files directory itself, Oxygen XML Developer also displays a  **Help** button. Use this button (or press **F1** on your keyboard) to open the **Help** section regarding the *Master Files Support*.

Contextual Menu of the Master Files

The contextual menu of the Master Files directory contains the following actions:

New

Allows you to create a **File**, **Logical Folder**, or **Project**.

Add Files

Allows you to add *master files* to the Master Files directory.

Add Edited File

Use this option to add the currently edited file to the Master Files directory.

Open

Opens all the files of the Master Files directory.



Paste

Pastes the files you copy in the Master Files directory.

Rename

Allows you to rename a file in the Master Files directory.



Refresh

Refreshes the content of the Master Files directory.



Find/Replace in Files

Opens the [Find/Replace dialog box](#).

//*XPath in Files

Opens the [XPath/XQuery Builder view](#) that allows you to compose XPath and XQuery expressions and execute them over the currently edited XML document.



Open/Find Resource

Opens the [Open/Find Resource dialog box](#).



Check Spelling in Files

Opens the [Check Spelling in Files dialog box](#).



Format and Indent Files

Opens the [Format and Indent Files dialog box](#) that allows you to configure the format and indent (*pretty-print*) action that will be applied on the selected documents.

Transform

Provides access to one of the following actions:



Apply Transformations Scenario(s)

[Applies the transformation scenarios](#) associated with the Master Files directory.



Configure Transformation Scenario(s)

Opens the [Configure Transformation Scenario dialog box](#).



Transform with

Opens the **Transform with** dialog box that allows you to select the transformation scenario you want to execute.

Validate

Provides access to one of the following actions:



Check Well-Formedness

Allows you to check if a document is *Namespace Well-Formed XML*.



Validate

Oxygen XML Developer performs the validation of the *master files*.

Validate with Schema

Opens the **Validate with** dialog box. Oxygen XML Developer performs the validation of the *master files* using a schema.



Configure Validation Scenario(s)

Opens the [Configure Validation Scenario dialog box](#).



Detect Master Files from Project

Enables automatic detection of *master files*.

Enable Master Files Support

Select this option to enable the **Master Files Support**.

Searching Documents

Oxygen XML Developer includes advanced search capabilities to help you locate documents and resources.

Open/Find Resource View

The **Open/Find Resource** view is designed to offer advanced search capabilities either by using a simple text search or by using the [Apache Lucene - Query Parser Syntax](#). By default, the view is presented in the left side of the Oxygen XML Developer layout, next to the **Project view**. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

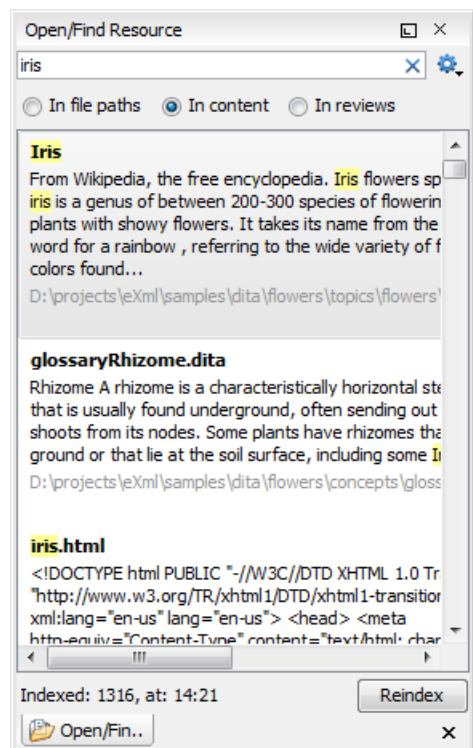


Figure 150: Open/Find Resource View

You can use this view to find a file in the current Oxygen XML Developer project by typing only a few letters of the file name of a document or a fragment of the content you are searching for. The **Open/Find Resource** view also supports searching in document edits (comments, tracked change insertions/deletions, and highlighted content) by selecting the [In reviews option](#).

Note: Full support for searching in document edits (the **In reviews** option) is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers limited support to search through a maximum of 10 edits.

Search Results

Search results are presented instantly, after you finish typing the content. The matching fragments of text are highlighted in the results list displayed in the dialog box. When you open one of the documents from the results list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document, close the corresponding tab in the **Results view** at the bottom of the editor. To display the search history, position the cursor in the search field and press **Ctrl + DownArrow (Command + DownArrow on OS X)** or **Ctrl + UpArrow (Command + UpArrow on OS X)** on your keyboard. Pressing only the **DownArrow** key moves the selection to the list of results.

Note: Searches are not case sensitive. For example, if you search for car you get the same results as when you search for Car.

Tip: Suffix searches are also supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search for `*ing` with the **in content** option selected, you will find documents that contain the word *presenting*. If you search for `*/samples/*.gif` with the **in file paths** option selected, you will find all the *gif* images from the *samples* directory.

Options Available in the View

The **Open/Find Resource** view offers the following options:

-  **Settings** - Drop-down menu that includes the following settings for the view:
 - **Clear Index** - Clears the index.
 - **Show description** - Presents the search results in a more compact form, displaying only the title and the location of the resources.
 - **Options** - Opens the [Open/Find Resource preferences page](#) where you can configure various search options. For example, you can specify a **Content language** that differs from the default UI language in case your document contains multiple languages.
- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, *tracked change* insertions/deletions, or highlights in your resources.
- **Reindex** - Use this option to reindex your resources.

Contextual Menu Actions

A contextual menu is available on each search result and provides actions applicable to that particular document. These actions include:

- **Open** - Opens the document in one of Oxygen XML Developer internal editors.
- **Open with** - Allows you to choose to open the document in the **Internal editor** or an external **System application**.
- **Show in Explorer** - Identifies the document in the system file explorer.
- **Copy Location** - Copies the file path and places it in the clipboard.

Indexing Process

The content of the resources used to search in is parsed from an index. The indexing is performed both automatically and on request. Automatic indexing is performed when you modify, add, or remove resources in the currently indexed project. If the index was never initialized, the index is not updated on project changes.

To improve performance, the indexing process skips the following set of common English words (the so-called **stop words**): *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*. This means that if you are searching for any of these words, the indexing process will not be able to match any of them. However, you can configure the list of **stop words** in the [Open/Find Resource preferences page](#).

Caching Mechanism

When you perform a search, a caching mechanism is used to gather the paths of all files linked in the current project. When the first search is performed, all project files are indexed and added to the cache. The next search operation uses the information extracted from the cache, thus improving the processing time. The cache is kept for the currently loaded project only, so when you perform a search in a new project, the cache is rewritten. Also, the cache is reset when you press the **Reindex** button.

Important: Files larger than 2GB are not indexed.

If there is no file found that matches your file pattern or text search, a possible cause is that the file you are searching for was added to the Oxygen XML Developer project after the last caching operation. In this case, re-indexing the project files with the **Reindex** button enables the file to be found. The date and time of the last index operation are displayed below the file list.

Opening the Results

Once you find the files that you want to open, select them in the list and press the **Open** button (or double-click them). Each of the selected files is opened in [the editor associated with the type of the file](#).

Note: You can drag a resource from the **Open/Find Resource** view and drop it in a DocBook, DITA, TEI or XHTML document to create a link to that resource.

For more information about the **Open/Find Resource** feature and its search capabilities, watch our video demonstration:

<https://www.youtube.com/embed/PENoDNdaGao>

Related Information:

[Open/Find Resource Dialog Box](#) on page 308

Open/Find Resource Dialog Box

The **Open/Find Resource** dialog box offers advanced search capabilities. To open the dialog box, go to **Find > Open/Find Resource (Ctrl + Shift + R (Command + Shift + R on OS X))**. You can also click the  **Open/Find Resource** toolbar button or use the  **Search for file** action that is available in some URL input fields.

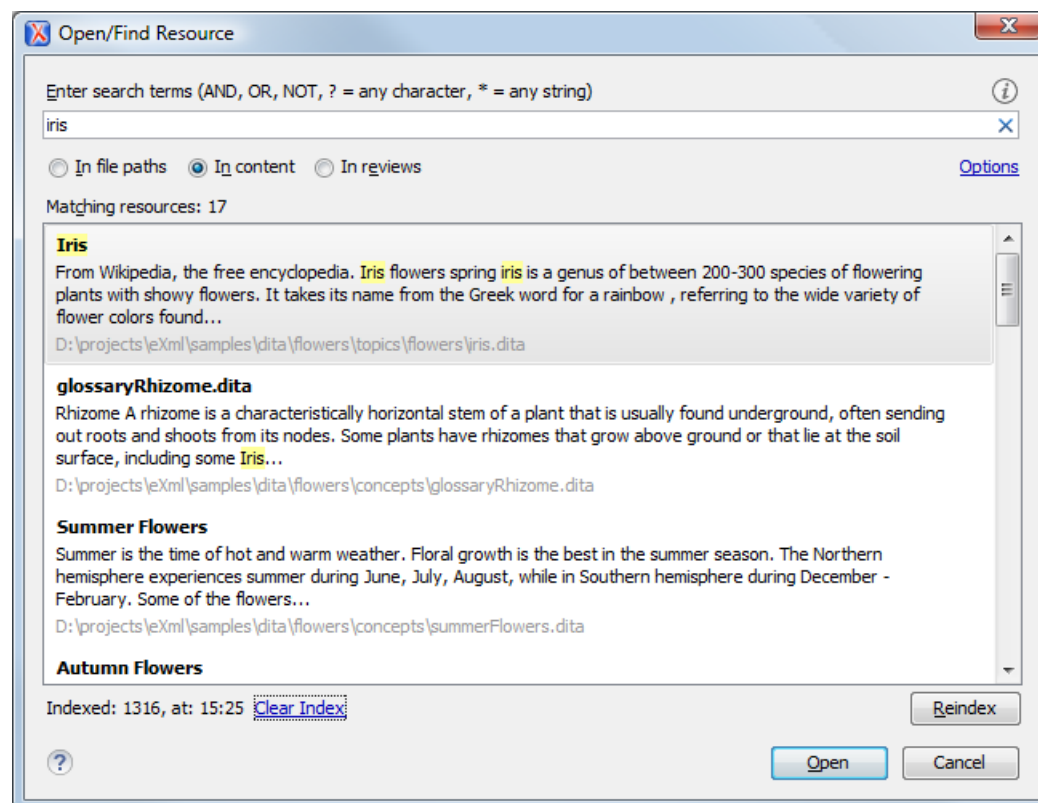


Figure 151: Open/Find Resource Dialog Box

You can use this dialog box to find a file in the current Oxygen XML Developer project by typing a few letters of the file name or a fragment of the content you are searching for. The **Open/Find Resource** dialog box also supports searching in document edits (comments, tracked change insertions/deletions, and highlighted content).

Note: Full support for searching in document edits (the **In reviews** option) is available only in the Enterprise edition of Oxygen XML Developer. The Professional edition offers limited support to search through a maximum of 10 edits.

Search Results

Search results are presented instantly, after you finish typing the content. The matching fragments of text are highlighted in the results list displayed in the dialog box. When you open one of the documents from the results

list, the matching fragments of text are highlighted in the editing area. To remove the highlighting from your document, close the corresponding tab in the [Results view](#) at the bottom of the editor. To display the search history, position the cursor in the search field and press **Ctrl + DownArrow (Command + DownArrow on OS X)** or **Ctrl + UpArrow (Command + UpArrow on OS X)** on your keyboard. Pressing only the **DownArrow** key moves the selection to the list of results.

Note: Searches are not case sensitive. For example, if you search for car you get the same results as when you search for Car.

Tip: Suffix searches are also supported, both for searching in the content of your resources and in their name. For this, you can use wildcards. If you search for **ing* with the **in content** option selected, you will find documents that contain the word *presenting*. If you search for **/samples/*.gif* with the **in file paths** option selected, you will find all the *gif* images from the *samples* directory.

Options Available in the Dialog Box

The **Open/Find Resource** dialog box includes the following options:

- **In file paths** - Select this option to search for resources by their name or by its path (or a fragment of its path).
- **In content** - Select this option to search through the content of your resources.
- **In reviews** - Select this option to search through the comments, *tracked change* insertions/deletions, or highlights in your resources.
- **Options** - Opens the [Open/Find Resource preferences page](#) where you can configure various search options. For example, you can specify a **Content language** that differs from the default UI language in case your document contains multiple languages.
- **Clear Index** - Clears the index.
- **Reindex** - Use this option to reindex your resources.

Contextual Menu Actions

A contextual menu is available on each search result and provides actions applicable to that particular document. These actions include:

- **Open** - Opens the document in one of Oxygen XML Developer internal editors.
- **Open with** - Allows you to choose to open the document in the **Internal editor** or an external **System application**.
- **Show in Explorer** - Identifies the document in the system file explorer.
- **Copy Location** - Copies the file path and places it in the clipboard.

Indexing Process

The content of the resources used to search in is parsed from an index. The indexing is performed both automatically and on request. Automatic indexing is performed when you modify, add, or remove resources in the currently indexed project. If the index was never initialized, the index is not updated on project changes.

To improve performance, the indexing process skips the following set of common English words (the so-called **stop words**): *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*. This means that if you are searching for any of these words, the indexing process will not be able to match any of them. However, you can configure the list of **stop words** in the [Open/Find Resource preferences page](#).

Caching Mechanism

When you perform a search, a caching mechanism is used to gather the paths of all files linked in the current project. When the first search is performed, all project files are indexed and added to the cache. The next search operation uses the information extracted from the cache, thus improving the processing time. The cache is kept for the currently loaded project only, so when you perform a search in a new project, the cache is rewritten. Also, the cache is reset when you press the **Reindex** button.

Important: Files larger than 2GB are not indexed.

If there is no file found that matches your file pattern or text search, a possible cause is that the file you are searching for was added to the Oxygen XML Developer project after the last caching operation. In this case, re-indexing the project files with the **Reindex** button enables the file to be found. The date and time of the last index operation are displayed below the file list.

Opening the Results

Once you find the files that you want to open, select them in the list and press the **Open** button (or double-click them). Each of the selected files is opened in [the editor associated with the type of the file](#).

For more information about the **Open/Find Resource** feature and its search capabilities, watch our video demonstration:

<https://www.youtube.com/embed/PENoDNdaGao>

Related Information:

[Open/Find Resource View](#) on page 194

[Open/Find Resource Preferences Page](#) on page 135

Searching in Content

To perform a search through the content of your resources, open the [Open/Find Resource dialog box](#) (from the **Find** menu or with **Ctrl + Shift + R (Command + Shift + R on OS X)**) or the [Open/Find Resource view](#) (by default, located on the left side of the editor), select the **in content** option, and in the search field enter the terms that you want to search for.

The **Open/Find Resource** feature is powered by [Apache Lucene](#). Apache Lucene is a free open source information retrieval software library.

You can use the **Open/Find Resource** feature to either perform a simple text search or a more complex search using the [Apache Lucene - Query Parser Syntax](#).

Complex Query Patterns Using Lucene Syntax

Using the [Apache Lucene - Query Parser Syntax](#) means you can perform any of the following searches:

- **Term Searches**

Searching for plain text:

```
Garden Preparation
```

- **Element-Specific Searches**

Searching for content that belongs to a specific element:

```
title:"Garden Preparation"
```

- **Wildcard Searches**

Using wildcards to make your search more permissive:

```
Garden Prepar?tion
```

- **Fuzzy Searches**

If you are not sure of the exact form of a term that you are interested in, use the fuzzy search to find the terms that are similar to the search term. To perform a fuzzy search, use the ~ symbol after the word that you are not sure of:

```
Garden Preparing~
```

- **Proximity Searches**

Use proximity searches to find words that are within a specific distance away. To perform a proximity search, use the ~ symbol at the end of your search. For example, to search for the word **Garden** and the word **Preparation** within 6 words of each other use:

```
"Garden Preparation"~6
```

- **Range Searches**

Use range searches to match documents whose element values are between the lower and upper bound specified in the range query. For example, to find all documents whose titles are between **Iris** and **Lilac**, use:

```
title:{Iris TO Lilac}
```

The curly brackets denote an exclusive query. The results you get when using this query are all the documents whose titles are between **Iris** and **Lilac**, but not including **Iris** and **Lilac**. To create an inclusive query use square brackets:

```
title:[Iris to Lilac]
```

- **Term Boosting Searches**

Use term prioritising searches if the fragment of text that you are searching for contains certain words that are more important to your search than the rest of them. For example, if you are searching for **Autumn Flowers**, a good idea is to prioritize the word **Autumn** since the word **Flowers** occurs more often. To prioritize a word use the ^ symbol:

```
Autumn^6 Flowers
```

- **Searches Using Boolean Operators**

You can use the **AND**, **+**, **OR**, **-**, and **NOT** operators.

To search for documents that contain both the words **Garden** and **Preparation**, use:

```
Garden AND Preparation
```

To search for documents that must contain the word **Garden** and may contain the word **Preparation**, use:

```
+Garden Preparation
```

To search for documents that contain either the word **Garden** or the word **Preparation**, use:

```
Garden OR Preparation
```

To search for documents that contain **Garden Preparation** but not **Preparation of the Flowers**, use:

```
"Garden Preparation" - "Preparation of the Flowers"
```

- **Searches Using Grouping**

To search either for the word **Garden** or **Preparation**, and the word **Flowers**, use:

```
(Garden OR Preparation) AND Flowers
```

- **Searches Using Element Grouping**

To search for a title that contains both the word **Flowers** and the phrase **Garden Preparation**, use:

```
title:(+Flowers +"Garden Preparation")
```

- **Searching for Special Characters**

Sometimes you might need to search your content for special character, such as:

```
+ - && || ! ( ) { } [ ] ^ ~ * ? : \
```

In this case, you should surround your search query with quotes. For example, to search for **(Hydrogen + Oxygen)=Water**, use:

```
"(Hydrogen + Oxygen)=Water"
```

Searching in File Paths

To perform a search in the file paths of your resources, open the [Open/Find Resource dialog box](#) (from the **Find** menu or with **Ctrl + Shift + R (Command + Shift + R on OS X)**) or the [Open/Find Resource view](#) (by default, located on the left side of the editor), select the **In file paths** option, and in the search field enter the terms that you want to search for.

The **Open/Find Resource** feature allows you to search for a resource either by its name or by its path (or by a fragment of its path).

You can use wildcards when you perform such searches:

- Use "*" to match any sequence of characters.
- Use "?" to match any single character.

For example, if you search for ***-preferences-page** you will find all the resources that contain the *-preferences-page* fragment in their name. If you search for ***/samples/*.gif**, you will find all the .gif images from the *samples* directory.

Searching in Reviews

To perform a search in the edits of your resources, open the [Open/Find Resource dialog box](#) (from the **Find** menu or with **Ctrl + Shift + R (Command + Shift + R on OS X)**) or the [Open/Find Resource view](#) (by default, located on the left side of the editor), select the **In reviews** option, and in the search field enter the terms that you want to search for.

The following options are available:

- **Type** - Specifies whether you want to search for content in comments, tracked change insertions/deletions, or highlighted content.
- **Author** - Displays all the authors of the edits in your resources. The authors are collected when indexing. You can set a specific author for your search or search all of them.
- **Time** - Specifies the time when the edits that you are searching through were created.

Both the view and the dialog box display the edits that contain the search results and their parent topics along with a short description. To hide this description, go to **Settings** and deselect the **Show Description** option.

Technical Aspects

When Oxygen XML Developer performs the indexing of your resources, the refereed content from your documents is not taken into account. For example, when DITA documents are indexed, the content from the *conref* elements is not parsed. The files that make up the index are stored on disk in the `[user_home_directory]\AppData\Roaming\com.oxygenxml.developer\lucene` folder.

Finding and Replacing Text

This section presents the find and replace features available in Oxygen XML Developer.

- The [Find/Replace in Files feature](#) enables you to define *Search for* or *Search for and Replace* operations across multiple files.
- The [Find/Replace dialog box](#) allows you to search through the current project or selected resources and offers a set of options to improve your search.
- The [Find All Elements/Attributes dialog box](#) allows you to search through the structure of the current document for elements and attributes.
- As an alternative to the dedicated search operations, you can also use the [Quick Find toolbar](#).

Related Information:

[Open/Find Resource Dialog Box](#) on page 308

[Open/Find Resource View](#) on page 194

Find/Replace Dialog Box

To open the **Find/Replace** dialog box, use the  **Find/Replace** action that is available in the **Find** menu, on the toolbar, or by pressing **Ctrl + F (Command + F on OS X)**. It is also invoked by the **Find/Replace** contextual menu action found in certain views.

You can use the **Find/Replace** dialog box to perform the following operations:

- Replace occurrences of target defined in the **Find** area with a new fragment of text defined in **Replace with** area.
- Find all the occurrences of a word or string of characters (that can span over multiple lines) in the document you are editing. This operation also takes into account all the whitespaces contained in the fragment you are searching for. The **Find/Replace** dialog box counts the number of occurrences of the text you are searching for and displays it at the bottom of the dialog box, above the **Close** button. This number is also displayed in the **Results view** after you press the **Find All** button.

The *find* operation works on multiple lines, meaning that a find match can cover characters on multiple lines of text. To input multiple-line text in the **Find** and **Replace with** areas, do one of the following:

- Press **Ctrl + Enter (Command + Enter on OS X)** on your keyboard.
- Use the **Insert newline** contextual menu action.

You can use **Perl-like regular expressions syntax** to define patterns. A content completion assistance window is available in the **Find** and **Replace with** areas to help you edit regular expressions. It is activated every time you type `\`(backslash key) or on-demand if you press **Ctrl + Space (Command + Space on OS X)** on your keyboard.

The *replace* operation can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.

Tip: To replace the tag-name start tag and its attributes with the new-tag-name tag use as **Find** the expression `<tag-name(\s+)(.*)>` and as **Replace with** the expression `<new-tag-name$1$2>`.

The **Find/Replace** dialog box contains the following options:

- **Find** - The target character string to search for. You can search for Unicode characters specified in the `\uNNNN` format. Also, hexadecimal notation (`\xNNNN`) and octal notation (`\0NNNN`) can be used. In this case you have to select the **Regular expression option**. For example, to search for a space character you can use the `\u0020` code.
- **Replace with** - The character string with which to replace the target. The string for replace can be on a line or on multiple lines. It can contain Perl notation capturing groups, only if the search expression is a regular expression and the **Regular expression option** is selected.

Note: Some regular expressions can indefinitely block the application. If the execution of the regular expression does not end in about 5 seconds, the application displays a dialog box that allows you to interrupt the operation.

Tip: Special characters such as *newline* and *tab* can be inserted in the **Find** and **Replace with** text boxes using dedicated actions in the contextual menu (**Insert newline** and **Insert tab**).

Unicode characters in the `\uNNNN` format can also be used in the **Replace with** area.

- The  **History** button - Contain lists of the last find and replace expressions. Use the  **Clear history** action from the bottom of the lists to remove these expressions.
- **XPath** - The XPath 2.0 expression you input in this combo is used for restricting the search scope.

Note: The **Content Completion Assistant** helps you input XPath expressions, valid in the current context.

- **Direction** - Specifies if the search direction is from current position to end of file (**Forward**) or to start of file (**Backward**).
- **Scope** - Specifies whether the **Find/Replace** operation is executed over the entire content of the edited document (**All** option), or over the selected lines.
- **Case sensitive** - When selected, the search operation follows the exact letter case of the text entered in the **Find** field.
- **Whole words only** - Only entire occurrences of a word are included in the search operation. This option is automatically disabled if the **Regular expression option** is selected.
- **Incremental** - The search operation is started every time you type or delete a letter in the **Find** text box.

- **Regular expression** - When this option is selected, you can use regular expressions in [Perl-like regular expressions syntax](#) to look for specific pieces of text.
 - **Dot matches all** - A dot used in a regular expression also matches end of line characters.
 - **Canonical equivalence** - If selected, two characters will be considered a match if, and only if, their full [canonical](#) decompositions match. For example, the ã symbol can be inserted as a single character or as two characters (the a character, followed by the tilde character). This option is not selected by default.
- **Wrap around** - When the end of the document is reached, the search operation is continued from the start of the document, until its entire content is covered.
- **Enable XML search options** - This option is only available when editing in **Text** mode. It provides access to a set of options that allow you to search specific XML component types:
 - **Element names** - Only the element names are included in the search operation that ignores XML-tag notations ('<', '/', '>'), attributes or white-spaces.
 - **Element contents** - Search in the text content of XML elements.
 - **Attribute names** - Only the attribute names are included in the search operation, without the leading or trailing white-spaces.
 - **Attribute values** - Only the attribute values are included in the search operation, without single quotes(') or double quotes(").
 - **Comments** - Only the content of comments is included in the search operation, excluding the XML comment delimiters ('<!--', '-->').
 - **PIs** (Processing Instructions) - Only the content is searched, skipping '<?', '?>'. e. g.: <?processing instruction?>
 - **CDATA** - Searches inside content of CDATA sections.
 - **DOCTYPE** - Searches inside content of DOCTYPE sections.
 - **Entities** - Only the entity names are searched.

The two buttons **Select All** and **Deselect All** allow a simple activation and deactivation of all types of XML components.

Note: Even if you select all options of the **Enable XML search options** section, the search is still XML-aware. If you want to perform the search over the entire file content, deselect **Enable XML search options**.

- **Find** - Executes a find operation for the next occurrence of the target. It stops after highlighting the find match in the editor panel.
- **Replace** - Executes a replace operation for the target followed by a find operation for the next occurrence.
- **Find All** - Executes a find operation and displays all results in the [Results view](#).
- **Replace All** - Executes a replace operation in the entire scope of the document.
- **Replace to End** - Executes a replace operation starting from current target until the end of the document, in the direction specified by the current selection of the **Direction** switch (**Forward** or **Backward**).

Find/Replace in Multiple Files

The **Find/Replace in Files** feature enables you to define *Search for* or *Search for and Replace* operations across multiple files. To open the **Find/Replace in Files** dialog box, use the  **Find/Replace in Files** action that is available in the following locations:

- The **Find** menu.
- The main toolbar.
- The contextual menu of the [Project view](#).
- The contextual menu of the [Data Source Explorer view](#) for most types of database connections.

The operation works on both local and remote files from an (S)FTP, WebDAV or CMS server.

Accepted Search Pattern Notes

- You can use [Perl-like regular expression syntax](#) to match patterns in text content. The *replace* operation can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.
- Exclusion patterns are accepted. For example, *.java, !*Test.java would search for all files with a .java extension, with the exception of any file whose name ends in Test.

- To replace the tag-name start tag and its attributes with the new-tag-name tag use as **Text to find** the expression `<tag-name(\s+)(.*)>` and as **Replace with** the expression `<new-tag-name$1$2>`.

Other Notes

- The encoding used to read and write the files is detected from the XML header or from the BOM. If a file does not have an XML header or BOM Oxygen XML Developer uses by default the UTF-8 encoding for files of type XML, that is for files with one of the extensions: .xml, .xsl, .fo, .xsd, .rng, .nvd1, .sch, .wsdl or [an extension associated with the XML editor type](#). For the other files it uses [the encoding configured for non-XML files](#).
- You can cancel a long operation at any time by pressing the **Cancel** button of the progress dialog box displayed when the operation is executed.
- Since the content of read-only files cannot be modified, the **Replace** operation does not process those files. For every such file, a warning message is displayed in the message panel.

Find/Replace in Files Dialog Box

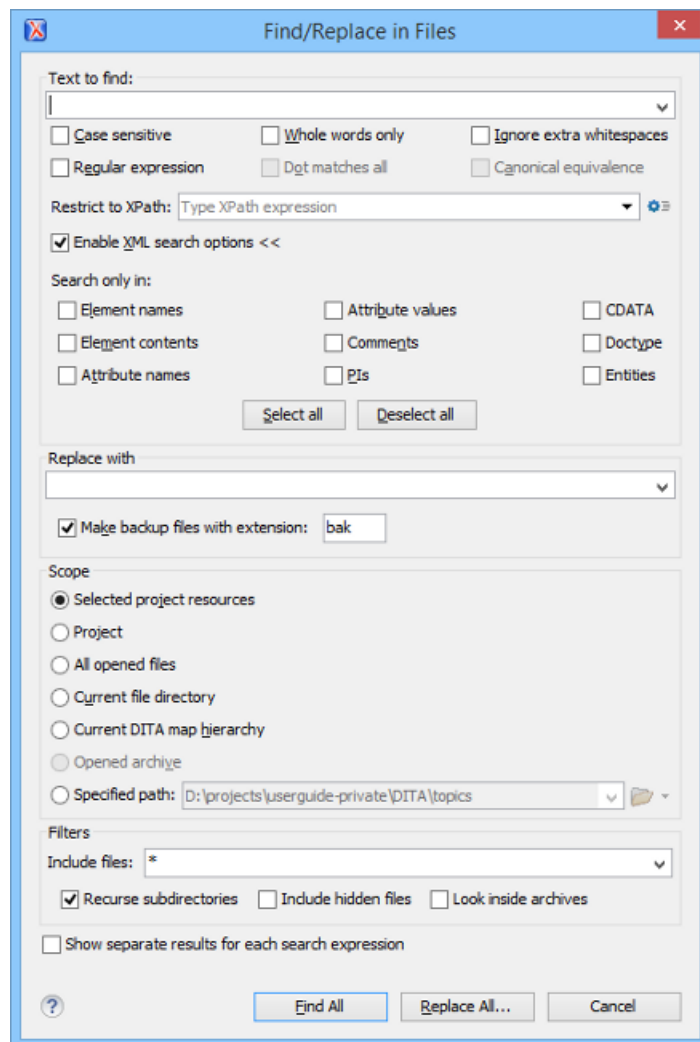


Figure 152: Find / Replace in Files Dialog Box

The dialog box contains the following options:

- Text to find** - The target character string to search for. You can search for Unicode characters specified in the \uNNNN format. Also, hexadecimal notation (\xNNNN) and octal notation (\0NNNN) can be used. In this case you have to select the **Regular expression** option. For example, to search for a space character you can use the \u0020 code.

- **Case sensitive** - When selected, the search operation follows the exact letter case of the value entered in the **Text to find** field.
- **Whole words only** - Only entire occurrences of a word are included in the search operation. This option is automatically disabled if either the **Ignore extra whitespaces** or **Regular expression** options are selected.
- **Ignore extra whitespaces** - If selected, the application normalizes the content (collapses any sequence of whitespace characters into a single space) and trims its leading and trailing whitespaces when performing the search operation.
- **Regular expression** - When this option is selected, you can use regular expressions in **Perl-like regular expressions syntax** to look for specific pieces of text.
 - **Dot matches all** - A dot used in a regular expression also matches end of line characters.
 - **Canonical equivalence** - If selected, two characters will be considered a match if, and only if, their full **canonical** decompositions match. For example, the **ã** symbol can be inserted as a single character or as two characters (the **a** character, followed by the tilde character). This option is not selected by default.
- **XPath** - The XPath 2.0 expression you input in this combo is used for restricting the search scope.

Note: The **Content Completion Assistant** helps you input XPath expressions, valid in the current context.

- **Enable XML search options** - This option is only available when editing in **Text** mode. It provides access to a set of options that allow you to search specific XML component types:
 - **Element names** - Only the element names are included in the search operation that ignores XML-tag notations ('<', '/', '>'), attributes or white-spaces.
 - **Element contents** - Search in the text content of XML elements.
 - **Attribute names** - Only the attribute names are included in the search operation, without the leading or trailing white-spaces.
 - **Attribute values** - Only the attribute values are included in the search operation, without single quotes(') or double quotes(").
 - **Comments** - Only the content of comments is included in the search operation, excluding the XML comment delimiters ('<!--', '-->').
 - **PIs (Processing Instructions)** - Only the content is searched, skipping '<?', '?>'. e. g.: **<?processing instruction?>**
 - **CDATA** - Searches inside content of CDATA sections.
 - **DOCTYPE** - Searches inside content of DOCTYPE sections.
 - **Entities** - Only the entity names are searched.

The two buttons **Select All** and **Deselect All** allow a simple activation and deactivation of all types of XML components.

Note: Even if you select all options of the **Enable XML search options** section, the search is still XML-aware. If you want to perform the search over the entire file content, deselect **Enable XML search options**.

- **Replace with** - The character string with which to replace the target. It may contain regular expression group markers if the search expression is a regular expression and the **Regular expression** checkbox is selected.
- **Make backup files with extension** - In the replace process Oxygen XML Developer makes backup files of the modified files. The default extension is **.bak**, but you can change the extension as you prefer.
- **Selected project resources** - Searches only in the selected files of the currently opened project. This option is not displayed when this dialog box is opened from the **Archive Browser view**.
- **Project files** - Searches in all files from the current project. This option is not displayed when this dialog box is opened from the **Archive Browser view**.
- **All opened files** - Searches in all files opened in Oxygen XML Developer. You are prompted to save all modified files before any operation is performed. This option is not displayed when this dialog box is started from the **Archive Browser view**.
- **Current file directory** - The search is done in the directory of the file opened in the current editor panel. If there is no opened file, this option is not available. Also, this option is not displayed when this dialog box is opened from the **Archive Browser view**.
- **Opened archive** - The search is done in an archive opened in the **Archive Browser** view. Displayed only when this dialog box is opened from the **Archive Browser view**.
- **Specified path** - Chooses the search path.
- **Include files** - Narrows the scope of the operation only to the files that match the given filters.

- **Recurse subdirectories** - When selected, the search is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When selected, the search is also performed in the hidden files.
- **Include archives** - When selected, the search is also done in all individual file entries from all supported ZIP-type archives.
- **Show separate results for each search expression** - When selected, the application opens a new tab to display the result of each new search expression. When the option is unchecked, the search results are displayed in the *Find in Files* tab, replacing any previous search results.
- **Find All** - Executes a find operation and returns the result list to the message panel. The results are [displayed in a view](#) that allows grouping the results as a tree with two levels.
- **Replace All** - Replaces all occurrences of the target contained in the specified files.

When you replace a fragment of text, Oxygen XML Developer provides a preview of the changes you make. The **Preview** dialog box is divided in two sections. The first section presents a list of all the documents containing the fragment of text you want to modify. The second section offers a view of the original file and a view of the final result. It also allows you to highlight all changes using the vertical bar from the right side of the view. The **Next change** and **Previous change** buttons allow you to navigate through the changes displayed in the **Preview** dialog box.



CAUTION: Use this option with caution. Global search and replace across all project files does not open the files containing the targets, nor does it prompt on a per occurrence basis, to confirm that a replace operation must be performed. As the operation simply matches the string defined in the find field, this may result in replacement of matching strings that were not originally intended to be replaced.

Find All Elements Dialog Box

To open the **Find All Elements** dialog box, go to **Find > Find All Elements**(**Ctrl + Shift + E** (**Command + Shift + E** on **OS X**)) or from the shortcut **Find All Elements** that is available in [the Find / Replace dialog box](#). It assists you in defining XML element / attribute search operations in the current document.

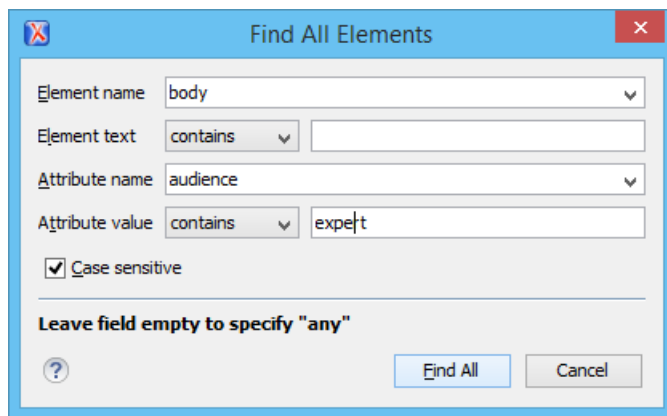


Figure 153: Find All Elements Dialog Box

The dialog box can perform the following actions:

- Find all the elements with a specified name
- Find all the elements that contain, or does not contain, a specified string in their text content
- Find all the elements that have a specified attribute
- Find all the elements that have an attribute with, or without, a specified value

You can combine all of these search criteria to filter your results.

The following fields are available in the dialog box:

- **Element name** - The qualified name of the target element to search for. You can use the drop-down menu to find an element or enter it manually. It is populated with valid element names collected from the associated schema. To specify *any* element name, leave the field empty.

Note: Use the qualified name of the element (`<namespace prefix>:<element name>`) when the document uses this element notation.

- **Element text** - The target element text to search for. The drop-down menu beside this field allows you to specify whether you are looking for an exact or partial match of the element text. For *any* element text, select **contains** from the drop-down menu and leave the field empty. If you leave the field empty but select **equals** from the drop-down menu, only elements with no text will be found. Select **not contains** to find all elements that do not include the specified text.
- **Attribute name** - The name of the attribute that must be present in the element. You can use the drop-down menu to select an attribute or enter it manually. It is populated with valid attribute names collected from the associated schema. For *any* or no attribute name, leave the field empty.

Note: Use the qualified name of the attribute (`<namespace prefix>:<attribute name>`) when the document uses this attribute notation.

- **Attribute value** - The drop-down menu beside this field allows you to specify that you are looking for an exact or partial match of the attribute value. For *any* or no attribute value, select **contains** from the drop-down menu and leave the field empty. If you leave the field empty but select **equals** from the drop-down menu, only elements that have at least an attribute with an empty value will be found. Select **not contains** to find all elements that have attributes without a specified value.
- **Case sensitive** - When this option is selected, operations are case-sensitive.

When you press **Find All**, Oxygen XML Developer tries to find the items that match all the search parameters. The results of the operation are presented as a list in the message panel.

Quick Find Toolbar

A reduced version of the [Find / Replace dialog box](#) is available as a [dockable toolbar](#). To display it press the **Alt + Shift + F (Command + Alt + F on OS X)** key combination or invoke the **Find > Quick Find** action. By default, the toolbar is displayed at the bottom of the Oxygen XML Developer window, above the status bar, but can be changed at any time by dragging (and docking) it to a different location. To hide the toolbar, use the **Close** button.

All matches are highlighted in the current editor.



Figure 154: Quick Find Toolbar

The toolbar offers the following controls:

- **Search input box** - This is where you can insert the text you want to search for. The input box keeps a history of the last used search text. The background color of the input box turns red when no match is found.
- **Next** - Advances to the next match. You can also use the **Enter** key to jump forward to the next match.
- **Previous** - Jumps to the previous match. You can also use **Shift+Enter** to jump backward to the previous match.
- **All** - Highlights all matches of the search string in the current document.
- **Incremental** - If selected, the search operation is started every time you type or delete a character in the search input box.
- **Case sensitive** - If selected, the search operation follows the exact letter case of the search text.
- **Find/Replace** - Opens the [Find/Replace dialog box](#).
- **Find/Replace in Files** - Opens the [Find/Replace in Files dialog box](#).
- **Close** - Closes the **Quick Find** toolbar.

Keyboard Shortcuts for Finding the Next and Previous Match

Navigating from one match to the next or previous one is very easy to perform using the **F3** and **Shift + F3 (Command + Shift + G on OS X)** keyboard shortcuts. They are useful for quickly repeating the last find action performed in the [Find / Replace dialog box](#), taking into account the same find options.

Restriction: These shortcuts only take XPath expressions into account if the **Find / Replace** dialog box remains opened. Once you close it, the XPath expressions are no longer considered.

Regular Expressions Syntax

Oxygen XML Developer uses the [Java regular expression syntax](#). It is **similar** to that used in Perl 5, with several exceptions. Thus, Oxygen XML Developer does not support the following constructs:

- The conditional constructs `(?{X})` and `(?(condition)X|Y)`.
- The embedded code constructs `(?{code})` and `(??{code})`.
- The embedded comment syntax `(?#comment)`.
- The preprocessing operations `\l`, `\u`, `\L`, and `\U`.

When using regular expressions, note that some sets of characters from [XPath/XML Schema/Schematron](#) are slightly different than the ones used by Oxygen XML Developer/Java in the text searches from the [Find/Replace dialog box](#) and [Find/Replace in Files dialog box](#). The most common example is with the `\w` and `\W` set of characters. To ensure consistent results between the two, it is recommended that you use the following constructs in the [Find/Replace dialog box](#) and [Find/Replace in Files dialog box](#):

- `/w` - `[#x0000-#x10FFFF] - [\p{P}\p{Z}\p{C}]` instead of `\w`
- `/W` - `[\p{P}\p{Z}\p{C}]` instead of `\W`

There are some other notable differences that may cause unexpected results, including the following:

- In Perl, `\1` through `\9` are always interpreted as back references. A backslash-escaped number greater than 9 is treated as a back reference if at least that many sub-expressions exist. Otherwise, it is interpreted, if possible, as an octal escape. In this class octal escapes must always begin with a zero. In Java, `\1` through `\9` are always interpreted as back references, and a larger number is accepted as a back reference if at least that many sub-expressions exist at that point in the regular expression. Otherwise, the parser will drop digits until the number is smaller or equal to the existing number of groups or it is one digit.
- Perl uses the `g` flag to request a match that resumes where the last match left off.
- In Perl, embedded flags at the top level of an expression affect the whole expression. In Java, embedded flags always take effect at the point where they appear, whether they are at the top level or within a group. In the latter case, flags are restored at the end of the group just as in Perl.
- Perl is forgiving about malformed matching constructs, as in the expression `*a`, as well as dangling brackets, as in the expression `abc ]`, and treats them as literals. This class also accepts dangling brackets but is strict about dangling meta-characters such as `+`, `?` and `*`.

Related Information:

[Comparison between the Java and Perl 5 regular expression syntax](#)

Spell Checking

Oxygen XML Developer includes an [automatic \(as-you-type\) spell checking feature](#), as well as a manual spell checking action to open a **Spelling** dialog box that offers a variety of options.

To manually check spelling in the current document, use the  **Check Spelling** action on the toolbar or from the **Edit** menu.

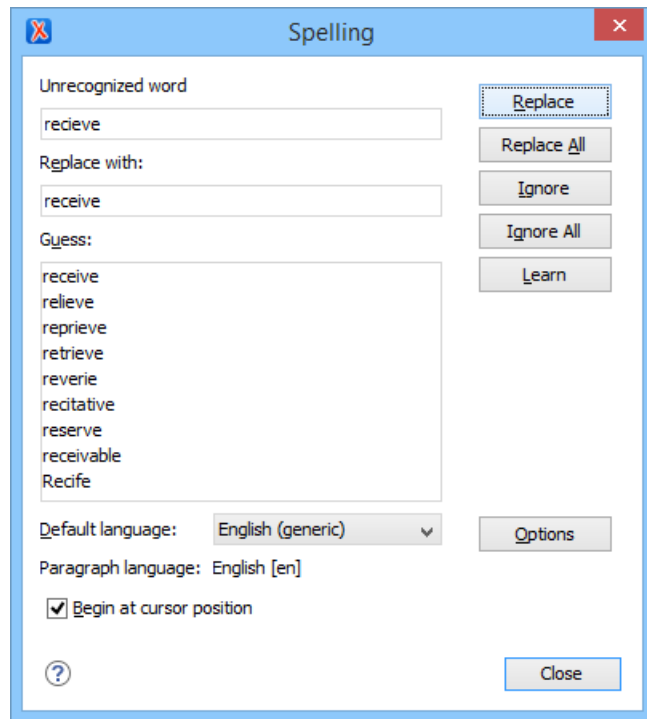


Figure 155: Check Spelling Dialog Box

The **Spelling** dialog box contains the following:

Unrecognized word

Displays the word that cannot be found in the selected dictionary. The word is also highlighted in the XML document.

Replace with

The character string that will replace the misspelled word.

Guess

Displays a list of words suggested to replace the unknown word. Double-click a word to automatically insert it in the document and resume the spell checking process.

Default language

Allows you to select the default language dictionary used by the spelling engine.

Paragraph language

In an XML document, you can mix content written in multiple languages. You can set the language code in the `lang` or `xml:lang` attribute for any particular section and Oxygen XML Developer will automatically instruct the spell checker engine to apply the appropriate language dictionary for that section.

Begin at cursor position

Instructs the spell checker to begin checking the document starting from the current cursor position.

Action Buttons

Replace

Use this button to replace the unrecognized word with the selected word from the **Replace with** field.

Replace All

Use this button to replace all occurrences of the unrecognized word with the selected word from the **Replace with** field.

Ignore

Ignores the first occurrence of the unrecognized word and allows you to continue checking the document. Oxygen XML Developer skips the content of the XML elements [marked to be ignored](#).

Ignore All

Ignores all instances of the unrecognized word in the current document.

Learn

Adds the unrecognized word to the list of valid words.

Options

Opens the [Spell Check preferences page](#) where you can configure various options in regards to the feature.

Spell Check Dictionaries and Term Lists

Oxygen XML Developer uses the **Hunspell** engine for the spell checking feature. The Hunspell spell checking engine is open source and has an LGPL license. It is designed for languages with rich morphology and complex compounding or character encoding. Each language-country variant combination have their own specific dictionaries. Oxygen XML Developer includes the following built-in dictionaries for the spell checker:

- English (US) [en_US]
- English (UK) [en_GB]
- French [fr]
- German [de_DE]
- Spanish [es_ES]

Other Hunspell Dictionaries

You can also download Hunspell dictionaries for other languages and add them to the Oxygen XML Developer spell checker. An example of a website that includes numerous dictionary files is: <http://extensions.services.openoffice.org/dictionary>.

If you cannot find a Hunspell dictionary that is already built for your language, you can build the dictionary you need. To build a full Hunspell dictionary, follow [these instructions](#) and then add the dictionary to the Oxygen XML Developer spell checker by following [this procedure](#).

Personalized Term Lists

Authoring in certain areas of expertise (for example, the pharmaceutical or automobile industries) might require the use of specific terms that are not part of the standard spell checker dictionary. To avoid marking these terms as errors, Oxygen XML Developer provides a way of [adding personalized term lists](#) to the spell check engine. This involves creating a term list file that the spell checker will recognize and it is similar to the file Oxygen XML Developer uses for storing [learned words](#).

The term list files are specific for each language and can be specific to each domain or area of expertise (for example, *legal*, *medical*, *automotive*). They can also be used to control forbidden words.

Related Information:

[Adding Spell Check Dictionaries](#) on page 322

[Adding Spell Check Term Lists](#) on page 323

[Building and Testing Hunspell Dictionaries](#)

Adding Custom Dictionaries and Term Lists

The Oxygen XML Developer spell checker allows you to add customized Hunspell dictionaries and personalized term lists. The Hunspell dictionary mechanism requires a dictionary file (with a `.dic` file extension) and an affix file (with an `.aff` file extension). The personalized term lists are custom files (with a `.tdi` file extension) that you can create to include specialized terms or specify forbidden words in the Oxygen XML Developer spell checker.

You can [add dictionaries](#) and [personalized term lists](#) to the default folder where they are stored or specify your own custom locations. You can view the default storage location in the [Spell Check Dictionaries preferences page](#) and the [Include dictionaries and term list from option](#) allows you to choose a custom storage location. All the dictionaries and term lists for a particular language that are found in either location are merged and used by the spell checker in Oxygen XML Developer.

Related Information:

[Replacing a Spell Check Dictionary](#) on page 324

Adding Spell Check Dictionaries

There are three possible scenarios for adding Hunspell dictionaries to the Oxygen XML Developer spell checker:

- You can download a pre-built Hunspell dictionary and add it to the spell checking mechanism.
- You can create a custom Hunspell dictionary file that defines your own list of words and add it to the spell checking mechanism.
- You can build your own full Hunspell dictionary and add it to the spell checking mechanism.

Download and Add a Pre-Built Hunspell Dictionary

To add a downloaded pre-built dictionary, follow these steps:

1. Download the files needed for your dictionary. You will need a *dictionary* file (with a `.dic` file extension) and an *affix* file (with an `.aff` file extension). If the dictionary does not include an affix file (`.aff`), you can create one and leave it empty, but it is needed for the mechanism to work properly. An example of a website that includes numerous dictionary files is: <http://extensions.services.openoffice.org/dictionary>.

Important: The name of the files should begin with a two letter prefix for the language code, followed by an underscore or hyphen, then two letters that indicate the country code, followed by another underscore or hyphen, and then a descriptive name (for example, `en_US_medical.dic` for a medical dictionary in the US version of the English language, or for a less specific English medical dictionary, you could omit the country code like this: `en_medical.dic`). For a list of language codes, see https://en.wikipedia.org/wiki/List_of_ISO_639-1_codes.

2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
3. Choose one of the following two options for adding the downloaded files.
 - a. Copy both files (`.dic` and `.aff`) to the default directory displayed in the **Dictionaries and term lists default folder option**.
 - b. Copy both files (`.dic` and `.aff`) to any other directory, select the **Include dictionaries and term list from option**, and select that directory. If you choose this option, make sure you read [this important note](#).
4. Restart the application for the spell checker to start using the new dictionary.

Create a Custom Hunspell Dictionary that Defines a List of Words

To create a custom Hunspell dictionary that defines your own list of words, follow these steps:

1. Create a *dictionary* file (with a `.dic` file extension) and an *affix* file (with an `.aff` file extension). The affix file (`.aff`) can be left empty, but it is needed for the mechanism to work properly.

Important: The name of the files should begin with a two letter prefix for the language code, followed by an underscore or hyphen, then two letters that indicate the country code, followed by another underscore or hyphen, and then a descriptive name (for example, `en_US_medical.dic` for a medical dictionary in the US version of the English language, or for a less specific English medical dictionary, you could omit the country code like this: `en_medical.dic`). For a list of language codes, see https://en.wikipedia.org/wiki/List_of_ISO_639-1_codes.

2. In the dictionary file (`.dic` extension), add the words you want to be included in your custom dictionary. Add one word per row and the first line needs to contain the number of words, as in the following example:

```
2
parabola
asimptotic
```

3. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
4. Choose one of the following two options for saving the files.
 - a. Save both files (`.dic` and `.aff`) to the default directory displayed in the **Dictionaries and term lists default folder option**.
 - b. Save both files (`.dic` and `.aff`) to any other directory, select the **Include dictionaries and term list from option**, and select that directory. If you choose this option, make sure you read [this important note](#).
5. Restart the application for the spell checker to start using the new dictionary.

Build and Add a Full Hunspell Dictionary

To build and add a full Hunspell dictionary, follow these steps:

1. Follow these instructions: [Building and Testing Hunspell Dictionaries](#).

Result: You should end up with a *dictionary* file (with a `.dic` file extension) and an *affix* file (with an `.aff` file extension). The affix file (`.aff`) can be empty, but it is needed for the mechanism to work properly.

Important: The name of the files should begin with a two letter prefix for the language code, followed by an underscore or hyphen, then two letters that indicate the country code, followed by another underscore or hyphen, and then a descriptive name (for example, `en_US_medical.dic` for a medical dictionary in the US version of the English language, or for a less specific English medical dictionary, you could omit the country code like this: `en_medical.dic`). For a list of language codes, see https://en.wikipedia.org/wiki/List_of_ISO_639-1_codes.

2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
3. Choose one of the following two options for saving the files.
 - a. Save both files (`.dic` and `.aff`) to the default directory displayed in the **Dictionaries and term lists default folder** option.
 - b. Save both files (`.dic` and `.aff`) to any other directory, select the **Include dictionaries and term list from** option, and select that directory. If you choose this option, make sure you read [this important note](#).
4. Restart the application for the spell checker to start using the new dictionary.

Related Information:

[Adding Spell Check Term Lists](#) on page 323

Adding Spell Check Term Lists

You can create personalized term lists that are used to store specialized terms or control forbidden words. They can then be added to one of the directories that store the spell check dictionaries and the spell checker will be merge them with all the dictionaries and other term lists for a particular language.

Create and Add Personalized Term Lists

To create and add a personalized term list, follow these steps:

1. Create a *term list* file (with a `.tdi` file extension). The name of the file must begin with a two letter prefix that indicates the language it should be attached to, followed by an underscore or hyphen, and then a descriptive name (for example, `en_US_myterms.tdi` for term list in the US version of the English language or `en_myterms.tdi` for a less specific English term list). For a list of language codes, see https://en.wikipedia.org/wiki/List_of_ISO_639-1_codes.
2. In the term list file (`.tdi` extension), add the terms you want to be included in your custom dictionary. If you need to specify forbidden terms, those words simply need to be preceded by an asterisk. Add one word per row, as in the following example:

```
parabola
asimptotic
*hyperbola
```

3. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
4. Choose one of the following two options for saving the file.
 - a. Save the file (`.tdi`) to the default directory displayed in the **Dictionaries and term lists default folder** option.
 - b. Save the file (`.tdi`) to any other directory, select the **Include dictionaries and term list from** option, and select that directory. If you choose this option, make sure you read [this important note](#).
5. Restart the application for the spell checker to start using the new term list.

Related Information:

[Adding Spell Check Dictionaries](#) on page 322

Replacing a Spell Check Dictionary

There are several possible scenarios for replacing an existing Hunspell dictionary for the Oxygen XML Developer spell checker:

- You can download a pre-built Hunspell dictionary and replace an existing dictionary with it.
- You can build your own full Hunspell dictionary and replace an existing dictionary with it.

Download a Pre-Built Hunspell Dictionary and Replace an Existing One

To replace an existing dictionary with a downloaded pre-built dictionary, follow these steps:

1. Download the files needed for your dictionary. You will need a *dictionary* file (with a *.dic* file extension) and an *affix* file (with an *.aff* file extension). If the dictionary does not include an affix file (*.aff*), you can create one and leave it empty, but it is needed for the mechanism to work properly. An example of a website that includes numerous dictionary files is: <http://extensions.services.openoffice.org/dictionary>.
2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
3. Choose one of the following two options to replace existing files.

- a. Replace the existing files (*.dic* and *.aff*) for the particular language in the default directory displayed in the **Dictionaries and term lists default folder option**. Leave the **Include dictionaries and term list from** option deselected.
- b. Replace existing files (*.dic* and *.aff*) for the particular language in a directory specified in the **Include dictionaries and term list from option**. If you choose this option, make sure you read [this important note](#).

Important: Do not alter the naming convention. The name of the files must begin with a two letter prefix that indicates the language it should be attached to (for example, *en_US.dic* for a US English dictionary or *en.dic* for a less specific English dictionary). For a list of language codes, see https://en.wikipedia.org/wiki/List_of_ISO_639-1_codes.

4. Restart the application for the spell checker to start using the new dictionary.

Build a Full Hunspell Dictionary and Replace an Existing One

To replace an existing dictionary with a full Hunspell dictionary that you build, follow these steps:

1. Follow these instructions: [Building and Testing Hunspell Dictionaries](#).

Result: You should end up with a *dictionary* file (with a *.dic* file extension) and an *affix* file (with an *.aff* file extension). The affix file (*.aff*) can be empty, but it is needed for the mechanism to work properly.

2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Spell Check > Dictionaries**.
3. Choose one of the following two options to replace existing files.
 - a. Replace the existing files (*.dic* and *.aff*) for the particular language in the default directory displayed in the **Dictionaries and term lists default folder option**. Leave the **Include dictionaries and term list from** option deselected.
 - b. Replace existing files (*.dic* and *.aff*) for the particular language in a directory specified in the **Include dictionaries and term list from option**. If you choose this option, make sure you read [this important note](#).
4. Restart the application for the spell checker to start using the new dictionary.

Related Information:

[Adding Custom Dictionaries and Term Lists](#) on page 321

Learned Words

Spell checker engines rely on dictionaries to decide if a word is spelled correctly. To instruct the spell checker engine that an unknown word is actually correctly spelled, you need to add that word to a list of learned words. There are two ways to do this:

- Invoke the contextual menu on an unknown word, then select **Learn word**.
- Press the **Learn** button from the **Spelling dialog box** that is invoked by using the  **Check Spelling** action on the toolbar.

Note: To delete items from the list of learned words, use the **Delete learned words** option in the [Editor > Spell Check > Dictionaries](#) preferences page.

Ignored Words (Elements)

There are certain XML elements (such as `programlisting`, `codeblock`, `codeph`, `filepath`, or `screen`) in which you may want the content to always be skipped during the spell check process. This can be done in one of several ways:

- You can skip through them manually, word by word, using the **Ignore** button in the [Spelling dialog box](#) that is invoked by using the  **Check Spelling** action on the toolbar.
- You can automatically skip the content of certain elements by maintaining a set of known element names that should never be checked. You can manage this set of element names by using the [Ignore elements](#) section in the **Spell Check** preferences page.

Automatic Spell Check

Oxygen XML Developer includes an option to automatically check the spelling as you type. This feature is disabled by default, but it can be enabled and configured in the [Spell Check preferences page](#). When the [Automatic Spell Check option](#) is selected, unknown words are underlined and some actions are available in the contextual menu to help you correct the word or prevent the word from being reported in the future.

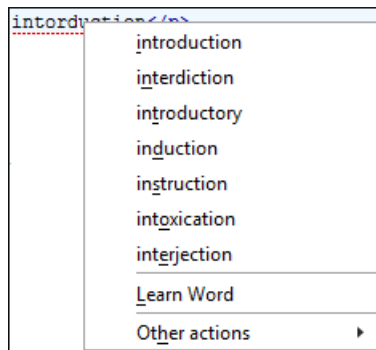


Figure 156: Automatic Spell Checking in Text Mode

The contextual menu includes the following actions:

Delete Repeated Word

Allows you to delete words that were repeated in consecutive order.

List of Suggestions

A list of words suggested by the spell checking engine as possible replacements for the unknown word.

Learn Word

Allows you to add the current unknown word to the persistent dictionary of [learned words](#).

Other actions

This submenu give you access to all the usual contextual menu actions.

Related Information:

[Learned Words](#) on page 324

Spell Check Multiple Files

The  **Check Spelling in Files** action allows you to check the spelling on multiple local or remote documents. This action is available in the following locations:

- The **Edit** menu.
- The contextual menu of the [Project view](#).

This action opens the **Check Spelling in Files** dialog box that allows you to define the scope and several other options. After you configure the settings for the operation, click the **Check All** button to check the spelling in all

specified files. The spelling corrections are displayed in the [Results view](#) at the bottom of the editor and you can group the reported errors as a tree with two levels.

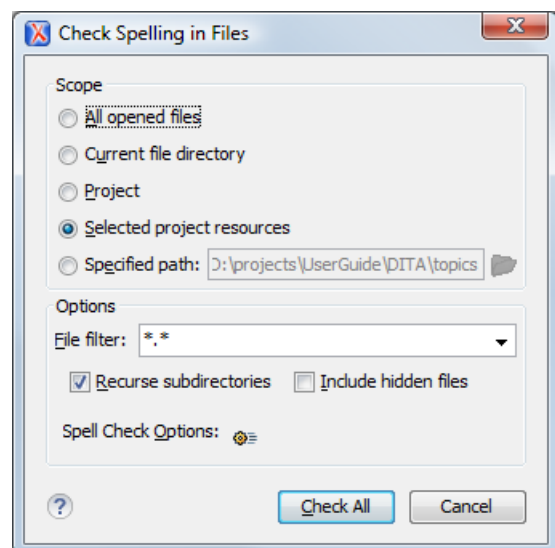


Figure 157: Check Spelling in Files Dialog Box

The following scopes are available:

- **All opened files** - The spell check is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - Checks the spelling in the files located at a path that you specify.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When selected, the spell check is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When selected, the spell check is also performed in the hidden files.
- **Spell Check Options** - The spell check processor uses the options available in the [Spell Check preferences panel](#).

Working with Special Characters

Oxygen XML Developer provides support for special characters in various ways:

- You can [insert special characters using the Character Map feature](#).
- Oxygen XML Developer provides [support for the Unicode characters](#).
- For special characters that are not included in any of the default fonts, Oxygen XML Developer will try to find that symbol in a [fallback font](#).
- Oxygen XML Developer includes some encoding options and features to help determine how to handle [documents with unsupported characters](#).
- Oxygen XML Developer allows you to [choose the fonts to be used in the various editing modes](#) and in some cases, changing the font may be a solution when special characters are not rendered as expected.
- Oxygen XML Developer supports bidirectional text, such as Arabic, Hebrew, and certain Asian languages, or other special characters that are combined into a single glyph. In **Text** mode, you can enable or disable the support for special characters. See [Special Character Support in Text Mode](#) on page 209 for details about which option to choose.

- Oxygen XML Developer includes a contextual menu action that [converts a sequence of hexadecimal characters to the corresponding Unicode character](#).
- In **Text** mode, Oxygen XML Developer includes several contextual menu actions (in the **Source** submenu) for [encoding or decoding base64 schemes](#), [base32 schemes](#), or [hex schemes](#). There are also several encoding options in the [Encoding preferences page](#).

Tip: To edit documents written in languages that use special characters (such as Japanese or Chinese), change the font to one that supports the specific characters (a Unicode font). For the Windows platform, *Arial Unicode MS* or *MS Gothic* is recommended. To change the font in Oxygen XML Developer, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Appearance > Fonts**. This preferences page allows you to select a font for each editing mode.

Inserting Special Characters

You can insert symbols and other special characters by using the **Character Map** dialog box that can be opened with the **Edit >  Insert from Character Map** action. If you have [chosen to display the Symbols toolbar](#) (in the [Configure Toolbars dialog box](#)), you can also use the  **Symbols** drop-down menu to insert some of the most commonly used symbols and selecting **More symbols** from that menu will also open the **Character Map** dialog box.

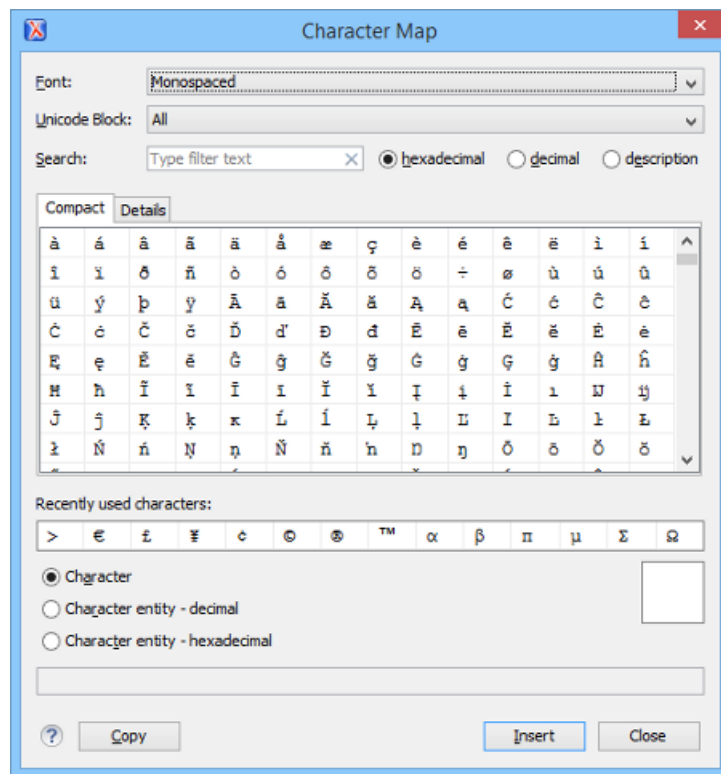


Figure 158: Character Map Dialog Box

The **Character Map** dialog box allows you to visualize all characters that are available in a particular font, pick the character you need, and insert it in the document you are editing. It includes the following fields and sections:

Font

Use this drop-down list to choose the font for which you want to display characters.

Unicode Block

Use this drop-down list to only see a certain range of characters. This will filter the number of characters displayed, showing only a contiguous range of characters corresponding to the selected block. Unassigned characters are displayed as empty squares.

Search

Use this filter to search for a character by one of the following attributes:

- **hexadecimal**
- **decimal**
- **description**

Note: Selecting **description** opens the **Details tab**. If you enter a character description in the **Search** field, **description** is selected automatically.

Character Table Section

The characters that are available to be inserted are listed in two tabs:

- **Compact** - Matrix-like table that displays a visual representation of the characters.
- **Details** - Displays the available characters in a tabular format, presenting their decimal and hexadecimal value along with their description.

Recently Used Characters Section

Displays the symbols that you have used recently and you can also select one from there to insert it in the current document.

Character Mode Section

The next section of the dialog box allows you to select how you want the character to appear in your document. You can choose between the following:

- **Character**
- **Character entity - decimal**
- **Character entity - hexadecimal**

You can see the character or code that will be inserted in your document next to the selections in this section. You can also see the name and range name of a character either at the bottom of the dialog box, or in a tooltip when hovering the cursor over the character.

Press the **Insert** button to insert the selected character in the current editor at cursor position. You will see the character in the editor if **the editor font** is able to render it. The **Copy** button copies it to the clipboard without inserting it in the editor.

Note: The **Character Map** dialog box cannot be used to insert Unicode characters in the **Grid editor**. Accordingly, the **Insert** button of the dialog box will be disabled if the current document is edited in **Grid** mode.

Unicode Fallback Font Support

Oxygen XML Developer provides fonts for most common Unicode ranges. However, if you **use special symbols or characters** that are not included in the default fonts, they will be rendered as small rectangles. A *fallback* font is a reserve typeface that contains symbols for as many **Unicode characters** as possible. When a display system encounters a character that is not part of the range of any of the available fonts, Oxygen XML Developer will try to find that symbol in a *fallback* font.

Example of a Scenario Where a Fallback Font is Needed

Suppose that you need to insert the wheelchair symbol (♿ - U+267F) into your content in a Windows operating system. By default, Oxygen XML Developer does not render this symbol correctly since it is not included in any of the default fonts. It is included in **Segoe UI Symbol**, but this font is not part of the default fonts that come with Oxygen XML Developer. To allow Oxygen XML Developer to recognize and render the symbol correctly, you can add **Segoe UI Symbol** as a *fallback* font.

Add a Fallback Font in Windows (7 or Later)

To add a fallback font to the Oxygen XML Developer installation, use the following procedure:

1. Start Windows Explorer and browse to the `[OXYGEN_INSTALL_DIR]/jre/lib/fonts` directory.
2. Create a directory called `fallback` (if it is not already there).
3. Copy a font file (True Type Font - TTF) that includes the special characters into this directory.

Tip: You could, for example, copy the **Segoe UI Symbol Regular** font from `C:\Windows\Fonts`.

4. Restart Oxygen XML Developer for the changes to take full effect.

Result: Whenever Oxygen XML Developer finds a character that cannot be rendered using its standard fonts, it will look for the glyph in the fonts stored in the `fallback` folder.

Alternate Solution for Other Platforms

For Mac OS X or other platforms, you could use the following approach:

1. Use a font editor (such as [FontForge](#)) to combine multiple true type fonts into a single custom font.
2. Install the font file into the dedicated font folder of your operating system.
3. In Oxygen XML Developer, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Appearance > Fonts**.
4. Click the **Choose** button for the particular editing mode (**Editor** for **Text** mode) and select your custom font from the drop-down list in the subsequent dialog box.
5. Restart Oxygen XML Developer for the font changes to take full effect.

Related Information:

[Working with Unicode](#) on page 329

[Inserting Special Characters](#) on page 327

Opening and Saving Documents with Unsupported Characters

When loading documents, Oxygen XML Developer reads the document prolog to determine the specified encoding type. This encoding is then used to instruct the Java Encoder to load support for and to save the document using the specified code chart. When the encoding type cannot be determined, Oxygen XML Developer displays the **Available Java Encodings** dialog box that provides a list of all encodings supported by the Java platform.

If the opened document contains an unsupported character, Oxygen XML Developer applies [the policy specified in the Encoding Errors Handling option](#). If the policy is set to REPORT, Oxygen XML Developer displays an error dialog box with a message about the character not allowed by the encoding. If the policy is set to IGNORE, the character is removed from the document displayed in the editor panel. If the policy is set to REPLACE, the character is replaced with a standard replacement character for that encoding.

While in most cases you are using UTF-8, simply changing the encoding name causes the application to save the file using the new encoding.

When saving a document edited in the **Text**, **Grid**, or **Design** modes, if it contains characters not included in the encoding declared in the document prolog, Oxygen XML Developer presents a notification that you need to resolve the conflict before saving the document.

When a document with a UTF-16 encoding is edited and saved in Oxygen XML Developer, the saved document has a byte order mark (BOM) that specifies the byte order of the document content. The default byte order is platform-dependent. That means that a UTF-16 document created on a Windows platform (where the default byte order mark is *UnicodeLittle*) has a different BOM than one created on a Mac OS platform (where the byte order mark is *UnicodeBig*). The byte order and the BOM of an existing document are preserved when the document is edited and saved.

Working with Unicode

Unicode provides a unique number for every character, independent of the platform and language. Unicode is internationally recognized and is required by modern standards (such as XML, Java, JavaScript, LDAP, CORBA 3.0, WML, etc.).

Oxygen XML Developer provides support for the Unicode standard, enabling your XML application to be targeted across multiple platforms, languages, and countries without re-engineering. Internally, the Oxygen XML Developer uses 16 bit characters covering the Unicode Character set.

Note: Oxygen XML Developer may not be able to display characters that are not supported by the operating system (either not installed or unavailable).

Tip: On windows, you can enable the support for **CJK** (Chinese, Japanese, Korean) languages from **Control Panel / Regional and Language Options / Languages / Install files for East Asian languages**.

Related Information:

[Unicode Fallback Font Support](#) on page 328

[Inserting Special Characters](#) on page 327

Special Character Support in Text Mode

If bidirectional text, such as Arabic or Hebrew languages, certain Asian languages (such as Devanagari, Bengali, Gurmukhi, Gujarati, Oriya, Tamil, Telugu, Kannada, Malayalam, Sinhala, Thai, Khmer), or other special characters (such as combining characters) are detected in a document, Oxygen XML Developer displays a **Special Characters Detected** dialog box that prompts you to **Enable** or **Disable** support for these special characters (you can also enable or disable the support for special characters in the [Open/Save preferences page](#)).

Enabled

If you choose to enable support for special characters and as long as you [chose a font](#) that supports the particular special characters, this means that the *glyphs* will be rendered properly in **Text** mode and the cursor navigation mechanism will recognize them as they are shown.

Example: The Â glyph could be inserted using a consecutive combination of two characters (**U+00C2** followed by **U+0323**). With the special characters support enabled and the **SansSerif** font chosen, that glyph will be rendered properly (a capital letter A with a circumflex above it and a dot below) and you can navigate through the glyph in one step (pressing the right/left arrow key once).

Restriction: When support for special characters is enabled, the [folding support](#) is not available.

Disabled

If you choose to disable support for special characters, it may affect text rendering, cursor navigation, and text management operations. However, this is helpful if you need to open [very large documents](#) since disabling the bidirectional editing support can enhance performance.

Example: The Â glyph could be inserted using a consecutive combination of two characters (**U+00C2** followed by **U+0323**). With the special characters support disabled, that glyph may or may not be rendered properly and when navigating through the glyph, it would take two steps (pressing the right/left arrow key twice).

Restriction: Bidirectional content in the **Text** mode cannot be rendered using **Bold** or **Italic**.

Related Information:

[Special Character Support in Grid Mode](#) on page 226

[Inserting Special Characters](#) on page 327

Special Character Support in Grid Mode

If you are editing documents with a bidirectional text orientation or other special characters (such as combining characters), you can change the way the text is rendered and edited in the grid cells by using the **Change Text Orientation**(**Ctrl + Shift + O** (**Command + Shift + O on OS X**)) action that is available from the **Edit** menu in the **Grid** editing mode. Use this action to switch from the default left to right text orientation to the right to left orientation, and vice versa.

Note: This change applies only to the text from the cells, and not to the layout of the grid editor.

<?xml	version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	世界的に話すなら、Unicode です。
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 159: Default left to right text orientation

<?xml	"version="1.0" encoding="UTF-8"
sample (9 rows)	#text
1	عندما يريد العالم أن يتكلم، فهو يتحدث بلغة يونيكود.
2	Quan el món vol conversar, parla Unicode
3	כאשר העולם רוצה לדבר, הוא מדבר ב-Unicode
4	Ha a világ beszélni akar, azt Unicode-ul mondja
5	Quando il mondo vuole comunicare, parla Unicode
6	。世界的に話すなら、Unicode です
7	세계를 향한 대화, 유니코드로 하십시오
8	Når verden vil snakke, snakker den Unicode
9	Når verda ønskjer å snakke, talar ho Unicode

Figure 160: Right to left text orientation

Related Information:

[Special Character Support in Text Mode](#) on page 209

[Inserting Special Characters](#) on page 327

Loading Large Documents

When you open a document with a file size larger than the limit configured in [Open/Save preferences](#), Oxygen XML Developer prompts you to choose whether you want to optimize the loading of the document for large files or for huge files.

If your file has a size smaller than 300 MB, the recommended approach is [Optimize loading for large files](#). For documents that exceed 300 MB the recommended approach is [Optimize loading for huge files](#).

File Sizes Smaller than 300 MB

For editing large documents (file size up to 300 Megabytes), a special memory optimization is implemented on loading such a file so that the total memory allocated for the application is not exceeded.

A temporary buffer file is created on disk so you have to make sure that the available free disk space is at least double the size of the large file that you want to edit. For example, Oxygen XML Developer can load a 200-Megabytes file using a minimum memory setting of 512 Megabytes and at least 400-Megabytes free disk space.

The increase of the maximum size of editable files includes the following restrictions:

- A file larger than the value of the above option is edited only in **Text** mode.
- The [automatic validation](#) is not available when editing a very large file.
- The XPath filter is disabled in [the Find/Replace dialog box](#).
- The bidirectional Unicode support (right-to-left writing) is disabled.

- The [Format and indent the document on open](#) option is deselected for non-XML documents. For XML documents, it is done optimizing the memory usage but without respecting the options set in [the Format preferences page](#).
- Less precise localizations for the results of an [XPath expression](#).

File Sizes Greater than 300 MB

Files tend to become larger and larger mostly because they are frequently used as a format for database export or for porting between different database formats. Traditional text editors simply cannot handle opening these huge export files, some having sizes exceeding one gigabyte, because all the file content must be loaded in memory before the user can actually view it.

The file is split in multiple pages (each having about 1MB in size). Each page is individually loaded (and edited) in the **Text** mode by using the special horizontal slider located at the top of the editing area. The loading operation is very fast and has no upper limit for the size of the loaded file.

The increase of the maximum size of editable files includes the following restrictions:

- For XML files, only the UTF-8, UTF-16, and ASCII encodings are handled; for all non-XML files, the content is considered to be UTF-8.
- Files can be edited in **Text** editing mode only.
- The [automatic validation](#) is disabled.
- The XPath filter is disabled in the [Find/Replace dialog box](#).
- The bidirectional Unicode support (right-to-left writing) is disabled.
- The [Format and indent the document on open](#) option is deselected for non-XML documents. For XML documents, the format and indent operation it is done optimizing the memory usage, but it ignores the options set in [the Format preferences page](#).
- The [Outline view](#) is not supported.
- The file content is soft wrapped by default.
- The [Find/Replace dialog box](#) only supports the **Find** action.
- Saving changes is possible if **Safe save** is activated.
- The **undo** operation is not available if you go to other pages and come back to the modified page. the Undo operation loses its previous states if the back and forth between.

Documents with Long Lines

When working with documents that contain lines of text that exceed the boundaries of your monitor, you might want to see the text wrapped. To do so, use one of the following methods:

- Press **Ctrl + Shift + Y (Command + Shift + Y on OS X)** to toggle the line wrap feature for the current document only.
- Select the [Line wrap](#) option in the **Text** preferences page to apply the line wrap to all documents.

Features that Might be Affected by Wrapping Lines of Text

Documents that contain thousands of characters per line can affect the performance of Oxygen XML Developer **Text** mode. When a certain line length limit is reached (controlled from the [Optimize loading for documents with lines longer than \(Characters\)](#) on page [option](#)), Oxygen XML Developer prompts you to wrap the lines of text. By doing so, the following features may be affected to maintain a reasonable level of productivity:

- The editor uses the Monospaced font.
- You cannot set font styles.
- [Automatic validation](#) is disabled.
- [Automatic spell checking](#) is disabled.
- When editing XML documents, the **XPath** field is disabled in the [Find/Replace dialog box](#).
- Less precise localization for executed XPath expressions in XML documents. The XPath executions use SAX sources for a smaller memory footprint. We recommend using XPath 2.0 instead of XPath 1.0 because it

features an increased execution speed and uses a smaller memory footprint. Running an XPath expression requires additional memory of about 2 or 3 times the size of the document on disk.

Handling Read-Only Files

If a file marked as read-only is opened in Oxygen XML Developer you can by default perform modifications to it. This behavior is controlled by the [Can edit read only files option](#). When attempting to save such files you will be prompted to save them to another location.

You can check out the read-only state of the file by looking in the [Properties view](#). If you modify the file properties from the operating system and the file becomes writable, you can modify it on the spot without having to reopen it.

The read-only state is marked with a lock decoration that appears in the editor tab and specified in the tooltip for a certain tab.

Scratch Buffer

The **Scratch Buffer** view can be used for storing fragments of arbitrary text during the editing process. It can be used to drop bits of paragraphs (including arbitrary XML markup fragments) while rearranging and editing the document and also to drag and drop fragments of text from the Scratch Buffer to the editor panel. The **Scratch Buffer** is basically a text area offering XML syntax highlight. The view's contextual menu contains basic edit actions such as **Cut**, **Copy**, and **Paste**.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Compare Files or Directories

Oxygen XML Developer provides a simple means of performing file and folder comparisons. You can see the differences in your files and folders and merge the changes. You can also use the file comparison to compare fragments or files inside zip-based archives.

There are two types of comparison tools: **Compare Directories** or **Compare Files**. These utilities are available from the **Tools** menu or can be opened as stand-alone applications from the Oxygen XML Developer installation folder (`diffDirs.exe` and `diffFiles.exe`).

Starting the Tools from a Command Line

The comparison tools can also be started by using command-line arguments. In the installation folder there are two executable shells (`diffFiles.bat` and `diffDirs.bat` on Windows, `diffFiles.sh` and `diffDirs.sh` on OS X and Linux). To specify files or directories to compare, you can pass command-line arguments to each of these shells. The arguments can point to file or folder paths in directories or archives (supported formats: *zip*, *docx*, and *xlsx*).

Directory Comparison Example

To start a [comparison between the two directories](#), use the following construct:

```
diffDirs.bat/diffDirs.sh [directory path 1] [directory path 2]
```

If you pass only one argument, you are prompted to manually choose the second directory or archive.

For example, to start a comparison between two Windows directories, the command line would look like this:

```
diffDirs.bat "c:\documents new" "c:\documents old"
```

Tip: If there are spaces in the path names, surround the paths with quotes.

File Comparison Example

To start a [comparison between 2 or 3 files](#), use the following construct: `diffFiles.bat/diffFiles.sh [path to left file] [path to right file] [path to base file]`.

If three files are specified, the tool will start in the [3-way comparison mode](#). If only two files are specified, the tool will start in the [2-way comparison mode](#). The first specified file will be added to the left panel in the comparison tool, the second file to the right panel, and the optional third file will be the base (ancestor) file used for a 3-way comparison. If you pass only one argument, you are prompted to manually choose another file.

For example, to do a 3-way comparison on Windows, the command line would look like this:

```
diffFiles.bat "c:\docs\file 1" "c:\docs\file 2" c:\docs\basefile
```

Tip: If there are spaces in the path names, surround the paths with quotes.

Compare Files

The **Compare Files** tool can be used to compare files or XML file fragments. The tool provides a mechanism for comparing two files or fragments, as well as the mechanism for a three-way comparison. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (`diffFiles.exe`).

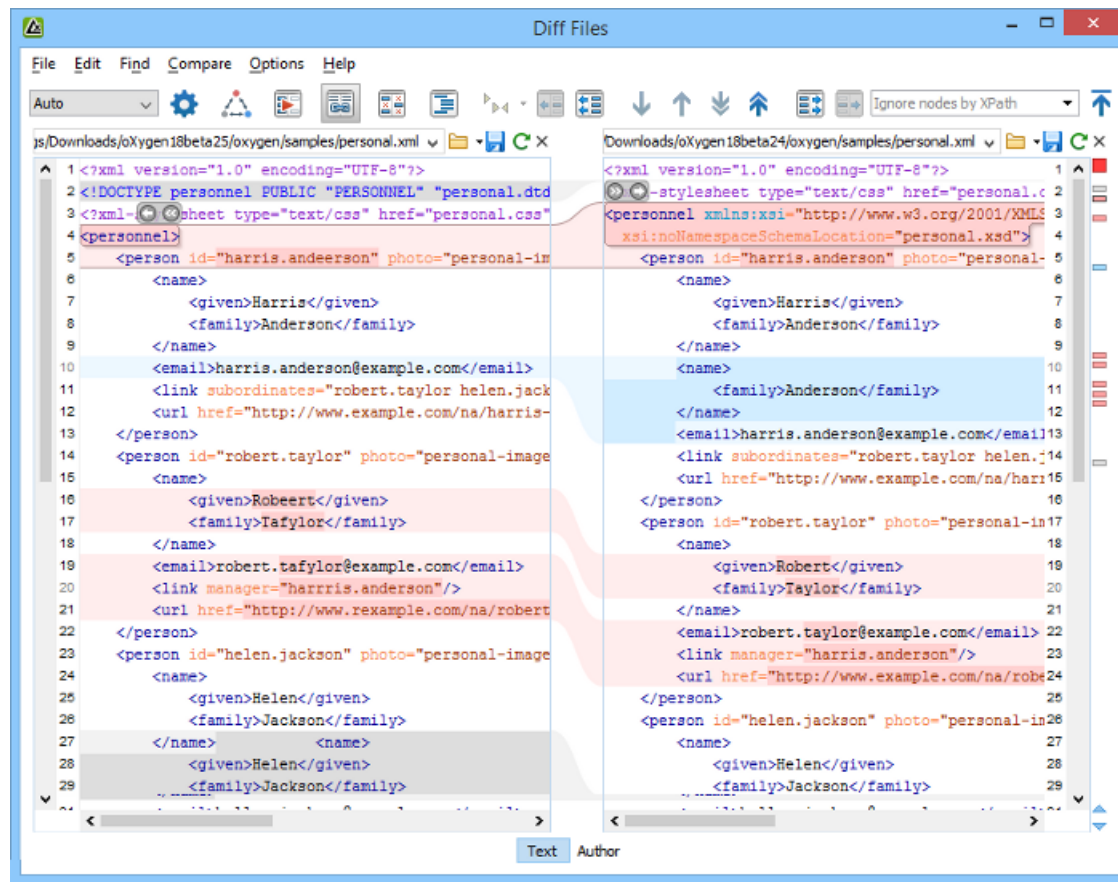


Figure 161: Compare Files Tool

Two-Way Comparisons

The **Compare Files** tool can be used to compare the differences between two files or XML fragments.

Compare Files

To perform a two-way comparison, follow these steps:

1. Open a file in the left panel and the file you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down menu.

Step Result: The selected files are opened in the two side-by-side editors. A text editing mode is used to offer a better view of the differences.

2. To highlight the differences between the two files, click the  **Perform File Differencing** button from the toolbar.
3. You can use the drop-down menu on the left side of the toolbar to change the [algorithm](#) for the operation.
4. You can also use the  **Diff Options** button to access the **Files Comparison** preferences page where you can choose to ignore certain types of markup and configure various options.
5. If you are comparing XML documents using the **XML Fast** or **XML Accurate** algorithms, you can enter an XPath 2.0 expression in the **Ignore nodes by XPath** text field to ignore certain nodes from the comparison.

The resulting comparison will show you differences between the two files. The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes. This layout allows you to easily identify and focus on a group of related changes.




Figure 162: Two-Way Differences

Highlighting Colors

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies modifications on either side.
- **Gray** - Identifies an addition of a node in the left side (your outgoing changes).
- **Blue** - Identifies an addition of a node in the right side (incoming changes).
- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.
- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

Comparing Fragments (Copy/Paste)

To compare XML file fragments, you need to copy and paste the fragments you want to compare into each side, without selecting a file. If a file is already selected, you need to close it using the  **Close (Ctrl + W (Command + W on OS X))** button, before pasting the fragments. Other notes for pasting fragments:

- As long as the fragment is more than 10 characters, the application will attempt to automatically detect the content type. It can detect the following types: XML, DTD, CSS, JSON, and Markdown (if it starts with #). If one of those content types is detected, the fragments will be displayed with syntax highlights.
- If you save modified fragments, a dialog box opens that allows you to save the changes as a new document.

Navigate Differences

To navigate through differences, do one of the following:

- Use the navigation buttons on the toolbar (or in the **Compare** menu).
- Select a block of differences by clicking its small colored marker in the overview ruler located in the right-most part of the window. At the top of the overview ruler there is a success indicator that turns green where there are no differences, or red if differences are found.
- Click a colored area in between the two text editors.

Editing Actions

You can edit the files directly in either editing pane. The two editors are constantly synchronized and the differences are refreshed when you save the modified document or when you click the  **Perform File Differencing** button.

A variety of actions are available on the [toolbar](#) and in the [various menus](#) (these same actions are also available in the contextual menu in both editing panes). The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

➤ **Append left change to right and** ➤ **Append right change to left**

Copies the content of the selected change from one side and appends it on the other, according to the content of the corresponding change. As a result, the side where the arrow points to will contain the changes from both sides.

➤ **Copy change from left to right and** ➤ **Copy change from right to left**

Replaces the content of a change from one side with the content of the corresponding change from the other side.

✕ **Remove change**

Rejects the change on the particular side and preserves the particular content on the other side.

Two-Way Diff Algorithms

Oxygen XML Developer offers the following two-way diff algorithms to compare files or fragments:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level, meaning that it compares two files or fragments looking for identical characters.
- **Words** - Computes the differences at word level, meaning that it compares two files or fragments looking for identical words.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **Syntax Aware** - Computes differences for known file types or fragments. This algorithm splits the files or fragments into sequences of *tokens* and computes the differences between them. The meaning of a *token* depends on the type of compared files or fragments.

Known file types include those listed in the **New** dialog box, such as XML file types (XSLT files, XSL-FO files, XSD files, RNG files, NVDL files, etc.), XQuery file types (.xquery, .xq, .xqy, .xqm extensions), DTD file types (.dtd, .ent, .mod extensions), TEXT file type (.txt extension), or PHP file type (.php extension).

For example:

- When comparing XML files or fragments, a token can be one of the following:
 - The name of an XML tag
 - The < character
 - The /> sequence of characters
 - The name of an attribute inside an XML tag
 - The = sign
 - The " character
 - An attribute value
 - The text string between the start tag and the end tag (a text node that is a child of the XML element corresponding to the XML tag that encloses the text string)
- When comparing plain text, a token can be any continuous sequence of characters or any continuous sequence of whitespaces, including a new line character.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

Three-Way Comparisons

Oxygen XML Developer also includes a three-way comparison feature to help you solve conflicts and merge changes between multiple modifications. It is especially helpful for teams who have multiple authors editing and

committing the same documents. It provides a comparison between a local change, another change, and the original base revision. Some additional advantages include:

- Visualize and merge content that was modified by you and another member of your team.
- Marks differences correctly even when the document structure is rearranged.
- Allows you to merge XML-relevant modifications.

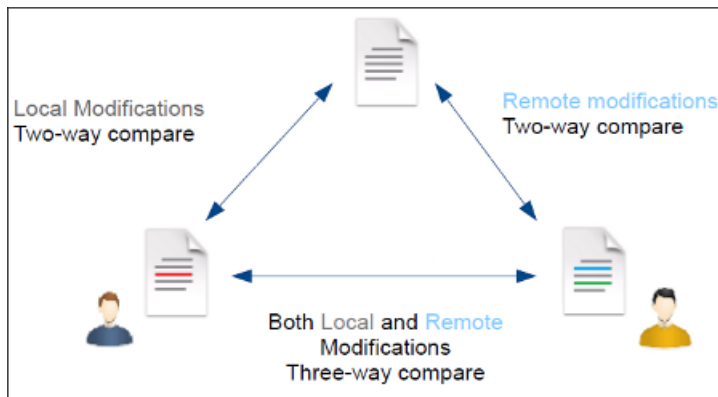


Figure 163: Three-Way Comparison

Compare Files

To perform a three-way comparison, follow these steps:

1. Open a file in the left panel and the file you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down menu.

Step Result: The selected files are opened in the two side-by-side editors. A text editing mode is used to offer a better view of the differences.

2. Click the **Three-Way Comparison** button on the toolbar and select the base file in the **Base** field. You can specify the path by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down menu.
3. To highlight the differences, click the **Perform File Differencing** button on the toolbar.
4. You can use the drop-down menu on the left side of the toolbar to change the [algorithm](#) for the operation.
5. You can also use the **Diff Options** button to access the **Files Comparison** preferences page where you can choose to ignore certain types of markup and configure various options.

The resulting comparison will show you differences between the two files, as well as differences between either of them and the base (ancestor) file. The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes.

7	<given>Robert</given>		<given>Helen</given>	8
8	<family>Taylor</family>		<family>Jackson</family>	9
9	</name>		</name>	10
10	<email>robert.taylor@example		<email>helen.jackson@example	11

Figure 164: Three-Way Differences

Highlighting Colors

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies blocks of changes that include conflicts.
- **Gray** - Identifies your outgoing changes that do not include conflicts.
- **Blue** - Identifies incoming changes that do not include conflicts.

- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.
- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

Navigate Differences

To navigate through differences, do one of the following:

- Use the navigation buttons on the toolbar (or in the **Compare** menu).
- Select a block of differences by clicking its small colored marker in the overview ruler located in the right-most part of the window. At the top of the overview ruler there is a success indicator that turns green where there are no differences, or red if differences are found.
- Click a colored area in between the two text editors.

Editing Actions

You can edit the files directly in either editing pane. The two editors are constantly synchronized and the differences are refreshed when you save the modified document or when you click the  **Perform File Differencing** button.

A variety of actions are available on the [toolbar](#) and in the [various menus](#) (these same actions are also available in the contextual menu in both editing panes). The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

Append left change to right and Append right change to left

Copies the content of the selected change from one side and appends it on the other, according to the content of the corresponding change. As a result, the side where the arrow points to will contain the changes from both sides.

Copy change from left to right and Copy change from right to left

Replaces the content of a change from one side with the content of the corresponding change from the other side.

Remove change

Rejects the change on the particular side and preserves the particular content on the other side.

Three-Way Diff Algorithms

Oxygen XML Developer offers the following three-way diff algorithms to compare files:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

Second Level Comparisons

For both two-way and three-way comparisons, Oxygen XML Developer automatically performs a second level comparison for the **Lines**, **XML Fast**, and **XML Accurate** algorithms. After the first comparison is finished, the second level comparisons for the **Lines** algorithm is processed on text nodes using a word level comparison, meaning that it looks for identical words. For the **XML Fast** and **XML Accurate** algorithms, the second level comparison is processed using a [syntax-aware comparison](#), meaning that it looks for identical *tokens*. This second level comparison makes it easier to spot precise differences and you can merge or reject the precise modifications.

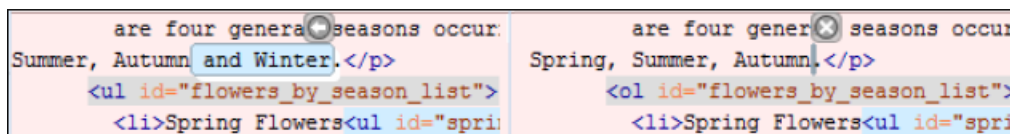


Figure 165: Second Level Diff Comparison

Note: If a modified text fragment contains XML markup (such as processing instructions, XML comments, CDATA, or elements), the second level comparison will not automatically be performed. In this case you can manually select a second level comparison by doing a word level or character level comparison.

To do a word level comparison, select **Show word level details** from the contextual menu or **Compare** menu.

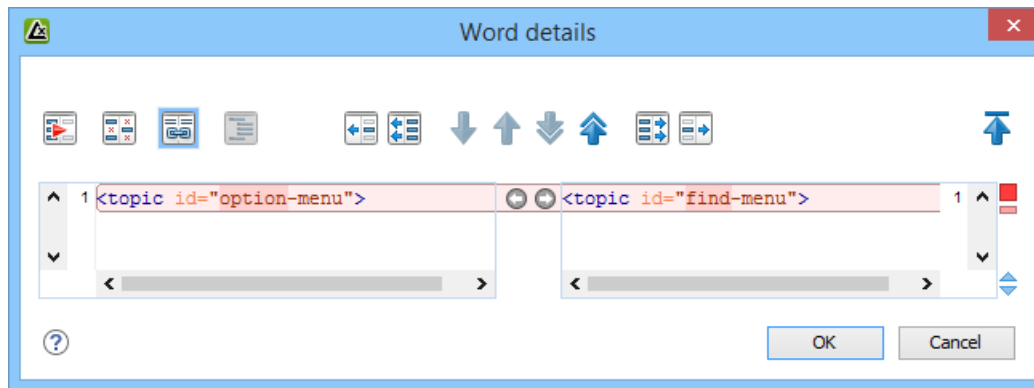


Figure 166: Word Level Comparison

To do a character level comparison, select **Show Character Level details** from the contextual menu or **Compare** menu.

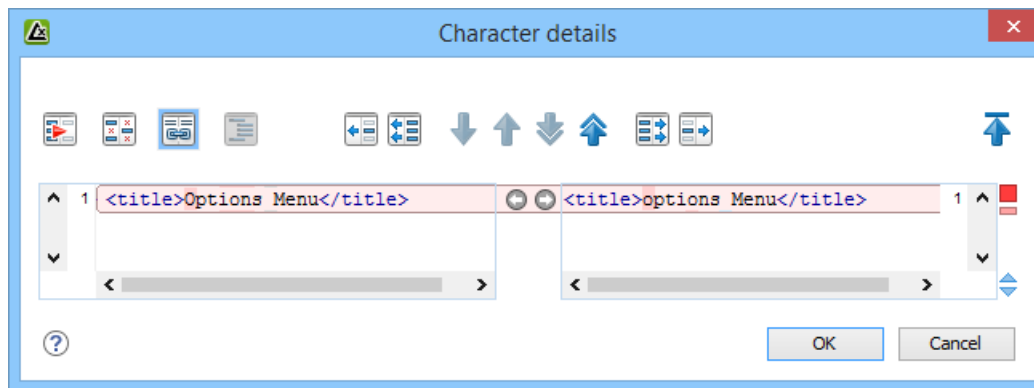


Figure 167: Character Level Comparison

Related Information:

[Files Comparison Preferences Page](#) on page 127

[Compare Directories](#) on page 347

Starting File Comparison Tool from a Command Line

The file comparison tool can be started by using command-line arguments. In the installation folder there is an executable shell (`diffFiles.bat` on Windows, `diffFiles.sh` on OS X and Linux). To specify the files to compare, you can pass command-line arguments using the following construct: `diffFiles.bat / diffFiles.sh [path to left file] [path to right file] [path to 3-way base file]`.

If three files are specified, the tool will start in the [3-way comparison mode](#). If only two files are specified, the tool will start in the [2-way comparison mode](#). The first specified file will be added to the left panel in the comparison tool, the second file to the right panel, and the optional third file will be the base (ancestor) file used for a 3-way comparison. If you pass only one argument, you are prompted to manually choose another file.

If you want to launch the file comparison tool from an external application with specified files and you want the file browsing tools at the top of both panels to be hidden, you should use the `-ext` argument as the first command. There are some additional arguments that are allowed and to see all the details for the command line construct, type `diffFiles.bat --help` in the command line.

Example:

To do a 3-way comparison, the command line might look like this:

Windows

```
diffFiles.bat "c:\docs\file 1" "c:\docs\file 2" c:\docs\basefile
```

Tip: If there are spaces in the path names, surround the paths with quotes.

Linux

```
diffFiles.sh home/file1 home/file2 home/basefile
```

Mac OS X

```
diffFiles.sh documents/file1 documents/file2 documents/basefile
```

How to Integrate the File Comparison Tool with Git

The file comparison tool can be integrated with Git clients. It requires that you configure your `.gitconfig` file and then you can simply start the tool from the command line.

To integrate the **Compare Files** tool with your Git client, follow this procedure:

1. Use one of the following methods to instruct your Git client to use the *Oxygen Compare Files* tool:

- **Manual Configuration** - Locate your Git user-specific configuration file (`.gitconfig`) and edit it with a text editor (for example, in Windows, the `.gitconfig` file is most likely located in your user home directory). Add (or replace) the following lines:

```
[diff]
  tool = oxygendiff
[merge]
  tool = oxygendiff
[difftool "oxygendiff"]
  cmd = '[pathToOxygenInstallDir]/diffFiles.exe' -ext $REMOTE $LOCAL $LOCAL
[mergetool "oxygendiff"]
  cmd = '[pathToOxygenInstallDir]/diffFiles.exe' -ext $LOCAL $REMOTE $BASE $MERGED
  trustExitCode = true
[difftool]
  prompt = false
```

Note: For Mac OS X, the `cmd` lines would start with something like: `sh "/Applications/Oxygen XML Editor/diffFiles.sh"`. For Linux, the `cmd` lines would start with something like: `sh "/Oxygen XML Editor/diffFiles.sh"`.

- **Command Line Configuration** - To automatically configure the `.gitconfig` file, you can run the following commands from a command line:

```
git config --global diff.tool oxygendiff
git config --global difftool.oxygendiff.cmd '[Oxygen install dir]/diffFiles.exe -ext $REMOTE $LOCAL $LOCAL'
git config --global merge.tool oxygendiff
git config --global mergetool.oxygendiff.cmd '[Oxygen install dir]/diffFiles.exe -ext $LOCAL $REMOTE $BASE $MERGED'
git config --global mergetool.oxygendiff.trustExitCode true
```

Note: For Mac OS X, the *Oxygen* file comparison tool would be specified in the second and fourth commands with something like: `sh "/Applications/Oxygen XML Editor/diffFiles.sh"`. For Linux, it would be something like: `sh "/Oxygen XML Editor/diffFiles.sh"`.

2. To start the **Compare Files** tool and see a comparison of changes for a particular file, run the following command from a command line:

```
git difftool [PathToFile]
```

Tip: If the file you want to compare has conflicts, you can start the **Compare Files** tool as a *merge conflict resolution* tool by running the following command:

```
git mergetool [PathToFile]
```

For more information about the Git *difftool* syntax, see <https://git-scm.com/docs/git-difftool>.

For more information about the Git *mergetool* syntax, see <https://git-scm.com/docs/git-mergetool>.

How to Integrate the File Comparison Tool with SourceTree

The file comparison tool can be integrated with SourceTree so that you can use it to compare changes. The advantages of doing this include:

- The *Oxygen Compare Files* tool presents the files side-by-side and makes it much easier to determine real changes.
- The *Oxygen Compare Files* tool includes XML comparison algorithms.
- The *Oxygen Compare Files* tool includes various options for configuring the comparison.
- The *Oxygen Compare Files* tool allows you to navigate through changes.

To integrate the **Compare Files** tool with SourceTree, follow this procedure, depending on your operating system:

Windows

1. In SourceTree, go to **Tools > Options**.
2. Go to the **Diff** tab.
3. In the **External Diff/Merge** section, configure the settings as follows:
 - **External Diff Tool** - Select **Custom**.
 - **Diff Command** - Enter the path of the *Oxygen diffFile.exe* file (for example: c:\Programs\Oxygen XML Editor 19\diffFiles.exe).
 - **Arguments** - Enter **-ext \$REMOTE \$LOCAL \$LOCAL**.
 - **Merge Tool** - Select **Custom**.
 - **Diff Command** - Enter the path of the *Oxygen diffFile.exe* file (for example: c:\Programs\Oxygen XML Editor 19\diffFiles.exe).
 - **Arguments** - Enter **-ext \$LOCAL \$REMOTE \$BASE \$MERGED**.
4. Click **OK**.

Result: In SourceTree, you can now compare file changes with the *Oxygen Compare Files* tool by simply selecting **External Diff** from the contextual menu, **Actions** menu, or **Ctrl+D**.

Mac OS X

1. In SourceTree, go to **SourceTree > Preferences**.
2. Go to the **Diff** tab.
3. In the **External Diff/Merge** section, configure the settings as follows:
 - **External Diff Tool** - Select **Custom**.
 - **Diff Command** - Enter a command line argument to launch the *Oxygen diffFiles.sh* file (for example: sh "/Applications/Oxygen XML Editor/diffFiles.sh").
 - **Arguments** - Enter **-ext \$REMOTE \$LOCAL \$LOCAL**.
 - **Merge Tool** - Select **Custom**.
 - **Diff Command** - Enter a command line argument to launch the *Oxygen diffFiles.sh* file (for example: sh "/Applications/Oxygen XML Editor/diffFiles.sh").
 - **Arguments** - Enter **-ext \$LOCAL \$REMOTE \$BASE \$MERGED**.
4. Close the preferences dialog box.

Result: In SourceTree, you can now compare file changes with the *Oxygen Compare Files* tool by simply selecting **External Diff** from the contextual menu or **Actions** menu.

Toolbar and Contextual Menu Actions of the Compare Files Tool

The toolbar of the **Compare Files** tool contains operations that can be performed on the source and target files or XML fragments. Many of the actions are also available in the contextual menu.

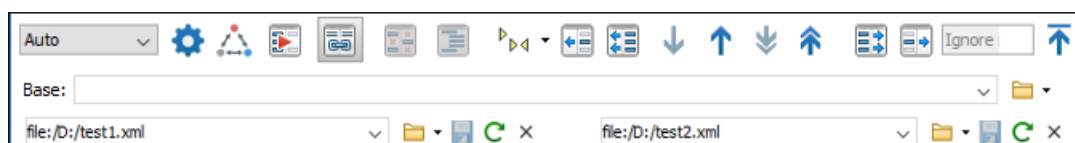


Figure 168: Compare Toolbar

The following actions are available:

Algorithm

This drop-down menu allows you to select one of the following diff algorithms (depending on whether it is a two-way or three-way comparison):

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level, meaning that it compares two files or fragments looking for identical characters.
- **Words** - Computes the differences at word level, meaning that it compares two files or fragments looking for identical words.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **Syntax Aware** - Computes differences for the file types or fragments known by Oxygen XML Developer, taking the syntax (the specific types of tokens) into consideration.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

Diff Options

Opens the [Files Comparison preferences page](#) where you can configure various options.

Three-Way Comparison

Toggle action that allows you to perform a three-way comparison between the two files displayed in the two editing panes and a base (ancestor) file.

Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.

Synchronized scrolling

Toggles synchronized scrolling on or off so that a selected difference can be seen on both sides of the application window. This option is on by default.

Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.

Format and Indent Both Files (**Ctrl + Shift + P** (**Command + Shift + P** on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

Note: When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.

Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.

Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

Next Block of Changes (**Ctrl + Period** (**Command + Period** on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

Note: A change block groups one or more consecutive lines that contain at least one change.

Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

Copy All Changes from Left to Right

Copies all changes from the file in the left panel to the file in the right panel.

Copy Change from Left to Right

Copies the selected difference from the file in the left panel to the file in the right panel.

Ignore Nodes by XPath

You can use this text field to enter an [XPath expression](#) to ignore certain nodes from the comparison. It will be processed as XPath version 2.0. You can also enter the name of the node to ignore all nodes with the specified name (for example, if you want to ignore all ID attributes from the document, you could simply enter @id). This field is only available when comparing XML documents using the **XML Fast** or **XML Accurate** algorithms.

Note: If an XPath expression is specified in the [Ignore nodes by XPath option](#) in the **Diff / File Comparison** preferences page, that one is used as a default when the application is started. If you then enter an expression in this field on the toolbar, this one will be used instead of the default. If you delete the expression from this field, neither will be used.

First Change (Ctrl + B (Command + B on OS X))

Jumps to the first change.

Base

Available for [three-way comparisons](#). It is the base file that will be compared with the files opened in the left and right editors. You can specify the path to the file by using the text field, its history drop-down, or the browsing tools in the  **Browse** drop-down menu.

Left-Side (Source) File

You can specify the path to the file to be compared on the left side (source) by using the text field, its history drop-down, or the browsing tools in the  **Browse** drop-down menu.

Save

Saves the changes made in the source (left-side) file.

Reload

Reloads the source (left-side) file.

Close

Closes the source (left-side) file.

Right-Side (Target) File

You can specify the path to the file to be compared on the right side (target) by using the text field, its history drop-down, or the browsing tools in the  **Browse** drop-down menu.

Save

Saves the target (right-side) file.

**Reload**

Reloads the target (right-side) file.

**Close**

Closes the target (right-side) file.

Compare Files Tool Menus

The menus in the **Compare Files** tool contain some of the same actions that are on the toolbar, as well as some common actions that are identical to the same actions in the Oxygen XML Developer menus. The menu actions include:

File Menu**Source > Open**

Browses for a file that will be displayed in the left panel.

Source > Open URL

Browses for a remote file that will be displayed in the left panel.

Source > Open File from Archive

Browses an archive for a file that will be displayed in the left panel.

Source > Reload

Reloads the file in the left panel.

Source > Save

Saves the changes made to the file in the left panel.

Source > Save As

Allows you to choose a destination to save the file in the left panel.

Source > Close

Closes the file in the left panel.

Target > Open

Browses for a file that will be displayed in the right panel.

Target > Open URL

Browses for a remote file that will be displayed in the right panel.

Target > Open File from Archive

Browses an archive for a file that will be displayed in the right panel.

Target > Reload

Reloads the file in the right panel.

Target > Save

Saves the changes made to the file in the right panel.

Target > Save As

Allows you to choose a destination to save the file in the right panel.

Target > Close

Closes the file in the right panel.

Base > Open

Browses for a file that will be compared with both files in a [three-way comparison](#).

Base > Open URL

Browses for a remote file that will be compared with both files in a [three-way comparison](#).

Base > Open File from Archive

Browses an archive for a file that will be compared with both files in a [three-way comparison](#).

Close (Ctrl + W (Command + W on OS X))

Closes the application.

Edit Menu



Cut the selection from the currently focused editor panel to the clipboard.



Copy the selection from the currently focused editor panel to the clipboard.



Paste content from the clipboard into the currently focused editor panel.

Select all

Selects all content in the currently focused editor panel.



Undo changes in the currently focused editor panel.



Redo changes in the currently focused editor panel.

Find Menu



Perform *find/replace* operations in the currently focused editor panel.

Find Next

Go to the next match using the same options as the last *find* operation. This action runs in both editor panels.

Find Previous

Go to the previous match using the same options as the last *find* operation. This action runs in both editor panels.

Compare Menu



Toggle action that allows you to perform a three-way comparison between the two files displayed in the two editing panes and a base (ancestor) file.



Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.



Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

Note: A change block groups one or more consecutive lines that contain at least one change.



Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

Last Change (Ctrl + E (Command + E on OS X))

Jumps to the last change.

First Change (Ctrl + B (Command + B on OS X))

Jumps to the first change.

Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

Copy All Changes from Left to Right

Copies all changes from the file in the left panel to the file in the right panel.

Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.

Copy Change from Left to Right

Copies the selected difference from the file in the left panel to the file in the right panel.

Show Word Level Details

Provides a word-level comparison of the selected change.

Show Character Level Details

Provides a character-level comparison of the selected change.

Format and Indent Both Files (Ctrl + Shift + P (Command + Shift + P on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

Note: When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.

Options Menu

Preferences

Opens the preferences dialog box that includes numerous pages of options that can be configured.

Menu Shortcut Keys

Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.

Reset Global Options

Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.

Import Global Options

Allows you to import an options set that you have previously exported.

Export Global Options

Allows you to export the current options set to a file.

Help Menu

Help (F1)

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

Use Online Help

If this option is selected, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is not selected or an internet connection fails, the help documentation is opened in offline mode.

Report problem

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the report parameter of the POST HTTP method.

Support Center

Opens the Oxygen XML Developer Support Center web page in a browser.

Compare Directories

The **Compare Directories** tool can be used to compare and manage changes to files and folders within the structure of your directories. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (`diffDirs.exe`).

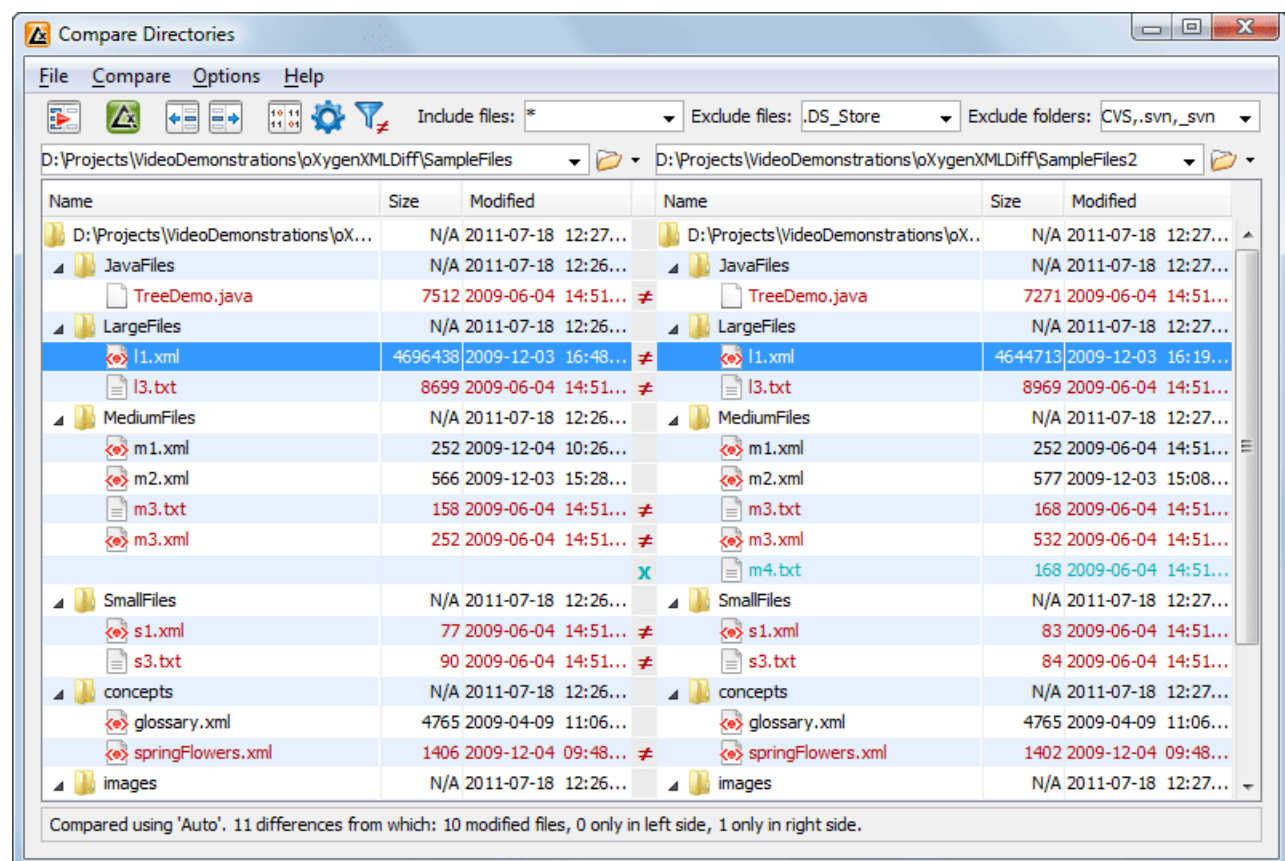


Figure 169: Compare Directories Tool

Starting the Tool from a Command Line

The directory comparison tool can also be started by using command-line arguments. In the installation folder there is an executable shell (`diffDirs.bat` on Windows, `diffDirs.sh` on OS X and Linux). To specify the directories to compare, you can pass command-line arguments using the following construct: `diffDirs.bat / diffDirs.sh [directory path 1] [directory path 2]`.

If you pass only one argument, you are prompted to manually choose the second directory or archive.

Example:

To do a comparison between two directories, the command line would look like this:

Windows

```
diffDirs.bat "c:\documents new" "c:\documents old"
```

Tip: If there are spaces in the path names, surround the paths with quotes.

Linux

```
diffDirs.sh home/documents1 home/documents2
```

Mac OS X

```
diffDirs.sh documents1 documents2
```

Directory Comparisons

To perform a directory comparison, follow these steps:

1. Select a folder in the left panel and the folder you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the **Browse for local directory** action in the  **Browse** drop-down menu.

Step Result: The selected directory structures are opened in the two side-by-side panels.

2. To highlight the differences between the two folders, click the  **Perform Directories Differencing** button from the toolbar.
3. You can also use the  **Diff Options** button to access the [Directories Comparison preferences page](#) where you can configure various options.

To compare the content of two archives, follow these steps:

1. Use the **Browse for archive file** action in the  **Browse** drop-down menu to select the archives in the left and right panels.
2. By default, the supported archives are not treated as directories and the comparison is not performed on the files inside them. To make Oxygen XML Developer treat supported archives as directories, select the [Look in archives option](#) in the **Directories Comparison** preferences page.
3. To highlight the differences, click the  **Perform Directories Differencing** button from the toolbar.

The directory comparison results are presented using two tree-like structures showing the files and folders, including their name, size, and modification date. A column that contains graphic symbols separates the two tree-like structures. The graphic symbols can be one of the following:

- An **X** symbol, when a file or a folder exists in only one of the compared directories.
- A **≠** symbol, when a file exists in both directories but the content differs. The same sign appears when a collapsed folder contains differing files.

The color used for the symbol and the directory or file name can be customized in the [Directories Comparison / Appearance preferences page](#). You can double-click lines marked with the **≠** symbol to open a **Compare Files** window, which shows the differences between the two files.

The directories that contain files that differ are expanded automatically so that you can focus directly on the differences. You can merge the contents of the directories by using the copy actions. If you double-click (or press **Enter**) on a line with a pair of files, Oxygen XML Developer starts a [file comparison](#) between the two files, using the **Compare Files** tool.

Related Information:

[Compare Files](#) on page 1125

Toolbar and Contextual Menu Actions of the Compare Directories Tool

The toolbar of the **Compare Directories** tool contains operations that can be performed on the compared directory structure. Some of the toolbar actions are also available in the contextual menu.




Figure 170: Compare toolbar

Toolbar Actions



Perform Directories Differencing

Looks for differences between the two directories displayed in the left and right side of the application window.



Perform Files Differencing

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



Copy Change from Right to Left

Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).



Copy Change from Left to Right

Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).



Binary Compare

Performs a byte-level comparison on the selected files.



Diff Options

Opens the [Directory Comparison preferences page](#) where you can configure various options.



Show Only Modifications

Displays a more uncluttered file structure by hiding all identical files.

File and folder filters

Differences can be filtered using three combo boxes: **Include files**, **Exclude files**, and **Exclude folders**. They come with predefined values and are editable to allow custom values. All of them accept multiple comma-separated values and the * and ? wildcards. For example, to filter out all JPEG and GIF image files, edit the **Exclude files** filter box to read *.jpeg, *.png. Each filter includes a drop-down menu with the latest 15 filters applied.

Contextual Menu Actions



Perform Files Differencing

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



Binary Compare

Performs a byte-level comparison on the selected files.



Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.



Copy Change from Left to Right

Copies the selected difference from the file in the left panel to the file in the right panel.

Open

If the action is invoked on a file, the selected file is opened in Oxygen XML Developer. If the action is invoked on a directory, the selected directory is opened in the default file browser for your particular operating system.

Open in System Application

Opens the selected file in the system application that is associated with that type of file. The action is available when launching the **Compare Directories** tool from the **Tools** menu in Oxygen XML Developer.

Show in Explorer

Opens the default file browser for your particular operating system with the selected file highlighted.

Compare Directories Tool Menus

The menus in the **Compare Directories** tool contain some of the same actions that are on the toolbar, as well as some common actions that are identical to the same actions in the Oxygen XML Developer menus. The menu actions include:

File Menu

Close (**Ctrl + W** (**Command + W** on OS X))

Closes the application.

Compare Menu



Perform Directories Differencing

Looks for differences between the two directories displayed in the left and right side of the application window.



Perform Files Differencing

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



Copy Change from Right to Left

Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).



Copy Change from Left to Right

Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).

Options Menu

Preferences

Opens the preferences dialog box that includes numerous pages of options that can be configured.

Menu Shortcut Keys

Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.

Reset Global Options

Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.

Import Global Options

Allows you to import an options set that you have previously exported.

Export Global Options

Allows you to export the current options set to a file.

Help Menu

Help (F1)

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

Use Online Help

If this option is selected, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is not selected or an internet connection fails, the help documentation is opened in offline mode.

Report problem

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

Support Center

Opens the Oxygen XML Developer Support Center web page in a browser.

Compare Images

You can use the **Compare Directories** tool to compare images. If you double-click a line that contains two different images, the **Compare images** window is displayed. This dialog box presents the images in the left and right sides, scaled to fit the available view area. You can use the contextual menu actions to scale the images to their original size or scale them down to fit in the view area.

The supported image types are: *GIF, JPG, JPEG, PNG, and BMP*.

Compare Directories Against a Base (3-Way)

The **Compare Directories Against a Base (3-way)** tool allows you to perform three-way comparisons on directories to help you identify and merge changes between multiple modifications of the same directory structure. It is especially helpful for teams that have multiple authors contributing documents to the same directory system. It offers information about conflicts and changes, and includes actions to easily merge, accept, overwrite, or ignore changes to the directory system.

How to Perform 3-Way Directory Comparisons

To perform a 3-way directories comparison, follow these steps:

1. Select **3 Compare Directories Against a Base (3-way)** from the **Tools** menu.

Step Result: This opens a dialog box that allows you to select the 3 file sets that will be used for the comparison.

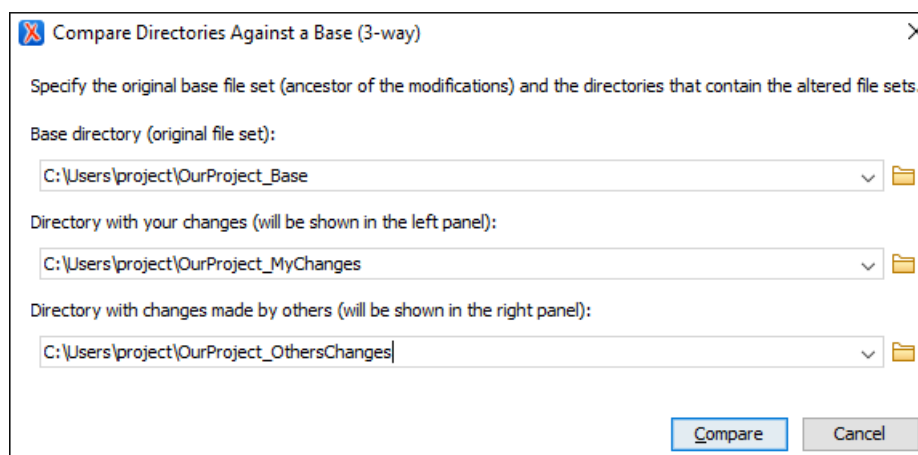


Figure 171: Compare Directories Against a Base File Set Chooser

2. Select the file sets to be compared:

- **Base directory** - This is the original (base) file set before any modifications were made by you or others.
 - **Directory with your changes** - This is the file set with changes that you have made. This file set will be displayed in the left panel in the comparison tool.
 - **Directory with changes made by others** - This is the file set with changes made by others that you want to merge with your changes. This file set will be displayed in the right panel in the comparison tool.
3. Click the **Compare** button to compare the file sets and open the comparison and merge tool.
 4. Use the features and actions described in the next section to identify and merge the changes.

3-Way Directory Comparison and Merge Tool

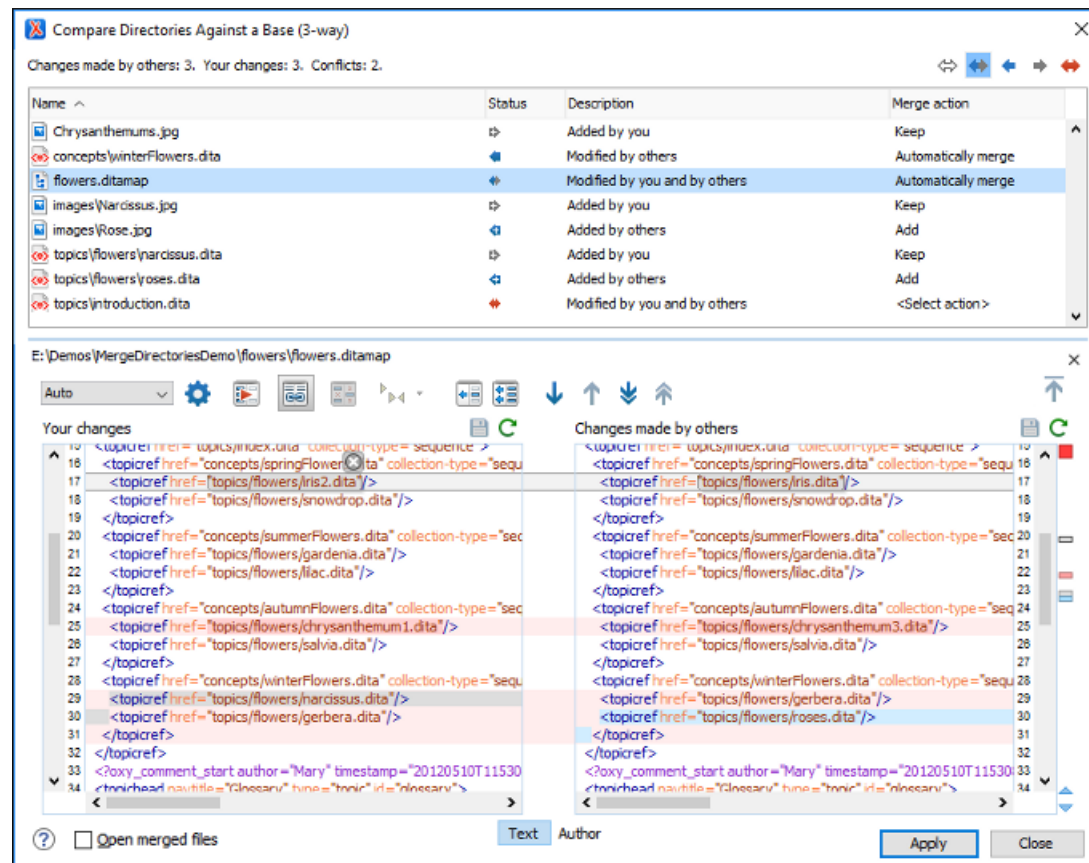


Figure 172: Comparison and Merge Tool

The 3-way directory comparison and merge tool includes the following information, features, and actions:

Number of Changes and Conflicts

The first thing you see in top-left corner of the tool is grand total of all the changes made by others, changes made by you, and the number of conflicts.

Filter Buttons

In the top-right corner you can use the toggle buttons to filter the list of modifications:

Show all files

Use this button to show all modified and unmodified files, as well as conflicts.

Show only files modified by you and others

Filters the list to show all files that have been modified, including conflicts.

Show only files modified by others

Filters the list to only show the files that were modified by others.

➔ Show only files modified by you

Filters the list to only show the files that were modified by you.

↔ Show only conflicting files

Filters the list to only show files that contain conflicts.

List of Files Panel

This panel shows the list of files in the compared file sets based upon the filter button that is selected. This panel includes the following sortable columns:

- **Name** - The file names.
- **Status** - An icon that represents the file status. Red icons indicate some sort of conflict. Gray icons indicate modifications made by you. Blue icons indicate modifications made by others.
- **Description** - A description of the file status.
- **Merge Action** - This column provides a drop-down menu for each file that allows you to choose some merge actions depending upon its status. A default action is always set to automatically merge the changes made by others with your changes. If there is a conflict, the default is **<Select action>** and you are required to make a selection. Click this column to access the drop-down menu where you can make a selection. The same actions are available in the contextual menu.

You can click a file to open it in the file comparison panel (the file from your file set is shown in the left panel while the file from the file set with changes made by others is shown in the right panel). For image files, the comparison panel shows a preview of the image. For other binary files, a preview is not available and you will just see its status.

File Comparison Panels

If you click a file in the top panel, the file is opened in this file comparison section. The file from your file set is shown in the left panel and the file from the other file set is shown in the right panel.

Note: If Oxygen XML Developer does not recognize the file type, a dialog box will be displayed that allows you to select the type of editor you want it to be associated with for this comparison (if you want Oxygen XML Developer to remember this association, you can select the **Associate file type with editor** option at the bottom of the dialog box).

This panel includes the following information and toolbar actions:

File Path

The first thing you see in this panel is the file path where merge actions will be applied if you make changes.

✕ Close

Closes the file comparison panel.

Algorithm Drop-Down Menu

This drop-down menu allows you to select one of the following diff algorithms to be used for file comparisons:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

⚙ Diff Options

Opens the [Files Comparison preferences page](#) where you can configure various options.



Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.



Synchronized scrolling

Toggles synchronized scrolling. When toggled on, a selected difference can be seen in both panels.



Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.



Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

↓ Next Block of Changes (**Ctrl + Period** (**Command + Period** on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

Note: A change block groups one or more consecutive lines that contain at least one change.

↑ Previous Block of Changes (**Ctrl + Comma** (**Command + Comma** on OS X))

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

↘ Next Change (**Ctrl + Shift + Period** (**Command + Shift + Period** on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

↖ Previous Change (**Ctrl + Shift + Comma** (**Command + Shift + M** on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

⬅ First Change (**Ctrl + B** (**Command + B** on OS X))

Jumps to the first change.

Left-Side File (Your changes)

Above the panel you can see the file path and the following two buttons:



Save

Saves changes made to the file.



Reload

Reloads the file.

Right-Side File (Changes made by others)

Above the panel you can see the file path and the following two buttons:



Reload

Reloads the file.

Displaying Changes in the File Comparison Panels

The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes.




Figure 173: File Comparison Panels

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies modifications on either side.
- **Gray** - Identifies an addition of a node in the left side (your outgoing changes).
- **Blue** - Identifies an addition of a node in the right side (incoming changes).
- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.
- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

Direct Editing Actions in the File Comparison Panels

In addition to selecting merge actions from the drop-down menus in the **Merge Action** column in the top panel, you can also edit the files directly in the left pane (your local changes). The two editors are constantly synchronized and the differences are refreshed when you save the modified document (**Save** button or **Ctrl+S**) or when you click the **Perform File Differencing** button.

A variety of actions are available in the contextual menu in both editing panes. The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

Append right change to left

Copies the content of the selected change from the right side and appends it on the left side.

Copy change from right to left

Replaces the content of a change in the left side with the content of the change in the right side.

Remove change

Removes the change from the left side.

Any time you save manual changes (**Save** button or **Ctrl+S**), the selection in the **Merge Action** column in the top panel automatically changes to **Use merged** and a copy of the original file is kept so that you can revert to the original file if necessary. To discard your manual changes and revert to your original changes, select a different action in the **Merge Action** drop-down menu.

Open Merged Files

If you select this option, all the files that will be modified by the merge operation will be opened in the editor after the operation is finished.

Applying Changes

When you click the **Apply** button, all the merge actions you have selected and the changes you have made will be processed.

If there are unresolved conflicts (conflicts where no merge action is selected in the **Merge Action** drop-down menu), a dialog box will be displayed that allows you to choose how to solve the conflicts. You can choose between the following:

- **Keep your changes** - If you select this option and then click **Apply**, your local changes will be preserved for the unresolved conflicts.
- **Overwrite your changes** - If you select this option and then click **Apply**, your local changes will be overwritten with the changes made by others, for the unresolved conflicts.
- **Cancel** - You can click the **Cancel** button to go back to the merge tool to resolve the conflicts individually.

Cancelling Changes

If you click the **Cancel** button at the bottom of the merge tool, all the changes you made in the tool will be lost.

Related Information:

[Compare Directories](#) on page 347

[Compare Files](#) on page 1125

Viewing Status Information

Status information generated by operations such as *schema detection*, *manual validation*, *automatic validation*, and *transformations* are fed into the **Information** view, allowing you to monitor how the operation is being executed.

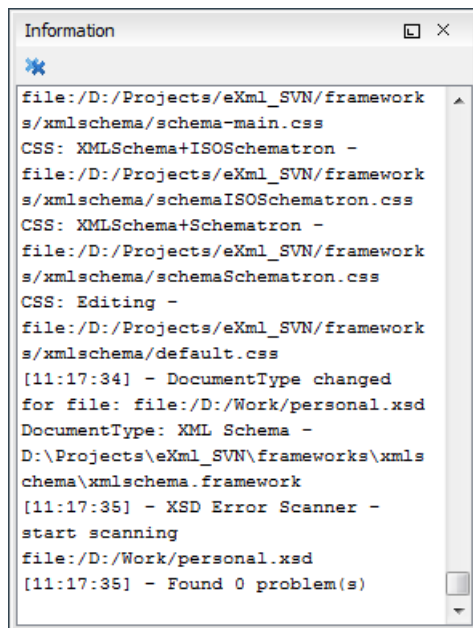


Figure 174: Information view messages

Messages contain a timestamp, the name of the thread that generated it and the actual status information. The number of displayed messages can be controlled with the [Maximum number of lines option](#) in the **Views** preference page.

To make the view visible, select **Window > Show View > Information**.

Editor Highlights

An *editor highlight* is a text fragment emphasized by a colored background.

Highlights are generated when the following actions generate results:

- [Find/Replace in Files](#)
- [Find/Replace](#)
- [Open/Find Resource](#)
- [Find All](#)
- [Find All Elements](#)
- [XPath in Files](#)
- [Search References](#)
- [Search Declarations](#)

By default, Oxygen XML Developer uses a different color for each type of highlight (*XPath in Files*, *Find/Replace*, *Search References*, *Search Declarations*, etc.) You can customize these colors and the maximum number of highlights displayed in a document on the [Editor preferences page](#). The default maximum number of highlights is 10000.

You can navigate the highlights in the current document by using the following methods:

- Clicking the markers from the range ruler, located at the right side of the editor pane.
- Clicking the **Next** and **Previous** buttons () from the bottom of the range ruler, located at the right side of the editor pane.

Note: When there are multiple types of highlights in the document, the **Next** and **Previous** buttons () navigate through highlights of the same type.

- Clicking the messages displayed in the [Results view](#) at the bottom of the editor.

To remove the highlights, you can do the following:

- Click the  **Remove all** button from bottom of the range ruler, located at the right side of the editor pane.
- Close the results tab at the bottom of the editor that contains the output of the action that generated the highlights.
- Click the  **Remove all** button on the right side of the [Results panel](#) at the bottom of the editor.

Note: Use the  **Highlight all results in editor** button (on the right side of the **Results** panel) to either display all the highlights or hide them.

Printing a Document

Printing is supported in **Text** and **Grid** modes.

The **Print** (**Ctrl + P** (**Command + P** on OS X)) action that is available from **File** menu displays a series of dialog boxes that allow you to configure print settings. After defining the settings in each dialog box, click **OK** to continue to the next one.

A **Print Preview** action is also available in the **File** menu. It first opens a **Page Setup** dialog box where you can define some paper, orientation, and margin settings. After you click **OK**, it displays the **Print Preview** dialog box where you can see a preview of how the document will look when it is printed..

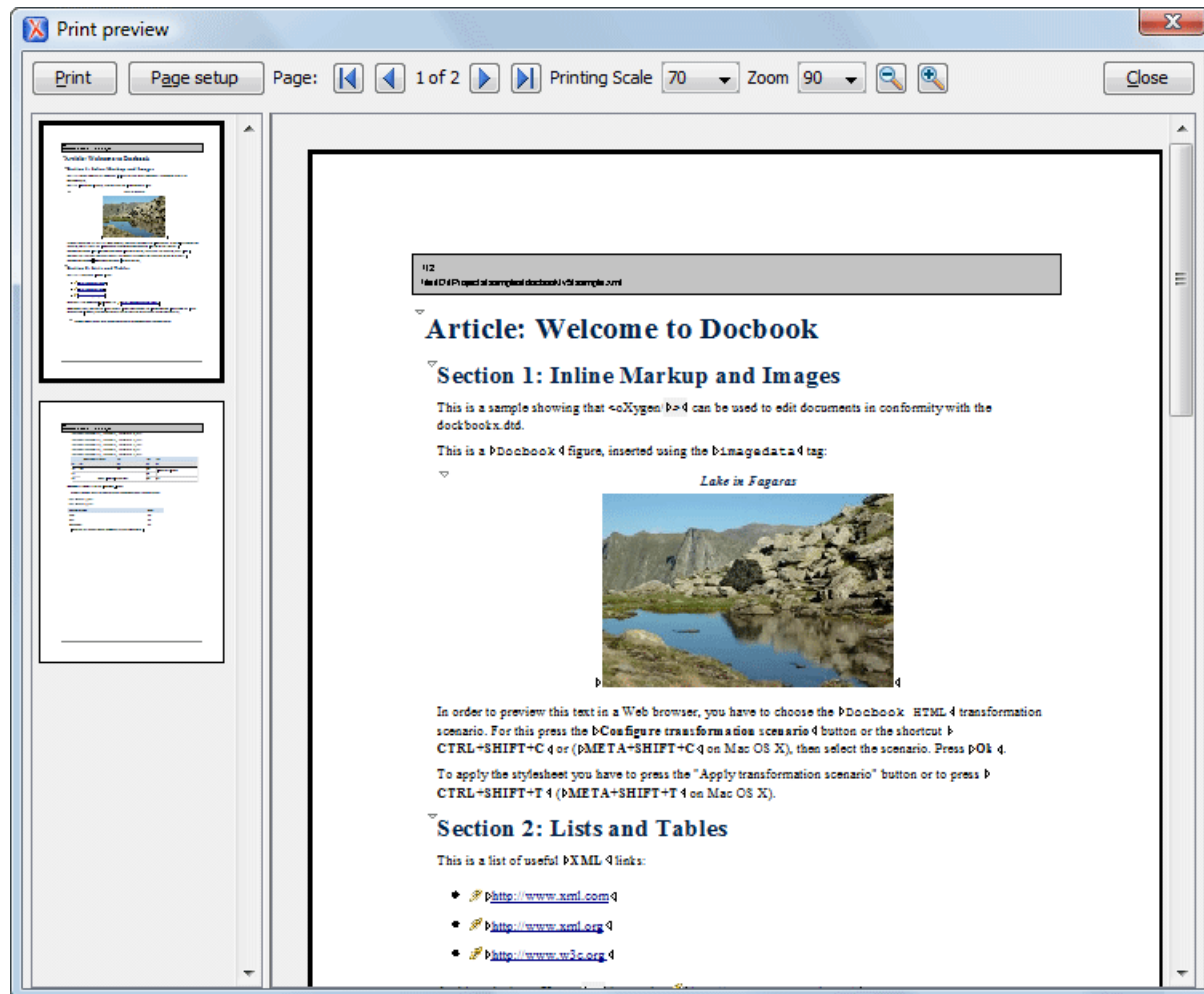


Figure 175: Print Preview Dialog Box

The main window is split in three sections:

- **Preview area** - Displays the formatted document page as it will appear on printed paper.
- **Left stripe** - The left-side stripe that displays a list of thumbnail pages. Clicking any of them displays the page content in the main preview area.
- **Toolbar** - The toolbar area at the top that contains controls for printing, page settings, page navigation, print scaling, and zoom.

Other Printing Features

- If you are printing a document that is opened in **Text** mode and line numbers are displayed (the **Show line numbers option** is selected), the printed output will include the line numbers.
- If you are printing an XML document that is opened in **Text** mode and the **folding support** is activated (the **Enable folding option** is selected), the printed output will include the current *folded* state. Note that this applies to printing an entire document and not selections within the document.
- If you are printing an XML document that is opened in **Text** mode and a block of content is selected, you have the ability to print only the selection of text rather than the entire document. When you invoke the print action with a block of content selected in **Text** mode, a dialog box will be presented that offers you the choice to print the selection or the entire document.

Editing Specific Document Types

Topics:

- [Editing XML Documents](#)
- [Editing XSLT Stylesheets](#)
- [Editing Ant Build Files](#)
- [Editing XML Schemas](#)
- [Editing XQuery Documents](#)
- [Editing WSDL Documents](#)
- [Editing CSS Stylesheets](#)
- [Editing LESS Stylesheets](#)
- [Editing Relax NG Schemas](#)
- [Editing NVDL Schemas](#)
- [Editing JSON Documents](#)
- [Editing StratML Documents](#)
- [Editing XLIFF Documents](#)
- [Editing JavaScript Documents](#)
- [Editing XProc Scripts](#)
- [Editing Schematron Schemas](#)
- [Editing Schematron Quick Fixes](#)
- [Editing SVG Files](#)
- [Editing XHTML Documents](#)
- [Editing Markdown Documents](#)

This chapter includes a large amount of information about editing numerous types of documents and various editing features that are provided in Oxygen XML Developer. Each type of document has unique features and options and this chapter includes an extensive collection of topics about [editing XML documents in Text mode](#).

Editing XML Documents

This section explains the various features in Oxygen XML Developer for editing XML documents. It includes information about the user interface components and actions that are available in the various editing modes and numerous features to help you edit XML documents in any mode.

Related Information:

[Text Editing Mode](#) on page 168

[Grid Editing Mode](#) on page 224

Editing XML Documents in Text Mode

The Oxygen XML Developer **Text** editing mode is designed to be a simple, yet powerful, XML source editor. You can use this mode to edit XML code, markup, and text and it provides support to help you transform, and debug XML-based documents. It is similar to other common text editors, but Oxygen XML Developer also includes specialized editing actions, a powerful [Content Completion Assistant](#), a helpful [Outline view](#), and many other unique features.

To switch to this mode, select **Text** at the bottom of the editing area.



Navigating the Document Content in Text Mode

Oxygen XML Developer includes some useful features to help you navigate XML documents in **Text** mode.

Using the Keyboard

Oxygen XML Developer allows you to quickly navigate through a document using the **Ctrl + CloseBracket (Command + CloseBracket on OS X)** key to go to the next XML node and **Ctrl + OpenBracket (Command + OpenBracket on OS X)** to go to the previous one.

To navigate one word forward or backwards, use **Ctrl + RightArrow (Command + RightArrow on OS X)**, and **Ctrl + LeftArrow (Command + LeftArrow on OS X)**, respectively. To position the cursor at the beginning or end of the document you can use **Ctrl + Home (Command + Home on OS X)**, and **Ctrl + End (Command + End on OS X)**, respectively.

Navigation Buttons

Oxygen XML Developer includes some actions that help you to quickly navigate to a particular modification. These navigation buttons are available in the main toolbar and the actions can also be accessed from the **Find** menu. The three actions include:

-  **Last Modification** - Moves the cursor to the last modification in any opened document.
-  **Back** - Moves the cursor to the previous position.
-  **Forward** - Moves the cursor to the next position. Available after you use the **Back** button at least once.

Navigating with the Outline View

Oxygen XML Developer includes a very useful **Outline view** that displays a hierarchical tag overview of the currently edited XML Document.

You can use this view to quickly navigate through the current document by selecting nodes in the outline tree. It is synchronized with the editor area, so when you make a selection in the **Outline** view, the corresponding nodes are highlighted in the editor area.

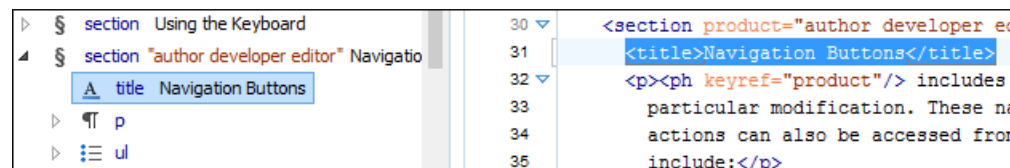


Figure 176: Outline View Navigation in Text Mode

Using the Breadcrumb to Navigate

A *breadcrumb* on the top stripe indicates the path from the document root element to the current element. It can also be used as a helpful tool to navigate to specific elements throughout the structure of the document.




Figure 177: Breadcrumb in Text Mode

The last element listed in the *breadcrumb* is the element at the current cursor position. The current element is also highlighted by a thin light blue bar for easy identification. Clicking an element from the *breadcrumb* selects the entire element and navigates to it in the editor area.

Navigating with the Go To Dialog Box

In **Text** mode, you can navigate precisely to a location in the document you are editing by using the **Go to** dialog box. To open this dialog box, go to **Find > Go to (Ctrl+L (Command+L on OS X))**.

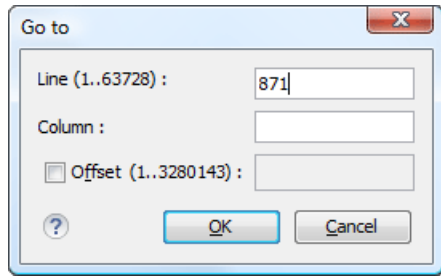


Figure 178: Go to Dialog Box

The dialog box includes the following fields for specifying a specific navigation location:

- **Line** - Destination line in the current document.
- **Column** - Destination column in the current document.
- **Offset** - Destination offset relative to the beginning of document.

Navigating with Bookmarks

By using *bookmarks*, you can mark positions in an edited document so that you can return to it later. This is especially helpful for navigating through large documents or while editing multiple documents. You can place up to nine distinct *bookmarks* in any document. Shortcut keys are available to place the *bookmarks* or to return to any of the marked positions. You can configure these shortcut keys in the [Options > Menu Shortcut Keys](#) menu.

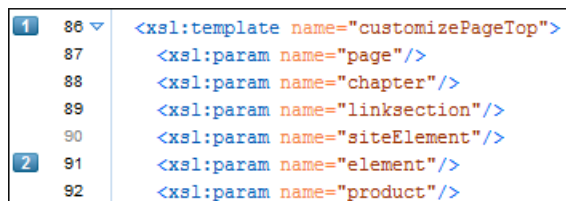


Figure 179: Editor Bookmarks

A *bookmark* can be inserted in **Text** mode by doing one of the following:

- Click in the vertical stripe on the left side of the editor (to the left of the line number).
- Select the **Create Bookmark (F9)** action from the **Edit > Bookmarks** menu.

A *bookmark* can be removed by right-clicking its icon on the vertical stripe and selecting **Remove** or **Remove all (Ctrl+F7 (Command+F7 on OS X))**.

You can navigate the *bookmarks* by using one of the actions available on the **Edit > Bookmarks > Go to** menu or by using the shortcut keys that are listed in that menu.

Smart Editing in Text Mode

Oxygen XML Developer includes *smart editing* features to help you edit XML documents in **Text** mode. The following smart editing features are included:

- **Closing tag auto-expansion** - This feature helps save some keystrokes by automatically inserting a closing tag when you insert a complete start tag and the cursor is automatically placed in between the start and end tags. For instance, after entering a start `<tag>`, the corresponding closing `</tag>` is automatically inserted and the cursor is placed between the two (`<tag>|</tag>`).
- **Auto-rename matching tag** - When you edit the name of a start tag, Oxygen XML Developer will mirror-edit the name of the matching end tag. This feature can be controlled from the [Content Completion option page](#).
- **Auto-breaking the edited line** - The [Hard line wrap option](#) automatically breaks the edited line when its length exceeds the maximum line length [defined for the format and indent operation](#).
- **Indent on Enter** - The [Indent on Enter option](#) indents the new line inserted when you press **Enter**.
- **Smart Enter** - The [Smart Enter option](#) inserts an empty line between the start and end tags. If you press **Enter** between a start and end tag, the action places the cursor in an indented position on the empty line between the lines that contain the start and end tag.

- **Double-click** - A double-click selects certain text, depending on the position of the click in the document:
 - If the click position is on a start tag or end tag, then the element name is selected.
 - If the click position is immediately after the opening quote or immediately before the closing quote of an attribute value, then the entire attribute value is selected.
 - Otherwise, a double-click selects contiguous text.
- **Triple-click** - A triple-click selects entire regions of text, depending on the click position:
 - If the click position is on a start or end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is after a start tag or before an end tag, then the entire content of the element without the start and end tags is selected.
 - If the click position is before a start tag or after an end tag, then the entire tag is selected, including the start and end tags, and the content in between.
 - If the click position is immediately before an attribute, then the entire attribute and its value is selected.
 - If the click position is in between the opening and closing quotes of an attribute value, then the entire attribute value is selected.
 - Otherwise, it selects the entire current line.

Shortcut Actions in Text Mode

Oxygen XML Developer includes numerous shortcut actions to help you edit content in the **Text** editing mode.

Changing the Font Size (Zoom)

The font size of the editor panel can be changed with the following actions that are available with shortcuts or in the **Document > Font size** menu:

Increase editor font (Ctrl + NumPad+ (Command + NumPad+ on OS X) or Ctrl + MouseWheelForward (Windows/Linux))

Increases the font size (zooms in) with one point for each execution of the action.

Note: For Mac OS X, if you activate the [Enable mouse-wheel zooming option](#) in the **Editor** preferences page, you can use **Command + MouseWheelForward** to increase the font size (zoom in). It is disabled by default due to the way inertia affects the mouse wheel on Mac OS X.

Decrease editor font (Ctrl + NumPad- (Command + NumPad- on OS X) or Ctrl + MouseWheelBackwards (Windows/Linux))

Decreases the font size (zooms out) with one point for each execution of the action.

Note: For Mac OS X, if you activate the [Enable mouse-wheel zooming option](#) in the **Editor** preferences page, you can use **Command + MouseWheelBackwards** to decrease the font size (zoom out). It is disabled by default due to the way inertia affects the mouse wheel on Mac OS X.

Normal editor font (Ctrl + 0 (Command + 0 on OS X))

Resets the font size to [the value of the editor font set in the Fonts preferences page](#).

Undo/Redo Actions

The typical undo and redo actions are available with shortcuts or in the **Edit** menu:

Undo (Ctrl + Z (Command + Z on OS X))

Reverses a maximum of 200 editing actions (configurable with the [Undo history size option](#) in the **Editor** preferences page) to return to the preceding state.

Note: Complex operations such as **Replace All** or **Indent selection** count as single undo events.

Redo (Ctrl + Y (Command + Shift + Z on OS X, Ctrl + Shift + Z on Linux/Unix))

Recreates a maximum of 100 editing actions that were undone by the **Undo** function.

Copy and Paste Actions

The typical copying and pasting actions are available with shortcuts or in the contextual menu (or the **Edit** menu):



Cut (Ctrl + X (Command + X on OS X))

Removes the current selected content from the document and places it in the clipboard.



Copy (Ctrl + C (Command + C on OS X))

Places a copy of the current selected content in the clipboard.



Paste (Ctrl + V (Command + V on OS X))

Inserts the current clipboard content into the document at the cursor position.

Select All (Ctrl + A (Command + A on OS X))

Selects the entire content of the current document.

Moving XML Nodes

You can use the following shortcuts to move XML elements or XSLT variables up or down in **Text** mode:

Ctrl + Alt + UpArrow (Command + Alt + UpArrow on OS X)

Moves the node up one line.

Ctrl + Alt + DownArrow (Command + Alt + DownArrow on OS X)

Moves the node down one line.

Note: The requirements for these node moving actions to work are as follows:

- The mechanism is designed to work without a selection. If you use these actions on a selection of content, it moves the entire selection. To make this mechanism work as intended, simply position the cursor somewhere on the line that you want to move.
- A start tag must be the first text occurrence on the line where the cursor is positioned.
- On the line where the element ends, only whitespaces are allowed after the end tag.

Miscellaneous Shortcut Actions in Text Mode

Oxygen XML Developer also includes the following other miscellaneous shortcut actions in **Text** mode:

Ctrl + Delete (Command + Delete on OS X)

Deletes the next word.

Ctrl + Backspace (Command + Backspace on OS X)

Deletes the previous word.

Ctrl + W (Command + W on OS X)

Cuts the previous word.

Ctrl + K (Command + K on OS X)

Cuts to end of line.

Ctrl + Single-Click (Command + Single-Click on OS X)

Use this shortcut to open any of the following:

- Any absolute URL (URLs that have a protocol), regardless of their location in the document.
- URI attributes such as: `schemaLocation`, `noNamespaceSchemaLocation`, `href` and others.
- Processing instructions used for associating resources, `xml-models`, `xml-stylesheets`.

Ctrl + Shift + Y (Command + Shift + Y on OS X) (Document > Edit > Toggle Line Wrap)

Enables or disables line wrapping. When enabled, if text exceeds the width of the displayed editor, content is wrapped so that you do not have to scroll horizontally.

Related Information:

[Frequently Used Shortcut Keys](#) on page 10

Editing XML Markup in Text Mode

Oxygen XML Developer includes some useful actions that allow you to easily edit XML markup in **Text** mode. These actions are available in the **Refactoring** submenu of the contextual menu and in the **Document > Markup** menu, and many of the actions can also be done with simple keyboard shortcuts.

Using the Breadcrumb

A *breadcrumb* on the top stripe indicates the path from the document root element to the current element. It can also be used as a helpful tool to insert and edit specific elements in the document structure.




Figure 180: Breadcrumb in Text Mode

The last element listed in the *breadcrumb* is the element at the current cursor position. The current element is also highlighted by a thin light blue bar for easy identification. Clicking an element in the *breadcrumb* selects the entire element in the editor area. Also, each element provides a contextual menu with access to the following actions:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens an editing window that allows you to edit the attributes of the currently selected element.

Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

Cut

Removes the selected element and copies it to the clipboard.

Copy

Copies the selected element to the clipboard.

Delete

Deletes the currently selected element.

Move Nodes

You can easily move XML nodes in the current document by using the following shortcut keys:

Alt + UpArrow

Moves the current node or selected nodes in front of the previous node.

Alt + DownArrow

Moves the current node or selected nodes after the subsequent node.

Rename Elements

You can rename elements by using the following actions in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Rename Element

The element from the cursor position, and any elements with the same name, can be renamed according with the options from the **Rename** dialog box.

Rename Prefix (Alt + Shift + P (Command + Shift + P on OS X))

The prefix of the element from the cursor position, and any elements with the same prefix, can be renamed according with the options from the **Rename** dialog box.

- If you select the **Rename current element prefix** option, the application will recursively traverse the current element and all its children. *For example*, to change the `xmlns:p1="ns1"` association in the current element to `xmlns:p5="ns1"`, if the `xmlns:p1="ns1"` association is applied on the parent element, then Oxygen XML Developer will introduce `xmlns:p5="ns1"` as a new declaration in the current element and will change the prefix from p1 to p5. If p5 is already associated with another namespace in the current element, then the conflict will be displayed in a dialog box. By pressing **OK**, the prefix is modified from p1 to p5 without inserting a new declaration.
- If you select the **Rename current prefix in all document** option, the application will apply the change on the entire document.
- To also apply the action inside attribute values, select the **Rename also attribute values that start with the same prefix** checkbox.

Surround Content with Tags (Wrap)

You can surround a selection of content with tags (*wrap* the content) by using the following action in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Surround with submenu

Presents a drop-down menu that allows you to choose a tag to surround a selected portion of content.

Surround with Tags (Ctrl + E (Command + E on OS X))

Allows you to choose a tag that encloses a selected portion of content. If there is no selection, the start and end tags are inserted at the cursor position.

- If the **Position cursor between tags** option is selected in the **Content Completion** preferences page, the cursor is placed between the start and end tag.
- If the **Position cursor between tags** option is not selected in the **Content Completion** preferences page, the cursor is placed at the end of the start tag, in an insert-attribute position.

Surround with '[tag]' (Ctrl + ForwardSlash (Command + ForwardSlash on OS X))

Surround the selected content with the last tag used.

Unwrap the Content of Elements

You can unwrap the content of an element by using the following action in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Delete element tags (Alt + Shift + X (Command + Alt + X on OS X))

Deletes the start and end tag of the current element.

Join or Split Elements

You can join or split elements in the current document by using the following actions in the **Refactoring** submenu of the contextual menu (or from the **Document > Markup** menu):

Join elements (Alt + Shift + J (Command + Alt + J on OS X))

Joins the left and right elements relative to the current cursor position. The elements must have the same name, attributes, and attributes values.

Split element (Alt + Shift + D (Ctrl + Alt + D on OS X))

Split the element from the cursor position into two identical elements. The cursor must be inside the element.

Other Refactoring Actions

You can also manage the structure of the markup by using the other specific XML refactoring actions that are available in the **Refactoring** submenu of the contextual menu:

Attributes Refactoring Actions

Contains predefined XML refactoring operations that pertain to attributes with some of the information preconfigured based upon the current context.

Add/Change attribute

Allows you to change the value of an attribute or insert a new one.

Convert attribute to element

Allows you to change an attribute into an element.

Delete attribute

Allows you to remove one or more attributes.

Rename attribute

Allows you to rename an attribute.

Replace in attribute value

Allows you to search for a text fragment inside an attribute value and change the fragment to a new value.

Comments Refactoring Actions

Contains predefined XML refactoring operations that pertain to comments with some of the information preconfigured based upon the current context.

Delete comments

Allows you to delete comments found inside one or more elements.

DITA Refactoring Actions

A variety of predefined XML refactoring operations that pertain to DITA documents with some of the information preconfigured based upon the current context.

Change Topic ID to File Name

Use this operation to change the ID of a topic to be the same as its file name.

Convert CALS Tables to Simple Tables

Use this operation to convert DITA CALS tables to simple tables.

Convert conrefs to conkeyrefs

Use this operation to convert conref attributes to conkeyref attributes.

Convert Simple Tables to CALS Tables

Use this operation to convert DITA simple tables to CALS tables.

Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task). A DITA *General Task* is a less restrictive alternative to the *Strict Task* information type.

Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

Elements Refactoring Actions

Contains predefined XML refactoring operations that pertain to elements with some of the information preconfigured based upon the current context.

Delete element

Allows you to delete elements.

Delete element content

Allows you to delete the content of elements.

Insert element

Allows you to insert new elements.

Rename element

Allows you to rename elements.

Unwrap element

Allows you to remove the surrounding tags of elements, while keeping the content unchanged.

Wrap element

Allows you to surround elements with element tags.

Wrap element content

Allows you to surround the content of elements with element tags.

Fragments Refactoring Actions

Contains predefined XML refactoring operations that pertain to XML fragments with some of the information preconfigured based upon the current context.

Insert XML fragment

Allows you to insert an XML fragment.

Replace element content with XML fragment

Allows you to replace the content of elements with an XML fragment.

Replace element with XML fragment

Allows you to replace elements with an XML fragment.

JATSKit Refactoring Actions

Contains predefined XML refactoring operations that pertain to JATS documents with some of the information preconfigured based upon the current context.

Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Adds an NLM 'BITS' 2.0 DOCTYPE declaration.

Add Blue DOCTYPE - NISO JATS Publishing 1.1

Adds a JATS 'Blue' 1.1 DOCTYPE declaration.

Normalize IDs

Assigned IDs are normalized and IDs are assigned to some elements that are missing them.

Related Information:

[Refactoring XML Documents](#) on page 437

[Contextual Menu Actions in Text Mode](#) on page 388

[Frequently Used Shortcut Keys](#) on page 10

Folding XML Elements in Text Mode

When working with a large document, the *folding* support in Oxygen XML Developer can be used to collapse some element content leaving only those that you need to edit in focus. Expanding and collapsing works on individual elements. Expanding an element leaves the child elements unchanged.

By default, the *folding* feature is enabled in Oxygen XML Developer, but it can be disabled in the **Text** preferences page with the **Enable folding** option.



Figure 181: Folding of XML Elements in Text Mode

The fact that the folds are persistent is a unique feature of Oxygen XML Developer. The next time you open the document the folds are restored to its last state.

Folding Actions in Text Mode

Element folds are marked with a small triangle (▾ / ▸) in the left stripe. To toggle the fold, simply click the icon. Also, if you right-click the icon, the following actions are available:

Collapse Other Folds (Ctrl + NumPad/ (Command + NumPad/ on OS X))

Folds all the elements except the current element.

Collapse Child Folds (Ctrl + NumPad. (Command + NumPad. on OS X))

Folds the child elements that are indented one level inside the current element.

Expand Child Folds

Unfolds all child elements of the currently selected element.

Expand All (Ctrl + NumPad* (Command + NumPad* on OS X))

Unfolds all elements in the current document.

For more information about the *folding* support in Oxygen XML Developer, watch our video demonstration:

https://www.youtube.com/embed/eR9HfN_peAE

Drag and Drop in Text Mode

To move a whole region of text to other location in the same edited document, just select the text, drag the selection by holding down the left mouse button and drop it to the target location.

You can also copy content from other applications and paste it into the document.

Selecting Content in Text Mode

Oxygen XML Developer includes a variety of keyboard shortcuts that allow you to select content in **Text** mode. These include numerous standard continuous selection possibilities that are common to many text editors, as well as a selection feature that allows you to select a rectangular area within a document in **Text** mode.

Standard Continuous Selection Shortcuts

Ctrl + A (Meta + A on Mac OS X)

Selects all content in the document.

Shift + Left/Right Arrow Keys

Begins a continuous selection at the cursor position and extends it one character at a time in the direction that you press the arrow keys.

Shift + Up/Down Arrow Keys

Begins a continuous selection at the cursor position and extends it one line at a time in the direction that you press the arrow keys.

Ctrl + Shift + Left/Right Arrow Keys (Meta + Shift + Left/Right Arrow Keys on Mac OS X)

Begins a continuous selection at the cursor position and extends it one word at a time in the direction that you press the arrow keys.

Shift + Home

Begins a continuous selection at the cursor position and extends it to the beginning of the current line (on Mac OS X, it extends to the beginning of the document).

Shift + End

Begins a continuous selection at the cursor position and extends it to the end of the current line (on Mac OS X, it extends to the end of the document).

Ctrl + Shift + Home

Begins a continuous selection at the cursor position and extends it to the beginning of the document.

Ctrl + Shift + End

Begins a continuous selection at the cursor position and extends it to the end of the document.

Shift + PageUp

Begins a continuous selection at the cursor position and extends it up one screen page.

Shift + PageDown

Begins a continuous selection at the cursor position and extends it down one screen page.

Double-Click

Selects certain text, depending on the position of the click in the document. See [Smart Editing Double-Click](#) for the specifics.

Triple-Click

Selects entire regions of text, depending on the position of the click in the document. See the [Smart Editing Triple-Click](#) for the specifics.

Right-Click > Select > Element

Selects the entire element at the current cursor position.

Right-Click > Select > Content

Selects the entire content of the element at the current cursor position, excluding the start and end tag. Performing this action repeatedly will result in the selection of the content of the ancestor of the currently selected element content.

Right-Click > Select > Attributes

Selects all the attributes of the element at the current cursor position.

Right-Click > Select > Parent

Selects the entire parent element at the current cursor position.

Rectangular Selection Shortcuts

Oxygen XML Developer also includes some keyboard shortcuts that allow you to select a rectangular block of content in **Text** mode and you can then copy, cut, paste, delete, or edit the selection.



Attention: The rectangular selection shortcuts will not work if the [Line Wrap](#) option is selected in the **Text** preferences page.

The following shortcuts can be used to create a rectangular selection:

Alt + Mouse Click + Mouse Movement (Alt + Meta + Mouse Click + Mouse Movement on Mac OS X)

Begins a rectangular selection at the mouse click position and extends it in the direction that you move the mouse. Release **Alt (Alt + Meta on Mac OS X)** to enter the *in-place editing mode*.

Shift + Alt + Left/Right Arrow Keys (Shift + Alt + Meta + Left/Right Arrow Keys on Mac OS X)

Begins a rectangular selection at the cursor position and extends it one character at a time in the direction that you press the arrow keys (you can also use the mouse to extend the selection).

Shift + Alt + Up/Down Arrow Keys (Shift + Alt + Meta + Up/Down Arrow Keys on Mac OS X)

Begins a rectangular selection at the cursor position and extends it one line at a time in the direction that you press the arrow keys (you can also use the mouse to extend the selection).

Ctrl + Shift + Alt + Left/Right Arrow Keys (Ctrl + Shift + Alt + Meta + Left/Right Arrow Keys on Mac OS X)

Begins a rectangular selection at the cursor position and extends it one word at a time in the direction that you press the arrow keys.

Shift + Alt + Home (Shift + Alt + Meta + Home on Mac OS X)

Begins a rectangular selection at the cursor position and extends it to the beginning of the current line.

Shift + Alt + End (Shift + Alt + Meta + End on Mac OS X)

Begins a rectangular selection at the cursor position and extends it to the end of the current line.

Shift + Alt + PageUp (Shift + Alt + Meta + PageUp on Mac OS X)

Begins a rectangular selection at the cursor position and extends it up one screen page.

Shift + Alt + PageDown (Shift + Alt + Meta + PageDown on Mac OS X)

Begins a rectangular selection at the cursor position and extends it down one screen page.

You can then use standard editing actions to copy, cut, paste, or delete the entire selection.

In-Place Editing Mode

To edit the content of the rectangular selection, you can enter an in-place editing mode by releasing the **Alt** key (on Mac OS X, release both **Alt & Meta**). Once you are in the editing mode, you can simply use your keyboard to edit the entire selection of content, or click anywhere inside the selection to edit the content at the cursor position for all lines within the selection at once (as if the rectangular selection is a selection of columns). To exit the editing mode, press either **Enter** or **Esc**.

Content Completion Assistant in Text Mode

Oxygen XML Developer includes an intelligent *Content Completion Assistant* that offers rapid, inline identification and insertion of structured language elements, attributes, and attribute values. Oxygen XML Developer shows the available entries that are valid in the current editing context.

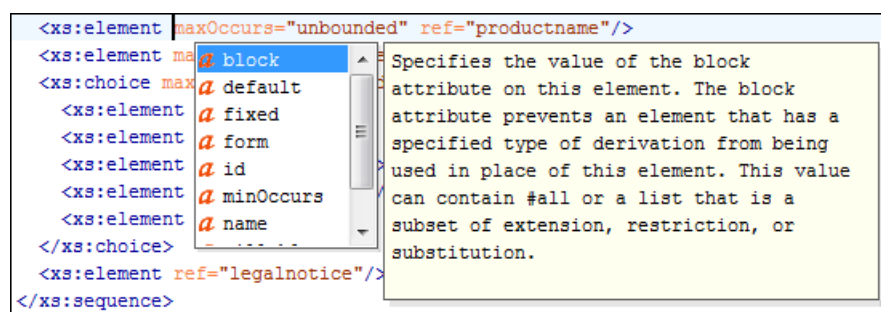


Figure 182: Content Completion Assistant

The *Content Completion Assistant* feature is schema-driven (XML Schema, DTD, and RELAX NG) and status information about the detected schema is logged in the *Information view*.

The *Content Completion Assistant* is enabled by default. To disable it, open the **Preferences** dialog box (**Options > Preferences**), go to **Editor > Content Completion**, and deselect the **Enable content completion** option.

Using the Content Completion Assistant in Text Mode

The feature is activated in **Text** mode in the following situations:

- After you press the `<` character when inserting an element, it is automatically activated after a short delay. You can adjust the activation delay with the [Activation delay of the proposals window \(ms\)](#) option from the **Content Completion** preferences page.
- After typing a partial element or attribute name, you can manually activate it by pressing **Ctrl + Space** (**Command + Space on OS X**) or **Alt + ForwardSlash** (**Command + Alt + ForwardSlash on OS X**). If there is only one valid proposal at the current location, it is inserted without displaying the list of proposals.

You can navigate through the list of proposals by using the **Up** and **Down** keys on your keyboard. In some cases, the *Content Completion Assistant* displays a documentation window with information about the particular proposal and some of them have links to additional information (for example, DITA elements might have a link to the DITA Style Guide). You can also change the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected proposal in **Text** mode, do one of the following:

- Press **Enter** or **Tab** to insert both the start and end tags and position the cursor inside the start tag in a position suitable for inserting attributes.
- Press **Ctrl + Enter** (**Command + Enter on OS X**) to insert both the start and end tags and positions the cursor between the tags in a position where you can start typing content.

Note: When the DTD, XML Schema or RELAX NG schema specifies required child elements for the newly added element, they are inserted automatically only if the [Add Element Content](#) option (in the **Content Completion** preferences page) is selected. The *Content Completion Assistant* can also add optional content and first choice particle, as specified in the DTD, XML Schema, or RELAX NG schema. To activate these features, select the [Add optional content](#) and [Add first Choice particle](#) options in the **Content Completion** preferences page.

After inserting an element, the cursor is positioned:

- Before the `>` character of the start tag, if the element allows attributes, to allow rapid insertion of any of the attributes supported by the element. Pressing the space bar displays the Content Completion list once again. This time it contains the list of allowed attribute names. If the attribute supports a fixed set of parameters, the assistant list displays the list of valid parameters. If the parameter setting is user-defined and therefore variable, the assistant is closed to allow manual insertion. The values of the attributes can be learned from the same elements in the current document
- After the `>` character of the start tag if the element has no attributes.

Where the Content Completion Assistant is Displayed

The *Content Completion Assistant* is displayed:

- Anywhere within a tag name or at the beginning of a tag name in an XML document, XML Schema, DTD, or Relax NG (full or compact syntax) schema.
- Anywhere within an attribute name or at the beginning of an attribute name in any XML document with an associated schema.
- Within attribute values or at the beginning of attribute values in XML documents where lists of possible values have been defined for that element in the schema associated with the document.

Types of Proposals Listed in the Content Completion Assistant

The following things are considered for determining the proposals that are listed in the content completion window:

Element Structure Specified in DTD or Schema

The proposals that populate the *Content Completion Assistant* depend on the element structure specified in the DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema associated with the edited document.

Note: The *Content Completion Assistant* is able to offer elements defined both by XML Schemas version 1.0 and 1.1.

Current Cursor Position

The number and type of elements displayed by the *Content Completion Assistant* is dependent on the cursor's current position in the structured document. The child elements displayed within a given element are defined by the structure of the specified DTD, XML Schema, Relax NG (full or compact syntax) schema, or NVDL schema.

Unique ID Attribute Values

A schema may declare certain attributes as *ID* or *IDREF/IDREFS*. When the document is validated, Oxygen XML Developer checks the uniqueness and correctness of the ID attributes. It also collects the attribute values declared in the document to prepare the list of proposals. This is available for documents that use DTD, XML Schema, and Relax NG schema.

Values for *xml:id* Attributes

Values of all the `xml:id` attributes are handled as ID attributes. They are collected and displayed by the *Content Completion Assistant* as possible values for *anyURI* attributes defined in the schema of the edited document. This works only for XML Schema and Relax NG schemas.

Links/References in DITA

When entering values for the various types of links and references in DITA (for example, values for `href` or `conref` elements), the *Content Completion Assistant* will propose potential targets when you use the forward slash key (`/`).

ID Values for DITA Key References

In DITA, when inserting key references (`keyref`) or content key references (`conkeyref`), the ID values that are defined in the key reference are presented as possible targets. The *Content Completion Assistant* will only propose targets that are valid in the current context.

Element and Attribute Values

For documents that use an XML Schema or Relax NG schema, the *Content Completion Assistant* offers proposals for attribute and element values as long as the allowed values are defined in the schema. Also, if a default value or fixed value is defined in the schema, then that value is offered in the *Content Completion Assistant*.

Related Information:

Set Schema to be Used for Content Completion in Text Mode

The list of proposals in the *Content Completion Assistant* depend on the associated schemas. The DTD, XML Schema, Relax NG, or NVDL schema used to populate the *Content Completion Assistant* is specified in the following methods, in the order of their precedence:

- The [schema specified explicitly in the document](#). In this case, Oxygen XML Developer reads the beginning of the document and resolves the location of the DTD, XML Schema, Relax NG schema, or NVDL schema.
- The [default schema declared](#) in the [Document Type configuration dialog box](#) that matches the edited document type.
- For XSLT stylesheets, the schema specified in the Oxygen XML Developer [XSL preferences page](#). Oxygen XML Developer will read the content completion settings when the prolog fails to provide or resolve the location of a DTD, XML Schema, Relax NG, or NVDL schema.
- For XML Schemas, the schema specified in the Oxygen XML Developer [XSD preferences page](#). Oxygen XML Developer will read the content completion settings and the specified schema will enhance the content completion inside the `xs:annotation/xs:appinfo` elements of the XML Schema.

Oxygen XML Developer creates the content completion lists by analysing the detected schema and the current context (the position in the editor). If you change the schema, then the list of tags to be inserted is also updated.

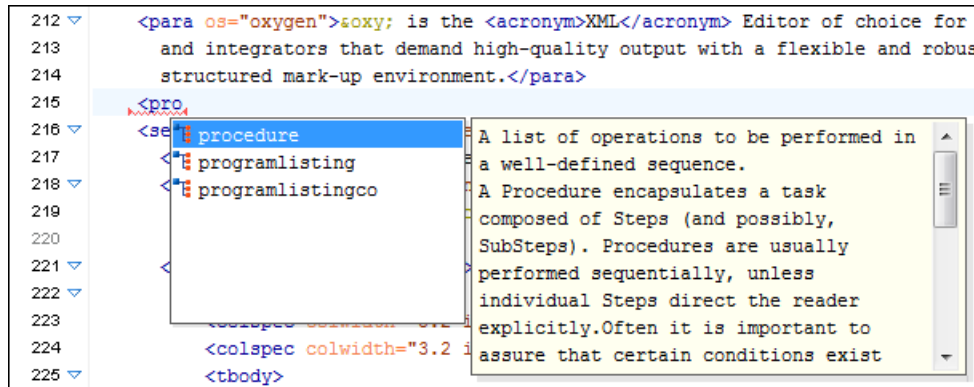


Figure 183: Example: Content Completion Driven by DocBook DTD

Schema Annotations in Text Mode

A schema annotation is a documentation snippet associated with the definition of an element or attribute in a schema. If such a schema is associated with an XML document, the annotations are displayed in:

- The [Content Completion Assistant](#).
- A small tooltip window shown when the mouse hovers over an element or attribute. The tooltip window can be invoked at any time by using the **F2** shortcut.

The schema annotations support is available if the schema type is one of the following:

- XML Schema
- Relax NG
- NVDL schema
- DTD

This feature is enabled by default, but you can disable it by deselecting the [Show annotations in Content Completion Assistant](#) option in the **Annotations** preferences page.

Styling Annotations with HTML

You can use HTML format in the annotations you add in an XML Schema or Relax NG schema. This improves the visual appearance and readability of the documentation window displayed when editing XML documents validated against such a schema. An annotation is recognized and displayed as HTML if it contains at least one HTML element (such as `div`, `body`, `p`, `br`, `table`, `ul`, or `ol`).

The HTML rendering is controlled by the [Show annotations using HTML format, if possible](#) option in the **Annotations** preferences page. When this option is deselected, the annotations are converted and displayed as plain text and if the annotation contains one or more HTML tags (`p`, `br`, `ul`, `li`), they are rendered as an HTML document loaded in a web browser. For example, `p` begins a new paragraph, `br` breaks the current line, `ul` encloses a list of items, and `li` encloses an item of the list.

Collecting Annotations from XML Schemas

In an XML Schema, the annotations are specified in an `<xs:annotation>` element like this:

```
<xs:annotation>
  <xs:documentation>
    Description of the element.
  </xs:documentation>
</xs:annotation>
```

If an element or attribute does not have a specific annotation, then Oxygen XML Developer looks for an annotation in the type definition of that element or attribute.

Collecting Annotations from Relax NG Schemas

For Relax NG schema, element and attribute annotations are made using the `<documentation>` element from the `http://relaxng.org/ns/compatibility/annotations/1.0` namespace like this:

```
<define name="person" >
  <element name="person">
    <a:documentation xmlns:a="http://relaxng.org/ns/compatibility/annotations/1.0">
      Information about a person. </a:documentation>
    <ref name="name" />
    <zeroOrMore>
    <ref name="email" />
    </zeroOrMore>
  </element>
</define>
```

However, any element outside the Relax NG namespace (`http://relaxng.org/ns/structure/1.0`) is handled as annotation and the text content is displayed in the annotation window. To activate this behavior, select the [Use all Relax NG annotations as documentation](#) option in the **Annotations** preferences page.

Collecting Annotations from Relax NG Compact Syntax Schemas

For Relax NG Compact Syntax schema, annotations are made using comments like this:

```
## Information about a person.
element person { name, email*}
```

Collecting Annotation from DTDs

For DTD, Oxygen XML Developer defines a custom mechanism for annotations using comments enabled by the [Prefer DTD comments that start with "doc:" as annotations](#) option in the **Annotations** preferences page. The following is an example of a DTD annotation:

```
<!--doc:Description of the element. -->
```

Content Completion Helper Views

Information about the current element being edited is also available in various [dockable](#) views, such as the [Model view](#), [Attributes view](#), [Elements view](#), and [Entities view](#). By default, they are located on the right-hand side of the main editor window. These views, along with the powerful [Outline view](#), provide spatial and insight information about the edited document and the current element. If any particular view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Model View

The **Model** view presents the structure of the currently selected tag, and its documentation, defined as annotation in the schema of the current document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

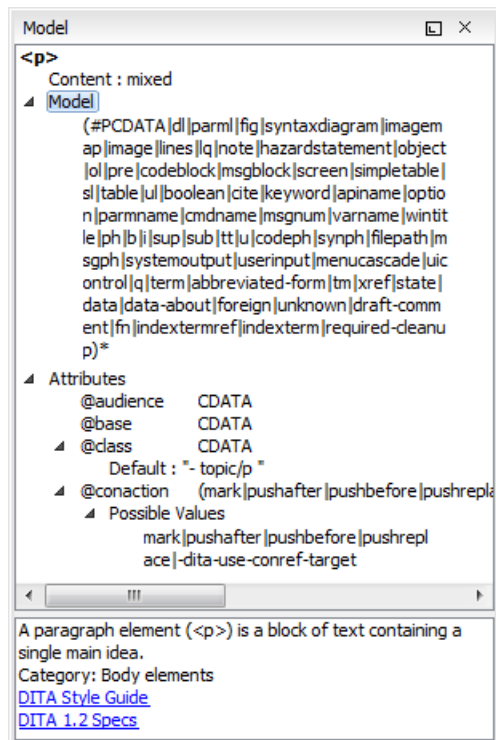


Figure 184: Model View

The **Model** view is comprised of two sections, an element structure panel and an annotations panel.

Element Structure Panel

The element structure panel displays the structure of the currently edited or selected tag in a tree-like format. The information includes the name, model, and attributes of the current tag. The allowed attributes are shown along with imposed restrictions, if any.

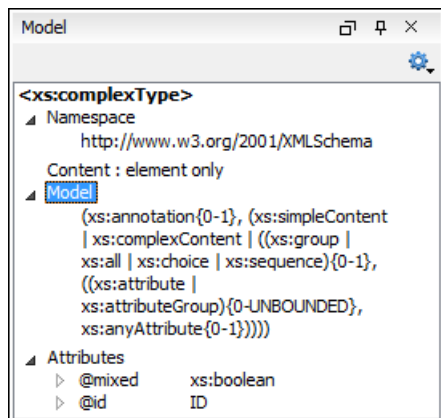


Figure 185: Element Structure Panel

Annotation Panel

The **Annotation** panel displays the annotation information for the currently selected element. This information is collected from the XML schema.

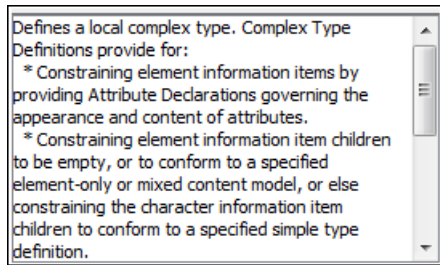


Figure 186: Annotation panel

Attributes View in Text Mode

The **Attributes** view presents all the attributes of the current element determined by the schema of the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened from the **Window > Show View** menu.

You can use the **Attributes** view to insert attributes, edit their values, or add values to existing attributes.

The attributes are rendered differently depending on their state:

- The names of the attributes are rendered with a bold font, and their values with a plain font.
- Default values are rendered with a plain font, painted gray.
- Empty values display the text "[empty]", painted gray.
- Invalid attributes and values are painted red.

To edit the value of the corresponding attribute, double-click a cell in the **Value** column. If the possible values of the attribute are specified as `list` in the schema of the edited document, the **Value** column acts as a combo box that allows you to either select the value from a list or manually enter it.

You can sort the attributes table by clicking the **Attribute** column header. The table contents can be sorted as follows:

- By attribute name in ascending order.
- By attribute name in descending order.
- Custom order, where the used attributes are displayed at the beginning of the table sorted in ascending order, followed by the rest of the allowed elements sorted in ascending order.

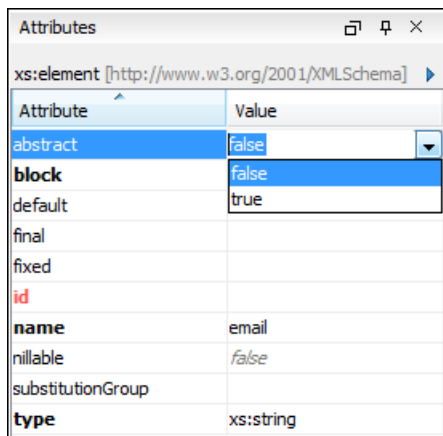


Figure 187: Attributes View

Expand/Collapse Button

There is an **Expand/Collapse** (▶ / ◀) button at the top-right of the view. When expanded, this presents the following additional combo boxes:

Name Combo Box

Use this combo box to select an attribute. The drop-down list displays the list of possible attributes allowed by the schema of the document, as in the **Attributes** view. You can use the  **Remove** button to delete an attribute and its value from the selected element.

Value Combo Box

Use this combo box to add, edit, or select the value of an attribute. If the selected attribute has predefined values in the schema, the drop-down list displays those possible values. You can use the  **Browse** button to select a URL for the value of an attribute. You can also press **Ctrl + Space** to open a content completion window that offers a list of possible choices and allows you to select multiple values. After you have entered or selected a value, use the  **Update** button (or press **Enter**) to add the value to the attribute.

Contextual Menu Actions in the Attributes View

The following actions are available in the contextual menu of the **Attributes** view when editing in **Text** mode:

Add

Allows you to insert a new attribute.

Set empty value

Specifies the current attribute value as empty.

Remove

Removes the attribute (action available only if the attribute is specified). You can invoke this action by pressing the **(Delete)** or **(Backspace)** keys.

Copy

Copies the `attrName="attrValue"` pair to the clipboard. The `attrValue` can be:

- The value of the attribute.
- The value of the default attribute, if the attribute does not appear in the edited document.
- Empty, if the attribute does not appear in the edited document and has no default value set.

Paste

Depending on the content of the clipboard, the following cases are possible:

- If the clipboard contains an attribute and its value, both of them are introduced in the **Attributes** view. The attribute is selected and its value is changed if they exist in the **Attributes** view.
- If the clipboard contains an attribute name with an empty value, the attribute is introduced in the **Attributes** view and you can start editing it. The attribute is selected and you can start editing it if it exists in the **Attributes** view.
- If the clipboard only contains text, the value of the selected attribute is modified.

Elements View in Text Mode

The **Elements** view presents a list of all defined elements that are valid at the current cursor position according to the schema associated to the document. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking any of the listed elements inserts that element into the edited document, at the current cursor position. Pressing **F2** with an element selected will display information about that particular element.



Figure 188: Elements View in Text Mode

Entities View

Entities provide abbreviated entries that can be used in XML files when there is a need of repeatedly inserting certain characters or large blocks of information. An *entity* is defined using the ENTITY statement either in the DOCTYPE declaration or in a DTD file associated with the current XML file.

There are three types of entities:

- **Built-in or Predefined** - Entities that are part of the predefined XML markup (&lt ;, &gt ;, &amp ;, &apos ;, &quot ;).
- **Internal** - Defined in the DOCTYPE declaration header of the current XML.
- **External** - Defined in an external DTD module included in the DTD referenced in the XML DOCTYPE declaration.

Note: If you want to add internal entities, you would need to switch to the Text editing mode and manually modify the DOCTYPE declaration. If you want to add external entities, you need to open the DTD module file and modify it directly.

The **Entities** view displays a list with all entities declared in the current document, as well as built-in ones. By default, it is located on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Double-clicking one of the entities will insert it at the current cursor position in the XML document. You can also sort entities by name and value by clicking the column headers.

Name	Value
lt	<
gt	>
amp	&
apos	'
quot	"
abbrev-d-att	(topic abbrev-d)
concept-att	(topic concept)
hazard-d-att	(topic hazard-d)
hi-d-att	(topic hi-d)
included-domains	&concept-att; ...
indexing-d-att	(topic indexing-d)
nbsp	
pr-d-att	(topic pr-d)
sw-d-att	(topic sw-d)
ui-d-att	(topic ui-d)
ut-d-att	(topic ut-d)

Figure 189: Entities View

The view features a filtering capability that allows you to search an entity by name, value, or both. Also, you can choose to display the internal or external entities.

Note: When entering filters, you can use the ? and * wildcards. Also, you can enter multiple filters by separating them with a comma.

Code Templates

Code templates are code fragments that can be inserted quickly at the current editing position. Oxygen XML Developer includes a set of built-in code templates for CSS, Schematron, XSL, XQuery, and XML Schema document types. You can also [define your own code templates for any type of file and share them with others](#).

To get a complete list of available code templates, press **Ctrl + Shift + Space** in **Text** mode. To enter the code template, select it from the list or type its code and press **Enter**. If a shortcut key has been assigned to the code template, you can also use the shortcut key to enter it. Code templates are displayed with a  symbol in the content completion list.

When the [Content Completion Assistant](#) is invoked (**Ctrl + Space (Command + Space on OS X)** in **Text** mode or **Enter** in **Author** mode), it also presents a list of code templates specific to the type of the active editor.

For more information about code templates, watch our video demonstration:

<https://www.youtube.com/embed/eNOMCJSzlu8>

Syntax Highlighting in XML Documents

Oxygen XML Developer supports syntax highlighting in XML documents to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for XML files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

Outline View in Text Mode

The **Outline** view in **Text** mode displays a general tag overview of the currently edited XML Document. When you edit a document, the **Outline** view dynamically follows the changes that you make, displaying the node that you modify. This functionality gives you great insight on the location of your modifications in the current document. It also shows the correct hierarchical dependencies between elements. This makes it easy for you to be aware of the document structure and the way element tags are nested.

Outline View Features

The **Outline** view allows you to:

- Quickly navigate through the document by selecting nodes in the **Outline** tree.
- Insert or delete nodes using contextual menu actions.
- Move elements by dragging them to a new position in the tree structure.
- Highlight elements in the editor area. It is synchronized with the editor area, so when you make a selection in the editor area, the corresponding nodes are highlighted in the **Outline** view, and vice versa.
- View document errors, as they are highlighted in the **Outline** view. A tooltip also provides more information about the nature of the error when you hover over the faulted element.

Outline View Interface

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

It also includes a  **Settings** menu in the top-right corner that presents a variety of options to help you filter the view even further.

Drop and Drop Actions in the Outline View

Entire XML elements can be moved or copied in the edited document using only the mouse in the **Outline** view with drag-and-drop operations. Several drag and drop actions are possible:

- If you drag an XML element in the **Outline** view and drop it on another node, then the dragged element will be moved after the drop target element.
- If you hold the mouse pointer over the drop target for a short time before the drop then the drop target element will be expanded first and the dragged element will be moved inside the drop target element after its opening tag.
- You can also drop an element before or after another element if you hold the mouse pointer towards the upper or lower part of the targeted element. A marker will indicate whether the drop will be performed before or after the target element.
- If you hold down the **(Ctrl (Command on OS X))** key after dragging, a copy operation will be performed instead of a move.

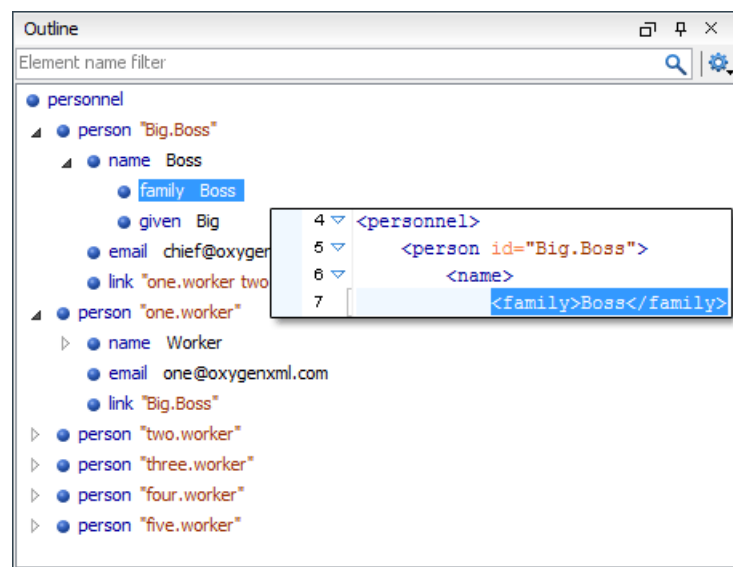


Figure 190: Outline View in Text Mode

Outline View Filters in Text Mode

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

The following actions are available in the  **Settings** menu of the **Outline** view when editing in **Text** mode:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.

Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

Outline View Contextual Menu Actions in Text Mode

The following actions are available from the contextual menu in the **Outline** view in **Text** mode:

Append Child

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it as a child of the current element.

Insert Before

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately before the current element, as a sibling.

Insert After

Allows you to select an element (from a drop-down list) that is allowed by the associated schema and inserts it immediately after the current element, as a sibling.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Encloses the currently selected element in an XML comment, if the element is not already commented. If it is already commented, this action will remove the comment.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

Inserting or Opening a File at Cursor Location

When editing content in **Text** mode, the following actions (in regards to inserting, opening, or comparing files) are available in the **Document > File** menu:

Insert File

Inserts the content of the file with the specified file path into the current document, at the current position of the cursor.

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Adjusting the Transparency of XML Markup

Most of the time you want the content of a document displayed on screen with zero transparency. However, if you want to focus your attention only on editing text content inside XML markup, Oxygen XML Developer offers the option of reducing the visibility of the markup by increasing their transparency when displayed in **Text** mode.

To change the level of transparency, use the  **Tags Transparency Selector** drop-down menu that is available from the **Source** toolbar. By default, this drop-down menu is not visible. You can add it to the toolbar by using [the Configure Toolbars action](#). There are several levels of transparency that can be adjusted to make the content more or less visible:

-  **Normal Contrast** - Resets the transparency level back to normal.
-  **Semi-transparent Text** - Slightly reduces the visibility of text to place greater emphasis on the visibility of the XML markup.
-  **Transparent Text** - Greatly reduces the visibility of text to place even greater emphasis on the visibility of the XML markup.
-  **Semi-transparent Markup** - Slightly reduces the visibility of the XML markup to place greater emphasis on the visibility of the text.
-  **Transparent Markup** - Greatly reduces the visibility of the XML markup to place even greater emphasis on the visibility of the text.

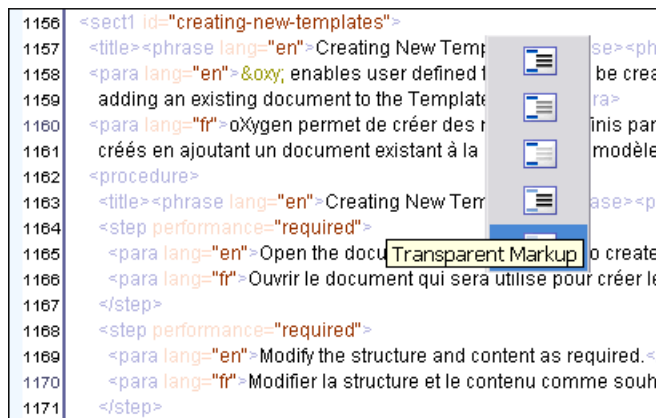


Figure 191: Tags Transparency Selector

Locking and Unlocking XML Markup

For documents with fixed markup, such as forms in which the XML tags are not allowed to be modified (only their text content), the possibility to edit the XML tag names can be toggled on or off with the  **Lock / Unlock the XML tags** action available in **Text** editing mode from the **Source** submenu from the contextual menu (or **Document > Source** menu).

You can set the default lock state for all opened editors using the [Lock the XML tags option in the Text preferences page](#).

Formatting and Indenting XML Documents

Oxygen XML Developer creates XML documents using several [edit modes](#). In **Text mode**, you as the author decide how the XML file is formatted and indented. In the other modes, and when you switch between modes, Oxygen XML Developer must decide how to format and indent the XML. Oxygen XML Developer will also format and indent your XML for you in **Text** mode if you use one of the Format and Indent options:

- **Document > Source >  Format and Indent** - Formats and indents the whole document.
- **Document > Source >  Indent Selection** - Indents the current selection (but does not add line breaks). This action is also available in the **Source** submenu of the contextual menu.
- **Document > Source >  Format and Indent Element** - Formats and indents the current element (the inmost nested element that currently contains the cursor) and its child-elements. This action is also available in the **Source** submenu of the contextual menu.

A number of settings affect how Oxygen XML Developer formats and indents XML. Many of these settings have to do with how whitespace is handled.

Significant and insignificant whitespace in XML

XML documents are text files that describe complex documents. Some of the white space (spaces, tabs, line feeds, etc.) in the XML document belongs to the document it describes (such as the space between words in a paragraph) and some of it belongs to the XML document (such as a line break between two XML elements). Whitespace belonging to the XML file is called *insignificant whitespace*. The meaning of the XML would be the same if the insignificant whitespace were removed. Whitespace belonging to the document being described is called *significant whitespace*.

Knowing when whitespace is significant or insignificant is not always easy. For instance, a paragraph in an XML document might be laid out like this:

```
<p>NO Free man shall be taken or imprisoned, or be stripped of his Freedom,
or Liberties, or free Customs, or be outlawed, or exiled, or any otherwise
destroyed; nor will we not pass upon him, nor condemn him, but by lawful
judgment of his Peers, or by the <xref
href="http://en.wikipedia.org/wiki/Law_of_the_land" format="html"
scope="external">Law of the land</xref>.
We will sell to no man, we will not deny to any man either Justice or Right.</p>
```

By default, XML considers a single whitespace between words to be significant, and all other whitespace to be insignificant. The paragraph above could have been written on one line because the XML parser would see it as exactly the same paragraph since all multiple consecutive whitespaces will be replaced with a single whitespace. Removing the insignificant space in markup like this is called *normalizing space*.

In some cases, all the spaces inside an element should be treated as significant. For example, in a code sample:

```
<codeblock>
class HelloWorld
{
    public static void main(String args[])
    {
        System.out.println("Hello World");
    }
}
</codeblock>
```

Here every whitespace character between the codeblock tags should be treated as significant.

How Oxygen XML Developer determines when whitespace is significant

When Oxygen XML Developer formats and indents an XML document, it introduces or removes insignificant whitespace to produce a layout with reasonable line lengths and elements indented to show their place in the hierarchy of the document. To correctly format and indent the XML source, Oxygen XML Developer needs to know when to treat whitespace as significant and when to treat it as insignificant. However it is not always possible to tell this from the XML source file alone. To determine what whitespace is significant, Oxygen XML Developer assigns each element in the document to one of four categories:

Ignore space

In the ignore space category, all whitespace is considered insignificant. This generally applies to content that consists only of elements nested inside other elements, with no text content.

Normalize space

In the normalize space category, a single whitespace character between character strings is considered significant and all other spaces are considered insignificant. Therefore, all consecutive whitespaces will be replaced with a single space. This generally applies to elements that contain text content only.

Mixed content

In the mixed content category, a single whitespace between text characters is considered significant and all other spaces are considered insignificant. However,

- Whitespace between two child elements embedded in the text is normalized to a single space (rather than to zero spaces as would normally be the case for a text node with only whitespace characters, or the space between elements generally).
- The lack of whitespace between a child element embedded in the text and either adjacent text or another child element is considered significant. That is, no whitespace can be introduced here when formatting and indenting the file.

For example:

```
<p>The file is located in <i>HOME</i>/<i>USER</i>/hello.  
  This is a <strong>big</strong>  
  
<emphasis>deal</emphasis>.  
</p>
```

In this example, whitespace should not be introduced around the `i` tags as it would introduce extra significant whitespace into the document. The space between the end `</strong>` tag and the beginning `<emphasis>` tag should be normalized to a single space, not zero spaces.

Preserve space

In the preserve space category, all whitespace in the element is regarded as significant. No changes are made to the spaces in elements in this category. However, child elements may be in another category, and may be treated differently.

Attribute values are always in the preserve space category. The spaces between attributes in an element tag are always in the default space category.

Oxygen XML Developer consults several pieces of information to assign an element to one of these categories. An element is always assigned to the most restrictive category (from Ignore to Preserve) that it is assigned to by any of the sources Oxygen XML Developer consults. For instance, if the element is named on the **Default elements** list (as described below) but it has an `xml:space="preserve"` attribute in the source file, it will be assigned to the preserve space category. If an element has the `xml:space="default"` attribute in the source, but is listed on the **Mixed content** elements list, it will be assigned to the mixed content category.

To assign elements to these categories, Oxygen XML Developer consults information from the following sources:

xml:space

If the XML element contains the `xml:space` attribute, the element is promoted to the appropriate category based on the value of the attribute.

Schema aware formatting

If a schema is available for the XML document, Oxygen XML Developer can use information from the schema to promote the element to the appropriate category. For example:

- If the schema declares an element to be of type `xs:string`, the element will be promoted to the preserve space category because the string built-in type has the whitespace facet with the value preserve.
- If the schema declares an element to be mixed content, it will be promoted to the mixed content category.

Schema aware formatting can be turned on and off.

- To turn it on or off for the **Text** editing mode, open the **Preferences** dialog box (**Options > Preferences**), go to **Editor > Format > XML**, and select/deselect the **Schema aware format and indent** option.

Preserve space elements list

If an element is listed in the **Preserve space** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the preserve space category.

Default space elements list

If an element is listed in the **Default space** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the default space category.

Mixed content elements list

If an element is listed in the **Mixed content** tab of the **Element Spacing** list in the **XML formatting preferences**, it is promoted to the mixed content category.

Element content

If an element contains mixed content, that is, a mix of text and other elements, it is promoted to the mixed content category. (Note that, in accordance with these rules, this happens even if the schema declares the element to have element only content.)

If an element contains text content, it is promoted to the default space category.

Text node content

If a text node contains any non-whitespace characters then the text node is promoted to the normalize space category.

How Oxygen XML Developer formats and indents XML

You can control how Oxygen XML Developer formats and indents XML documents. This can be particularly important if you store your XML document in a version control system, as it allows you to limit the number of trivial changes in spacing between versions of an XML document. The following preference pages include options that control how XML documents are formatted:

- [Format preferences page](#)
- [XML Formatting preferences page](#)
- [Whitespaces preferences page](#)

When Oxygen XML Developer formats and indents XML

Oxygen XML Developer formats and indents a document, or part of it, on the following occasions:

- In **Text** mode when you select one of the format and indent actions (**Document > Source > Format and Indent**, **Document > Source > Indent Selection**, or **Document > Source > Format and Indent Element**).
- When saving documents in **Design** mode.
- When switching from **Design** mode to another mode.
- When saving or switching to **Text** mode from **Grid** mode, if the **Format and indent when passing from grid to text or on save** option is selected in the **Grid** preferences page.

Setting an Indent Size to Zero

Oxygen XML Developer will automatically [format and indent](#) documents at certain times. This includes indenting the content from the margin to reflect its structure. In some cases, you may not want your content indented. To avoid your content being indented, you can set an indent size of zero.

Note: Changing the indent size does not override the rules that Oxygen XML Developer uses for handling whitespace when formatting and indenting XML documents. Therefore, changing the indent size will have no effect on elements that require whitespaces to be maintained.

There are two cases to consider.

Maintaining zero indent in documents with zero indent

If you have existing documents with zero indent and you want Oxygen XML Developer to maintain a zero indent when editing or formatting those documents:

1. Open the [Preferences](#) dialog box ([Options > Preferences](#)) and go to [Editor > Format](#).
2. Select **Detect indent on open**.
3. Select **Use zero-indent if detected**.

Oxygen XML Developer will examine the indent of each document as it is opened and if the indent is zero for all lines, or for nearly all lines, a zero indent will be used when formatting and indenting the document. Otherwise, Oxygen XML Developer will use the indent closest to what it detects in the document.

Enforcing zero indent for all documents

If you want all documents to be formatted with zero indent, regardless of their current indenting:

1. Open the [Preferences](#) dialog box ([Options > Preferences](#)) and go to [Editor > Format](#).
2. Deselect **Detect indent on open**.
3. Set **Indent size** to 0.

All documents will be formatted and indented with an indent of zero.



Warning: Setting the indent size to zero can change the meaning of some file types, such as Python source files.

Format and Indent (Pretty-Print) Multiple Files

Oxygen XML Developer provides support for formatting and indenting ([pretty-print](#)) multiple files at once. This action is available for any document in XML format, as well as for XQuery, CSS, JavaScript, and JSON documents.

To format and indent multiple files, use the  **Format and Indent Files** action that is available in the contextual menu of the [Project view](#) or from the **Tools** menu. This opens the **Format and Indent Files** dialog box that allows you to configure options for the action.

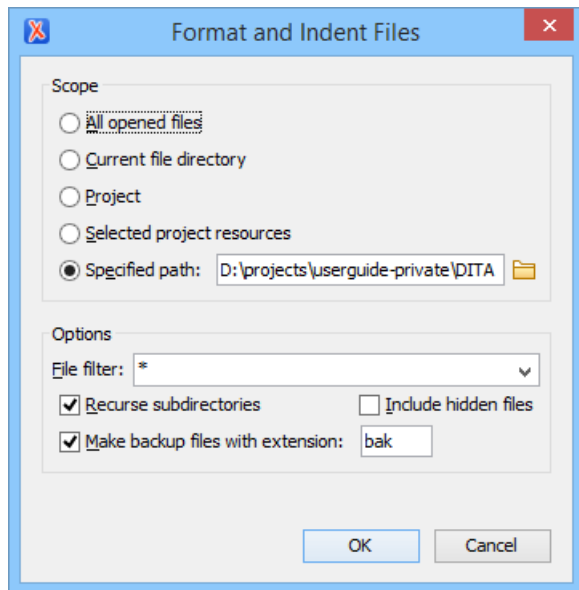


Figure 192: Format and Indent Files Dialog Box

The **Scope** section allows you choose from the following scopes:

- **All opened files** - The *pretty-print* is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - the *pretty-print* is performed in the files located at a specified path.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When selected, the *pretty-print* is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When selected, the *pretty-print* is also performed in the hidden files.
- **Make backup files with extension** - When selected, Oxygen XML Developer makes backup files of the modified files. The default extension is .bak, but you can change the extension as you prefer.

Managing Highlighted Content

While working with XML documents you often have frequent changes to the structure and content. You are often faced with a situation where you need to make a slight change in multiple places in the same document. Oxygen XML Developer includes a feature, **Manage Highlighted Content**, that is designed to help you achieve this.

When you are in **Text** mode and you perform a search operation or apply an XPath that highlights multiple results, you can select the **Manage Highlighted Content** action from the contextual menu of any highlight in the document, and the following options are available in its submenu:

- **Modify All** - Use this option to modify (in-place) all the occurrences of the selected content. When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Note: If you select a very large number of highlights that you want to modify using this feature, a dialog box informs you that you may experience performance issues. You have the option to either use the [Find/Replace operation](#), or continue the operation.
- **Surround All** - Use this option to surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.
- **Remove All** - Removes all the highlighted content.

If you right-click content in another part of the document, other than a highlight, you have the option to select the following option:

- **Modify All Matches** - Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment in which the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Quick Assist Support for IDs and IDREFS

The [Quick Assist support](#) is activated automatically when you place the cursor inside an ID or IDREF in **Text** mode. To access it, click the yellow bulb help marker placed on the current line, in the line number stripe of the editor. You can also invoke the *Quick Assist* menu from the contextual menu or by pressing **Alt+1** (**Command+Alt+1** on **Mac OS X**) on your keyboard.

The following actions are available:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Change scope

Opens the [Select the scope for the Search and Refactor operations](#) dialog box.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.

Search Occurrences

Searches for the declaration and references of the ID located at the cursor position in the current document.

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Highlight ID Occurrences in Text Mode

To see the occurrences of an ID in an XML document in the **Text** mode, place the cursor inside the ID declaration or reference. The occurrences are marked in the vertical side bar at the right of the editor. Click a marker on the side bar to jump to the occurrence that it corresponds to. The occurrences are also highlighted in the editing area.

Note: Highlighted ID declarations are rendered with a different color than highlighted ID references. To customize these colors or disable this feature, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Mark Occurrences**.

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Contextual Menu Actions in Text Mode

When editing XML documents in **Text** mode, Oxygen XML Developer provides the following actions in the contextual menu (many of them also appear in the submenus of the **Document** menu):



Executes the typical editing actions on the currently selected content.

Copy XPath

Copies the XPath expression of the current element or attribute from the current editor to the clipboard.

Toggle Comment (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Comments the current selection of the current editor. If the selection already contains a comment the action removes the comment from around the selection. If there is no selection in the current editor and the cursor is not positioned inside a comment the current line is commented. If the cursor is positioned inside a comment then the commented text is uncommented.

Go to submenu

This submenu includes the following actions:

Go to Matching Tag (Ctrl + Shift + G)

Moves the cursor to the end tag that matches the start tag, or vice versa.

Go after Next Tag (Ctrl + CloseBracket (Command + CloseBracket on OS X))

Moves the cursor to the end of the next tag.

Go after Previous Tag (Ctrl + OpenBracket (Command + OpenBracket on OS X))

Moves the cursor to the end of the previous tag.

Select submenu

This submenu allows you to select the following:

Element

Selects the entire element at the current cursor position.

Content

Selects the entire content of the element at the current cursor position, excluding the start and end tag. Performing this action repeatedly will result in the selection of the content of the ancestor of the currently selected element content.

Attributes

Selects all the attributes of the element at the current cursor position.

Parent

Selects the parent element at the current cursor position.

Source submenu

This submenu includes the following actions:

Shift Right (Tab)

Shifts the currently selected block to the right.

Shift Left (Shift + Tab)

Shifts the currently selected block to the left.

Indent selection (Ctrl + I (Command + I on OS X))

Corrects the indentation of the selected block of lines if it does not follow the current [indenting preferences](#).

Escape Selection

Escapes a range of characters by replacing them with the corresponding character entities.

Unescape Selection

Replaces the character entities with the corresponding characters.

Format and Indent Element (Ctrl + Shift + I (Command + Shift + I on OS X))

[Pretty-prints](#) the element that surrounds the current cursor position.

To Upper Case

Converts the selected content to upper case characters. This works with contiguous and multiple selections.

To Lower Case

Converts the content selection to lower case characters. This works with contiguous and multiple selections.

Capitalize Lines

It capitalizes the first letter found on every new line that is selected. Only the first letter is affected, the rest of the line remains the same. If the first character on the new line is not a letter then no changes are made.

Convert Hexadecimal Sequence to Character (**Ctrl + Shift + X** (**Command + Shift + X** on OS X))

Converts a sequence of hexadecimal characters to the corresponding Unicode character. The action can be invoked if there is a selection containing a valid hexadecimal sequence or if the cursor is placed at the right side of a valid hexadecimal sequence. A valid hexadecimal sequence can be composed of 2 to 4 hexadecimal characters and may or may not be preceded by the 0x or 0X prefix. Examples of valid sequences and the characters they will be converted to:

- 0x0045 will be converted to E
- 0X0125 to ĥ
- 265 to #
- 2190 to #

Base64 Encode/Decode submenu

This submenu include the following actions for encoding or decoding **base64** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Base32 Encode/Decode submenu

This submenu include the following actions for encoding or decoding **base32** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Hex Encode/Decode submenu

This submenu include the following actions for encoding or decoding **hex** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Join and Normalize Lines (Ctrl + J (Command + J on OS X))

For the current selection, this action joins the lines by replacing the *line separator* with a single space character. It also normalizes the whitespaces by replacing a sequence of such characters with a single space.

Insert new line after (Ctrl + Alt + Enter (Command + Alt + Enter on OS X))

This action has the same result as moving the cursor to the end of the current line and pressing the *ENTER* key.

Insert XInclude

Displays a dialog box that allows you to browse and select the content to be included and automatically generates the corresponding XInclude instruction.

Note: In the **Author** mode, this dialog box presents a preview of the inserted document as an author page in the **Preview** tab and as a text page in the **Source** tab. In the **Text** mode, the **Source** tab is presented.

Import entities list

Displays a dialog box that allows you to select a list of files as sources for external DTD entities. The internal subset of the DOCTYPE declaration of your document will be updated with the chosen entities. For instance, choosing the files `chapter1.xml` and `chapter2.xml` inserts the following section in the DOCTYPE:

```
<!ENTITY chapter1 SYSTEM "chapter1.xml">
<!ENTITY chapter2 SYSTEM "chapter2.xml">
```

Lock / Unlock the XML Tags

Disables or enables the ability to edit XML tags.

Canonicalize

Opens the **Canonicalize** dialog box that allows you to select a *canonicalization* algorithm to standardize the format of the document.

Sign

Opens the **Sign** dialog box that allows you to configure a digital signature for the document.

Verify Signature

Allows you to specify the location of a file to verify its digital signature.

Manage Highlighted Content submenu

This submenu is available from the contextual menu when it is invoked from a highlight after you perform a search operation or apply an XPath expression that highlights more than one result. The following options are available in this submenu:

Modify All

Allows you to modify (in-place) all the occurrences of the selected content. A thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Surround All

Surround the highlighted content with a specific tag. This option opens the **Tag** dialog box. The **Specify the tag** drop-down menu presents all the available elements that you can choose from.

Remove All

Removes all the highlighted content.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you to select whether you want to modify only matches with the same letter case or all matches.



Go to Definition (Ctrl + Shift + Enter)

Moves the cursor to the definition of the current element or attribute in the schema (DTD, XML Schema, Relax NG schema) associated with the edited XML document. If the current attribute is a “type” belonging to the [“http://www.w3.org/2001/XMLSchema-instance”](http://www.w3.org/2001/XMLSchema-instance) namespace, the cursor is moved in the XML schema to the definition of the type referenced in the value of the attribute.

Refactoring submenu

This submenu includes the following actions:



Rename Element

The element from the cursor position, and any elements with the same name, can be renamed according with the options from the **Rename** dialog box.



Rename Prefix (Alt + Shift + P (Command + Shift + P on OS X))

The prefix of the element from the cursor position, and any elements with the same prefix, can be renamed according with the options from the **Rename** dialog box.

- If you select the **Rename current element prefix** option, the application will recursively traverse the current element and all its children. *For example*, to change the `xmlns:p1="ns1"` association in the current element to `xmlns:p5="ns1"`, if the `xmlns:p1="ns1"` association is applied on the parent element, then Oxygen XML Developer will introduce `xmlns:p5="ns1"` as a new declaration in the current element and will change the prefix from p1 to p5. If p5 is already associated with another namespace in the current element, then the conflict will be displayed in a dialog box. By pressing **OK**, the prefix is modified from p1 to p5 without inserting a new declaration.
- If you select the **Rename current prefix in all document** option, the application will apply the change on the entire document.
- To also apply the action inside attribute values, select the **Rename also attribute values that start with the same prefix** checkbox.



Surround with submenu

Presents a drop-down menu that allows you to choose a tag to surround a selected portion of content.



Surround with Tags (Ctrl + E (Command + E on OS X))

Allows you to choose a tag that encloses a selected portion of content. If there is no selection, the start and end tags are inserted at the cursor position.

- If the **Position cursor between tags option** is selected in the **Content Completion** preferences page, the cursor is placed between the start and end tag.
- If the **Position cursor between tags option** is not selected in the **Content Completion** preferences page, the cursor is placed at the end of the start tag, in an insert-attribute position.



Surround with '[tag]' (Ctrl + ForwardSlash (Command + ForwardSlash on OS X))

Surround the selected content with the last tag used.



Delete element tags (Alt + Shift + X (Command + Alt + X on OS X))

Deletes the start and end tag of the current element.



Split element (Alt + Shift + D (Ctrl + Alt + D on OS X))

Split the element from the cursor position into two identical elements. The cursor must be inside the element.

Join elements (Alt + Shift + J (Command + Alt + J on OS X))

Joins the left and right elements relative to the current cursor position. The elements must have the same name, attributes, and attributes values.

Attributes Refactoring Actions

Contains predefined XML refactoring operations that pertain to attributes with some of the information preconfigured based upon the current context.

Add/Change attribute

Allows you to change the value of an attribute or insert a new one.

Convert attribute to element

Allows you to change an attribute into an element.

Delete attribute

Allows you to remove one or more attributes.

Rename attribute

Allows you to rename an attribute.

Replace in attribute value

Allows you to search for a text fragment inside an attribute value and change the fragment to a new value.

Comments Refactoring Actions

Contains predefined XML refactoring operations that pertain to comments with some of the information preconfigured based upon the current context.

Delete comments

Allows you to delete comments found inside one or more elements.

DITA Refactoring Actions

A variety of predefined XML refactoring operations that pertain to DITA documents with some of the information preconfigured based upon the current context.

Change Topic ID to File Name

Use this operation to change the ID of a topic to be the same as its file name.

Convert CALS Tables to Simple Tables

Use this operation to convert DITA CALS tables to simple tables.

Convert conrefs to conkeyrefs

Use this operation to convert conref attributes to conkeyref attributes.

Convert Simple Tables to CALS Tables

Use this operation to convert DITA simple tables to CALS tables.

Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task). A DITA *General Task* is a less restrictive alternative to the *Strict Task* information type.

Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

Elements Refactoring Actions

Contains predefined XML refactoring operations that pertain to elements with some of the information preconfigured based upon the current context.

Delete element

Allows you to delete elements.

Delete element content

Allows you to delete the content of elements.

Insert element

Allows you to insert new elements.

Rename element

Allows you to rename elements.

Unwrap element

Allows you to remove the surrounding tags of elements, while keeping the content unchanged.

Wrap element

Allows you to surround elements with element tags.

Wrap element content

Allows you to surround the content of elements with element tags.

Fragments Refactoring Actions

Contains predefined XML refactoring operations that pertain to XML fragments with some of the information preconfigured based upon the current context.

Insert XML fragment

Allows you to insert an XML fragment.

Replace element content with XML fragment

Allows you to replace the content of elements with an XML fragment.

Replace element with XML fragment

Allows you to replace elements with an XML fragment.

JATSKit Refactoring Actions

Contains predefined XML refactoring operations that pertain to JATS documents with some of the information preconfigured based upon the current context.

Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Adds an NLM 'BITS' 2.0 DOCTYPE declaration.

Add Blue DOCTYPE - NISO JATS Publishing 1.1

Adds a JATS 'Blue' 1.1 DOCTYPE declaration.

Normalize IDs

Assigned IDs are normalized and IDs are assigned to some elements that are missing them.

Manage IDs submenu

This submenu is available for XML documents that have an associated DTD, XML Schema, or Relax NG schema. It includes the following actions:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.

Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search References in

Searches for the references of the ID. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search Declarations in

Searches for the declaration of the ID reference. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Search Occurrences in file

Searches for the declaration and references of the ID in the current document.

Quick Assist (Alt + 1 (Command + Alt + 1 on OS X))

Available when the cursor is inside an ID or IDREF, this action opens the [Quick Assist](#) window that allows you to select some search and refactoring actions for the selected ID or IDREF.

Open submenu

The following actions are available in this submenu:

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Resource Hierarchy

Opens the [Resource Hierarchy/Dependencies view](#) that allows you to see the resource hierarchy for an XML document.

Resource Dependencies

Opens the [Resource Hierarchy/Dependencies view](#) that allows you to see the resource dependencies for an XML document.

Editing XML Documents in Grid Mode

The **Grid** mode in Oxygen XML Developer displays the XML document as a structured grid of nested tables where the text content can be modified without directly interacting with the XML markup. This is helpful for non-technical users who want to edit text content without modifying the XML markup. You can easily expand or collapse elements within the table and the document structure can be changed with simple contextual menu actions, drag/drop, or copy/paste operations. The text content can be modified simply by editing the value of cells that contain the text and a useful [Content Completion Assistant](#) is also available to help you edit or insert XML elements.

To switch to this mode, select **Grid** at the bottom of the editing area.



For more information about some of the features available in the **Grid** editor, watch our video demonstration:

<https://www.youtube.com/embed/PoYm2VqisWk>

Editing Actions in Grid Mode

Since **Grid** mode presents XML content in a structured grid of nested tables, editing content in this mode can be done with a combination of the [Content Completion Assistant](#) and actions that allow you to work with the structure or content of the nested tables much like you would with any table. Oxygen XML Developer provides ways to edit content in the cells of the nested tables or to edit the structure of the tables.

Tip: There are two different types of layouts available in **Grid** mode. Most people prefer to leave it on the default **Grid mode** layout, but there is also a **Tree mode** layout that presents the structure of the document in more of a vertical tree-like manner. You can switch between the two layouts to see which one works best for you particular situation from the **Document > Grid Layout** menu.

Expanding/Collapsing Nodes

An arrow sign () displayed at the left of a node indicates that it has child nodes. To display the children, click this arrow sign. To collapse a node, click the reverse arrow sign (). The expand/collapse actions can also be invoked with the **NumPad+** and **NumPad-** keys, or from the **Expand/Collapse** submenu of the contextual menu.

To expand all child nodes, right-click the cell that contains the parent node and select  **Expand All** from the **Expand/Collapse** submenu. To collapse all node, right-click any cell and select  **Collapse All** from the **Expand/Collapse** submenu.

Editing Elements or Attributes

To edit elements or attributes in **Grid** mode, simply double-click the cell that contains the element or attribute (or select the cell and press **(Enter)**) to invoke the [Content Completion Assistant](#). This opens a pop-up window that offers a list of proposals that are valid for that particular node.

Editing Text Content in Cells

To edit the text value of a cell, simply select the grid cell and press **Enter** (or double-click the cell), and start editing.

To stop editing a cell value, press **Enter** again.

To cancel the editing without saving the current changes in the document, press the **Esc** key.

Editing the Structure of the Nested Tables

To edit the structure of the nested tables in **Grid** mode, Oxygen XML Developer provides the following actions in the contextual menu (many of them also appear in the submenus of the **Document** menu, or the toolbar):

 **Cut**,  **Copy**,  **Paste**,  **Delete** common editing actions

Executes the typical editing actions on the currently selected elements. The **Cut** and **Copy** operations preserve the styles of the copied content.

Paste as Child

Pastes the copied content as the last child of the current selection.

Duplicate

Creates a new node by duplicating the currently selected one.

Insert Before

Offers a list of valid nodes, depending on the context, and inserts your selection before the currently selected node, as a sibling.

Insert After

Offers a list of valid nodes, depending on the context, and inserts your selection after the currently selected node, as a sibling.

Append Child

Offers a list of valid nodes, depending on the context, and appends your selection as a child of the currently selected node.

Sort Ascending, Sort Descending

The sorting result depends on the data type of the column content. It could be a numerical sorting for numbers or an alphabetical sorting for text information. The editor automatically analyzes the content and decides what type of sorting to apply. When a mixed set of values is present in the sorted column, a dialog box is displayed that allows you to choose the desired type of sorting between *numerical* and *alphabetical*.

Insert Row

Inserts a new row below the current selection. To insert a new row, you could also select the row header (the zone to the left of the row that holds the row number) and press **Enter**.

Insert Column

Inserts a column after the current selection.

Clear Content

Removes all content from the current cell.

Expand/Collapse > Expand All

Expands the selection and all its children.

Expand/Collapse > Collapse All

Collapses the selection and all its children.

Expand/Collapse > Expand Children

Expands all the children of the selection but not the selection.

Expand/Collapse > Collapse Children

Collapses all the children of the selection but not the selection.

Expand/Collapse > Collapse Others

Collapses all the siblings of the current selection but not the selection.

Refresh Selected

Forces the layout to be recomputed.

Related Information:

[Grid Mode Navigation](#) on page 225

[Copy and Paste in the Grid Editing Mode](#) on page 399

[Drag and Drop in the Grid Editing Mode](#) on page 398

[Content Completion Assistant in Grid Mode](#) on page 401

Drag and Drop in the Grid Editing Mode

You can easily arrange sections in your XML document in the **Grid** mode by using drag and drop actions.

You can do the following with drag and drop:

- Copy or move a set of nodes.

- Change the order of columns in the tables.
- Move the rows from the tables.

These operations are available for both single and multiple selections. To deselect one of the selected fragments, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.

While dragging, the editor paints guide-lines showing the locations where you can drop the nodes. You can also drag nodes outside the **Grid** editor and text from other applications into the **Grid**.

Tip: When using drag and drop to reorganize the document, the resulting layout can be different from what you expected. For instance, the layout can contain a set of sibling tables that can be joined together. To force the layout to be recomputed, you can use the  **Refresh Selected** action that is available in the contextual menu and in the **Document > Grid Edit** menu.

Copy and Paste in the Grid Editing Mode

Selecting content in the **Grid** mode is similar to working with any table with a little more complexity. Specifically, depending on the type of node, when you select a cell, the selection may automatically include additional cells that are implied by the currently selected node. For example, if you click a node that contains any child nodes, all cells that contain the parent and child nodes will be selected. In this case, the currently selected cell is painted with a color that is different from the rest of the selection.

You can also select discontinuous regions of nodes and place them in the clipboard with the copy action. To deselect one of the selected fragments, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.

Pasting Content Within Grid Mode

You can paste copied nodes relative to the currently selected cell using one of the following actions (available in the contextual menu):

-  **Paste (Ctrl + V (Command + V on OS X))** - Pastes copied content, as a sibling, just below (after) the current selection.
- **Paste as Child** - Pastes copied content as the last child of the current selection.

Pasting Content from Grid Mode to Other Editors

Nodes that are copied from the **Grid** editor can also be pasted into **Text** mode or other external applications. When pasting copied content from **Grid** mode, the inserted string represents the nodes serialization. The nodes from tables can be copied using HTML or RTF in table format. The resulting cells contain only the concatenated values of the text nodes.

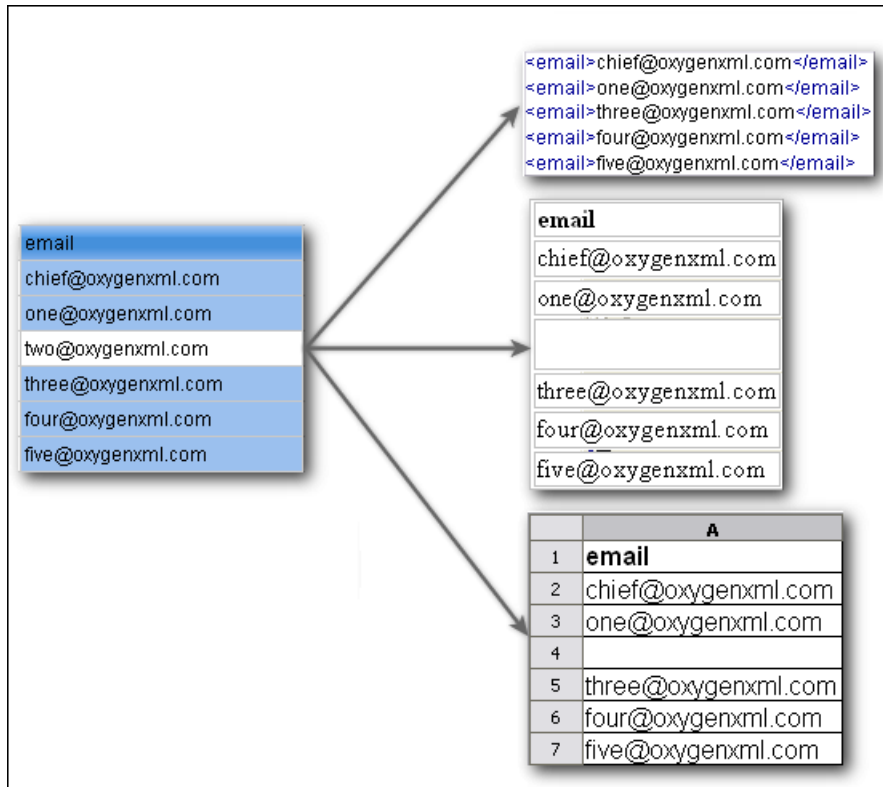


Figure 193: Copying from Grid to Other Editors

Pasting Content from Other Editors into Grid Mode

You can also paste well-formed XML content or tab-separated values from other editors into the **Grid** editor. If you paste XML content, the result will be the insertion of the nodes obtained by parsing this content.

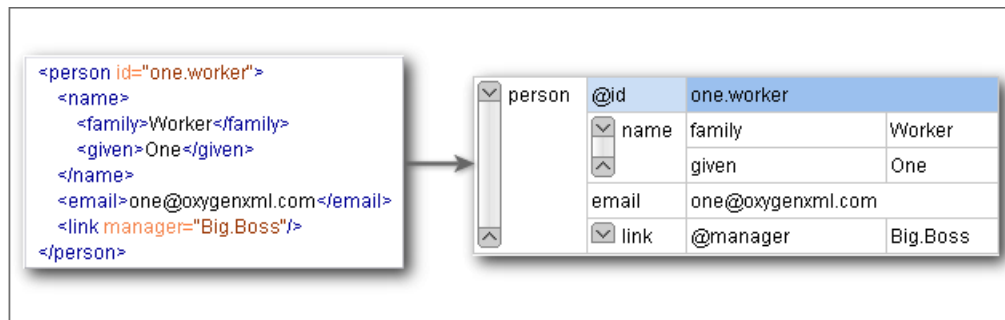


Figure 194: Pasting XML Data into Grid

If the pasted text contains multiple lines of tab-separated values, it can be considered as a matrix of values. By pasting this matrix of values into the **Grid** editor, the result will be a matrix of cells. If the operation is performed inside existing cells, the existing values will be overwritten and new cells will be created when needed.



Figure 195: Pasting Tab-Separated Values into Grid

If you need to add copied content to your existing content (rather than overwriting existing cells), you need to first insert new cells by using the  **Insert row** or  **Insert column** actions from the contextual menu. This is useful, for example, when trying to transfer data from spreadsheet-like editors to the **Grid** editor.

Content Completion Assistant in Grid Mode

If the edited document is associated with a schema (DTD, XML Schema, Relax NG, etc.), the **Grid** editing mode offers a *Content Completion Assistant* for the names and values of elements and attributes. If you choose to insert an element that has required content, the sub-tree of needed elements and attributes are also automatically included.

To display the content completion pop-up menu, simply double-click a cell that contains an element or attribute (or press **Enter** on your keyboard).

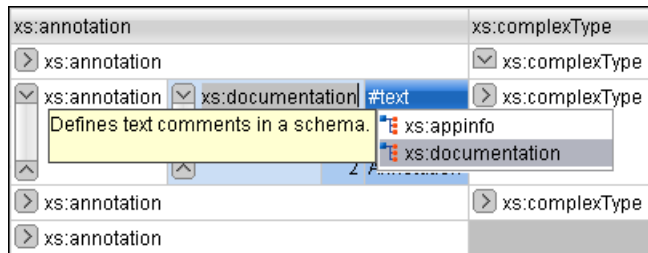


Figure 196: Content Completion in Grid Editing Mode

Exporting XML Content to Excel

For use-cases where you have XML content that needs to be exported to Excel (or any other spreadsheet application) but the content is not already in some sort of table format, **Grid** mode offers you a way to display the content of an XML document as a structured grid of nested tables and you can work with the cells in those tables much like you would with any spreadsheet application. This makes it possible to export content to Excel by copying cells that contain the specific content and then pasting the copied cells in Excel the same as you would when working with any table or spreadsheet.

To export XML content from **Grid** mode to Excel or other spreadsheet applications, follow this procedure:

1. Open the XML document in Oxygen XML Developer and switch to **Grid** mode.
2. [Expand the nodes](#) to gain access to the particular nested table that contains the content you want to export.
3. Copy the cells that contain the content you want to export ( **Copy** from the contextual menu or **Ctrl+C**).
4. Switch to your spreadsheet application and paste the copied cells.
5. You may need to make some manual adjustments depending on the complexity of the structure in the original XML document.

Note that Oxygen XML Developer also supports the reverse scenario (copying cells from a spreadsheet application and pasting them in **Grid** mode). For more information, see [Import from MS Excel Files – Grid Mode Method](#).

For more information about exchanging data between Oxygen XML Developer and spreadsheet applications, watch our video demonstration:

<https://www.youtube.com/embed/8VwsF58zLkU>

Related Information:

[Import from MS Excel Files - Grid Mode Method](#) on page 1014

[Pasting Content from Other Editors into Grid Mode](#) on page 400

Validating XML Documents

The W3C XML specification states that a program should not continue to process an XML document if it finds a validation error. The reason is that XML software should be easy to write and all XML documents should be compatible. With HTML, for example, it is possible to create documents with lots of errors (for instance, when you forget an end tag). One of the main reasons that various HTML browsers have performance and compatibility

problems is that they have different methods of figuring out how to render a document when an HTML error is encountered. Using XML helps to eliminate such problems.

Even when creating XML documents, errors are easily introduced. When working with large projects or a large number of files, the probability that errors will occur is even greater. Preventing and solving errors in your projects can be time consuming and frustrating. Fortunately, Oxygen XML Developer provides validation functions that allow you to easily identify errors and their location.

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Checking XML Well-Formedness

A *Well-formed XML* document is a document that conforms to the XML syntax rules. A *Namespace Well-Formed XML* document is a document that is *Well-formed XML* and is also *Namespace-wellformed* and *Namespace-valid*.

Well-Formedness Rules

The XML Syntax rules for *Well-formed XML* are as follows:

- All XML elements must have a closing tag.
- XML tags are case-sensitive.
- All XML elements must be properly nested.
- All XML documents must have a root element.
- Attribute values must always be quoted.
- With XML, whitespace is preserved.

The *Namespace-wellformed* rules are as follows:

- All element and attribute names contain either zero or one colon.
- No entity names, processing instruction targets, or notation names contain any colons.

The *Namespace-valid* rules are as follows:

- The *xml* prefix is by definition bound to the namespace name: <http://www.w3.org/XML/1998/namespace>. It MAY be declared, but MUST NOT be undeclared or bound to any other namespace name. Other prefixes MUST NOT be bound to this namespace name.
- The *xmlns* prefix is used only to declare namespace bindings and is by definition bound to the namespace name: <http://www.w3.org/2000/xmlns/>. It MUST NOT be declared or undeclared. Other prefixes MUST NOT be bound to this namespace name.
- All other prefixes beginning with the three-letter sequence *x*, *m*, *l*, in any case combination, are reserved. This means that users SHOULD NOT use them except as defined by later specifications and processors MUST NOT treat them as fatal errors.
- The namespace prefix (unless it is *xml* or *xmlns*) MUST have been declared in a namespace declaration attribute in either the start tag of the element where the prefix is used or in an ancestor element (for example, an element in whose content the prefixed markup occurs). Furthermore, the attribute value in the innermost such declaration MUST NOT be an empty string.

Check for Well-Formedness

To check if a document is *Namespace Well-Formed XML* and *Namespace-valid*, select the  **Check Well-Formedness (Ctrl + Shift + W (Command + Shift + W on OS X))** action from the **Document > Validate** menu or from the  **Validation** drop-down menu on the toolbar.

The selected files in the current project can also be checked for well-formedness with a single action by selecting the  **Check Well-Formedness** action from the **Validate** submenu when invoking the contextual menu in the [Project view](#).

If any errors are found, the result is displayed in the message panel at the bottom of the editor. Each error is displayed as one record in the result list and is accompanied by an error message. Clicking the record will open the document containing the error and highlight its approximate location.

Example: A non *Well-formed* XML Document

```
<root><tag></root>
```

When **Check Well-Formedness** is performed the following error is raised:

```
The element type "tag" must be terminated by the matching end-tag "</tag>"
```

To resolve the error, click the record in the result list and it will locate and highlight the approximate position of the error. In this case, identify the tag that is missing an end tag and insert `</tag>`.

Example: A non *Namespace-wellformed* Document

```
<x::y></x::y>
```

When **Check document form** is performed the following error is raised:

```
Element does not match QName production: QName::=(NCName ':' )?NCName .
```

Example: A non *Namespace-valid* Document

```
<x:y></x:y>
```

When **Check document form** is performed the following error is raised:

```
The prefix "x" for element "x:y" is not bound.
```

Validating XML Documents Against a Schema

A *Valid* XML document is a *Well-Formed* XML document that also conforms to the rules of a schema that defines the legal elements of an XML document. The schema type can be: XML Schema, Relax NG (full or compact syntax), Schematron, Document Type Definition (DTD), or Namespace-based Validation Dispatching Language (NVDL).

The purpose of the schema is to define the legal building blocks of an XML document. It defines the document structure with a list of legal elements.

The  **Validate** function ensures that your document is compliant with the rules defined by an associated DTD, XML Schema, Relax NG, or Schematron schema. XML Schema or Relax NG schema also allows you to embed Schematron rules. For Schematron validations you can also select the **validation phase**.

Related Information:

[Presenting Schematron Validation Issues](#)

[Associating a Schema to XML Documents](#) on page 420

Automatic Validation

Oxygen XML Developer can be configured to automatically mark validation errors in the document as you are editing. The [Enable automatic validation option](#) in the [Document Checking preferences page](#) controls whether or not all validation errors and warnings will automatically be highlighted in the editor panel.

The automatic validation starts parsing the document and marking the errors after a [configurable delay](#) from the last key typed. Errors are highlighted with underline markers in the main editor panel and small rectangles on the right side ruler of the editor panel. Hovering over a validation error presents a tooltip message with more details about the error.

If the error message is long and it is not displayed completely in the error line at the bottom of the editing area, double-clicking the error icon at the left of the error line or on the error line displays an information dialog box with the full error message. You can use the arrow buttons in this dialog box to navigate through the errors issued by the Automatic Validation feature.

Related Information:

[Manual Validation Actions](#) on page 404

[Presenting Validation Errors in Text Mode](#) on page 207

Manual Validation Actions

You can choose to validate documents at any time by using the manual validation actions that are available in Oxygen XML Developer.

Manual Validation Actions

To manually validate the currently edited document, use one of the following actions:

Validate (Ctrl + Shift + V (Command + Shift + V on OS X))

Available from the  **Validation** drop-down menu on the toolbar, the **Document > Validate** menu, or from the **Validate** submenu when invoking the contextual menu in the **Project view**.

An error list is presented in the message panel at the bottom of the editor. Markup of the current document is checked to conform with the specified DTD, XML Schema, or Relax NG schema rules. This action also re-parses the [XML Catalogs](#) and resets the schema used for content completion.

Validate (cached)

Available from the  **Validation** drop-down menu on the toolbar or the **Document > Validate** menu.

This action caches the schema, allowing it to be reused for the next validation. Markup of the current document is checked to conform with the specified DTD, XML Schema, or Relax NG schema rules.

Note: Automatic validation also caches the associated schema.

Validate with

Available from the  **Validation** drop-down menu on the toolbar, (or **Document > Validate** menu).

This action opens a dialog box that allows you to [specify a schema for validating the current document](#).

You can use this action to validate the current document using a schema of your choice (XML Schema, DTD, Relax NG, NVDL, Schematron schema), other than the associated one. An error list is presented in the message panel at the bottom of the editor. Markup of current document is checked to conform with the specified schema rules.

Note: The **Validate with** action does not work for files loaded through an [Oxygen XML Developer custom protocol plugin](#) developed independently and added to Oxygen XML Developer after installation.

Validate with Schema

Available from the **Validate** submenu when invoking contextual menu in the **Project view**.

This action opens a dialog box that allows you to [specify a schema for validating all selected files](#).

Other Validation Options

To quickly open the schema used for validating the current document, select the  **Open Associated Schema** action from the toolbar (or **Document > Schema** menu).

The  **Validation options** button, available in the **Document > Validate** menu, allows you to quickly access to the [validation options](#) for the built-in validator in the Oxygen XML Developer preferences page.

Tip: If a large number of validation errors are detected and the validation process takes too long, you can [limit the maximum number of reported errors in the Document Checking preferences page](#).

Related Information:

[Automatic Validation](#) on page 403

[Presenting Validation Errors in Text Mode](#) on page 207

Presenting Validation Errors in Text Mode

Oxygen XML Developer can be configured to [automatically validate documents](#) while editing in the **Text** mode, and actions are also available to [manually validate documents](#) on-request.

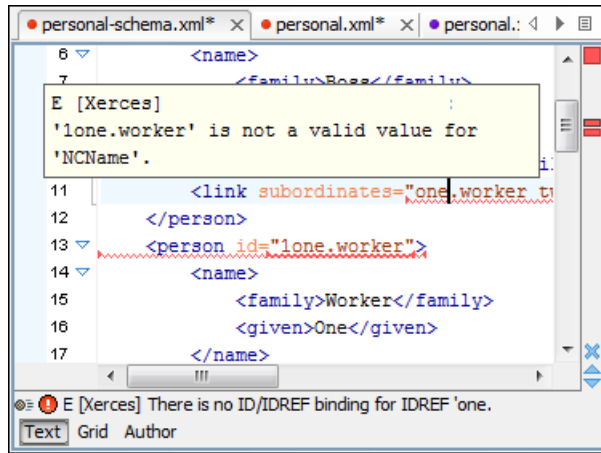


Figure 197: Presenting Validation Errors in Text Mode

Validation Marker Locations

In **Text** mode, validation issues are marked in the following locations:

- In the main editing pane, with the issue underlined in a color according to the type of issue.
- In the right-side vertical stripe, with a marker that is colored according to the type of issue.
- For attributes with detected issues, in the **Attributes** view, with the attribute and its value colored according to the type of issue.

Validation Marker Colors

The colors for each type of issue are as follows:

- **Validation Errors** [Red] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in red.
- **Validation Warnings** [Yellow] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in yellow.
- **Validation Info** [Blue] - By default, the underline in the editing pane, the marker in the right vertical stripe, and the foreground color of the attribute in the **Attributes** view are colored in blue.

You can configure the color for each type in the [Document Checking preferences page](#).

Validation Markers in the Right-Side Stripe

Also, the stripe on the right side of the editor panel is designed to display the issues found during the validation process and to help you locate them in the document. The stripe contains the following:

Upper Part of the Stripe

A success indicator square will turn green if the validation is successful or only info messages are found, red if validation errors are found, or yellow if only validation warnings are found. More details about the issues are displayed in a tool tip when you hover over indicator square. If there are numerous problems, only the first three are presented in the tool tip.

Middle Part of the Stripe

Errors are depicted with red markers, warnings with yellow markers, and info message with blue markers. If you want to limit the number of markers that are displayed, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document checking**, and specify the desired limit in the **Maximum number of validation highlights** option.

Clicking a marker will highlight the corresponding text area in the editor. The validation message is also displayed both in a tool tip (when hovering over the marker) and in the message area on the bottom of the editor panel (clicking the **Document checking options** button opens the [Document Checking preferences page](#).

Bottom Part of the Stripe

Two navigation arrows () allow you to jump to the next or previous issue. The same actions can be triggered from **Document > Automatic validation > Next error** (**Ctrl + Period** (**Command + Period on OS X**)) and **Document > Automatic validation > Previous error** (**Ctrl + Comma** (**Command + Comma on OS X**)). Also, the  **Remove All** button can be used to clear all the validation markers.

Hovering Over Validation Issues

Hovering over a validation issue presents a tooltip message with more details about the problem and [possible quick fixes](#) (if available for that issue). Also, when hovering over an issue, pressing **F2** will change the focus to the tooltip where you can use **Tab** and **Shift + Tab** to navigate between quick fixes and **Space** to trigger them.

Details About Validation Issues

- Information about the issue is also displayed in the message area on the bottom of the editor panel (clicking the  **Document checking options** button opens the [Document Checking preferences page](#) where you can configure some validation options (such as the colors used to present the validation issues).
- Status messages from every validation action are also logged in the [Information view](#).
- If you want to see all the validation messages grouped in the [Results panel](#), you should use the  **Validate** action from the toolbar or **Document > Validate** menu..

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Presenting Schematron Validation Issues](#)

Customizing Assert Error Messages

To customize the error messages that the Xerces or Saxon validation engines display for the `assert` and `assertion` elements, set the message attribute on these elements.

- For Xerces, the message attribute has to belong to the `http://xerces.apache.org` namespace.
- For Saxon, the message attribute has to belong to the `http://saxon.sourceforge.net/` namespace.

The value of the message attribute is the error message displayed if the assertion fails.

Custom Validators

If you need to validate the edited document with a validation engine that is different from the built-in engine, you can configure external validators in the [Custom Validation Engines preferences page](#). After a custom validation engine is [properly configured](#), it can be applied on the current document by selecting it from the list of custom validation engines in the  **Validation** toolbar drop-down menu. The document is validated against the schema declared in the document.

Some validators are configured by default but there are third-party processors that do not support the [output message format](#) of Oxygen XML Developer for linked messages:

- **Saxon-EE** - Included in Oxygen XML Developer. It is associated to XML Editor and XSD Editor. It is able to validate XML Schema schemas and XML documents against XML Schema schemas. The validation is done according to the W3C XML Schema 1.0 or 1.1. This can be [configured in Preferences](#).
- **MSXML 4.0** - Included in Oxygen XML Developer (Windows edition only). It is associated to XML Editor, XSD Editor and XSL Editor. It is able to validate the edited document against XML Schema, internal DTD (included in the XML document), external DTD or a custom schema type.
- **MSXML.NET** - Included in Oxygen XML Developer (Windows edition only). It is associated to XML Editor, XSD Editor and XSL Editor. It is able to validate the edited document against XML Schema, internal DTD (included in the XML document), external DTD or a custom schema type.
- **LIBXML** - Not included in Oxygen XML Developer and, depending on your operating system, the libraries need to be downloaded and installed separately from <http://xmlsoft.org/downloads.html>. Afterwards, the PATH environment variable needs to be updated to contain the parent folder of the `xmlint` executable. Alternatively, you can go to **Options > Preferences > Editor > Custom Validation Engines**, edit the **LIBXML** validation engine and set a custom path to the `xmlint` executable.

The LIBXML validator is associated with the XML Editor. It is able to validate the edited document against XML Schema, Relax NG schema full syntax, internal DTD (included in the XML document) or a custom schema type. Support for [XML Catalogs](#) (the `--catalogs` parameter) and XInclude processing (`--xinclude`) are enabled by default in the preconfigured LIBXML validator. The `--postvalid` parameter is also set by default and it allows LIBXML to validate correctly the main document even if the XInclude fragments contain IDREFS to ID's located in other fragments.

For validation against an external DTD specified by URI in the XML document, add the `--dtdvalid ${ds}` parameter manually to the DTD validation command line. `${ds}` represents the detected DTD declaration in the XML document.



CAUTION: File paths containing spaces are not handled correctly in the LIBXML processor. For example, the built-in [XML Catalog](#) files of the predefined document types (DocBook, TEI, DITA, etc.) are not handled by LIBXML if Oxygen XML Developer is installed in the default location on Windows (C : \Program Files) because the built-in *XML catalog* files are stored in the `frameworks` subfolder of the installation folder and in this case, the file path contains at least one space character.



Attention: On OS X, if the full path to the LIBXML executable file is not specified in the **Executable path** text field, some errors may occur during validation against a W3C XML Schema, such as:

```
Unimplemented block at ... xmlschema.c
```

To avoid these errors, specify the full path to the LIBXML executable file.

- **XSV** - Not included in Oxygen XML Developer. Windows and Linux distributions of XSV can be downloaded from <http://www.cogsci.ed.ac.uk/~ht/xsv-status.html>. The executable path is [already configured in Oxygen XML Developer](#) for the `[OXYGEN_INSTALL_DIR]/xsv` installation folder. If it is installed in a different folder, the predefined executable path must be [corrected in Preferences](#). It is associated to XML Editor and XSD Editor. It is able to validate the edited document against XML Schema or a custom schema type.
- **SQC (Schema Quality Checker from IBM)** - Not included in Oxygen XML Developer. It can be downloaded [from here](#) (it comes as a .zip file, at the time of this writing SQC2.2.1.zip is about 3 megabytes). The executable path and working directory are already configured for the SQC installation directory `[OXYGEN_INSTALL_DIR]/sqc`. If it is installed in a different folder, the predefined executable path and working directory must be [corrected in the Preferences page](#). It is associated to XSD Editor.

A custom validator cannot be applied on files loaded through an [Oxygen XML Developer custom protocol plugin](#) developed independently and added to Oxygen XML Developer after installation.

Linked Output Messages of an External Engine

Validation engines display messages in an output view at the bottom of the Oxygen XML Developer window. If such an output message (**warning**, **error**, **fatal error**, etc) spans between three to six lines of text and has the format specified below, then the message is linked to a location in the validated document. Clicking the message in the output view highlights the location of the message in an editor panel containing the file referenced in the message. This behavior is similar to the linked messages generated by the default built-in validator.

Linked messages have the following format:

- **Type:** [F|E|W] (the string *Type*: followed by a letter for the type of the message: fatal error, error, warning). This property is optional in a linked message.
- **SystemID:** A system ID of a file (the string *SystemID*: followed by the system ID of the file that will be opened for highlighting when the message is clicked in the output message - usually the validated file, the schema file or an included file).
- **Line:** A line number (the string *Line*: followed by the number of the line that will be highlighted).
- **Column:** A column number (the string *Column*: followed by the number of the column where the highlight will start on the highlighted line). This property is optional in a linked message.
- **EndLine:** A line number (the string *EndLine*: followed by the number of the line where the highlight ends). This property is optional in a linked message.
- **EndColumn:** A column number (the string *EndColumn*: followed by the number of the column where the highlight ends on the end line). This property is optional in a linked message.

Note: The **Line/Column** pair works in conjunction with the **EndLine/EndColumn** pair. Thus, if both pairs are specified, then the highlight starts at **Line/Column** and ends at **EndLine/EndColumn**. If the

EndLine/EndColumn pair is missing, the highlight starts from the beginning of the line identified by the **Line** parameter and ends at the column identified by the **Column** parameter.

- **AdditionalInfoURL**: The URL string pointing to a remote location where additional information about the error can be found - this line is optional in a linked message.
- **Description**: Message content (the string *Description*: followed by the content of the message that will be displayed in the output view).

Example:

Example of how a custom validation engine can report an error using the format specified above:

```
Type: E
SystemID: file:///c:/path/to/validatedFile.xml
Line: 10
Column: 20
EndLine: 10
EndColumn: 35
AdditionalInfoURL: http://www.host.com/path/to/errors.html#errorID
Description: custom validator message
```

Validation Scenarios

A complex XML document is split in smaller interrelated modules. These modules do not make much sense individually and cannot be validated in isolation due to interdependencies with other modules. Oxygen XML Developer validates the main module of the document when an imported module is checked for errors.

A typical example is the chunking of a DocBook XSL stylesheet that has `chunk.xsl` as the main module and `param.xsl`, `chunk-common.xsl`, and `chunk-code.xsl` as imported modules. `param.xsl` only defines XSLT parameters. The module `chunk-common.xsl` defines an XSLT template with the name `chunk`. `Chunk-code.xsl` calls this template. The parameters defined in `param.xsl` are used in the other modules without being redefined.

Validating `chunk-code.xsl` as an individual XSLT stylesheet generates misleading errors in regards to parameters and templates that are used but undefined. These errors are only caused by ignoring the context in which this module is used in real XSLT transformations and in which it is validated. To validate such a module, define a validation scenario to set the main module of the stylesheet and the validation engine used to find the errors. Usually this engine applies the transformation during the validation process to detect the errors that the transformation generates.

You can validate a stylesheet with several engines to make sure that you can use it in various environments and have the same results. For example, an XSLT stylesheet may be applied with Saxon 6.5, Xalan, and MSXML 4.0 engines in different production systems.

Other examples of documents that can benefit from a validation scenario include:

- A complex XQuery file with a main module that imports modules developed independently but validated in the context of the main module of the query. In an XQuery validation scenario, the default validator of Oxygen XML Developer (Saxon 9) or any connection to a database that supports validation (Berkeley DB XML Database, eXist XML Database, Documentum xDB (X-Hive/DB) 10 XML Database, MarkLogic version 5 or newer) can be set as a validation engine.
- An XML document in which the *master file* includes smaller fragment files using XML entity references.

Note: If a *master file* is associated with the current file, the validation scenarios defined in the *master file*, along with any Schematron schema defined in the default scenarios for that particular *framework*, are used for the validation. These take precedence over other types of validation units defined in the default scenarios for the particular *framework*. For more information on *master files*, see [Master Files Support](#) on page 302 or [Working with Modular XML Files in the Master Files Context](#) on page 429.

For more information about how to use a validation scenario in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/9RMPcckVMJA>

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Presenting Validation Errors in Text Mode](#) on page 207

Creating a New Validation Scenario

To create a validation scenario, follow these steps:

1. Select the  **Configure Validation Scenario(s)** from the  **Validation** toolbar drop-down menu, or from the **Document > Validate** menu (or the **Validate** submenu when invoking the contextual menu on a file in the **Project view**).

The **Configure Validation Scenario(s)** dialog box is displayed. It contains predefined and user-defined scenarios. The predefined scenarios are organized in categories depending on the type of file they apply to and you can identify them by a yellow key icon that marks them as *read-only*. The user-defined scenarios are organized under a single category. The default scenarios for the particular *framework* are rendered in bold.

Note: If a *master file* is associated with the current file, the validation scenarios defined in the *master file*, along with any Schematron schema defined in the default scenarios for that particular *framework*, are used for the validation. These take precedence over other types of validation units defined in the default scenarios for the particular *framework*. For more information on *master files*, see [Master Files Support](#) on page 302 or [Working with Modular XML Files in the Master Files Context](#) on page 429.

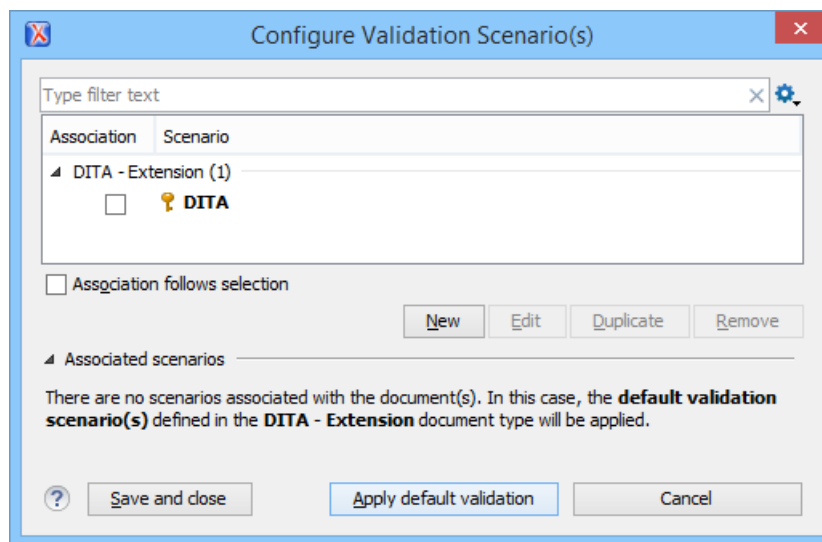


Figure 198: Configure Validation Scenario Dialog Box

The top section of the dialog box contains a filter that allows you to search through the scenarios list and the  **Settings** button allows you to configure the following options:

Show all scenarios

Select this option to display all the available scenarios, regardless of the document they are associated with.

Show only the scenarios available for the editor

Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.

Show associated scenarios

Select this option to only display the scenarios associated with the document you are editing.

Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the scenarios file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:


- Keep or replace the existing scenario.
- Keep both scenarios.

Note: When you keep both scenarios, Oxygen XML Developer adds imported to the name of the imported scenario.

Export selected scenarios

Use this option to export selected scenarios individually. Oxygen XML Developer creates a scenarios file that contains the scenarios that you export. This is useful if you want to share scenarios with others or export them to another computer.

2. To add a scenario, click the **New** button.
The **New scenarios** dialog box is displayed and it lists all the validation units for the scenario.

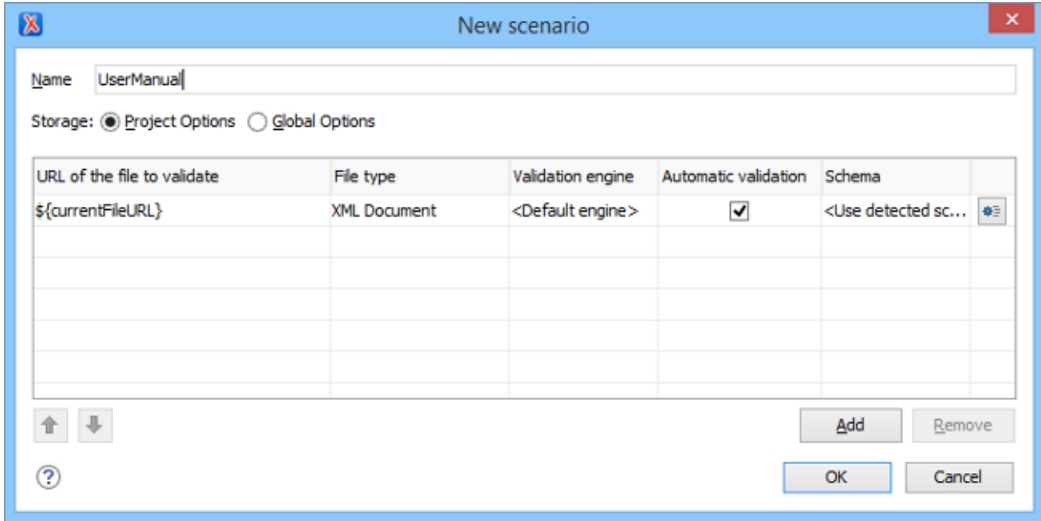

The "New scenario" dialog box is shown. It has a title bar with a close button. Inside, there is a "Name" field with the text "UserManual". Below it, there are two radio buttons for "Storage": "Project Options" (selected) and "Global Options". A table follows with the following columns: "URL of the file to validate", "File type", "Validation engine", "Automatic validation", and "Schema". The first row contains the values: "\${currentFileURL}", "XML Document", "<Default engine>", a checked checkbox, and "<Use detected sc...". To the right of the table is a button with a plus icon. Below the table are "Add" and "Remove" buttons. At the bottom are "OK" and "Cancel" buttons, along with a help icon and up/down arrow buttons.

URL of the file to validate	File type	Validation engine	Automatic validation	Schema
\${currentFileURL}	XML Document	<Default engine>	☒	<Use detected sc...

Figure 199: Create New Validation Scenario

This scenario configuration dialog box allows you to configure the following information and options:

Name

The name of the validation scenario.

Storage

You can choose between storing the scenario in the **Project Options** or **Global Options**.

URL of the file to validate

The URL of the main module that includes the current module. It is also the entry module of the validation process when the current one is validated. To edit the URL, double-click its cell and specify the URL of the main module by doing one of the following:

- Enter the URL in the text field or select it from the drop-down list.
- Use the  **Browse** drop-down button to browse for a local, remote, or archived file.
- Use the  **Insert Editor Variable** button to insert an [editor variable](#) or a [custom editor variable](#).

<code>\${_Desktop}</code>	- My Desktop
<code>\${start-dir}</code>	- Start directory of custom validator
<code>\${standard-params}</code>	- List of standard params for command line
<code>\${cfn}</code>	- The current file name without extension
<code>\${currentFileURL}</code>	- The path of the currently edited file (URL)
<code>\${cfdu}</code>	- The path of current file directory (URL)
<code>\${frameworks}</code>	- Oxygen frameworks directory (URL)
<code>\${pdu}</code>	- Project directory (URL)
<code>\${oxygenHome}</code>	- Oxygen installation directory (URL)
<code>\${home}</code>	- The path to user home directory (URL)
<code>\${pn}</code>	- Project name
<code>\${env(VAR_NAME)}</code>	- Value of environment variable VAR_NAME
<code>\${system(var.name)}</code>	- Value of system variable var.name

Figure 200: Insert an Editor Variable

File type

The type of the document that is validated in the current validation unit. Oxygen XML Developer automatically selects the file type depending on the value of the **URL of the file to validate** field.

Validation engine

You can select one of the engines available in Oxygen XML Developer for validation of the particular document type.

Default engine means that the default engine is used to run the validation for the current document type, as specified in the preferences page for that type of document (for example, [XSLT preferences page](#), [XQuery preferences page](#), [XML Schema preferences page](#)).

The **DITA Validation** engine performs DITA-specific checks in the context of the specifications.

The **Table Layout Validation** engine looks for table layout problems.

Automatic validation

If this option is selected, the validation operation defined by this row is also applied by [the automatic validation feature](#). If the **Automatic validation** feature is disabled in the [Document Checking preferences page](#), then this option is ignored, as the preference setting has a higher priority.

Schema

This option becomes active when you set the **File type** to **XML Document** and allows you to specify the schema used for the validation unit.

Specify Schema

Opens the **Specify Schema** dialog box that allows you to set a schema to be used for validating XML documents.

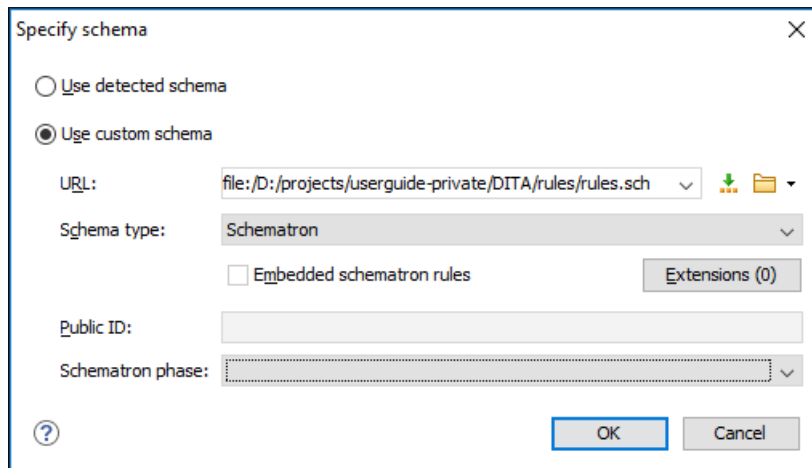


Figure 201: Specify Schema Dialog Box

The **Specify Schema** dialog box contains the following options:

Use detected schema

Uses the [schema detected for the particular document](#).

Use custom schema

Allows you to specify the schema using the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the [Browse](#) drop-down list.
- **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
- **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
- **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
- **Public ID** - Allows you to specify a public ID if you have selected a DTD.
- **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.

Move Up

Moves the selected scenario up one spot in the list.

Move Down

Moves the selected scenario down one spot in the list.

Add

Adds a new validation unit to the list.

Remove

Removes an existing validation unit from the list.

3. Configure any of the existing validation units according to the information above, and you can use the buttons at the bottom of the table to add, remove, or move validation units. Note that if you add a Schematron validation unit, you can also select the **validation phase**.
4. Press **OK**.

The newly created validation scenario will now be included in the list of scenarios in the **Configure Validation Scenario(s)** dialog box. You can select the scenario in this dialog box to associate it with the current document and press the **Apply associated** button to run the validation scenario.

Editing a Validation Scenario

To edit an existing validation scenario, follow these steps:

1. Select the  **Configure Validation Scenario(s)** from the  **Validation** toolbar drop-down menu, or from the **Document > Validate** menu (or the **Validate** submenu when invoking the contextual menu on a file in the [Project view](#)).

The **Configure Validation Scenario(s)** dialog box is displayed. It contains predefined and user-defined scenarios. The predefined scenarios are organized in categories depending on the type of file they apply to and you can identify them by a yellow key icon that marks them as *read-only*. The user-defined scenarios are organized under a single category. The default scenarios for the particular *framework* are rendered in bold.

Note: If a *master file* is associated with the current file, the validation scenarios defined in the *master file*, along with any Schematron schema defined in the default scenarios for that particular *framework*, are used for the validation. These take precedence over other types of validation units defined in the default scenarios for the particular *framework*. For more information on *master files*, see [Master Files Support](#) on page 302 or [Working with Modular XML Files in the Master Files Context](#) on page 429.

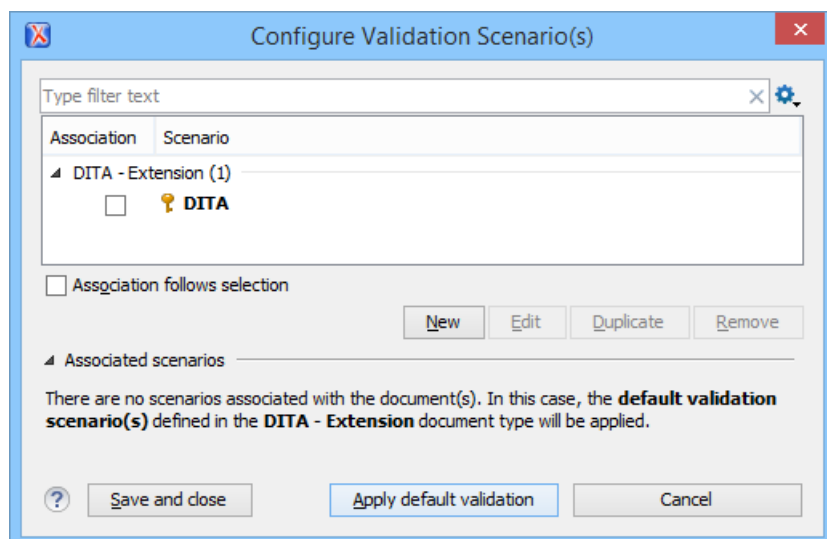


Figure 202: Configure Validation Scenario Dialog Box

The top section of the dialog box contains a filter that allows you to search through the scenarios list and the  **Settings** button allows you to configure the following options:

Show all scenarios

Select this option to display all the available scenarios, regardless of the document they are associated with.

Show only the scenarios available for the editor

Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.

Show associated scenarios

Select this option to only display the scenarios associated with the document you are editing.

Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the scenarios file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.
- Keep both scenarios.


Note: When you keep both scenarios, Oxygen XML Developer adds `imported` to the name of the imported scenario.

Export selected scenarios

Use this option to export selected scenarios individually. Oxygen XML Developer creates a `scenarios` file that contains the scenarios that you export. This is useful if you want to share scenarios with others or export them to another computer.

2. Select the scenario and press the **Edit** button. If you try to edit one of the *read-only* predefined scenarios, you will receive a warning message that Oxygen XML Developer needs to create a customizable duplicate (you can also use the **Duplicate** button).

The **Edit scenario** dialog box is displayed and it lists all the validation units for the scenario.

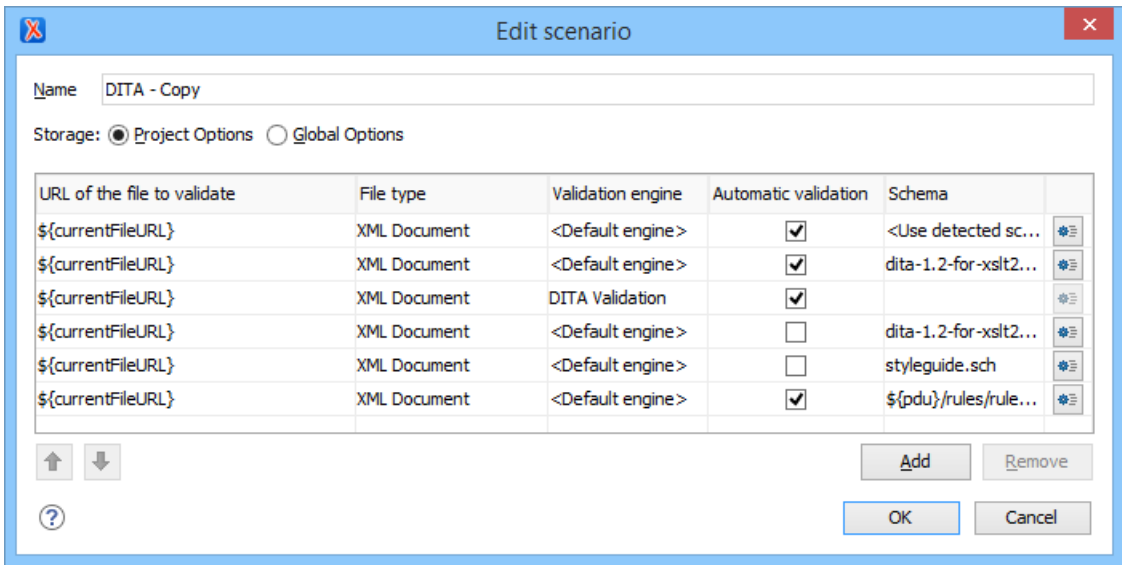

URL of the file to validate	File type	Validation engine	Automatic validation	Schema
\${currentFileURL}	XML Document	<Default engine>	☒	<Use detected sc...
\${currentFileURL}	XML Document	<Default engine>	☒	dita-1.2-for-xslt2...
\${currentFileURL}	XML Document	DITA Validation	☒	
\${currentFileURL}	XML Document	<Default engine>	☐	dita-1.2-for-xslt2...
\${currentFileURL}	XML Document	<Default engine>	☐	styleguide.sch
\${currentFileURL}	XML Document	<Default engine>	☒	\${pdu}/rules/rule...

Figure 203: Edit Validation Scenario

This scenario configuration dialog box allows you to configure the following information and options:

Name

The name of the validation scenario.

Storage

You can choose between storing the scenario in the **Project Options** or **Global Options**.

URL of the file to validate

The URL of the main module that includes the current module. It is also the entry module of the validation process when the current one is validated. To edit the URL, double-click its cell and specify the URL of the main module by doing one of the following:

- Enter the URL in the text field or select it from the drop-down list.
- Use the  **Browse** drop-down button to browse for a local, remote, or archived file.
- Use the  **Insert Editor Variable** to insert an **editor variable** or a **custom editor variable**.

<code>\${_Desktop}</code>	- My Desktop
<code>\${start-dir}</code>	- Start directory of custom validator
<code>\${standard-params}</code>	- List of standard params for command line
<code>\${cfn}</code>	- The current file name without extension
<code>\${currentFileURL}</code>	- The path of the currently edited file (URL)
<code>\${cfdu}</code>	- The path of current file directory (URL)
<code>\${frameworks}</code>	- Oxygen frameworks directory (URL)
<code>\${pdu}</code>	- Project directory (URL)
<code>\${oxygenHome}</code>	- Oxygen installation directory (URL)
<code>\${home}</code>	- The path to user home directory (URL)
<code>\${pn}</code>	- Project name
<code>\${env(VAR_NAME)}</code>	- Value of environment variable VAR_NAME
<code>\${system(var.name)}</code>	- Value of system variable var.name

Figure 204: Insert an Editor Variable

File type

The type of the document that is validated in the current validation unit. Oxygen XML Developer automatically selects the file type depending on the value of the **URL of the file to validate** field.

Validation engine

You can select one of the engines available in Oxygen XML Developer for validation of the particular document type.

Default engine means that the default engine is used to run the validation for the current document type, as specified in the preferences page for that type of document (for example, [XSLT preferences page](#), [XQuery preferences page](#), [XML Schema preferences page](#)).

The **DITA Validation** engine performs DITA-specific checks in the context of the specifications.

The **Table Layout Validation** engine looks for table layout problems.

Automatic validation

If this option is selected, the validation operation defined by this row is also applied by [the automatic validation feature](#). If the **Automatic validation** feature is disabled in the [Document Checking preferences page](#), then this option is ignored, as the preference setting has a higher priority.

Schema

This option becomes active when you set the **File type** to **XML Document** and allows you to specify the schema used for the validation unit.

Specify Schema

Opens the **Specify Schema** dialog box that allows you to set a schema to be used for validating XML documents.

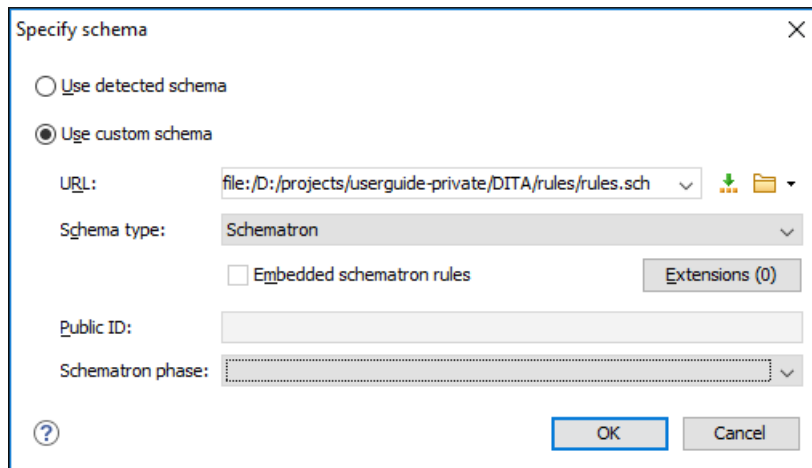


Figure 205: Specify Schema Dialog Box

The **Specify Schema** dialog box contains the following options:

Use detected schema

Uses the [schema detected for the particular document](#).

Use custom schema

Allows you to specify the schema using the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the **Browse** drop-down list.
- **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
- **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
- **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
- **Public ID** - Allows you to specify a public ID if you have selected a DTD.
- **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.

Move Up

Moves the selected scenario up one spot in the list.

Move Down

Moves the selected scenario down one spot in the list.

Add

Adds a new validation unit to the list.

Remove

Removes an existing validation unit from the list.

3. Configure any of the existing validation units according to the information above, and you can use the buttons at the bottom of the table to add, remove, or move validation units. Note that if you add a Schematron validation unit, you can also select the **validation phase**.
4. When you are done configuring the scenario, press **OK**.

The modified validation scenario will now be included in the list of scenarios in the **Configure Validation Scenario(s)** dialog box. If you chose to duplicate an existing one, the modified scenario will be listed with the word *copy* at the end of its name.

Sharing Validation Scenarios

The validation scenarios and their settings can be shared with other users by saving them at [project level](#) or by [exporting them to a specialized scenarios file](#) that can then be imported. When you create a new validation scenario or edit an existing one, there is a **Storage** option to control whether the scenarios are stored in **Project Options** or **Global Options**.

Storage: ☒ Project Options ☐ Global Options

Selecting **Project Options** stores the scenario in the project file and can be shared with other users that have access to the project. If your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) then your team will have access to the scenarios that you define. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

Selecting **Global Options** stores the scenario in the global options that are stored in the user home directory.

You can also change the storage options on existing validation scenarios by using the **Change storage** action from the contextual menu of the list of scenarios.

Related Information:

[Sharing Application Settings](#) on page 144

Resolving References to Remote Schemas with an XML Catalog

When a reference to a remote schema must be used in the validated XML document for interoperability purposes, but a local copy of the schema should actually be used for performance reasons, the reference can be resolved to the local copy of the schema with an [XML Catalog](#).

For example, if the XML document contains a reference to a remote schema docbook . rng like this:

```
<?xml-model href="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng"
  type="application/xml" schematypens="http://relaxng.org/ns/structure/1.0"?>
```

it can be resolved to a local copy with a catalog entry like this:

```
<uri name="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng"
  uri="rng/docbook.rng"/>
```

An *XML Catalog* can also be used to map a W3C XML Schema specified with a URN in the xsi:schemaLocation attribute of an XML document to a local copy of the schema. For example, if the XML document specifies the schema with:

```
<topic xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:noNamespaceSchemaLocation="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1">
```

the URN can be resolved to a local schema file with a catalog entry like this:

```
<uri name="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1"
  uri="topic.xsd"/>
```

Related Information:

[Working with XML Catalogs](#) on page 432

Validation Example - A DocBook Validation Error

In the following DocBook 4 document, the content of the listitem element does not match the rules of the DocBook 4 schema (docbookx.dtd).

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE article PUBLIC "-//OASIS//DTD DocBook XML V4.4//EN"
  "http://www.docbook.org/xml/4.4/docbookx.dtd">
<article>
  <title>Article Title</title>
  <sect1>
    <title>Section1 Title</title>
```

```

<itemizedlist>
  <listitem>
    <link>a link here</link>
  </listitem>
</itemizedlist>
</sect1>
</article>

```

The  **Validate Document** action will return the following error:

```

Unexpected element "link". The content of the parent element type must match
"(calloutlist|glosslist|bibliolist|itemizedlist|orderedlist|segmentedlist|simplelist
|variablelist|caution|important|note|tip|warning|literallayout|programlisting
|programlistingco|screen|screenco|screenshot|synopsis|cmdsynopsis|funcsynopsis
|classsynopsis|fieldsynopsis|constructorsynopsis|destructorsynopsis|methodsynopsis
|formalpara|para|simpara|address|blockquote|graphic|graphicco|mediaobject|mediaobjectco
|informalequation|informalexample|informalfigure|informaltable|equation|example|figure
|table|msgset|procedure|sidebar|qandaset|task|anchor|bridgehead|remark|highlights
|abstract|authorblurb|epigraph|indexterm|beginpage)+".

```

This error message is a little more difficult to understand, so understanding of the syntax or processing rules for the DocBook XML DTD `listitem` element is recommended. However, the error message does offer a clue as to the source of the problem, indicating that “The content of element type must match”.

Fortunately, most standards-based DTDs, XML Schemas, and Relax NG schemas are supplied with reference documentation. This enables you to lookup the element and read about it. In this case, you should learn about the child elements of `listitem` and their nesting rules. Once you have correctly inserted the required child element and nested it in accordance with the XML rules, the document will become valid.

XML Quick Fixes

The Oxygen XML Developer [Quick Fix support](#) helps you resolve errors that appear in an XML document by offering *Quick Fixes* to problems such as missing required attributes or invalid elements. *Quick Fixes* are available in **Text** mode

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a *Quick Fix* is available for that particular error or warning, you can access the *Quick Fix* proposals with any of the following methods:

- When hovering over the error or warning, the proposals may be presented in a tooltip pop-up window and the available quick *Quick Fixes* include a link that can be used to perform the fix.



Figure 206: Quick Fix Presented in a Tooltip in Text Mode

- If you place the cursor in the highlighted area where a validation error or warning occurs, a *Quick Fix* icon (💡) is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.

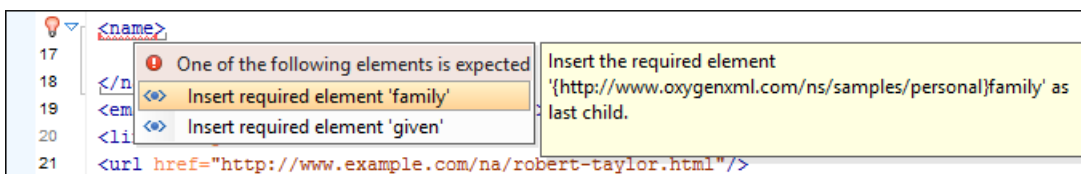


Figure 207: Quick Fix Menu Invoked by Clicking on the 💡 Icon

- With the cursor placed in the highlighted area of the error or warning, you can also invoke the *Quick Fix* menu by pressing **Alt + 1 (Command + Alt + 1 on OS X)** on your keyboard.

Whenever you make a modification in the XML document or you apply a fix, the list of *Quick Fixes* is recomputed to ensure that you always have valid proposals.

Note: A *Quick Fix* that adds an element inserts it along with required and optional elements, and required and fixed attributes, depending on how the [Content Completion preferences](#) are configured.

Quick Fixes for DTD, XSD, and Relax NG Errors

Oxygen XML Developer offers [Quick Fixes](#) for common errors that appear in XML documents that are validated against DTD, XSD, or Relax NG schemas.

Note: For XML documents validated against XSD schemas, the *Quick Fixes* are only available if you use the default Xerces validation engine.

Quick Fixes are available in **Text** mode .

Oxygen XML Developer provides *Quick Fixes* for numerous types of problems, including the following:

Problem Type	Available Quick Fixes
A specific element is required in the current context	Insert the required element
An element is invalid in the current context	Remove the invalid element
The content of the element should be empty	Remove the element content
An element is not allowed to have child elements	Remove all child elements
Text is not allowed in the current element	Remove the text content
A required attribute is missing	Insert the required attribute
An attribute is not allowed to be set for the current element	Remove the attribute
The attribute value is invalid	Propose the correct attribute values
ID value is already defined	Generate a unique ID value
References to an invalid ID	Change the reference to an already defined ID

Related Information:

[Schematron Quick Fixes \(SQF\)](#) on page 419

Schematron Quick Fixes (SQF)

Oxygen XML Developer provides support for Schematron [Quick Fixes](#) (SQF). They help you resolve issues that appear in XML documents that are validated against Schematron schemas by offering you solution proposals. The Schematron *Quick Fixes* are an extension of the Schematron language and they allow you to define fixes for Schematron validation messages. Specifically, they are associated with *assert* or *report* messages.

A typical use case is using Schematron *Quick Fixes* to assist content authors with common editing tasks. For example, you can use Schematron rules to automatically report certain validation warnings (or errors) when performing regular editing tasks, such as inserting specific elements or changing IDs to match specific naming conventions. For more details and examples, please see the following blog post: <http://blog.oxygenxml.com/2015/05/schematron-checks-to-help-technical.html>.

Displaying the Schematron Quick Fix Proposals

The defined Schematron *Quick Fixes* are displayed on validation errors in **Text** mode.

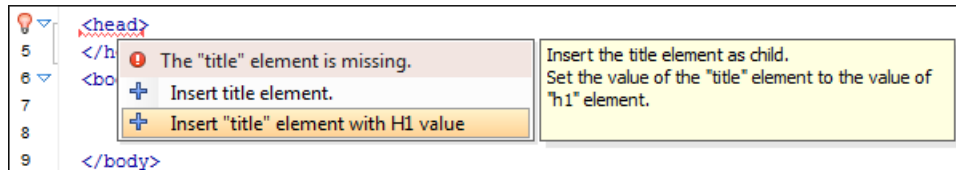


Figure 208: Example of a Schematron Quick Fix

Related Information:

[Editing Schematron Quick Fixes](#) on page 650

[Schematron Quick Fix Specifications](#)

[Presenting Schematron Validation Issues](#)

Associating a Schema to XML Documents

Oxygen XML Developer relies on schemas to validate XML documents and to compute valid proposals for the [Content Completion Assistant](#).

Supported Types of Schema

The following schema types are supported:

- W3C XML Schema 1.0 and 1.1 (with and without embedded Schematron rules)
- DTD
- Relax NG - XML syntax (with and without embedded Schematron rules)
- Relax NG - compact syntax
- NVDL
- Schematron (both ISO Schematron and Schematron 1.5)

Detecting a Schema

For the purposes of using validation and content completion mechanisms, Oxygen XML Developer tries to detect a schema by searching multiple locations, in the following order:

- The [schema defined in a validation scenario](#).
- The [schema defined in the validation scenarios associated with the particular document type](#) (if defined).
- The [schema that is associated directly in the XML document](#).
- The [schema defined in the framework \(document type\) configuration](#).

In addition, the locations of the schema can be mapped through the use of an [XML Catalog](#). For more information, see [Resolving Schema Locations Through XML Catalogs](#) on page 427.

Tip: To quickly open the schema used for validating the current document, select the  **Open Associated Schema** action from the toolbar (or **Document > Schema** menu).

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Associating a Schema Through a Validation Scenario

Oxygen XML Developer uses the rules defined in the detected schema to report errors and warnings during automatic and manual validations that help maintain the structural integrity of your XML documents. You can specify the schema to be used for validation directly in [validation scenarios](#) and there are several methods that can be used to do so.

Configure a Validation Scenario and Specify the Schema

To associate a schema to a validation scenario to be used whenever the scenario is invoked, follow these steps:

1. Select the  **Configure Validation Scenario(s)** from the  **Validation** toolbar drop-down menu, or from the **Document > Validate** menu (or the **Validate** submenu when invoking the contextual menu on a file in the **Project view**).
2. Press the **New** button to create a new validation scenario or the **Edit** button to modify an existing one.
3. [Add or configure validation units](#) according to your needs and click the  **Specify Schema** button.

Step Result: The **Specify Schema** dialog box is displayed:

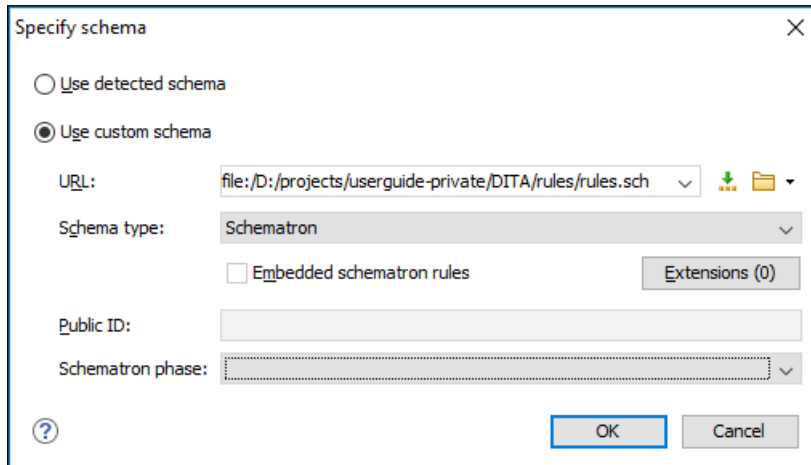


Figure 209: Specify Schema Dialog Box

The **Specify Schema** dialog box contains the following options:

Use detected schema

Uses the [schema detected for the particular document](#).

Use custom schema

Allows you to specify the schema using the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.
- **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
- **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
- **Public ID** - Allows you to specify a public ID if you have selected a DTD.
- **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
- **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.

4. Select the schema to be associated with the validation unit and configure the rest of the options according to your preferences.
5. Click **OK** on both dialog boxes.

Result: The schema is now associated with that validation scenario whenever it is invoked.

Use the Validate with Action to Specify a Schema for Validating the Current Document

To validate the current document using a specified schema, follow these steps:

1. Select the **Validation with** action from the  **Validation** drop-down menu on the toolbar (or **Document** > **Validate** menu).

Step Result: The **Validate with** dialog box is displayed:

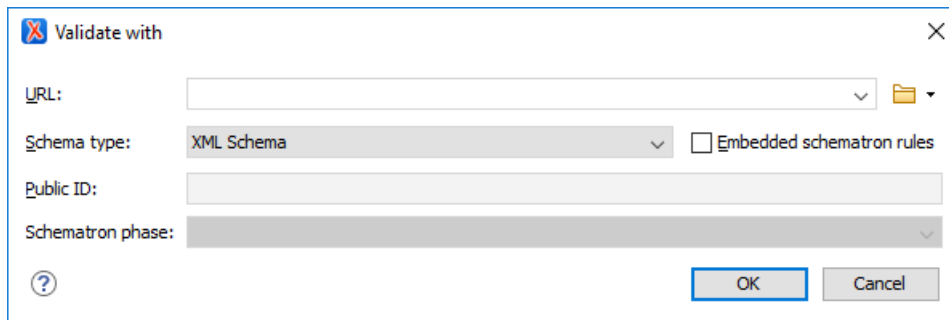


Figure 210: Validate with Dialog Box

This dialog box contains the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.
 - **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
 - **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
 - **Public ID** - Allows you to specify a public ID if you have selected a DTD.
 - **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
 - **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.
2. Select the schema to be associated with the manual validation and configure the rest of the options according to your preferences.
 3. Click **OK**.

Result: The current document is validated using the schema you specified.

Tip: To quickly open the schema used for validating the current document, select the  **Open Associated Schema** action from the toolbar (or **Document** > **Schema** menu).

Use the Validate with Schema Action to Specify a Schema for Validating all Selected Documents

To validate multiple documents using a specified schema, follow these steps:

1. Select all the documents you want to validate in the **Project** view .
2. Invoke the contextual menu (right-click) and select the **Validate with Schema** action from the **Validate** submenu.

Step Result: The **Validate with** dialog box is displayed:



Figure 211: Validate with Dialog Box

This dialog box contains the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the [Browse](#) drop-down list.
 - **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
 - **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
 - **Public ID** - Allows you to specify a public ID if you have selected a DTD.
 - **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
 - **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.
3. Select the schema that you want to use to validate all selected documents and configure the rest of the options according to your preferences.
 4. Click **OK**.

Result: The selected documents are validated using the schema you specified.

Associating a Schema in Validation Scenarios Defined in the Document Type

To report errors and warnings during automatic and manual validations that help maintain the structural integrity of particular XML document types, Oxygen XML Developer uses rules defined in the schema that is detected in the validation scenarios that are associated to each particular document type.

To associate a schema in validation scenarios defined in the [framework](#) (document type) configuration, follow these steps:

1. Open the [Preferences](#) dialog box ([Options > Preferences](#)) and go to **Document Type Association**.
2. Select your particular document type and click the **Edit** or **Duplicate** button to modify an existing *framework* (or use the **New** button to create a new one).

Step Result: This opens a [Document type configuration dialog box](#).

3. Go to the [Validation](#) tab.
4. Create or edit a validation scenario:
 - a. To [create a new validation scenario](#), click the [+ New](#) button.
 - b. To [edit the properties of an existing validation scenario](#), select it and click the [Edit](#) button (you can also use the [Duplicate](#) button to copy an existing scenario and edit its properties).
5. [Add or configure validation units](#) according to your needs and click the [Specify Schema](#) button.

Step Result: The **Specify Schema** dialog box is displayed:

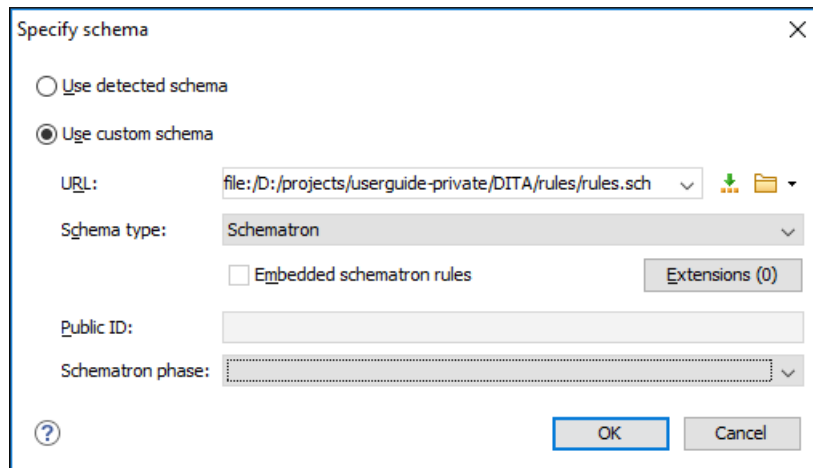


Figure 212: Specify Schema Dialog Box

The **Specify Schema** dialog box contains the following options:

Use detected schema

Uses the [schema detected for the particular document](#).

Use custom schema

Allows you to specify the schema using the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a [custom protocol](#). You can specify the URL by using the text field, the history drop-down, the [Insert Editor Variables](#) button, or the browsing tools in the [Browse](#) drop-down list.
- **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
- **Embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
- **Public ID** - Allows you to specify a public ID if you have selected a DTD.
- **Extensions** - Opens a dialog box that allows you to specify [Java extension JARs](#) to be used during the validation.
- **Schematron phase** - If you select a Schematron schema, this drop-down list allows you to select a Schematron phase that you want to use for validation. The listed phases are defined in the Schematron document.

6. Select the schema to be associated with the validation unit and configure the rest of the options according to your preferences.
7. Click **OK** on both dialog boxes.

Result: The schema is now associated with the validation scenario you just configured for that particular document type.

Associating a Schema Directly in XML Documents

Associate Schema Action

The schema used by the [Content Completion Assistant](#) and document validation engine can be associated with the current document by using the [Associate Schema](#) action. For most of the schema types, it uses the [xml-model processing instruction](#), with the exceptions of:

- **W3C XML Schema** - The `xsi:schemaLocation` attribute is used.

- **DTD** - The DOCTYPE declaration is used.

The association can specify a relative file path or a URL of the schema. The advantage of relative file path is that you can configure the schema at file level instead of *framework* level.

To associate a schema to the current document, follow these steps:

1. Select the  **Associate Schema** action from the toolbar (or **Document > Schema** menu).

Step Result: The **Associate Schema** dialog box is displayed:

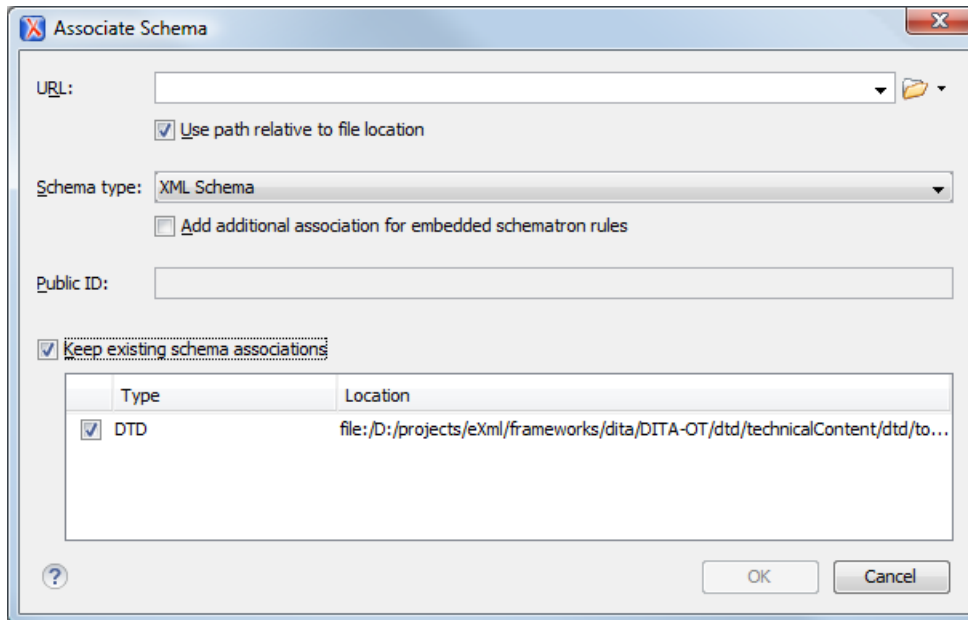


Figure 213: Associate Schema Dialog Box

This dialog box contains the following options:

- **URL** - Allows you to specify or select a URL for the schema. It also keeps a history of the last used schemas. The URL must point to the schema file that can be loaded from the local disk or from a remote server through HTTP(S), FTP(S) or a *custom protocol*.
 - **Use path relative to file location** - Select this option if the XML instance document and the associated schema contain relative paths. The location of the schema file is inserted in the XML instance document as a relative file path. This practice allows you, for example, to share these documents with other users without running into problems caused by multiple project locations on physical disk.
 - **Schema type** - Select a possible schema type from this combo box that is populated based on the extension of the schema file that was entered in the **URL** field. The possible schema types are: XML Schema, DTD, Relax NG, Relax NG Compact, Schematron, or NVDL.
 - **Add additional association for embedded schematron rules** - If you have selected XML Schema or Relax NG schemas with embedded Schematron rules and you want to use those embedded rules, select this option.
 - **Public ID** - Allows you to specify a public ID if you have selected a DTD.
 - **Keep existing schema associations** - Select this option to use the existing schema associations of the currently edited document.
2. Select the schema that will be associated with the XML document and configure the rest of the options according to your preferences.
 3. Click **OK**.

Result: The schema association is created based upon the specified type.

- **XML Schema** - The association with an XML Schema is added as an attribute of the root element with one of the following:

- `xsi:schemaLocation` attribute, if the root element of the document sets a default namespace with an `xmlns` attribute.
- `xsi:noNamespaceSchemaLocation` attribute, if the root element does not set a default namespace.
- **DTD** - The association with a DTD is added as a DOCTYPE declaration.
- **Other** - The association with a Relax NG, Schematron, or NVDL schema is added as [xml-model processing instruction](#).

Tip: To quickly open the schema used for validating the current document, select the  **Open Associated Schema** action from the toolbar (or **Document > Schema** menu).

Associate Schema with the xml-model Processing Instruction

The `xml-model` processing instruction associates a schema with the XML document that contains the processing instruction. It must be added at the beginning of the document, just after the XML prolog. The following code snippet contains an `xml-model` processing instruction declaration:

```
<?xml-model href="../../schema.sch" type="application/xml"
  schematypens="http://purl.oclc.org/dsdl/schematron" phase="ALL"
  title="Main schema"?>
```

It is available in the [Content Completion Assistant](#), before XML document root element, and includes the following attributes:

- `href` (required) - The schema file location.
- `type` - The content type of the schema. This is an optional attribute with the following possible values for each specified type:
 - DTD - The recommended value is `application/xml-dtd`.
 - W3C XML Schema - The recommended value is `application/xml`, or can be left unspecified.
 - RELAX NG XML Syntax - The recommended value is `application/xml`, or can be left unspecified.
 - RELAX NG Compact Syntax - The recommended value is `application/relax-ng-compact-syntax`.
 - Schematron - The recommended value is `application/xml`, or can be left unspecified.
 - NVDL - The recommended value is `application/xml`, or can be left unspecified.
- `schematypens` - The namespace for the schema language of the referenced schema with the following possible values:
 - DTD - Not specified.
 - W3C XML Schema - The recommended value is `http://www.w3.org/2001/XMLSchema`.
 - RELAX NG XML Syntax - The recommended value is `http://relaxng.org/ns/structure/1.0`.
 - RELAX NG Compact Syntax - Not specified.
 - Schematron - The recommended value is `http://purl.oclc.org/dsdl/schematron`.
 - NVDL - The recommended value is `http://purl.oclc.org/dsdl/nvd1/ns/structure/1.0`.
- `phase` - The phase name for the validation function in Schematron schema. This is an optional attribute. To run all phases from the Schematron, use the special **#ALL** value. If the phase is not specified, the default phase that is configured in the Schematron will be applied.
- `title` - The title for the associated schema. This is an optional attribute.

Older versions of Oxygen XML Developer used the oxygen processing instruction with the following attributes:

- `RNGSchema` - Specifies the path to the Relax NG schema that is associated with the current document.
- `type` - Specifies the type of Relax NG schema. It is used along with the `RNGSchema` attribute and can have the value **xml** or **compact**.
- `NVDLSchema` - Specifies the path to the NVDL schema that is associated with the current document.
- `SCHSchema` - Specifies the path to the SCH schema that is associated with the current document.

Note: Documents that use the oxygen processing instruction are compatible with newer versions of Oxygen XML Developer.

Related Information:

[Validating XML Documents](#) on page 401

Associating a Schema in a Framework (Document Type) Configuration

The schema used to compute valid proposals in the [Content Completion Assistant](#) and by the document validation engine to report errors and warnings can be defined in each particular *framework* (document type). This schema will be used only if one is not [detected in the current XML file](#).

To associate a schema in a particular *framework* (document type), follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Document Type Association**.
2. Select your particular document type and click the **Edit**, **Extend**, or **Duplicate** button to modify an existing *framework* (or use the **New** button to create a new one).

Step Result: This opens a [Document type configuration dialog box](#).

3. Go to the **Schema** tab.
4. Select the schema type and its URI.
5. Click **OK**.

Result: The schema is now associated with the particular document type and will be used by the *Content Completion Assistant* and validation engine if a schema is not detected in the current XML document.

Resolving Schema Locations Through XML Catalogs

Schema locations can be mapped using an [XML Catalog](#). Oxygen XML Developer resolves the location of a schema in the following order:

- First, it attempts to resolve the schema location as a URI (`uri`, `uriSuffix`, `rewriteUri`, `delegateUri` mappings from the *XML Catalog*). If this succeeds, the process ends here.
- If the [Resolve schema locations also through system mappings](#) option is selected, it attempts to resolve the schema location as a system ID (`system`, `systemSuffix`, `rewriteSuffix`, `rewriteSystem` from the *XML Catalog*). If this succeeds, the process ends here.
- If the [Process "schemaLocation" namespaces through URI mappings for XML Schema](#) option is selected, the target namespace of the imported XML Schema is resolved through URI mappings. If the schema specified in the `schemaLocation` attribute is not resolved successfully, the namespace of the root element is taken into account. If this succeeds, the process ends here.
- If none of these succeeds, the actual [schema location](#) is used.

Related Information:

[Working with XML Catalogs](#) on page 432

Learn Document Structure when Schema is not Detected

When working with documents that do not specify a schema, or for which the schema is not known or does not exist, Oxygen XML Developer is able to learn and translate the document structure to a DTD. You can choose to save the learned structure to a file to provide a DTD as an initialization source for [content completion](#) and [document validation](#). This feature is also useful for producing DTDs for documents that contain personal or custom element types.

When you open a document that is not associated with a schema, Oxygen XML Developer automatically learns the document structure and uses it for [content completion](#). To disable this feature, deselect the [Learn on open document](#) option in the user preferences.

Related Information:

[Detecting a Schema](#) on page 420

Create a DTD from Learn Document Structure Option

When there is no schema associated with an XML document, Oxygen XML Developer can learn the document structure by parsing the document internally. This feature is enabled by the [Learn on open document](#) option that is available in the user preferences.

To create a DTD from the learned structure, follow these steps:

1. Open the XML document for which a DTD will be created.

2. Go to **Document > XML Document > Learn Structure** (**Ctrl + Shift + L** (**Command + Shift + L** on OS X)). The **Learn Structure** action reads the mark-up structure of the current document. The **Learn completed** message is displayed in the application status bar when the action is finished.
3. Go to **Document > XML Document > Save Structure** (**Ctrl + Shift + S** (**Command + Shift + S** on OS X)) and enter the DTD file path.
4. Press the **Save** button.

Search and Refactoring Actions for IDs and IDREFS

Oxygen XML Developer allows you to search for ID declarations and references (IDREFS) and to [define the scope of the search and refactor operations](#). These operations are available for XML documents that have an associated DTD, XML Schema, or Relax NG schema. These operations are available through the search and refactor actions in the contextual menu. In **Text** mode, these actions are also available in the **Quick Assist** menu.

The search and refactor actions from the contextual menu are grouped in the **Manage IDs** section:

Rename in

Renames the ID and all its occurrences. Selecting this action opens the **Rename XML ID** dialog box. This dialog box lets you insert the new ID value and [choose the scope of the rename operation](#). For a preview of the changes you are about to make, click **Preview**. This opens the **Preview** dialog box, which presents a list with the files that contain changes and a preview zone of these changes.

Rename in File

Renames the ID you are editing and all its occurrences from the current file.

Note: Available in the **Text** mode only.

Search References

Searches for the references of the ID. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Search References in

Searches for the references of the ID. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Search Declarations

Searches for the declaration of the ID reference. By default, the scope of this action is the current project. If you configure a scope using the [Select the scope for the Search and Refactor operations](#) dialog box, this scope will be used instead.

Note: Available in the **Text** mode only.

Search Declarations in

Searches for the declaration of the ID reference. Selecting this action opens the [Select the scope for the Search and Refactor operations](#).

Note: Available in the **Text** mode only.

Search Occurrences in file

Searches for the declaration and references of the ID in the current document.

Tip: A quick way to go to the declaration of an ID in **Text** mode is to move the cursor over an ID reference and use the **Ctrl + Single-Click** (**Command + Single-Click** on OS X) navigation.

Selecting an ID that you use for search or refactor operations differs between the **Text** and **Author** modes. In the **Text** mode, you position the cursor inside the declaration or reference of an ID. In the **Author** mode, Oxygen XML Developer collects all the IDs by analyzing each element from the path to the root. If more IDs are available, you are prompted to choose one of them.

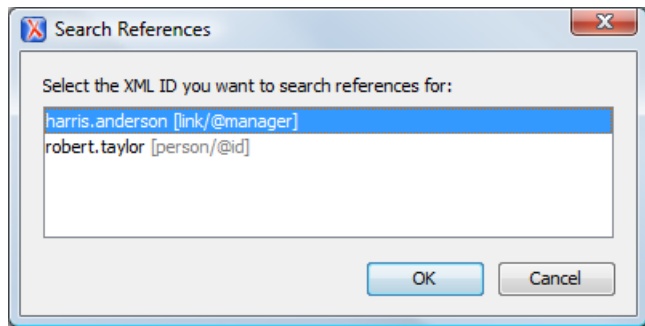


Figure 214: Selecting an ID in the Author Mode

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

Search and Refactor Operations Scope

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the *Quick Assist* action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple *working sets*. The **Use only Master Files, if enabled** checkbox allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the [Master Files support](#).

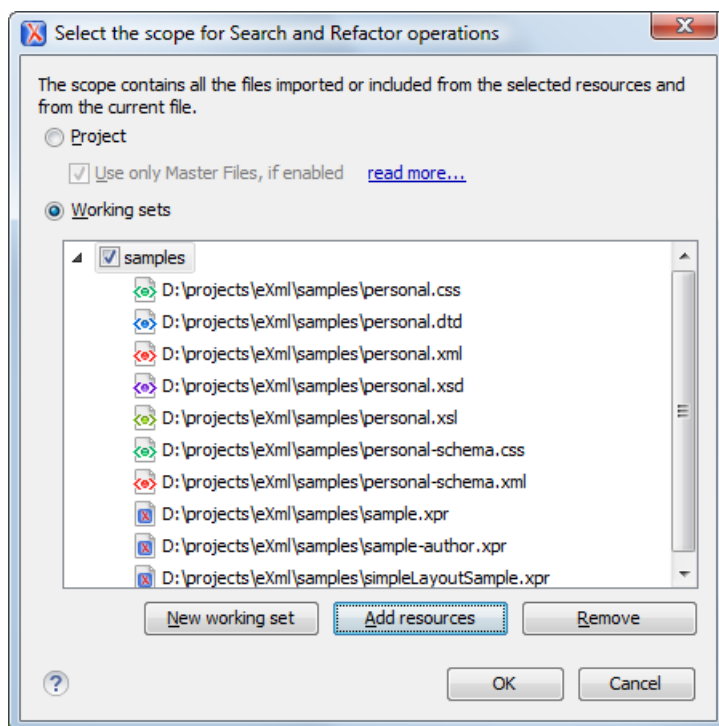


Figure 215: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the *working set* structure.

Working with Modular XML Files in the Master Files Context

Smaller interrelated modules that define a complex XML modular structure cannot be correctly edited or validated individually, due to their interdependency with other modules. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any file from the hierarchy in the context of the *master files*.

You can set a main XML document either using the [master files support from the Project view](#), or using a validation scenario.

To set a *master file* using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main XML document. In this case, it considers the current module as the main XML document.

The advantages of working with modular XML files in the context of a *master file* include:

- Correct validation of a module in the context of a larger XML structure.
- [Content Completion Assistant](#) displays all collected entities and IDs starting from the *master files*.
- Oxygen XML Developer uses the schema defined in the *master file* when you edit a module that is included in the hierarchy through the *External Entity* mechanism.
- The *master files* defined for the current module determines the [scope of the search and refactoring actions](#) for ID/IDREFS values and for updating references when renaming/moving a resource. Oxygen XML Developer performs the search and refactoring actions in the context that the *master files* determine, improving the speed of execution.

For more information about editing modular XML files in the *master files* context, watch our video demonstration:

<https://www.youtube.com/embed/e2oo4RWNxW8>

Related Information:

[Master Files Support](#) on page 302

[XML Resource Hierarchy/Dependencies View](#) on page 430

XML Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to easily see the hierarchy / dependencies for an XML document. The tree structure presented in this view is built based on the *Xlinclude* and *External Entity* mechanisms. To define the scope for calculating the dependencies of a resource, click  [Configure dependencies search scope](#) on the **Resource Hierarchy/Dependencies** toolbar.

To open this view, go to **Window > Show View > Resource Hierarchy/Dependencies**. As an alternative, right-click the current document and either select **Resource Hierarchy** or **Resource Dependencies**.

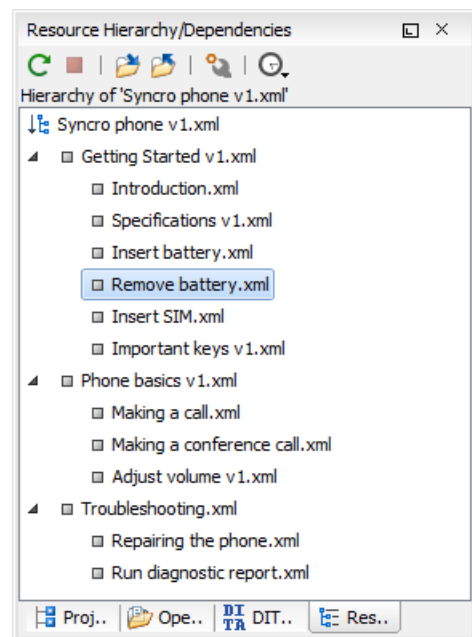


Figure 216: Resource Hierarchy/Dependencies View - Hierarchy for Syncro phone v1.xml

The build process for the dependencies view is started with the **Resource Dependencies** action available on the contextual menu.

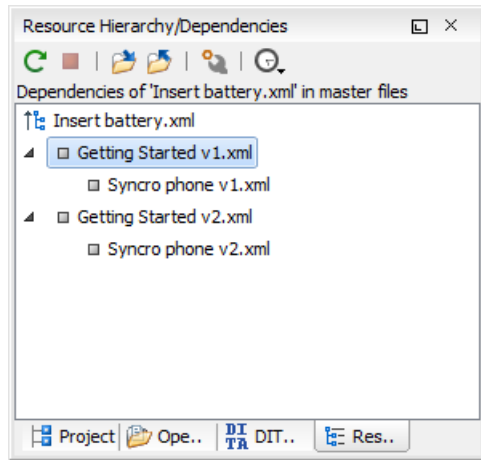


Figure 217: Resource Hierarchy/Dependencies View - Dependencies for Insert battery.xml

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#). Only the references made through the *XInclude* and *External Entity* mechanisms are handled.

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

[Search and Refactor Operations Scope](#) on page 429

Moving/Renaming XML Resources

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Working with XML Catalogs

Oxygen XML Developer uses [XML Catalogs](#) to resolve references for validations and transformations and they are especially helpful for resolving external resources when internet access is not available or your connection is slow.

Oxygen XML Developer supports any *XML Catalog* file that conforms to one of the following:

1. [OASIS XML Catalogs Committee Specification v1.1](#).
2. [OASIS Technical Resolution 9401:1997](#), including the plain-text flavor described in that resolution.

The version 1.1 of the OASIS *XML Catalog* specification introduces the possibility to map a system ID, public ID, or a URI to a local copy using only a suffix of the ID or URI used in the actual document. This is done using the catalog elements [systemSuffix](#) and [uriSuffix](#).

Depending on the resource type, Oxygen XML Developer uses different catalog mappings.

Table 34: Catalog Mappings

Doc Type	Referenced Resource	Mappings
XML	DTD	<i>system</i> or <i>public</i> The Prefer option controls which one of the mappings should be used.

Doc Type	Referenced Resource	Mappings
	XML Schema	The following strategy is used (if one step fails to provide a resource, the next is applied): 1. resolve the schema using <i>URI</i> catalog mappings. 2. resolve the schema using <i>system</i> catalog mappings. This happens only if the Resolve schema locations also through system mappings option is selected (it is by default). 3. resolve the root <i>namespace</i> using <i>URI</i> catalog mappings.
	Relax NG	
	Schematron	
	NVDL	
XSL	XSL/ANY	<i>URI</i>
CSS	CSS	<i>URI</i>
XML Schema	XML Schema	The following strategy is used (if one step fails to provide a resource, the next is applied): 1. resolve schema reference using <i>URI</i> catalog mappings. 2. resolve schema reference using <i>system</i> catalog mappings. This happens only if the Resolve schema locations also through system mappings option is selected (it is by default). 3. resolve schema <i>namespace</i> using <i>URI</i> catalog mappings. This happens only if the Process namespaces through URI mappings for XML Schema option is selected (it is not by default).
Relax NG	Relax NG	

Creating an XML Catalog with a Template

An [XML Catalog](#) file can be created quickly in Oxygen XML Developer starting from the two document templates called *OASIS XML Catalog 1.0* and *OASIS XML Catalog 1.1*. They are available when [creating new document templates](#).

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE catalog
  PUBLIC "-//OASIS//DTD XML Catalogs V1.1//EN"
  "http://www.oasis-open.org/committees/entity/release/1.1/catalog.dtd">

<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">

  <!-- Use "system" and "public" mappings when resolving DTDs -->
  <system
    systemId="http://www.docbook.org/xml/4.4/docbookx.dtd"
    uri="frameworks/docbook/4.4/dtd/docbookx.dtd" />

  <!-- "systemSuffix" matches any system ID ending in a specified string -->
  <systemSuffix
    systemIdSuffix="docbookx.dtd"
    uri="frameworks/docbook/dtd/docbookx.dtd" />

  <!-- Use "uri" for resolving XML Schema and XSLT stylesheets -->
  <uri
    name="http://www.oasis-open.org/docbook/xml/5.0/rng/docbook.rng"
    uri="frameworks/docbook/5.0/rng/docbookxi.rng" />

  <!-- The "uriSuffix" matches any URI ending in a specified string -->
  <uriSuffix
    uriSuffix="docbook.xsl"
    uri="frameworks/docbook/xsl/fo/docbook.xsl" />

</catalog>
```

How Oxygen XML Developer Determines which Catalog to Use

Oxygen XML Developer uses [XML Catalogs](#) to resolve references for validations and transformations and it maps such references to the built-in local copies of the schemas associated with the various [frameworks](#) (DocBook, DITA, TEI, XHTML, SVG, etc.)

Oxygen XML Developer includes default global catalogs as well as default catalogs for each of the built-in *frameworks*, and you can also create your own.

Oxygen XML Developer looks for catalogs in the following order:

- Global user-defined catalogs that are set in the [XML Catalog preferences page](#).
- User-defined catalogs that are set for each *frameworks* in the **Catalog** tab of the **Document Type** configuration dialog box.
- Default built-in catalogs.

Example:

An *XML Catalog* can be used to map a W3C XML Schema specified with an URN in the `xsi:noNamespaceSchemaLocation` attribute of an XML document to a local copy of the schema.

Considering the following XML document code snippet:

```
<topic xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
      xsi:noNamespaceSchemaLocation="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1">
```

The URN can be resolved to a local schema file with a catalog entry like this:

```
<uri name="urn:oasis:names:tc:dita:xsd:topic.xsd:1.1"
      uri="topic.xsd"/>
```

Related Information:

[XML Catalog Preferences](#) on page 95

Resolving Schema Locations Through XML Catalogs

Schema locations can be mapped using an *XML Catalog*. Oxygen XML Developer resolves the location of a schema in the following order:

- First, it attempts to resolve the schema location as a URI (`uri`, `uriSuffix`, `rewriteUri`, `delegateUri` mappings from the *XML Catalog*). If this succeeds, the process ends here.
- If the [Resolve schema locations also through system mappings option](#) is selected, it attempts to resolve the schema location as a system ID (`system`, `systemSuffix`, `rewriteSuffix`, `rewriteSystem` from the *XML Catalog*). If this succeeds, the process ends here.
- If the [Process "schemaLocation" namespaces through URI mappings for XML Schema option](#) is selected, the target namespace of the imported XML Schema is resolved through URI mappings. If the schema specified in the `schemaLocation` attribute is not resolved successfully, the namespace of the root element is taken into account. If this succeeds, the process ends here.
- If none of these succeeds, the actual [schema location](#) is used.

Related Information:

[Working with XML Catalogs](#) on page 432

Combining XML Content Using DTD Entities and XInclude

When documenting large projects, it is likely that there are multiple people involved. In this case, it is usually more efficient to use a modular approach so that everyone involved in the project can work in parallel. Other advantages of modular documentation include: reusable content possibilities, smaller file units are easier to edit, and better version control.

Two possible solutions for this are to use **DTD Entities** or **XInclude** to combine XML content in a [master file](#). A master document can be created with references to various document parts, users can edit those documents individually, and then apply an XSLT stylesheet over the master document to obtain the output files in various formats (for example, PDF or HTML).

Combining XML Document Content Using DTD Entities

There are two conditions for including a document fragment using DTD entities:

- The master document should declare the DTD to be used, while the external entities should declare the XML fragments to be referenced.

- The referenced documents that contain the fragments cannot also define the DTD because the main document will not be valid. If you want to validate the parts separately you have to [use XInclude](#) for assembling the parts together with the *master file*.

The master document looks like this:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE book SYSTEM "../xml/docbookx.dtd" [
<!ENTITY testing SYSTEM "testing.xml" > ]
>
<book>
<chapter> ...
```

The referenced document (*testing.xml*) looks like this:

```
<section> ... here is the section content ... </section>
```

Note:

The indicated DTD and the element names (*section*, *chapter*) are used here only for illustrating the inclusion mechanism. You can use any DTD and element names you need.

The content from the referenced file (in the example above, it's a section in the *test.xml* file) can be inserted somewhere in the master document:

```
... &testing; ...
```

To obtain output in various formats (for example, PDF or HTML), you simply need to apply an XSLT stylesheet over the master document using a transformation scenario.

Viewing the Expanded Content in Oxygen XML Developer

When a transformation scenario is applied on the *master file*, an intermediary file combines all the referenced content and it will be expanded in the final output. If you want to see how the referenced content will be expanded before applying the transformation create a minimal XSLT stylesheet that simply copies the XML content, then create a transformation scenario that applies the stylesheet over the XML. The XSLT stylesheet would look like this:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
xmlns:xs="http://www.w3.org/2001/XMLSchema"
xmlns:math="http://www.w3.org/2005/ xpath-functions/math"
exclude-result-prefixes="xs math"
version="3.0">
<xsl:template match="node() | @"*>
<xsl:copy>
<xsl:apply-templates select="node() | @"*/>
</xsl:copy>
</xsl:template>
</xsl:stylesheet>
```

Combining XML Documents and Fragments Using XInclude

XInclude is a standard for assembling XML instances into another XML document through inclusion. A [master file](#) can be dynamically created from smaller XML documents without having to physically duplicate the content of the smaller files. The advantage of using XInclude instead of the [DTD Entities method](#) is that each of the assembled documents is permitted to contain a Document Type Declaration (DOCTYPE). This means that each file is a valid XML instance and can be independently validated. It also means that the main document, which includes smaller instances, can be validated without having to remove or comment out the DOCTYPE (as is the case with External Entities).

Enabling XInclude Support in Oxygen XML Developer

The XInclude support in Oxygen XML Developer is enabled by default. It is controlled by the [Enable XInclude processing](#) option in the [XML > XML Parser preferences](#) page. When enabled, Oxygen XML Developer will be able to validate and transform documents comprised of parts added using XInclude.

Example: Using XInclude to Combine Files

A chapter file (`introduction.xml`) looks like this:

```
<?xml version="1.0"?>
<!DOCTYPE chapter PUBLIC "-//OASIS//DTD DocBook XML V4.3//EN"
"http://www.oasis-open.org/docbook/xml/4.3/docbookx.dtd">
<chapter>
  <title>Getting started</title>
  <section>
    <title>Section title</title>
    <para>Para text</para>
  </section>
</chapter>
```

The main article (*master file*) looks like this:

```
<?xml version="1.0"?>
<!DOCTYPE article PUBLIC "-//OASIS//DTD DocBook XML V4.3//EN"
"http://www.docbook.org/xml/4.3/docbookx.dtd"
[ <!ENTITY % xinclude SYSTEM "../frameworks/docbook/dtd/xinclude.mod">
%xinclude;
]>
<article>
  <title>Install guide</title>
  <para>This is the install guide.</para>
  <xi:include xmlns:xi="http://www.w3.org/2001/XInclude"
             href="introduction.xml">
    <xi:fallback>
      <para>
        <emphasis>FIXME: MISSING XINCLUDE CONTENT</emphasis>
      </para>
    </xi:fallback>
  </xi:include>
</article>
```

In this example, note the following:

- The DOCTYPE declaration defines an entity that references a file containing the information to add the *xi* namespace to certain elements defined by the DocBook DTD.
- The href attribute of the *xi:include* element specifies that the `introduction.xml` file will replace the *xi:include* element when the document is parsed.
- If the `introduction.xml` file cannot be found, the parser will use the value of the *xi:fallback* element - a *FIXME* message.

Example: Using XInclude to Combine Fragments of Files

If you want to include only a fragment of a file in the *master file*, the fragment must be contained in a tag having an `xml:id` attribute and you must use an XPointer expression pointing to the `xml:id` value.

Notice: Oxygen XML Developer supports the *XPointer Framework* and the *XPointer element() Scheme*, but it does NOT support the *XPointer xpointer() Scheme*.

For example, if the *master file* is:

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="test.rng" type="application/xml"
schematypens="http://relaxng.org/ns/structure/1.0"?>
<test>
  <xi:include href="a.xml" xpointer="a1"
             xmlns:xi="http://www.w3.org/2001/XInclude"/>
</test>
```

and the file (`a.xml`) is:

```
<?xml version="1.0" encoding="UTF-8"?>
<test>
  <a xml:id="a1">test</a>
</test>
```

after resolving the XPointer reference, the document is:

```
<?xml version="1.0" encoding="UTF-8"?>
<?xml-model href="test.rng" type="application/xml"
schematypens="http://relaxng.org/ns/structure/1.0"?>
<test>
  <a xml:id="a1" xml:base="a.xml">test</a>
</test>
```

Viewing the Expanded Content in Oxygen XML Developer

When a transformation scenario is applied on the *master file*, an intermediary file combines all the referenced content and it will be expanded in the final output. If you want to see how the referenced content will be expanded before applying the transformation, create a minimal XSLT stylesheet that simply copies the XML content, then create a transformation scenario that applies the stylesheet over the XML. The XSLT stylesheet would look like this:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:math="http://www.w3.org/2005/xpath-functions/math"
  exclude-result-prefixes="xs math"
  version="3.0">
  <xsl:template match="node() | @"*>
    <xsl:copy>
      <xsl:apply-templates select="node() | @"*/>
    </xsl:copy>
  </xsl:template>
</xsl:stylesheet>
```

XInclude 1.1 Features

Oxygen XML Developer offers partial support for XInclude 1.1 features. This includes support for fragment identifiers and attribute copying.

- **Fragment Identifiers**

You can `xi:include` a text file and specify the `@fragid` value so that you only get part of that text file in the main document. For some examples and to see how `xi:include` gets expanded when the `@fragid` specifies a line range or character range, see [Textual Inclusion Examples with RFC5147 Fragment Identifiers](#).

- **Attribute Copying**

Any *namespaced* attribute defined on the `xi:include` element will be passed to the root element of the included content.

For example, if you have this:

```
<xi:include href="section2.xml" xmlns:xi="http://www.w3.org/2001/XInclude"
  xml:id="sectInner1" />
```

and `section2.xml` looks like this:

```
<sect2 xmlns="http://docbook.org/ns/docbook" version="5.0"
  xmlns:xlink="http://www.w3.org/1999/xlink" xml:id="section2">
  <title>FS2</title>
  <para>P2</para>
</sect2>
```

then the final processed result will have the original `xml:id="section2"` replaced with the value specified in the *xi:included* section.

For more information, see [Attribute Copying when Processing XML](#). Also, to see more examples, see [Attribute Copying Examples](#).

Related Information:

[W3C Specifications: XML Inclusions \(XInclude\) Version 1.1](#)

Refactoring XML Documents

In the life cycle of XML documents there are instances when the XML structure needs to be changed to accommodate various needs. For example, when an associated schema is updated, an attribute may have been removed, or a new element added to the structure.

These types of situations cannot be resolved with a traditional *Find/Replace* tool, even if the tool accepts regular expressions. The problem becomes even more complicated if an XML document is computed or referenced from multiple modules, since multiple resources need to be changed.

To assist you with these types of refactoring tasks, Oxygen XML Developer includes a specialized **XML Refactoring** tool that helps you manage the structure of your XML documents.

XML Refactoring Tool

The **XML Refactoring** tool is presented in the form of an easy to use wizard that is designed to reduce the time and effort required to perform various structure management tasks. For example, you can insert, delete, or rename an attribute in all instances of a particular element that is found in all documents within your project.

To access the tool, select the  **XML Refactoring** action from one of the following locations:

- The **Tools** menu.
- The **Refactoring** submenu from the contextual menu in the **Project view**.

Note: The predefined refactoring operations are also available from the **Refactoring** submenu in the contextual menu of **Text** mode. This is useful because by selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to skip directly to the wizard page of the appropriate operation and to help you by preconfiguring some of the parameter values. For your convenience, the last 5 operations that were **finished** or **previewed** also appear in the **Refactoring** submenu of the contextual menu in the **Project view**.

XML Refactoring Wizard

The XML Refactoring tool includes the following wizard pages:

Refactoring operations

The first wizard page presents the available operations, grouped by category. To search for an operation, you can use the filter text box at the top of the page.

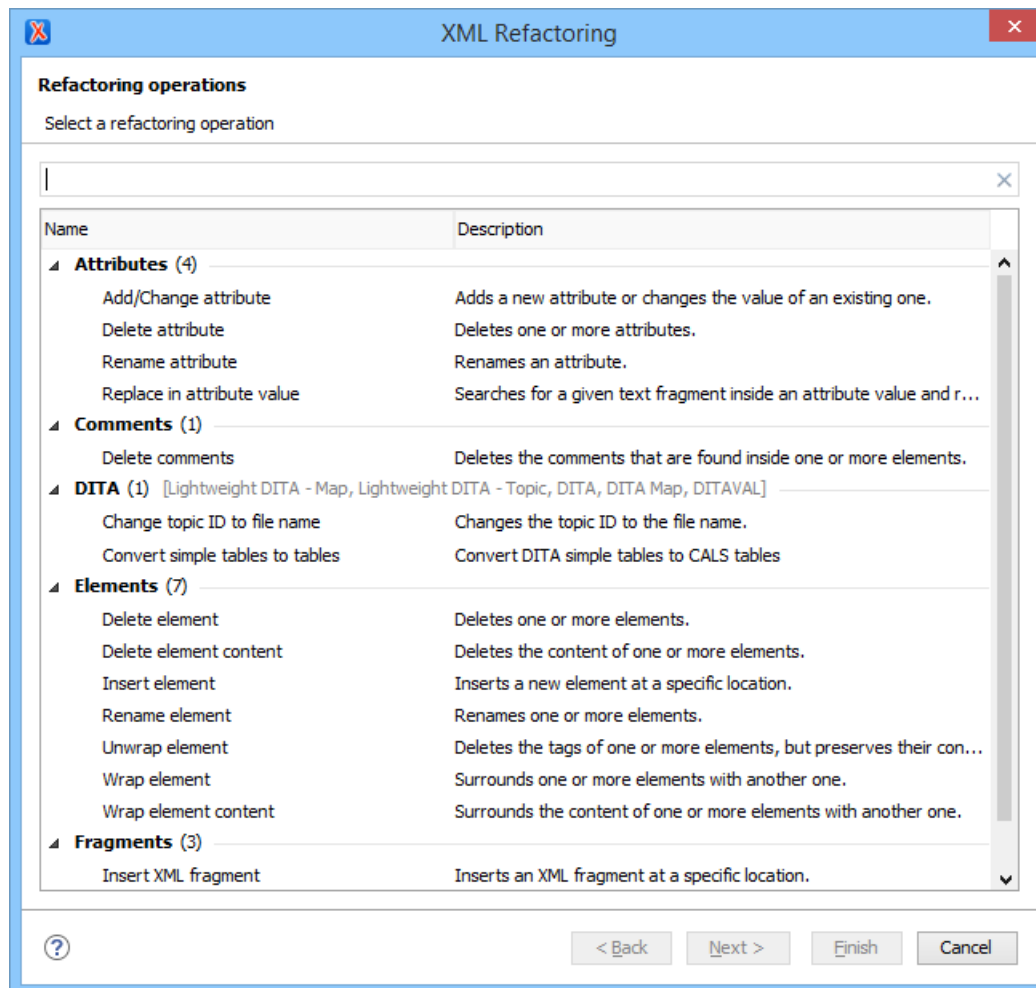


Figure 218: XML Refactoring Wizard

Configure Operation Parameters

The next wizard page allows you to specify the parameters for the refactoring operation. The parameters are specific to the type of refactoring operation that is being performed. For example, to delete an attribute you need to specify the parent element and the qualified name of the attribute to be removed.

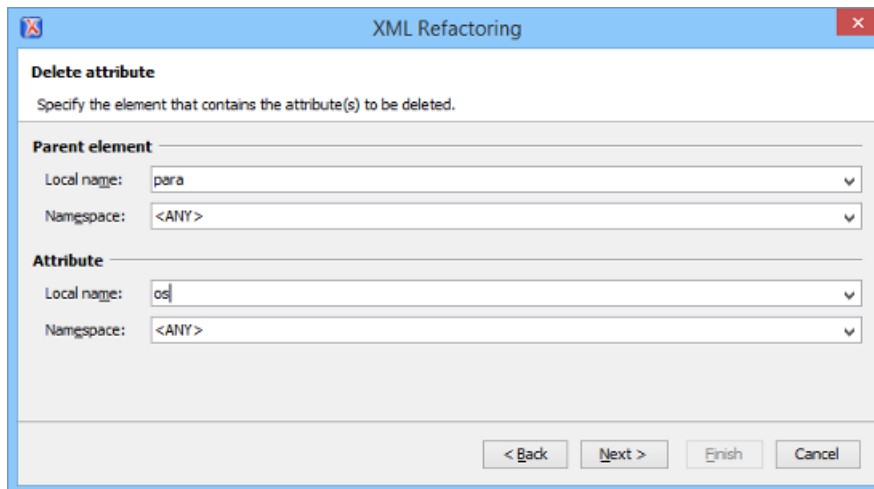


Figure 219: XML Refactoring 2nd Wizard Page (Delete Attribute Operation)

Scope and Filters

The last wizard page allows you to select the set of files that represent the input of the operation.

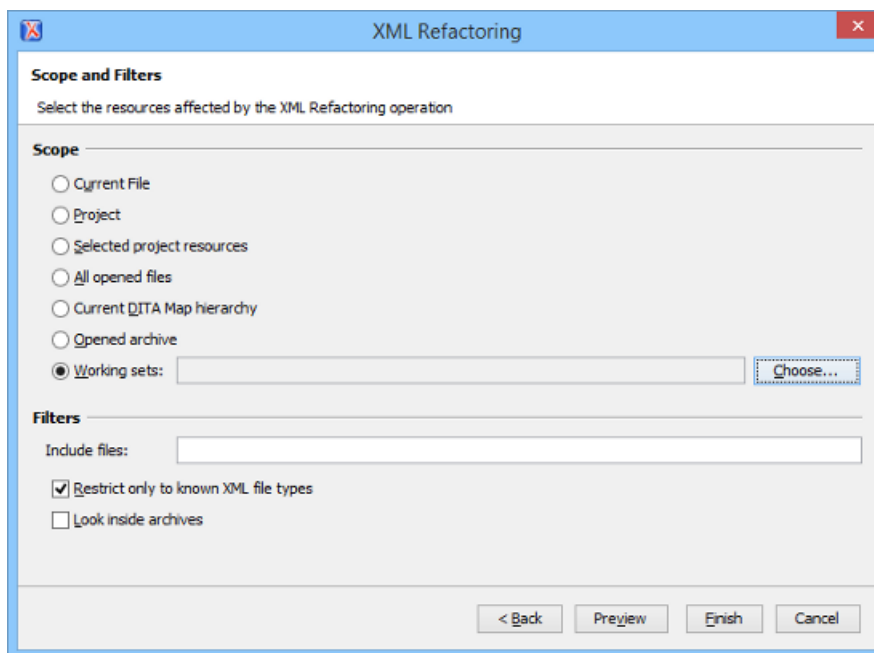


Figure 220: XML Refactoring - Scope and Filters Wizard Page

Scope section

In the **Scope** section, you can select from predefined resource sets (such as the current file, your whole project, the current *DITA map* hierarchy for DITA projects, etc.) or you can define your own set of resources by creating a *working set*.

Filters

The **Filters** section includes the following options:

- **Include files** - Allows you to filter the selected resources by using a file pattern. For example, to restrict the operation to only analyze build files you could use `build*.xml` for the file pattern.

- **Restrict only to known XML file types** - When selected, only resources with a known XML file type will be affected by the operation.
- **Look inside archives** - When selected, the resources inside archives will also be affected.

Preview

You can use the **Preview** button to open a comparison panel where you can review all the changes that will be made by the refactoring operation before applying the changes.

Finish

After clicking the **Finish** button, the operation will be processed and Oxygen XML Developer provides no automatic means for reverting the operations. Any **Undo** action will only revert changes on the current document.



Trouble: If an operation fails, a notification will be displayed in the **Results** panel with some information about the error. For example, if the operation was invoked on a read-only resource, the error will indicate that a read-only file cannot be converted.

Tip: If an operation takes longer than expected you can use the  **Stop** button in the progress bar to cancel the operation.

Predefined Refactoring Operations

The XML Refactoring tool includes a variety of predefined operations that can be used for common refactoring tasks. They are grouped by category in the **Refactoring operations** wizard page. You can also access the operations from the **Refactoring** submenu in the contextual menu of **Text** mode. The operations are also grouped by category in this submenu. When selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to get the names and namespaces of the current element or attribute, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

Tip: Each operation includes a link in the lower part of the wizard that opens the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

The following predefined operations are available:

Refactoring Operations for *Attributes*

Add/Change attribute

Use this operation to change the value of an attribute or insert a new one. This operation allows you to specify the following parameters:

- **Parent element** section
 - **Element** - The parent element of the attribute to be changed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** section
 - **Local name** - The local name of the affected attribute.
 - **Namespace** - The namespace of the affected attribute.
 - **Value** - The value for the affected attribute.
- **Options** section
 - You can choose between one of the following options for the **Operation mode**:
 - **Add the attribute in the parent elements where it is missing**
 - **Change the value in the parent elements where the attribute already exists**
 - **Both**

Convert attribute to element

Use this operation to convert a specified attribute to an element. This operation allows you to specify the following parameters:

- **Parent element** section

- **Element** - The parent element of the attribute to be converted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** section
 - **Local name** - The local name of the affected attribute.
 - **Namespace** - The namespace of the affected attribute.
- **New element** section
 - **Local name** - The local name of the new element.
 - **Namespace** - The namespace of the new element.

Delete attribute

Use this operation to remove one or more attributes. This operation requires you to specify the following parameters:

- **Element** - The parent element of the attribute to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** - The name of the attribute to be deleted.

Rename attribute

Use this operation to rename an attribute. This operation requires you to specify the following parameters:

- **Element** - The parent element of the attribute to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** - The name of the attribute to be renamed.
- **New local name** - The new local name of the attribute.

Replace in attribute value

Use this operation to search for a text fragment inside an attribute value and change the fragment to a new value. This operation allows you to specify the following parameters:

- **Target attribute** section
 - **Element** - The parent element of the attribute to be modified, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
 - **Attribute** - The name of the attribute to be modified.
- **Find / Replace** section
 - **Find** - The text fragments to find. You can use Perl-like regular expressions.
 - **Replace with** - The text fragment to replace the target with. This parameter can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.

Refactoring Operations for *Comments*

Delete comments

Use this operation to delete comments from one or more elements. This operation requires you specify the following parameter:

- **Element** - The target element (or elements) for which comments will be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

Note: Comments that are outside the root element will not be deleted because the *serializer* preserves the content before and after the root.

Refactoring Operations for *DITA*

Change topic ID to file name

Use this operation to change the ID of a topic to be the same as its file name.

Convert CALS tables to simple tables

Use this operation to convert DITA CALS tables to simple tables.

Convert conrefs to conkeyrefs

Use this operation to convert `conref` attributes to `conkeyref` attributes.

Convert simple tables to CALS tables

Use this operation to convert DITA simple tables to CALS tables.

Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task).

Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

All of these DITA refactoring actions allow you to choose a scope for the operation and some filters:

- **Scope** - Select from a variety of options to define the scope for which resources will be affected by the operation. For example, you can choose to affect all resources in the **Project**, **All opened files**, **Current DITA map hierarchy**, or just the **Current file**.
- **Filters** section
 - **Include files** - Specifies files to be excluded from the operation. You can specify multiple files by separating them with commas and the patterns can include wildcards (such as `*` or `?`).
 - **Restrict to known XML file types only** - Excludes non-XML file types from the operation.
 - **Look inside archives** - If this option is selected, the scope of the operation will include files inside archives.

Refactoring Operations for *Elements*

Delete element

Use this operation to delete elements. This operation requires you to specify the following parameter:

- **Element** - The target element to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

Delete element content

Use this operation to delete the content of elements. This operation requires you to specify the following parameter:

- **Element** - The target element whose content is to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

Insert element

Use this operation to insert new elements. This operation allows you to specify the following parameters:

- **Element** section
 - **Local name** - The local name of the element to be inserted.

- **Namespace** - The namespace of the element to be inserted.
- **Location** section
 - **XPath** - An XPath expression that identifies an existing element to which the new element is relative, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
 - **Position** - The position where the new element will be inserted, in relation to the specified existing element. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.

Rename element

Use this operation to rename elements. This operation requires you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **New local name** - The new local name of the element.

Unwrap element

Use this operation to remove the surrounding tags of elements, while keeping the content unchanged. This operation requires you to specify the following parameter:

- **Target elements (XPath)** - The target elements whose surrounding tags will be removed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.

Wrap element

Use this operation to surround elements with element tags. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be surrounded with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **Wrapper element** section
 - **Local name** - The local name of the *Wrapper element*.
 - **Namespace** - The namespace of the *Wrapper element*.

Wrap element content

Use this operation to surround the content of elements with element tags. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements whose content will be surrounded with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **Wrapper element** section
 - **Local name** - The local name of the *Wrapper element* that will surround the content of the target.
 - **Namespace** - The namespace of the *Wrapper element* that will surround the content of the target.

Refactoring Operations for *Fragments*

Insert XML fragment

Use this operation to insert an XML fragment. This operation allows you to specify the following:

- **XML Fragment** - The XML fragment to be inserted.
- **Location** section
 - **XPath** - An XPath expression that identifies an existing element to which the inserted fragment is relative, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
 - **Position** - The position where the fragment will be inserted, in relation to the specified existing element. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.

Replace element content with XML fragment

Use this operation to replace the content of elements with an XML fragment. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements whose content will be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **XML Fragment** - The XML fragment with which to replace the content of the target element.

Replace element with XML fragment

Use this operation to replace elements with an XML fragment. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **XML Fragment** - The XML fragment with which to replace the target element.

Refactoring Operations for JATSKit

Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Use this operation to add an NLM 'BITS' 2.0 DOCTYPE declaration.

Add Blue DOCTYPE - NISO JATS Publishing 1.1

Use this operation to add a JATS 'Blue' 1.1 DOCTYPE declaration.

Normalize IDs

Use this operation to normalize assigned IDs and assigned IDs to elements that are missing them.

All of these JATSKit refactoring actions allow you to choose a scope for the operation and some filters:

- **Scope** - Select from a variety of options to define the scope for which resources will be affected by the operation. For example, you can choose to affect all resources in the **Project**, **All opened files**, or just the **Current file**.
- **Filters** section
 - **Include files** - Specifies files to be excluded from the operation. You can specify multiple files by separating them with commas and the patterns can include wildcards (such as * or ?).
 - **Restrict to known XML file types only** - Excludes non-XML file types from the operation.
 - **Look inside archives** - If this option is selected, the scope of the operation will include files inside archives.

Additional Notes

Note: There are some operations that allow <ANY> for the **local name** and **namespace** parameters. This value can be used to select an element or attribute regardless of its local name or namespace. Also, the <NO_NAMESPACE> value can be used to select nodes that do not belong to a namespace.

Note: Some operations have parameters that accept XPath expressions to match elements or attributes. In these XPath expressions you can only use the prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) page. This preferences page can be easily opened by clicking the link in the note (**Each prefix used in an XPath expression must be declared in the Default prefix-namespace mappings section**) at the bottom of the **Configure Operation Parameters** wizard page.

Custom Refactoring Operations

While Oxygen XML Developer includes a variety of predefined XML refactoring operations to help you accomplish particular tasks, you can also create custom operations according to your specific needs. For example, you could create a custom refactoring operation to convert an attribute to an element and insert the element as the first child of the parent element.

An XML Refactoring operation is defined as a pair of resources:

- An *XQuery Update script* or *XSLT stylesheet* that Oxygen XML Developer will run to refactor the XML files.
- An *XML Operation Descriptor* file that contains information about the operation (such as the name, description, and parameters).

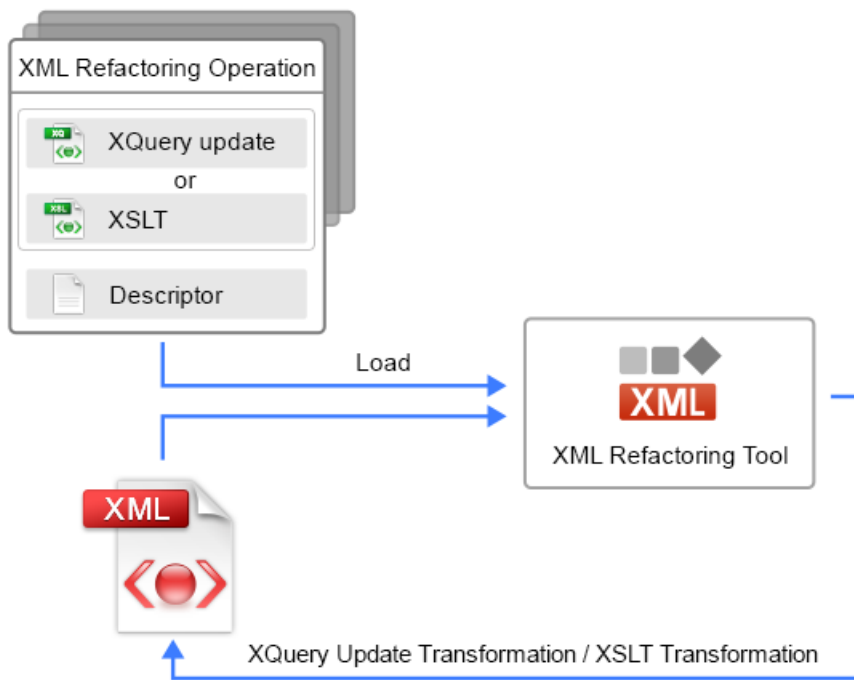


Figure 221: Diagram of an XML Refactoring Operation

All the defined custom operations are loaded by the **XML Refactoring Tool** and presented in the [Refactoring Operations wizard page](#), along with the predefined built-in operations.

After the user chooses an operation and specifies its parameters, Oxygen XML Developer processes an XQuery Update or XSLT transformation over the input file. This transformation is executed in a **safe mode**, which implies the following:

- When loading the document:
 - The **XInclude** mechanism is disabled. This means that the resources included by using XInclude will not be visible in the transformation.
 - The DTD entities will be processed without being expanded.
 - The associated DTD will be not loaded, so the default attributes declared in the DTD will not be visible in the transformation.
- When saving the updated XML document:
 - The DOCTYPE will be preserved.

Note: This can be changed using [Saxon extension functions in XSLT](#).

 - The DTD entities will be preserved as they are in the original document when the document is saved.
 - The attribute values will be kept in their original form without being normalized.
 - The spaces between attributes are preserved. Basically, the spaces are lost by a regular XML serialization since they are not considered important.

The result of this transformation overrides the initial input file.

Note: To achieve some of the previous goals, the XML Refactoring mechanism adds several attributes that are interpreted internally. The attributes belong to the `http://www.oxygenxml.com/ns/xmlRefactoring/additional_attributes` namespace. These attributes should not be taken into account when processing the input XML document since they are discarded when the transformed document is serialized.

Restriction: *Comments or processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation. In other words, XML Refactoring operations can only be applied on the root element and the nodes inside it. However, as a work around to this limitation, you can use [Saxon extension functions and the XSLT stylesheet method](#) to implement the new custom XML refactoring operation.

Creating a Custom Refactoring Operation

To create a custom refactoring operation, follow these steps:

1. Create an [XQuery Update script](#) or [XSLT stylesheet file](#).
2. Create an **XML Refactoring Operation Descriptor** file contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#).
3. Store both files in [one of the locations that Oxygen XML Developer](#) scans when loading the custom operations.

Result: Once you run the **XML Refactoring** tool again, the custom operation appears in [the Refactoring Operations wizard page](#).

Related Information:

[Storing and Sharing Refactoring Operations](#) on page 455

Custom Refactoring Script

The first step in creating a custom refactoring operation is to create an [XQuery Update script](#) or [XSLT stylesheet](#) that is needed to process the refactoring operations. The easiest way to create this script file is to use the **New** document wizard to create a new **XQuery** or **XSLT** file and you can use our [XQuery method example](#) or [XSLT method example](#) to help you with the content.

There are cases when it is necessary to add parameters in the [XQuery script](#) or [XSLT stylesheet](#). For instance, if you want to rename an element, you may want to declare an external parameter associated with the name of the element to be renamed. To allow you to specify the value for these parameters, they need to be declared in the *refactoring operation descriptor file* that is associated with this operation.

Note: The XQuery Update processing is disabled by default in Oxygen XML Developer. Thus, if you want to create or edit an XQuery Update script you have to enable this mechanism by creating an [XQuery transformation scenario](#) and choose **Saxon EE** as the transformation engine. Also, you need to make sure the [Enable XQuery update](#) option is selected in the [Saxon processor advanced options](#).

Note: If you are using an XSLT file, XPath expressions that are passed as parameters will automatically be rewritten to conform with the mapping of the namespace prefixes declared in the [XML /XSLT-FO-XQuery / XPath preferences page](#).

The next step in creating a custom refactoring operation is to create an **XML Refactoring Operation Descriptor** file contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#).

Related Information:

[XQuery Update Script for Creating a Custom Operation](#) on page 449

[XSLT Stylesheet for Creating a Custom Operation](#) on page 451

Custom Refactoring Operation Descriptor File

The second step in creating a custom refactoring operation is to create an operation descriptor file. The easiest way to do this is to use the **New** document wizard and choose the **XML Refactoring Operation Descriptor** template.

Introduction to the Descriptor File

This file contains information (such as name, description, and id) that is necessarily when loading an XML Refactoring operation . It also contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#) that is associated with the particular operation through the `script` element.

You can specify a category for your custom operations to logically group certain operations. The category element is optional and if it is not included in the descriptor file, the default name of the category for the custom operations is *Other operations*.

The descriptor file is edited and validated against the following schema: `frameworks/xml_refactoring/operation_descriptor.xsd`.

Declaring Parameters in the Descriptor File

If the XQuery Update script or XSLT stylesheet includes parameters, they should be declared in the **parameters** section of the descriptor file. All the parameters specified in this section of the descriptor file will be displayed in the **XML Refactoring** tool within the [Configure Operation Parameters wizard page](#) for that particular operation.

The value of the first description element in the **parameters** section will be displayed at the top of the [Configure Operation Parameters wizard page](#).

To declare a parameter, specify the following information:

- **label** - This value is displayed in the user interface for the parameter.
- **name** - The parameter name used in the XQuery Update script or XSLT stylesheet and it should be the same as the one declared in the script.
- **type** - Defines the type of the parameter and how it will be rendered. There are several types available:
 - TEXT - Generic type used to specify a simple text fragment.
 - XPATH - Type of parameter whose value is an XPath expression. For this type of parameter, Oxygen XML Developer will use a text input with corresponding content completion and syntax highlighting.

Note: The value of this parameter is transferred as plain text to the XQuery Update or XSLT transformation without being evaluated. You should evaluate the XPath expression inside the XQuery Update script or XSLT stylesheet. For example, you could use the `saxon:evaluate` Saxon extension function.

Note: A relative XPath expression is converted to an absolute XPath expression by adding `//` before it (`//XPathExp`). This conversion is done before transferring the XPath expression to the XML refactoring engine.

Note: When writing XPath expressions, you can only use prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) options page.

- NAMESPACE - Used for editing namespace values.
- REG_EXP_FIND - Used when you want to match a certain text by using Perl-like regular expressions.
- REG_EXP_REPLACE - Used along with REG_EXP_FIND to specify the replacement string.
- XML_FRAGMENT - This type is used when you want to specify an XML fragment. For this type, Oxygen XML Developer will display a text area specialized for inserting XML documents.
- NC_NAME - The parameter for NC_NAME values. It is useful when you want to specify the local part of a [QName](#) for an element or attribute.
- BOOLEAN - Used to edit boolean parameters.
- TEXT_CHOICE - It is useful for parameters whose value should be from a list of possible values. Oxygen XML Developer renders each possible value as a radio button option.
- **description** - The description of the parameter. It is used by the application to display a tooltip when you hover over the parameter.
- **possibleValues** - Contains the list with possible values for the parameter and you can specify the default value, as in the following example:

```
<possibleValues onlyPossibleValuesAllowed="true">
  <value name="before">Before</value>
  <value name="after" default="true">After</value>
  <value name="firstChild">First child</value>
  <value name="lastChild">Last child</value>
</possibleValues>
```

Specialized Parameters to Match Elements or Attributes

If you want to match elements or attributes, you can use some specialized parameters, in which case Oxygen XML Developer will propose all declared elements or attributes based on the schema associated with the currently edited file. The following specialized parameters are supported:

elementLocation

This parameter is used to match elements. For this type of parameter, the application displays a text field where you can enter the element name or an XPath expression. The text from the `label` attribute is displayed in the application as the label of the text field. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If the value of the `useCurrentContext`

attribute is set to **true**, the element name from the cursor position is used as proposed values for this parameter.

Example of an `elementLocation`:

```
<elementLocation name="elem_loc" useCurrentContext="false">
  <element label="Element location">
    <description>Element location description.</description>
  </element>
</ ElementLocation>
```

attributeLocation

This parameter is used to match attributes. For this type of parameter, the application displays two text fields where you can enter the parent element name and the attribute name (both text fields accept XPath expressions for a finer match). The text from the `label` attributes is displayed in the application as the label of the associated text fields. The name attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. The value of this parameter is an XPath expression that is computed by using the values of the expression from the `element` and `attribute` text fields. For example, if `section` is entered for the element and `title` is entered for the attribute, the XPath expression would be computed as `//section/@title`. If the value of the `useCurrentContext` attribute is set to `true`, the element and attribute name from the cursor position is used as proposed values for the operation parameters.

Example of an `attributeLocation`:

```
<attributeLocation name="attr_xpath" useCurrentContext="true">
  <element label="Element path">
    <description>Element path description.</description>
  </element>
  <attribute label="Attribute" >
    <description>Attribute path description.</description>
  </attribute>
</ AttributeLocation>
```

elementParameter

This parameter is used to specify elements by local name and namespace. For this type of parameter, the application displays two combo boxes with elements and namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as label of the associated combo. The name attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If you specify the `allowsAny` attribute, the application will propose `<ANY>` as a possible value for the **Name** and **Namespace** combo boxes. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the element name and namespace from the cursor position is used as proposed values for the operation parameters.

Example of an `elementParameter`:

```
<elementParameter id="elemID" useCurrentContext="true">
  <localName label="Name" name="element_localName" allowsAny="true">
    <description>Local name of the parent element.</description>
  </localName>
  <namespace label="Namespace" name="element_namespace" allowsAny="true">
    <description>Local name of the parent element</description>
  </namespace>
</elementParameter>
```

attributeParameter

This parameter is used to specify attributes by local name and namespace. For this type of parameter, the application displays two combo boxes with attributes and their namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as the label of the associated combo box. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the attribute name and namespace from the cursor position is used as proposed values for the operation parameters.

Note: An `attributeParameter` is dependant upon an `elementParameter`. The list of attributes and namespaces are computed based on the selection in the `elementParameter` combo boxes.

Example of an `attributeParameter`:

```
<attributeParameter dependsOn="elemID" useCurrentContext="true">
```

```

<localName label="Name" name="attribute_localName">
  <description>The name of the attribute to be converted.</description>
</localName>
<namespace label="Namespace" name="attribute_namespace" allowsAny="true">
  <description>Namespace of the attribute to be converted.</description>
</namespace>
</attributeParameter>

```

Note: All predefined operations are loaded from the `[OXYGEN_INSTALL_DIR]/refactoring` folder.

Related Information:

[Example of an Operation Descriptor File with an XSLT Stylesheet](#) on page 453

[Example of an Operation Descriptor File with an XQuery Update script](#) on page 450

XQuery Update Script for Creating a Custom Operation

To demonstrate creating a custom operation, consider that we have a task where we need to convert an attribute into an element and insert it inside another element. A specific example would be if you have a project with a variety of image elements where a deprecated `alt` attribute was used for the description and you want to convert all instances of that attribute into an element with the same name and insert it as the first child of the image element.

Thus, our task is to convert this attribute into an element with the same name and insert it as the first child of the image element.

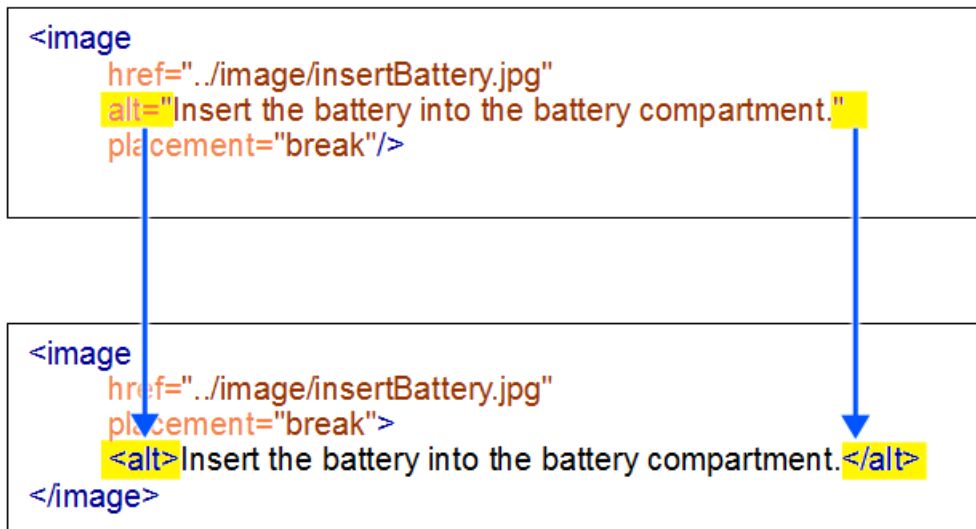


Figure 222: Example: Custom XML Refactoring Operation

We can use an XQuery Update script to implement the new custom XML refactoring operation. The second requirement is an [XML Refactoring operation descriptor file](#) that contains the path to the XQuery Update script.

Restriction: There is a limitation to using an XQuery script in that *comments* or *processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation. In other words, XML Refactoring operations can only be performed on *comments* or *processing instructions* that are inside the root element. However, as a work around to this limitation, you can use [Saxon extension functions and the XSLT stylesheet method](#) to implement the new custom XML refactoring operation.

Example of an XQuery Update Script for Creating a Custom Operation to *Convert an Attribute to an Element*

The XQuery Update script does the following:

- Iterates over all elements from the document that have the specified local name and namespace.
- Finds the attribute that will be converted to an element.
- Computes the *QName* of the new element to be inserted and inserts it as the first child of the parent element.

(:


```

XQuery document used to implement 'Convert attribute to element'
operation from XML Refactoring tool.
:)

declare namespace output = "http://www.w3.org/2010/xslt-xquery-serialization";
declare option output:method "xml";
declare option output:indent "no";

(: Local name of the attribute's parent element. :)
declare variable $element_localName as xs:string external;

(: Namespace of the attribute's parent element. :)
declare variable $element_namespace as xs:string external;

(: The local name of the attribute to be converted :)
declare variable $attribute_localName as xs:string external;

(: The namespace of the attribute to be converted :)
declare variable $attribute_namespace as xs:string external;

(: Local name of the new element. :)
declare variable $new_element_localName as xs:string external;

(: Namespace of the new element. :)
declare variable $new_element_namespace as xs:string external;

(: Convert attribute to element:)
for $node in /**
(: Find the attribute to convert :)
let $attribute :=
  $node/@*[local-name() = $attribute_localName and
    ($attribute_namespace = '<ANY>' or $attribute_namespace = namespace-uri())]

(: Compute the prefix for the new element to insert :)
let $prefix :=
  for $p in in-scope-prefixes($node)
  where $new_element_namespace = namespace-uri-for-prefix($p, $node)
  return $p

(: Compute the qname for the new element to insert :)
let $new_element_qName :=
  if (empty($prefix) or $prefix[1] = '') then $new_element_localName
  else $prefix[1] || ':' || $new_element_localName

where ($'<ANY>' = $element_localName or local-name($node) = $element_localName)
and
($element_namespace = '<ANY>' or $element_namespace = namespace-uri($node))

return
  if (exists($attribute)) then
    (insert node element {QName($new_element_namespace, $new_element_qName)}
     {string($attribute)} as first into $node,
     delete node $attribute)
  else ()

```

Example of an Operation Descriptor File That References the XQuery Script for Creating a Custom Operation to Convert an Attribute to an Element

After you have developed the XQuery script, you have to create an XML Refactoring operation descriptor. This descriptor is used by the application to load the operation details such as name, description, or parameters.

```

<?xml version="1.0" encoding="UTF-8"?>

<refactoringOperationDescriptor
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns="http://www.oxygenxml.com/ns/xmlRefactoring"
  id="convert-attribute-to-element"
  name="Convert attribute to element">
  <description>Converts the specified attribute to an element.
    The new element will be inserted as first child of the attribute's
    parent element.</description>
  <!-- For the XSLT stylesheet option uncomment the following line and comment
    the line referring the XQuery Update script -->
  <!-- <script type="XSLT" href="convert-attribute-to-element.xsl"/> -->
  <script type="XQUERY_UPDATE" href="convert-attribute-to-element.xq"/>
  <parameters>
    <description>Specify the attribute to be converted to element.</description>
    <section label="Parent element">
      <elementParameter id="elemID">
        <localName label="Name" name="element_localName" allowsAny="true">
          <description>Local name of the parent element.</description>
        </localName>
        <namespace label="Namespace" name="element_namespace" allowsAny="true">
          <description>Local name of the parent element</description>
        </namespace>
      </elementParameter>
    </section>
    <section label="Attribute">
      <attributeParameter dependsOn="elemID">
        <localName label="Name" name="attribute_localName">

```



```

<description>Name of the attribute to be converted.</description>
</localName>
<namespace label="Namespace" name="attribute_namespace" allowsAny="true">
  <description>Namespace of the attribute to be converted.</description>
</namespace>
</attributeParameter>
</section>
<section label="New element">
  <elementParameter>
    <localName label="Name" name="new_element_localName">
      <description>The name of the new element.</description>
    </localName>
    <namespace label="Namespace" name="new_element_namespace">
      <description>The namespace of the new element.</description>
    </namespace>
  </elementParameter>
</section>
</parameters>
</refactoringOperationDescriptor>

```

Results

After you have created these files, copy them into a folder scanned by Oxygen XML Developer when it loads the custom operation. When the XML Refactoring tool is started again, you will see the created operation.

Since various parameters can be specified, this custom operation can also be used for other similar tasks. The following image shows the parameters that can be specified in our example of the custom operation to convert an attribute to an element:

Figure 223: Example: XML Refactoring Wizard for a Custom Operation

XSLT Stylesheet for Creating a Custom Operation

To demonstrate creating a custom operation, consider that we have a task where we need to convert an attribute into an element and insert it inside another element. A specific example would be if you have a project with a variety of `image` elements where a deprecated `alt` attribute was used for the description and you want to convert all instances of that attribute into an element with the same name and insert it as the first child of the `image` element.

Thus, our task is to convert this attribute into an element with the same name and insert it as the first child of the `image` element.

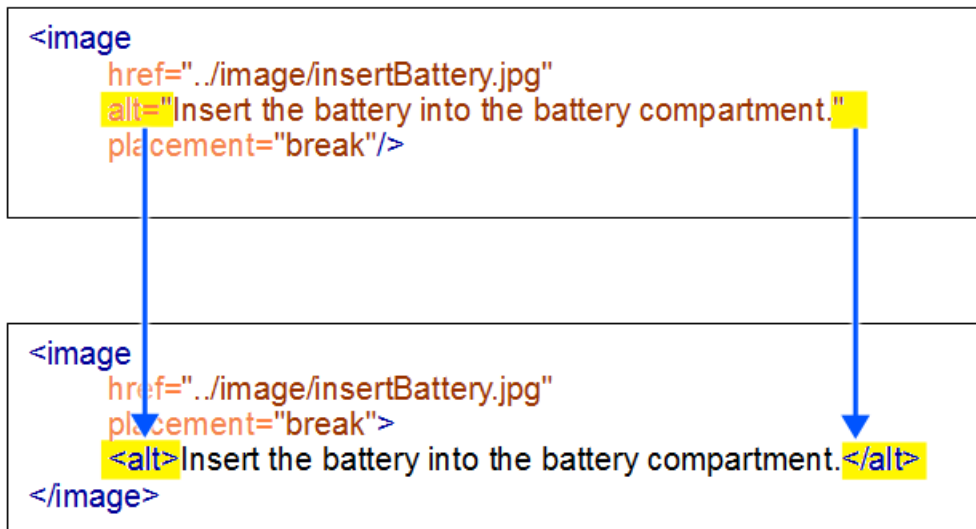


Figure 224: Example: Custom XML Refactoring Operation

We can use an XSLT stylesheet to implement the new custom XML refactoring operation. The second requirement is an [XML Refactoring operation descriptor file](#) that contains the path to the XSLT stylesheet.

Example of an XSLT Script for Creating a Custom Operation to *Convert an Attribute to an Element*

The XSLT stylesheet does the following:

- Iterates over all elements from the document that have the specified local name and namespace.
- Finds the attribute that will be converted to an element.
- Adds the new element as the first child of the parent element.

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  exclude-result-prefixes="xs"
  xmlns:xr="http://www.oxygenxml.com/ns/xmlRefactoring"
  version="2.0">

  <xsl:import
    href="http://www.oxygenxml.com/ns/xmlRefactoring/resources/commons.xsl" />

  <xsl:param name="element_localName" as="xs:string" required="yes"/>
  <xsl:param name="element_namespace" as="xs:string" required="yes"/>
  <xsl:param name="attribute_localName" as="xs:string" required="yes"/>
  <xsl:param name="attribute_namespace" as="xs:string" required="yes"/>
  <xsl:param name="new_element_localName" as="xs:string" required="yes"/>
  <xsl:param name="new_element_namespace" as="xs:string" required="yes"/>

  <xsl:template match="node() | @*">
    <xsl:copy>
      <xsl:apply-templates select="node() | @*" />
    </xsl:copy>
  </xsl:template>
  <xsl:template match="//*[xr:check-local-name($element_localName, ., true())
    and
      xr:check-namespace-uri($element_namespace, .)]">

    <xsl:variable name="attributeToConvert"
      select="*[xr:check-local-name($attribute_localName, ., true())
      and
        xr:check-namespace-uri($attribute_namespace, .)]"/>

    <xsl:choose>
      <xsl:when test="empty($attributeToConvert)">
        <xsl:copy>
          <xsl:apply-templates select="node() | @*" />
        </xsl:copy>
      </xsl:when>
      <xsl:otherwise>
        <xsl:copy>
          <xsl:for-each select="*[empty(. intersect $attributeToConvert)]">
            <xsl:copy-of select="."/>
          </xsl:for-each>
          <!-- The new element namespace -->

```

```

        <xsl:variable name="nsURI" as="xs:string">
            <xsl:choose>
                <xsl:when test="$new_element_namespace eq $xr:NO-NAMESPACE">
                    <xsl:value-of select="''"/>
                </xsl:when>
                <xsl:otherwise>
                    <xsl:value-of select="$new_element_namespace"/>
                </xsl:otherwise>
            </xsl:choose>
        </xsl:variable>
        <xsl:element name="{ $new_element_localName }" namespace="{ $nsURI }">
            <xsl:value-of select="$attributeToConvert"/>
        </xsl:element>
        <xsl:apply-templates select="node()" />
    </xsl:copy>
</xsl:otherwise>
</xsl:choose>
</xsl:template>
</xsl:stylesheet>

```

Note: The XSLT stylesheet imports a module library that contains utility functions and variables. The location of this module is resolved via an [XML Catalog](#) set in the XML Refactoring [framework](#).

Example of an Operation Descriptor File That References the XSLT Stylesheet for Creating a Custom Operation to Convert an Attribute to an Element

After you have developed the XSLT stylesheet, you have to create an XML Refactoring operation descriptor. This descriptor is used by the application to load the operation details such as name, description, or parameters.

```

<?xml version="1.0" encoding="UTF-8"?>

<refactoringOperationDescriptor
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xmlns="http://www.oxygenxml.com/ns/xmlRefactoring"
  id="convert-attribute-to-element"
  name="Convert attribute to element">
  <description>Converts the specified attribute to an element.
    The new element will be inserted as first child of the attribute's
    parent element.</description>
  <!-- For the XSLT stylesheet option uncomment the following line and comment
    the line referring the XQuery Update script -->
  <!-- <script type="XSLT" href="convert-attribute-to-element.xsl"/> -->
  <script type="XQUERY_UPDATE" href="convert-attribute-to-element.xq"/>
  <parameters>
    <description>Specify the attribute to be converted to element.</description>
    <section label="Parent element">
      <elementParameter id="elemID">
        <localName label="Name" name="element_localName" allowsAny="true">
          <description>Local name of the parent element.</description>
        </localName>
        <namespace label="Namespace" name="element_namespace" allowsAny="true">
          <description>Local name of the parent element</description>
        </namespace>
      </elementParameter>
    </section>
    <section label="Attribute">
      <attributeParameter dependsOn="elemID">
        <localName label="Name" name="attribute_localName">
          <description>Name of the attribute to be converted.</description>
        </localName>
        <namespace label="Namespace" name="attribute_namespace" allowsAny="true">
          <description>Namespace of the attribute to be converted.</description>
        </namespace>
      </attributeParameter>
    </section>
    <section label="New element">
      <elementParameter>
        <localName label="Name" name="new_element_localName">
          <description>The name of the new element.</description>
        </localName>
        <namespace label="Namespace" name="new_element_namespace">
          <description>The namespace of the new element.</description>
        </namespace>
      </elementParameter>
    </section>
  </parameters>
</refactoringOperationDescriptor>

```

Note: If you are using an XSLT file, the line with the script element would look like this:

```
<script type="XSLT" href="convert-attribute-to-element.xsl"/>
```

Results

After you have created these files, copy them into a folder [scanned by Oxygen XML Developer when it loads the custom operation](#). When the XML Refactoring tool is started again, you will see the created operation.

Since various parameters can be specified, this custom operation can also be used for other similar tasks. The following image shows the parameters that can be specified in our example of the custom operation to convert an attribute to an element:

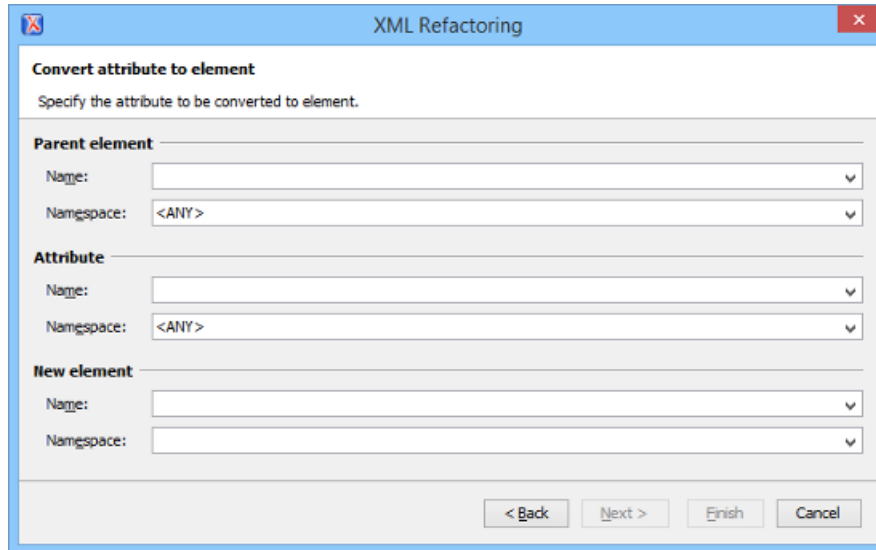


Figure 225: Example: XML Refactoring Wizard for a Custom Operation

Using Saxon Extension Functions to Allow Custom Refactoring Operations to Read and Modify Content Outside the Root Node

One advantage to using an XSLT stylesheet is that there is limitation when using an [XQuery Update script](#) in that refactoring operations can only be performed on *comments* or *processing instructions* that are inside the root element. Thus, using the XQuery method, *comments* or *processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation.

The XSLT stylesheet method offers a work around to this limitation through the use of some Saxon extension functions.

To illustrate the use of these functions, consider the following sample XML file:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->
<?pi before root ?>
<root>
  <child></child>
</root>
<!-- comment after root -->
<?pi after root ?>
```

The following Saxon extension functions can be used to read and modify content outside the root node:

Note: They belong to the `http://www.oxygenxml.com/ns/xmlRefactoring/functions` namespace.

- **get-content-after-root()** - Returns the content after root as `xs:string`.

For the XML above, the call of this function will return the following string value:

```
<!-- comment after root -->
<?pi after root ?>
```

- **set-content-after-root(xs:string)** - Updates the content that will be serialized in the refactored document after the root node.

The function call `set-content-after-root('<!-- Inserted comment -->')` will result in replacing the nodes after the root element with the comment passed as string argument. The XML document will be modified as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->
<?pi before root ?>
<root>
  <child></child>
</root><!-- Inserted comment -->
```

- **get-content-before-root()** - Returns the content before root as `xs:string`.

For the XML above, the call of this function will return the following string value:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->
<?pi before root ?>
```

- **set-content-before-root(xs:string)** - Updates the content that will be serialized in the refactored document after the root node.

The function call `set-content-before-root('<!-- Inserted comment -->')` will result in replacing the nodes before the root element with the comment passed as string argument. The XML document will be modified as follows:

```
<!-- Inserted comment --><root>
  <child></child>
</root>
<!-- comment after root -->
<?pi after root ?>
```

XSLT Example:

To process content after the root node, the XSLT would look like this:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema" exclude-result-prefixes="xs"
  xmlns:xrf="http://www.oxygenxml.com/ns/xmlRefactoring/functions" version="3.0">
  <xsl:template match="/">
    <!-- The comment content that will be inserted after the root element -->
    <xsl:variable name="commentAsText">&lt;!-- COMMENT ADDED FROM XR OPERATION-->
    </xsl:variable>
    <!-- Retrieve the content after the root element as is -->
    <xsl:variable name="after-root-content" as="xs:string"
      select="xrf:get-content-after-root()" />

    <xsl:variable name="processedContent"
      select="concat($after-root-content, $commentAsText)" />

    <!-- Update the content after the root element -->
    <xsl:value-of select="xrf:set-content-after-root($processedContent)" />

    <xsl:apply-templates/>
  </xsl:template>

  <xsl:template match="node() | @*">
    <xsl:copy>
      <xsl:apply-templates select="node() | @*" />
    </xsl:copy>
  </xsl:template>
</xsl:stylesheet>
```

Note: The above XSLT retrieves the nodes after the root element as string, appends a new comment, and then sets back the updated content into the XML document.

Storing and Sharing Refactoring Operations

Oxygen XML Developer scans the following locations when looking for XML Refactoring operations to provide flexibility:

- A refactoring folder, created inside a directory that is associated to a *framework* you are customizing. To associate the parent directory to the *framework*, you need to add it in the **Classpath tab of the Document type configuration dialog box**.
- A folder that you specify in the **Load additional refactoring operations from text box** in the **XML Refactoring preferences page**.

Note: If you share a project with your team, you can also share the custom operation by doing the following:

1. Save the custom operation in a folder that is part of your project.
 2. Switch the **XML Refactoring** option page to [project level](#):
 - a. Open the **Preferences** dialog box (**Options > Preferences**) and go to **XML > XML Refactoring**.
 - b. Select **Project Options** at the bottom of the dialog box.
 3. In the **Load additional refactoring operations from text box**, use the `${pd}` editor variable so that the folder path is declared relative to the project.
- A folder specified by the [XML Refactoring Operations Plugin Extension](#).
 - The refactoring folder from the Oxygen XML Developer installation directory (`[OXYGEN_INSTALL_DIR]/refactoring/`).

Sharing Custom Refactoring Operations

The purpose of Oxygen XML Developer scanning multiple locations for the XML Refactoring operations is to provide more flexibility for developers who want to share the refactoring operations with the other team members. Depending on your particular use case, you can attach the custom refactoring operations to other resources, such as [framework](#) or projects.

After storing custom operations, you can share them with other users by sharing the resources.

Localizing XML Refactoring Operations

Oxygen XML Developer includes localization support for the XML refactoring operations.

The translation keys for the built-in refactoring operations are located in `[OXYGEN_INSTALL_DIR]/refactoring/i18n/translation.xml`.

The localization support is also available for custom refactoring operations. The following information can be translated:

- The operation name, description, and category.
- The description of the parameters element.
- The label, description, and possibleValues for each parameter.

Translated refactoring information uses the following form:

```
${i18n(translation_key)}
```

Oxygen XML Developer scans the following locations to find the `translation.xml` files that are used to load the translation keys:

- A `refactoring/i18n` folder, created inside a directory that is associated to a customized *framework*.
- A `i18n` folder, created inside a directory that is associated to a customized *framework*.
- An `i18n` folder inside any specified folder. In this case, you need to [open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XML Refactoring**, and specify the folder in the **Load additional refactoring operations from text box**.
- An `i18n` folder located in directories specified through the [XML Refactoring Operations Plugin Extension](#).
- The `refactoring/i18n` folder from the Oxygen XML Developer installation directory (`[OXYGEN_INSTALL_DIR]/refactoring/i18n`).

Example: Refactoring Operation Descriptor File with *i18n* Support

```
<?xml version="1.0" encoding="UTF-8"?>
<refactoringOperationDescriptor
  xmlns="http://www.oxygenxml.com/ns/xmlRefactoring" id="remove_text_content"
  name="${i18n(Remove_text_content)}">
  <description>${i18n(Remove_text_content_description)}</description>
  <script type="XQUERY_UPDATE" href="remove_text_content.xq"/>
  <parameters>
    <description>${i18n(parameters_description)}</description>
    <parameter label="${i18n(Element_name)}" name="element_localName"
      type="NC_NAME">
      <description>${i18n(Element_name_descriptor)}</description>
      <possibleValues>
        <value default="true" name="value1">${i18n(value_1)}</value>
```

```

        <value name="value2">${i18n(value_2)}</value>
    </possibleValues>
</parameter>
</parameters>
</refactoringOperationDescriptor>

```

XML Digital Signatures

This chapter explains how to apply and verify digital signatures on XML documents.

Digital Signatures Overview

Digital signatures are widely used as security tokens, not just in XML. A *digital signature* provides a mechanism for assuring integrity of data, the authentication of its signer, and the non-repudiation of the entire signature to an external party:

- A *digital signature* must provide a way to verify that the data has not been modified or replaced to ensure integrity.
- The *signature* must provide a way to establish the identity of the data's signer for authentication.
- The *signature* must provide the ability for the data's integrity and authentication to be provable to a third party for non-repudiation.

A *public key system* is used to create the digital signature and it's also used for verification. The signature binds the signer to the document because digitally signing a document requires the originator to create a hash of the message and then encrypt that hash value with their own private key. Only the originator has that private key and that person is the only one who can encrypt the hash so that it can be unencrypted using their public key. The recipient, upon receiving both the message and the encrypted hash value, can decrypt the hash value, knowing the originator's public key. The recipient must also try to generate the hash value of the message and compare the newly generated hash value with the unencrypted hash value received from the originator. If the hash values are identical, it proves that the originator created the message, because only the actual originator could encrypt the hash value correctly.

XML Signatures can be applied to any digital content (data object), including XML (see W3C Recommendation, [XML-Signature Syntax and Processing](#)). An XML Signature may be applied to the content of one or more resources:

- Enveloped or enveloping signatures are applied over data within the same XML document as the signature
- Detached signatures are applied over data external to the signature element; the signature is "detached" from the content it signs. This definition typically applies to separate data objects, but it also includes the instance where the signature and data object reside within the same XML document but are sibling elements.

The *XML Signature* is a method of associating a key with referenced data. It does not normatively specify how keys are associated with persons or institutions, nor the meaning of the data being referenced and signed.

The original data is not actually signed. Instead, the signature is applied to the output of a chain of [canonicalization](#) and transformation algorithms, which are applied to the data in a designated sequence. This system provides the flexibility to accommodate whatever "normalization" or desired preprocessing of the data that might be required or desired before subjecting it to being signed.

Since the signature is dependent on the content it is signing, a signature produced from a *non-canonicalized* document could possibly be different from one produced from a *canonicalized* document. The *canonical* form of an XML document is physical representation of the document produced by the method described in this specification. The *XML canonicalization* method is the algorithm defined by this specification that generates the canonical form of a given XML document or document subset. *XML canonicalization* is designed to be useful for applications that require the ability to test whether or not the information content of a document or document subset has been changed. This is done by comparing the *canonical* form of the original document before application processing with the *canonical* form of the document result of the application processing.

A digital signature over the *canonical* form of an XML document or document subset would allow the signature digest calculations to be oblivious to changes in the original document's physical representation. During signature generation, the digest is computed over the *canonical* form of the document. The document is then transferred to the relying party, which validates the signature by reading the document and computing a digest of the *canonical* form of the received document. The equivalence of the digests computed by the signing and relying parties

(hence, the equivalence of the *canonical* forms for which they were computed) ensures that the information content of the document has not been altered since it was signed.

The following *canonicalization algorithms* are used in Oxygen XML Developer:

- **Canonical XML (or Inclusive XML Canonicalization) (XMLC14N)** - Used for XML where the context doesn't change.

Inclusive Canonicalization copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. *Inclusive Canonicalization* is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security standpoint because it requires no knowledge of the data that are to be secured to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the *Inclusive Canonicalization* will copy them and the signature will be invalid.

- **Exclusive XML Canonicalization (EXCC14N)** - Designed for *canonicalization* where the context might change.

Exclusive Canonicalization just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within various XML contexts), as it will ensure the signature is verified correctly each time.

The [canonicalization](#) method can specify whether or not comments should be included in the *canonical* form output by the *XML canonicalization* method. If a *canonical* form contains comments corresponding to the comment nodes in the input node-set, the result is called *canonical XML with comments*. In an uncommented *canonical* form comments are removed, including delimiter for comments outside document element.

The three operations. [Canonicalize](#), [Sign](#), and [Verify Signature](#), are available from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

Related Information:

[Certificates](#) on page 458

[Canonicalizing Files](#) on page 459

[Signing Files](#) on page 460

[Verifying Signature](#) on page 461

[Example of How to Digitally Sign XML Files or Content](#) on page 461

Certificates

A certificate is a digitally signed statement from the issuer (an individual, an organization, a website or a firm), saying that the public key (and some other information) of some other entity has a particular value. When data is digitally signed, the signature can be verified to check the data integrity and authenticity. Integrity means that the data has not been modified. Authenticity means the data comes indeed from the entity that claims to have created and signed it. Certificates are kept in special repositories called [keystores](#).

All *keystore* entries (key and trusted certificate entries) are accessed via unique aliases. An alias must be assigned for every new entry of either a key or certificate as a reference for that entity. No *keystore* can store an entity if its alias already exists in that *keystore* and cannot store trusted certificates generated with keys in its *keystore*.

Oxygen XML Developer provides two types of *keystores*: Java Key Store (JKS) and Public-Key Cryptography Standards version 12 (PKCS-12). A *keystore* file is protected by a password. In a PKCS 12 *keystore* you should not store a certificate without alias together with other certificates, with or without alias, as in such a case the certificate without alias cannot be extracted from the *keystore*.

To configure the options for a certificate or to validate it, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Signing Certificates**. This opens [the certificates preferences page](#).

Related Information:

[Digital Signatures Overview](#) on page 457

Canonicalizing Files

You can select the [canonicalization](#) algorithm to be used for a document from the dialog box that is displayed by using the **Canonicalize** action that is available from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

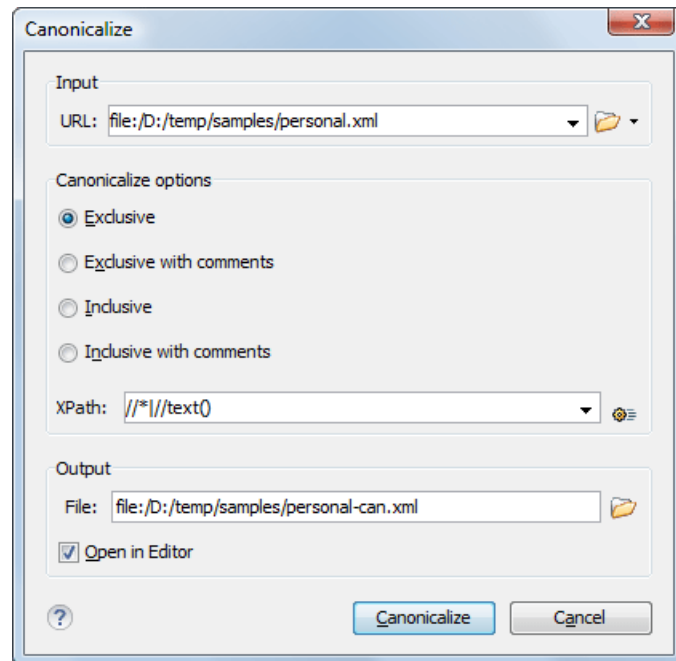


Figure 226: Canonicalization Settings Dialog Box

The **Canonicalize** dialog box allows you to set the following options:

- **Input URL** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the location of the input file.
- **Exclusive** - If selected, the exclusive (uncommented) [canonicalization](#) method is used.

Note: *Exclusive Canonicalization* just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within various XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments [canonicalization](#) method is used.
- **Inclusive** - If selected, the inclusive (uncommented) [canonicalization](#) method is used.

Note: *Inclusive Canonicalization* copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. *Inclusive Canonicalization* is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security standpoint because it requires no knowledge of the data that are to be secured to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the *Inclusive Canonicalization* will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments [canonicalization](#) method is used.
- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **Output** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the output file path where the signed XML document will be saved.
- **Open in editor** - If selected, the output file will be opened in the editor.

Related Information:

[Digital Signatures Overview](#) on page 457

Signing Files

You can select the type of signature to be used for documents from a signature settings dialog box. To open this dialog box, select the **Sign** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

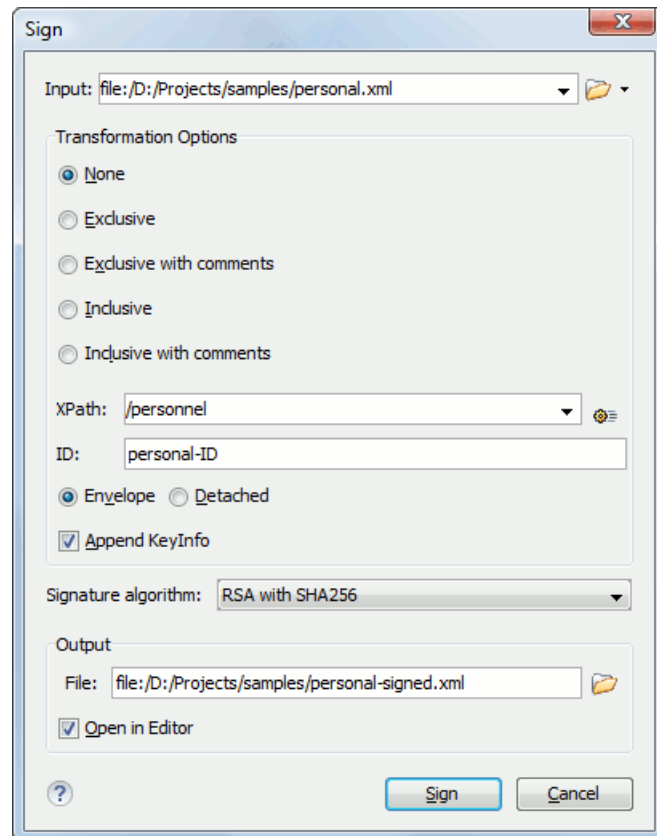


Figure 227: Signature Settings Dialog Box

The following options are available:

Note: If Oxygen XML Developer could not find a valid certificate, a link is provided at the top of the dialog box that opens the [XML Signing Certificates preferences page](#) where you can configure a valid certificate.

❗ Could not obtain a valid certificate. [You must configure a valid certificate.](#)

- **Input** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the location of the input URL.
- **Transformation Options** - See the [Digital Signature Overview](#) section for more information about these options.

- **None** - If selected, no [canonicalization](#) algorithm is used.
- **Exclusive** - If selected, the exclusive (uncommented) [canonicalization](#) method is used.

Note: *Exclusive Canonicalization* just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within various XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments [canonicalization](#) method is used.
- **Inclusive** - If selected, the inclusive (uncommented) [canonicalization](#) method is used.

Note: *Inclusive Canonicalization* copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. Inclusive *Canonicalization* is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security standpoint because it requires no knowledge of the data that

are to be secured to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the Inclusive *Canonicalization* will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments *canonicalization* method is used.
- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **ID** - Provides ID of the XML element to be signed.
- **Envelope** - If selected, the *enveloped* signature is used. See the [Digital Signature Overview](#) for more information.
- **Detached** - If selected, the *detached* signature is used. See the [Digital Signature Overview](#) for more information.
- **Append KeyInfo** - If this option is selected, the `ds:KeyInfo` element will be added in the signed document.
- **Signature algorithm** - The algorithm used for signing the document. The following options are available: **RSA with SHA1**, **RSA with SHA256**, **RSA with SHA384**, and **RSA with SHA512**.
- **Output** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the path of the output file where the signed XML document will be saved.
- **Open in editor** - If selected, the output file will be opened in Oxygen XML Developer.

Related Information:

[Digital Signatures Overview](#) on page 457

[Verifying Signature](#) on page 461

[Example of How to Digitally Sign XML Files or Content](#) on page 461

Verifying Signature

You can verify the signature of a file by selecting the **Verify Signature** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu. The **Verify Signature** dialog box then allows you to specify the location of the file whose signature is verified.

If the signature is valid, a dialog box displays the name of the signer. Otherwise, an error shows details about the problem.

Related Information:

[Digital Signatures Overview](#) on page 457

[Signing Files](#) on page 460

[Example of How to Digitally Sign XML Files or Content](#) on page 461

Example of How to Digitally Sign XML Files or Content

Suppose you want to digitally sign an XML document, but more specifically, suppose you have multiple instances of the same element in the document and you just want to sign a specific ID. Oxygen XML Developer includes a signature tool that allows you to digitally sign XML documents or specific content.

The Oxygen XML Developer installation directory includes a `samples` folder that contains a file called `personal.xml`. For the purposes of this example, this file will be used to demonstrate how to digitally sign specific content. Notice that this file has multiple `person` elements inside the `personnel` element. Suppose you want to digitally sign the specific `person` element that contains the `id=robert.taylor`. To do this, follow this procedure:

1. Open the `personal.xml` file in Oxygen XML Developer in **Text** editing mode.
2. Right-click anywhere in the editor and select the **Sign** action from the **Source** submenu. The **Sign** dialog box is displayed.

Tip: If you want to sign a file but create a new output file so that the original file remains unchanged, use the **Sign** action from the **Tools** menu. Selecting the action from this menu will allow you to choose an input file and output file in the **Sign** dialog box.

3. If Oxygen XML Developer cannot find a valid certificate, click the link at the top of the dialog box to **configure a valid certificate**. This opens the [XML Signing Certificates preferences page](#) that allows you to configure and validate a certificate.
4. Once a valid certificate is recognized, continue to configure the **Sign** dialog box.

- a) Select one of [the Transformation Options](#). For the purposes of this example, select the **Inclusive with comments** option.
- b) Specify the appropriate **XPath** expression for the specific element that needs to be signed. For this example, type `/personnel/person` in the **XPath** text box.
- c) Enter the specific **ID** that needs to be signed. For this example, type `robert.taylor` in the **ID** field.
- d) Select [the Envelope option](#) and leave the other options as their default values.

The digital signature is added at the end of the XML document, just before the end tag. It is always added at the end of the document, even if you only sign specific content within the document.

5. You can verify the signature by choosing the **Verify Signature** action from the **Source** submenu of the contextual menu.

Related Information:

[Digital Signatures Overview](#) on page 457

[Signing Files](#) on page 460

[Verifying Signature](#) on page 461

Editing XSLT Stylesheets

Oxygen XML Developer includes a built-in editor for XSLT stylesheets. This section presents the features of the XSLT editor and how these features can be used. The features of the XSLT editor include:

- **Create new XSLT files and templates** - You can use the built-in new file wizards to [create new XSLT documents or templates](#).
- **Open and Edit XSLT files** - XSLT files can be opened and edited in the source editor ([Text mode](#)).
- **Validation** - Presents validation errors in XSLT files.
- **Content completion** - Offers proposals for properties and the values that are available for each property.
- **Syntax highlighting** - The syntax highlighting in Oxygen XML Developer makes XSLT files more readable.

Editing XSLT Stylesheets in the Master Files Context

Smaller interrelated modules that define a complex stylesheet cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, a function defined in a main stylesheet is not visible when you edit an included or imported module. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger stylesheet structure.

You can set a main XSLT stylesheet either using the [master files support from the Project view](#), or using a validation scenario.

To set a *master file* using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main stylesheet. In this case, it considers the current module as the main stylesheet.

The advantages of editing in the context of [master file](#) include:

- Correct validation of a module in the context of a larger stylesheet structure.
- [Content Completion Assistant](#) displays all components valid in the current context.
- The [Outline view](#) displays the components collected from the entire stylesheet structure.

For more information about editing XSLT stylesheets in the *master files* context, watch our video demonstration:

<https://www.youtube.com/embed/UZwg385RKNw>

Related Information:

[XSLT Resource Hierarchy/Dependencies View](#) on page 478

[XSLT Component Dependencies View](#) on page 480

Validating XSLT Stylesheets

Numerous XSLT code quality assurance checks are done during automatic validation to help you keep your stylesheets valid and well formed. Oxygen XML Developer performs the validation of XSLT documents with the help of an XSLT processor [that you can configure in the preferences pages](#) according to the XSLT version.

For XSLT 1.0, the options are: Xalan, Saxon 6.5.5, Saxon 9.8.0.8 and [a JAXP transformer specified by the main Java class](#). For XSLT 2.0, the options are: Saxon 9.8.0.8 and [a JAXP transformer specified by the main Java class](#). For XSLT 3.0, the options are Saxon 9.8.0.8 and [a JAXP transformer specified by the main Java class](#).

To access the [XSLT preferences](#) quickly, use the  **Validation options** action from the **Document > Validate** menu.

Creating a Validation Scenario for XSLT Stylesheets

You can validate an XSLT document using the engine defined in the transformation scenario, or a custom validation scenario. If you choose to validate using the engine from transformation scenario, and a transformation scenario is not associated with the current document or the engine has no validation support, the default engine is used. To set the default engine, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XSLT/FO/XQuery > XSLT**.

You can also create new validation scenarios or edit existing ones, and you can add [JARS](#) and classes that contain extension functions. To create or edit a validation scenario for an XSLT stylesheet, follow these steps:

1. With the XSLT file opened in Oxygen XML Developer, select the  **Configure Validation Scenario(s)** from the **Document > Validate** menu, or the  **Validation** toolbar drop-down menu, or from the **Validate** submenu when invoking the contextual menu on the XSLT file in the [Project view](#).
The **Configure Validation Scenario(s)** dialog box is displayed. It contains the existing scenarios, organized in categories depending on the type of file they apply to. You can use the options in the  **Settings** drop-down menu to filter which scenarios are shown.
2. To edit an existing scenario, select the scenario and press the **Edit** button. If you try to edit one of the *read-only* predefined scenarios, Oxygen XML Developer creates a customizable duplicate (you can also use the **Duplicate** button).
3. To add a new scenario, press the  **New** button.
The **New scenarios** dialog box is displayed. It lists all validation units of the scenario.

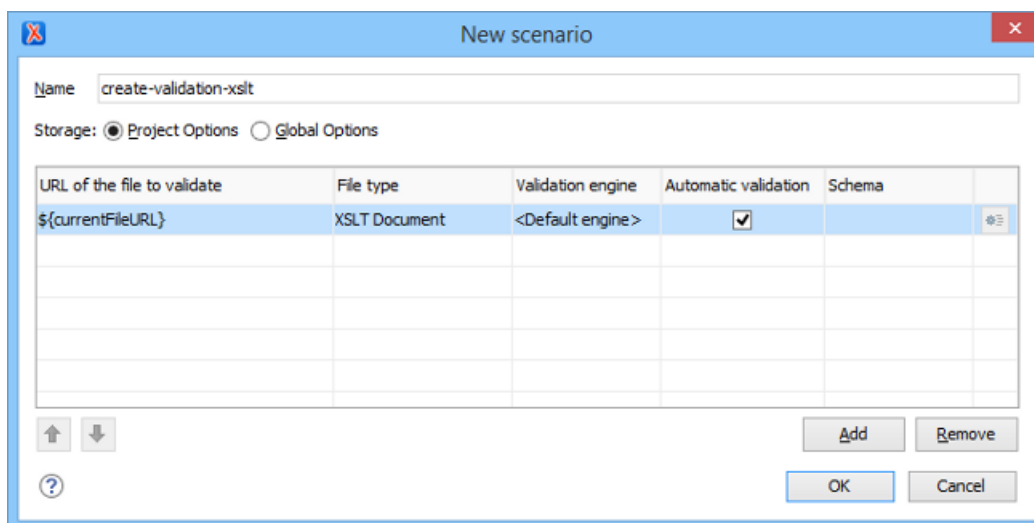


Figure 228: Add / Edit a Validation Unit

4. Configure the following information in this dialog box:
 - a) **Name** - The name of the validation scenario.
 - b) **Storage** - You can choose between storing the scenario in the [Project Options](#) or [Global Options](#).

- c) **URL of the file to validate** - In most cases, leave this field as the default selection (the URL of the current file). If you want to specify a different URL, double-click its cell and enter the URL in the text field, select it from the drop-down list, or use the  **Browse** drop-down menu or  **Insert Editor Variable** button.
 - d) **File type** - The file type should be **XSLT Document**.
 - e) **Validation engine** - Click the cell to select a validation engine. You must select an engine to be able to add or edit extensions.
 - f) **Automatic validation** - If this option is selected, the validation operation defined by this row is also used by the automatic validation feature.
5. To add or edit extensions, click the  **Edit extensions** button. This button is only available if the **File type** is set as **XSLT Document** and a **Validation engine** is chosen.
The **Libraries** dialog box is opened. It is used to specify the **JARS** and classes that contain extension functions called from the XSLT file of the current validation scenario. They will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item and press the  **Move up** or  **Move down** buttons.
6. Press **OK** to close the **New scenario** dialog box.
The newly created validation scenario is now included in the list of scenarios in the **Configure Validation Scenario(s)** dialog box. You can select the scenario in this dialog box to associate it with the current XSLT document and press the **Apply associated** button to run the validation scenario.

Validating XSLT Stylesheets with Custom Engines

If you need to validate an XSLT stylesheet with a validation engine that is different from the built-in engine, you can configure external engines as custom XSLT validation engines in the Oxygen XML Developer preferences. After a custom validation engine is [properly configured](#), it can be applied on the current document by selecting it from the list of custom validation engines in the  **Validation** toolbar drop-down menu. The document is validated against the schema declared in the document.

By default, there are two validators that are configured for XSLT stylesheets:

- **MSXML 4.0** - included in Oxygen XML Developer (Windows edition). It is associated to the XSL Editor type in [Preferences page](#).
- **MSXML.NET** - included in Oxygen XML Developer (Windows edition). It is associated to the XSL Editor type in [Preferences page](#).

Validating XSLT Stylesheets that Call Java Extensions

It is possible to validate XSLT that call Java extensions. This is achieved through a transformation scenario in which the Java extensions are specified, and the default validation will be processed using the parameters defined in the transformation scenario.

To validate XSLT with Java extensions, follow this procedure:

1. Create an [XSLT transformation scenario](#) for your XSLT document (select  **Configure Transformation Scenario(s)** action from the toolbar, then click **New**, and select **XSLT transformation**).
2. In the **New scenario** dialog box, click the **Extensions** button (in the **XSLT** tab), specify the Java extensions (JAR libraries) that are needed, and click **OK**.
3. Once you are finished configuring the transformation scenario, click **OK**, then select **Save and close**.
4. Use the  **Validate** button on the toolbar (or **Ctrl + Shift + V (Command + Shift + V on OS X)**) and the default validation will detect and use the transformation scenario profile you just configured and saved.

Related Information:

[Debugging XSLT that Call Java Extensions](#) on page 1042

XSLT Quick Fix Support

The Oxygen XML Developer [Quick Fix support](#) helps you resolve various errors that appear in a stylesheet by proposing *Quick Fixes* to problems such as missing templates, misspelled template names, missing functions, or references to an undeclared variable or parameter.

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a *Quick Fix* is available for that particular error or warning, you can access the *Quick Fix* proposals with any of the following methods:

- When hovering over the error or warning, the proposals are presented in a tooltip pop-up window.
- If you place the cursor in the highlighted area where a validation error or warning occurs, a *Quick Fix* icon (💡) is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.
- With the cursor placed in the highlighted area of the error or warning, you can also invoke the *Quick Fix* menu by pressing **Alt + 1 (Command + Alt + 1 on OS X)** on your keyboard.

Note: The *Quick Fixes* are available only when validating an XSLT file with Saxon HE/PE/EE.

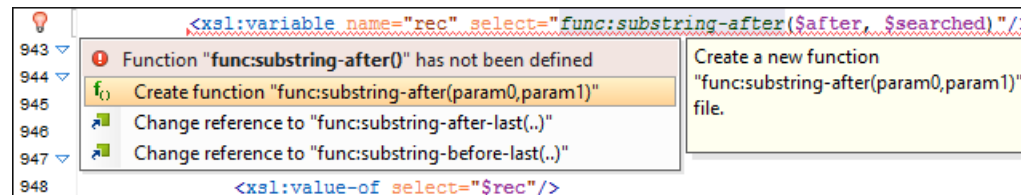


Figure 229: Example of an Undefined XSLT Functions Quick Fix

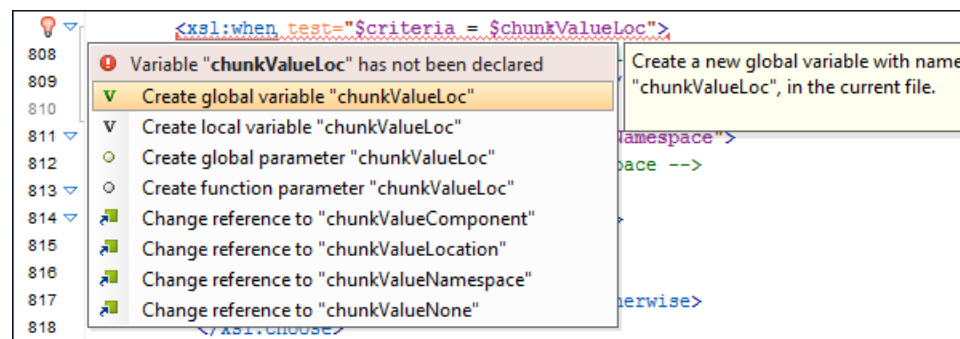


Figure 230: Example of an Undeclared XSLT Variables/Parameters Quick Fix

Oxygen XML Developer provides XSLT *Quick Fixes* for the following types of instances:

- **Template does not exist**, when the template name referenced in a `call-template` element does not exist. The following fixes are available:
 - **Create template "templateName"** - creates a template and generates its corresponding parameters. The template name and parameter names and types are collected from the `call-template` element.
 - **Change reference to "newTemplateName"** - changes the name of the missing template referenced in the `call-template` element. The proposed new names are the existing templates with names similar with the missing one.
- **Variable/Parameter not declared**, when a parameter or variable reference cannot be found. The following fixes are available:
 - **Create global variable "varName"** - creates a global variable with the specified name in the current stylesheet. The new variable is added at the beginning of the stylesheet after the last global variable or parameter declaration.
 - **Create global parameter "paramName"** - creates a global parameter with the specified name in the current stylesheet. The new parameter is added at the beginning of the stylesheet after the last global parameter or variable declaration.
 - **Create local variable "varName"** - creates a local variable with the specified name before the current element.
 - **Create template parameter "paramName"** - creates a new parameter with the specified name in the current template. This fix is available if the error is located inside a template.
 - **Create function parameter "paramName"** - creates a new parameter with the specified name in the current function. This fix is available if the error is located inside a function.

- **Change reference to "varName"** - changes the name of the referenced variable/parameter to an existing local or global variable/parameter, that has a similar name with the current one.
- **Parameter from a called template is not declared**, when a parameter referenced from a `call-template` element is not declared. The following fixes are available:
 - **Create parameter "paramName" in the template "templateName"** - creates a new parameter with the specified name in the referenced template.
 - **Change "paramName" parameter reference to "newParamName"** - changes the parameter reference from the `call-template` element to a parameter that is declared in the called template.
 - **Remove parameter "paramName" from call-template** - removes the parameter with the specified name from the `call-template` element.
- **No value supplied for required parameter**, when a required parameter from a template is not referenced in a `call-template` element. The following quick-fix is available:
 - **Add parameter "paramName" in call-template** - creates a new parameter with the specified name in `call-template` element.
- **Function "prefix:functionName()" has not been defined**, when a function declaration is not found. The following *Quick Fixes* are available:
 - **Create function "prefix:functionName(param1, param2)"** - creates a new function with the specified signature, after the current top level element from stylesheet.
 - **Change function to "newFunctionName(..)"** - changes the referenced function name to an already defined function. The proposed names are collected from functions with similar names and the same number of parameters.
- **Attribute-set "attrSetName" does not exist**, when the referenced attribute set does not exist. The following *Quick Fixes* are available:
 - **Create attribute-set "attrSetName"** - creates a new attribute set with the specified name, after the current top level element from stylesheet.
 - **Change reference to "attrSetName"** - changes the referenced attribute set to an already defined one.
- **Character-map "chacterMap" has not been defined**, when the referenced character map declaration is not found. The following *Quick Fixes* are available:
 - **Create character-map "characterMapName"** - creates a new character map with the specified name, after the current top level element from stylesheet.
 - **Change reference to "characterMapName"** - changes the referenced character map to an already defined one.

Content Completion in XSLT Stylesheets

The list of proposals offered by the [Content Completion Assistant](#) in XSLT are context-sensitive and includes proposals that are valid at the current cursor position. It can be manually activated with the **Ctrl + Space** (**Command + Space on OS X**) shortcut.

You can enhance the list of proposals by specifying an additional schema. This schema is defined in the [Content Completion / XSLT preferences](#) page and can be any of the following: XML Schema, DTD, RELAX NG schema, or NVDL schema.

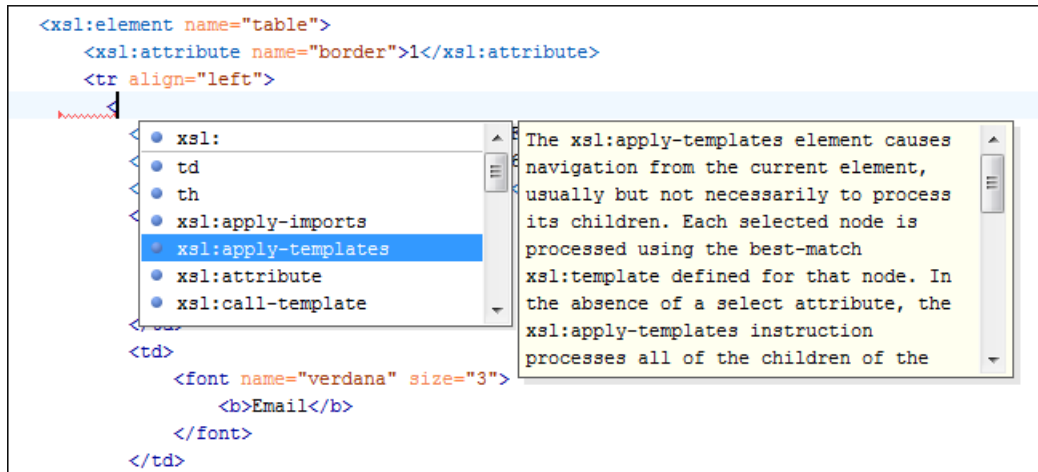


Figure 231: XSLT Content Completion Assistant

The feature is activated in **Text** mode in the following situations:

- After you press the `<` character when inserting an element, it is automatically activated after a short delay. You can adjust the activation delay with the **Activation delay of the proposals window (ms)** option from the **Content Completion** preferences page.
- After typing a partial element or attribute name, you can manually activate it by pressing **Ctrl + Space** (**Command + Space on OS X**) or **Alt + ForwardSlash** (**Command + Alt + ForwardSlash on OS X**). If there is only one valid proposal at the current location, it is inserted without displaying the list of proposals.

The *Content Completion Assistant* proposes numerous item types (such as templates, variables, parameters, keys, etc.) that are defined in the current stylesheet, and in the imported and included XSLT stylesheets. The *Content Completion Assistant* also includes [code templates that can be used to quickly insert code fragments](#) into stylesheets.

Note: For XSL and XSD resources, the *Content Completion Assistant* collects its components starting from the [master files](#). The *master files* can be defined in the project or in the associated validation scenario. For further details about the *Master Files* support go to [Defining Master Files at Project Level](#).

The extension functions included in the Saxon 6.5.5 and 9.8.0.8 transformation engines are presented in the content completion list only if the Saxon namespace (<http://saxon.sf.net> for XSLT version 2.0 / 3.0 or <http://icl.com/saxon> for XSLT version 1.0) is declared and one of the following conditions is true:

- The edited file has a transformation scenario that uses as transformation engine Saxon 6.5.5 (for XSLT version 1.0), Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE (for XSLT version 2.0 / 3.0).
- The edited file has a validation scenario that uses as validation engine Saxon 6.5.5 (for version 1.0), Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE (for version 2.0 / 3.0).
- The validation engine specified in [Options](#) page is Saxon 6.5.5 (for version 1.0), Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE (for version 2.0 / 3.0).

Additionally, the Saxon-CE-specific extension functions and instructions are presented in the list of content completion assistance proposals only if the <http://saxonica.com/ns/interactiveXSLT> namespace is declared.

Namespace prefixes in the scope of the current context are presented at the top of the content completion assistance window to speed up the insertion into the document of prefixed elements.

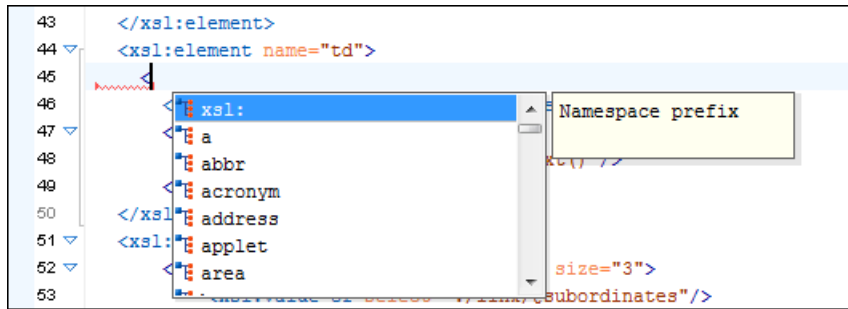


Figure 232: Namespace Prefixes in the Content Completion Assistant

For the common namespaces such as XSL namespace (<http://www.w3.org/1999/XSL/Transform>), XML Schema namespace (<http://www.w3.org/2001/XMLSchema>), or Saxon namespace (<http://icl.com/saxon> for version 1.0, <http://saxon.sf.net/> for version 2.0 / 3.0), Oxygen XML Developer provides an easy mode to declare them by proposing a prefix for these namespaces.

Content Completion in XPath Expressions

In XSLT stylesheets, the *Content Completion Assistant* provides [all the features available in the XML editor](#) and also adds some enhancements. In XPath expressions used in attributes of XSLT stylesheets (elements such as `match`, `select`, and `test`), the *Content Completion Assistant* offers the names of XPath and XSLT functions, XSLT axes, and user-defined functions (the name of the function and its parameters). If a transformation scenario was defined and associated to the edited stylesheet, the *Content Completion Assistant* computes and presents elements and attributes based on:

- The input XML document selected in the scenario.
- The current context in the stylesheet.

The associated document is displayed in the [XSLT/XQuery Input view](#).

Content completion for XPath expressions is started:

- On XPath operators detected in one of the `match`, `select` and `test` attributes of XSLT elements: `"`, `'`, `/`, `//`, `(`, `[`, `|`, `:`, `::`, `$`
- For attribute value templates of non-XSLT elements, that is the `{` character when detected as the first character of the attribute value.
- On request, if the combination **Ctrl + Space (Command + Space on OS X)** is pressed inside an edited XPath expression.

The proposals presented in the *Content Completion Assistant* are dependent on:

- The context of the current XSLT element.
- The XML document associated with the edited stylesheet in the stylesheet transformation scenario.
- The XSLT version of the stylesheet (1.0, 2.0, or 3.0).

Note: The XSLT 3.0 content completion list of proposals includes specific elements and attributes for the 3.0 version.

For example, if the document associated with the edited stylesheet is:

```
<personnel>
  <person id="Big.Boss">
    <name>
      <family>Boss</family>
      <given>Big</given>
    </name>
    <email>chief@oxygenxml.com</email>
    <link subordinatess="one.worker"/>
  </person>
  <person id="one.worker">
    <name>
      <family>Worker</family>
      <given>One</given>
    </name>
    <email>one@oxygenxml.com</email>
    <link manager="Big.Boss"/>
  </person>
</personnel>
```

```
</personnel>
```

If you enter an `xsl:template` element using the *Content Completion Assistant*, the following actions are triggered:

- The `match` attribute is inserted automatically.
- The cursor is placed between the quotes.
- The *XPath Content Completion Assistant* automatically displays a pop-up window with all the XSLT axes, XPath functions and elements and attributes from the XML input document that can be inserted in the current context.

The set of XPath functions depends on the XSLT version declared in the root element `xsl:stylesheet`: 1.0, 2.0, or 3.0.

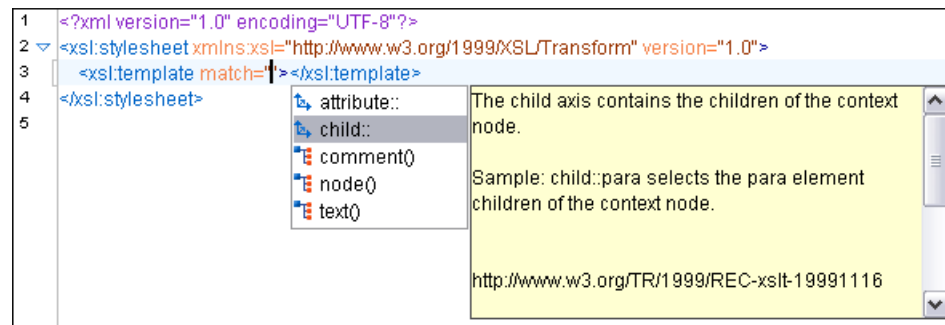


Figure 233: Content Completion in the `match` Attribute

If the cursor is inside the `select` attribute of an `xsl:for-each`, `xsl:apply-templates`, `xsl:value-of` or `xsl:copy-of` element the content completion proposals depend on the path obtained by concatenating the XPath expressions of the parent XSLT elements `xsl:template` and `xsl:for-each` as shown in the following figure:

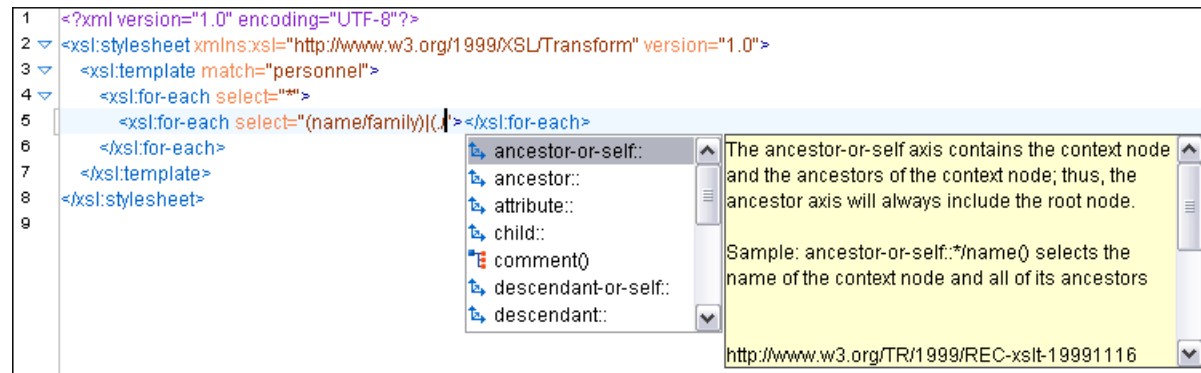


Figure 234: Content Completion in the `select` Attribute

Also XPath expressions typed in the `test` attribute of an `xsl:if` or `xsl:when` element benefit of the assistance of the content completion.

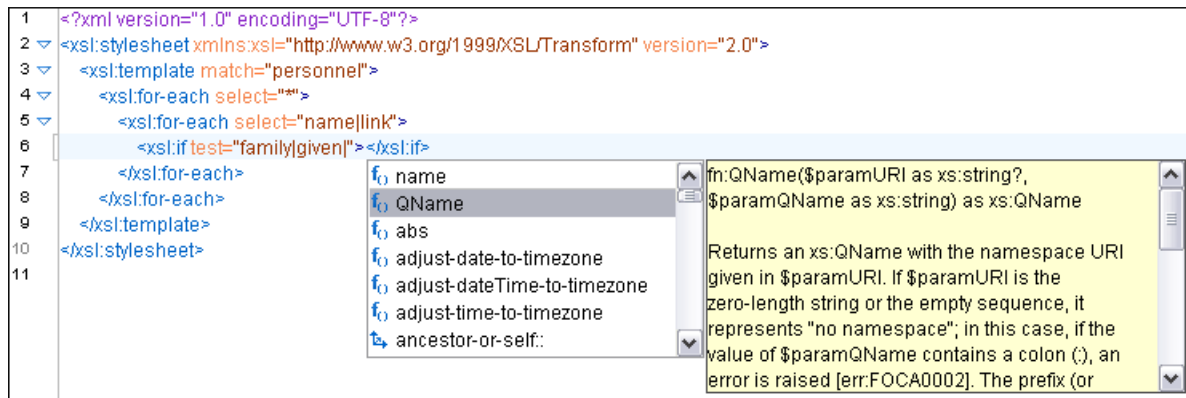


Figure 235: Content Completion in the test Attribute

XSLT variable references are easier to insert in XPath expressions with the help of the content completion pop-up triggered by the \$ character, which signals the start of such a reference in an XPath expression.

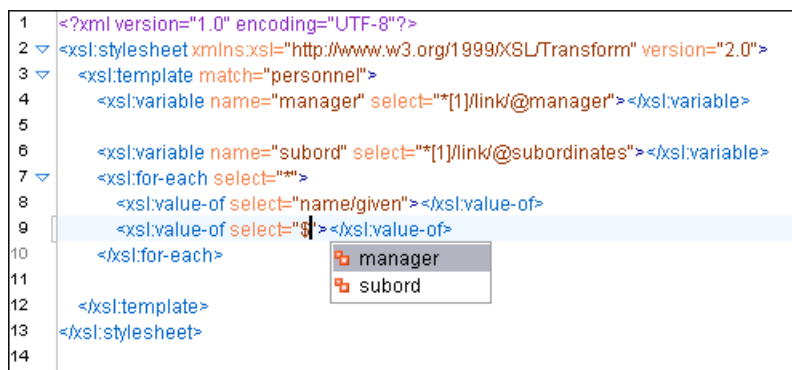


Figure 236: Content Completion in the test Attribute

If the { character is the first one in the value of the attribute, the same *Content Completion Assistant* is available also in attribute value templates of non-XSLT elements.

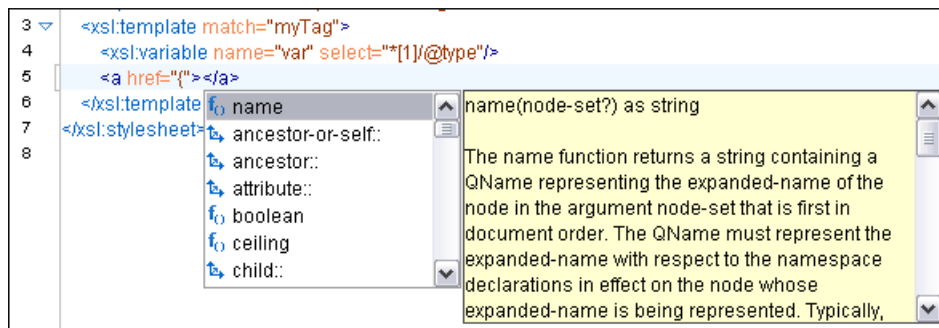


Figure 237: Content Completion in Attribute Value Templates

The time delay (configured in the [Content Completion preferences page](#)) for all content completion assistance windows is also applied for the content completion in XPath expressions.

Related Information:

[Working with XPath Expressions](#) on page 942

Tooltip Helper for the XPath Functions Arguments

When editing the arguments of an XPath/XSLT function, Oxygen XML Developer tracks the current entered argument by displaying a tooltip containing the function signature. The currently edited argument is highlighted with a bolder font.

When moving the cursor through the expression, the tooltip is updated to reflect the argument found at the cursor position.

Examples:

If you want to concatenate the absolute values of two variables, named `v1` and `v2`:

```
<xsl:template match="/">
  <xsl:value-of select="concat(abs($v1), abs($v2))"></xsl:value-of>
</xsl:template>
```

When moving the cursor before the first `abs` function, Oxygen XML Developer identifies it as the first argument of the `concat` function. The tooltip shows in bold font the following information about the first argument:

- Its name is `$arg1`.
- Its type is `xdt:anyAtomicType`.
- It is optional (note the `?` sign after the argument type).

The function also takes other arguments that have the same type and returns a `xs:string`.




Figure 238: XPath Tooltip Helper - Identify the `concat` Function's First Argument

Moving the cursor on the first variable `$v1`, the editor identifies the `abs` as context function and shows its signature:

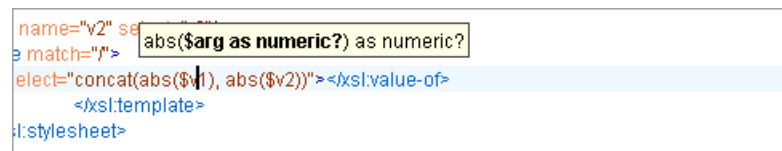


Figure 239: XPath Tooltip Helper - Identify the `abs` Function's Argument

Further, clicking the second `abs` function name, the editor detects that it represents the second argument of the `concat` function. The tooltip is repainted to display the second argument in bold font.



Figure 240: XPath Tooltip Helper - Identify the `concat` Function's Second Argument

Note: The tooltip helper is also available in the [XPath Builder view](#) and [XPath toolbar](#).

Related Information:

[Working with XPath Expressions](#) on page 942

Syntax Highlighting in XSLT

Oxygen XML Developer supports syntax highlighting in XSLT documents to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for XSLT files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

5. Select the **XSL** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

XSLT Outline View

The **Outline** view for XSLT stylesheets displays the list of all the components (templates, attribute-sets, character-maps, variables, functions, keys, outputs) from both the edited stylesheet and its imports or includes. For XSL and XSD resources, the **Outline** view collects its components starting from the [master files](#). The master files can be defined in the project or in the associated validation scenario. For further details about the *Master Files* support go to [Defining Master Files at Project Level](#).

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

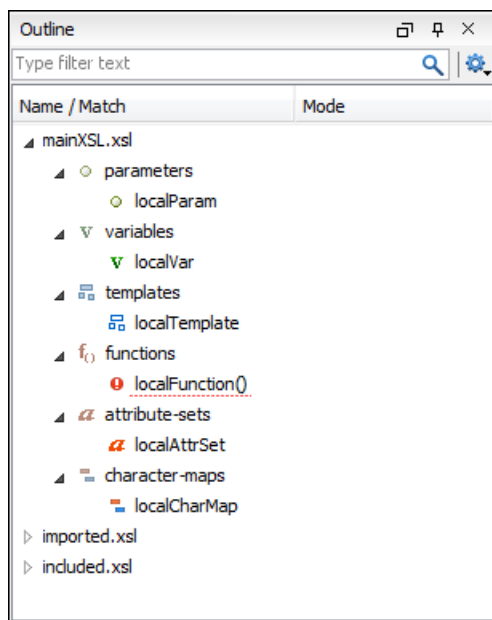


Figure 241: XSLT Outline View

The following actions are available in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;



Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the XSLT editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

When the  **Show components** option is selected, the following actions are available:



Show XML structure

Displays the XML document structure in a tree-like structure.

Show all components

Displays all components that were collected starting from the [master file](#). This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/type

The stylesheet components can be grouped by location and type.

When the  **Show XML structure** option is selected, the following actions are available:

Show components

Switches the **Outline** view to the components display mode.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available when the  **Show components** option is selected in the  **Settings** menu:

Edit Attributes

Opens a small in-place editor that allow you to edit the attributes of the selected node.

Cut

Cuts the currently selected node.

Copy

Copies the currently selected node.

Delete

Deletes the currently selected node.

Search References Ctrl + Shift + R (Command + Shift + R on OS X)

Searches all references of the item found at current cursor position in the defined scope, if any. See [Finding XSLT References and Declarations](#) for more details.

Search References in

Searches all references of the item found at current cursor position in the specified scope. See [Finding XSLT References and Declarations](#) for more details.

Component Dependencies

Opens the [Component Dependencies view](#) that allows you to see the dependencies for the current selected component.

Resource Hierarchy

Opens the [Resource Hierarchy/Dependencies view](#) that displays the hierarchy for the currently selected resource.

Resource Dependencies

Opens the [Resource Hierarchy/Dependencies view](#) that displays the dependencies of the currently selected resource.

Rename Component in

Renames the selected component. See [XSLT Refactoring Actions](#) for more details.

The following contextual menu actions are available in the **Outline** view when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a small in-place editor that allow you to edit the attributes of the selected node.

Toggle Comment

Comments/uncomments the currently selected element.

Search references

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

Component dependencies

Opens the [Component Dependencies view](#) that displays the dependencies of the currently selected component.

Rename Component in

Renames the currently selected component in the context of a scope that you define.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

The stylesheet components information is presented on two columns: the first column presents the name and match attributes, the second column the mode attribute. If you know the component name, match or mode, you can search it in the **Outline** view by typing one of these pieces of information in the filter text field from the top of the view or directly on the tree structure. When you type the component name, match or mode in the text field, you can switch to the tree structure using:

- Keyboard arrow keys
- **Enter** key
- **Tab** key

- **Shift-Tab** key combination

To switch from tree structure to the filter text field, you can use **Tab** and **Shift-Tab**.

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match.

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Oxygen XML Developer allows you to sort the components of the tree in the **Outline** view.

Note: Sorting groups in the **Outline** view is not supported.

Oxygen XML Developer has a predefined order of the groups in the **Outline** view:

- For location, the names of the files are sorted alphabetically. The file you are editing is located at the top of the list.
- For type, the order is: parameters, variables, templates, functions, set attributes, character-map.

Note: When no grouping is available and the table is not sorted, Oxygen XML Developer sorts the components depending on their order in the document. Oxygen XML Developer also takes into account the name of the file that the components are part of.

XSLT/XQuery Input View

The structure of the XML document associated to the edited XSLT stylesheet, or the structure of the source documents of the edited XQuery is displayed in a tree form in a view called the **XSLT/XQuery Input** view. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu. The tree nodes represent the elements of the documents.

XSLT

If you click a node in the **XSLT/XQuery Input** view, the corresponding template from the stylesheet is highlighted. A node can be dragged from this view and dropped in the editor area for quickly inserting `xsl:template`, `xsl:for-each`, or other XSLT elements that have the `match/select/test` attribute already completed. The value of the attribute is the correct XPath expression that refers to the dragged tree node. This value is based on the current editing context of the drop spot.

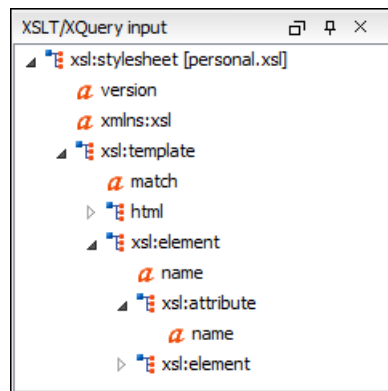


Figure 242: XSLT Input View

XSLT Example:

For the following XML document:

```
<personnel>
  <person id="Big.Boss">
    <name>
```

```

    <family>Boss</family>
    <given>Big</given>
  </name>
  <email>chief@oxygenxml.com</email>
  <link subordinates="one.worker"/>
</person>
<person id="one.worker">
  <name>
    <family>Worker</family>
    <given>One</given>
  </name>
  <email>one@oxygenxml.com</email>
  <link manager="Big.Boss"/>
</person>
</personnel>

```

and the following XSLT stylesheet:

```

<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  version="2.0">
  <xsl:template match="personnel">
    <xsl:for-each select="*">

    </xsl:for-each>
  </xsl:template>
</xsl:stylesheet>

```

if you drag the given element and drop it inside the `xsl:for-each` element, the following pop-up menu is displayed:

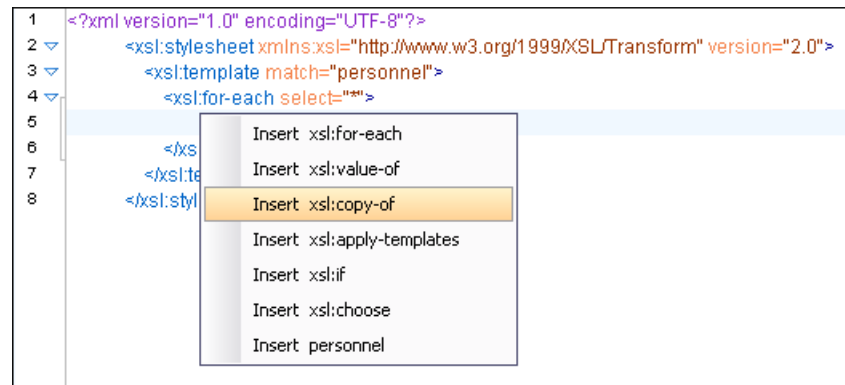


Figure 243: XSLT Input Drag and Drop Pop-up Menu

If you select **Insert xsl:copy-of** (for example), the resulting document will look like this:

```

<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="2.0">
  <xsl:template match="personnel">
    <xsl:for-each select="*">
      <xsl:copy-of select="name/given"/>
    </xsl:for-each>
  </xsl:template>
</xsl:stylesheet>

```

Figure 244: XSLT Input Drag and Drop Result

XQuery

You can also use the **XSLT/XQuery Input** view to drag and drop a node into the editing area to quickly insert XQuery expressions.

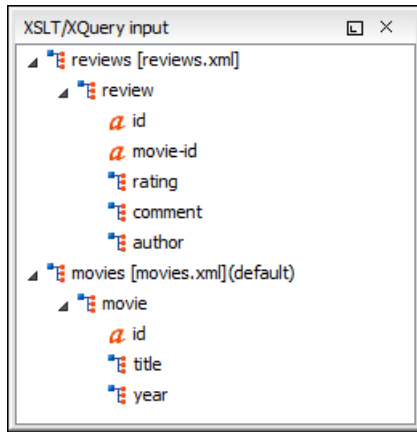


Figure 245: XQuery Input View

XQuery Example:

For the following XML documents:

```
<movies>
<movie id="1">
<title>The Green Mile</title>
<year>1999</year>
</movie>
<movie id="2">
<title>Taxi Driver</title>
<year>1976</year>
</movie>
</movies>
```

```
<reviews>
<review id="100" movie-id="1">
<rating>5</rating>
<comment>It is made after a great Stephen King book.
</comment>
<author>Paul</author>
</review>
<review id="101" movie-id="1">
<rating>3</rating>
<comment>Tom Hanks does a really nice acting.</comment>
<author>Beatrice</author>
</review>
<review id="104" movie-id="2">
<rating>4</rating>
<comment>Robert De Niro is my favorite actor.</comment>
<author>Maria</author>
</review>
</reviews>
```

and the following XQuery:

```
let $review := doc("reviews.xml")
for $movie in doc("movies.xml")/movies/movie
let $movie-id := $movie/@id
return
<movie id="{ $movie/@id }">
{ $movie/title }
{ $movie/year }
<maxRating>
{
}
</maxRating>
</movie>
```

If you drag the **review** element and drop it between the braces, the following pop-up menu is displayed:

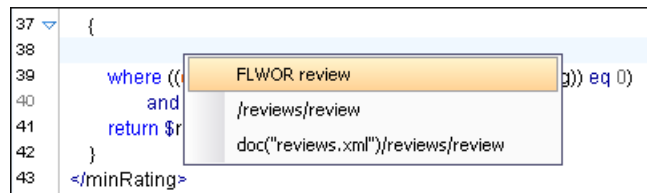


Figure 246: XQuery Input Drag and Drop Pop-up Menu

Select **FLWOR review**, the resulting document will look like this:

```

37 {
38   for $review in doc("reviews.xml")/reviews/review
39   return
40   where ((compare($rev/rating/text(), string($minRating)) eq 0)
41         and ($rev/@movie-id = $movie/@id))
42   return $rev/author
43 }
```

Figure 247: XQuery Input Drag and Drop Result

XSLT Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a stylesheet. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

If you want to see the hierarchy of a stylesheet, select the desired stylesheet in the **Project view** and choose **Resource Hierarchy** from the contextual menu.

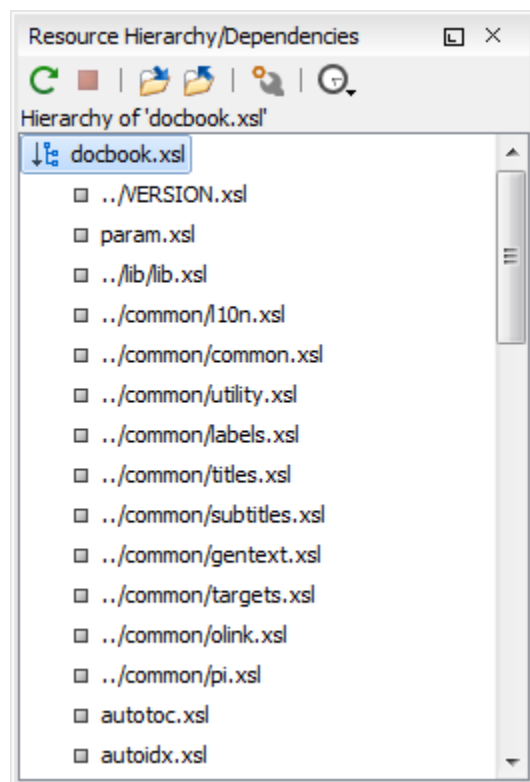


Figure 248: Resource Hierarchy/Dependencies View - Hierarchy for docbook . xsl

If you want to see the dependencies of a stylesheet, select the desired stylesheet in the **Project view** and choose **Resource Dependencies** from the contextual menu.

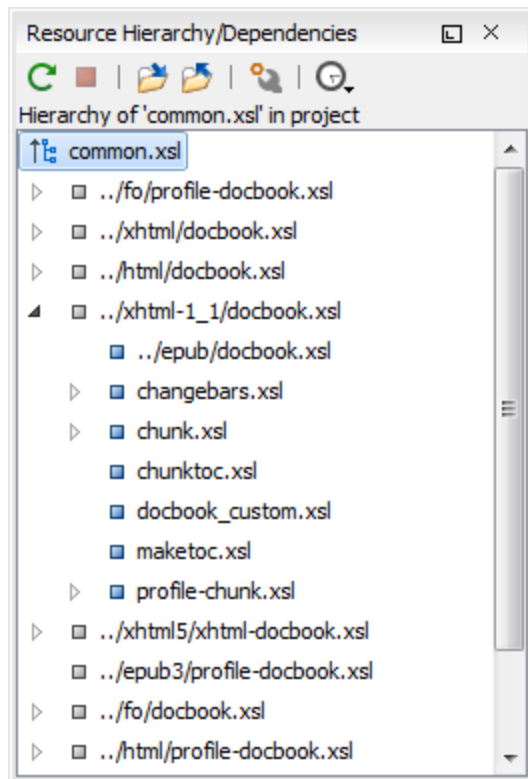


Figure 249: Resource Hierarchy/Dependencies View - Dependencies for common .xml

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

[Search and Refactor Operations Scope](#) on page 429

Moving/Renaming XSLT Resources

You can move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

XSLT Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of an XSLT component:

1. Right-click the desired component in the editor or **Outline** view.
2. Select the **Component Dependencies** action from the contextual menu.

The action is available for all named components (templates, variables, parameters, attribute sets, keys, functions, outputs).

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon ↺.

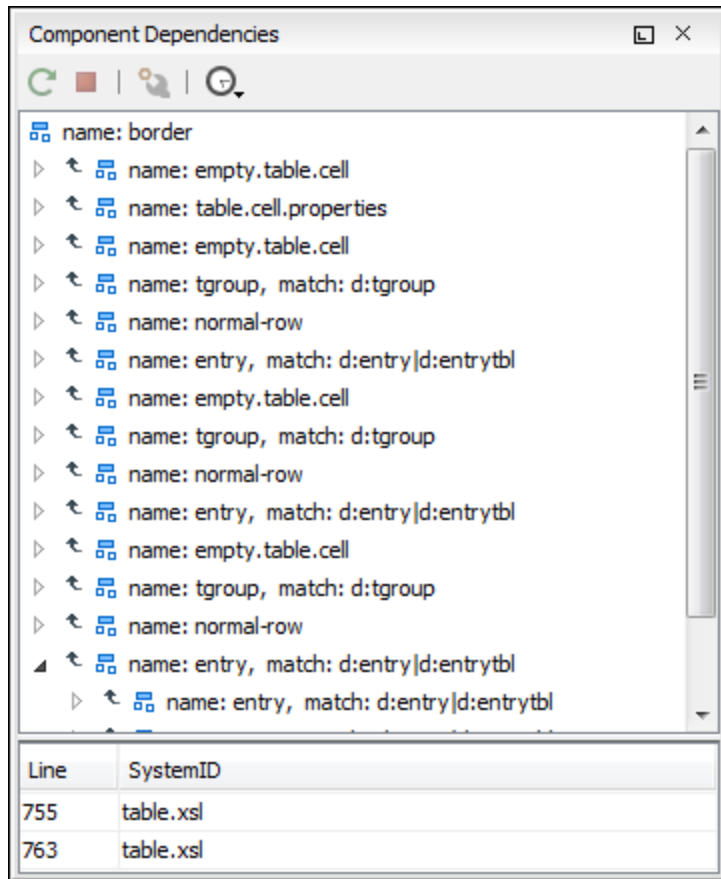


Figure 250: Component Dependencies View - Hierarchy for table.xsl

The **Component Dependencies** view includes the following toolbar actions:



Refresh

Refreshes the dependencies structure.



Stop

Stops the dependency computation.



Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.



History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

Related Information:

[Search and Refactor Operations Scope](#) on page 429

Highlight Component Occurrences

When a component (for example variable or named template) is found at current cursor position, Oxygen XML Developer performs a search over the entire document to find the component declaration and all its references. When found, they are highlighted both in the document and in the stripe bar, at the right side of the document.

Note: Oxygen XML Developer also supports occurrences highlight for template modes.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected and a new search is performed. All occurrences are removed when you start to edit the document.

This feature is enabled by default. To configure it, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Mark Occurrences**. A search can also be triggered with the **Search > Search Occurrences in File (Ctrl + Shift + U (Command + Shift + U on OS X))** contextual menu action. Matches are displayed in separate tabs of the [Results view](#).

Finding XSLT References and Declarations

The following search actions related with XSLT references and declarations are available from the **Search** submenu of the contextual menu and from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined but the currently edited resource is not part of the range of determined resources, a warning dialog box is displayed that allows you to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when a scope is defined.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope, if any. If a scope is defined but the current edited resource is not part of the range of resources determined by this scope, a warning dialog box is displayed that allows you to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when a scope is defined.
- **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Go to Definition** - Moves the cursor to the location of the definition of the current item.

Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Related Information:

[Search and Refactor Operations Scope](#) on page 429

XSLT Stylesheet Component Documentation Support

Oxygen XML Developer offers built-in support for documenting XSLT stylesheets. If the expanded [QName](#) of the element has a non-null namespace URI, the `xsl:stylesheet` element may contain any element not from the XSLT namespace. Such elements are referenced as user-defined data elements. Such elements can contain the documentation for the stylesheet and its elements (top-level elements whose names are in the XSLT namespace). Oxygen XML Developer offers its own XML schema that defines such documentation elements. The schema is named `stylesheet_documentation.xsd` and can be found in `[OXYGEN_INSTALL_DIR]/frameworks/stylesheet_documentation`. The user can also specify a custom schema in [XSL Content Completion options](#).

Content Completion

When content completion is invoked inside an XSLT editor by pressing **Ctrl + Space (Command + Space on OS X)**, it offers elements from the XSLT documentation schema (either the built-in one or one specified by user).

Adding Documentation Blocks

In **Text** mode, to add documentation blocks, press **Ctrl + Alt + D (Command + Alt + D on OS X)** or select **Add component documentation** from the contextual menu.

If the cursor is positioned inside the `xsl:stylesheet` element context, documentation blocks are generated for all XSLT elements. If the cursor is positioned inside a specific XSLT element (such as a template or function), a documentation block is generated for that element only.

Example: Documentation Block Using Oxygen XML Developer Built-in Schema

```
<xd:doc>
  <xd:desc>
    <xd:p>Search inside parameter <xd:i>string</xd:i>
      for the last occurrence of parameter
    <xd:i>searched</xd:i>. The substring starting from the 0 position
      to the identified last occurrence will be returned.
    <xd:ref name="f:substring-after-last" type="function"
      xmlns:f="http://www.oxygenxml.com/doc/xsl/functions">See also
    </xd:ref>
  </xd:desc>
  <xd:param name="string">
    <xd:p>String to be analyzed</xd:p>
  </xd:param>
  <xd:param name="searched">
    <xd:p>Marker string. Its last occurrence will be identified</xd:p>
  </xd:param>
  <xd:return>
    <xd:p>A substring starting from the beginning of <xd:i>string</xd:i>
      to the last occurrence of <xd:i>searched</xd:i>.
      If no occurrence is found an empty string will be returned.
    </xd:p>
  </xd:return>
</xd:doc>
```

XSLT Documentation Links

Oxygen XML Developer includes support for links inside XSLT documentation blocks. Using a construct like `<xd:a docid="user-defined-id">TEXT</xd:a>` will cause the browser to scroll to the particular anchor (the defined ID) in the current document. Using a construct like `<xd:a href="http://www.my-web-site">TEXT</xd:a>` or `<xd:a href="local-file-path/filename">TEXT</xd:a>` will open the referenced link in a new tab.

Example: Documentation Links

```
<xd:doc xmlns:xd="http://www.oxygenxml.com/ns/doc/xsl" id="thisDoc">
  <xd:desc>
    <xd:p>
      <xd:ref name="test" type="variable">My test variable</xd:ref>
      <xd:a docid="thisDoc">Link to this documentation, see
the the id="thisDoc" above</xd:a>
      <xd:a docid="otherDocID" href="included.xsl">Link to
otherDocID defined in included.xsl</xd:a>
    </xd:p>
  </xd:desc>
</xd:doc>
```

Related Information:

[Generating Documentation for an XSLT Stylesheet](#) on page 490

XSLT 3.0 Text Value Templates

Oxygen XML Developer offers built-in support for [XSLT 3.0 Text Value Templates](#), including content completion to present the variables and parameters from the current context and syntax highlighting.

A text node in the stylesheet is treated as a *text value template* if the following things are true:

- It is part of a [sequence constructor](#) or a child of an `xsl:text` instruction.
- There is an ancestor element with an `[xsl:]expand-text` attribute and on the innermost ancestor element that has such an attribute, the value of the attribute is yes.

Example:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
```

```

expand-text="yes"
version="3.0">

<xsl:param name="seq" as="xs:string*" select="'c', 'a', 'b', 'z'"/>
<xsl:template name="main">
  {sort($seq)}
</xsl:template>
</xsl:stylesheet>

```

For more information, see: [W3C XSLT Specifications: Text Value Templates](#).

XSLT Refactoring Actions

Oxygen XML Developer offers a set of actions that allow you to change the structure of an XSLT stylesheet without changing the results of running it in an XSLT transformation. Depending on the selected text, the following XSLT refactoring actions are available from the **Refactoring** submenu of the contextual menu (or from the **Document > Refactoring** menu):

-  **Extract template** (Active only when the selection contains well-formed elements) - Extracts the selected XSLT instructions sequence into a new template. It opens a dialog box that allows you to specify the name of the new template to be created. The possible changes to perform on the document can be previewed before altering the document. After pressing OK, the template is created and the selection is replaced with a `<xsl:call-template>` instruction referencing the newly created template.

Note: The newly created template is indented and its name is highlighted in the `<xsl:call-template>` element.
-  **Extract function** - Extracts the selected XSLT instructions sequence into a new function. It opens a dialog box that allows you to specify the name of the new function. It then moves the selected lines to a newly created XSLT function and inserts a function call in the place of the selected lines. You can also use parts of an XPath expression to create the new functions.
-  **Create local variable** - Creates an XSLT variable, wrapped around the selection. It opens a dialog box that allows you to specify the name of the new variable. It then wraps the selection in the variable and you can reference it at anytime in the code.
-  **Move to another stylesheet** (Active only when entire components are selected) - Allows you to move one or more XSLT global components (templates, functions, or parameters) to another stylesheet. It opens a dialog box that allows you to specify where the selected components will be moved to. Follow these steps when using the dialog box:
 - Choose whether you want to move the selected components to a new stylesheet or an existing one.
 - If you choose to move the components to an existing one, select the destination stylesheet. Press the **Choose** button to select the destination stylesheet file. Oxygen XML Developer will automatically check if the destination stylesheet is already contained by the hierarchy of the current stylesheet. If it is not contained, choose whether or not the destination stylesheet will be referenced (imported or included) from the current stylesheet. The following options are available:
 - Include** - The current stylesheet will use an `xsl:include` instruction to reference the destination stylesheet.
 - Import** - The current stylesheet will use an `xsl:import` instruction to reference the destination stylesheet.
 - None** - There will be created no relation between the current and destination stylesheets.
 - Press the **Move** button to move the components to the destination. The moved components are highlighted in the destination stylesheet.
-  **Convert attributes to xsl:attribute** - Converts the attributes from the selected element and represents each of them with an `<xsl:attribute>` instruction. For example, the following element:

```
<person id="Big{test}Boss"/>
```

is converted to:

```

<person>
  <xsl:attribute name="id">
    <xsl:text>Big</xsl:text>
    <xsl:value-of select="test"/>
    <xsl:text>Boss</xsl:text>
  </xsl:attribute>
</person>

```

```

</xsl:attribute>
</person>

```

- **Convert xsl:attributes to attributes** - Converts `<xsl:attribute>` elements to inline attributes for elements outside the XSL namespace. For example, the following element: It is the reverse of the **Convert attributes to xsl:attributes** action with the following limitations:
 - The `<xsl:attribute>` element is "text only".
 - The `<xsl:attribute>` element has a single `xsl:text` child element.
 - The `<xsl:attribute>` element has a single `xsl:value-of` child element. In this case, the value of the attribute will be the XPath expression from the `select` attribute surrounded by curly brackets (*text value template*).

```

<person>
  <xsl:attribute name="id">john.doe</xsl:attribute>
  <xsl:attribute name="email"><xsl:text>john.doe@example.com</xsl:text></xsl:attribute>
  <xsl:attribute name="manager"><xsl:value-of select="person[@id='boss']/name"/></xsl:attribute>
</person>

```

is converted to:

```

<person id="john.doe" email="john.doe@example.com" manager="{person[@id='boss']/name}"/>

```

- **Convert xsl:if into xsl:choose/xsl:when** - Converts one or more `xsl:if` element blocks into one or more `xsl:when` blocks surrounded by an `xsl:choose` element. If it is invoked on a selection, the selection must contain a well-formed fragment. If there is no selection, the `xsl:if` element that surrounds the content at the current cursor position is converted.

For example, the following block:

```

<xsl:if test="a">
  <!-- XSLT code -->
</xsl:if>

```

is converted to:

```

<xsl:choose>
  <xsl:when test="a">
    <!-- XSLT code -->
  </xsl:when>
  <xsl:otherwise>
    |
  </xsl:otherwise>
</xsl:choose>

```

(where the | character is the current cursor position)

- **Convert xsl:choose/xsl:when into xsl:if** - Converts each `xsl:when` block into an `xsl:if` block. For the *otherwise* branch, it also adds an *and* statement to each negated form of the conditions. For example, the following block:

```

<xsl:choose>
  <xsl:when test="c1">
    <!-- XSLT statement 1 -->
  </xsl:when>
  <xsl:when test="c2">
    <!-- XSLT statement 2 -->
  </xsl:when>
  <xsl:when test="c3">
    <!-- XSLT statement 3 -->
  </xsl:when>
  <xsl:otherwise>
    <!-- XSLT "otherwise" statement-->
  </xsl:otherwise>
</xsl:choose>

```

is converted to:

```

<xsl:if test="c1">
  <!-- XSLT statement 1 -->
</xsl:if>
<xsl:if test="c2">
  <!-- XSLT statement 2 -->
</xsl:if>
<xsl:if test="c3">
  <!-- XSLT statement 3 -->
</xsl:if>
<xsl:if test="not(c1) and not(c2) and not(c3)">

```

```
<!-- XSLT "otherwise" statement-->
</xsl:if>
```

- **Extract local variable** (Active on a selection made inside an attribute that contains an XPath expression) - Allows you to create a new local variable by extracting the selected XPath expression. After creating the new local variable before the current element, Oxygen XML Developer allows you to edit the name of the variable.
- **Extract global variable** (Active on a selection made inside an attribute that contains an XPath expression) - Allows you to create a new global variable by extracting the selected XPath expression. After creating the new global variable, Oxygen XML Developer allows you to edit the name of the variable.

Note: Oxygen XML Developer checks if the selected expression depends on local variables or parameters that are not available in the global context where the new variable is created.

- **Extract template parameter** (Active on a selection made inside an attribute that contains an XPath expression) - Allows you to create a new template parameter by extracting the selected XPath expression. After creating the new parameter, Oxygen XML Developer allows you to edit the name of the parameter.
- **Extract global parameter** (Active on a selection made inside an attribute that contains an XPath expression) - Allows you to create a new global parameter by extracting the selected XPath expression. After creating the new parameter, Oxygen XML Developer allows you to edit the name of the parameter.

Note: Oxygen XML Developer checks if the selected expression depends on local variables or parameters that are not available in the global context where the new parameter is created.

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
- **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

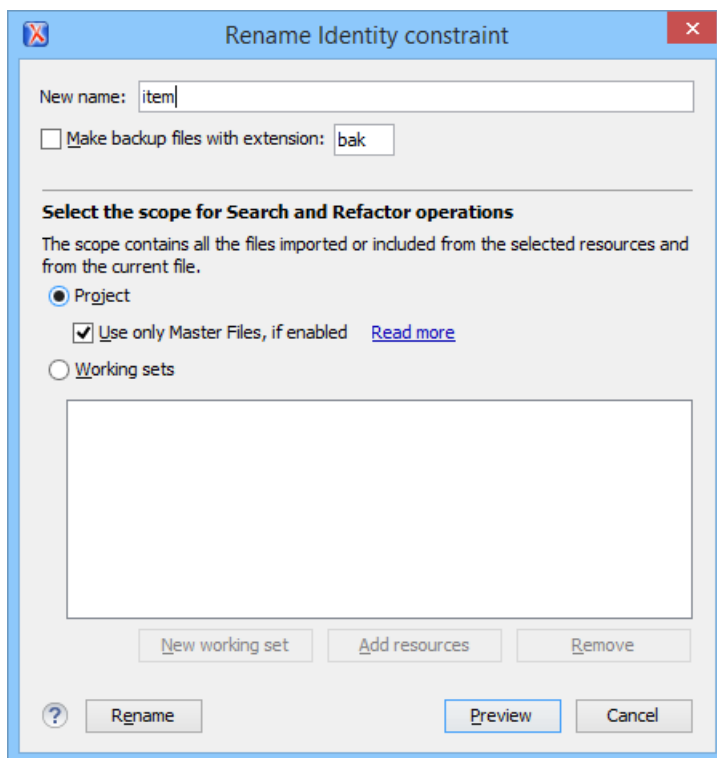


Figure 251: Rename Identity Constraint Dialog Box

Note: Many of these refactoring actions are also proposed by the [Quick Assist](#) support.

For more information about XSLT refactoring, watch our video demonstration:

XSLT Quick Assist Support

The **Quick Assist support** helps you to rapidly access search and refactoring actions. If one or more actions are available in the current context, they are accessible via a yellow bulb help (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *Quick Assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

Two categories of actions are available in the *Quick Assist* menu:

- Actions available on a selection made inside an attribute that contains an XPath expression:

Extract template

Extracts the selected XSLT instructions sequence into a new template.

Move to another stylesheet

Allows you to move one or more XSLT global components (templates, functions, or parameters) to another stylesheet.

Extract local variable

Allows you to create a new local variable by extracting the selected XPath expression.

Extract global variable

Allows you to create a new global variable by extracting the selected XPath expression.

Extract template parameter

Allows you to create a new template parameter by extracting the selected XPath expression.

Extract global parameter

Allows you to create a new global parameter by extracting the selected XPath expression.

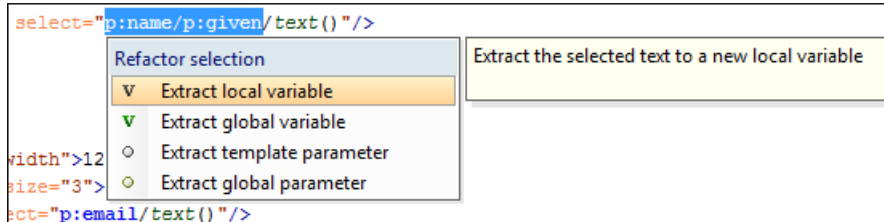


Figure 252: XSLT Quick Assist Support - Refactoring Actions

- Actions available when the cursor is positioned over the name of a component:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

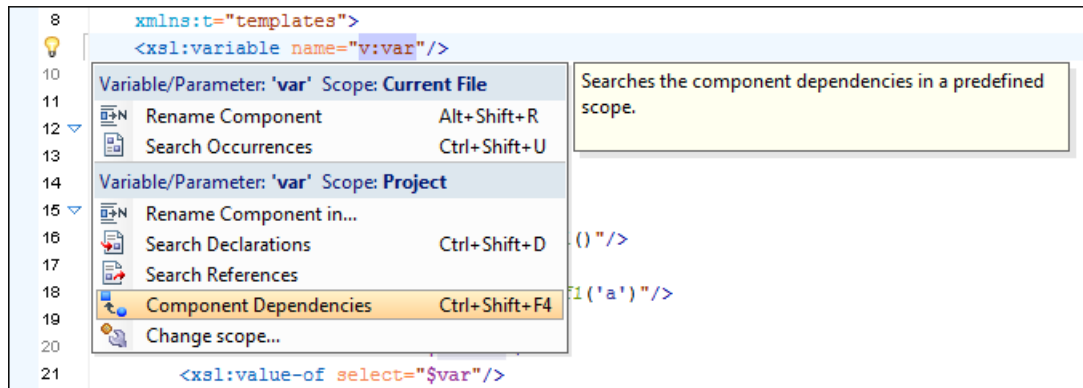


Figure 253: XSLT Quick Assist Support - Component Actions

Related Information:

[Component Dependencies View](#) on page 480

[XSLT Hierarchy View](#) on page 478

[XSLT Refactoring Actions](#) on page 484

[Search and Refactor Operations Scope](#) on page 429

XSLT Unit Test (XSpec)

XSpec is a behavior driven development (BDD) *framework* for XSLT, XQuery, and Schematron. XSpec consists of a syntax for describing the behavior of your XSLT, XQuery, or Schematron code, and some code that enables you to test your code against those descriptions.

Creating an XSLT Unit Test

To create an XSLT Unit Test, go to **File > New > XSLT Unit Test**. You can also create an XSLT Unit Test from the contextual menu of an XSL file in the **Project view**. Oxygen XML Developer allows you to customize the XSpec document when you create it. In the customization dialog box, you can enter the path to an XSL document or to a master XSL document.

When you create an XSpec document based on an XSL document, Oxygen XML Developer uses information from the validation and transformation scenarios associated with the XSL file. From the transformation scenario Oxygen XML Developer uses extensions and properties of Saxon 9.8.0.8, improving the Ant scenario associated with the XSpec document.

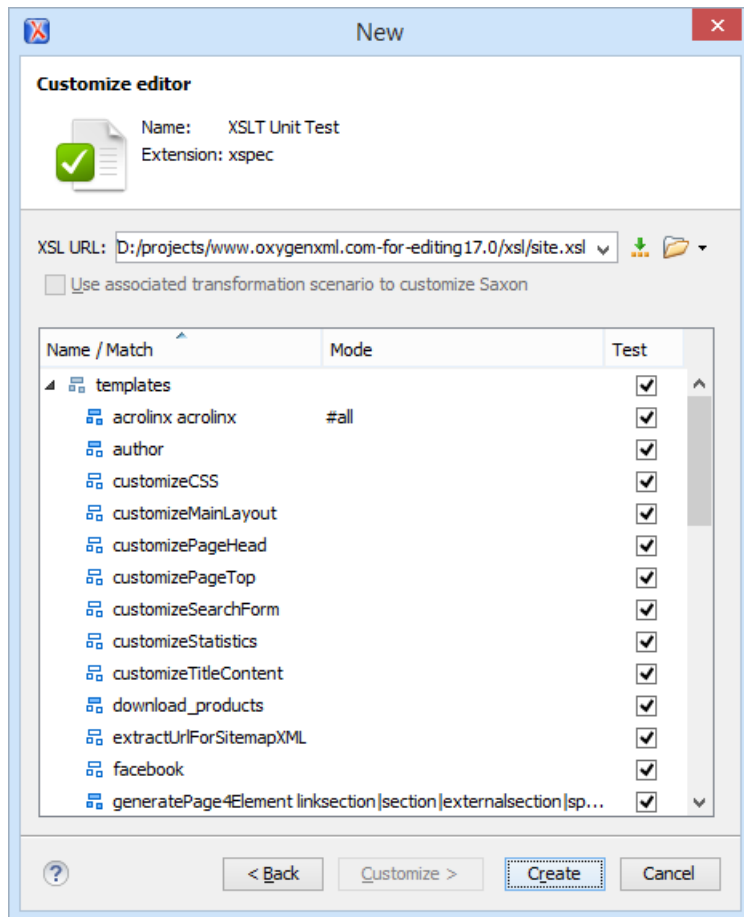


Figure 254: New XSLT Unit Test Wizard

Running an XSLT Unit Test

To run an XSLT Unit Test, open the XSpec file in an editor and click  **Apply Transformation Scenario(s)** on the main toolbar. This will run the built-in **Run XSpec Test** transformation scenario that is defined in the XSpec [framework](#).

Testing a Stylesheet

An XSpec file contains one or more test scenarios. You can test a stylesheet in one of the following ways:

- Test an entire stylesheet.

Testing is performed in a certain context. You can define a context as follows:

- Inline context, building the test based on a string.

```
<x:scenario label="when processing a para element">
  <x:context>
    <para>...</para>
  </x:context>
  ...
</x:scenario>
```

- Based on an external file, or on a part of an external file extracted with an XPath expression.

```
<x:scenario label="when processing a para element">
  <x:context href="source/test.xml" select="/doc/body/p[1]" />
  ...
</x:scenario>
```

- Test a function.

```
<x:scenario label="when capitalising a string">
```

```

<x:call function="eg:capital-case">
  <x:param select="an example string" />
  <x:param select="true()" />
</x:call>
...
</x:scenario>

```

- Test a template with a name.

```

<x:scenario label="when creating a table">
  <x:call template="createTable">
    <x:param name="nodes">
      <value>A</value>
      <value>B</value>
    </x:param>
    <x:param name="cols" select="2" />
  </x:call>
</x:scenario>

```

You can reference test files between each other, which allows you to define a suite of tests. For further details about test scenarios, go to <https://github.com/expath/xspec/wiki/Writing-Scenarios>.

Adding a Catalog to an XSpec Transformation

If your XSLT needs a catalog, you can add one to the XSpec transformation by doing one of the following:

- If you are using a [project](#) in Oxygen XML Developer, create a `catalog.xml` file in the project directory. This catalog will then be loaded automatically.
- [Edit](#) the **Run XSpec Test** transformation scenario, go to the **Parameters** tab, and set the value of the catalog parameter to the location of your catalog file.

Generating Documentation for an XSLT Stylesheet

You can use Oxygen XML Developer to generate detailed documentation in HTML format for the elements (top-level elements whose names are in the XSLT namespace) of an XSLT stylesheet. You can select what XSLT elements to include in the generated documentation and also the level of details to present for each of them. The elements are hyperlinked. To generate documentation in a [custom output format](#), you can edit the XSLT stylesheet used to generate the documentation, or create your own stylesheet.

To open the **XSLT Stylesheet Documentation** dialog box, select **XSLT Stylesheet Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

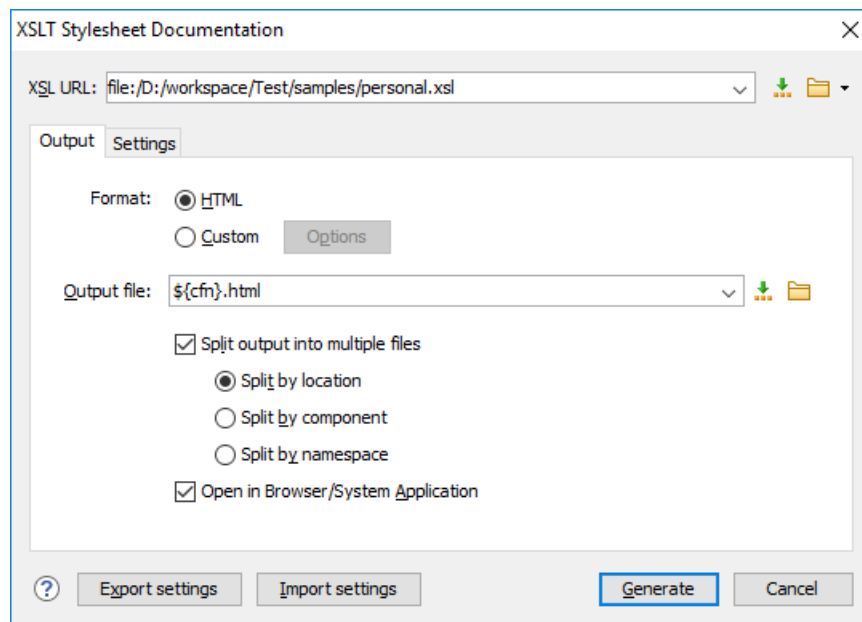


Figure 255: XSLT Stylesheet Documentation Dialog Box

The **XSL URL** field of the dialog box must contain the full path to the XSL Stylesheet file you want to generate documentation for. The stylesheet may be a local or a remote file. You can specify the path to the stylesheet by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.

Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in [HTML output format](#).
 - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a [Custom format options dialog box](#) where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. For large XSLT stylesheets, choosing another split criterion may generate smaller output files, providing faster documentation browsing. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.

Note: To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

Settings Tab

When you generate documentation for an XSLT stylesheet you can choose what XSLT elements to include in the output (templates, functions, global parameters, global variables, attribute sets, character maps, keys, decimal formats, output formats, XSLT elements from referenced stylesheets) and the details to include in the documentation.

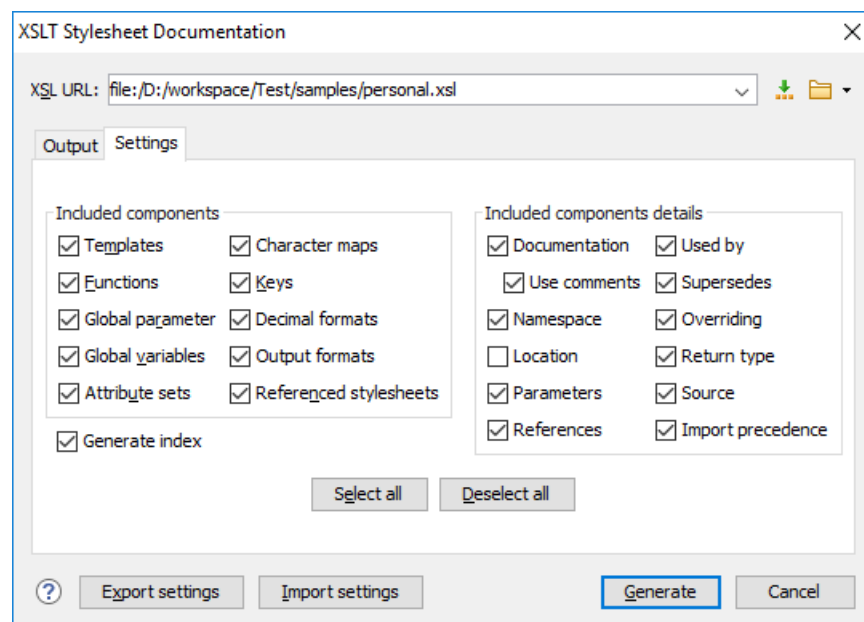


Figure 256: Settings Tab of the XSLT Stylesheet Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following components: **Templates, Functions, Global parameters, Global variables, Attribute sets, Character maps, Keys, Decimal formats, Output formats, Referenced stylesheets.**

You can choose whether or not to include the following other details:

- **Documentation** - Shows the documentation for each XSLT element. For HTML format, the user-defined data elements that are recognized and transformed in documentation blocks of the XSLT elements they precede, are the ones from the following schemas:
 - Oxygen XML Developer built-in XSLT documentation schema.
 - A subset of DocBook 5 elements. The recognized elements are: *section, sect1 to sect5, emphasis, title, ulink, programlisting, para, orderedlist, itemizedlist.*
 - A subset of DITA elements. The recognized elements are: *concept, topic, task, codeblock, p, b, i, ul, ol, pre, sl, sli, step, steps, li, title, xref.*
 - Full XHTML 1.0 support.
 - XSLStyle documentation environment. XSLStyle uses DocBook or DITA languages inside its own user-defined data elements. The supported DocBook and DITA elements are the ones mentioned above.
 - DOXSL documentation [framework](#). Supported elements are : *codefrag, description, para, docContent, documentation, parameter, function, docSchema, link, list, listitem, module, parameter, template, attribute-set;*Other XSLT documentation blocks that are not recognized will just be serialized inside an HTML *pre* element. You can change this behavior by using a [custom format](#) instead of the built-in [HTML format](#) and providing your own XSLT stylesheets.
- **Use comments** - Controls whether or not the comments that precede an XSLT element is treated as documentation for the element they precede. Comments that precede or succeed the *xsl:stylesheet* element, are treated as documentation for the whole stylesheet. Note that comments that precede an import or include directive are not collected as documentation for the imported/included module. Also, comments from within the body of the XSLT elements are not collected at all.
- **Namespace** - Shows the namespace for named XSLT elements.
- **Location** - Shows the stylesheet location for each XSLT element.
- **Parameters** - Shows parameters of templates and functions.
- **References** - Shows the named XSLT elements that are referenced from within an element.
- **Used by** - Shows the list of all the XSLT elements that reference the current named element.
- **Supersedes** - Shows the list of all the XSLT elements that are superseded the current element.
- **Overriding** - Shows the list of all the XSLT elements that override the current element.
- **Return type** - Shows the return type of the function.
- **Source** - Shows the text stylesheet source for each XSLT element.
- **Import precedence** - Shows the computed import precedence as declared in the XSL transformation specifications.
- **Generate index** - Creates an index with all the XSLT elements included in the documentation.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

Import settings - Reloads the settings from the exported file.

Generate - Use this button to generate the XSLT documentation.

Related Information:

[XSLT Stylesheet Component Documentation Support](#) on page 482

Generate XSLT Documentation in HTML Format

When using the [XSLT Stylesheet Documentation dialog box](#) to generate XSLT documentation in HTML format, it is presented in a visual diagram style with various sections, hyperlinks, and options.

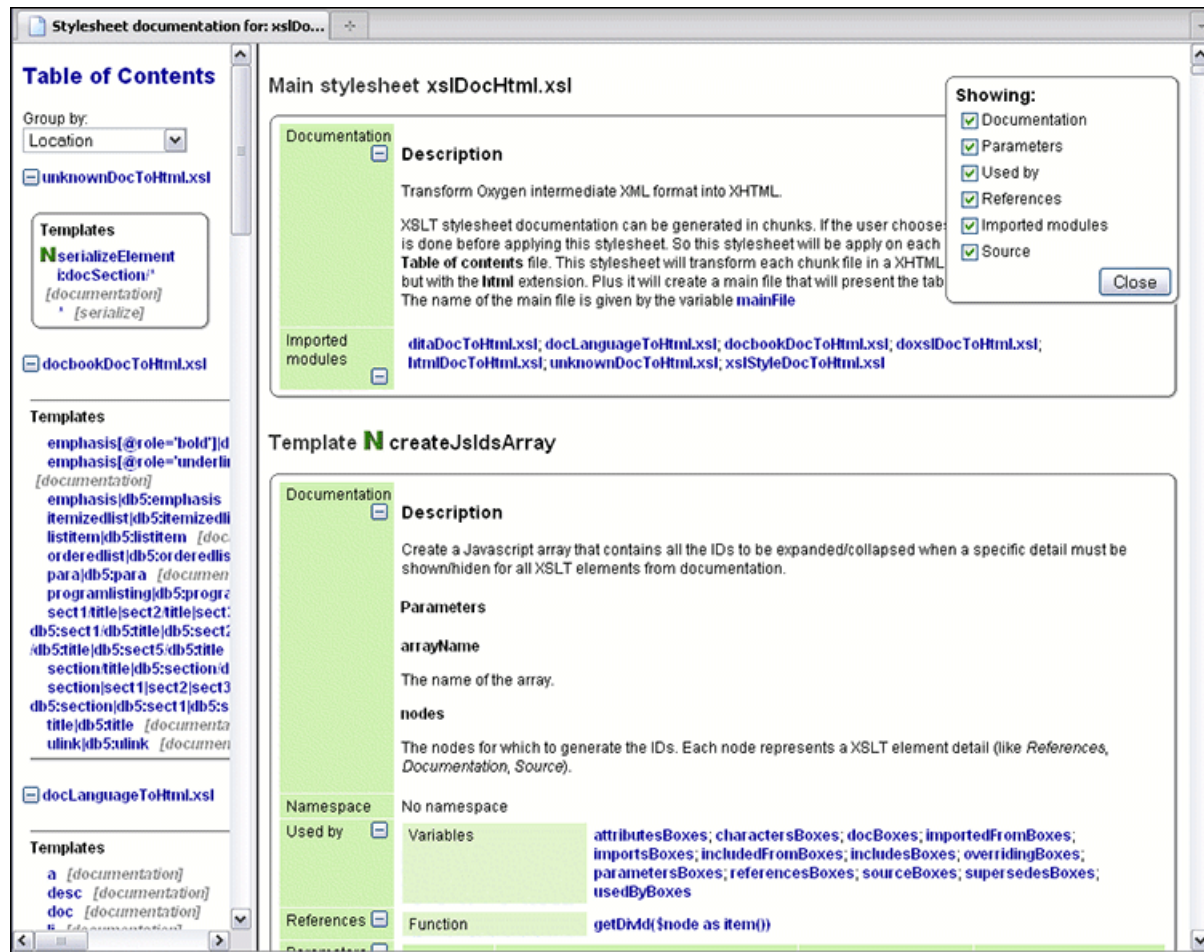


Figure 257: XSLT Stylesheet Documentation Example

The generated documentation includes the following:

- Table of Contents - You can group the contents by namespace, location, or component type. The XSLT elements from each group are sorted alphabetically (named templates are presented first and the match ones second).
- Information about main, imported, and included stylesheets. This information consists of:
 - XSLT modules included or imported by the current stylesheet.
 - The XSLT stylesheets where the current stylesheet is imported or included.
 - The stylesheet location.

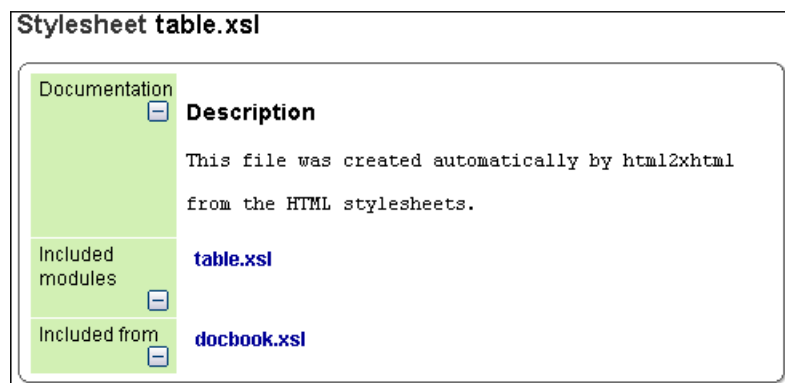


Figure 258: Information About an XSLT Stylesheet

If you choose to split the output into multiple files, the table of contents is displayed in the left frame. The contents are grouped using the same criteria as the split.

After the documentation is generated, you can collapse or expand details for some stylesheet XSLT elements by using the **Showing** options or the  **Collapse** or  **Expand** buttons.




Figure 259: Showing Options

For each element included in the documentation, the section presents the element type followed by the element name (value of the name or match attribute for match templates).

Function func:substring-before-last

Documentation

Description

Get the substring before the last occurrence of the given substring

Parameters

string

The string in which to search

searched

The string to search

Return

The substring starting from the start of the **string** to the index of the last occurrence of **searched**

Namespace

http://www.oxygenxml.com/doc/xsl/functions

Type

xs:string

Used by

Template

Nindex

Function

func:substring-before-last(\$string as item(), \$searched as item())

Variable

indexFile

References

Function

substring-before-last(\$string as item(), \$searched as item())

Parameters

QName

Namespace

searched

No namespace

string

No namespace

Import precedence

7

Source

```

<xsl:function as="xs:string" name="func:substring-before-last">
  <xsl:param name="string"/>
  <xsl:param name="searched"/>
  <xsl:variable name="toReturn">
    <xsl:choose>
      <xsl:when test="contains($string, $searched)">
        <xsl:variable name="before" select="substring-before($string, $searched)"/>
        <xsl:variable name="rec" select="func:substring-before-last(substring-after
      <xsl:choose>

```

Figure 260: Documentation for an XSLT Element

Generate XSLT Documentation in a Custom Format

XSLT stylesheet documentation can be also generated in a custom format. You must write your custom stylesheet based on the schema `xs1DocSchema.xsd` from `[OXYGEN_INSTALL_DIR]/frameworks/`

Editing Specific Document Types

494

stylesheet_documentation. You can create a custom format starting from one of the stylesheets used in the predefined HTML, PDF, and DocBook formats. These stylesheets are available in `[OXYGEN_INSTALL_DIR]/frameworks/stylesheet_documentation/xsl`.

To generate XSLT documentation in a custom format:

1. Select **Tools > Generate Documentation > XSLT Stylesheet Documentation** to open the [XSLT Stylesheet Documentation dialog box](#).
2. Select **Custom** for the **Format** and click the **Options** button.
3. In this next dialog box, specify your own stylesheet to transform the intermediary XML generated in the documentation process.
4. You can also choose to copy additional resources into the output folder or choose whether or not to keep the intermediate XML files created during the documentation process.
5. Click **OK** to close this dialog box and then click **Generate**.

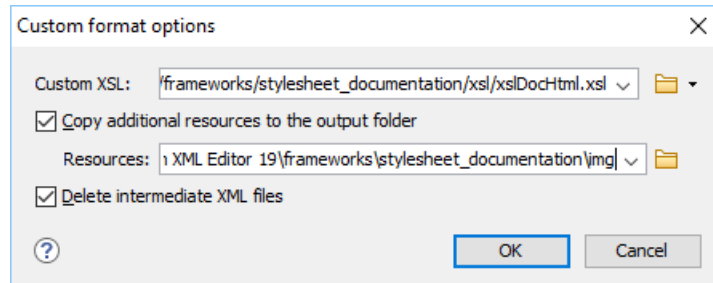


Figure 261: Custom Format Options Dialog Box

Generating XSLT Documentation From the Command-Line Interface

You can export the settings of the **XSLT Stylesheet Documentation** dialog box to an XML file by pressing the **Export settings** button. With the exported settings file, you can generate the same documentation from the command line by running the script `stylesheetDocumentation.bat` (on Windows) / `stylesheetDocumentation.sh` (on OS X / Linux) located in the Oxygen XML Developer installation folder. The script can be integrated in an external batch process launched from the command-line interface.

The command-line parameter of the script is the relative path to the exported XML settings file. The files that are specified with relative paths in the exported XML settings are resolved relative to the script directory.

Example:

```
<serialized>
  <map>
    <entry>
      <String xml:space="preserve">xsd.documentation.options</String>
      <xsdDocumentationOptions>
        <field name="outputFile">
          <String xml:space="preserve">${cfn}.html</String>
        </field>
        <field name="splitMethod">
          <Integer xml:space="preserve">1</Integer>
        </field>
        <field name="openOutputInBrowser">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="format">
          <Integer xml:space="preserve">1</Integer>
        </field>
        <field name="customXSL">
          <null/>
        </field>
        <field name="deleteXMLFiles">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeIndex">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeGlobalElements">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeGlobalAttributes">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
        <field name="includeLocalElements">
          <Boolean xml:space="preserve">true</Boolean>
        </field>
      </xsdDocumentationOptions>
    </entry>
  </map>
</serialized>
```

```

<field name="includeLocalAttributes">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeSimpleTypes">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeComplexTypes">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeGroups">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeAttributesGroups">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeRedefines">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="includeReferencedSchemas">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsDiagram">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsNamespace">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsLocation">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsType">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsTypeHierarchy">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsModel">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsChildren">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsInstance">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsUsedby">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsProperties">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsFacets">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsAttributes">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsIdentityConstr">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsEscapeAnn">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsSource">
  <Boolean xml:space="preserve">true</Boolean>
</field>
<field name="detailsAnnotations">
  <Boolean xml:space="preserve">true</Boolean>
</field>
</xsdDocumentationOptions>
</entry>
</map>
</serialized>

```

Compiling an XSL Stylesheet for Saxon

As of Saxon 9.7, it is possible to export a compiled form of a stylesheet as an XML file (called a *stylesheet export file* or SEF). Oxygen XML Developer includes a simple tool called **Compile XSL Stylesheet for Saxon** (found in the **Tools** menu) that does this for you.

Use-Cases for a Stylesheet Export File (SEF)

- **Use Saxon-JS to run transformations in a browser** - A *stylesheet export file* (SEF) is needed if you want to use the [Saxon-JS product](#) to run transformations in a browser, as in the following example:

```

<script type="text/javascript" src="SaxonJS/SaxonJS.min.js"></script>
<script>
  window.onload = function() {

```

```

    SaxonJS.transform({
      stylesheetLocation: "books.sef",
      sourceLocation: "books.xml"
    });
  }
</script>

```

- **Use SEF to run transformations in Oxygen XML Developer** - You can also use a *stylesheet export file* (SEF) in Oxygen XML Developer to apply an XSLT transformation over an XML file. This requires **Saxon-EE** or **Saxon-PE** versions of the Saxon product and you must select one of those two versions for the **Target** when you [configure the SEF file](#). When configuring the XSLT transformation, you will specify the SEF file in the **XSL URL** field.

Compiling an SEF File

The **Compile XSL Stylesheet for Saxon** tool can be found in the **Tools** menu and it compiles a specified stylesheet as an XML file (*stylesheet export file* with a file extension of `.sef`).

Selecting this tool opens the **Compile XSL Stylesheet for Saxon** dialog box that allows you to configure some options for conversion.

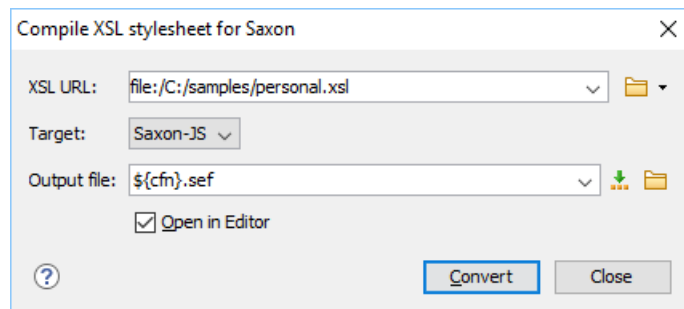


Figure 262: Compile XSL Stylesheet for Saxon Dialog Box

This dialog box includes the following options:

XSL URL

Allows you to select URL of the source XSL stylesheet. You can specify the URL by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down list.

Target

Allows you to select the type of Saxon product that the export file will be used with. You can choose **Saxon-JS**, **Saxon-EE**, **Saxon-PE**, or **Saxon-HE**.

Output file

You can specify the path where the output file will be saved by entering it in the text field, using the **Insert Editor Variables** button, or using the browsing tool button ().

Open in Editor

Select this option to open the resulting *stylesheet export file* in the main Oxygen XML Developer editing pane.

Convert

Use this button to generate the *stylesheet export file* according the options selected in this dialog box.

Editing Ant Build Files

Oxygen XML Developer includes an Ant editor that provides a variety of specialized features to assist you with creating and editing Ant build files. The editor includes some specialized views, content completion assistance, automatic validation, syntax highlighting, [Quick Assist](#) and [Quick Fix](#) support, as well as numerous common editing and search features.

Related Information:

[Editing XML Documents in Text Mode](#) on page 359

Editing Ant Build Files in the Context of Master Files

Smaller interrelated modules that define a complex Ant build file cannot be correctly edited or validated individually due to their interdependency with other modules. For example, a *target* defined in a main build file is not visible when you edit an included or imported module. Oxygen XML Developer provides support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger Ant build structure.

You can set a main Ant build file either by using the [master files support from the Project view](#), or a [validation scenario](#).

To set a *master file* using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main build file. In this case, it considers the current module as the main build file.

The advantages of editing in the context of *master file* include:

- Correct validation of a module in the context of a larger build structure.
- [Content Completion Assistant](#) displays all components valid in the current context.
- The [Outline view](#) displays the components collected from the entire build file structure.

Validating Ant Build Files

Oxygen XML Developer performs the validation of Ant build files with the help of a built-in processor, which is largely based on the [Apache Ant](#) libraries. The path to these libraries can be configured in the [Ant preferences page](#). The validation processor accesses the [parameters set in the associated Ant transformation scenario](#) and uses them as Ant properties when validating the current build script.

Oxygen XML Developer automatically validates Ant build files as you type. You can also validate the currently edited file by selecting the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu.

Tip: To make a custom task available in the Ant validation engine, add a [JAR](#) file that contains the task implementation to the library directory of the built-in Ant distribution that comes bundled with Oxygen XML Developer (for example, `[OXYGEN_INSTALL_DIR]/tools/ant/lib` folder).

Create a Validation Scenario for Ant Build Files

If you want to customize the validation process for Ant build files, you can create a new validation scenario (or configure an existing one). For example, if you want to validate interrelated modules that define a complex Ant build file, you can specify the main Ant file by configuring a validation scenario. To create or configure a validation scenario, select  **Configure Validation Scenario(s)** from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu.

Passing parameters to the Ant validation engine

Ant validation scenarios cannot be configured to accept custom Ant parameters. However, you can specify values for the parameters in your Ant document using an Ant transformation scenario:

1. Create a new [Ant transformation scenario](#).
2. Edit the transformation scenario and [set all parameters](#) you need to pass to your Ant document.
3. Associate the new scenario with your Ant document (in the [Configure Transformation Scenarios\(s\) dialog box](#)). You do not need to run the transformation scenario. Every time a validation operation is triggered, the built-in validation engine uses the parameters set in the transformation scenario.

Note: This behavior is available only for the validation scenarios that use the built-in validation engine. The custom defined validation engines do not benefit from this functionality.

Transforming Ant Build Files

Oxygen XML Developer includes a few built-in transformation scenarios that allow you to transform Ant build files. They are listed in the **Ant** section in the [Configure Transformation Scenario\(s\) dialog box](#):

- **ANT** - This transformation scenario runs as an external process that executes the Ant build script with the built-in Ant distribution ([Apache Ant](#) version 1.9.8) that is included with Oxygen XML Developer, or optionally with a custom Ant distribution configured in the scenario.
- **ANT (with Saxon 9 EE XSLT support)** - This transformation scenario allows Ant XSLT tasks to be performed using Saxon 9 [JAR](#) libraries that come bundled with Oxygen XML Developer and all defined XML catalogs are also taken into account during the transformation.

Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Applying Associated Transformation Scenarios](#) on page 795

[Ant Transformation](#) on page 773

This type of transformation allows you to configure the options and parameters of an Ant build script.

Ant Quick Fix Support

The Oxygen XML Developer [Quick Fix support](#) helps you resolve missing target reference errors that may occur when developing Ant build documents.

To activate this feature, hover over or place the cursor in the highlighted area of text where a validation error or warning occurs. If a *Quick Fix* is available for that particular error or warning, you can access the *Quick Fix* proposals with any of the following methods:

- When hovering over the error or warning, the proposals are presented in a tooltip pop-up window.
- If you place the cursor in the highlighted area where a validation error or warning occurs, a *Quick Fix* icon (💡) is displayed in the stripe on the left side of the editor. If you click this icon, Oxygen XML Developer displays the list of available fixes.
- With the cursor placed in the highlighted area of the error or warning, you can also invoke the *Quick Fix* menu by pressing **Alt + 1 (Command + Alt + 1 on OS X)** on your keyboard.

Oxygen XML Developer provides the following types of *Quick Fixes* for Ant build files:

- **Create new target** - Creates a new target with the specified name.
- **Change reference to "targetName"** - Corrects the reference to point to an already defined target.
- **Remove target reference** - Removes the erroneous reference.

Content Completion in Ant Build Files

The list of proposals offered by the [Content Completion Assistant](#) in Ant build files are context-sensitive and includes proposals that are valid at the current cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

The *Content Completion Assistant* proposes various item types that are defined in the current Ant build and in the imported and included builds. The proposals include:

- Element names
- Attribute names
- Property names

Note: In addition to the user-defined properties, the *Content Completion Assistant* offers the following values:

- The system properties set in the Java Virtual Machine.
- The built-in properties that Ant provides.
- Target names
- Task and type reference IDs

Tip: To make a custom task available in the *Content Completion Assistant*, add a [JAR](#) file that contains the task implementation to the library directory of the built-in Ant distribution that comes bundled with Oxygen XML Developer (for example, `[OXYGEN_INSTALL_DIR]/tools/ant/lib` folder).

Note: For Ant resources, the proposals are collected starting from the [master files](#). The *master files* can be defined in the project or in the associated validation scenario. For further details about the *Master Files* support go to [Defining Master Files at Project Level](#).

Related Information:

Syntax Highlighting in Ant Files

Oxygen XML Developer supports syntax highlighting in Ant files to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for Ant build files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **Ant Property** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

Ant Outline View

The **Outline** view for Ant files displays the list of all the components (properties, targets, extension points, task/type definitions and references) from both the edited Ant build file and its imported and included modules. For Ant resources, the **Outline** view collects its components starting from the [master files](#). The *master files* can be defined in the project and the main build file can be specified in a validation scenario. For more details, see [Defining Master Files at Project Level](#).

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

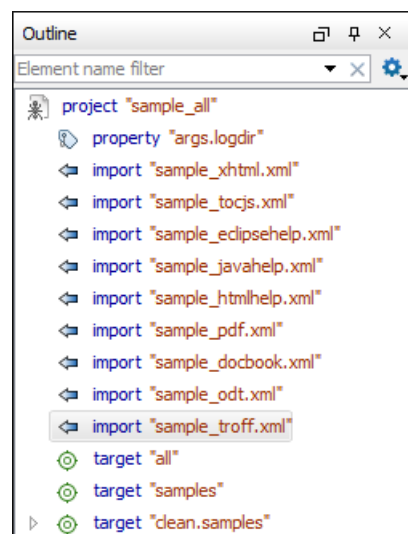


Figure 263: Ant Outline View

The following actions are available in the **Settings** menu on the Outline view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches. By default, this filter is not selected.

Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the Ant editor. Selecting one of the components from the outline view also selects the corresponding item in the source document.

When the  **Show components** option is selected, the following actions are available:

Show XML structure

Displays the XML document structure in a tree-like manner.

Sort

Sorts the components in the **Outline** view alphabetically.

Show all components

Displays all components that were collected starting from the *master file*. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/type

The build file components can be grouped by location and type.

When the  **Show XML structure** option is selected, the following actions are available:

Show components

Switches the **Outline** view to the components display mode.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following actions are available in the contextual menu of the **Outline** view (when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that can be inserted as children of the current element.

Insert Before

Displays a list of elements that can be inserted as siblings of the current element, before the current element.

Insert After

Displays a list of elements that can be inserted as siblings of the current element, after the current element.

Edit Attributes

Displays an in-place attribute editing window.

Toggle Comment

Comments/uncomments the currently selected element.

Search References Ctrl + Shift + R (Command + Shift + R on OS X)

Searches all references of the item found at current cursor position in the defined scope. See [Find References and Declarations of Ant Components](#) for more details.

Search References in

Searches all references of the item found at current cursor position in the specified scope. See [Find References and Declarations of Ant Components](#) for more details.

Component Dependencies

Opens the [Ant Component Dependencies](#) view that allows you to see the dependencies for the current selected component.

Rename Component in

Renames the selected component. See [Ant Refactoring Actions](#) for more details.

Cut, Copy, Delete

Executes the typical editing actions on the currently selected component.

Expand More

Expands recursively all sub-components of the selected component.

Collapse All

Collapses recursively all sub-components of the selected component.

You can search a component in the **Outline** view by typing its name in the filter text field at the top of the view or directly on the tree structure. When you type the component name in the text field, you can switch to the tree structure using the following:

- **Down** arrow key
- **Tab** key
- **Shift-Tab** key combination

To switch from tree structure to the filter text field, you can use **Tab** and **Shift-Tab**.

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match (such as ***textToFind***).

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Oxygen XML Developer has a predefined order for the groups in the **Outline** view:

- For location, the names of the files are sorted alphabetically. The file you are editing is located at the top of the list.
- For type, the order is: properties, targets, references.

Note: When no grouping is available Oxygen XML Developer sorts the components depending on their order in the document. Oxygen XML Developer also takes into account the name of the file that the components are part of.

Ant Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for an Ant build file by analyzing imported or included build files. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

If you want to see the hierarchy of a build file, select it in the **Project view** and choose **Resource Hierarchy** from the contextual menu.

If you want to see the dependencies of a build file, select it in the **Project view** and choose **Resource Dependencies** from the contextual menu.

The following actions are available in the **Resource Hierarchy/Dependencies** view:

 Refresh

Refreshes the Hierarchy/Dependencies structure.

 Stop

Stops the hierarchy/dependencies computing.

 Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

 Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

 Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

 History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

 Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Ant Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of an Ant component:

1. Right-click the desired component in the editor or **Outline** view.
2. Select the **Component Dependencies** action from the contextual menu.

The action is available for the following components: *properties*, *targets*, *extension-points*, and *references* (those that have an ID set).

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon .

The **Component Dependencies** view includes the following toolbar actions:

 Refresh

Refreshes the dependencies structure.

 Stop

Stops the dependency computation.

 Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.

 History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

Related Information:

[Search and Refactor Operations Scope](#) on page 429

Highlight Component Occurrences

When a component (for example *property* or *target*) is found at the current cursor position, they are highlighted in both the document and in the stripe bar at the right side of the document. Oxygen XML Developer also supports occurrences highlight for type and task references.

Customizable colors are used (one for the component definition and another one for component references). Occurrences are displayed until another component is selected and a new search is performed. All highlights are removed when you start to edit the document.

This feature is enabled by default. To configure it, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Mark Occurrences**. If your particular type of file is not selected, you can perform this search by going to **Search > Search Occurrences in File Ctrl + Shift + U (Command + Shift + U on OS X)** in the contextual menu. Matches are displayed in separate tabs of the [Results view](#).

Related Information:

[Mark Occurrences Preferences](#) on page 93

Find References and Declarations of Ant Components

The following search actions related to references and declarations of Ant components are available from the **Search** submenu of the contextual menu and from the **Document > References** menu::

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify after selecting a scope for the search operation.

-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when defining a new scope.
- **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Go to Definition** - Moves the cursor to the location of the definition of the current item.
Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Related Information:

[Search and Refactor Operations Scope](#) on page 429

Ant Refactoring Actions

The following refactoring actions can be applied on *targets*, *extension-points*, *properties*, and *references* and allow you to consistently rename a component in the entire Ant build file structure. They are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

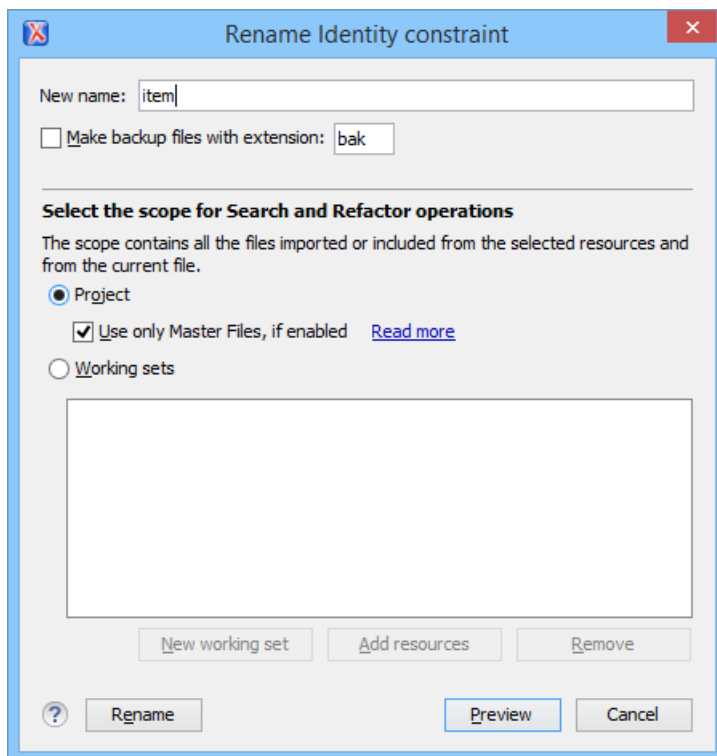


Figure 264: Rename Identity Constraint Dialog Box

Ant Quick Assist Support

The [Quick Assist support](#) helps you to rapidly access search and refactoring actions. If one or more actions are available in the current context, they are accessible via a yellow bulb icon (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *Quick Assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

The *Quick Assist* support offers direct access to the following actions:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

Related Information:

[Ant Component Dependencies View](#) on page 503

[Ant resource Hierarchy/Dependencies View](#) on page 502

[Ant Refactoring Actions](#) on page 505

[Search and Refactor Operations Scope](#) on page 429

Editing XML Schemas

An XML Schema describes the structure of an XML document and is used to validate XML document instances against it, to check that the XML instances conform to the specified requirements. If an XML instance conforms to the schema then it is said to be valid. Otherwise, it is invalid.

Oxygen XML Developer offers support for both XML Schema 1.0 and 1.1 and you can edit XML Schema files in the following editing modes:

- **Text editing mode** - Allows you to edit XML Schema files in a source editing mode.
- **Grid editing mode** - Displays XML Schema files in a structured spreadsheet-like grid.
- **Design editing mode** - Visual schema designer that helps you understand the structure and develop complex schemas.

For information about applying and detecting schemas, see [Associating a Schema to XML Documents](#) on page 420.

For more information about editing XML Schemas, see our video demonstration:

<https://www.youtube.com/embed/vz1eIZELQgc>

Related Information:

[Associating a Schema to XML Documents](#) on page 420

Design Editing Mode (XML Schema Diagram Editor)

XML Schemas allow document designers to specify the allowed structure and content of an XML document and to check if an XML document is valid.

Oxygen XML Developer provides a simple and expressive XML Schema diagram editor (**Design** mode) for editing XML Schemas. The schema diagram helps both the content authors who want to understand a schema and schema designers who develop complex schemas.

The diagram font can be increased using the usual Oxygen XML Developer shortcuts: **(Ctrl (Meta on Mac OS) + "+")**, **(Ctrl (Meta on Mac OS) + "-")**, **(Ctrl (Meta on Mac OS) + 0)** or **(Ctrl (Meta on Mac OS) - mouse wheel)**. The whole diagram can also be zoomed with one of the predefined factors available in the [Schema preferences panel](#). The same zoom factor is applied for the print and save actions.

To switch to this mode, select **Design** at the bottom of the editing area.

Text Grid Author **Design**

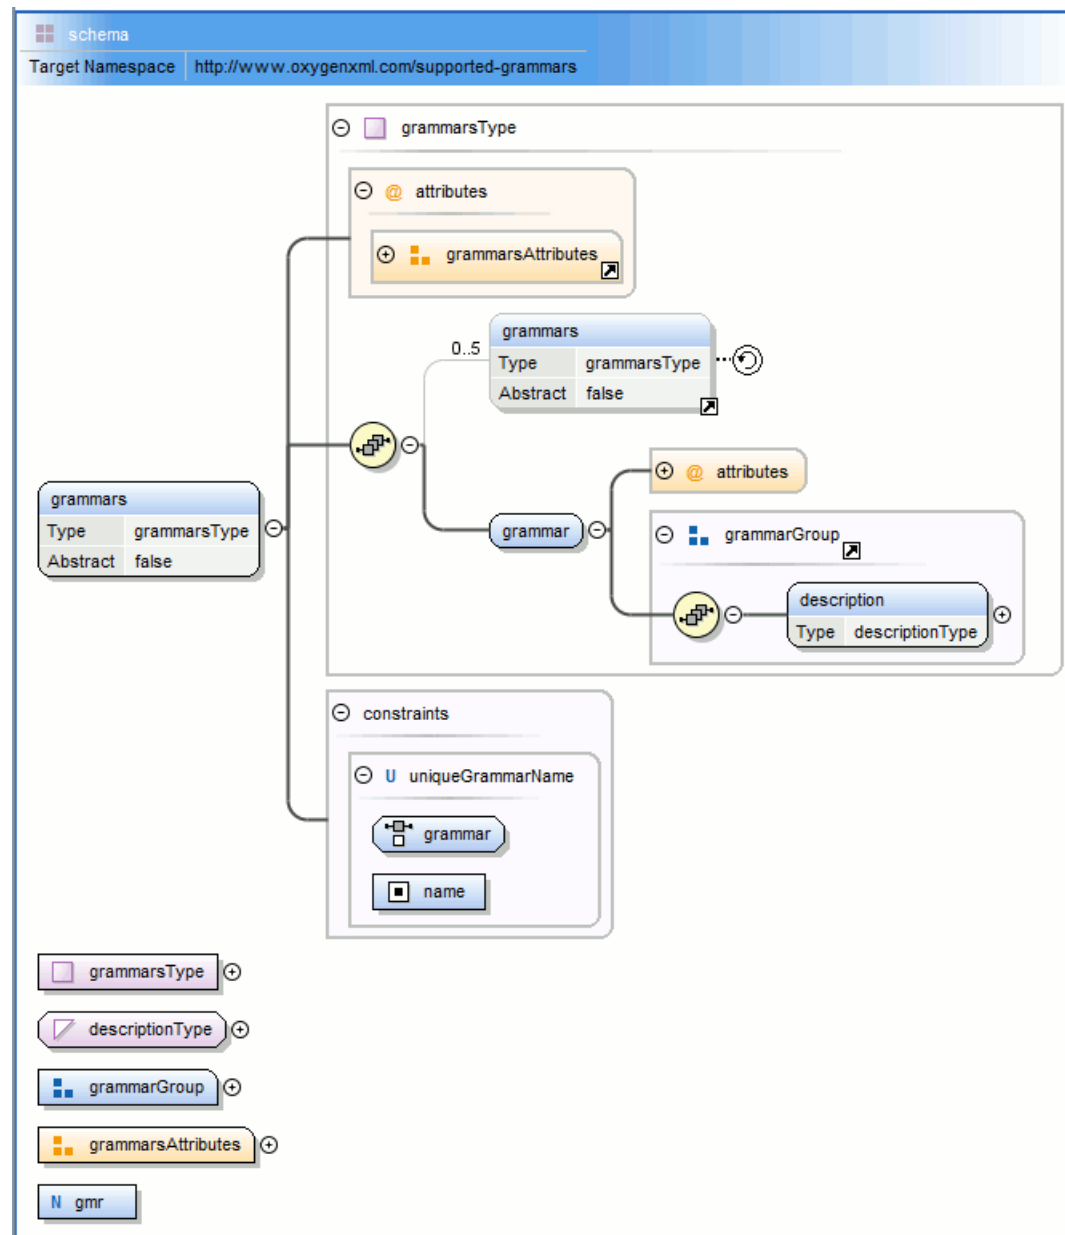


Figure 265: XML Schema Diagram

For more information about designing XML Schemas, watch our video demonstration:

<https://www.youtube.com/embed/vz1eIZELQgc>

Navigation in the XML Schema Design Mode

The following editing and navigation features work for all types of schema components in the XML Schema Design mode:

- Move/reference components in the diagram using drag-and-drop actions.
 - Select consecutive components on the diagram (components from the same level) using the *Shift* key. You can also make discontinuous selections in the schema diagram using the **Ctrl (Meta on Mac OS)** key. To deselect one of the components, use **Ctrl + Single-Click (Command + Single-Click on OS X)**.
 - Use the arrow keys to navigate the diagram vertically and horizontally.
 - Use *Home/End* keys to jump to the first/last component from the same level. Use **Ctrl + Home (Command + Home on OS X)** key combination to go to the diagram root and **Ctrl + End (Command + End on OS X)** to go to the last child of the selected component.
 - You can easily go back to a previously visited component while moving from left to right. The path will be preserved only if you use the left arrow key or right arrow key. For example, if the current selection is on the second attribute from an attribute group and you press the left arrow key to jump to the attribute group, when you press the right arrow key, then the selection will be moved to the second attribute.
 - Go back and forward between components viewed or edited in the diagram by selecting them in the [Outline view](#):
 -  **Back** (go to previous schema component).
 -  **Forward** (go to next schema component).
 -  **Go to Last Modification** (go to last modified schema component).
 - Copy, reference, or move global components, attributes, and identity constraints to another position and from one schema to another using the **Cut/Copy** and **Paste/Paste as Reference** actions.
 - Go to the definition of an element or attribute with the **Go to Definition** action.
 - Search in the diagram using the [Find/Replace dialog box](#) or the [Quick find toolbar](#). You can find/replace components only in the current file scope.
 - You can expand and see the contents of the imports/includes/redefines in the diagram. In order to edit components from other schemas the schema for each component will be opened as a separate file in Oxygen XML Developer.
- Tip:** If an XML Schema referenced by the current opened schema was modified on disk, the change will be detected and you will be asked to refresh the current schema contents.
- Recursive references are marked with a *recurse symbol* (). Click this symbol to navigate between the element declaration and its reference.




Figure 266: Recursive Reference

Schema Editing Actions

You can edit an XML schema using drag and drop operations or contextual menu actions.

Drag and drop is the easiest way to move the existing components to other locations in an XML schema. For example, you can quickly insert an element reference in the diagram with a drag and drop from the [Outline view](#) to a compositor in the diagram. Also, the components order in an `xs:sequence` can be easily changed using drag and drop.

If this property has not been set, you can easily set the attribute/element type by dragging over it a simple type or complex type from the diagram. If the type property for a simple type or complex type is not already set, you can set it by dragging over it a simple or complex type.

Depending on the drop area, various actions are available:

- **move** - Context dependent, the selected component is moved to the destination.

- **reference** - Context dependent, the selected component is referenced from the parent.
- **copy** - If (**Ctrl (Meta on Mac OS)**) key is pressed, a copy of the selected component is inserted to the destination.

Visual clues about the operation type are indicated by the mouse pointer shape:

-  - When moving a component.
-  - When referencing a component.
-  - When copying a component.

You can edit some schema components directly in the diagram. For these components, you can edit the name and the additional properties presented in the diagram by double clicking the value you want to edit. If you want to edit the name of a selected component, you can also press (**Enter**). The list of properties that can be displayed for each component can be customized [in the Preferences](#).

When editing references, you can choose from a list of available components. Components from an imported schema for which the target namespace does not have an associated prefix is displayed in the list as `componentName#targetNamespace`. If the reference is from a target namespace that was not yet mapped, you are prompted to add prefix mappings for the inserted component namespace in the current edited schema.

You can also change the compositor by double-clicking it and choose the compositor you want from the proposals list.

There are some components that cannot be edited directly in the diagram: imports, includes, redefines. The editing action can be performed if you double-click or press (**Enter**) on an import/include/replace component. An edit dialog box is displayed, allowing you to customize the directives.

Related Information:

[Searching and Refactoring Actions in XML Schemas](#) on page 548

[XML Schema Component Dependencies View](#) on page 546

[XML Schema Resource Hierarchy / Dependencies View](#) on page 544

[Generating Sample XML Files](#) on page 550

[Schema Design Preferences](#) on page 74

Contextual Menu Actions in the Design Mode

The contextual menu of the **Design** mode includes the following actions:

Go to Definition (Ctrl + Shift + Enter)

Shows the definition for the current selected component. For references, this action is available by clicking the arrow displayed in its bottom right corner.

Open Schema (Ctrl + Shift + Enter)

Opens the selected schema. This action is available for `xsd:import`, `xsd:include` and `xsd:redefine` elements. If the file you try to open does not exist, a warning message is displayed and you have the possibility to create the file.

Edit Attributes ()

Allows you to edit the attributes of the selected component in a small in-place editor that presents the same attributes as in the [Attributes view](#) and the [Facets view](#). The actions that can be performed on attributes in this dialog box are the same actions presented in the two views.

Append child

Offers a list of valid components, depending on the context, and appends your selection as a child of the currently selected component. You can set a name for a named component after it has been added in the diagram.

Insert before

Offers a list of valid components, depending on the context, and inserts your selection before the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

Insert after

Offers a list of valid components, depending on the context, and inserts your selection after the selected component, as a sibling. You can set a name for a named component after it has been added in the diagram.

New global

Inserts a global component in the schema diagram. This action does not depend on the current context. If you choose to insert an import you have to specify the URL of the imported file, the target namespace and the import ID. The same information, excluding the target namespace, is requested for an `xsd:include` or `xsd:redefine` element.

Note: If the imported file has declared a target namespace, the field **Namespace** is completed automatically.

Edit Schema Namespaces

When performed on the schema root, it allows you to edit the schema target namespace and namespace mappings. You can also invoke the action by double-clicking the target namespace property from [Attributes view](#) for the schema or by double-clicking the schema component.

Edit Annotations

Allows you to edit the annotation for the selected schema component in the **Edit Annotations** dialog box. You can perform the following operations in the dialog box:

- **Edit all appinfo/documentation items for a specific annotation** - All appinfo/documentation items for a specific annotation are presented in a table and can be easily edited. Information about an annotation item includes: type (documentation/appinfo), content, source (optional, specify the source of the documentation/appinfo element) and `xml:lang`. The content of a documentation/appinfo item can be edited in the **Content** area below the table.
- **Insert/Insert before/Remove documentation/appinfo**. The  **Add** button allows you to insert a new annotation item (documentation/appinfo). You can add a new item before the item selected in table by pressing the  **Insert Before** button. Also, you can delete the selected item using the  **Remove** button.
- **Move items up/down** - to do this use the  **Move up** and  **Move down** buttons.
- **Insert/Insert before/Remove annotation** - Available for components that allow multiple annotations such as schemas or redefines.
- **Specify an ID for the component annotation**. An optional identifier for the annotation.

Annotations are rendered by default under the graphical representation of the component. When you have a reference to a component with annotations, these annotations are presented in the diagram also below the reference component. The **Edit Annotations** action invoked from the contextual menu edit the annotations for the reference. If the reference component does not have annotations, you can edit the annotations of the referenced component by double-clicking the annotations area. Otherwise, you can edit the referenced component annotations only if you go to the definition of the component.

Note: For imported/included components that do not belong to the currently edited schema, the **Edit Annotations** dialog box presents the annotation as read-only. To edit its annotation, open the schema where the component is defined.

Extract Global Element

Action that is available for local elements. A local element is made global and is replaced with a reference to the global element. The local element properties that are also valid for the global element declaration are kept.

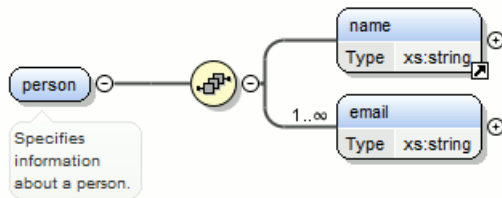


Figure 267: Extracting a Global Element

If you use the **Extract Global Element** action on a name element , the result is:

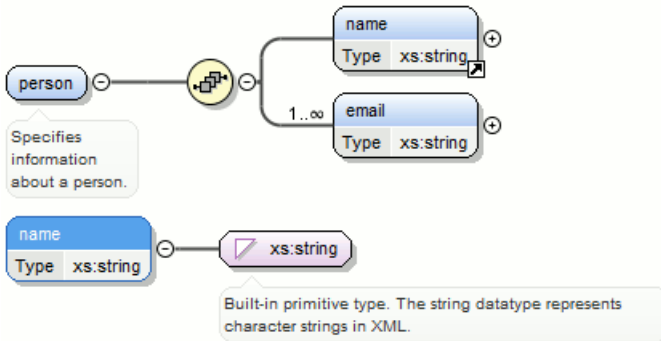


Figure 268: Extracting a Global Element on a name Element

Extract Global Attribute

Action available for local attributes. A local attribute is made global and replaced with a reference to the global attribute. The properties of local attribute that are also valid in the global attribute declaration are kept.

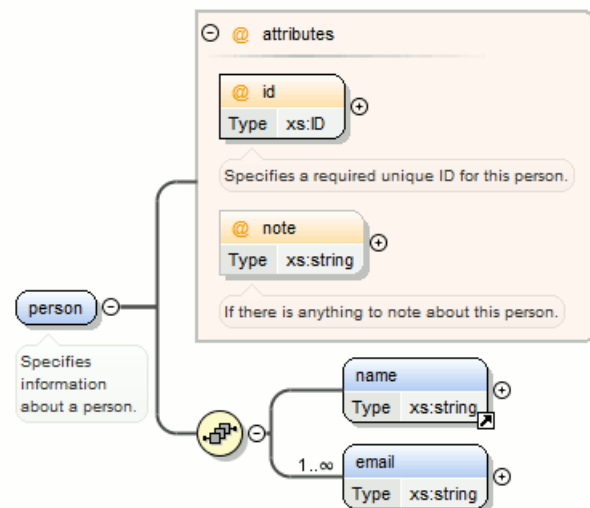


Figure 269: Extracting a Global Attribute

If you use the **Extract Global Attribute** action on a note attribute, the result is:


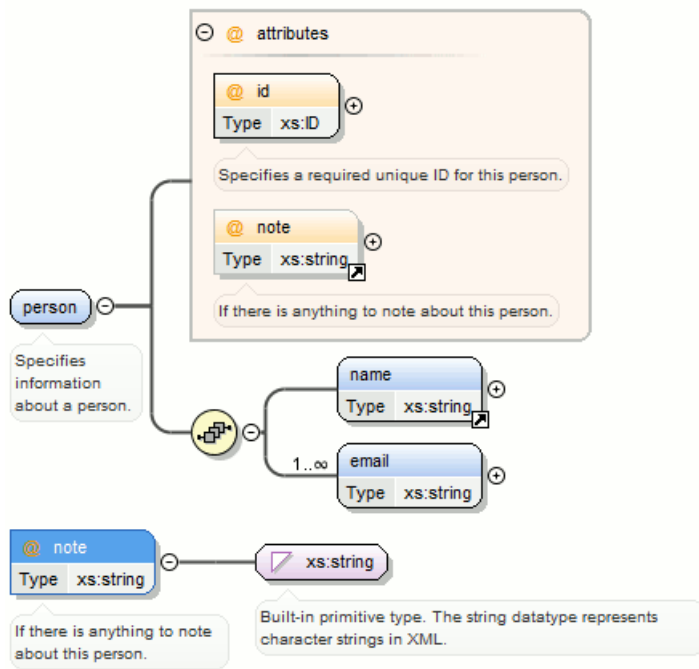


Figure 270: Extracting a Global Attribute on a note Attribute

Extract Global Group

Action available for compositors (sequence, choice, all). This action extracts a global group and makes a reference to it. The action is available only if the parent of the compositor is not a group.

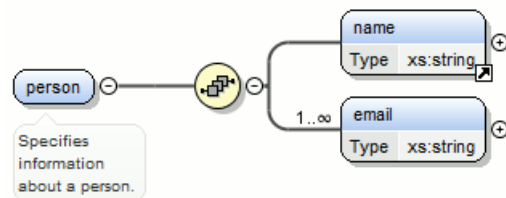

If you use the **Extract Global Group** action on the sequence element, the **Extract Global Component** dialog box is displayed and you can choose a name for the group. If you type personGroup, the result is:

Figure 271: Extracting a Global Group

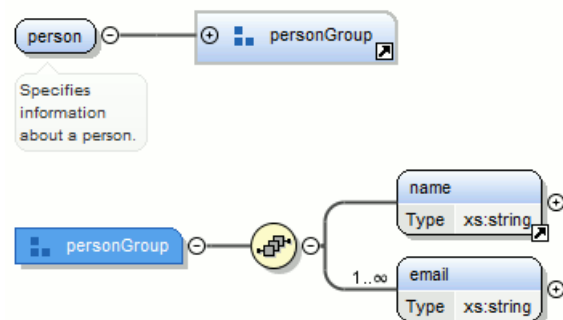


Figure 272: Extracting a Global Group on a sequence Element

Extract Global Type

Action used to extract an anonymous simple type or an anonymous complex type as global. For anonymous complex types, the action is available on the parent element.

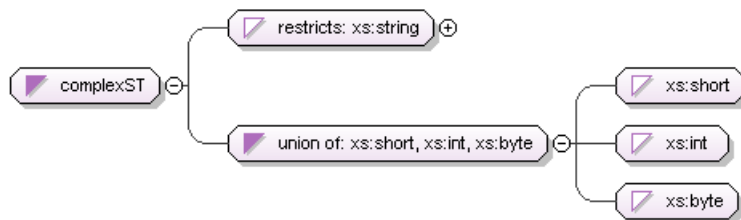


Figure 273: Extracting a Global Simple Type

If you use the action on the union component and choose `numericST` for the new global simple type name, the result is:

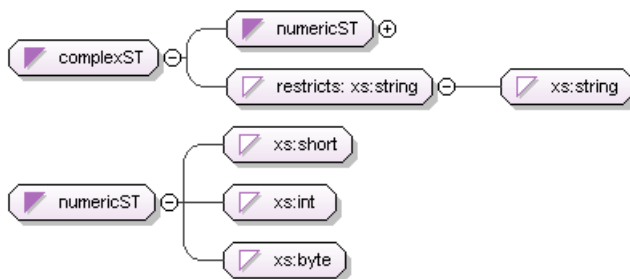


Figure 274: Extracting a Global Simple Type on a union Component

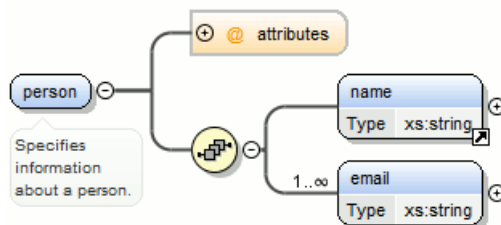


Figure 275: Extracting a Global Complex Type

If you use the action on a `person` element and choose `person_type` for the new complex type name, the result is:

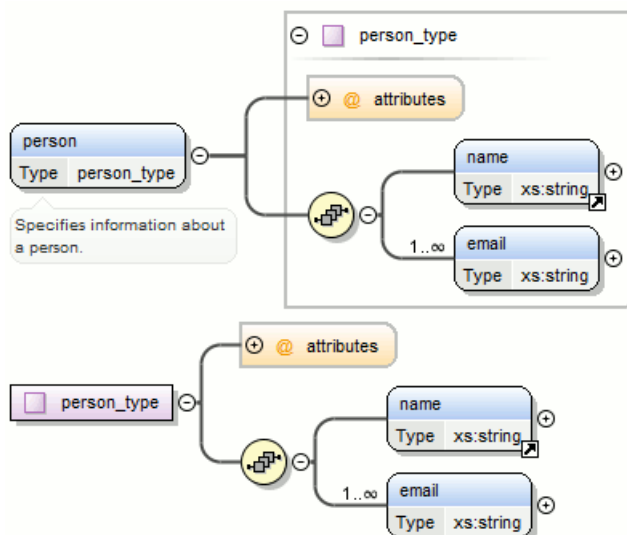


Figure 276: Extracting a Global Complex Type on a person Element

Rename Component in

Rename the selected component.

Cut Ctrl + X (Command + X on OS X)

Cut the selected component(s).

Copy Ctrl + C (Command + C on OS X)

Copy the selected component(s).

Copy XPath

This action copies an XPath expression that identifies the selected element or attribute in an instance XML document of the edited schema and places it in the clipboard.

Paste Ctrl + V (Command + V on OS X)

Paste the component(s) from the clipboard as children of the selected component.

Paste as Reference

Create references to the copied component(s). If not possible a warning message is displayed.

Remove (Delete)

Remove the selected component(s).

Override component

Copies the overridden component in the current XML Schema. This option is available for `xs:override` components.

Redefine component

The referenced component is added in the current XML Schema. This option is available for `xs:redefine` components.

Optional

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `minOccurs` property is set to 0 and the `use` property for attributes is set to `optional`.

Unbounded

Can be performed on element/attribute/group references, local attributes, elements, compositors, and element wildcards. The `maxOccurs` property is set to `unbounded` and the `use` property for attributes is set to `required`.

Search

Can be performed on local elements or attributes. This action makes a reference to a global element or attribute.

Search References

Searches all references of the item found at current cursor position in the defined scope if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

Search Occurrences in File

Searches all occurrences of the item found at current cursor position in the current file.

Component Dependencies

Opens the [Component Dependencies view](#) that allows you to see the dependencies for the current selected component.

Resource Hierarchy

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the hierarchy for the current selected resource.

Flatten Schema

Recursively adds the components of included Schema files to the main one. It also flattens every imported XML Schema from the hierarchy.

Resource Dependencies

Allows you to see the dependencies for the current selected resource.

Expand All

Recursively expands all sub-components of the selected component.

Collapse All

Recursively collapses all sub-components of the selected component.

Save as Image

Save the diagram as image, in JPEG, BMP, SVG or PNG format.

Generate Sample XML Files

Generate XML files using the current opened schema. The selected component is the XML document root. See more in the [Generate Sample XML Files](#) section.

Options

Show the [Schema preferences panel](#).

XML Schema Components

A schema diagram contains a series of interconnected components. To quickly identify the relation between two connected components, the connection is represented as:

- A thick line to identify a connection with a required component (in the following image, `family` is a required element).

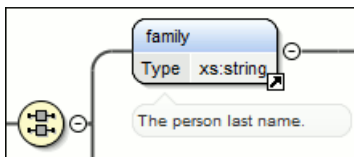


Figure 277: Example: Required Component

- A thin line to identify a connection with an optional component (in the following image, `email` is an optional element).




Figure 278: Example: Optional Component

The following topics explain in detail all available components and their symbols as they appear in an XML schema diagram.

`xs:schema`





Figure 279: The `xs:schema` Component

Defines the root element of a schema. A schema document contains representations for a collection of schema components, such as type definitions and element declarations, that have a common target namespace. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-schema>.

By default, it displays the `targetNamespace` property when rendered.

Table 35: *xs:schema* Properties

Property Name	Description	Possible Values
Target Namespace	The schema target namespace.	Any URI
Element Form Default	Determining whether or not local element declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Attribute Form Default	Determining whether or not local attribute declarations will be namespace-qualified by default.	qualified, unqualified, [Empty]. Default value is unqualified.
Block Default	Default value of the <i>block</i> attribute of <i>xs:element</i> and <i>xs:complexType</i> .	#all, extension, restriction, substitution, restriction extension, restriction substitution, extension substitution, restriction extension substitution, [Empty].
Final Default	Default value of the <i>final</i> attribute of <i>xs:element</i> and <i>xs:complexType</i> .	#all, restriction, extension, restriction extension, [Empty].
Default Attributes	Specifies a set of attributes that apply to every complex Type in a schema document.	Any.
Xpath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
Version	Schema version	Any token.
ID	The schema ID	Any ID.
Component	The edited component name.	Not editable property.
SystemID	The schema system ID	Not editable property.

xs:elementFigure 280: The *xs:element* Component

Defines an element. An element declaration is an association of a name with a type definition, either simple or complex, an (optional) default value and a (possibly empty) set of identity-constraint definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-element>.

An element by default displays the following properties when rendered in the diagram: *default*, *fixed*, *abstract* and *type*. When referenced or declared locally, the element graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the element are drawn using dotted lines if the element is optional.

Table 36: *xs:element* Properties

Property Name	Description	Possible Values	Mentions
Name	The element name. Always required.	Any NCName for global or local elements, any <i>QName</i> for element references.	If missing, will be displayed as '[element]' in diagram.

Property Name	Description	Possible Values	Mentions
Is Reference	When set, the local element is a reference to a global element.	true/false	Appears only for local elements.
Type	The element type.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].	For all elements. For references, the value is set in the referenced element.
Base Type	The extended/restricted base type.	All declared or built-in types	For elements with complex type, with simple or complex content.
Mixed	Defines if the complex type content model will be mixed.	true/false	For elements with complex type.
Content	The content of the complex type.	simple/complex	For elements with complex type that extends/restricts a base type. It is automatically detected.
Content Mixed	Defines if the complex content model will be mixed.	true/false	For elements with complex type that has a complex content.
Default	Default value of the element. A default value is automatically assigned to the element when no other value is specified.	Any string	The fixed and default attributes are mutually exclusive.
Fixed	A simple content element may be fixed to a specific value using this attribute. A fixed value is also automatically assigned to the element and you cannot specify another value.	Any string	The fixed and default attributes are mutually exclusive.
Min Occurs	Minimum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements
Max Occurs	Maximum number of occurrences of the element.	A numeric positive value. Default value is 1	Only for references/local elements
Substitution Group	Qualified name of the head of the substitution group that this element belongs to.	All declared elements. For XML Schema 1.1 this property supports multiple values.	For global and reference elements

Property Name	Description	Possible Values	Mentions
Abstract	Controls whether or not the element may be used directly in instance XML documents. When set to true, the element may still be used to define content models, but it must be substituted through a substitution group in the instance document.	true/false	For global elements and element references
Form	Defines if the element is "qualified" (belongs to the target namespace) or "unqualified" (doesn't belong to any namespace).	unqualified/qualified	Only for local elements
Nilable	When this attribute is set to true, the element can be declared as nil using an <i>xsi:nil</i> attribute in the instance documents.	true/false	For global elements and element references
Target Namespace	Specifies the target namespace for local element and attribute declarations. The namespace URI may be different from the schema target namespace. This property is available for local elements only.	Not editable property.	For all elements.
Block	Controls if the element can be subject to a type or substitution group substitution. '#all' blocks any substitution, 'substitution' blocks any substitution through substitution groups and 'extension'/'restriction' block any substitution (both through <i>xsi:type</i> and substitution groups) by elements or types, derived respectively by extension or restriction from the type of the element. Its default value is defined by the <i>blockDefault</i> attribute of the parent <i>xs:schema</i> .	#all, restriction, extension,substitution, extension restriction, extension substitution, restriction substitution, restriction extension substitution	For global elements and element references

Property Name	Description	Possible Values	Mentions
Final	Controls whether the element can be used as the head of a substitution group for elements whose types are derived by extension or restriction from the type of the element. Its default value is defined by the <i>finalDefault</i> attribute of the parent <i>xs:schema</i> .	#all, restriction, extension, restriction extension, [Empty]	For global elements and element references
ID	The component ID.	Any ID	For all elements.
Component	The edited component name.	Not editable property.	For all elements.
Namespace	The component namespace.	Not editable property.	For all elements.
System ID	The component system ID.	Not editable property.	For all elements.

xs:attribute




Figure 281: The *xs:attribute* Component

Defines an attribute. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attribute>.

An attribute by default displays the following properties when rendered in the diagram: *default*, *fixed*, *use* and *type*. Connectors to the attribute are drawn using dotted lines if the attribute use is optional. The attribute name is stroked out if prohibited.

Table 37: *xs:attribute* Properties

Property Name	Description	Possible Value	Mentions
Name	Attribute name. Always required.	Any NCName for global/local attributes, all declared attributes' <i>QName</i> for references.	For all local or global attributes. If missing, will be displayed as '[attribute]' in the diagram.
Is Reference	When set, the local attribute is a reference.	true/false	For local attributes.
Type	Qualified name of a simple type.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for creating anonymous simple types more easily.	For all attributes. For references, the type is set to the referenced attribute.

Property Name	Description	Possible Value	Mentions
Default	Default value. When specified, an attribute is added by the schema processor (if it is missing from the instance XML document) and it is given this value. The default and fixed attributes are mutually exclusive.	Any string	For all local or global attributes. For references the value is from the referenced attribute.
Fixed	When specified, the value of the attribute is fixed and must be equal to this value. The default and fixed attributes are mutually exclusive.	Any string	For all local or global attributes. For references the value is from the referenced attribute.
Use	Possible usage of the attribute. Marking an attribute "prohibited" is useful to exclude attributes during derivations by restriction.	optional, required, prohibited	For local attributes
Form	Specifies whether or not the attribute is qualified (must have a namespace prefix in the instance XML document). The default value for this attribute is specified by the <i>attributeFormDefault</i> attribute of the <i>xs:schema</i> document element.	unqualified/qualified	For local attributes.
Inheritable	Specifies if the attribute is inheritable. Inheritable attributes can be used by <alternative> element on descendant elements.	true/false	For all local or global attributes. The default value is false. This property is available for XML Schema 1.1.
Target Namespace	Specifies the target namespace for local attribute declarations. The namespace URI may be different from the schema target namespace.	Any URI	Setting a target namespace for local attribute is useful only when restricts attributes of a complex type that is declared in other schema with a different target namespace. This property is available for XML Schema 1.1.
ID	The component ID.	Any ID	For all attributes.
Component	The edited component name.	Not editable property.	For all attributes.
Namespace	The component namespace.	Not editable property.	For all attributes.

Property Name	Description	Possible Value	Mentions
System ID	The component system ID.	Not editable property.	For all attributes.

xs:attributeGroup



Figure 282: The *xs:attributeGroup* Component

Defines an attribute group to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-attributeGroup>.

Table 38: *xs:attributeGroup* Properties

Property Name	Description	Possible Values	Mentions
Name	Attribute group name. Always required.	Any NCName for global attribute groups, all declared attribute groups for reference.	For all global or referenced attribute groups. If missing, will be displayed as '[attributeGroup]' in diagram.
ID	The component ID.	Any ID	For all attribute groups.
Component	The edited component name.	Not editable property.	For all attribute groups.
Namespace	The component namespace.	Not editable property.	For all attribute groups.
System ID	The component system ID.	Not editable property.	For all attribute groups.

xs:complexType




Figure 283: The *xs:complexType* Component

Defines a top level complex type. Complex Type Definitions provide for: See more data at <http://www.w3.org/TR/xmlschema11-1/#element-complexType>.

- Constraining element information items by providing Attribute Declarations governing the appearance and content of attributes.
- Constraining element information item children to be empty, or to conform to a specified element-only or mixed content model, or else constraining the character information item children to conform to a specified simple type definition.
- Using the mechanisms of Type Definition Hierarchy to derive a complex type from another simple or complex type.
- Specifying post-schema-validation info set contributions for elements.
- Limiting the ability to derive additional types from a given complex type.
- Controlling the permission to substitute, in an instance, elements of a derived type for elements declared in a content model to be of a given complex type.

Tip: A complex type that is a base type to another type will be rendered with yellow background.

Table 39: *xs:complexType* Properties

Property Name	Description	Possible Values	Mentions
Name	The name of the complex type. Always required.	Any NCName	Only for global complex types. If missing, will be displayed as '[complexType]' in diagram.
Base Type Definition	The name of the extended/restricted types.	Any from the declared simple or complex types.	For complex types with simple or complex content.
Derivation Method	The derivation method.	restriction/ extension	Only when base type is set. If the base type is a simple type, the derivation method is always extension.
Content	The content of the complex type.	simple/ complex	For complex types that extend/restrict a base type. It is automatically detected.
Content Mixed	Specifies if the complex content model will be mixed.	true/false	For complex contents.
Mixed	Specifies if the complex type content model will be mixed.	true/false	For global and anonymous complex types.
Abstract	When set to <i>true</i> , this complex type cannot be used directly in the instance documents and needs to be substituted using an <i>xsi:type</i> attribute.	true/false	For global and anonymous complex types.
Block	Controls if a substitution (either through a <i>xsi:type</i> or substitution groups) can be performed for a complex type, which is an extension or a restriction of the current complex type. This attribute can only block such substitutions (it cannot "unblock" them), which can also be blocked in the element definition. The default value is defined by the <i>blockDefault</i> attribute of <i>xs:schema</i> .	all, extension, restriction, extension restriction, [Empty]	For global complex types.
Final	Controls whether the complex type can be further derived by extension or restriction to create new complex types.	all, extension, restriction, extension restriction, [Empty]	For global complex types.

Property Name	Description	Possible Values	Mentions
Default Attributes Apply	The <i>schema</i> element can carry a <i>defaultAttributes</i> attribute, which identifies an attribute group. Each <i>complexType</i> defined in the schema document then automatically includes that attribute group, unless this is overridden by the <i>defaultAttributesApply</i> attribute on the <i>complexType</i> element.	true/false	This property is available only for XML Schema 1.1.
ID	The component ID.	Any ID	For all complex types.
Component	The edited component name.	Not editable property.	For all complex types.
Namespace	The component namespace.	Not editable property.	For all complex types.
System ID	The component system ID.	Not editable property.	For all complex types.

xs:simpleType



Figure 284: The *xs:simpleType* Component

Defines a simple type. A simple type definition is a set of constraints on strings and information about the values they encode, applicable to the normalized value of an attribute information item or of an element information item with no element children. Informally, it applies to the values of attributes and the text-only content of elements. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-simpleType>.

Tip: A simple type that is a base type to another type will be rendered with yellow background.

Table 40: *xs:simpleType* Properties

Name	Description	Possible Values	Scope
Name	Simple type name. Always required.	Any NCName.	Only for global simple types. If missing, will be displayed as '[simpleType]' in diagram.
Derivation	The simple type category: restriction, list or union.	restriction,list or union	For all simple types.
Base Type	A simple type definition component. Required if derivation method is set to restriction.	All global simple types and built-in simple types. In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to restriction.

Name	Description	Possible Values	Scope
Item Type	A simple type definition component. Required if derivation method is set to list.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to list. Derivation by list is the process of transforming a simple datatype (named the item type) into a whitespace-separated list of values from this datatype. The item type can be defined inline by adding a simpleType definition as a child element of the list element, or by reference, using the itemType attribute (it is an error to use both).
Member Types	Category for grouping union members.	Not editable property.	For global and anonymous simple types with the derivation method set to union.
Member	A simple type definition component. Required if derivation method is set to union.	All global simple types and built-in simple types(from schema for schema). In addition another 3 proposals are present: [anonymous restriction], [anonymous list], [anonymous union] for easily create anonymous simple types.	For global and anonymous simple types with the derivation method set to union. Deriving a simple datatype by union merges the lexical spaces of several simple datatypes (called member types) to create a new simple datatype. The member types can be defined either by reference (through the memberTypes attribute) or embedded as simple datatype local definitions in the xs:union element. Both styles can be mixed.
Final	Blocks any further derivations of this datatype (by list, union, derivation or all).	#all, list, restriction, union, list restriction, list union, restriction union. In addition, [Empty] proposal is present for set empty string as value.	Only for global simple types.
ID	The component ID.	Any ID.	For all simple types
Component	The name of the edited component.	Not editable property.	Only for global and local simple types
Namespace	The component namespace.	Not editable property.	For global simple types.

Name	Description	Possible Values	Scope
System ID	The component system ID.	Not editable property.	Not present for built-in simple types..

xs:alternative

The *type alternatives* mechanism allows you to specify type substitutions on an element declaration.

Note: *xs:alternative* is available for XML Schema 1.1.




Figure 285: The *xs:alternative* Component

Table 41: *xs:alternative* Properties

Name	Description	Possible Values
Type	Specifies type substitutions for an element, depending on the value of the attributes.	All declared or built-in types. In addition, the following anonymous types are available: [ST-restriction], [ST-union], [ST-list], [CT-anonymous], [CT-extension SC], [CT-restriction SC], [CT-restriction CC], [CT-extension CC].
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	Specifies the type of XML schema component.	Not editable property.
System ID	Points to the document location of the schema.	Not editable property.

xs:group



Figure 286: The *xs:group* Component

Defines a group of elements to be used in complex type definitions. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-group>.

When referenced, the graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the group are drawn using dotted lines if the group is optional.

Table 42: *xs:group* Properties

Property Name	Description	Possible Values	Mentions
Name	The group name. Always required.	Any NCName for global groups, all declared groups for reference.	If missing, will be displayed as '[group]' in diagram.
Min Occurs	Minimum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
Max Occurs	Maximum number of occurrences of the group.	A numeric positive value. Default value is 1.	Appears only for reference groups.
ID	The component ID.	Any ID	For all groups.
Component	The edited component name.	Not editable property.	For all groups.
Namespace	The component namespace.	Not editable property	For all groups.
System ID	The component system ID.	Not editable property.	For all groups.

xs:include




Figure 287: The *xs:include* Component

Adds multiple schemas with the same target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-include>.

Table 43: *xs:include* properties

Property Name	Description	Possible Values
Schema Location	Included schema location.	Any URI
ID	Include ID.	Any ID
Component	The component name.	Not editable property.

xs:import




Figure 288: The *xs:import* Component

Adds multiple schemas with a different target namespace to a document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-import>.

Table 44: *xs:import* Properties

Property Name	Description	Possible Values
Schema Location	Imported schema location	Any URI
Namespace	Imported schema namespace	Any URI

Property Name	Description	Possible Values
ID	Import ID	Any ID
Component	The component name	Not editable property.

xs:redefine



Figure 289: The *xs:redefine* Component

Redefines simple and complex types, groups, and attribute groups from an external schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-redefine>.

Table 45: *xs:redefine* Properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID
Component	The component name.	Not editable property.

xs:override



Figure 290: The *xs:override* Component

The override construct allows replacements of old components with new ones without any constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-override>.

Table 46: *xs:override* Properties

Property Name	Description	Possible Values
Schema Location	Redefine schema location.	Any URI
ID	Redefine ID	Any ID

xs:notation




Figure 291: The *xs:notation* Component

Describes the format of non-XML data within an XML document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-notation>.

Table 47: *xs:notation* Properties

Property Name	Description	Possible values	Mentions
Name	The notation name. Always required.	Any NCName.	If missing, will be displayed as '[notation]' in diagram.
System Identifier	The notation system identifier.	Any URI	Required if public identifier is absent (otherwise, optional).

Property Name	Description	Possible values	Mentions
Public Identifier	The notation public identifier.	A Public ID value	Required if system identifier is absent (otherwise, optional).
ID	The component ID.	Any ID	For all notations.
Component	The edited component name.	Not editable property.	For all notations.
Namespace	The component namespace.	Not editable property.	For all notations.
System ID	The component system ID.	Not editable property.	For all notations.

xs:sequence / xs:choice / xs:all



Figure 292: xs:sequence

xs:sequence specifies that the child elements must appear in a sequence. Each child element can occur from 0 to any number of times. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-sequence>.



Figure 293: xs:choice

xs:choice allows only one of the elements contained in the declaration to be present within the containing element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-choice>.



Figure 294: xs:all

xs:all specifies that the child elements can appear in any order. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-all>.

The compositor graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the compositor are drawn using dotted lines if the compositor is optional.

Table 48: xs:sequence, xs:choice, xs:all Properties

Property Name	Description	Possible Values	Mentions
Compositor	Compositor type.	sequence, choice, all.	'all' is only available as a child of a group or complex type.
Min Occurs	Minimum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
Max Occurs	Maximum occurrences of compositor.	A numeric positive value. Default is 1.	The property is not present if compositor is 'all' and is child of a group.
ID	The component ID.	Any ID	For all compositors.
Component	The edited component name.	Not editable property.	For all compositors.

Property Name	Description	Possible Values	Mentions
System ID	The component system ID.	Not editable property.	For all compositors.

xs:any



Figure 295: The xs:any Component

Enables the author to extend the XML document with elements not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-any>.

The graphical representation also contains the value for the *minOccurs* and *maxOccurs* properties (for 0..1 and 1..1 occurs the values are implied by the connector style) and the connectors to the wildcard are drawn using dotted lines if the wildcard is optional.

Table 49: xs:any Properties

Property Name	Description	Possible Values
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
notNamespace	Specifies the namespace that extension elements or attributes cannot come from.	##local, ##targetNamespace
notQName	Specifies an element or attribute that is not allowed.	##defined
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
Min Occurs	Minimum occurrences of any	A numeric positive value. Default is 1.
Max Occurs	Maximum occurrences of any	A numeric positive value. Default is 1.
ID	The component ID.	Any ID.
Component	The name of the edited component.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:anyAttribute




Figure 296: The xs:anyAttribute Component

Enables the author to extend the XML document with attributes not specified by the schema. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-anyAttribute>.

Table 50: *xs:anyAttribute* Properties

Property Name	Description	Possible Value
Namespace	The list of allowed namespaces. The namespace attribute expects a list of namespace URIs. In this list, two values have a specific meaning: '##targetNamespace' stands for the target namespace, and '##local' stands for local attributes (without namespaces).	##any, ##other, ##targetNamespace, ##local or anyURI
Process Contents	Type of validation required on the elements allowed for this wildcard.	skip, lax, strict
ID	The component ID.	Any ID.
Component	The name of the edited component.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:unique




Figure 297: The *xs:unique* Component

Defines that an element or an attribute value must be unique within the scope. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-unique>.

Table 51: *xs:unique* Properties

Property Name	Description	Possible Values
Name	The unique name. Always required.	Any NCName.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:key




Figure 298: The *xs:key* Component

Specifies an attribute or element value as a key (unique, non-nullable and always present) within the containing element in an instance document. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-key>.

Table 52: *xs:key* Properties

Property Name	Description	Possible Value
Name	The key name. Always required.	Any NCName.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:keyRef




Figure 299: The *xs:keyRef* Component

Specifies that an attribute or element value corresponds to that of the specified key or unique element. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-keyref>.

A keyref by default displays the *Referenced Key* property when rendered.

Table 53: *xs:keyRef* Properties

Property Name	Description	Possible Values
Name	The keyref name. Always required.	Any NCName.
Referenced Key	The name of referenced key.	any declared element constraints.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
Namespace	The component namespace.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:selector



Figure 300: The *xs:selector* Component

Specifies an XPath expression that selects a set of elements for an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-selector>.

Table 54: *xs:selector* Properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the element that the constraint applies to.	An XPath expression.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:field**Figure 301: The *xs:field* Component**

Specifies an XPath expression that specifies the value used to define an identity constraint. See more info at <http://www.w3.org/TR/xmlschema11-1/#element-field>.

Table 55: *xs:field* Properties

Property Name	Description	Possible Values
XPath	Relative XPath expression identifying the field(s) composing the key, key reference, or unique constraint.	An XPath expression.
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:assert

Assertions provide a flexible way to control the occurrence and values of elements and attributes available in an XML Schema.

Note: *xs:assert* is available for XML Schema 1.1.


**Figure 302: The *xs:assert* Component**

Table 56: xs:assert Properties

Property Name	Description	Possible Values
Test	Specifies an XPath expression. If the XPath condition is valid, the specified type is selected as the element type. The expressions allowed are limited to a subset of XPath 2.0. Only the attributes of the current element and inheritable attributes from ancestor elements are accessible in the XPath expression. When you edit this property, the content completion list of proposals offers XPath expressions.	An XPath expression.
XPath Default Namespace	The default namespace used when the XPath expression is evaluated.	##defaultNamespace, ##targetNamespace, ##local.
ID	Specifies the component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

xs:openContent



Figure 303: The xs:openContent Component

The *openContent* element enables instance documents to contain extension elements to be inserted amongst the elements declared by the schema. You can declare open content for your elements at one place (within the *complexType* definition) or at the schema level.

For further details about the *openContent* component, go to <http://www.w3.org/TR/xmlschema11-1/#element-openContent>.

Table 57: xs:openContent Properties

Property Name	Description	Possible Value
Mode	Specifies where the extension elements can be inserted.	The value can be: "interleave", "suffix" or "none". The default value is "interleave".
ID	The component ID.	Any ID.
Component	The edited component name.	Not editable property.
System ID	The component system ID.	Not editable property.

Note: This component is available for XML Schema 1.1 only. To change the version of the XML Schema, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema**.

Constructs Used to Group Schema Components

This section explains the components that can be used for grouping other schema components:

- [Attributes](#)
- [Constraints](#)

- [Substitutions](#)

Attributes




Figure 304: Attributes Construct

Groups all attributes and attribute groups belonging to a complex type.

Table 58: *attributes* Properties

Property Name	Description	Possible Values
Component	The element for which the attributes are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Constraints




Figure 305: Constraints Construct

Groups all constraints ([xs:key](#), [xs:keyRef](#) or [xs:unique](#)) belonging to an element.

Table 59: *constraints* Properties

Property Name	Description	Possible Values
Component	The element for which the constraints are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Substitutions

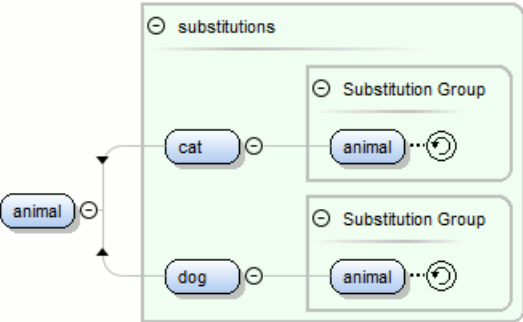


Figure 306: Substitutions Construct

Groups all elements that can substitute the current element.

Table 60: *substitutions* Properties

Property Name	Description	Possible Values
Component	The element for which the substitutions are displayed.	Not editable property.
System ID	The component system ID.	Not editable property.

Schema Validation

Validation for the **Design** mode is seamlessly integrated in the Oxygen XML Developer [XML documents validation](#) capability.

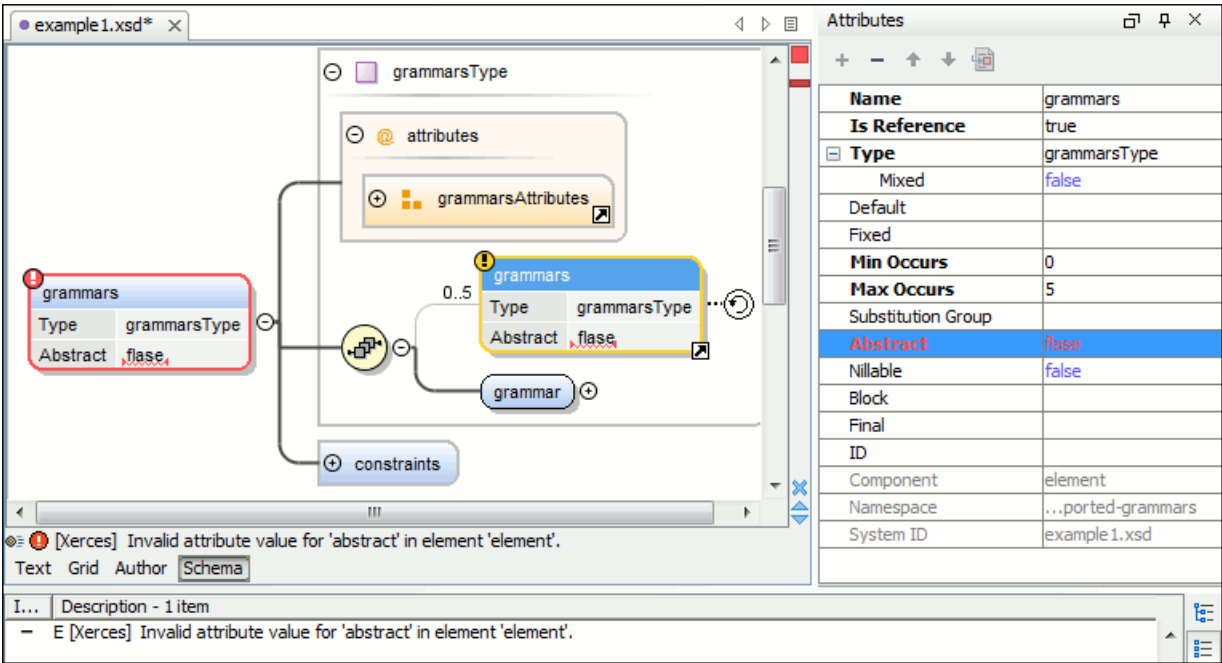


Figure 307: XML Schema Validation

A schema validation error is presented by highlighting the invalid component:

- In the [Attributes View](#).
- In the diagram by surrounding the component that has the error with a red border.
- A marker on the errors stripe at the right of the diagram view.
- A status label with a red icon (❗) below the diagram view.

Invalid facets for a component are highlighted in the [Facets View](#).

Components with invalid properties are rendered with a red border. This is a default color, but you can customize it in the [Document checking user preferences](#). When hovering an invalid component, the tooltip will present the validation errors associated with that component.

When editing a value that is supposed to be a qualified or unqualified XML name, the application provides automatic validation of the entered value. This proves to be very useful in avoiding setting invalid XML names for the given property.

If you validate the entire schema using the  **Validate** action from the **Document > Validate** menu or from the  **Validation** toolbar drop-down menu, all validation errors will be presented in the **Errors** tab. To resolve an error, just click it (or double-click for errors located in other schemas) and the corresponding schema component will be displayed as the diagram root so that you can easily correct the error.

Important: If the schema imports only the namespace of other schema without specifying the schema location and a [catalog is set-up](#) that maps the namespace to a certain location both the validation and the diagram will correctly identify the imported schema.

Tip: If the validation action finds that the schema contains unresolved references, the application will suggest the use of validation scenarios, but only if the current edited schema is an XML Schema module.

Edit Schema Namespaces

You can use the **XML Schema Namespaces** dialog box to easily set a target namespace and define namespace mappings for a newly created XML Schema. In the **Design** mode these namespaces can be modified anytime by choosing **Edit Schema Namespaces** from the contextual menu. You can also do this by double-clicking the schema root in the diagram.

The **XML Schema Namespaces** dialog box allows you to edit the following information:

- **Target namespace** - The target namespace of the schema.
- **Prefixes** - The dialog box displays a table with namespaces and the mapped prefixes. You can add a new prefix mapping or remove an already existing one.

Editing XML Schema in Text Editing Mode

The Oxygen XML Developer **Text** editing mode can be used for editing XML Schema in a source editing mode. It offers powerful content completion support, a synchronized Outline view, and multiple [refactoring actions](#). The Outline view has two display modes: the [standard outline](#) mode and the [components](#) mode.

A diagram of the XML Schema can be presented side by side with the text. To activate the diagram presentation, select the [Show Full Model XML Schema diagram](#) option in the [Diagram preferences page](#).

Editing XML Schema in the Master Files Context

Smaller interrelated modules that define a complex XML Schema cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, an element defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main XML document either using the [master files support from the Project view](#), or using a validation scenario.

To set a *master file* using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The advantages of editing in the context of a [master file](#) include:

- Correct validation of a module in the context of a larger schema structure.
- [Content Completion Assistant](#) displays all the referable components valid in the current context. This include components defined in modules other than the currently edited one.
- The [Outline view](#) displays the components collected from the entire schema structure.

Validating XML Schema Documents

By default, XML Schema files are validated as you type. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the **Enable automatic validation** option.

To validate an XML Schema document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. When Oxygen XML Developer validates an XML Schema file, it expands all the included modules so the entire schema hierarchy is validated. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Validation of an XML Schema containing a type definition with a `minOccurs` or `maxOccurs` attribute having a value larger than 256 limits the value to 256 and issues a warning about this restriction in the Message panel at the bottom of the Oxygen XML Developer window. Otherwise, for large values of the `minOccurs` and `maxOccurs` attributes, the validator fails with an **OutOfMemory** error that might make Oxygen XML Developer unusable without restarting the entire application.

Important: If the schema imports only a namespace without specifying the schema location and a [catalog is set up](#) to map the namespace to a certain location, both validation and the schema components will correctly identify the imported schema.

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Validation Scenario](#) on page 408

[Associating a Schema to XML Documents](#) on page 420

[Presenting Validation Errors in Text Mode](#) on page 207

Quick Fixes for DTD, XSD, and Relax NG Errors

Oxygen XML Developer offers [Quick Fixes](#) for common errors that appear in XML documents that are validated against DTD, XSD, or Relax NG schemas.

Note: For XML documents validated against XSD schemas, the *Quick Fixes* are only available if you use the default Xerces validation engine.

Quick Fixes are available in **Text** mode .

Oxygen XML Developer provides *Quick Fixes* for numerous types of problems, including the following:

Problem Type	Available Quick Fixes
A specific element is required in the current context	Insert the required element
An element is invalid in the current context	Remove the invalid element
The content of the element should be empty	Remove the element content
An element is not allowed to have child elements	Remove all child elements
Text is not allowed in the current element	Remove the text content
A required attribute is missing	Insert the required attribute
An attribute is not allowed to be set for the current element	Remove the attribute
The attribute value is invalid	Propose the correct attribute values
ID value is already defined	Generate a unique ID value
References to an invalid ID	Change the reference to an already defined ID

Related Information:

[Schematron Quick Fixes \(SQF\)](#) on page 419

Content Completion in XML Schema

The intelligent *Content Completion Assistant* allows you to quickly identify and insert elements, attributes, and attribute values that are valid in the current editing context. All available proposals are listed in a pop-up menu displayed at the current cursor position.

The *Content Completion Assistant* is enabled by default. To disable it, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Content Completion**, and deselect the [Enable content completion option](#).

When active, the *Content Completion Assistant* displays a list of context-sensitive proposals valid at the current cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut. You can navigate through the list of proposals by using the **Up** and **Down** keys on your keyboard. For each selected item in the list, the *Content Completion Assistant* displays a documentation window. You can customize the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected proposal in **Text** mode, do one of the following:

- Press **Enter** or **Tab** to insert both the start and end tags and position the cursor inside the start tag in a position suitable for inserting attributes.
- Press **Ctrl + Enter (Command + Enter on OS X)** to insert both the start and end tags and positions the cursor between the tags in a position where you can start typing content.

Depending on the [selected schema version](#), Oxygen XML Developer populates the proposals list with information taken either from XML Schema 1.0 or 1.1.

Oxygen XML Developer helps you to easily reference a component by providing the list of proposals (complex types, simple types, elements, attributes, groups, attribute groups, or notations) valid in the current context. The components are collected from the current file or from the imported/included schemas.

When editing `xs:annotation/xs:appinfo` elements of an XML Schema, the *Content Completion Assistant* proposes elements and attributes from a custom schema (by default ISO Schematron). This feature can be configured from the [XSD Content Completion](#) preferences page.

Syntax Highlighting in XML Schema

Oxygen XML Developer supports syntax highlighting when editing XML Schema in **Text** mode to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for XML Schema files, follow these steps:

1. [Open the Preferences dialog box \(Options > Preferences\)](#).
2. Go to [Editor > Syntax Highlight](#).
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XSD** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the [Editor > Syntax Highlight > Elements/Attributes by Prefix](#) preferences page.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

XML Schema Outline View

The **Outline** view for XML Schemas presents all the global components grouped by their location, namespace, or type. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

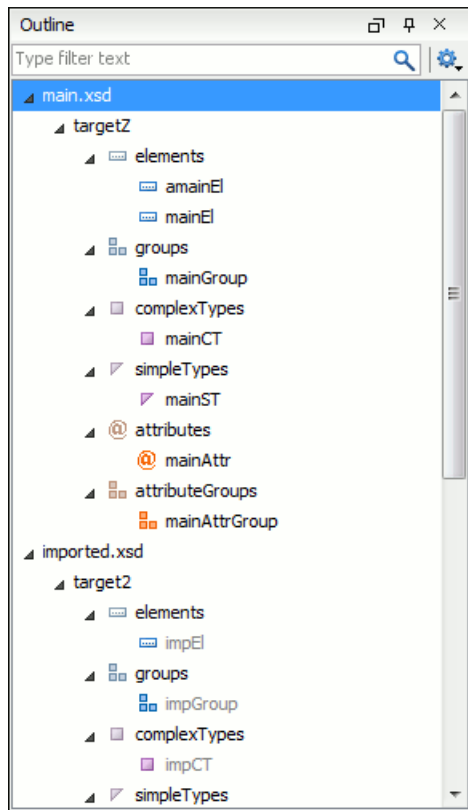


Figure 308: Outline View for XML Schema

The **Outline** view provides the following options in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches;

Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram is also selected in the **Outline** view.

Sort

Allows you to sort alphabetically the schema components.

Show all components

Displays all components that were collected starting from the *master files*. Components that are not referable from the current file are marked with an orange underline. To reference them, add an import directive with the componentNS namespace.

Show referable components

Displays all components (collected starting from the *master files*) that can be referenced from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

These three operations allow you to group the components by location, namespace, or type. When grouping by namespace, the main schema target namespace is the first presented in the **Outline** view.

The following contextual menu actions are available in the **Outline** view:

Remove (Delete)

Removes the selected item from the diagram.

Search References (Ctrl (Meta on Mac OS)+Shift+R)

Searches all references of the item found at current cursor position in the defined scope, if any.

Search References in

Searches all references of the item found at current cursor position in the specified scope.

Component Dependencies (Ctrl (Meta on Mac OS)+Shift+F4)

Opens the [Component Dependencies view](#) that allows you to see the dependencies for the current selected component.

Resource Hierarchy (F4)

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the hierarchy for the current selected resource.

Resource Dependencies (Shift + F4)

Opens the [Resource Hierarchy / Dependencies view](#) that allows you to see the dependencies for the current selected resource.

Rename Component in

Renames the selected component.

Generate Sample XML Files

Generate XML files using the current opened schema. The selected component is the XML document root.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search will be searched as a partial match.

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

Related Information:

[Searching and Refactoring Actions in XML Schemas](#) on page 548

[XML Schema Component Dependencies View](#) on page 546

[XML Schema Resource Hierarchy / Dependencies View](#) on page 544

[Generating Sample XML Files](#) on page 550

[Editing Relax NG Schema in the Master Files Context](#) on page 608

XML Schema Attributes View

The **Attributes** view for XML Schemas presents the properties for the selected component in the schema diagram. By default, it is displayed on the right side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Name	family
Type	[ST - union]
Member Types	
Member	xs:string
Default	
Fixed	
Substitution Group	
Abstract	false
Nilable	false
Block	
Final	
ID	
Component	element
Namespace	
System ID	personal.xsd

Figure 309: Attributes View

The default value of a property is presented in the **Attributes** view with blue foreground. The properties that can not be edited are rendered with gray foreground. A non-editable category that contains at least one child is rendered with bold. Bold properties are properties with values set explicitly to them.

Properties for components that do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a property by double-clicking by pressing Enter. For most properties you can choose valid values from a list or you can specify another value. If a property has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default, properties with errors are highlighted with red and the properties with warnings are highlighted with yellow. You can customize these colors from the [Document checking user preferences](#).

For imports, includes and redefines, the properties are not edited directly in the **Attributes** view. A dialog box will open that allows you to specify properties for them.

The schema namespace mappings are not presented in **Attributes** view. You can view/edit these by choosing **Edit Schema Namespaces** from the contextual menu on the schema root. See more in the [Edit Schema Namespaces](#) section.

The **Attributes** view has five actions available on the toolbar and also on the contextual menu:

+ Add

Allows you to add a new member type to an union's member types category.

✕ Remove

Allows you to remove the value of a property.

↑ Move Up

Allows you to move up the current member to an union's member types category.

↓ Move Down

Allows you to move down the current member to an union's member types category.

📄 Copy

Copy the attribute value.

🔍 Go to Definition

Shows the definition for the selected type.

Show Facets

Allows you to edit the facets for a simple type.

XML Schema Palette View

The **Palette** view is designed to offer quick access to XML Schema components and to improve the usability of the XML Schema diagram builder. You can use the **Palette** to drag and drop components in the **Design** mode. The components offered in the **Palette** view depend on the XML schema version set in the [XML Schema preferences page](#). If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

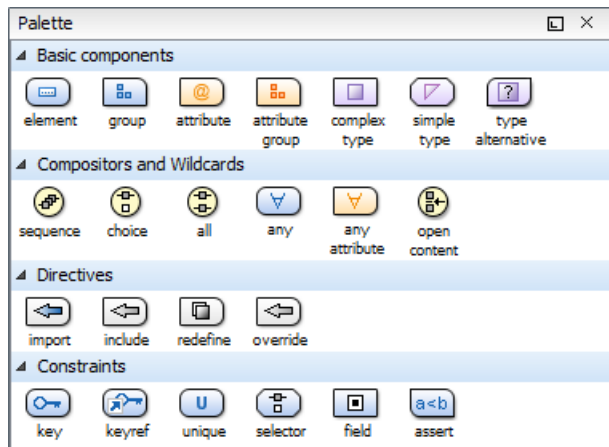


Figure 310: Palette View

Components are organized functionally into 4 collapsible categories:

- Basic components: *elements*, *group*, *attribute*, *attribute group*, *complex type*, *simple type*, *type alternative*.
- Compositors and Wildcards: *sequence*, *choice*, *all*, *any*, *any attribute*, *open content*.
- Directives: *import*, *include*, *redefine*, *override*.
- Identity constraints: *key*, *keyref*, *unique*, *selector*, *field*, *assert*.

Note: The *type alternative*, *open content*, *override*, and *assert* components are available for XML Schema 1.1.

To add a component to the edited schema:

- Click and hold a graphic symbol from the **Palette** view, then drag the component into the **Design** view.
- A line dynamically connects the component with the XML schema structure.
- Release the component into a valid position.

Note: You cannot drop a component into an invalid position. When you hover the component into an invalid position, the mouse cursor changes its shape into . Also, the connector line changes its color from the usual dark gray to the color defined in the [Validation error highlight color option](#) (default color is red).

For more information about the Schema palette, watch our video demonstration:

<https://www.youtube.com/embed/KalHUXmpuAA>

XML Schema Facets View

The **Facets** view for XML Schemas presents the facets for the selected component, if available. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

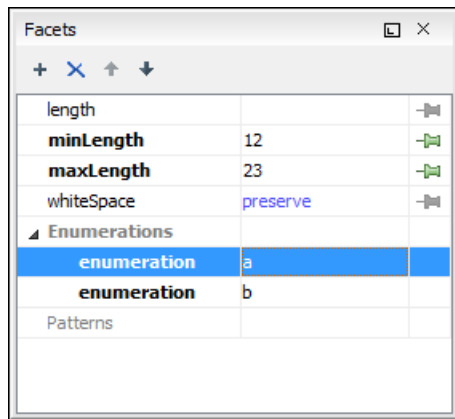


Figure 311: Facets View

The default value of a facet is rendered in the **Facets** view with a blue color. The facets that can not be edited are rendered with a gray color. The grouping categories (for example: **Enumerations** and **Patterns**) are not editable. If these categories contain at least one child they are rendered with bold. Bold facets are facets with values set explicitly to them.

Important: Usually inherited facets are presented as default in the **Facets** view but if patterns are inherited from a base type and also specified in the current simple type only the current specified patterns will be presented. You can see the effective pattern value obtained by combining the inherited and the specified patterns as a tooltip on the **Patterns** category.

Facets for components that do not belong to the current edited schema are read-only but if you double-click them you can choose to open the corresponding schema and edit them.

You can edit a facet by double-clicking it or by pressing Enter, when that facet is selected. For some facets you can choose valid values from a list or you can specify another value. If a facet has an invalid value or a warning, it will be highlighted in the table with the corresponding foreground color. By default, facets with errors are presented with red and the facets with warnings with yellow. You can customize the error colors from the [Document Checking user preferences](#).

The **Facets** view provides the following actions in its toolbar and contextual menu:

+ Add

Allows you to add a new enumeration or a new pattern.

X Remove

Allows you to remove the value of a facet.

Edit Annotations

Allows you to edit an annotation for the selected facet.

↑ Move Up

Allows you to move up the current enumeration/pattern in **Enumerations/Patterns** category.

↓ Move Down

Allows you to move down the current enumeration/pattern in **Enumerations/Patterns** category.

Copy

Copy the attribute value.

Open in Regular Expressions Builder

Rather than editing regular expressions manually, this action allows you to open the pattern in the [XML Schema Regular Expressions Builder](#) that guides you through the process of testing and constructing the pattern..

Facets can be fixed to prevent a derivation from modifying its value. To fix a facet value just press the **Pin** button.

XML Schema Resource Hierarchy / Dependencies View

The **Resource Hierarchy / Dependencies** view allows you to easily see the hierarchy / dependencies for an XML Schema, a [Relax NG schema](#) or an [XSLT stylesheet](#). If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The **Resource Hierarchy / Dependencies** is useful when you want to start from an XML Schema (XSD) file and build and review the hierarchy of all the other XSD files that are imported, included or redefined in the given XSD file. The view is also able to build the tree structure, that is the structure of all other XSD files that import, include or redefine the given XSD file. The scope of the search is configurable (the current project, a set of local folders, etc.)

The build process for the hierarchy view is started with the **Resource Hierarchy** action available on the contextual menu of the editor panel.

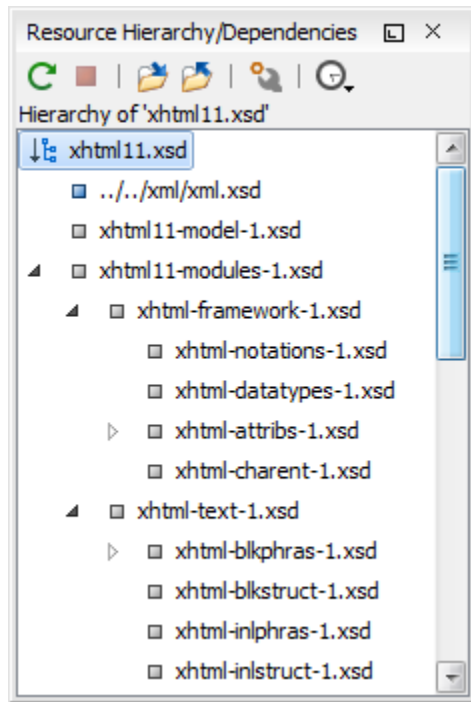


Figure 312: Resource Hierarchy/Dependencies View - Hierarchy for xhtml11.xsd

The build process for the dependencies view is started with the **Resource Dependencies** action available on the contextual menu.

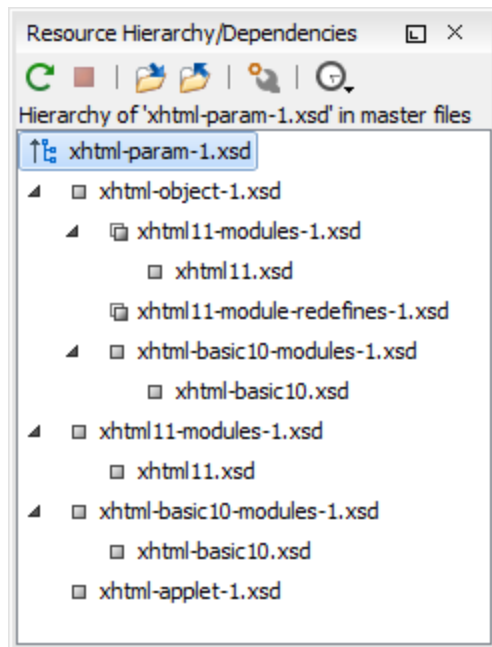


Figure 313: Resource Hierarchy/Dependencies View - Dependencies for xhtml-param-1.xsd

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

[Search and Refactor Operations Scope](#) on page 429

Moving/Renaming XML Schema Resources

You can move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

XML Schema Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of an XML Schema component:

1. Right-click the desired component in the editor or **Outline** view.
2. Select the **Component Dependencies** action from the contextual menu.

The action is available for all named components (for example, elements or attributes).

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon .

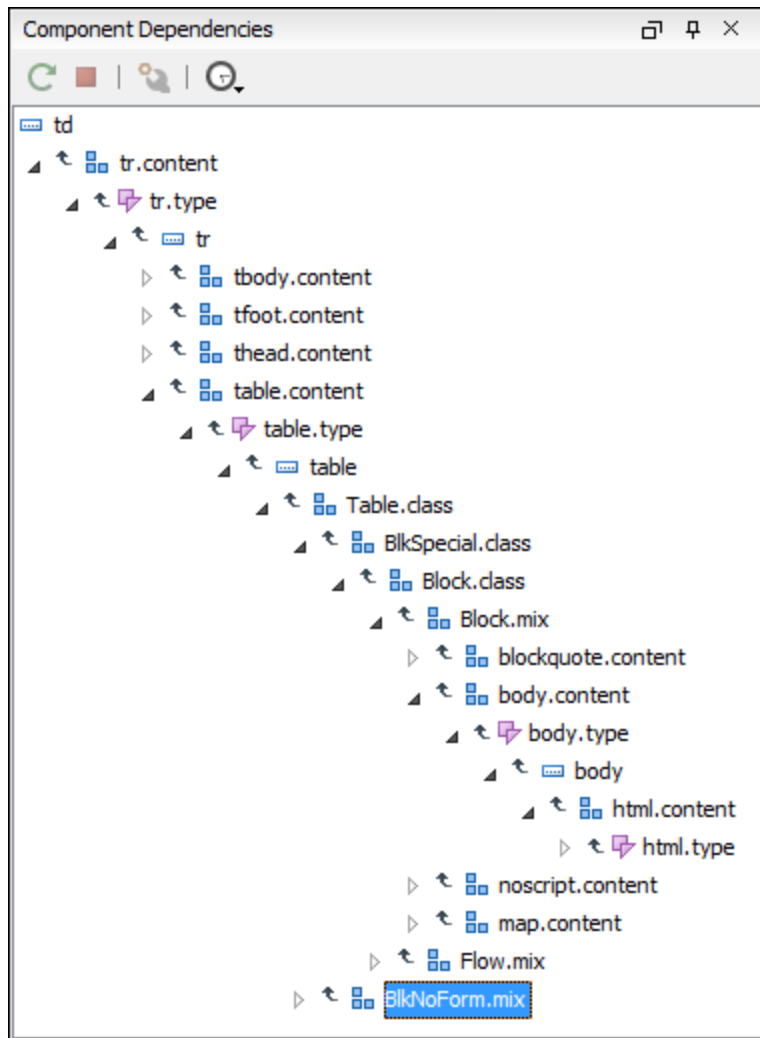


Figure 314: Component Dependencies View - Hierarchy for xhtml11.xsd

The **Component Dependencies** view includes the following toolbar actions:

Refresh

Refreshes the dependencies structure.

Stop

Stops the dependency computation.

Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.

History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

For more information, see the **Maintain Complex XML Schemas** section of our **Developing XML Schemas** video demonstration:

Related Information:

[Search and Refactor Operations Scope](#) on page 429

Highlight Component Occurrences

When a component (for example types, elements, attributes) is found at current cursor position, Oxygen XML Developer performs a search over the entire document to find the component declaration and all its references. When found, they are highlighted both in the document and in the stripe bar, at the right side of the document. Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected and a new search is performed. All occurrences are removed when you start to edit the document.

This feature is on by default. To configured it, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Mark Occurrences**. A search can also be triggered with the **Search > Search Occurrences in File ()** contextual menu action. All matches are displayed in a separate tab of the [Results view](#).

Searching and Refactoring Actions in XML Schemas

Search Actions

The following search actions can be applied on attribute, attributeGroup, element, group, key, unique, keyref, notation, simple, or complex types and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Go to Definition** - Moves the cursor to the definition of the referenced XML Schema item.

Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on attribute, attributeGroup, element, group, key, unique, keyref, notation, simple, or complex types and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.

-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

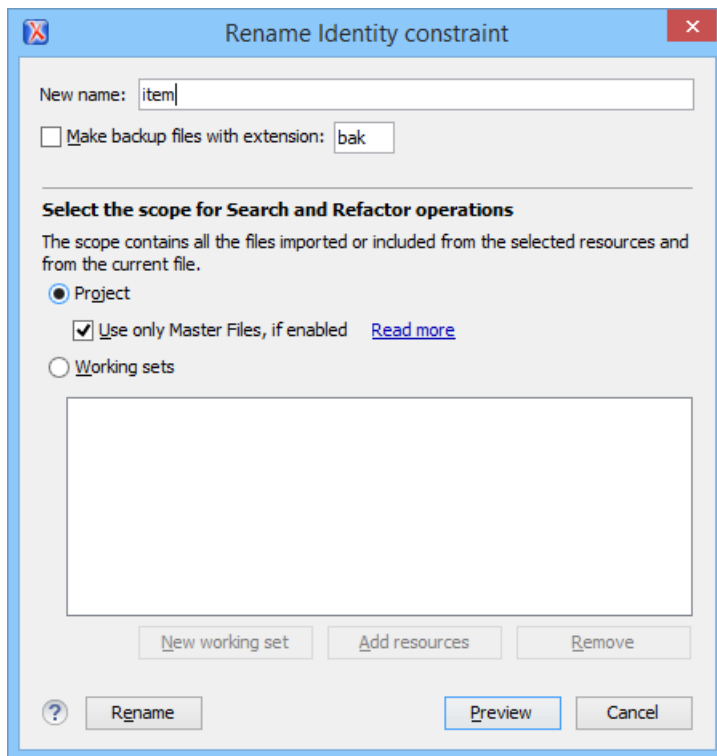


Figure 315: Rename Identity Constraint Dialog Box

Related Information:

[Search and Refactor Operations Scope](#) on page 429

XML Schema Quick Assist Support

The [Quick Assist support](#) improves the development work flow, offering fast access to the most commonly used actions when you edit schema documents.

The [Quick Assist feature](#) is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb icon (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *quick assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

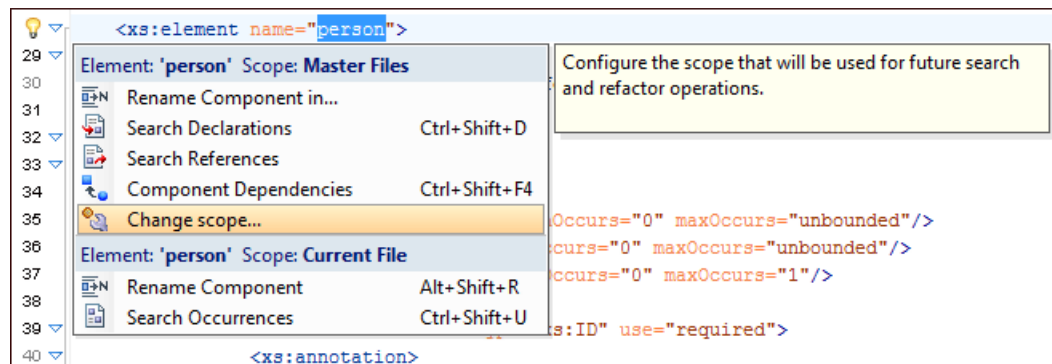


Figure 316: Quick Assist Support

The *Quick Assist* support offers direct access to the following actions:



Rename Component in

Renames the component and all its dependencies.



Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.



Search References

Searches all references of the component in a predefined scope.



Component Dependencies

Searches the component dependencies in a predefined scope.



Change Scope

Configures the scope that will be used for future search or refactor operations.



Rename Component

Allows you to rename the current component in-place.



Search Occurrences

Searches all occurrences of the component within the current file.

For more information about improving schema development using the **Quick Assist** action set, watch our video demonstration:

<https://www.youtube.com/embed/X-2-gkrFSGU>

Related Information:

[Resource Hierarchy / Dependencies View](#) on page 544

[Component Dependencies View](#) on page 546

[Searching and Refactoring Actions](#) on page 548

Generating Sample XML Files

Oxygen XML Developer offers support to generate sample XML files both from XML schema 1.0 and XML schema 1.1, depending on the XML schema version set in [XML Schema preferences page](#).

To generate sample XML files from an XML Schema, use the  **Generate Sample XML Files** action from the **Tools** menu. This action is also available in the contextual menu of the schema [Design mode](#). The action opens the **Generate Sample XML Files** dialog box that allows you to configure a variety of options for generating the files.

The **Generate Sample XML Files** dialog box contains three tabs with various configurable options. Default values for these options can be set in the [Sample XML Files Generator preferences page](#). You can also run the tool from the command line using exported options.

Schema Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The first set of options are found in the **Schema** tab.

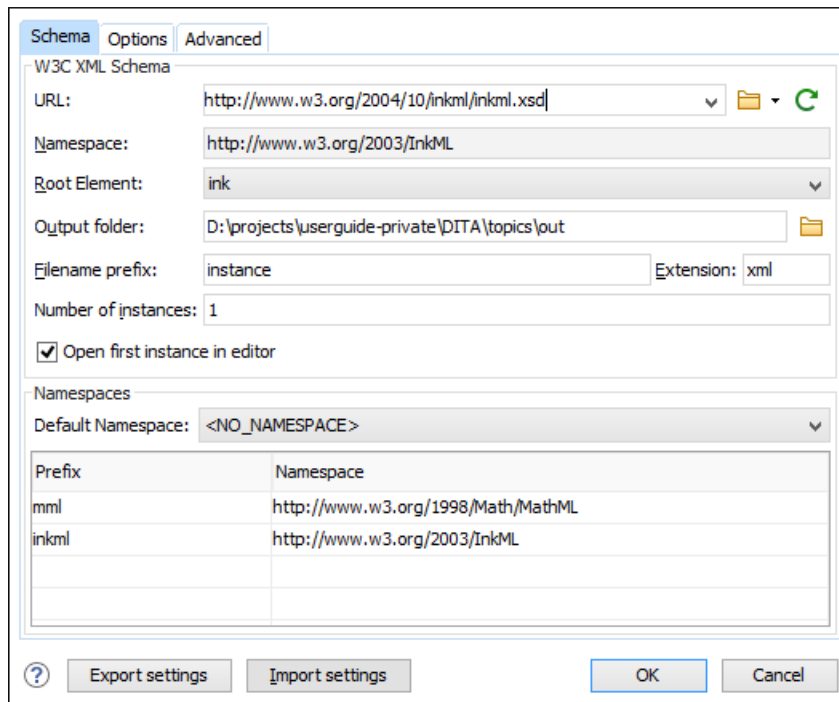


Figure 317: Generate Sample XML Files Dialog Box (Schema Tab)

This tab includes the following options:

URL

Specifies the URL of the Schema location. You can specify the path by using the text field, the history drop-down menu, or the browsing tools in the **Browse** drop-down list.

Namespace

Displays the namespace of the selected schema.

Root Element

After the schema is selected, this drop-down menu is populated with all root candidates gathered from the schema. Choose the root of the output XML documents.

Output folder

Path to the folder where the generated XML instances will be saved.

Filename prefix and Extension

You can specify the prefix and extension for the file name that will be generated. Generated file names have the following format: prefixN.extension, where N represents an incremental number from 0 up to the specified [Number of instances](#).

Number of instances

The number of XML files to be generated.

Open first instance in editor

When selected, the first generated XML file is opened in the editor.

Namespaces section

You can specify the **Default Namespace**, as well as the prefixes for the namespaces.

Export settings

Use this button to save the current settings for future use.


Import settings

Use this button to load previously exported settings.

You can click **OK** at any point to generate the sample XML files.

Options Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The **Options** tab allows you to set specific options for namespaces and elements.

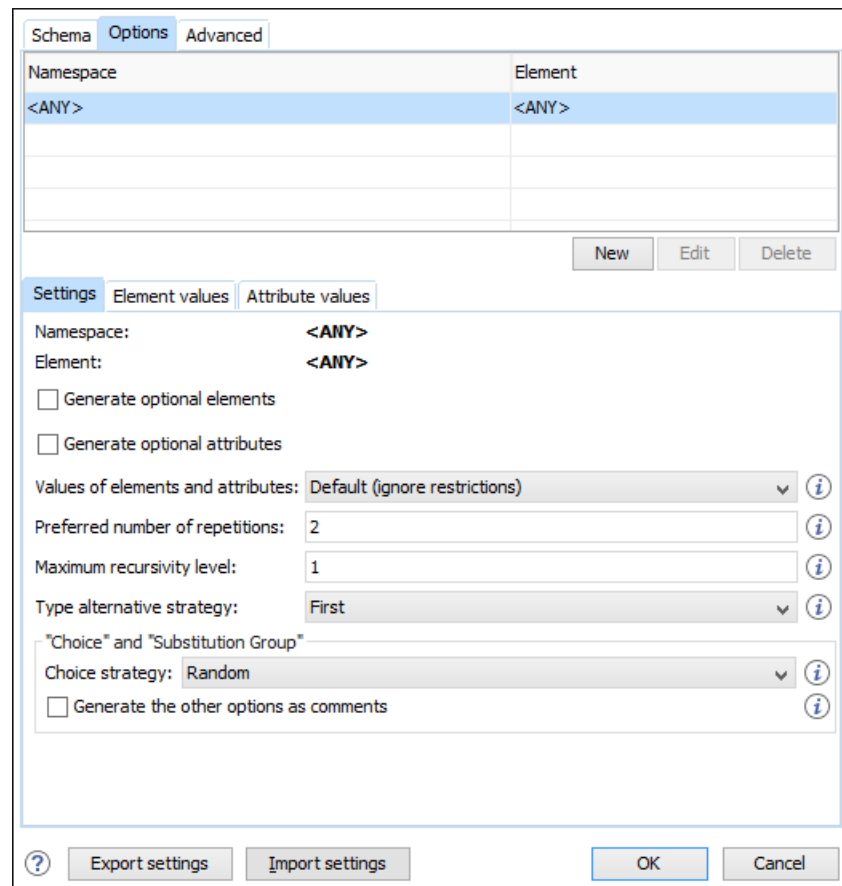

The screenshot shows the 'Options' tab of the 'Generate Sample XML Files' dialog box. It features a table for 'Namespace' and 'Element' settings, and a 'Settings' section with various configuration options.

Namespace	Element
<ANY>	<ANY>

Buttons: New, Edit, Delete

Settings subtab:

Namespace: <ANY>
Element: <ANY>

☐ Generate optional elements
☐ Generate optional attributes

Values of elements and attributes: Default (ignore restrictions) ⓘ
Preferred number of repetitions: 2 ⓘ
Maximum recursivity level: 1 ⓘ
Type alternative strategy: First ⓘ

"Choice" and "Substitution Group"
Choice strategy: Random ⓘ
☐ Generate the other options as comments ⓘ

Buttons: ? Export settings Import settings OK Cancel

Figure 318: Generate Sample XML Files Dialog Box (Options Tab)

This tab includes the following options:

Namespace / Element table

Allows you to set a namespace for each element name that appears in an XML document instance. The following prefix-to-namespace associations are available:

- All elements from all namespaces (<ANY> - <ANY>). This is the default setting.
- All elements from a specific namespace.
- A specific element from a specific namespace.

Settings subtab

Namespace

Displays the namespace specified in the table at the top of the dialog box.

Element

Displays the element specified in the table at the top of the dialog box.

Generate optional elements

When selected, all elements are generated, including the optional ones (having the minOccurs attribute set to 0 in the schema).

Generate optional attributes

When selected, all attributes are generated, including the optional ones (having the use attribute set to optional in the schema).

Values of elements and attributes

Controls the content of generated attribute and element values. The following choices are available:

- **None** - No content is inserted.
- **Default** - Inserts a default value depending of data type descriptor of the particular element or attribute. The default value can be either the data type name or an incremental name of the attribute or element (according to the global option from the **Sample XML Files Generator** preferences page). Note that type restrictions are ignored when this option is selected. For example, if an element is of a type that restricts an **xs:string** with the **xs:maxLength** facet to allow strings with a maximum length of 3, the XML instance generator tool may generate string element values longer than 3 characters.
- **Random** - Inserts a random value depending of data type descriptor of the particular element or attribute.

Important: If all of the following are true, the **Generate Sample XML Files** tool outputs invalid values:

- At least one of the restrictions is a regexp.
- The value generated after applying the regexp does not match the restrictions imposed by one of the facets.

Preferred number of repetitions

Allows you to set the preferred number of repeating elements related to `minOccurs` and `maxOccurs` facets defined in the XML Schema.

- If the value set here is between `minOccurs` and `maxOccurs`, then that value is used.
- If the value set here is less than `minOccurs`, then the `minOccurs` value is used.
- If the value set here is greater than `maxOccurs`, then `maxOccurs` is used.

Maximum recursion level

If a recursion is found, this option controls the maximum allowed depth of the same element.

Type alternative strategy

Used for the `xs:alternative` element from XML Schema 1.1. The possible strategies are:

- **First** - The first valid alternative type is always used.
- **Random** - A random alternative type is used.

Choice strategy

Used for `xs:choice` or `substitutionGroup` elements. The possible strategies are:

- **First** - The first branch of `xs:choice` or the head element of `substitutionGroup` is always used.
- **Random** - A random branch of `xs:choice` or a substitute element or the head element of a `substitutionGroup` is used.

Generate the other options as comments

If selected, generates the other possible choices or substitutions (for `xs:choice` and `substitutionGroup`). These alternatives are generated inside comments groups so you can uncomment and use them later. Use this option with care (for example, on a restricted namespace and element) as it may generate large result files.

Element values subtab

Allows you to add values that are used to generate the content of elements. If there are multiple values, then the values are used in a random order.

Attribute values subtab

Allows you to add values that are used to generate the content of attributes. If there are multiple values, then the values are used in a random order.

Export settings

Use this button to save the current settings for future use.

Import settings

Use this button to load previously exported settings.

You can click **OK** at any point to generate the sample XML files.

Advanced Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The **Advanced** tab allows you to set some options in regards to output values and performance.

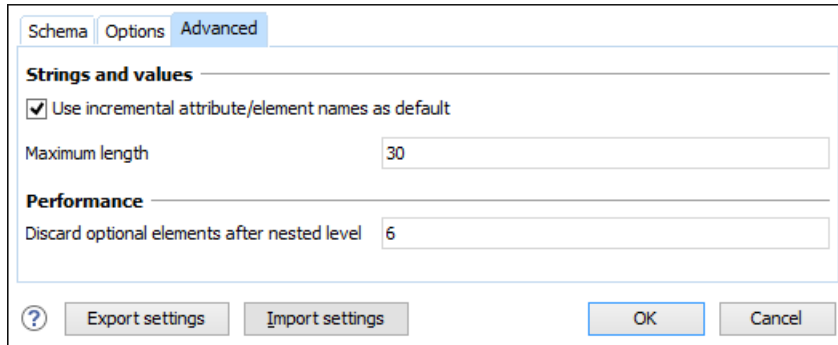


Figure 319: Generate Sample XML Files Dialog Box (Advanced Tab)

This tab includes the following options:

Use incremental attribute / element names as default

If selected, the value of an element or attribute starts with the name of that element or attribute. For example, for an `a` element the generated values are: `a1`, `a2`, `a3`, and so on. If not selected, the value is the name of the type of that element / attribute (for example: `string`, `decimal`, etc.)

Maximum length

The maximum length of string values generated for elements and attributes.

Discard optional elements after nested level

The optional elements that exceed the specified nested level are discarded. This option is useful for limiting deeply nested element definitions that can quickly result in very large XML documents.

Export settings

Use this button to save the current settings for future use.

Import settings

Use this button to load previously exported settings.

Running the Generate Sample XML Files Tool from the Command Line

The **Generate Sample XML Files** tool can be also used from command line by running the script called `xmlGenerator.bat` (on Windows) / `xmlGenerator.sh` (on Mac OS X / Unix / Linux) located in the Oxygen XML Developer installation folder. The parameters can be set in the dialog box, exported to an XML file on disk with the **Export settings** button, and then reused from command line. With the exported settings file, you can generate the same XML instances from the command line as from the dialog box. For example:

```
xmlGenerator.bat path_of_CFG_file
```

The script can be integrated in an external batch process launched from the command line. The command line parameter of the script is the relative path to the exported XML settings file. The files specified with relative paths in the exported XML settings will be made absolute relative to the folder where the script is run.

The following example shows such an XML configuration file:

```
<settings>
  <schemaSystemId>http://www.w3.org/2001/XMLSchema.xsd</schemaSystemId>
  <documentRoot>schema</documentRoot>
  <outputFolder>D:\projects\output</outputFolder>
  <filenamePrefix>instance</filenamePrefix>
  <filenameExtension>xml</filenameExtension>
  <noOfInstances>1</noOfInstances>
  <openFirstInstance>true</openFirstInstance>
  <defaultNamespace>&lt;NO_NAMESPACE></defaultNamespace>
  <element namespace="&lt;ANY>" name="&lt;ANY>">
    <generateOptionalElements>false</generateOptionalElements>
    <generateOptionalAttributes>false</generateOptionalAttributes>
    <valuesForContentType>DEFAULT</valuesForContentType>
    <preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
  </element>
</settings>
```



```

<maximumRecursivityLevel>1</maximumRecursivityLevel>
<choicesAndSubstitutions strategy="RANDOM"
  generateOthersAsComments="false"/>
<attribute namespace="&lt;&lt;ANY>"
  name="&lt;&lt;ANY>">
  <attributeValue>attrValue1</attributeValue>
  <attributeValue>attrValue2</attributeValue>
</attribute>
</element>
<element namespace="&lt;&lt;NO_NAMESPACE>"
  name="&lt;&lt;ANY>">
  <generateOptionalElements>true</generateOptionalElements>
  <generateOptionalAttributes>true</generateOptionalAttributes>
  <valuesForContentType>DEFAULT</valuesForContentType>
  <preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
  <maximumRecursivityLevel>1</maximumRecursivityLevel>
  <choicesAndSubstitutions strategy="RANDOM"
    generateOthersAsComments="true"/>
  <elementValue>value1</elementValue>
  <elementValue>value2</elementValue>
  <attribute namespace="&lt;&lt;ANY>"
    name="&lt;&lt;ANY>">
    <attributeValue>attrValue1</attributeValue>
    <attributeValue>attrValue2</attributeValue>
  </attribute>
</element>
</settings>

```

Generating Documentation for an XML Schema

Oxygen XML Developer can generate detailed documentation for the components of an XML Schema in HTML, PDF, DocBook, or other custom formats. You can select the components and the level of detail. The components are hyperlinked in both HTML and DocBook documents.

Note: You can generate documentation for both XML Schema version 1.0 and 1.1.

To generate documentation for an XML Schema document, select **XML Schema Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project view**.

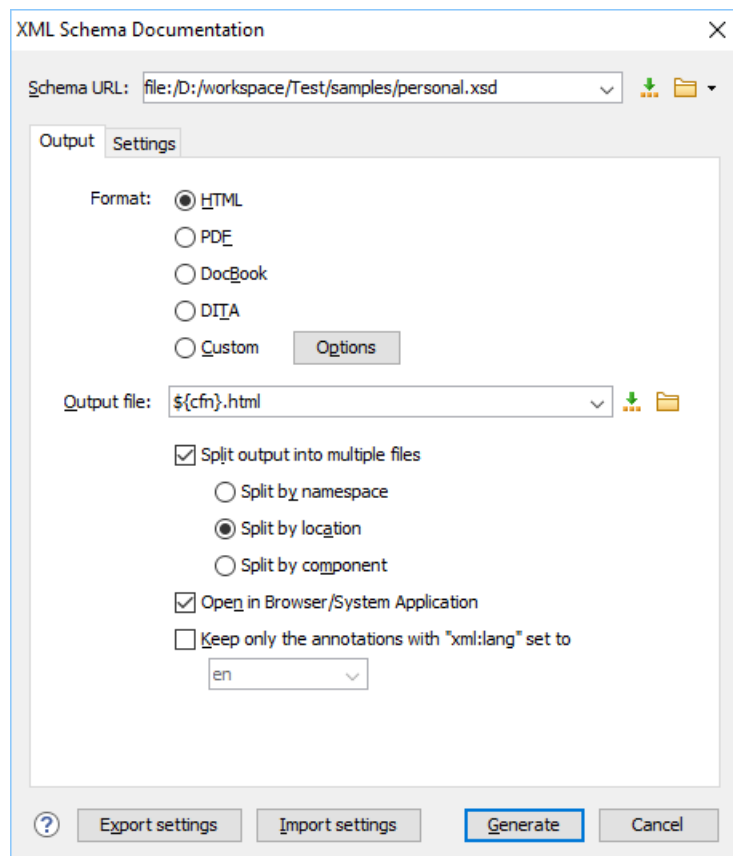


Figure 320: XML Schema Documentation Dialog Box

The **Schema URL** field of the dialog box must contain the full path to the XML Schema (XSD) file for which you want to generate documentation. The schema may be a local or a remote file. You can specify the path to the schema by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.

Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in [HTML output format](#).
 - **PDF** - The documentation is generated in [PDF output format](#).
 - **DocBook** - The documentation is generated in [DocBook output format](#).
 - **DITA** - The documentation is generated in [DITA output format](#).
 - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
 - **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
 - **Split output into multiple files** - Instructs the application to split the output into multiple files. You can choose to split them by namespace, location, or component name.
 - **Open in Browser/System Application** - Opens the result in the system application associated with the output file type. For DITA and DocBook documents, this option appears as **Open in Editor** and the result will be opened in Oxygen XML Developer (in the current editor).
- Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.
- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

Settings Tab

When you generate documentation for an XML schema you can choose what components to include in the output and the details to be included in the documentation.

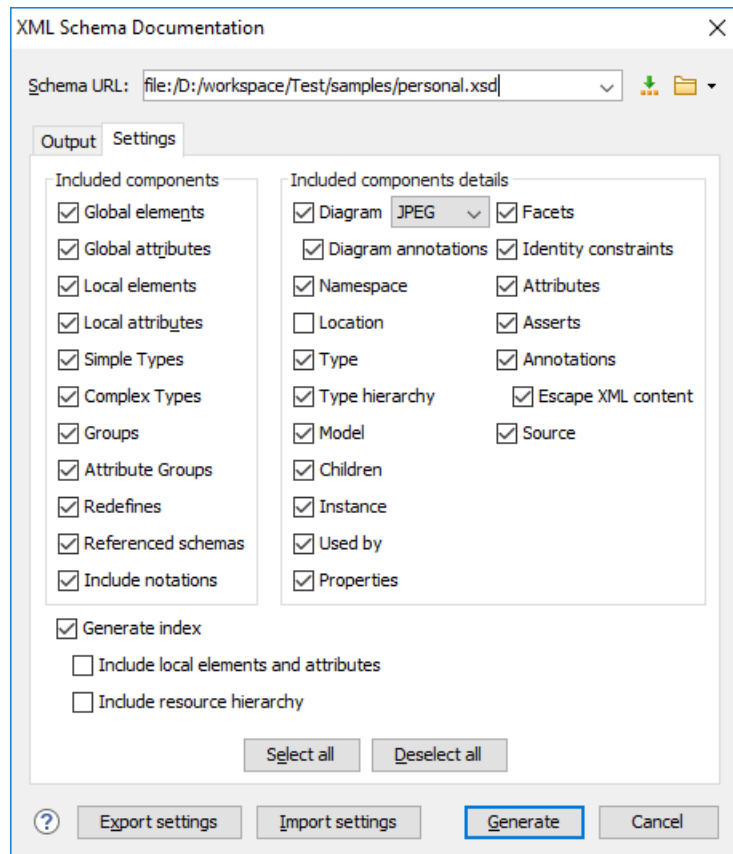


Figure 321: Settings Tab of the XML Schema Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following components: **Global elements**, **Global attributes**, **Local elements**, **Local attributes**, **Simple Types**, **Complex Types**, **Groups**, **Attribute Groups**, **Redefines**, **Referenced schemas**, **Include notations**.

You can choose whether or not to include the following other details:

- **Diagram** - Displays the diagram for each component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section. The generated diagrams are dependent on the options from the [Schema Design Properties](#) page.
 - **Diagram annotations** - This option controls whether or not the annotations of the components presented in the diagram sections are included.
- **Namespace** - Displays the namespace for each component.
- **Location** - Displays the schema location for each component.
- **Type** - Displays the component type if it is not an anonymous one.
- **Type hierarchy** - Displays the types hierarchy.
- **Model** - Displays the model (sequence, choice, all) presented in BNF form. The separator characters that are used depend upon the information item used:
 - `xs:all` - Its children will be separated by space characters.
 - `xs:sequence` - Its children will be separated by comma characters.
 - `xs:choice` - Its children will be separated by / characters.
- **Children** - Displays the list of component's children.
- **Instance** - Displays an XML instance generated based on each schema element.
- **Used by** - Displays the list of all the components that reference the current one. The list is sorted by component type and name.
- **Properties** - Displays some of the component's properties.
- **Facets** - Displays the facets for each simple type

- **Identity constraints** - Displays the identity constraints for each element. For each constraint there are presented the name, type (unique, key, keyref), reference attribute, selector and field(s).
- **Attributes** - Displays the attributes for the component. For each attribute there are presented the name, type, fixed or default value, usage and annotation.
- **Asserts** - Displays the **assert** elements defined in a complex type. The test, XPath default namespace, and annotation are presented for each assert.
- **Annotations** - Displays the annotations for the component. If you choose **Escape XML Content**, the XML tags are present in the annotations.
- **Source** - Displays the text schema source for each component.
- **Generate index** - Displays an index with the components included in the documentation.
 - **Include local elements and attributes** - If selected, local elements and attributes are included in the documentation index.
 - **Include resource hierarchy** - Specifies whether or not the resource hierarchy for an XML Schema documentation is generated. It is deselected by default.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command line interface](#).)

Import settings - Reloads the settings from the exported file.

Generate - Use this button to generate the XML Schema documentation.

Related Information:

[Customizing PDF or DocBook Output of Generated XML Schema Documentation](#) on page 562

Output Formats for Generating XML Schema Documentation

XML Schema documentation can be generated in HTML, PDF, DocBook, or a custom format. You can choose the format from the [Schema Documentation](#) dialog box. For the PDF and DocBook formats, the option to split the output in multiple files is not available.

HTML Output Format

The XML Schema documentation generated in HTML format contains images corresponding to the same schema definitions as the ones displayed by [the schema diagram editor](#). These images are divided in clickable areas that are linked to the definitions of the names of types or elements. The documentation of a definition includes a **Used By** section with links to the other definitions that reference it. If the **Escape XML Content** option is unchecked, the HTML or XHTML tags used inside the `xs:documentation` elements of the input XML Schema for formatting the documentation text (for example, `<b>`, `<i>`, `<u>`, `<ul>`, `<li>`, etc.) are rendered in the generated HTML documentation.

The generated images format is **PNG**. The image of an XML Schema component contains the graphical representation of that component as it is rendered in [the schema diagram panel of the Oxygen XML Developer XSD editor panel](#).

Table of Contents

Group by:

Location

personal.xsd

Elements

email

family

given

link

name

person

personnel

url

Notations

gif

XML Schema documentation generated by **oXygen**® XML Editor.

Element name

Namespace: No namespace

Annotations: Name

Diagram:

Properties: Content complex

Used by: Element person

Model: ALL(family given)

Children: family, given

Instance:

```

<name>
  <family>{1,1}</family>
  <given>{1,1}</given>
</name>

```

Source:

```

<xs:element name="name">
  <xs:annotation>
    <xs:documentation>Name</xs:documentation>
    <xs:documentation>Annotation</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:all>
      <xs:element ref="family"/>
      <xs:element ref="given"/>
    </xs:all>
  </xs:complexType>
</xs:element>

```

Showing:

☒ Annotations

☒ Attributes

☒ Diagrams

☒ Facets

☒ Identity Constraints

☒ Instances

☒ Model

☒ Properties

☒ Source

☒ Used by

Close

Figure 322: XML Schema Documentation Example

The generated documentation includes a table of contents. You can group the contents by namespace, location, or component type. After the table of contents there is some information about the main, imported, included, and redefined schemas. This information contains the schema target namespace, schema properties (attribute form default, element form default, version), and schema location.

Namespace: No namespace

Properties:

Attribute Form Default: **unqualified**

Element Form Default: **unqualified**

Schema location: file:/D:/personal.xsd

Figure 323: Information About a Schema

If you choose to split the output into multiple files, the table of contents is displayed in the left frame. The contents are grouped in the same mode. If you split the output by location, each file contains a schema description and the components that you have chosen to include. If you split the output by namespace, each file contains information about schemas from that namespace and the list with all included components. If you choose to split the output by component, each file contains information about a schema component.

After the documentation is generated, you can collapse or expand details for some schema components by using the **Showing** options or the **Collapse** or **Expand** buttons.

Showing:

☒ Annotations
☒ Attributes
☒ Diagrams
☒ Facets
☒ Identity Constraints
☒ Instances
☒ Properties
☒ Source
☒ Used by

Close

Figure 324: Showing Options

For each component included in the documentation, the section presents the component type follow by the component name. For local elements and attributes, the name of the component is specified as *parent name/component name*. You can easily go to the parent documentation by clicking the parent name.

Namespace

No namespace

Annotations

Specifies the person family and given name.

Diagram

Properties

Content:

complex

Used by

Element

person

Model

ALL(family given)

Children

family, given

Instance

```

<name>
  <family>{1,1}</family>
  <given>{1,1}</given>
</name>

```

Source

```

<xs:element name="name">
  <xs:annotation>
    <xs:documentation>Specifies the person family and given name.</xs:documentation>
  </xs:annotation>
  <xs:complexType>
    <xs:all>
      <xs:element ref="family"/>
      <xs:element ref="given"/>
    </xs:all>
  </xs:complexType>
</xs:element>

```

Figure 325: Documentation for a Schema Component

If the schema contains imported or included modules, their dependencies tree is generated in the documentation.

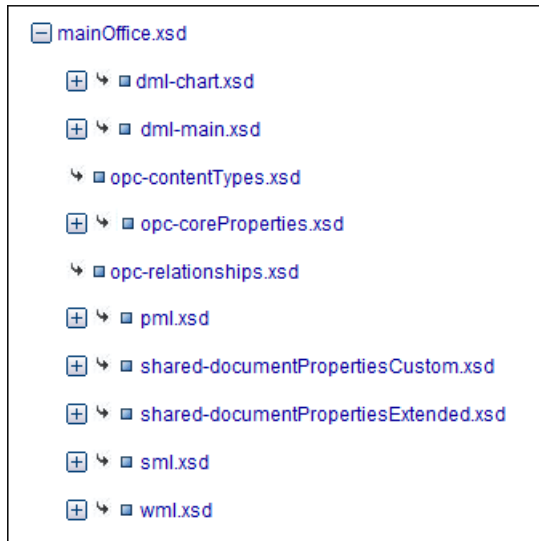


Figure 326: Example: Generated Documentation

PDF Output Format

For the PDF output format, the documentation is generated in DocBook format and a transformation using the FOP processor is applied to obtain the PDF file. To configure the FOP processor, see the [FO Processors preferences](#) page.

For information about customizing the PDF output, see [Customizing PDF or DocBook Output of Generated XML Schema Documentation](#) on page 562.

DocBook Output Format

If you generate the documentation in DocBook output format, the documentation is generated as a DocBook XML file. You can then apply a [predefined DocBook transformation scenario](#) (such as, *DocBook PDF* or *DocBook HTML*) on the output file, or [configure your own transformation scenario](#) to convert it into whatever format you desire.

For information about customizing the DocBook output, see [Customizing PDF or DocBook Output of Generated XML Schema Documentation](#) on page 562.

DITA Output Format

If you generate the documentation in DITA output format, each element of the schema is converted to a DITA *Topic* and all the generated topics are referenced in a [DITA map](#) file. You can then [apply a predefined DITA transformation scenario](#) (such as, *DITA Map PDF* or *DITA Map XHTML*), or [configure your own DITA OT transformation scenario](#) to convert it into whatever format you desire.

For information about customizing the DITA output, see [Customizing DITA Output of Generated XML Schema](#) on page 562.

Custom Output Format

For the custom format, you can specify a stylesheet to transform the intermediary XML file generated in the documentation process. You have to edit your stylesheet based on the schema `xsdDocSchema.xsd` from `[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation`. You can create a custom format starting from one of the stylesheets used in the predefined HTML, PDF, DocBook, and DITA formats. These stylesheets are available in `[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation/xsl`.

When using a custom format you can also copy additional resources into the output folder and choose to keep the intermediate XML files created during the documentation process.

Important: If you create a custom format for DITA, you must select the [Split output into multiple files](#) option in the **Output tab** and choose **Split by component**.

Customizing PDF or DocBook Output of Generated XML Schema Documentation

To customize the PDF or DocBook output of the generated XML Schema documentation, use the following procedure:

1. Customize the `[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation/xsl/xsdDocDocbook.xsl` stylesheet to include the content that you want to add in the PDF or DocBook output. Add the content in the XSLT template with the `match="schemaDoc"` attribute between the `info` and `xsl:apply-templates` elements, as commented in the following example:

```
<info>
  <pubdate><xsl:value-of select="format-date(current-date(),
    '[Mn] [D], [Y]', 'en', (), ())"/></pubdate>
</info>
<!-- Add the XSLT template content with match="schemaDoc" attribute here -->
<xsl:apply-templates select="schemaHierarchy"/>
```

2. Create an intermediary file that holds the content of your XML Schema documentation by following these steps:
 - a. Go to **Tools > Generate Documentation > XML Schema Documentation**.
 - b. Select **Custom** for the output format and click the **Options** button.
 - c. In the **Custom format options** dialog box, do the following:
 1. Enter the customized stylesheet in the **Custom XSL** field (`[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation/xsl/xsdDocDocbook.xsl`).
 2. Select the **Copy additional resources to the output folder** option and leave the default selection in the **Resources** field.
 3. Click **OK**.
 - d. When you return to the **XML Schema Documentation** dialog box, just press the **Generate** button to generate a DocBook XML file with an intermediary form of the Schema documentation.
3. If you want the DocBook file to be transformed into a PDF document, follow these steps:
 - a. Use the  **Configure Transformation Scenario(s)** action from the toolbar or the **Document > Transformation** menu, click **New**, and select **XML transformation with XSLT**.
 - b. In the **New Scenario** dialog box, go to the **XSL URL** field and choose the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/oxygen/xsdDocDocbookCustomizationFO.xsl` file.
 - c. Go to the **FO Processor** tab and select the **Perform FO Processing** and **XSLT result as input** options.
 - d. Go to the **Output** tab and select the directory where you want to store the XML Schema documentation output and click **OK**.
 - e. Click **Apply Associated**.

Tip: If you want your modifications to be permanent so that you can simply select the PDF output format in the **XML Schema Documentation** dialog box, rather than configuring a custom format each time you generate this documentation, follow this procedure:

1. Create a [JAR](#) or ZIP file that includes the modified stylesheet (customized in step 1 above), placed in the following directory structure: `builtin/documentation/schema_documentation/xsdDocDocbook.xsl`.
2. Create a new directory named endorsed inside the `[OXYGEN_INSTALL_DIR]/lib` directory and place the created JAR or ZIP file inside it.
3. Restart Oxygen XML Developer and the PDF output format will now use your customized stylesheet.

Customizing DITA Output of Generated XML Schema

To customize the DITA output of the generated XML Schema documentation, use the following procedure:

1. Customize the `[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation/xsl/xsdDocDita.xsl` stylesheet to incorporate your desired changes.
2. Create an intermediary file that holds the content of your XML Schema documentation by following these steps:
 - a. Go to **Tools > Generate Documentation > XML Schema Documentation**.
 - b. Select **Custom** for the output format and click the **Options** button.

- c. In the **Custom format options** dialog box, do the following:
 1. Enter the customized stylesheet in the **Custom XSL** field (`[OXYGEN_INSTALL_DIR]/frameworks/schema_documentation/xsl/xsdDocDita.xsl`).
 2. Select the **Copy additional resources to the output folder** option and leave the default selection in the **Resources** field.
 3. Click **OK**.
- d. Make sure the **Split output into multiple files** option is selected and choose **Split by component**.
- e. When you return to the **XML Schema Documentation** dialog box, just press the **Generate** button to generate a DITA map file that contains the XML Schema documentation.

Generating XML Schema Documentation From the Command-Line Interface

You can export the settings of the **XML Schema Documentation** dialog box to an XML file by pressing the **Export settings** button. With the exported configuration file, you can generate the same documentation from the command-line interface by running the following script:

- `schemaDocumentation.bat` on Windows.
- `schemaDocumentation.sh` on OS X / Linux.

The script is located in the Oxygen XML Developer installation folder. The script can be integrated in an external batch process launched from the command-line interface. The script accepts a variety of command line arguments that allow you to configure the documentation.

The accepted syntax and arguments are as follows:

```
schemaDocumentation schemaFile [ [-cfg:configFile] | [ [-out:outputFile] [-format:<value>] [-xsl:<xslFile>] [-split:<value>] [-openInBrowser:<value>] ] | --help | -help | --h | -h ]
```

schemaFile

The XML Schema file.

-cfg:configFile

The exported configuration file. It contains the output file, output format options, split method, and some advanced options regarding the included components and components details. If an external configuration file is specified, all other supplied arguments except for the XML Schema file will be ignored.

-out:outputFile

The file where the generated documentation will be saved. By default, it is the name of the schema file with an *html* extension.

-format:<value>

The output format type used when generating the documentation. Possible values are as follows:

- `html` - To generate documentation in HTML format.
- `pdf` - To generate documentation in PDF format.
- `docbook` - To generate documentation in DocBook format.
- `custom` - To generate documentation in a custom format.

-xsl:<xslFile>

The XSL file to be applied on the intermediate XML format. If there is no XSL file provided, the result will be in the HTML format.

-split:<value>

The split method used when generating the documentation. Splitting is recommended for large schemas. Possible values are as follows:

- `none` (default value) - To generate one single output file.
- `namespace` - To generate an output file for every namespace in the schema.
- `component` - To generate an output file for every component in the schema.
- `location` - To generate an output file for every schema location.

-openInBrowser:<value>

Opens the result of the transformation in a browser or system application. Possible values are `true` or `false` (default value).

--help | -help | --h | -h

Displays the available options.

Example:

Example of the script in a Windows command line:

```
schemaDocumentation example.xsd -out:schemaDocumentation.html  
-format:custom -xsl:example.xsl -split:namespace
```

Converting Schema to Another Schema Language

The  **Generate/Convert Schema** tool allows you to convert a DTD or Relax NG (full or compact syntax) schema or a set of XML files to an equivalent XML Schema, DTD or Relax NG (full or compact syntax) schema. Where perfect equivalence is not possible due to limitations of the target language, Oxygen XML Developer generates an approximation of the source schema. Oxygen XML Developer uses [Trang multiple format converter](#) to perform the actual schema conversions.

To use this tool, select the  **Generate/Convert Schema (Alt + Shift + C (Command + Alt + C on OS X))** action from the **Tools** menu or from the **Open with** submenu when invoking the contextual menu in the [Project view](#). This action opens the **Generate/Convert Schema** dialog box that allows you to configure various options for conversion.

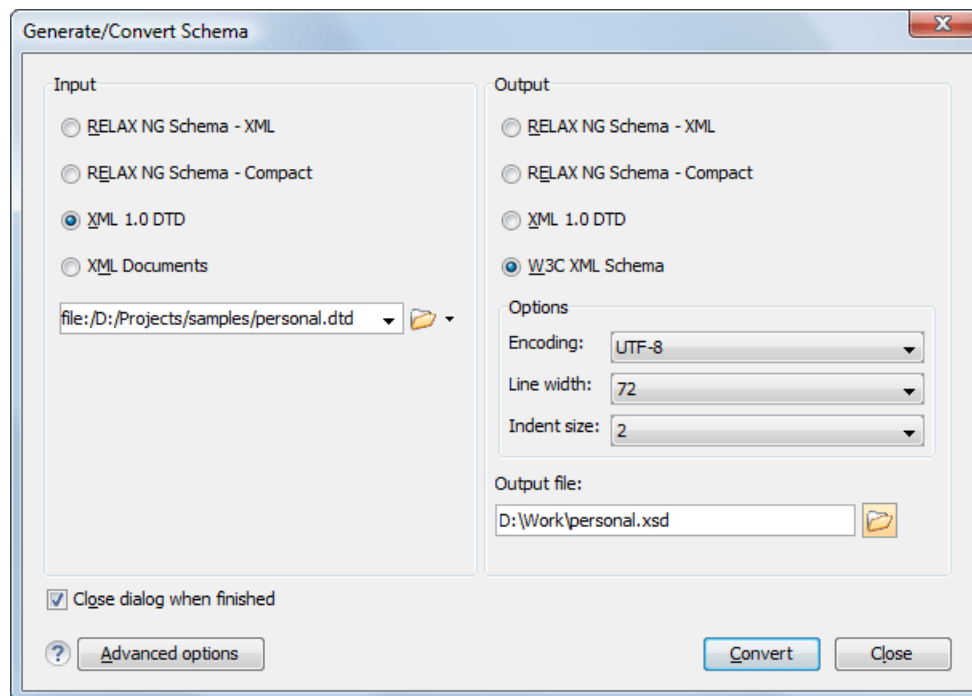


Figure 327: Generate/Convert Schema Dialog Box

The **Generate/Convert Schema** dialog box includes the following options:

Input section

Allows you to select the language of the source schema. If the conversion is based on a set of XML files, rather than just a single XML file, select the **XML Documents** option and use the file selector to add the XML files involved in the conversion.

Output section

Allows you to select the language of the target schema.

Options

You can choose the **Encoding**, the maximum **Line width**, and the **Indent size** (in number of spaces) for one level of indentation.

Output file

Specifies the path for the output file that will be generated.

Close dialog when finished

If you deselect this option, the dialog box will remain opened after the conversion so that you can easily continue to convert more files.

Advanced options

If you select **XML 1.0 DTD** for the input, you can click this button to access more advance options to further fine-tune the conversion. The following advanced options are available:

XML 1.0 DTD Input section

These options apply to the source DTD:

- **xmlns** - Specifies the default namespace, that is the namespace used for unqualified element names.
- **attlist-define** - Specifies how to construct the name of the definition representing an attribute list declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **colon-replacement** - Replaces colons in element names with the specified chars when constructing the names of definitions used to represent the element declarations and attribute list declarations in the DTD.
- **any-name** - Specifies the name of the definition generated for the content of elements declared in the DTD as having a content model of ANY.
- **element-define** - Specifies how to construct the name of the definition representing an element declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **annotation-prefix** - Default values are represented using an annotation attribute `prefix:defaultValue` where `prefix` is the specified value and is bound to `http://relaxng.org/ns/compatibility/annotations/1.0` as defined by the RELAX NG DTD Compatibility Committee Specification. By default, the conversion engine will use a `for` prefix unless that conflicts with a prefix used in the DTD.
- **inline-attlist** - Instructs the application not to generate definitions for attribute list declarations, but instead move attributes declared in attribute list declarations into the definitions generated for element declarations. This is the default behavior when the output language is XSD.
- **strict-any** - Preserves the exact semantics of ANY content models by using an explicit choice of references to all declared elements. By default, the conversion engine uses a wildcard that allows any element
- **generate-start** - Specifies whether or not the conversion engine should generate a start element. DTD's do not indicate what elements are allowed as document elements. The conversion engine assumes that all elements that are defined but never referenced are allowed as document elements.
- **xmlns mappings** table - Each row specifies the prefix used for a namespace in the input schema.

W3C XML Schema Output section

This section is available if you select **W3C XML Schema** for the output.

- **disable-abstract-elements** - Disables the use of abstract elements and substitution groups in the generated XML Schema. This can also be controlled using an annotation attribute.
- **any-process-contents** - One of the values: `strict`, `lax`, `skip`. Specifies the value for the `processContents` attribute of any elements. The default is `skip` (corresponding to RELAX NG semantics) unless the input format is DTD, in which case the default is `strict` (corresponding to DTD semantics).
- **any-attribute-process-contents** - Specifies the value for the `processContents` attribute of any `Attribute` elements. The default is `skip` (corresponding to RELAX NG semantics).

Converting Database to XML Schema

Oxygen XML Developer includes a tool that allows you to create an XML Schema from the structure of a database.

To convert a database structure to an XML Schema, use the following procedure:

1. Select the **Convert DB Structure to XML Schema** action from the **Tools** menu.

Result: The **Convert DB Structure to XML Schema** dialog box is opened and your current database connections are displayed in the **Connections** section.

2. If the database source is not listed, click the **Configure Database Sources** button to open the [Data Sources preferences page](#) where you can configure data sources and connections.

3. In the **Format for generated schema** section, select one of the following formats:

- **Flat schema** - A flat structure that resembles a tree-like view of the database without references to elements.
- **Hierarchical schema** - Display the table dependencies visually, in a type of tree view where dependent tables are shown as indented child elements in the content model. Select this option if you want to configure the database columns of the tables to be converted.

4. Click **Connect**.

Result: The database structure is listed in the **Select database tables** section according to the format you chose.

5. Select the database tables that you want to be included in the XML Schema.

6. If you selected **Hierarchical schema** for the format, you can configure the database columns.

- a. Select the database column you want to configure.
- b. In the **Criterion** section you can choose to convert the selected database column as an **Element**, **Attribute**, or to be **Skipped** in the resulting XML Schema.
- c. You can also change the name of the selected database column by changing it in the **Name** text field.

7. Click **Generate XML Schema**.

Result: The database structure is converted to an XML Schema and it is opened for viewing and editing.

Flatten an XML Schema

You can organize an XML schema linked by `xs:include` and `xs:import` statements on several levels. In some cases, working on such a schema as if it were a single file is more convenient than working on multiple files separately. The **Flatten Schema** operation allows you to flatten an entire hierarchy of XML schemas. Starting with the main XML schema, Oxygen XML Developer calculates its hierarchy by processing the `xs:include` and `xs:import` statements.

The **Flatten Schema** action is available from the **Tools** menu or the contextual menu in **Text** mode. The action opens the **Flatten Schema** dialog box that allows you to configure the operation.

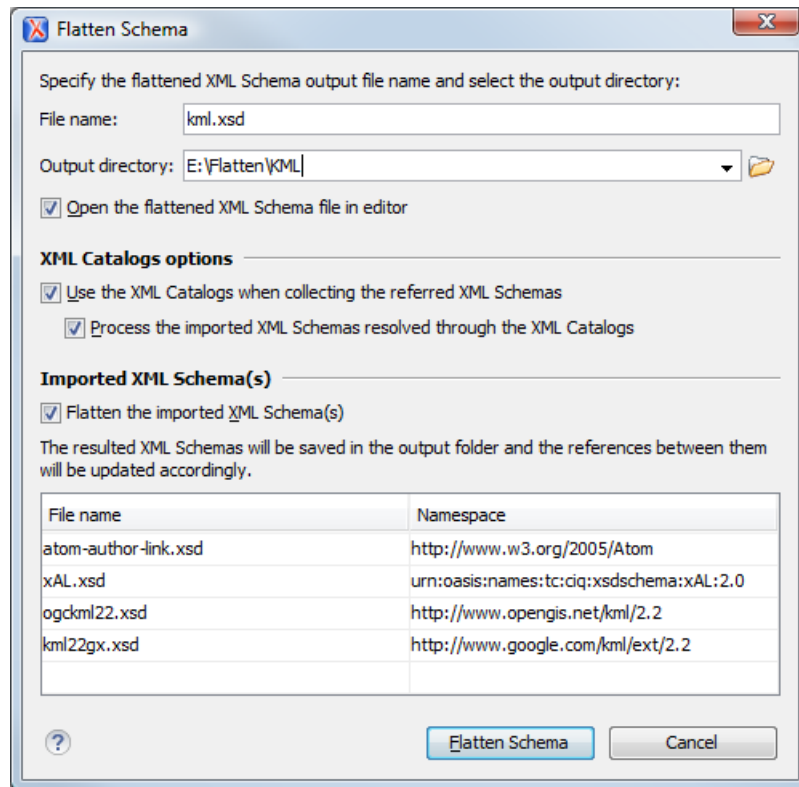


Figure 328: Flatten Schema Dialog Box

For the main schema file and for each imported schema, a new flattened schema is generated in the specified output folder. These schemas have the same name as the original ones.

Note: If necessary, the operation renames the resulted schemas to avoid duplicated file names.

A flattened XML schema is obtained by recursively adding the components of the included schemas into the main one. This means Oxygen XML Developer replaces the `xs:include`, `xs:redefine`, and `xs:override` elements with the ones coming from the included files.

Options in the Flatten Schema Dialog Box

The following options are available in the **Flatten Schema** dialog box:

File name

The name of the output file.

Output directory

The path of the output directory where the flattened schema file will be saved.

Open the flattened XML Schema file in editor

Opens the main flattened schema in the editing area after the operation completes.

Use the XML Catalogs when collecting the referenced XML Schemas

Enables the imported and included schemas to be resolved through the available [XML Catalogs](#).

Note: Changing this option triggers the recalculation of the dependencies graph for the main schema.

Process the imported XML Schemas resolved through the XML Catalogs

Specifies whether or not the imported schemas that were resolved through an [XML Catalog](#) are also processed.

Flatten the imported XML Schema(s)

Specifies whether or not the imported schemas are flattened.

Note: For the schemas skipped by the flatten operation, no files are created in the output folder and the corresponding import statements remain unchanged.

Flatten Schema from the Command Line

The **Flatten Schema** tool can be also ran from command line by using the following command:

- `flattenSchema.bat` on Windows
- `sh flattenSchema.sh` on OS X and Linux

The command line accepts the following parameters:

- `-in:inputSchemaURL` - The input schema URL.
- `-outDir:outputDirectory` - The directory where the flattened schemas should be saved.
- `-flattenImports:<boolean_value>` - Controls whether or not the imported XML Schemas should be flattened. The default value `true`.
- `-useCatalogs:<boolean_value>` - Controls if the references to other XML Schemas should be resolved through the available [XML Catalogs](#). The default value `false`.
- `-flattenCatalogResolvedImports:<boolean_value>` - Controls whether or not the imported schemas that were resolved through the [XML Catalogs](#) should be flattened. The default value is `true`.

Note: This option is used only when `-useCatalogs` is set to `true`.

- `-verbose` - Provides information about the current flatten XML Schema operation.
- `--help | -help | --h | -h` - Prints the available parameters for the operation.

Example: Command Line Example for Windows

```
flattenSchema.bat -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd  
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true  
-flattenCatalogResolvedImports:true -verbose
```

Example: Command Line Example for OS X

```
sh flattenSchema.sh -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd  
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true  
-flattenCatalogResolvedImports:true -verbose
```

Example: Command Line Example for Unix/Linux

```
sh flattenSchema.sh -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd  
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true  
-flattenCatalogResolvedImports:true -verbose
```

XML Schema Regular Expressions Builder

The XML Schema regular expressions builder allows you to test regular expressions on a fragment of text as they are applied to an XML instance document. Start the tool by selecting **XML Schema Regular Expressions Builder** from the **Tools** menu.

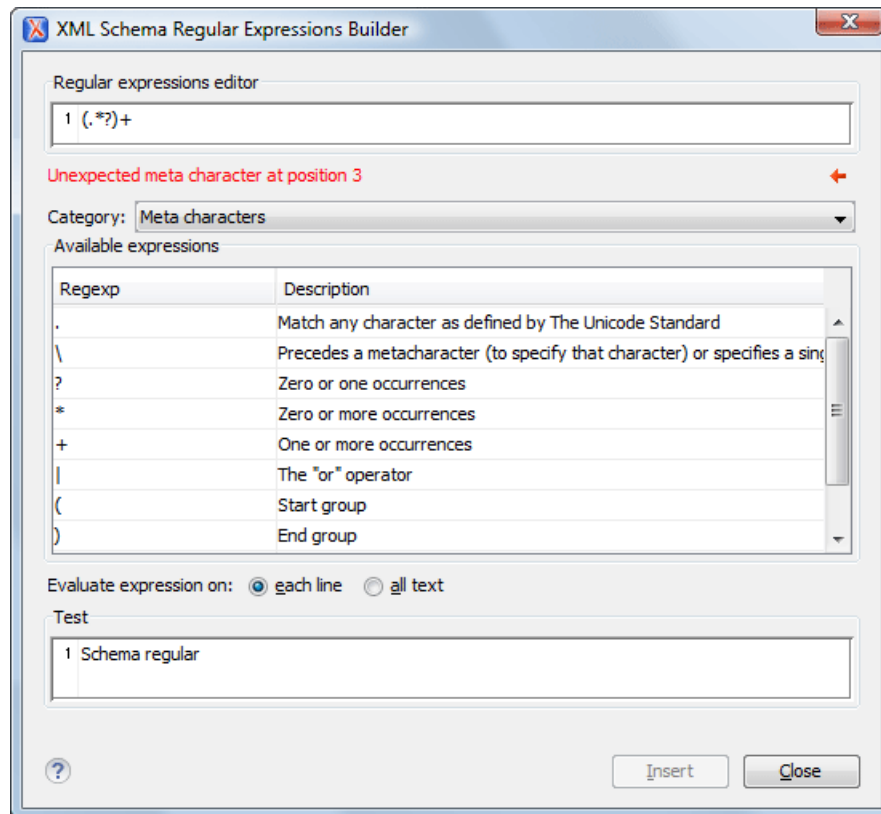


Figure 329: XML Schema Regular Expressions Builder Dialog Box

The dialog box contains the following:

Regular expressions editor

Allows you to edit the regular expression to be tested and used. Content completion is available and presents a list with all the predefined expressions. It is triggered by pressing **Ctrl + Space (Command + Space on OS X)**.

Error display area

If the edited regular expression is incorrect, an error message will be displayed here. The message contains the description and the exact location of the error. Also, clicking the quick navigation button (➔) highlights the error inside the regular expression.

Category

You can choose from several categories of predefined expressions. The selected category influences the displayed expressions in the **Available expressions** table.

Available expressions

This table includes the available regular expressions and a short description for each of them. The set of expressions depends on the category selected in the previous **Category** combo box. You can add an expression in the **Regular expressions editor** by double-clicking the expression row in the table. You will notice that in the case of **Character categories** and **Block names**, the expressions are also listed in complementary format.

Evaluate expression on

You can choose between two options:

- **Evaluate expression on each line** - The edited expression will be applied on each line in the **Test** area.
- **Evaluate expression on all text** - The edited expression will be applied on the whole text.

Test

A text editor that allows you to enter a text sample for which the regular expression will be applied. All matches of the edited regular expression will be highlighted.

After editing and testing your regular expression you can insert it in the current editor. The **Insert** button will become active when an editor is opened in the background and there is an expression in the **Regular expressions editor**.

The regular expression builder cannot be used to insert regular expressions in the **Grid mode** or **schema Design mode**. Accordingly, the **Insert** button will be not available if the current document is edited in these modes.

Note: Some regular expressions may indefinitely block the Java Regular Expressions engine. If the execution of the regular expression does not end in about five seconds, the application displays a dialog box that allows you to interrupt the operation.

XML Schema 1.1

Oxygen XML Developer offers full support for XML Schema 1.1, including:

- XML Documents **Validation** and **Content Completion** based on XML Schema 1.1.
- XML Schema 1.1 **Validation** and **Content Completion**.
- Editing XML Schema 1.1 files in the **Schema Design mode**.
- The **Flatten Schema** action.
- **Resource Hierarchy/Dependencies** and **Refactoring Actions**.
- **Master files**.
- **Generating Documentation for XML Schema 1.1**.
- Support for generating XML instances based on XML Schema.
- Support for validating XML documents with an NVDL schema that contains an XML Schema 1.1 validation step.

Note: To enable XML Schema 1.1 validation in NVDL, you need to pass the following option to the validation engine to specify the schema version: `http://www.thaiopensource.com/validate/xsd-version` (the possible values are 1.0 or 1.1).

Tip: To enable the full XPath expression in assertions and type alternatives, you need to set the `http://www.thaiopensource.com/validate/full-xpath` option.

XML Schema 1.1 is a superset of XML Schema 1.0, that offers lots of new powerful capabilities.

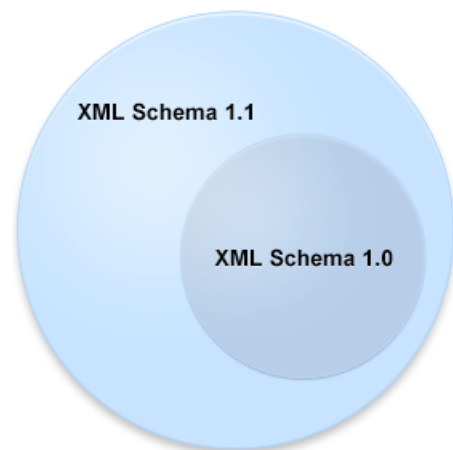


Figure 330: XML Schema 1.1

The significant new features in XSD 1.1 are:

- **Assertions** - Support to define assertions against the document content using XPath 2.0 expressions (an idea borrowed from Schematron).
- **Conditional type assignment** - The ability to select the type of schema an element is validated against, based on the values of the attribute of the element.
- **Open content** - Content models can use the `openContent` element to specify content models with *open content*. These content models allow elements not explicitly mentioned in the content model to appear in the document instance. It is as if wildcards were automatically inserted at appropriate points within the content model. A default may be set that causes all content models to be open unless specified otherwise.

To see the complete list with changes since version 1.0, go to http://www.w3.org/TR/xmlschema11-1/#ch_specs.

XML Schema 1.1 is intended to be mostly compatible with XML Schema 1.0 and to have approximately the same scope. It also addresses bug fixes and brings improvements that are consistent with the constraints on scope and compatibility.

Note: An XML document conforming to a 1.0 schema can be validated using a 1.1 validator, but an XML document conforming to a 1.1 schema may not validate using a 1.0 validator.

If you are constrained to use XML Schema 1.0 (for example, if you develop schemas for a server that uses an XML Schema 1.0 validator that cannot be updated), change the default XML Schema version to 1.0. If you keep the default XML Schema version set to 1.1, the *Content Completion Assistant* presents XML Schema 1.1 elements that you can insert accidentally in an 1.0 XML Schema. So even if you make a document invalid conforming with XML Schema 1.0, the validation process does not signal any issues.

To change the default XML Schema version, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema**.

For more information about the XML Schema 1.1 support, watch our video demonstration:

<https://www.youtube.com/embed/DAkrubQNm0w>

Related Information:

[Setting the XML Schema Version](#) on page 571

Setting the XML Schema Version

Oxygen XML Developer lets you set the version of the XML Schema you are editing either in the **XML Schema** preferences page, or through the versioning attributes. If you want to use the versioning attributes, set the *minVersion* and *maxVersion* attributes, from the <http://www.w3.org/2007/XMLSchema-versioning> namespace, on the *schema* root element.

Note: The versioning attributes take priority over the XML Schema version defined in the preferences page.

Table 61: Using the *minVersion* and *maxVersion* Attributes to Set the XML Schema Version

Versioning Attributes	XML Schema Version
minVersion = "1.0" maxVersion = "1.1"	1.0
minVersion = "1.1"	1.1
minVersion = "1.0" maxVersion = greater than "1.1"	The XML Schema version defined in the XML Schema preferences page
Not set in the XML Schema document	The XML Schema version defined in the XML Schema preferences page

To change the XML Schema version of the current document, use the **Change XML Schema version** action from the contextual menu. This is available both in the **Text** mode, and in the **Design** mode and opens the **Change XML Schema version** dialog box. The following options are available:

- **XML Schema 1.0** - Inserts the *minVersion* and *maxVersion* attributes on the *schema* element and gives them the values "1.0" and "1.1" respectively. Also, the namespace declaration (*xmlns:vc=http://www.w3.org/2007/XMLSchema-versioning*) is inserted automatically if it does not exist.
- **XML Schema 1.1** - Inserts the *minVersion* attribute on the *schema* element and gives it the value "1.1". Also, removes the *maxVersion* attribute if it exists and adds the versioning namespace (*xmlns:vc=http://www.w3.org/2007/XMLSchema-versioning*) if it is not declared.
- **Default XML Schema version** - Removes the *minVersion* and *maxVersion* attributes from the *schema* element. The default schema version, defined in the **XML Schema** preferences page, is used.

Note: The **Change XML Schema version** action is also available in the informative panel presented at the top of the edited XML Schema. If you close this panel, it will no longer appear until you restore Oxygen XML Developer to its default options.

Oxygen XML Developer automatically uses the version set through the versioning attributes, or the default version if the versioning attributes are not declared, when proposing content completion elements and validating an XML Schema. Also, the XML instance validation against an XML Schema is aware of the versioning attributes defined in the XML Schema.

When you generate sample XML files from an XML Schema, Oxygen XML Developer takes into account the *minVersion* and *maxVersion* attributes defined in the XML Schema.

Related Information:

[XML Schema 1.1](#) on page 570

Editing XQuery Documents

XQuery is the query language for XML and is officially defined by [a W3C Recommendation document](#). The many benefits of XQuery include:

- XQuery allows you to work in one common model no matter what type of data you are working with: relational, XML, or object data.
- XQuery is ideal for queries that must represent results as XML, to query XML stored inside or outside the database, and to span relational and XML sources.
- XQuery allows you to create many different types of XML representations of the same data.
- XQuery allows you to query both relational sources and XML sources, and create one XML result.

Related Information:

[XQuery and Databases](#) on page 1001

XQuery Validation

With Oxygen XML Developer, you can validate your documents before using them in your transformation scenarios. The validation uses the Saxon 9.8.0.8 PE, EE, or HE processor, or you can use some database engines (such as MarkLogic or eXist) if you installed them. Any other XQuery processor that offers an [XQJ API implementation](#) can also be used. This is in conformance with [the XQuery Working Draft](#). The processor is used in two cases: validation of the expression and execution. Although the execution implies a validation, it is faster to check the expression syntactically, without executing it. The errors that occurred in the document are presented in the messages view at the bottom of editor window, with a full description message. As with all error messages, if you click an entry, the line where the error appeared is highlighted.

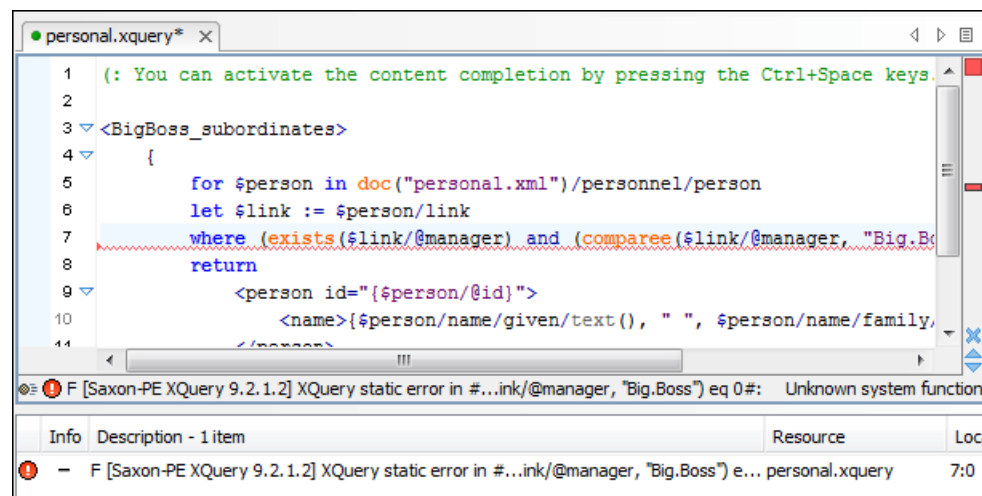


Figure 331: XQuery Validation

Note: If you choose a processor that does not support XQuery validation, Oxygen XML Developer displays a warning when trying to validate.

The  **Validation options** button, available in the **Document > Validate** menu, allows quick access to the [XQuery options](#) in the Oxygen XML Developer preferences.

When you open an XQuery document from a connection that supports validation (for example, MarkLogic, or eXist), by default Oxygen XML Developer uses this connection for validation. If you open an XQuery file using a MarkLogic connection, the validation resolves imports better.

Content Completion in XQuery

Oxygen XML Developer provides content completion for keywords and all known XQuery functions and operators. The [Content Completion Assistant](#) can be manually activated with the **(Ctrl (Meta on Mac OS)+Space)** shortcut. The functions and operators are presented together with a description of the parameters and functionality, depending on the validation or transformation engine.

For some supported database engines such as MarkLogic, eXist, and Berkeley DB, the content completion list offers the specific XQuery functions implemented by that engine. This feature is available when the XQuery file has an associated transformation scenario that uses one of these database engines or the XQuery validation engine is set to one of them via a validation scenario or in the [XQuery Preferences](#) page. For more information about the support for working with XQuery with regards to databases, see [XQuery and Databases](#) on page 1001.

The extension functions included in the Saxon engine are available on content completion if one of the following conditions are true:

- The edited file has a transformation scenario associated that uses as transformation engine Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE.
- The edited file has a validation scenario associated that use as validation engine Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE.
- The validation engine specified in [Preferences](#) is Saxon 9.8.0.8 PE or Saxon 9.8.0.8 EE.

If the Saxon namespace (<http://saxon.sf.net>) is mapped to a prefix, the functions are presented using this prefix. Otherwise, the default prefix for the Saxon namespace (saxon) is used.

If you want to use a function from a namespace mapped to a prefix, just type that prefix and the content completion displays all the XQuery functions from that namespace. When the default namespace is mapped to a prefix, the XQuery functions from this namespace offered by content completion are also prefixed. Otherwise, only the function name being used.

The content completion pop-up window presents all the variables and functions from both the edited XQuery file and its imports.

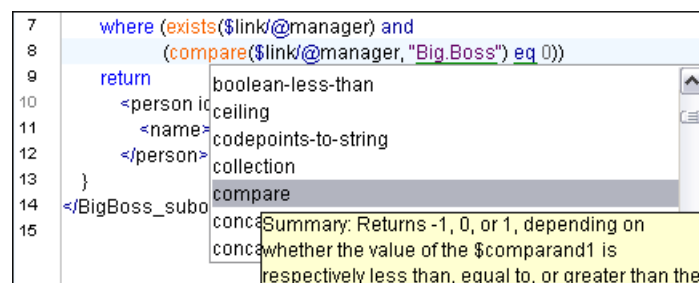


Figure 332: XQuery Content Completion

Syntax Highlighting in XQuery

Oxygen XML Developer supports syntax highlighting in XQuery documents to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for XQuery files, follow these steps:

1. Open the [Preferences](#) dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XQuery/XPath** section in the top pane.

4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

Formatting and Indenting XQuery Documents

Editing XQuery documents may lead to large chunks of content that are not easily readable by human audience. Also, each developer may have a particular way of writing XQuery code. Oxygen XML Developer assists you in maintaining a consistent code writing style with the  **Format and Indent** action that is available in the **Document** > **Source** menu and also on the toolbar..

The  **Format and Indent** action achieves this by performing the following steps:

- Manages whitespaces, by collapsing or inserting space characters where needed.
- Formats complex expressions on multiple, more readable lines by properly indenting each of them. The amount of whitespaces that form an indent unit is controlled through one of the **Indent with tabs** and **Indent size** options from the [Format Preferences](#) page.

Note: These operations can be performed only if your XQuery document conforms with W3C XQuery 1.0, XQuery Update Facility 1.0, and XQuery 3.0 specifications. If the *Format and Indent* operation fails, the document is left unaltered and an error message is presented in the [Results](#) view.

Folding in XQuery Documents

In a large XQuery document, the instructions enclosed in the '{' and '}' characters can be collapsed so that only the needed instructions remain in focus. The same [folding features available for XML documents](#) are also available in XQuery documents.

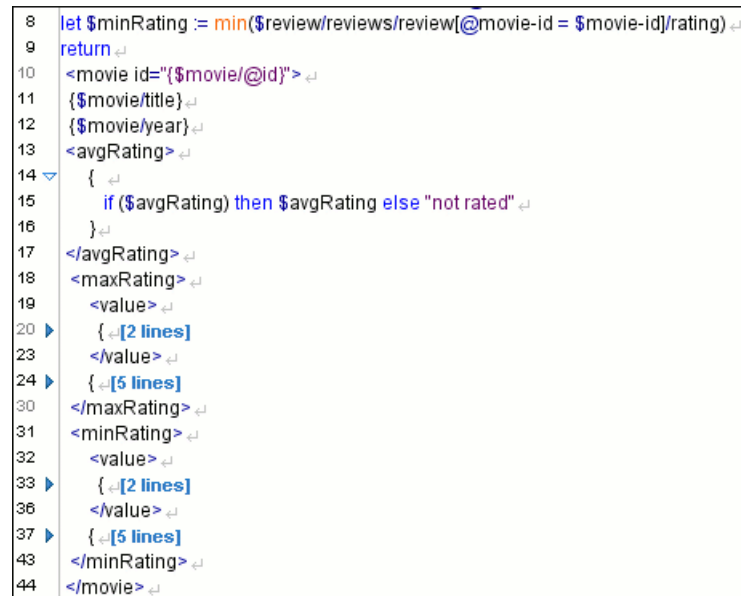


Figure 333: Folding in XQuery Documents

There is available the action **Go to Matching Bracket Ctrl + Shift + G** on contextual menu of XQuery editor for going to matching character when cursor is located at '{' character or '}' character. It helps for finding quickly matching character of current [folding element](#).

XQuery Outline View

The XQuery document structure is presented in the **Outline** view. The outline tree presents the list of all the components (namespaces, imports, variables, and functions) from both the edited XQuery file and its imports

and it allows quick access to components. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

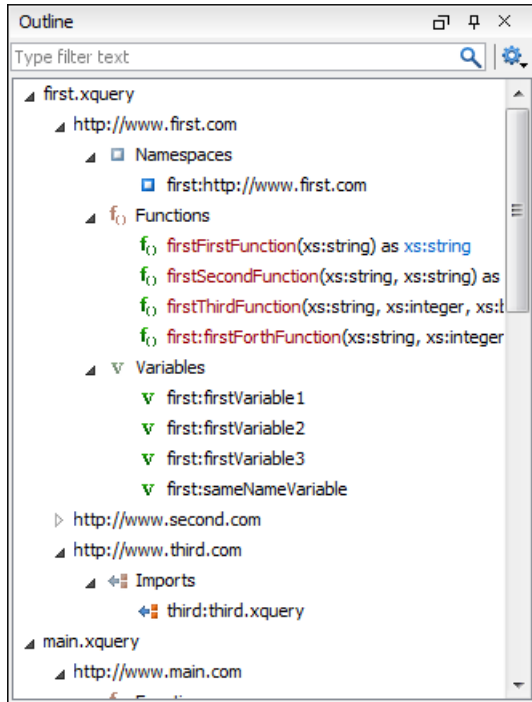


Figure 334: XQuery Outline View

The following actions are available in the  **Settings** menu on the **Outline** view toolbar:

 Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes performed in the XQuery editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

 Sort

Allows you to alphabetically sort the XQuery components.

Show all components

Displays all collected components starting from the current file. This option is set by default.

Show only local components

Displays the components defined in the current file only.

Group by location/namespace/type

Allows you to group the components by location, namespace, and type. When grouping by namespace, the main XQuery module namespace is presented first in the **Outline** view.

If you know the component name, you can search it in the **Outline** view by typing its name in the filter text field from the top of the view or directly on the tree structure. When you type the component name in the filter text field you can switch to the tree structure using the arrow keys of the keyboard, (**Enter**), (**Tab**), (**Shift-Tab**). To switch from tree structure to the filter text field, you can use (**Tab**), (**Shift-Tab**).

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

XQuery Builder View

The **XPath/XQuery Builder** view allows you to compose complex XQuery expressions and execute them over the currently edited XML document. You can use the `doc()` function to specify the source file for which the expressions are executed. When you connect to a database, the expressions are executed over that database. If you are using the **XPath/XQuery Builder** view and the current file is an XSLT document, Oxygen XML Developer executes the expressions over the XML document in the associated scenario.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The upper part of the view contains the following actions:

XPath version chooser drop-down menu

A drop-down menu that allows you to select the type of the expression you want to execute. You can choose between:

- XPath 1.0 (Xerces-driven)
- XPath 2.0, XPath 2.0SA, XPath 3.0, XPath 3.0SA, Saxon-HE XQuery, Saxon-PE XQuery, or Saxon-EE XQuery (all of them are Saxon-driven)
- Custom connection to XML databases that can execute XQuery expressions

Note: The results returned by XPath 2.0 SA and XPath 3.0 SA have a location limited to the line number of the start element (there are no column information and no end specified).

Note: Oxygen XML Developer uses Saxon to execute XPath 3.0 expressions. Since Saxon implements a part of the 3.0 functions, when using a function that is not implemented, Oxygen XML Developer returns a compilation error.

Execute XPath button

Use this button to start the execution of the XPath or XQuery expression you are editing. The result of the execution is displayed in the [Results view](#).

Favorites button

Allows you to save certain expressions that you can later reuse. To add an expression as a favorite, press the star button and enter a name for it. The star turns yellow to confirm that the expression was saved. Expand the drop-down menu next to the star button to see all your favorites. Oxygen XML Developer automatically groups favorites in folders named after the method of execution.

History drop-down menu

Keeps a list of the last 15 executed XPath or XQuery expressions. Use the  **Clear history** action from the bottom of the list to remove them.

Settings drop-down menu

Contains the following three options:

-  **Update on cursor move** - When selected and you navigate through a document, the XPath expression corresponding to the XML node at the current cursor position is displayed.
-  **Evaluate as you type** - When you select this option, the XPath expression you are composing is evaluated in real time.

Note: This option and the automatic validation are disabled when you edit [huge documents](#) or when the scope is other than **Current file**.

-  **Options** - Opens the Preferences page of the currently selected processing engine.

XPath scope menu

Oxygen XML Developer allows you to define a scope for which the XPath operation will be executed. You can choose where the XPath expression will be executed:

-  **Current file** - Current selected file only.
-  **Project** - All the files in the project.
-  **Selected project resources** - The files selected in the project.
-  **All opened files** - All files opened in the application.
-  **Opened archive** - Files open in the [Archive Browser view](#).
-  **Working sets** - The selected [working sets](#).

At the bottom of the scope menu the following scope configuration actions are available:

-  **Configure XPath working sets** - Allows you to configure and manage collections of files and folders, encapsulated in logical containers called [working sets](#).
-  **XPath file filter** - You can filter the files from the selected scope for which the XPath expression will be executed. By default, the XPath expression will be executed only on XML files, but you can also define a set of patterns that will filter out files from the current scope. If you select the **Include archive** option, the XPath expression will be also executed on the files in any archive (including EPUB and DocX) found at the current scope.

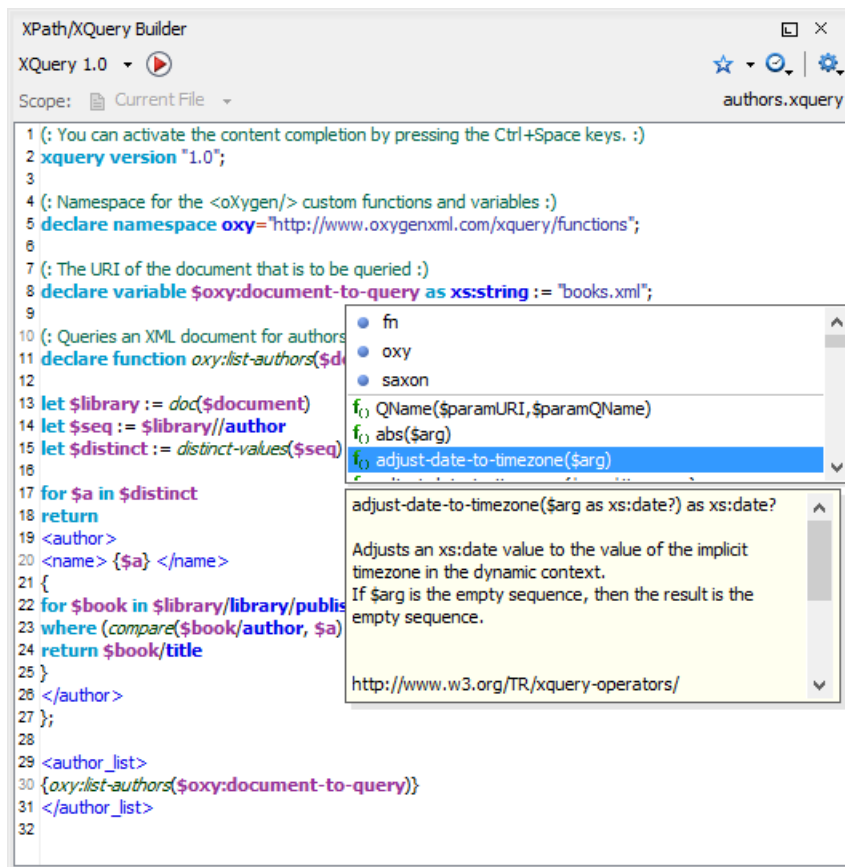


Figure 335: XPath/XQuery Builder View

While you edit an XPath or XQuery expression, Oxygen XML Developer assists you with the following features:

- [Content Completion Assistant](#) - It offers context-dependent proposals and takes into account the cursor position in the document you are editing. The set of functions proposed by the *Content Completion Assistant* also depends on the engine version. Select the engine version from the drop-down menu available in the toolbar.
- **Syntax Highlighting** - Allows you to identify the components of an expression. To customize the colors of the components of the expression, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight**.

- Automatic validation of the expression as you type.
- **Note:** When you type invalid syntax a red serrated line underlines the invalid fragments.
- Function signature and documentation balloon, when the cursor is located inside a function.

The usual edit actions (**Cut**, **Copy**, **Paste**, **Select All**, **Undo**, **Redo**) are available in the contextual menu of the top editable part of the view.

XSLT/XQuery Input View

The structure of the XML document associated to the edited XSLT stylesheet, or the structure of the source documents of the edited XQuery is displayed in a tree form in a view called the **XSLT/XQuery Input** view. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu. The tree nodes represent the elements of the documents.

XSLT

If you click a node in the **XSLT/XQuery Input** view, the corresponding template from the stylesheet is highlighted. A node can be dragged from this view and dropped in the editor area for quickly inserting `xsl:template`, `xsl:for-each`, or other XSLT elements that have the `match/select/test` attribute already completed. The value of the attribute is the correct XPath expression that refers to the dragged tree node. This value is based on the current editing context of the drop spot.

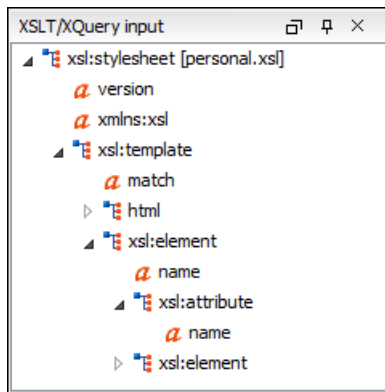


Figure 336: XSLT Input View

XSLT Example:

For the following XML document:

```
<personnel>
  <person id="Big.Boss">
    <name>
      <family>Boss</family>
      <given>Big</given>
    </name>
    <email>chief@oxygenxml.com</email>
    <link subordinates="one.worker"/>
  </person>
  <person id="one.worker">
    <name>
      <family>Worker</family>
      <given>One</given>
    </name>
    <email>one@oxygenxml.com</email>
    <link manager="Big.Boss"/>
  </person>
</personnel>
```

and the following XSLT stylesheet:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
  version="2.0">
  <xsl:template match="personnel">
    <xsl:for-each select="*">
      </xsl:for-each>
    </xsl:template>
  </xsl:stylesheet>
```



```

</xsl:template>
</xsl:stylesheet>

```

if you drag the given element and drop it inside the `xsl:for-each` element, the following pop-up menu is displayed:

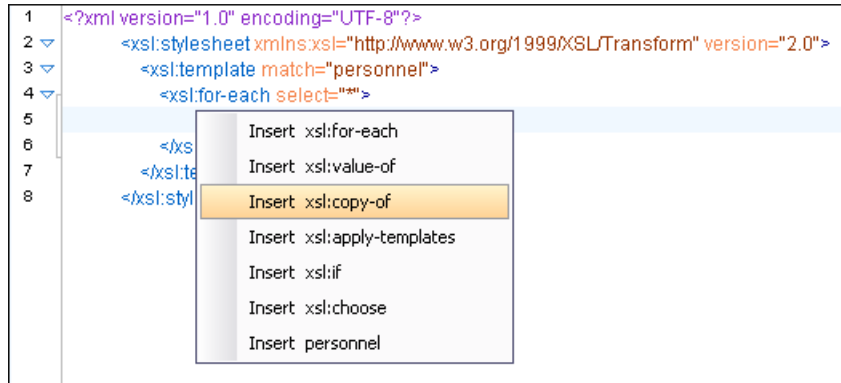


Figure 337: XSLT Input Drag and Drop Pop-up Menu

If you select **Insert xsl:copy-of** (for example), the resulting document will look like this:

```

<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform" version="2.0">
  <xsl:template match="personnel">
    <xsl:for-each select="*">
      <xsl:copy-of select="name/given"/>
    </xsl:for-each>
  </xsl:template>
</xsl:stylesheet>

```

Figure 338: XSLT Input Drag and Drop Result

XQuery

You can also use the **XSLT/XQuery Input** view to drag and drop a node into the editing area to quickly insert XQuery expressions.

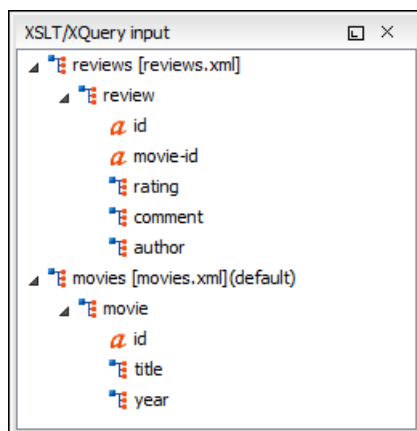


Figure 339: XQuery Input View

XQuery Example:

For the following XML documents:

```

<movies>
  <movie id="1">
    <title>The Green Mile</title>
    <year>1999</year>
  </movie>
  <movie id="2">

```

```

<title>Taxi Driver</title>
<year>1976</year>
</movie>
</movies>

```

```

<reviews>
<review id="100" movie-id="1">
<rating>5</rating>
<comment>It is made after a great Stephen King book.
</comment>
<author>Paul</author>
</review>
<review id="101" movie-id="1">
<rating>3</rating>
<comment>Tom Hanks does a really nice acting.</comment>
<author>Beatrice</author>
</review>
<review id="104" movie-id="2">
<rating>4</rating>
<comment>Robert De Niro is my favorite actor.</comment>
<author>Maria</author>
</review>
</reviews>

```

and the following XQuery:

```

let $review := doc("reviews.xml")
for $movie in doc("movies.xml")/movies/movie
let $movie-id := $movie/@id
return
<movie id="{ $movie/@id }">
{ $movie/title }
{ $movie/year }
<maxRating>
{
}
</maxRating>
</movie>

```

If you drag the **review** element and drop it between the braces, the following pop-up menu is displayed:

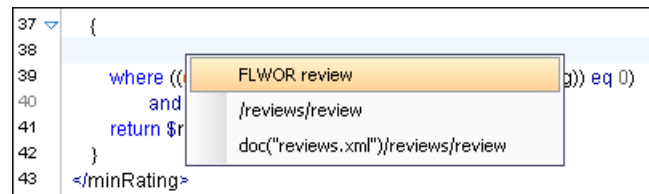


Figure 340: XQuery Input Drag and Drop Pop-up Menu

Select **FLWOR review**, the resulting document will look like this:

```

37 {
38   for $review in doc("reviews.xml")/reviews/review
39   return
40   where ((compare($rev/rating/text(), string($minRating)) eq 0)
41         and ($rev/@movie-id = $movie/@id))
42   return $rev/author
43 }

```

Figure 341: XQuery Input Drag and Drop Result

Generating HTML Documentation for an XQuery Document

To generate HTML documentation for an XQuery document, use the **XQuery Documentation** dialog box. It is opened with the **XQuery Documentation** action that is available from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the **Project view**.

The dialog box allows you to configure a set of parameters for the process of generating the HTML documentation.

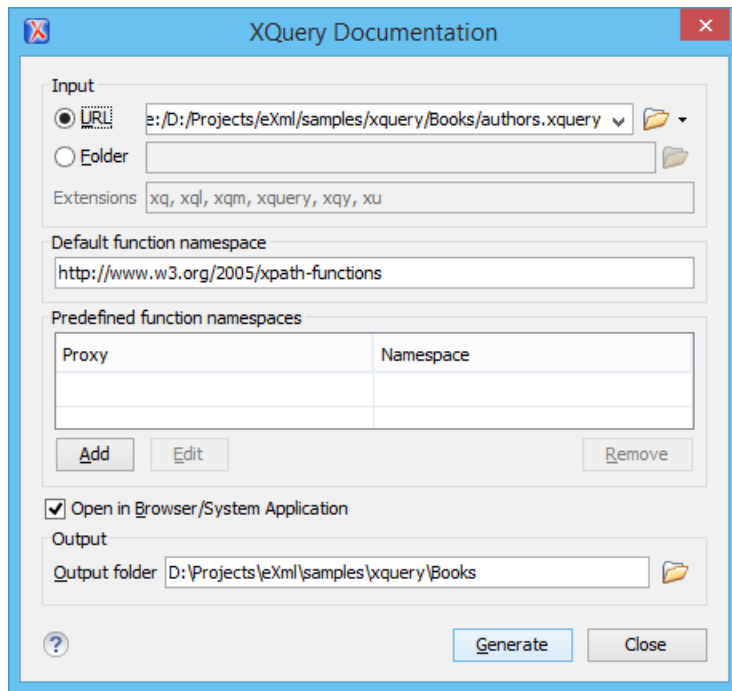


Figure 342: XQuery Documentation Dialog Box

The following options are available:

- **Input** - The full path to the XQuery file must be specified in one of the two fields in this section:
 - **URLFile** - The URL of the file in which you want to generate the documentation.
 - **Folder** - The directory that contains the files for which you want to generate the documentation. You can also specify the XQuery file extensions to be searched for in the specified directory.
 - **Default function namespace** - Optional URI for the default namespace for the submitted XQuery.
 - **Predefined function namespaces** - Optional, engine-dependent, predefined namespaces that the submitted XQuery refers to. They allow the conversion to generate annotation information to support the presentation component hypertext linking (only if the predefined modules have been loaded into the local xqDoc XML repository).
 - **Open in Browser/System Application** - Select this option if you want the result to be opened in the system application associated with that file type.
- Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.
- **Output** - Allows you to specify where the generated documentation is saved on disk.

Transforming XML Documents Using XQuery

XQuery is similar to XSL stylesheets, both being capable of transforming an XML input into another format. You specify the input URL when you [define the transformation scenario](#). The result can be saved and opened in the associated application. You can even run a [FO processor](#) on the output of an XQuery. The transformation scenarios may be shared between many XQuery files, are [exported](#) together with the XSLT scenarios and can be managed in [the Configure Transformation Scenario dialog box](#), or in [the Scenarios view](#). The transformation can be performed on the XML document specified in the **XML URL** field, or, if this field is empty, the documents referenced from the query expression. The parameters of XQuery transforms must be set in [the Parameters dialog box](#). Parameters that are in a namespace must be specified using the qualified name (for example, a param parameter in the `http://www.oxygenxml.com/ns` namespace must be set with the name `{http://www.oxygenxml.com/ns}param`).

The transformation uses one of the Saxon 9.8.0.8 HE, Saxon 9.8.0.8 PE, Saxon 9.8.0.8 EE processors, a database connection (details can be found in the [Working with Databases](#) chapter - in the [XQuery transformation](#) section) or any XQuery processor that provides an XQJ API implementation.

The Saxon 9.8.0.8 EE processor also supports XQuery 3.0 transformations.

Related Information:

[XQuery and Databases](#) on page 1001

Display XQuery Result in Sequence View

The result of an XQuery executed on a database can be very large and sometimes only a part of the full result is needed. To avoid the long time necessary for fetching the full result, select the [Present as a sequence option](#) in the **Output** tab of the **Edit scenario** dialog box. This option fetches only the first chunk of the result. Clicking the **More results available** label that is displayed at the bottom of the **Sequence** view fetches the next chunk of results.

The size of a chunk can be set with the [Size limit of Sequence view option](#). The  **XQuery options** button from the **More results available** label provides a quick access to this option by opening the [XQuery preferences page](#) where the option can be modified.

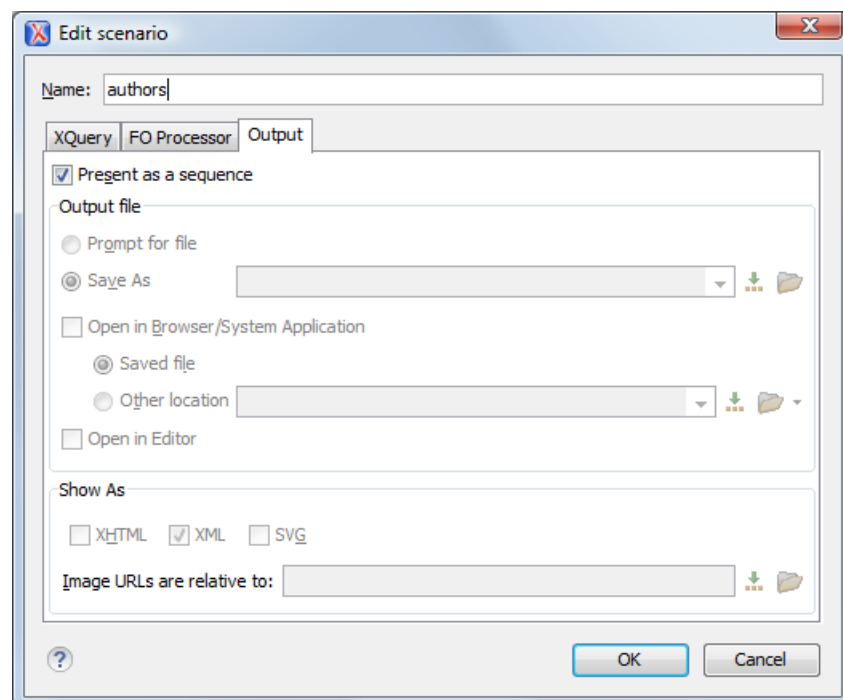


Figure 343: XQuery transformation result displayed in Sequence view

A chunk of the XQuery transformation result is displayed in the **Sequence** view.

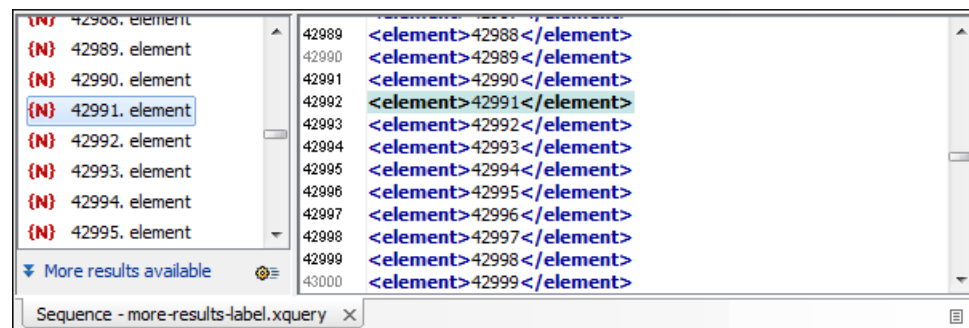


Figure 344: XQuery transformation result displayed in Sequence view

Advanced Saxon HE/PE/EE XQuery Transformation Options

The XQuery transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options

as [those in the Saxon HE/PE/EE preferences page](#) but they are configured as a specific set of transformation options for each transformation scenario, while the values set in the preferences page apply as global options. The advanced options configured in a transformation scenario override the [global options](#) defined in the preferences page.

Saxon-HE/PE/EE Options

The advanced options for Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is used for XQuery transformation and validation scenarios.

Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

Use linked tree model ("-tree:linked")

This option activates the linked tree model.

Recoverable errors ("-warnings")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.

Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

Saxon-PE/EE Options

The following advanced options are specific for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

Allow calls on extension functions ("-ext")

If selected, calls on external functions are allowed. Selecting this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

Saxon-EE Options

The advanced options that are specific for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.

- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

Enable XQuery update ("-update:(on|off)")

This option controls whether or not XQuery update syntax is accepted. The default value is off.

Backup files updated by XQuery ("-backup:(on|off)")

If selected, backup versions for any XML files updated with an XQuery Update are generated. This option is available when the **Enable XQuery update** option is selected.

Other Options

Initializer class

Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the *net.sf.saxon.lib.Initializer* interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from the command line, but the same code may be invoked to perform initialization when running user application code.

Updating XML Documents using XQuery

Using the bundled Saxon 9.8.0.8 EE XQuery processor Oxygen XML Developer offers support for XQuery Update 1.0. The XQuery Update Facility provides expressions that can be used to make persistent changes to instances of the XQuery 1.0 and XPath 2.0 Data Model. Thus, besides querying XML documents, you can modify them using the various insert/delete/modify/create methods available in the [XQuery Update 1.0](#) standard.

Choose Saxon 9.8.0.8 EE as a transformer in the scenario associated with the XQuery files containing update statements and Oxygen XML Developer will notify you if the update was successful.

Example: Using XQuery Update to modify a tag name in an XML file

```
rename node doc("books.xml")//publisher[1]//book[1] as "firstBook"
```

Editing WSDL Documents

WSDL is an XML format for describing network services as a set of endpoints operating on messages containing either document-oriented or procedure-oriented information. The operations and messages are described abstractly, and then bound to a concrete network protocol and message format to define an endpoint. Related concrete endpoints are combined into abstract endpoints (services).

Oxygen XML Developer provides a special type of editor dedicated to WSDL documents. The WSDL editor offers support for validation, a specialized [Content Completion Assistant](#), a component oriented [Outline view](#), searching and refactoring operations, and support to generate documentation.

Both WSDL version 1.1 and 2.0 are supported and SOAP versions 1.1 and 1.2. That means that in the location where a SOAP extension can be inserted the *Content Completion Assistant* offers elements from both SOAP 1.1 and SOAP 1.2. Validation of SOAP requests is executed first against a SOAP 1.1 schema and then against a SOAP 1.2 schema. In addition to validation against the XSD schemas, Oxygen XML Developer also checks if the WSDL file conforms with the WSDL specification (available only for WSDL 1.1 and SOAP 1.1).

In the following example you can see how the errors are reported.

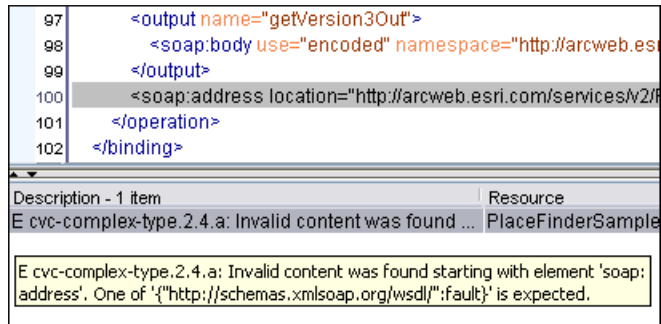


Figure 345: Validating a WSDL file

For more information about the WSDL editing support in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/OS5Ucm9b8sY>

Related Information:

[Editing XML Documents in Text Mode](#) on page 359

Editing WSDL Documents in the Master Files Context

Smaller interrelated modules that define a complex WSDL structure cannot be correctly edited or validated individually, due to their interdependency with other modules. Oxygen XML Developer provides the support for defining the main module (or modules), allowing you to edit any of the imported/included files in the context of the larger WSDL structure.

You can set a main WSDL document either using the [master files support from the Project view](#), or using a validation scenario.

To set a *master file* using a validation scenario, add validation units that point to the main modules. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main WSDL document. In this case, it considers the current module as the main WSDL document.

The advantages of editing in the context of a *master file* include:

- Correct validation of a module in the context of a larger WSDL structure.
- [Content Completion Assistant](#) displays all components valid in the current context.
- The [Outline view](#) displays the components collected from the entire WSDL structure.

Note: When you edit an XML schema document that has a WSDL document set as master, the validation operation is performed over the master WSDL document.

For more information about editing WSDL documents in the *master files* context, watch our video demonstration:

https://www.youtube.com/embed/gn_YPD5xDCo

Validating WSDL Documents

By default, WSDL files are validated as you type. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the [Enable automatic validation](#) option.

To validate a WSDL document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Content Completion Assistance in WSDL Documents

The [Content Completion Assistant](#) is a powerful feature that enhances the editing of WSDL documents. It helps you define WSDL components by proposing context-sensitive element names. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

Another important capability of the *Content Completion Assistant* is to propose references to the defined components when you edit attribute values. For example, when you edit the type attribute of a binding

element, the *Content Completion Assistant* proposes all the defined port types. Each proposal that the *Content Completion Assistant* offers is accompanied by a documentation hint.

Note: XML schema specific elements and attributes are offered when the current editing context is the internal XML schema of a WSDL document.

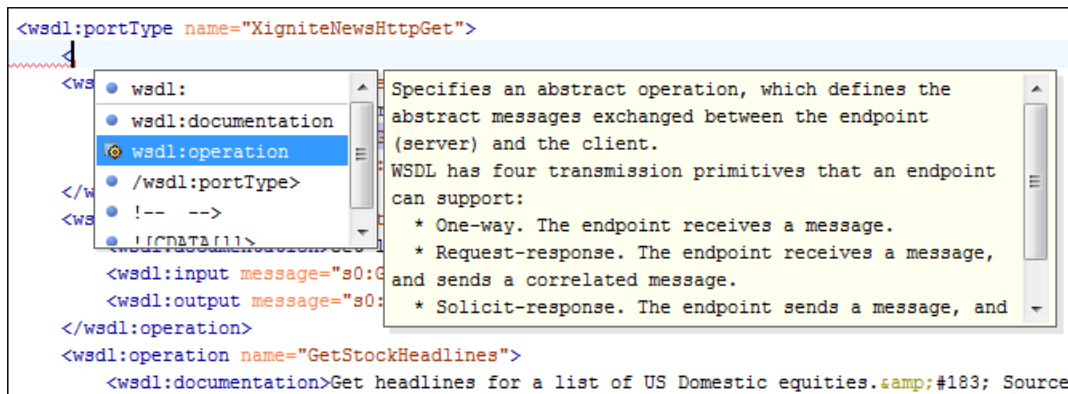


Figure 346: WSDL Content Completion Assistant

Note: If you are using the concept of *master files* to import/include modules, the *Content Completion Assistant* collects its components starting from the *master files*. The *master files* can be defined in the project or in the associated validation scenario. For more information about the *Master Files* support in Oxygen XML Developer, see [Defining Master Files at Project Level](#).

Namespace prefixes in the scope of the current context are presented at the top of the content completion assistance window to speed up the insertion into the document of prefixed elements.

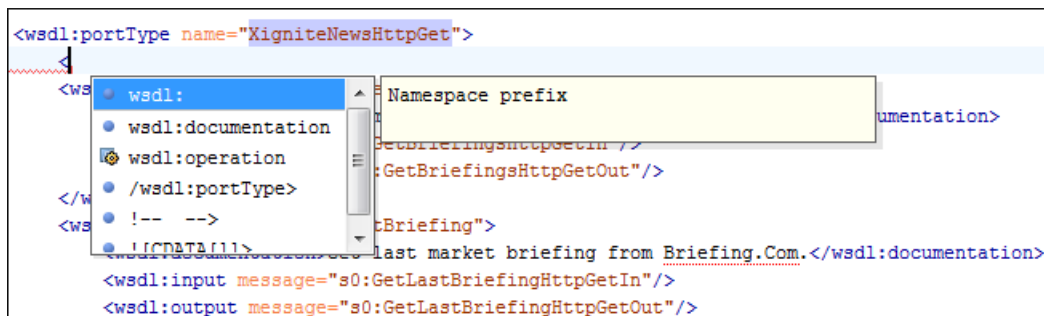


Figure 347: Namespace Prefixes in the Content Completion Assistant

For the common namespaces, such as XML Schema namespace (<http://www.w3.org/2001/XMLSchema>) or SOAP namespace (<http://schemas.xmlsoap.org/wsdl/soap/>), Oxygen XML Developer provides an easy mode to declare them by proposing a prefix for these namespaces.

WSDL Syntax Highlighting

Oxygen XML Developer supports syntax highlighting in WSDL documents to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for WSDL files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the [Editor > Syntax Highlight > Elements/Attributes by Prefix](#) preferences page.

Related Information:

[Customize Syntax Highlight colors](#) on page 86

WSDL Outline View

The **Outline** view for WSDL documents displays the list of all the components (services, bindings, port types and so on) of the currently open WSDL document along with the components of its imports.

If you use the [Master Files support](#), the **Outline** view collects the components of a WSDL document starting from the *master files* of the current document.

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

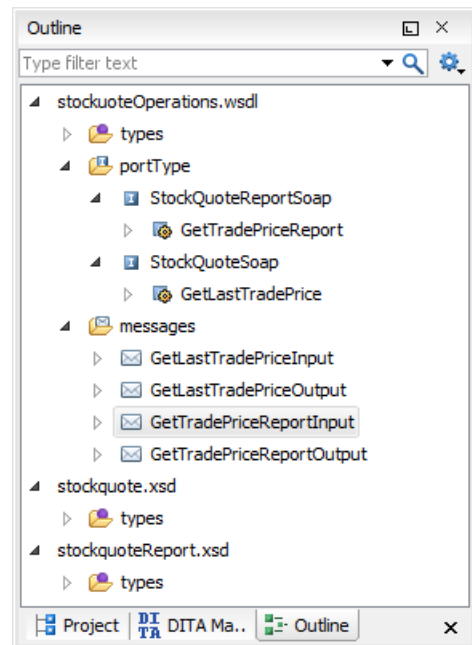


Figure 348: WSDL Outline View

The **Outline** view can display both the components of the current document and its XML structure, organized in a tree-like fashion. You can switch between the display modes by using the **Show XML structure** and **Show components** actions in the **Settings** menu on the **Outline** view toolbar. The following actions are available:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.

Selection update on cursor move

Controls the synchronization between the **Outline** view and the current document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the WSDL editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the current document.

When the **Show components** option is selected, the following actions are available:

Show XML structure

Displays the XML structure of the current document in a tree-like manner.

Sort

Sorts the components in the **Outline** view alphabetically.

Show all components

Displays all the components that were collected starting from current document or from the main document, if it is defined.

Show referable components

Displays all the components that you can reference from the current document.

Show only local components

Displays the components defined in the current file only.

Group by location

Groups the WSDL components by their location.

Group by type

Groups the WSDL components by their type.

Group by namespace

Groups the WSDL components by their namespace.

Note: By default, all the three grouping criteria are active.

When the  **Show XML structure** option is selected, the following actions are available:

Show components

Switches the **Outline** view to the components display mode.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are available in the **Outline** view when the  **Show components** option is selected in the  **Settings** menu:

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Search references

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

Component dependencies

Opens the [Component Dependencies view](#) that displays the dependencies of the currently selected component.

Resource Hierarchy

Opens the [Resource Hierarchy/Dependencies view](#) that displays the hierarchy for the currently selected resource.

Resource Dependencies

Opens the [Resource Hierarchy/Dependencies view](#) that displays the dependencies of the currently selected resource.

Rename Component in

Renames the currently selected component in the context of a scope that you define.

The following contextual menu actions are available in the **Outline** view when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Comments/uncomments the currently selected element.

Search references

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

Component dependencies

Opens the [Component Dependencies view](#) that displays the dependencies of the currently selected component.

Rename Component in

Renames the currently selected component in the context of a scope that you define.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

To switch from the tree structure to the text filter, use **Tab** and **Shift-Tab**.

Tip: The search filter is case insensitive. The following wildcards are accepted:

- * - any string
- ? - any character
- , - patterns separator

If no wildcards are specified, the string to search is used as a partial match.

The content of the **Outline** view and the editing area are synchronized. When you select a component in the **Outline** view, its definition is highlighted in the editing area.

WSDL Resource Hierarchy/Dependencies View in WSDL Documents

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a WSDL resource. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Note: The hierarchy of a WSDL resource includes the hierarchy of imported XML Schema resources. The dependencies of an XML Schema resource present the WSDL documents that import the schema.

To view the hierarchy of a WSDL document, select the document in the **Project view** and choose **Resource Hierarchy** from the contextual menu.

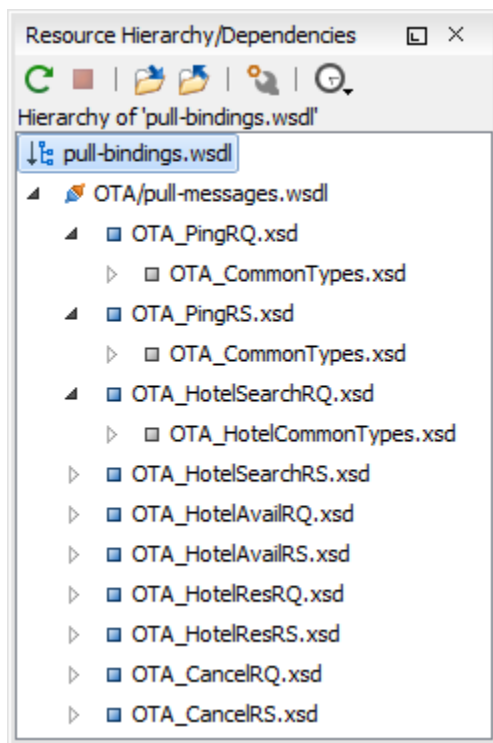


Figure 349: Resource Hierarchy/Dependencies View

If you want to see the dependencies of a WSDL document, select the document in the **Project view** and choose **Resource Dependencies** from the contextual menu.

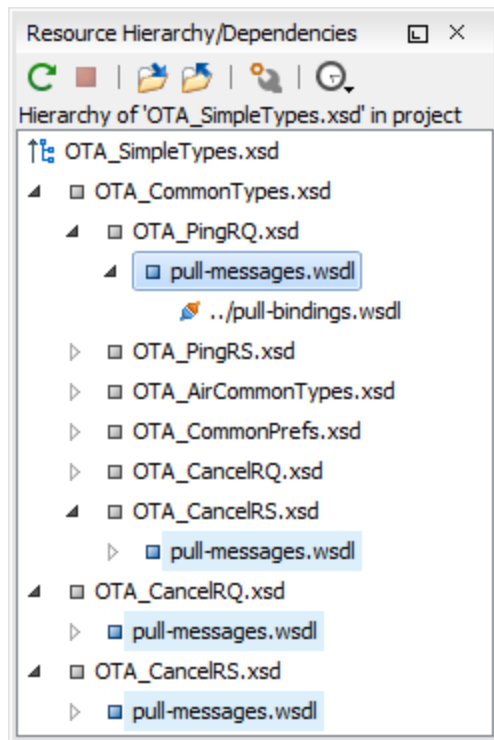


Figure 350: Resource Hierarchy/Dependencies View

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon

Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

[Search and Refactor Operations Scope](#) on page 429

Moving/Renaming WSDL Resources

You can move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

WSDL Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of a WSDL component:

1. Right-click the desired component in the editor or **Outline** view.
2. Select the **Component Dependencies** action from the contextual menu.

This action is available for all WSDL components (messages, port types, operations, bindings, and so on).

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon .

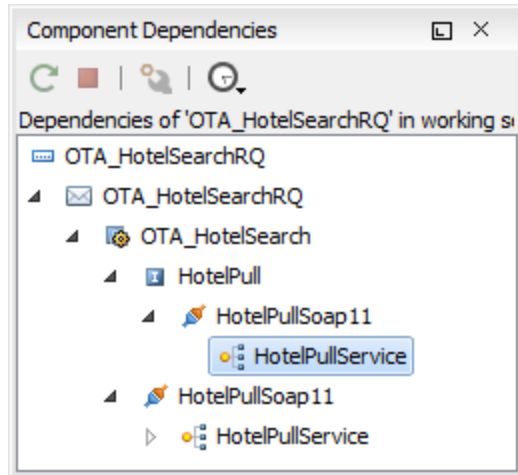


Figure 351: Component Dependencies View

The **Component Dependencies** view includes the following toolbar actions:



Refresh

Refreshes the dependencies structure.



Stop

Stops the dependency computation.



Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.



History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

Related Information:

[Searching and Refactoring Operations Scope in WSDL Documents](#) on page 595

Highlight Component Occurrences in WSDL Documents

When you position your mouse cursor over a component in a WSDL document, Oxygen XML Developer searches for the component declaration and all its references and highlights them automatically.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected.

To change the default behavior of **Highlight Component Occurrences**, open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File ()** action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Searching and Refactoring Operations in WSDL Documents

Search Actions

The following search actions are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the **Document > Schema** menu:

-  **Go to Definition** - Takes you to the location of the definition of the current item.

Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions are available from the **Refactoring** submenu from the **Document > Refactoring** menu or in the contextual menu of the current editor:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

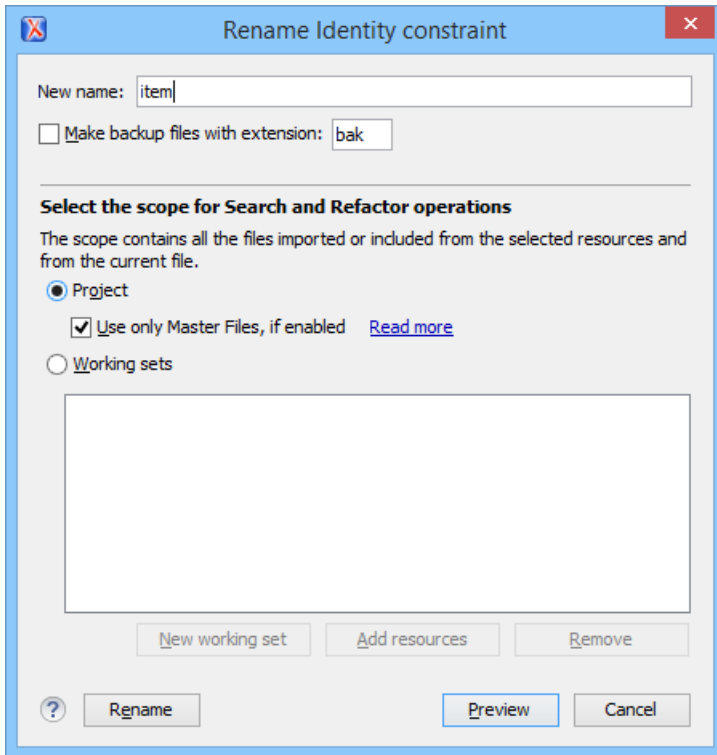


Figure 352: Rename Identity Constraint Dialog Box

Searching and Refactoring Operations Scope in WSDL Documents

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the *Quick Assist* action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple *working sets*. The **Use only Master Files, if enabled** checkbox allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the *Master Files support*.

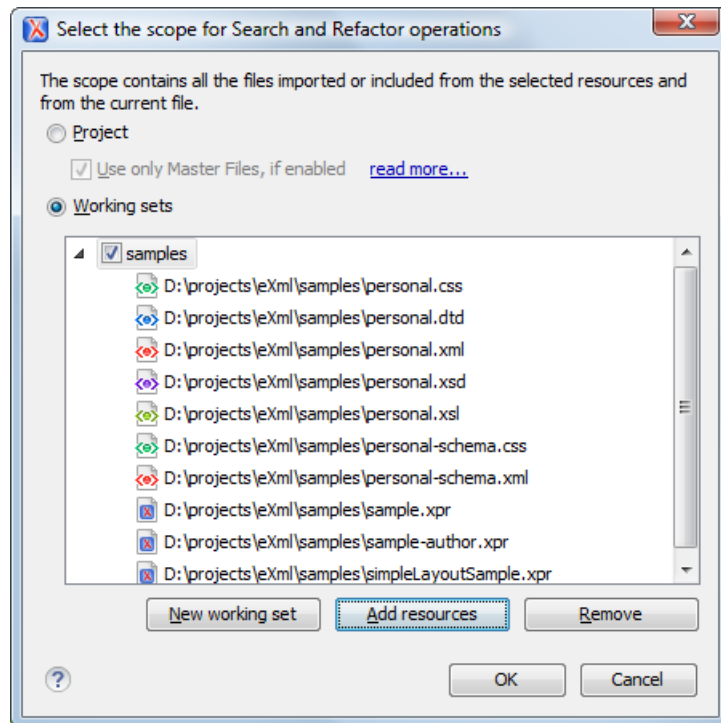


Figure 353: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the *working set* structure.

Quick Assist Support in WSDL Documents

The *Quick Assist* feature is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb icon (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *quick assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

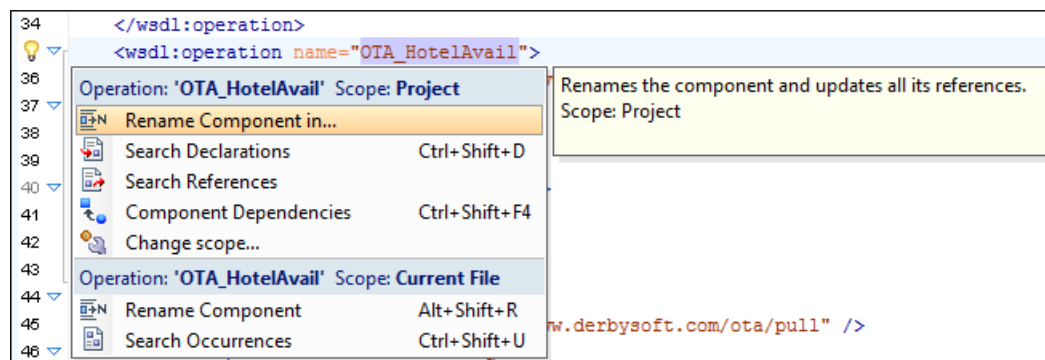


Figure 354: WSDL Quick Assist Support

The *Quick Assist* support offers direct access to the following actions:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

Generating Documentation for WSDL Documents

You can use Oxygen XML Developer to generate detailed documentation for the components of a WSDL document in HTML format. You can select the WSDL components to include in your output and the level of details to present for each of them. Also, the components are hyperlinked. You can also generate the documentation in a [custom output format](#) by using a custom stylesheet.

Note: The WSDL documentation includes the XML Schema components that belong to the internal or imported XML schemas.

To generate documentation for a WSDL document, select **WSDL Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

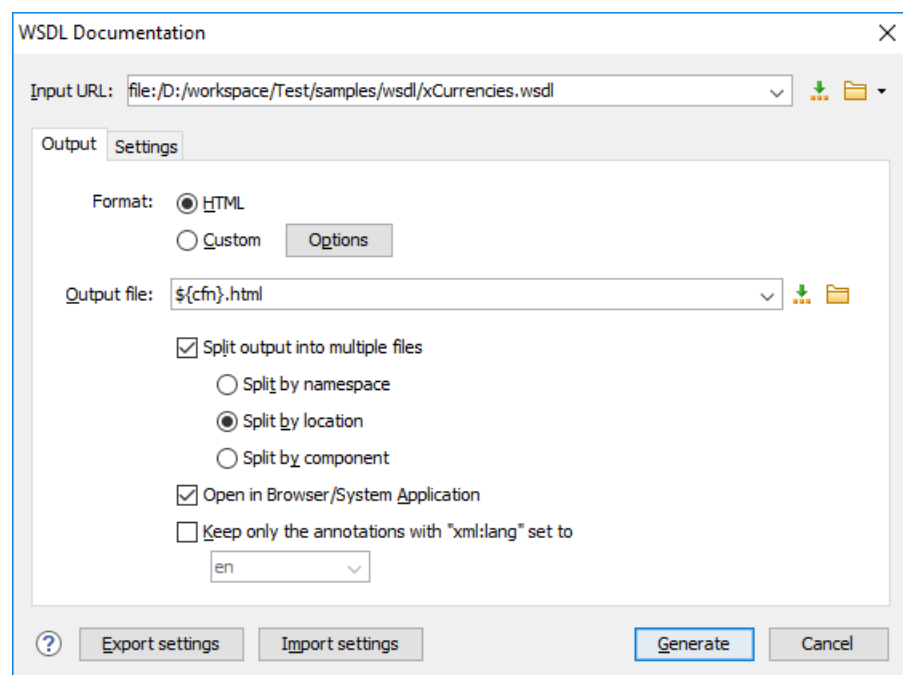


Figure 355: WSDL Documentation Dialog Box

The **Input URL** field of the dialog box must contain the full path to the WSDL document that you want to generate documentation for. The WSDL document may be a local or a remote file. You can specify the path to the WSDL file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.

Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
 - **HTML** - The documentation is generated in [HTML output format](#).

- **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
 - **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
 - **Split output into multiple files** - Instructs the application to split the output into multiple files. For large WSDL documents, choosing a different split criterion may generate smaller output files providing a faster documentation browsing. You can choose to split them by namespace, location, or component name.
 - **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.
- Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.
- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

Setting Tab

When you generate documentation for a WSDL document, you can choose what components to include in the output and the details to be included in the documentation.

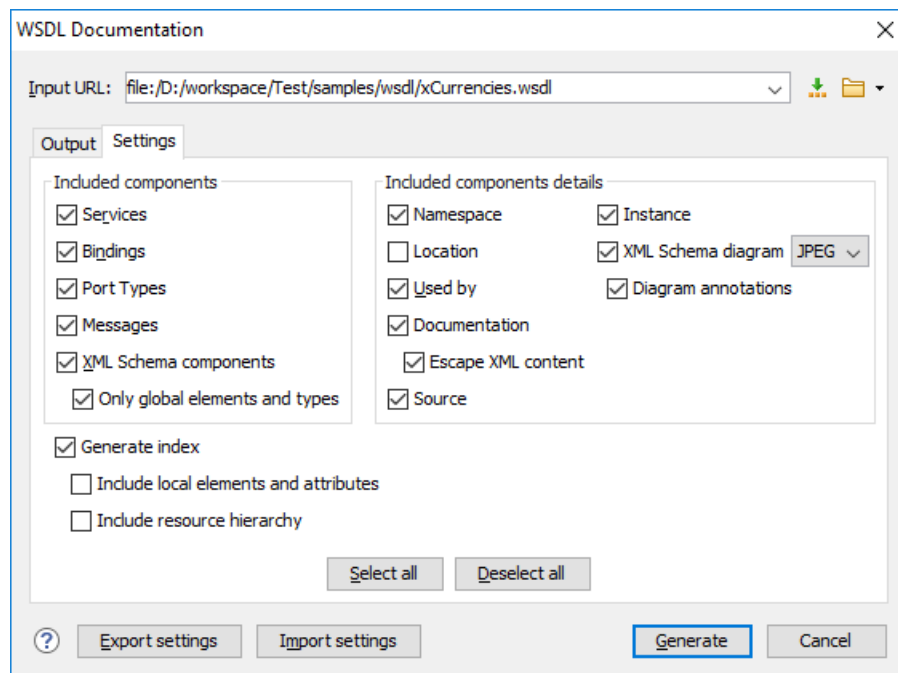


Figure 356: Settings Tab of the WSDL Documentation Dialog Box

The **Settings** tab allows you to choose whether or not to include the following:

- **Components**
 - **Services** - Specifies whether or not the generated documentation includes the WSDL services.
 - **Bindings** - Specifies whether or not the generated documentation includes the WSDL bindings.
 - **Port Types** - Specifies whether or not the generated documentation includes the WSDL port types.
 - **Messages** - Specifies whether or not the generated documentation includes the WSDL messages.

- **XML Schema Components** - Specifies whether or not the generated documentation includes the XML Schema components.
 - **Only global elements and types** - Specifies whether or not the generated documentation includes only global elements and types.
- **Component Details**
 - **Namespace** - Presents the namespace information for WSDL or XML Schema components.
 - **Location** - Presents the location information for each WSDL or XML Schema component.
 - **Used by** - Presents the list of components that reference the current one.
 - **Documentation** - Presents the component documentation. If you choose **Escape XML Content**, the XML tags are presented in the documentation.
 - **Source** - Presents the XML fragment that defines the current component.
 - **Instance** - Generates a sample XML instance for the current component.

Note: This option applies to the XML Schema components only.

 - **XML Schema Diagram** - Displays the diagram for each XML Schema component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section.
 - **Diagram annotations** - Specifies whether or not the annotations of the components presented in the diagram sections are included.
- **Generate index** - Displays an index with the components included in the documentation.
 - **Include local elements and attributes** - If selected, local elements and attributes are included in the documentation index.
 - **Include resource hierarchy** - Specifies whether or not the resource hierarchy for an XML Schema documentation is generated. It is deselected by default.

Export settings - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

Import settings - Reloads the settings from the exported file.

Generate - Use this button to generate the WSDL documentation.

Generating WSDL Documentation in HTML Format

The WSDL documentation generated in HTML format is presented in a visual diagram style with various sections, hyperlinks, and options.

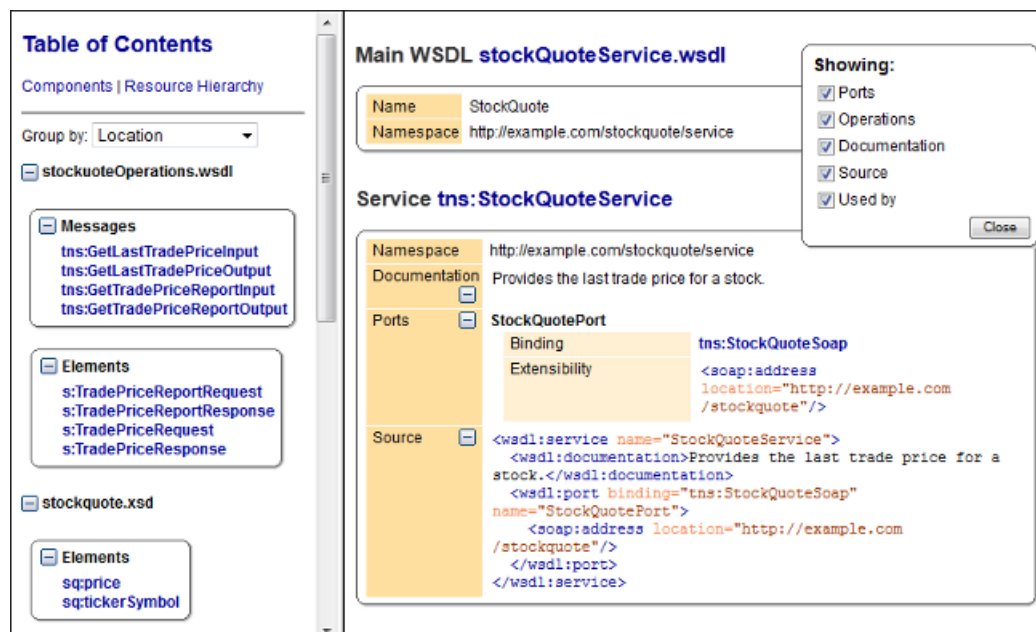


Figure 357: WSDL Documentation in HTML Format

The documentation of each component is presented in a separate section. The title of the section is composed of the component type and the component name. The component information (namespace, documentation, etc.) is presented in a tabular form.

If you choose to split the output into multiple files, the table of contents is displayed in the left frame and is divided in two tabs: **Components** and **Resource Hierarchy**.

The **Components** tab allows you to group the contents by namespace, location, or component type. The WSDL components from each group are sorted alphabetically. The **Resource Hierarchy** tab displays the dependencies between WSDL and XML Schema modules in a tree-like fashion. The root of the tree is the WSDL document that you generate documentation for.

After the documentation is generated, you can collapse or expand details for some WSDL components by using the **Showing** options or the  **Collapse** or  **Expand** buttons.




Figure 358: Showing Options

Generating WSDL Documentation in a Custom Format

To obtain the default HTML documentation output from a WSDL document, Oxygen XML Developer uses an intermediary XML document to which it applies an XSLT stylesheet. To create a custom output from your WSDL document, edit the `wsdlDocHtml.xsl` XSLT stylesheet or create your own.

Note: The `wsdlDocHtml.xsl` stylesheet that is used to obtain the HTML documentation is located in the `[OXYGEN_INSTALL_DIR]/frameworks/wsdl_documentation/xsl` folder.

Note: The intermediary XML document complies with the `wsdlDocSchema.xsd` XML Schema. This schema is located in the `[OXYGEN_INSTALL_DIR]/frameworks/wsdl_documentation` folder.

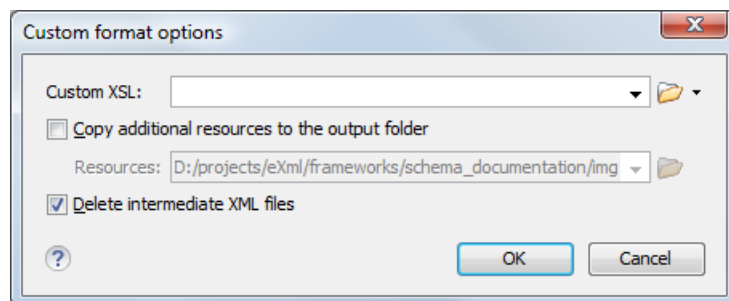


Figure 359: Custom Format Options Dialog Box

When using a custom format, you can also copy additional resources into the output folder or choose to keep the intermediate XML files created during the documentation process.

Generating WSDL Documentation from the Command-Line Interface

To generate documentation for a WSDL document from the command line, open the **WSDL Documentation** dialog box and click **Export settings**. Using the exported settings file you can generate the same documentation from the command line by running the following scripts:

- `wsdlDocumentation.bat` on Windows.
- `wsdlDocumentation.sh` on Mac OS X and Linux.

The scripts are located in the installation folder of Oxygen XML Developer. You can integrate the scripts in an external batch process launched from the command-line interface.

WSDL SOAP Analyzer

WSDL SOAP Analyzer is a tool that helps you test if the messages defined in a Web Service Descriptor (WSDL) are accepted by a Web Services server.

After you edit and validate your Web service descriptor against a mix of the XML Schemas for WSDL and SOAP, it is easy to check if the defined SOAP messages are accepted by the remote Web Services server by using the integrated **WSDL SOAP Analyzer** tool (available from the toolbar or **Tools** menu).

Oxygen XML Developer provides two ways of testing, one for the currently edited WSDL document and another for the remote WSDL documents that are published on a web server. To open the **WSDL SOAP Analyzer** tool for the currently edited WSDL document do one of the following:

- Click the  **WSDL SOAP Analyzer** toolbar button.
- Use the  **WSDL SOAP Analyzer** action from the **Tools** menu.
- Go to **Open with** >  **WSDL SOAP Analyzer** in the contextual menu of the **Project** view.

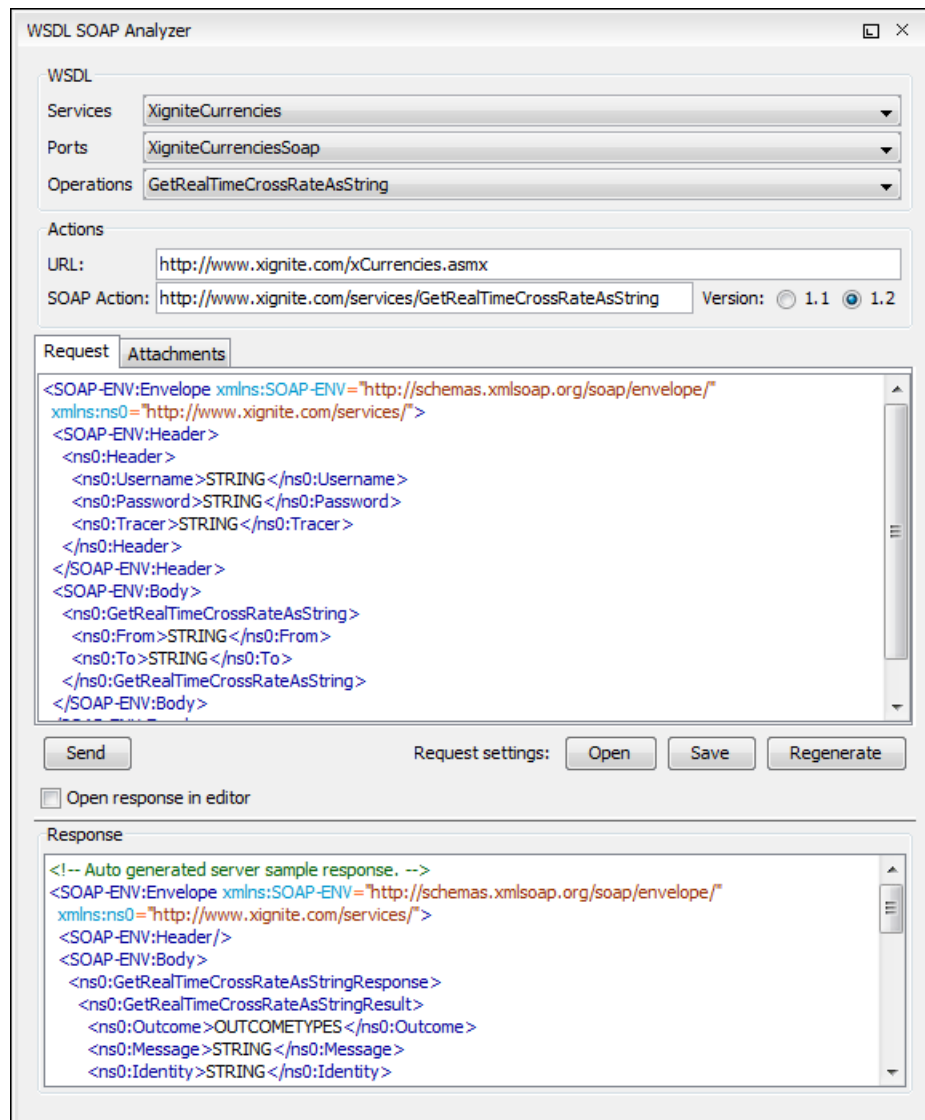


Figure 360: WSDL SOAP Analyzer Dialog Box

This tool contains a SOAP analyzer and sender for Web Services Description Language file types. The analyzer fields are as follows:

- **Services** - The list of services defined by the WSDL file.
- **Ports** - The ports for the selected service.

- **Operations** - The list of available operations for the selected service.
- **Action URL** - The script that serves the operation.
- **SOAP Action** - Identifies the action performed by the script.
- **Version** - Choose between 1.1 and 1.2. The SOAP version is selected automatically depending on the selected port.
- **Request Editor** - It allows you to compose the web service request. When an action is selected, Oxygen XML Developer tries to generate as much content as possible for the SOAP request. The envelope of the SOAP request has the correct namespace for the selected SOAP version, that is <http://schemas.xmlsoap.org/soap/envelope/> for SOAP 1.1 or <http://www.w3.org/2003/05/soap-envelope> for SOAP 1.2. Usually you just have to change a few values for the request to be valid. The [Content Completion Assistant](#) is available for this editor and is driven by the schema that defines the type of the current message. While selecting various operations, Oxygen XML Developer remembers the modified request for each one. You can press the **Regenerate** button to overwrite your modifications for the current request with the initial generated content.
- **Attachments List** - You can define a list of file URLs to be attached to the request.
- **Response Area** - Initially it displays an auto generated server sample response so you can have an idea about how the response looks like. After pressing the **Send** button, it presents the message received from the server in response to the Web Service request. It may show also error messages. If the response message contains attachments, Oxygen XML Developer prompts you to save them, then tries to open them with the associated system application.
- **Errors List** - There may be situations where the WSDL file is respecting the WSDL XML Schema, but it fails to be valid (for example, in the case of a message that is defined by means of an element that is not found in the types section of the WSDL). In such a case, the errors are listed here. This list is presented only when there are errors.
- **Send Button** - Executes the request. A status dialog box is displayed when Oxygen XML Developer is connecting to the server.

The testing of a WSDL file is straight-forward: click the WSDL analysis button, then select the service, the port, and the operation. The editor generates the skeleton for the SOAP request. You can edit the request, eventually attach files to it and send it to the server. Watch the server response in the response area. You can find more details in the [Testing Remote WSDL Files](#) section.

Note: SOAP requests and responses are automatically validated in the **WSDL SOAP Analyzer** using the XML Schemas specified in the WSDL file.

Once defined, a request derived from a Web Service descriptor can be saved with the **Save** button to a Web Service SOAP Call (WSSC) file for later reuse. In this way, you save time in configuring the URLs and parameters.

You can open the result of a Web Service call in an editor panel using the **Open** button.

Testing Remote WSDL Files

To open and test a remote WSDL file the steps are the following:

1. Go to **Tools** >  **WSDL SOAP Analyzer**.
2. On the **WSDL File** tab enter the URL of the remote WSDL file.
You enter the URL:
 - by typing
 - by browsing the local file system
 - by browsing a remote file system
 - by browsing [a UDDI Registry](#)
3. Press the **OK** button.
This will open the **WSDL SOAP Analyzer tool**. In the **Saved SOAP Request** tab you can open directly a previously saved Web Service SOAP Call (WSSC) file, thus skipping the analysis phase.

UDDI Registry Browser

Pressing the  button in the **WSDL File Opener** dialog box (menu **Tools** > **WSDL SOAP Analyzer**) opens the **UDDI Registry Browser** dialog box.

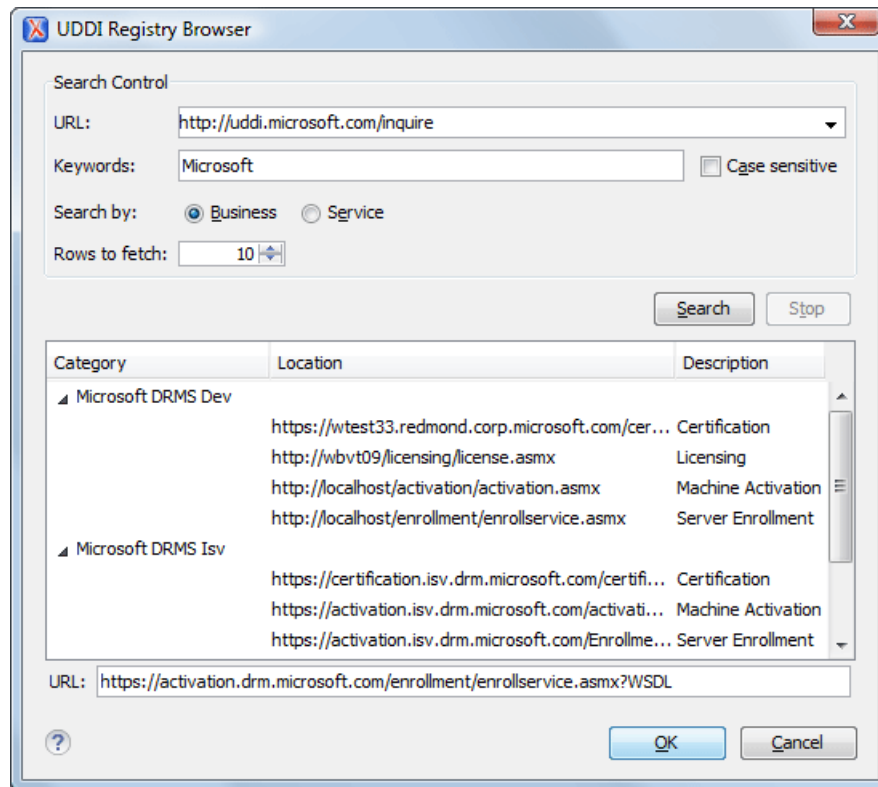


Figure 361: UDDI Registry Browser Dialog Box

The fields of the dialog box are as follows:

- **URL** - Type the URL of an UDDI registry or choose one from the default list.
- **Keywords** - Enter the string you want to be used when searching the selected UDDI registry for available Web services.
- **Rows to fetch** - The maximum number of rows to be displayed in the result list.
- **Search by** - You can choose to search either by company or by provided service.
- **Case sensitive** - When selected, the search takes into account the keyword case.
- **Search** - The WSDL files that matched the search criteria are added in the result list.

When you select a WSDL from the list and click the **OK** button, the **UDDI Registry Browser** dialog box is closed and you are returned to the **WSDL File Opener** dialog box.

Editing CSS Stylesheets

Oxygen XML Developer includes a built-in editor for CSS stylesheets. This section presents the features of the CSS editor and how these features should be used. The features of the CSS editor include:

- **Create new CSS files and templates** - You can use the built-in new file wizards to [create new CSS documents or templates](#).
- **Open and Edit CSS files** - CSS files can be opened and edited in a source editing mode.
- **Validation** - Presents validation errors in CSS files.
- **Content completion** - Offers proposals for properties and the values that are available for each property.
- **Syntax highlighting** - The syntax highlighting in Oxygen XML Developer makes CSS files more readable.
- **Shortcut to open resources** - You can use **Ctrl + Single-Click (Command + Single-Click on OS X)** to open imported stylesheets or other resources (such as images) in the default system application for the particular type of resource.

Validating CSS Stylesheets

Oxygen XML Developer includes a built-in *CSS Validator*, integrated with general validation support. This makes the [usual validation features](#) for presenting errors also available for CSS stylesheets.

When you edit a CSS document, you can access the [CSS validator options](#) by selecting  **Validation options** from the **Document > Validate** menu.

The CSS properties accepted by the validator are those included in the current CSS profile that is selected in the [CSS validation preferences](#). The **CSS 3 with Oxygen extensions** profile includes all the CSS 3 standard properties and the CSS extensions specific for Oxygen. That means all Oxygen specific extensions are accepted in a CSS stylesheet by the [built-in CSS validator](#) when this profile is selected.

Specify Custom CSS Properties

To specify custom CSS properties, follow these steps:

1. Create a file named `CustomProperties.xml` that has the following structure:

```
<?xml version="1.0" encoding="UTF-8"?>
<css_keywords
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="http://www.oxygenxml.com/ns/css
http://www.oxygenxml.com/ns/css/CssProperties.xsd"
  xmlns="http://www.oxygenxml.com/ns/css">
  <property name="custom">
    <summary>Description for custom property.</summary>
    <value name="customValue"/>
    <value name="anotherCustomValue"/>
  </property>
</css_keywords>
```

2. Go to your desktop and create the `builtin/css-validator/` folder structure.
3. Press and hold **Shift** and right-click anywhere on your desktop. From the contextual menu, select **Open Command Window Here**.
4. In the command line, run the `jar cvf custom_props.jar builtin/` command. The `custom_props.jar` file is created.
5. Go to `[OXYGEN_INSTALL_DIR]/lib` and create the `endorsed` folder. Copy the `custom_props.jar` file to `[OXYGEN_INSTALL_DIR]/lib/endorsed`.

Content Completion in CSS Stylesheets

A [Content Completion Assistant](#), similar to the one available for XML documents offers the CSS properties and the values available for each property. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut and is context-sensitive when invoked for the value of a property. The *Content Completion Assistant* also includes [code templates that can be used to quickly insert code fragments](#) into CSS stylesheets. The code templates that are proposed include form controls, actions, and **Author** mode operations.

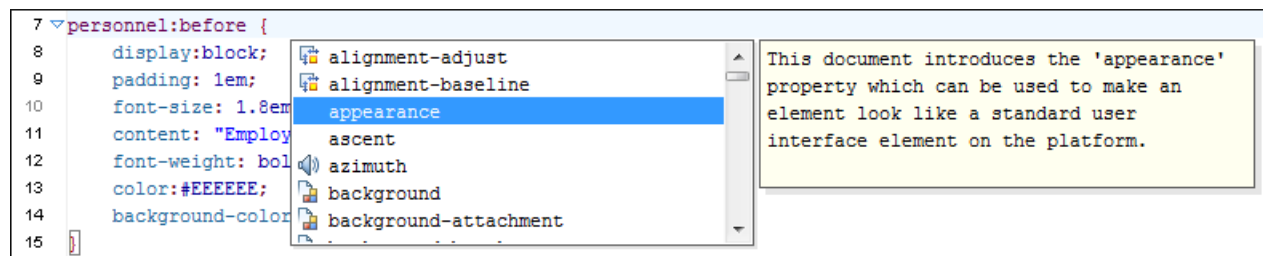


Figure 362: Content Completion in CSS Stylesheets

The properties and values available are dependent on the CSS Profile selected in the [CSS preferences](#). The CSS 2.1 set of properties and property values is used for most of the profiles. However, with CSS 1 and CSS 3 specific proposal sets are used.

Proposals for CSS Selectors - After inserting a CSS *selector*, the content completion assistance will propose a list of pseudo-elements and pseudo-classes that are available for the selected CSS profile.

Proposals for @media and @import Rules - After inserting @media or @import <url> rules, the content completion assistance will propose a list of supported media types.

Related Information:

[Specify Custom CSS Properties](#) on page 604

Syntax Highlighting in CSS Files

Oxygen XML Developer supports syntax highlighting in CSS files to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for CSS files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **CSS** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

CSS Outline View

The **Outline** view for CSS stylesheets presents the import declarations for other CSS stylesheet files and all the selectors defined in the current CSS document. The selector entries can be presented as follows:

- In the order they appear in the document.
- Sorted by the element name used in the selector.
- Sorted by the entire selector string representation.

You can synchronize the selection in the **Outline** view with the cursor moves or changes you make in the stylesheet document. When you select an entry from the **Outline** view, Oxygen XML Developer highlights the corresponding import or selector in the CSS editor.

By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

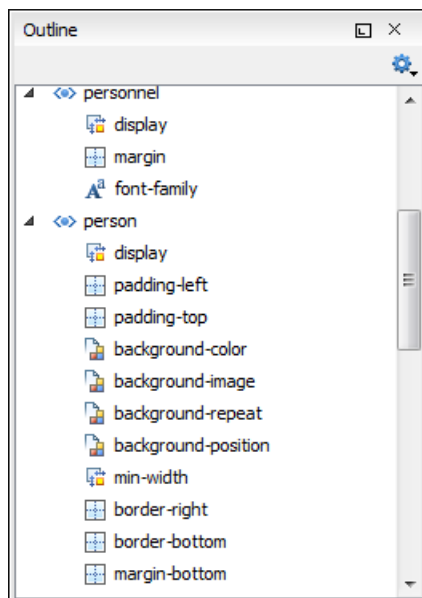


Figure 363: CSS Outline View

The selectors presented in this view can be found quickly using the key search field. When you press a sequence of character keys while the focus is in the view, the first selector that starts with that sequence is selected automatically.

Folding in CSS Stylesheets

In a large CSS stylesheet document, some styles can be collapsed so that only the styles that are needed remain in focus. The same [folding features available for XML documents](#) are also available in CSS stylesheets.

Note: To enhance your editing experience, you can select entire blocks (parts of text delimited by brackets) by double-clicking somewhere inside the brackets.

Formatting and Indenting CSS Stylesheets (Pretty Print)

If the edited CSS stylesheet becomes unreadable because of the bad alignment of the text lines, the [format and indent operation available for XML documents](#) is also available for CSS stylesheets. It works in the same way as for XML documents and is available as the same menu and toolbar action.

Minifying CSS Stylesheets

Minification (or *compression*) of a CSS document is the practice of removing unnecessary code without affecting the functionality of the stylesheet.

To minify a CSS, invoke the contextual menu anywhere in the edited document and choose the **Minify CSS** action. Oxygen XML Developer opens a dialog box that allows you to:

- Set the location of the resulting CSS.
- Place each style rule on a new line.

After pressing **OK**, Oxygen XML Developer performs the following actions:

- All spaces are normalized (all leading and trailing spaces are removed, while sequences of white spaces are replaced with single space characters).
- All comments are removed.

Note: The CSS minifier relies heavily upon the W3C CSS specification. If the content of the CSS file you are trying to minify does not conform with the specifications, an error dialog box will be displayed, listing all errors encountered during the processing.

The resulting CSS stylesheet gains a lot in terms of execution performance, but loses in terms of readability. The source CSS document is left unaffected.

Note: To restore the readability of a minified CSS, invoke the **Format and Indent** action from the **Document > Source** menu, the **Source** submenu from the contextual menu, or **Source** toolbar. However, this action will not recover any of the deleted comments.

Editing LESS Stylesheets

Oxygen XML Developer provides support for stylesheets coded with the LESS dynamic stylesheet language. LESS extends the CSS language by adding features that allow mechanisms such as *variables*, *nesting*, *mixins*, *operators*, and *functions*. Oxygen XML Developer offers additional LESS features that include:

- **Create new LESS files and templates** - You can use the built-in new file wizards to [create new LESS documents or templates](#).
- **Open and Edit LESS files** - LESS files can be opened and edited in a source editing mode.
- **Validation** - Presents validation errors in LESS files.
- **Content completion** - Offers proposals for properties and the values that are available for each property.
- **Compile to CSS** - Options are available to compile LESS files to CSS.
- **Syntax highlighting** - Oxygen XML Developer supports syntax highlighting in LESS files, although there may be some limitations in supporting all the LESS constructs.

- **Shortcut to open resources** - While editing LESS files, you can use **Ctrl + Single-Click (Command + Single-Click on OS X)** to open imported stylesheets or other resources (such as images) in the default system application for the particular type of resource.

For more information about LESS go to <http://lesscss.org/>.

Validating LESS Stylesheets

Oxygen XML Developer includes a built-in *LESS CSS Validator*, integrated with general validation support. The [usual validation features](#) for presenting errors also available for LESS stylesheets.

Oxygen XML Developer provides three validation methods:

- Automatic validation as you type - marks validation errors in the document as you are editing.
- Validation upon request, by pressing the  **Validate** button from the  **Validation** toolbar drop-down menu. An error list is presented in the message panel at the bottom of the editor.
- Validation scenarios, by selecting  **Configure Validation Scenario(s)** from the  **Validation** toolbar drop-down menu. Errors are presented in the message panel at the bottom of the editor. This is useful when you need to validate the current file as part of a larger LESS import hierarchy (for instance, you may change the URL of the file to validate to the root of the hierarchy).

Content Completion in LESS Stylesheets

A [Content Completion Assistant](#) offers the LESS properties and the values available for each property. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut and is context-sensitive when invoked for the value of a property in a LESS file. The *Content Completion Assistant* also includes [code templates that can be used to quickly insert code fragments](#) into LESS stylesheets. The code templates that are proposed include form controls, actions, and **Author** mode operations.

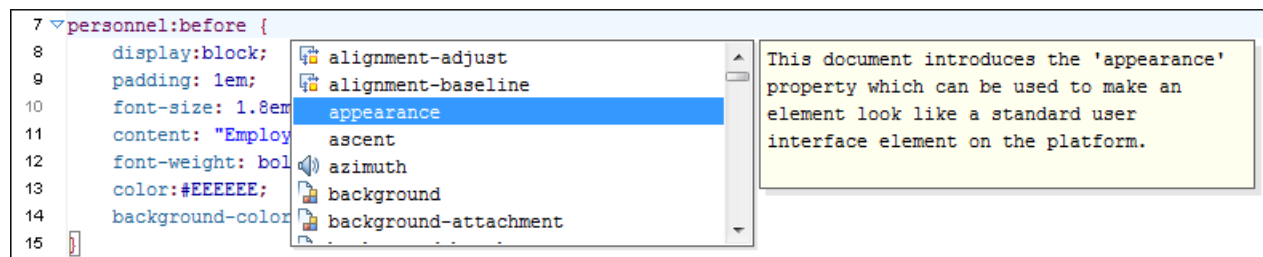


Figure 364: Content Completion in LESS Stylesheets

The properties and values available are dependent on the CSS Profile selected in the [CSS preferences](#).

Syntax Highlighting in LESS Files

Oxygen XML Developer supports syntax highlighting in LESS files to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for LESS files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **LESS** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

Compiling LESS Stylesheets to CSS

When editing LESS files, you can compile the files into CSS. Oxygen XML Developer provides both manual and automatic options to compile LESS stylesheets into CSS.

Important: The LESS processor works well only with files having the *UTF-8* encoding. Thus, it is highly recommended that you always use the *utf-8* encoding when working with LESS files or the files they import (other LESS or CSS files). You can use the following directive at the beginning of your files:

```
@charset "utf-8";
```

You have two options for compiling LESS files to CSS:

1. Use the contextual menu in a LESS file and select **Compile to CSS (Ctrl + Shift + C (Command + Shift + C on OS X))**.
2. Select the **Automatically compile LESS to CSS when saving** option in the settings (open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Open/Save > Save Hooks**). If selected, when you save a LESS file it will automatically be compiled to CSS (this option is deselected by default).

Important: If this option is selected, when you save a LESS file, the CSS file that has the same name as the LESS file is overwritten without warning. Make sure all your changes are made in the LESS file. Do not edit the CSS file directly, as your changes might be lost.

Editing Relax NG Schemas

An XML Schema describes the structure of an XML document and is used to validate XML document instances against it, to check that the XML instances conform to the specified requirements. If an XML instance conforms to the schema then it is said to be valid. Otherwise, it is invalid.

Oxygen XML Developer offers support for editing Relax NG schema files in the following editing modes:

- **Text editing mode** - Allows you to edit Relax NG schema files in a source editing mode, along with a schema design pane with two tabs that offer a **Full Model View** and **Logical Model View**.
- **Grid editing mode** - Displays Relax NG schema files in a structured spreadsheet-like grid.

For information about applying and detecting schemas, see [Associating a Schema to XML Documents](#) on page 420.

Related Information:

[Associating a Schema to XML Documents](#) on page 420

Editing Relax NG Schema in the Master Files Context

Smaller interrelated modules that define a complex Relax NG Schema cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, an element defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main Relax NG document either using the [master files support from the Project view](#), or using a validation scenario.

To set a *master file* using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The main advantage of editing in the context of a *master file* is that it provides correct validation of a module in the context of a larger schema structure.

Related Information:

[Creating a New Validation Scenario](#) on page 409

[XML Schema Outline View](#) on page 233

Relax NG Schema Diagram Editor

This section explains how to use the graphical diagram editor for Relax NG schemas.

Introduction to Relax NG Schema Diagram Editor

Oxygen XML Developer provides a simple, expressive, and easy-to-read schema diagram editor for Relax NG schemas.

With this new feature you can easily develop complex schemas, print them on multiple pages or save them as JPEG, PNG, or BMP images. It helps both schema authors in developing the schema and content authors who are using the schema to understand it.

Oxygen XML Developer is the only XML editor to provide a side by side source and diagram presentation and have them real-time synchronized:

- The changes you make in the Editor are immediately visible in the Diagram (no background parsing).
- Changing the selected element in the diagram selects the underlying code in the source editor.

Full Model View

When you create a new schema document or open an existing one, the editor panel is divided in two sections: one containing the schema diagram and the second the source code. The schema diagram editor has two tabs that offer a **Full Model View** and **Logical Model View**.

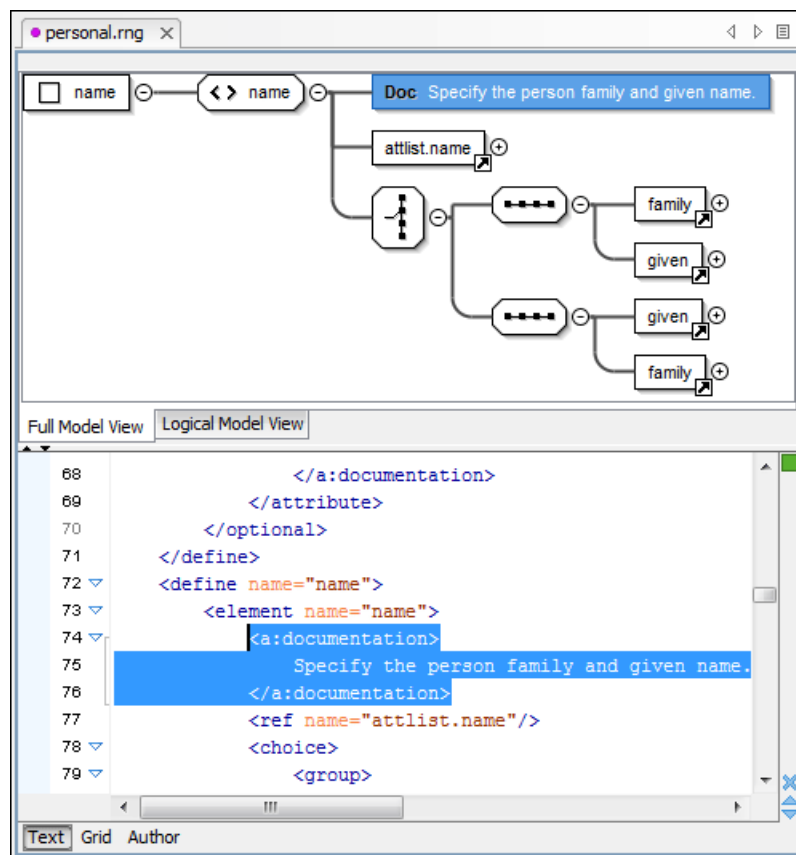


Figure 365: Relax NG Schema Editor - Full Model View

The following references can be expanded in place: patterns, includes, and external references. This expansion mechanism, coupled with the synchronization support, makes the schema navigation easy.

All the element and attribute names are editable by double-clicking the names.

Logical Model View

The **Logical Model View** presents the compiled schema in the form of a single pattern. The patterns that form the element content are defined as top level patterns with generated names. These names are generated depending of the elements name class.

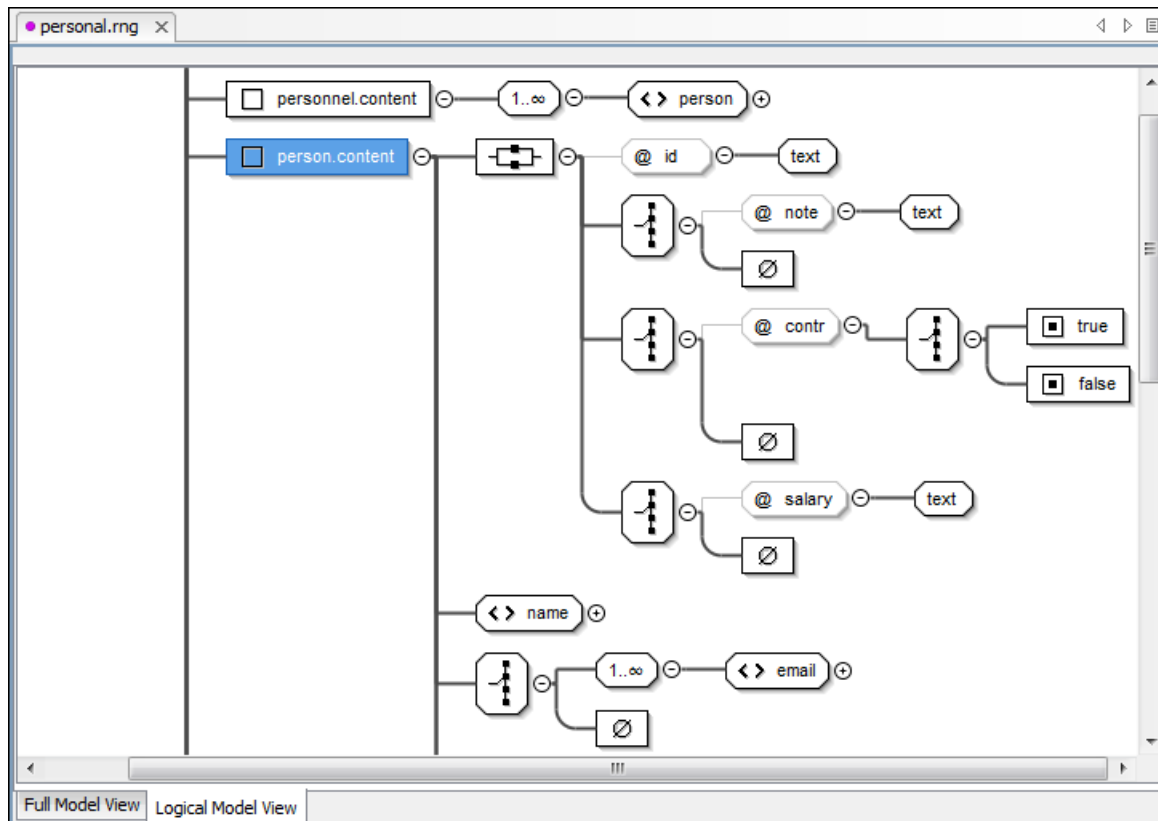








Figure 366: Logical Model View for a Relax NG Schema

Symbols Used in the Schema Diagram

The views in the schema diagram editor renders all the Relax NG schema patterns with the following intuitive symbols:

-  `name` - define pattern with the name attribute set to the value shown inside the rectangle (in this example name).
-  `attlist:person` - define pattern with the combine attribute set to interleave and the name attribute set to the value shown inside the rectangle (in this example attlist.person).
-  `attlist:person` - define pattern with the combine attribute set to choice and the name attribute set to the value shown inside the rectangle (in this example attlist.person).
-  `<> name` - element pattern with the name attribute set to the value shown inside the rectangle (in this example name).
-  `@ note` - attribute pattern with the name attribute set to the value shown inside the rectangle (in this case note).
-  `family` - ref pattern with the name attribute set to the value shown inside the rectangle (in this case family).

-  - oneOrMore pattern.
-  - zeroOrMore pattern.
-  - optional pattern.
-  - choice pattern.
-  - value pattern (for example, used inside a choice pattern).
-  - group pattern.
-  - A pattern from the Relax NG Annotations namespace (<http://relaxng.org/ns/compatibility/annotations/1.0>) that is treated as a documentation element in a Relax NG schema.
-  - text pattern.
-  - empty pattern.

Actions Available in the Schema Diagram Editor

When editing Relax NG schemas in **Full Model View**, the contextual menu offers the following actions:

Append child

Appends a child to the selected component.

Insert Before

Inserts a component before the selected component.

Insert After

Inserts a component after the selected component.

Edit attributes

Edits the attributes of the selected component.

Remove

Removes the selected component.

Show only the selected component

Depending on its state (selected/not selected), either the selected component or all the diagram components are shown.

Show Annotations

Depending on its state (selected/not selected), the documentation nodes are shown or hidden.

Auto expand to references

This option controls how the schema diagram is automatically expanded. If you select it and then edit a top-level element or you make a refresh, the diagram is expanded until it reaches referenced components. If this option is left unchecked, only the first level of the diagram is expanded, showing the top-level elements. For large schemas, the editor disables this option automatically.

Collapse Children

Collapses the children of the selected view.

Expand Children

Expands the children of the selected view.

Print Selection

Prints the selected view.

Save as Image

Saves the current selection as JPEG, BMP, SVG or PNG image.

Refresh

Refreshes the schema diagram according to the changes in your code. They represent changes in your imported documents or changes that are not reflected automatically in the compiled schema).

If the schema is not valid, you see only an error message in the **Logical Model View** instead of the diagram.

Validating Relax NG Schema Documents

By default, Relax NG schema files are validated as you type. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the **Enable automatic validation** option.

To validate a Relax NG schema document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. When Oxygen XML Developer validates a Relax NG schema file, it expands all the included modules so the entire schema hierarchy is validated. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Validation Scenario](#) on page 408

[Associating a Schema to XML Documents](#) on page 420

[Presenting Validation Errors in Text Mode](#) on page 207

Content Completion in Relax NG Schemas

The intelligent [Content Completion Assistant](#) allows you to quickly identify and insert elements, attributes, and attribute values that are valid in the current editing context. All available proposals are listed in a pop-up menu displayed at the current cursor position.

The *Content Completion Assistant* is enabled by default. To disable it, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Content Completion**, and deselect the **Enable content completion** option.

When active, the *Content Completion Assistant* displays a list of context-sensitive proposals valid at the current cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut. You can navigate through the list of proposals by using the **Up** and **Down** keys on your keyboard. For each selected item in the list, the *Content Completion Assistant* displays a documentation window. You can customize the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected proposal in **Text** mode, do one of the following:

- Press **Enter** or **Tab** to insert both the start and end tags and position the cursor inside the start tag in a position suitable for inserting attributes.
- Press **Ctrl + Enter (Command + Enter on OS X)** to insert both the start and end tags and positions the cursor between the tags in a position where you can start typing content.

If you are using the concept of [master files](#) to import/include modules, the *Content Completion Assistant* collects its components starting from the *master files*. The *master files* can be defined in the project or in the associated validation scenario. For more information about the *Master Files* support in Oxygen XML Developer, see [Defining Master Files at Project Level](#).

The *Content Completion Assistant* also offers additional information for the element and attribute proposals in the form of schema annotations that is displayed in a tooltip.

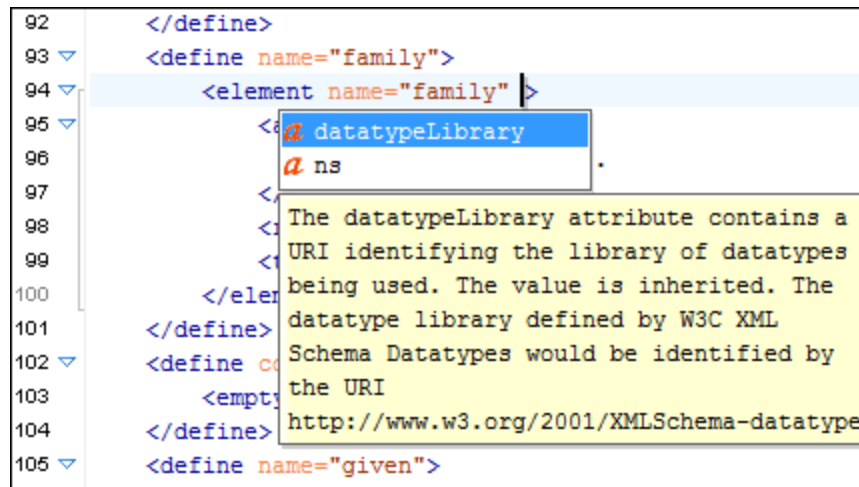


Figure 367: Relax NG Content Completion Assistant

Syntax Highlighting in Relax NG Schemas

Oxygen XML Developer supports syntax highlighting in Relax NG schemas to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for Relax NG schemas, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane (for RELAX NG Compact Syntax schemas, select and expand the **RNC** section).
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes (for RELAX NG Compact Syntax schemas, the tab is **RNC**).

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Syntax Highlight Preferences](#) on page 86

Quick Fixes for DTD, XSD, and Relax NG Errors

Oxygen XML Developer offers *Quick Fixes* for common errors that appear in XML documents that are validated against DTD, XSD, or Relax NG schemas.

Note: For XML documents validated against XSD schemas, the *Quick Fixes* are only available if you use the default Xerces validation engine.

Quick Fixes are available in **Text** mode .

Oxygen XML Developer provides *Quick Fixes* for numerous types of problems, including the following:

Problem Type	Available Quick Fixes
A specific element is required in the current context	Insert the required element
An element is invalid in the current context	Remove the invalid element
The content of the element should be empty	Remove the element content

Problem Type	Available Quick Fixes
An element is not allowed to have child elements	Remove all child elements
Text is not allowed in the current element	Remove the text content
A required attribute is missing	Insert the required attribute
An attribute is not allowed to be set for the current element	Remove the attribute
The attribute value is invalid	Propose the correct attribute values
ID value is already defined	Generate a unique ID value
References to an invalid ID	Change the reference to an already defined ID

Related Information:

[Schematron Quick Fixes \(SQF\)](#) on page 419

Relax NG Outline View

The **Outline** view for Relax NG schemas presents a list with the patterns that appear in the diagram in both the **Full Model View** and **Logical Model View** cases and it allows for quick access to a component by name. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

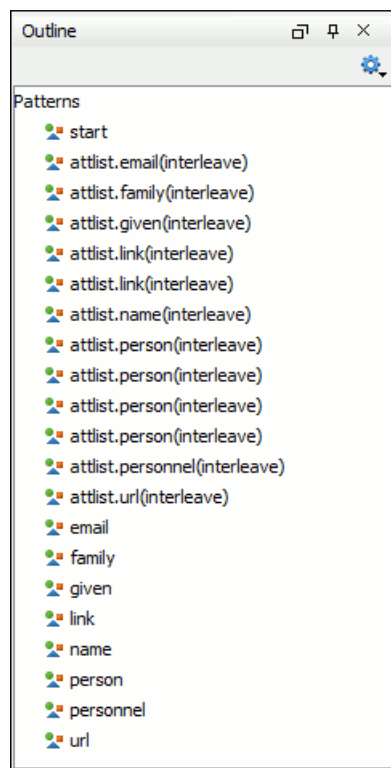


Figure 368: Relax NG Outline View

This view has two modes, with the tree showing either the XML structure or the defined pattern (components) collected from the current document. By default, the **Outline** view presents the components.

When the  **Show components** option is selected in the  **Settings** menu on the **Outline** view toolbar, the following option is available:

Show XML structure

Shows the XML structure of the current document in a tree-like manner.

The following actions are available in the  **Settings** menu on the **Outline** view toolbar when the  **Show XML structure** option is selected:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.

Selection update on cursor move

Allows a synchronization between **Outline** view and schema diagram. The selected view from the diagram will be also selected in the **Outline** view.

Show components

Shows the defined pattern collected from the current document.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available in the **Outline** view when the  **Show XML structure** option is selected in the  **Settings** menu:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Comments/uncomments the currently selected element.

Search references

Searches for the references of the currently selected component.

Search references in

Searches for the references of the currently selected component in the context of a scope that you define.

Component dependencies

Opens the **Component Dependencies** view that displays the dependencies of the currently selected component.

Rename Component in

Renames the currently selected component in the context of a scope that you define.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

RNG Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a schema. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

If you want to see the hierarchy of a schema, select the desired schema in the **Project view** and choose **Resource Hierarchy** from the contextual menu.

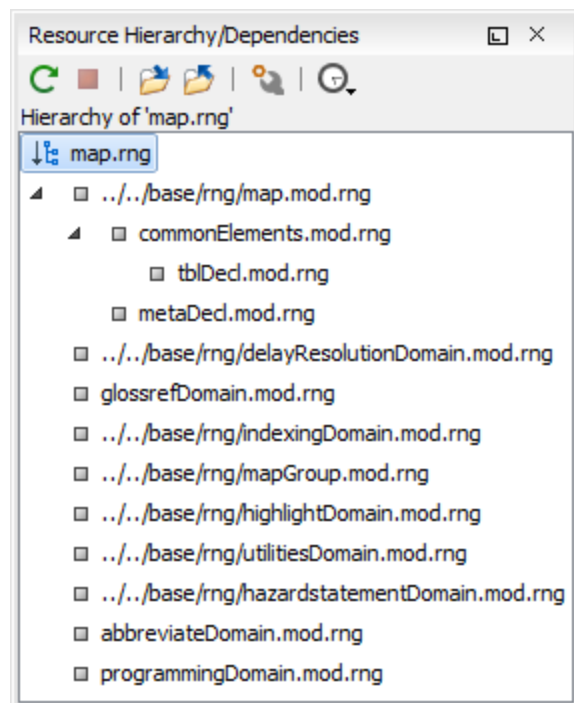


Figure 369: Resource Hierarchy/Dependencies View - hierarchy for map . rng

If you want to see the dependencies of a schema, select the desired schema in the **Project** view and choose **Resource Dependencies** from the contextual menu.

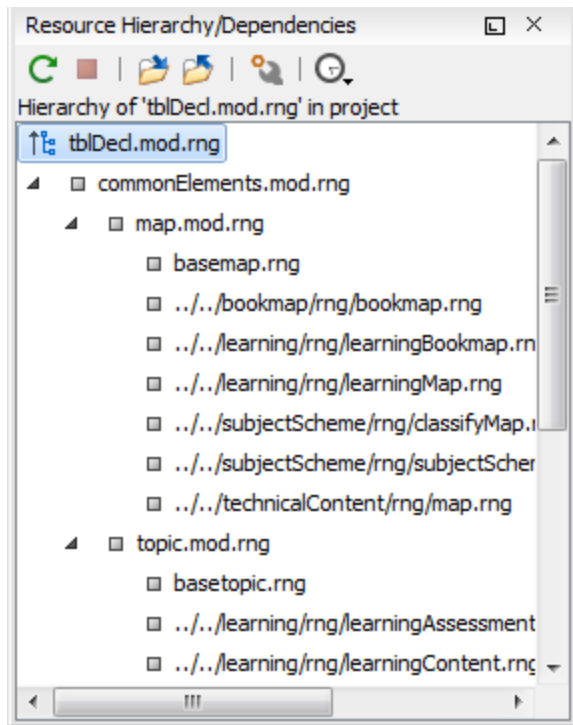


Figure 370: Resource Hierarchy/Dependencies View - Dependencies for tblDed1.mod.rng

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.



Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Related Information:

[Working with Modular XML Files in the Master Files Context](#) on page 429

[Search and Refactor Operations Scope](#) on page 429

Moving/Renaming RNG Resources

You can move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Note: Updating the references of a resource that is resolved through a catalog is not supported. Also, the update references operation is not supported if the path to the renamed or moved resource contains entities.

Relax NG Schema Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of a RelaxNG component:

1. Right-click the desired component in the editor or **Outline** view.
2. Select the **Component Dependencies** action from the contextual menu.

The action is available for all named defines.

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon .

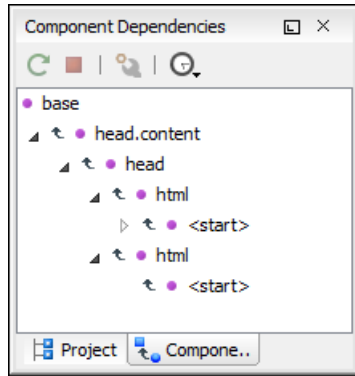


Figure 371: Component Dependencies View - Hierarchy for base.rng

The **Component Dependencies** view includes the following toolbar actions:

 Refresh

Refreshes the dependencies structure.

 Stop

Stops the dependency computation.

 Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.

 History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

Related Information:

[Search and Refactor Operations Scope](#) on page 429

Searching and Refactoring Actions in RNG Schemas

Search Actions

The following search actions can be applied on named *defines* and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.

- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Go to Definition** - Moves the cursor to the definition of the current element in the Relax NG (full syntax) schema.

Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on named *defines* and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

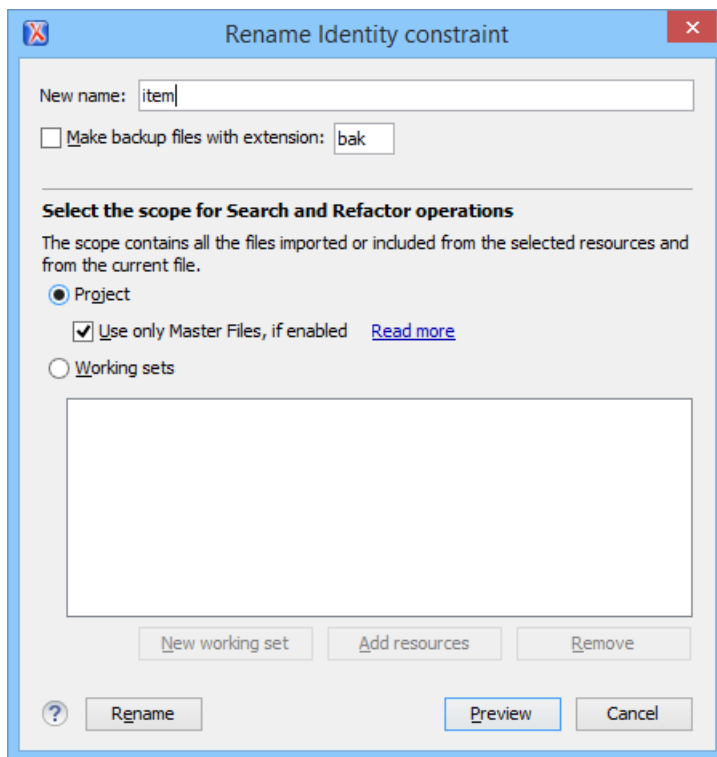


Figure 372: Rename Identity Constraint Dialog Box

RNG Quick Assist Support

The [Quick Assist support](#) improves the development work flow, offering fast access to the most commonly used actions when you edit schema documents.

The [Quick Assist feature](#) is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb icon (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *quick assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

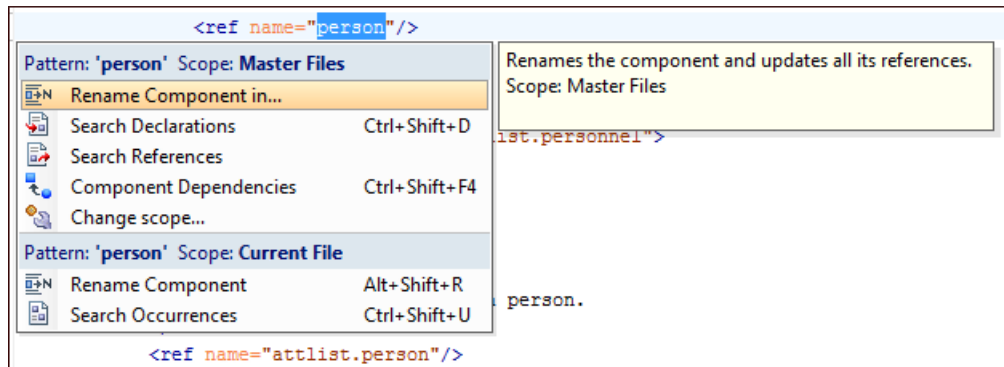


Figure 373: RNG Quick Assist Support

The *Quick Assist* support offers direct access to the following actions:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

Related Information:

[Component Dependencies View](#) on page 618

[Resource Hierarchy/Dependencies View](#) on page 616

[Searching and Refactoring Actions](#) on page 619

[Search and Refactor Operations Scope](#) on page 429

Configuring a Custom Datatype Library for a RELAX NG Schema

A RELAX NG schema can declare a custom datatype library for the values of elements found in XML document instances. The datatype library must be developed in Java and it must implement the interface [specified on the *www.thaiopensource.com* website](#).

The [JAR](#) file containing the custom library and any other dependent *JAR* file must be added to the classpath of the application, that is the *JAR* files must be added to the folder `[OXYGEN_INSTALL_DIR]/lib`.

To load the custom library, restart Oxygen XML Developer.

Editing NVDL Schemas

Some complex XML documents are composed by combining elements and attributes from namespaces. Furthermore, the schemas that define these namespaces are not even developed in the same schema language. In such cases, it is difficult to specify in the document all the schemas that must be taken into account for validation of the XML document or for content completion. An NVDL (Namespace Validation Definition Language) schema can be used. This schema allows the application to combine and interleave multiple schemas of different types (W3C XML Schema, RELAX NG schema, Schematron schema) in the same XML document.

Oxygen XML Developer offers support for editing NVDL schema files in the following editing modes:

- **Text editing mode** - Allows you to edit NVDL schema files in a source editing mode, along with a schema design pane with two tabs that offer a **Full Model View** and **Logical Model View**.
- **Grid editing mode** - Displays NVDL schema files in a structured spreadsheet-like grid.

For information about applying and detecting schemas, see [Associating a Schema to XML Documents](#) on page 420.

Related Information:

[Associating a Schema to XML Documents](#) on page 420

NVDL Schema Diagram

This section explains how to use the graphical diagram of a NVDL schema.

Introduction to NVDL Schema Diagram Editor

Oxygen XML Developer provides a simple, expressive, and easy-to-read schema diagram editor for NVDL schemas.

With this new feature you can easily develop complex schemas, print them on multiple pages or save them as JPEG, PNG, and BMP images. It helps both schema authors in developing the schema and content authors that are using the schema to understand it.

Oxygen XML Developer is the only XML Editor to provide a side by side source and diagram presentation and have them real-time synchronized:

- The changes you make in the Editor are immediately visible in the Diagram (no background parsing).
- Changing the selected element in the diagram, selects the underlying code in the source editor.

Full Model View

When you create a schema document or open an existing one, the editor panel is divided in two sections: one containing the schema diagram and the second the source code. The diagram view has two tabbed panes offering a **Full Model View** and a **Logical Model View**.

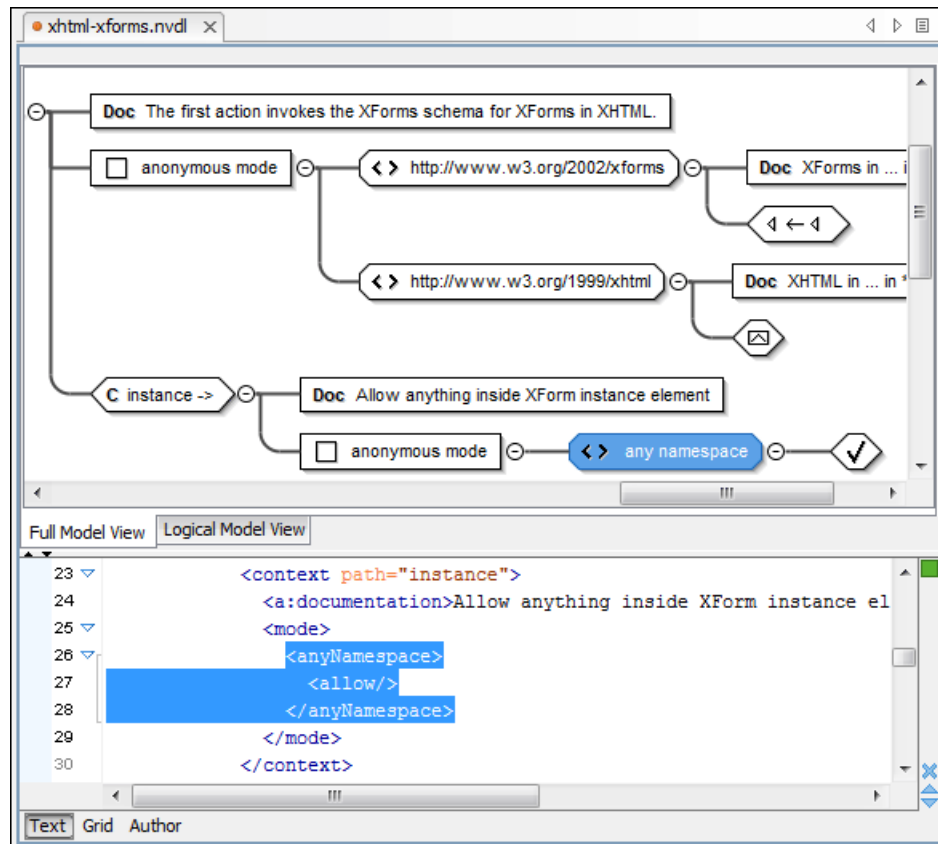


Figure 374: NVDL Schema Editor - Full Model View

The **Full Model View** renders all the NVDL elements with intuitive icons. This representation coupled with the synchronization support makes the schema navigation easy.

Double-click any diagram component to edit its properties.

Logical Model View

The **Logical Model View** presents the compiled schema in the form of a single pattern. The patterns that form the element content are defined as top level patterns with generated names. These names are generated depending of the elements name class.

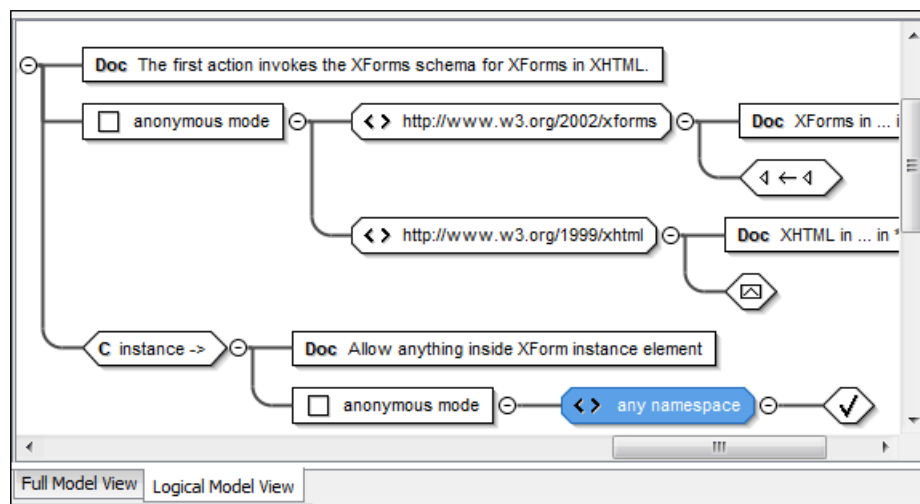


Figure 375: Logical Model View for an NVDL Schema

Actions Available in the Diagram Editor

The contextual menu offers the following actions:

Show only the selected component

Depending on its state (selected/not selected), either the selected component or all the diagram components are shown.

Show Annotations

Depending on its state (selected/not selected), the documentation nodes are shown or hidden.

Auto expand to references

This option controls how the schema diagram is automatically expanded. For instance, if you select it and then edit a top-level element or you trigger a diagram refresh, the diagram will be expanded until it reaches the referenced components. If this option is left unchecked, only the first level of the diagram is expanded, showing the top-level elements. For large schemas, the editor disables this option automatically.

Collapse Children

Collapses the children of the selected view.

Expand Children

Expands the children of the selected view.

Print Selection

Prints the selected view.

Save as Image

Saves the current selection as image, in JPEG, BMP, SVG or PNG format.

Refresh

Refreshes the schema diagram according to the changes in your code (changes in your imported documents or those that are not reflected automatically in the compiled schema).

If the schema is not valid, you see only an error message in the [Logical Model View](#) instead of the diagram.

Validating NVDL Schema Documents

By default, NVDL schema files are validated as you type. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the [Enable automatic validation](#) option.

To validate an NVDL schema document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. When Oxygen XML Developer validates an NVDL schema file, it expands all the included modules so the entire schema hierarchy is validated. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

Content Completion in NVDL Schemas

The intelligent [Content Completion Assistant](#) allows you to quickly identify and insert elements, attributes, and attribute values that are valid in the current editing context. All available proposals are listed in a pop-up menu displayed at the current cursor position.

The *Content Completion Assistant* is enabled by default. To disable it, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Content Completion**, and deselect the [Enable content completion](#) option.

When active, the *Content Completion Assistant* displays a list of context-sensitive proposals valid at the current cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut. You can navigate through the list of proposals by using the **Up** and **Down** keys on your keyboard. For each selected item in the list, the *Content Completion Assistant* displays a documentation window. You can customize the size of the documentation window by dragging its top, right, and bottom borders.

To insert the selected proposal in **Text** mode, do one of the following:

- Press **Enter** or **Tab** to insert both the start and end tags and position the cursor inside the start tag in a position suitable for inserting attributes.
- Press **Ctrl + Enter (Command + Enter on OS X)** to insert both the start and end tags and positions the cursor between the tags in a position where you can start typing content.

If you are using the concept of [master files](#) to import/include modules, the *Content Completion Assistant* collects its components starting from the *master files*. The *master files* can be defined in the project or in the associated validation scenario. For more information about the *Master Files* support in Oxygen XML Developer, see [Defining Master Files at Project Level](#).

The *Content Completion Assistant* also offers additional information for the element and attribute proposals in the form of schema annotations that is displayed in a tooltip.

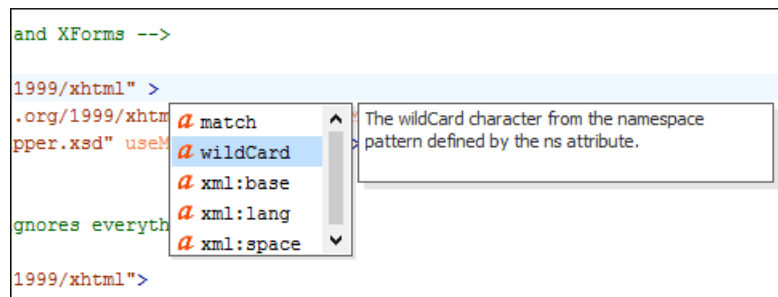


Figure 376: NVDL Content Completion Assistant

Syntax Highlighting in NVDL Schemas

Oxygen XML Developer supports syntax highlighting in NVDL schemas to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for NVDL schemas, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Syntax Highlight Preferences](#) on page 86

NVDL Outline View

The **Outline** view for NVDL schemas presents a list with the named or anonymous rules that appear in the diagram and it allows for quick access to a rule by name. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

NVDL Schema Component Dependencies View

The **Component Dependencies** view allows you to see the dependencies for a selected component. This is helpful if you want to see where components are used in the entire hierarchy. For example, if you want to find all the references where a given component is used.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To see the dependencies of an NVDL component:

1. Right-click the desired component in the editor or **Outline** view.

2. Select the **Component Dependencies** action from the contextual menu.

The action is available for all named modes.

If a component contains multiple references, a small table is displayed at the bottom of the view that contains all the references. When a recursive reference is encountered, it is marked with a special icon .

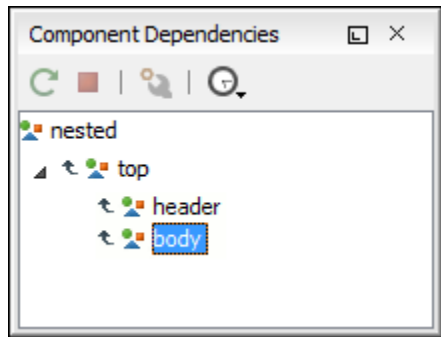


Figure 377: Component Dependencies View - Hierarchy for test.nvd1

The **Component Dependencies** view includes the following toolbar actions:

 Refresh

Refreshes the dependencies structure.

 Stop

Stops the dependency computation.

 Configure

Allows you to choose the search scope for computing the dependencies structure. This is helpful for making sure all imported/included resources are computed.

 History

Allows you to select from a list of the most recently used dependency computations.

In addition, the following actions are available in the contextual menu:

Go to First Reference

Selects the first reference of the currently selected component in the dependencies tree.

Go to Component

Shows the definition of the currently selected component in the dependencies tree.

Searching and Refactoring Actions in NVDL Schemas

Search Actions

The following search actions can be applied on name, useMode, and startMode attributes and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.

- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

The following action is available from the contextual menu and the **Document > Schema** menu:

-  **Go to Definition** - Moves the cursor to its definition in the schema used by the NVDL to validate it.

Note: You can also use the **Ctrl + Single-Click (Command + Single-Click on OS X)** shortcut on a reference to display its definition.

Refactoring Actions

The following refactoring actions can be applied on name, useMode, and startMode attributes and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

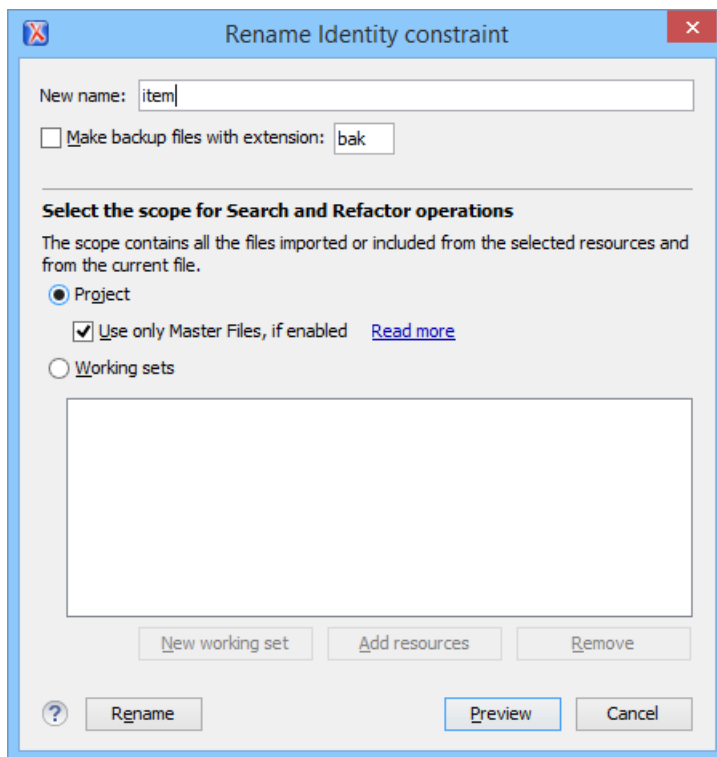


Figure 378: Rename Identity Constraint Dialog Box

Editing JSON Documents

This section explains the features of the Oxygen XML Developer JSON Editor and how to use them.

Editing JSON Documents in Text Mode

When editing JSON documents in the **Text** editing mode, the [usual text editing actions](#) are available, along with other editor specific actions, including:

- [Find / Replace](#)
- [Drag and Drop](#)
- [Validation](#)
- [Format and Indent \(Pretty Print\)](#)

Note: You can run XPath expressions on opened JSON documents, but in **Text** mode the XPath results cannot be mapped in the document. However, they can be mapped in the **Grid** editing mode. You can use the **Grid** button at the bottom of the editor panel to switch to that editing mode.

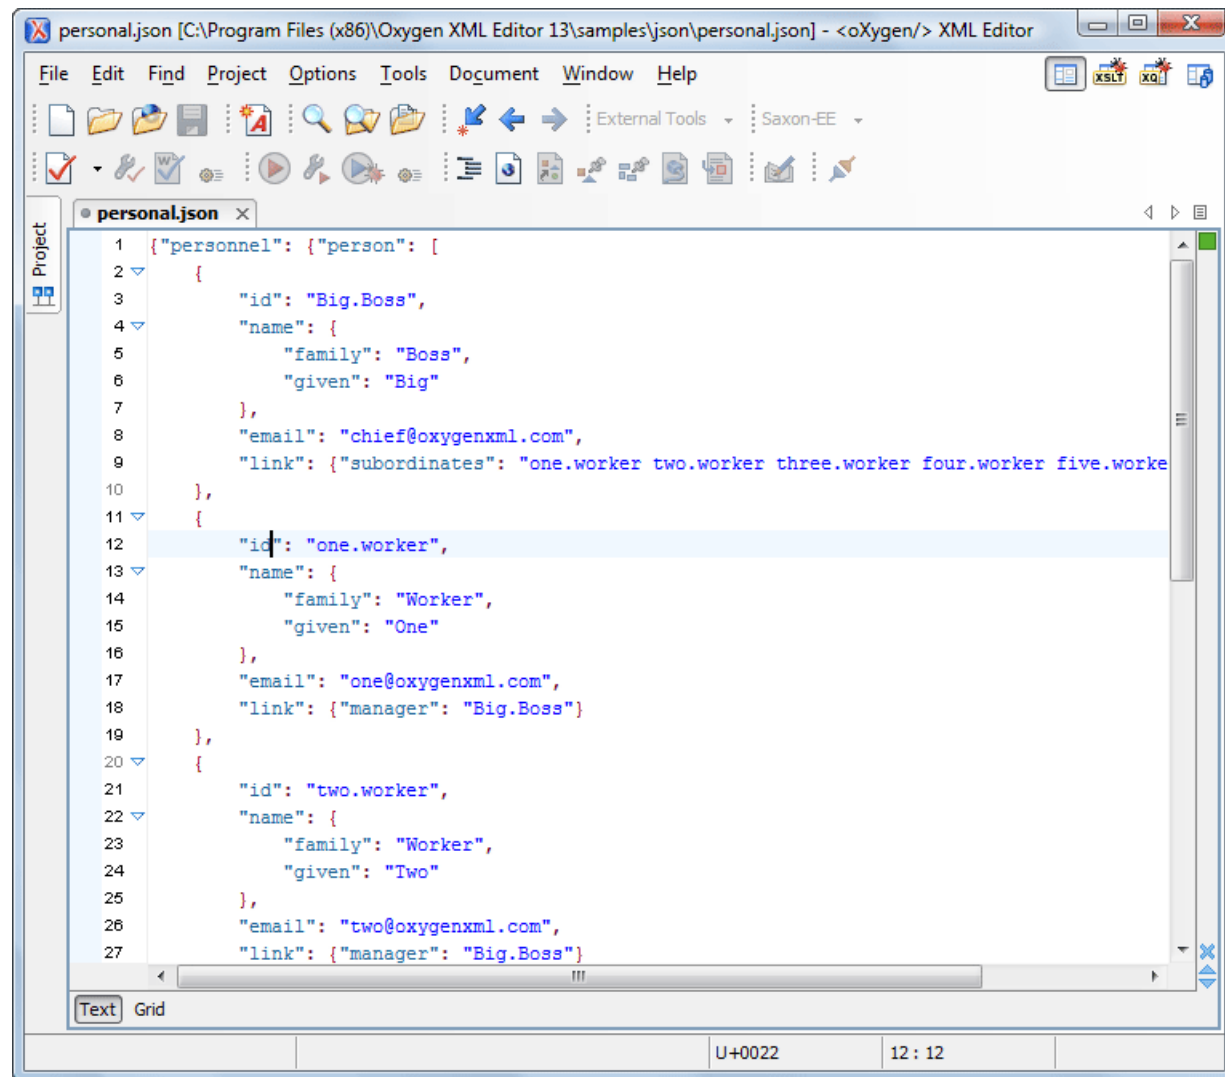


Figure 379: JSON Editor Text Mode

Related Information:

[Text Preferences](#) on page 72

[Editing JSON Documents in Grid Mode](#) on page 629

Editing JSON Documents in Grid Mode

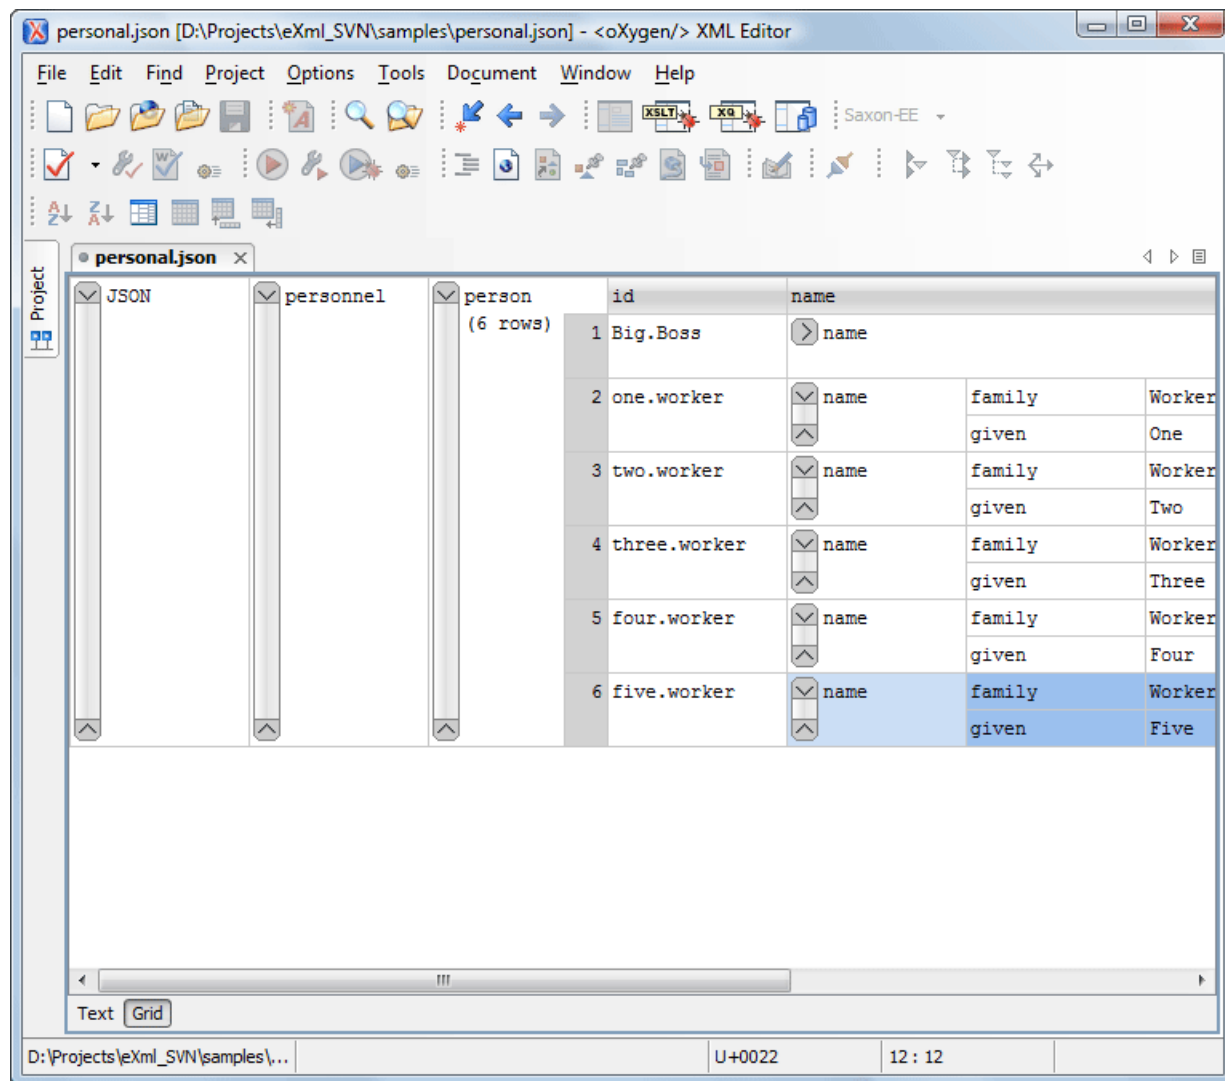


Figure 380: JSON Editor Grid Mode

Oxygen XML Developer allows you to view and edit the JSON documents in the **Grid mode**. The JSON is represented in **Grid** mode as a compound layout of nested tables in which the JSON data and structure can be easily manipulated with table-specific operations or drag and drop operations on the grid components. You can also use the following JSON-specific contextual actions:

Array

Useful when you want to convert a JSON *value* to *array*.

Insert value before

Inserts a value before the currently selected one.

Insert value after

Inserts a value after the currently selected one.

Append value as child

Appends a value as a child of the currently selected value.

You can [customize the JSON grid appearance](#) according to your needs. For instance, you can change the font, the cell background, foreground, or even the colors from the table header gradients. The default width of the columns can also be changed.

Related Information:

[Grid Editing Mode](#) on page 224

Validating JSON Documents

Oxygen XML Developer includes a built-in JSON validator (based on the free JAVA source code available on www.json.org), integrated with the general validation support.

Related Information:

[Presenting Validation Errors in Text Mode](#) on page 207

[Document Checking Preferences](#) on page 77

Syntax Highlighting in JSON Documents

Oxygen XML Developer supports syntax highlighting in JSON files to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for JSON files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **JSON** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

Folding in JSON

In a large JSON document, the data enclosed in the '{' and '}' characters can be collapsed so that only the needed data remain in focus. The [folding features available for XML documents](#) are available in JSON documents.

JSON Outline View

The **Outline** view for JSON documents displays the list of all the components of the JSON document you are editing. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

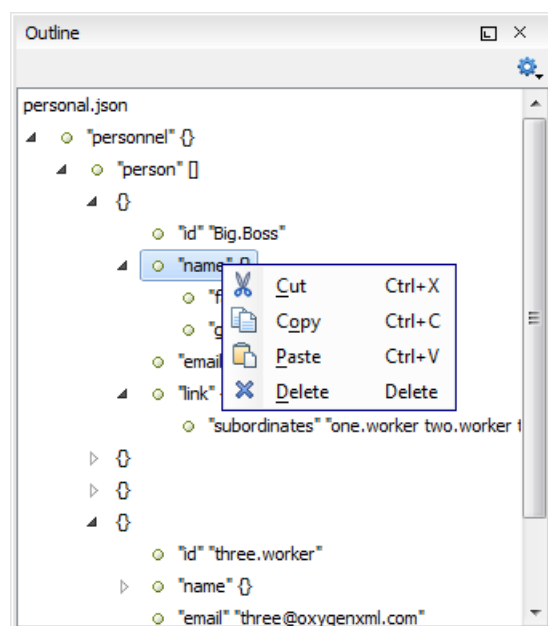


Figure 381: JSON Outline View

The following actions are available in the contextual menu of the JSON **Outline** view:

-  **Cut**
-  **Copy**
-  **Paste**
-  **Delete**

The  **Settings** menu on the JSON **Outline** view toolbar includes a  **Selection update on cursor move** option that allows you to control the synchronization between the **Outline** view and source the document. Oxygen XML Developer synchronizes the selection in the **Outline** view with the cursor moves or the changes you make in the JSON editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

JSON to XML Converter

Oxygen XML Developer includes a useful and simple tool for converting JSON files to XML. It can be found in the **Tools** menu.

To convert a JSON document to XML, follow these steps:

1. Select the **JSON to XML** action from the **Tools** menu.

The **JSON to XML** dialog box is displayed:

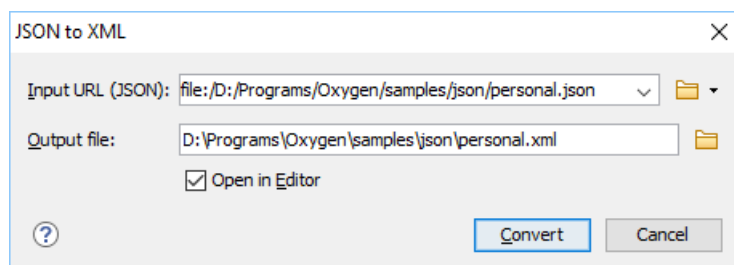


Figure 382: JSON to XML Dialog Box

2. Choose or enter the **Input URL** of the JSON document.
3. Choose the path of the **Output file** that will contain the resulting XML document.
4. Select the **Open in Editor** option to open the resulting XML document in the main editing pane.
5. Click the **Convert** button.

The original JSON document is now converted to an XML document.

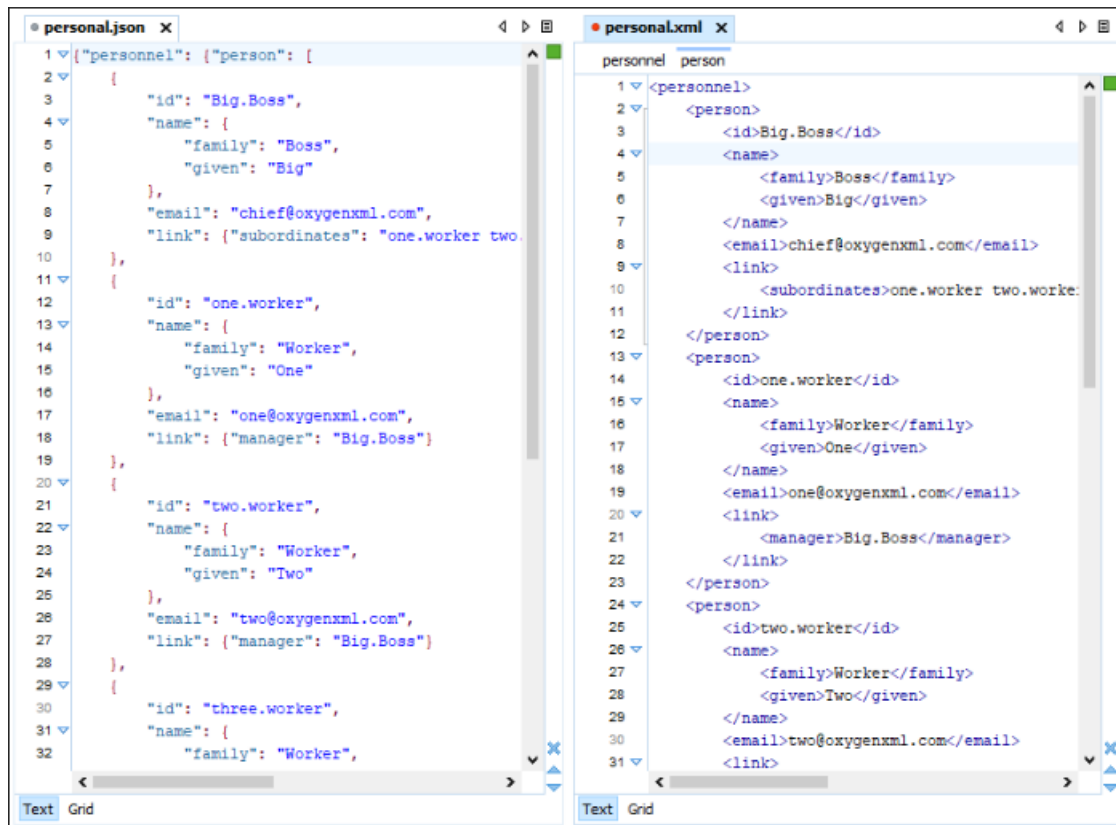


Figure 383: Example: XML to JSON Operation Result

XML to JSON Converter

Oxygen XML Developer includes a useful and simple tool for converting XML files to JSON. It can be found in the **Tools** menu.

To convert an XML document to JSON, follow these steps:

1. Select the **XML to JSON** action from the **Tools** menu.

The **XML to JSON** dialog box is displayed:

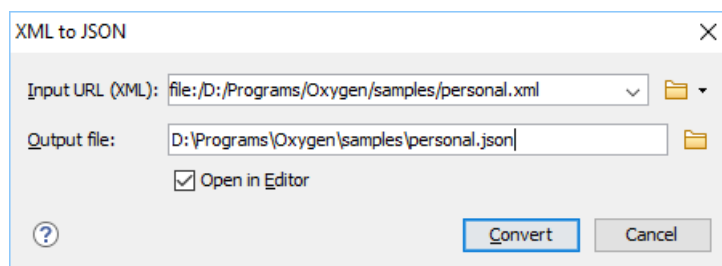


Figure 384: XML to JSON Dialog Box

2. Choose or enter the **Input URL** of the XML document.
3. Choose the path of the **Output file** that will contain the resulting JSON document.
4. Select the **Open in Editor** option to open the resulting JSON document in the main editing pane.
5. Click the **Convert** button.

The original XML document is now converted to a JSON document.

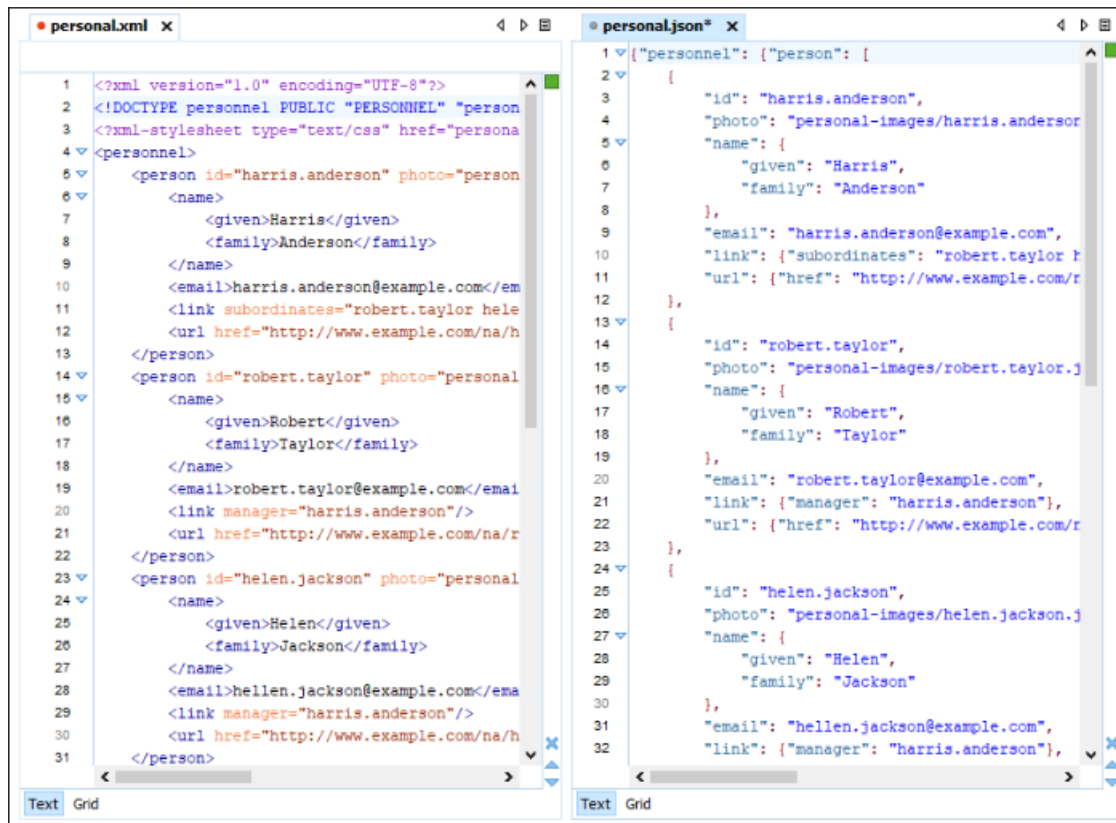


Figure 385: Example: XML to JSON Operation Result

Editing StratML Documents

Strategy Markup Language (StratML) is an XML vocabulary and schema for strategic plans. Oxygen XML Developer supports StratML Part 1 (Strategic Plan) and StratML Part 2 (Performance Plans and Reports) and provides templates for the following documents:

- **Strategic Plan** (StratML Part 1)
- **Performance Plan** (StratML Part 2)
- **Performance Report** - (StratML Part 2)
- **Strategic Plan** - (StratML Part 2)

You can view the components of a StratML document in the [Outline view](#). Oxygen XML Developer implements a default XML with XSLT transformation scenario for this document type, called StratML to HTML.

Editing XLIFF Documents

XLIFF (XML Localization Interchange File Format) is an XML-based format that was designed to standardize the way multilingual data is passed between tools during a localization process. Oxygen XML Developer provides the following support for editing XLIFF documents:

XLIFF Version 1.2 and 2.0 Support:

- New document templates for XLIFF documents.
- A default CSS file (xliiff.css) used for rendering XLIFF content in **Author** mode is stored in `[OXYGEN_INSTALL_DIR]/frameworks/xliiff/css/`.
- Validation and content completion support using local catalogs. The default catalog (catalog.xml) for version 1.2 is stored in `[OXYGEN_INSTALL_DIR]/frameworks/xliiff/xsd/1.2`, and for version 2.0 in `[OXYGEN_INSTALL_DIR]/frameworks/xliiff/xsd/2.0`.

XLIFF Version 2.0 Enhanced Support:

- Support for validating XLIFF 2.0 documents using modules. The default modules are stored in `[OXYGEN_INSTALL_DIR]/frameworks/xliff/xsd/2.0/modules`.

Editing XLIFF Documents in Author Mode

By default, when you create a new XLIFF document [from a template](#), Oxygen XML Developer opens it in **Text** mode. Aside from the normal editing features found in **Text** mode, you can also switch to **Author** mode where Oxygen XML Developer offers some special form controls specifically for XLIFF documents. These form controls simply allow you to add or edit XLIFF attribute values and content in a visual mode.

For XLIFF version 2.0 documents, you can also change the style of the visual editing mode. The **Styles** drop-down menu on the toolbar offers the following styles that are specifically designed to render XLIFF 2.0 documents in **Author** mode:

- **Default**
- **Classic**
- **Translate**

Editing JavaScript Documents

This section explains the features of the Oxygen XML Developer JavaScript Editor and how you can use them.

JavaScript Editing Actions

Oxygen XML Developer allows you to create and edit JavaScript files and assists you with useful features such as syntax highlight, content completion, and outline view. To enhance your editing experience, you can select entire blocks (parts of text delimited by brackets) by double-clicking somewhere inside the brackets.

```

90  function change_sides(front) {
91      switch ($('#version-switch').text()) {
92          case 'Original':
93              $('#holder').html($('#div .original[id]').html());
94              make_clickable();
95              $('#version-switch').text('Translation 1');
96              break;
97          case 'Translation 1':
98              $('#holder').html($('#div .translation[id]').filter(':first').html());
99              $('#version-switch').text('Translation 2');
100             break;
101          case 'Translation 2':
102              $('#holder').html($('#div .translation[id]').filter(':last').html());
103              $('#version-switch').text('Original');
104              break;
105          }
106      }

```

Figure 386: JavaScript Editor Text Mode

The contextual menu of the **JavaScript** editor offers the following actions:



Cut

Allows you to cut fragments of text from the editing area.



Copy

Allows you to copy fragments of text from the editing area.



Paste

Allows you to paste fragments of text in the editing area.



Toggle Comment

Allows you to comment a line or a fragment of the JavaScript document you are editing. This option inserts a single comment for the entire fragment you want to comment.

Toggle Line Comment

Allows you to comment a line or a fragment of the JavaScript document you are editing. This option inserts a comment for each line of the fragment you want to comment.

Go to Matching Bracket

Use this option to find the closing, or opening bracket, matching the bracket at the cursor position. When you select this option, Oxygen XML Developer moves the cursor to the matching bracket, highlights its row, and decorates the initial bracket with a rectangle.

Note: A rectangle decorates the opening or closing bracket that matches the current one, at all times.

Source

Allows you to select one of the following actions:

To Lower Case

Converts the selection content to lower case characters.

To Upper Case

Converts the selection content to upper case characters.

Capitalize Lines

Converts to upper case the first character of every selected line.

Join and Normalize Lines

Joins all the rows you select to one row and normalizes the content.

Insert new line after

Inserts a new line after the line at the cursor position.

Modify all matches

Use this option to modify (in-place) all the occurrences of the selected content. When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Open

Allows you to select one of the following actions:

- **Open File at Cursor** - select this action to open the source of the file located at the cursor position
- **Open File at Cursor in System Application** - select this action to open the source of the file located at the cursor position with the application that the system associates with the file

Compare

Select this option to open the **Compare Files** tool to compare the file you are editing with a file you choose in the dialog box.

Folding

When you invoke the contextual menu from the *folding* triangles in the stripe on the left side of the editor, the following actions are available:

Collapse Other Folds (Ctrl + NumPad/ (Command + NumPad/ on OS X))

Folds all the elements except the current element.

Collapse Child Folds (Ctrl + NumPad. (Command + NumPad. on OS X))

Folds the elements indented with one level inside the current element.

Expand Child Folds

Unfolds all child elements of the currently selected element.

Expand All (Ctrl + NumPad* (Command + NumPad* on OS X))

Unfolds all elements in the current document.

Validating JavaScript Files

You have the possibility to validate the JavaScript document you are editing. Oxygen XML Developer uses the Mozilla Rhino library for validation. For more information about this library, go to <http://www.mozilla.org/rhino/doc.html>. The JavaScript validation process checks for errors in the syntax. Calling a function that is not defined is not treated as an error by the validation process. The interpreter discovers this error when executing the faulted line. Oxygen XML Developer can validate a JavaScript document both on-request and automatically.

Content Completion in JavaScript Documents

When you edit a JavaScript document, the *Content Completion Assistant* presents you a list of the elements you can insert at the cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

For an enhanced assistance, JQuery methods are also presented. The following icons decorate the elements in the content completion list of proposals depending on their type:

-  - function
-  - variable
-  - object
-  - property
-  - method

Note: These icons decorate both the elements from the content completion list of proposals and from the [Outline view](#).



Figure 387: JavaScript Content Completion Assistant

The *Content Completion Assistant* collects:

- Method names from the current file and from the library files.
- Functions and variables defined in the current file.

If you edit the content of a function, the content completion list of proposals contains all the local variables defined in the current function, or in the functions that contain the current one.

Syntax Highlighting in JavaScript Documents

Oxygen XML Developer supports syntax highlighting in JavaScript files to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for JavaScript files, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **JavaScript** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

JavaScript Outline View

Oxygen XML Developer present a list of all the components of the JavaScript document you are editing in the **Outline** view. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

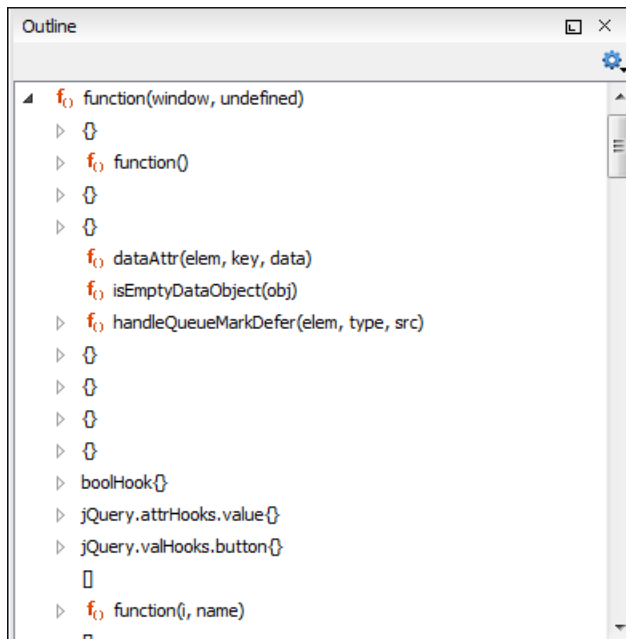


Figure 388: JavaScript Outline View

The following icons decorate the elements in the **Outline** view depending on their type:

-  - function
-  - variable
-  - object
-  - property
-  - method

The contextual menu of the JavaScript **Outline** view contains the usual  **Cut**,  **Copy**,  **Paste**, and  **Delete** actions. From the  **Settings** menu, you can select the **Update selection on cursor move** option to synchronize the **Outline** view with the editing area.

Editing XProc Scripts

An XProc script is edited as an XML document that is validated against a RELAX NG schema. If the script has an associated transformation scenario, then the XProc engine from the scenario is invoked as validating engine. The default engine for XProc scenarios is the Calabash engine that comes bundled with Oxygen XML Developer version 20.0.

XProc Content Completion

Oxygen XML Developer helps you edit XProc scripts through the [Content Completion Assistant](#), offering proposals that are valid at the cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

The content completion inside the element `input/inline` from the XProc namespace <http://www.w3.org/ns/xproc> offers elements from the following schemas depending both on the `port` attribute and the parent of the input element. When invoking the content completion inside the XProc element `inline`, the list of content completion proposals is populated as follows:

- If the value of the `port` attribute is `stylesheet` and the `xslt` element is the parent of the input elements, the *Content Completion Assistant* offers XSLT elements.
- If the value of the `port` attribute is `schema` and the `validate-with-relax-ng` element is the parent of the input element, the *Content Completion Assistant* offers RELAX NG schema elements.
- If the value of the `port` attribute is `schema` and the `validate-with-xml-schema` element is the parent of the input element, the *Content Completion Assistant* offers XML Schema schema elements.
- If the value of the `port` attribute is `schema` and the `validate-with-schematron` element is the parent of the input element, the *Content Completion Assistant* offers either ISO Schematron elements or Schematron 1.5 schema elements.
- If the above cases do not apply, then the *Content Completion Assistant* offers elements from all the schemas from the above cases.



Figure 389: XProc Content Completion

XProc Syntax Highlighting

The XProc editor assists you in writing XPath expressions by offering dedicated coloring schemes for syntax highlighting.

To customize the colors or styles used for the syntax highlighting colors for XProc, follow these steps:

1. Open the [Preferences](#) dialog box (**Options > Preferences**).

2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Enabling Extensions in Calabash

If you are using the default Calabash engine, it is possible to configure extensions (for a list of the valid extensions, see <http://xmlcalabash.com/docs/reference/cfg.extension.html>).

To configure an extension:

1. Edit the following file: `OXYGEN_INSTALL_DIR/lib/xproc/calabash/engine.xml`.
2. Add the extension and its value as a system-property, as in the following example:

```
<system-property name="com.xmlcalabash.allow-text-results" value="true" />
```

Related Information:

[Creating an XProc Transformation Scenario](#) on page 784

This type of transformation specifies the parameters and location of an XProc script.

[Integrating an External XProc Engine](#) on page 786

Editing Schematron Schemas

Schematron is a simple and powerful Structural Schema Language for making assertions about patterns found in XML documents. It relies almost entirely on XPath query patterns for defining rules and checks. Schematron validation rules allow you to specify a meaningful error message. This error message is provided to you if an error is encountered during the validation stage.

Oxygen XML Developer assists you in editing Schematron documents with schema-based content completion, syntax highlight, search and refactor actions, and dedicated icons for the **Outline view**. You can create a new Schematron schema using one of the Schematron templates available in the **New document wizard**.

For information about applying and detecting Schematron schemas, see [Associating a Schema to XML Documents](#) on page 420.

Validating XML Documents Against Schematron

The Skeleton XSLT processor is used for validation and conforms with ISO Schematron or Schematron 1.5. It allows you to [validate XML documents against Schematron schemas](#) or against combined RELAX NG / W3C XML Schema and Schematron.

How to Specify the Query Language Binding

You can specify the query language binding to be used in the Schematron schema by doing the following:

- For embedded ISO schematron, [open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XML Parser > Schematron**, and select it in the **Embedded rules query language binding** option.
- For standalone ISO Schematron, specify the version by setting the query language to be used in a queryBinding attribute on the schema root element. For more information, see the [Query Language Binding section of the Schematron specifications](#).
- For Schematron 1.5 (standalone and embedded), [open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XML Parser > Schematron**, and select the version in the **XPath Version** option.

Multi-Lingual Support in Schematron Messages

You can specify the desired language for the validation messages in [the Schematron Preferences page](#). The Schematron validation messages can be presented in multiple languages by defining the language for each

message using the Schematron diagnostics. For more information, see the [Use of Schematron for Multi-Lingual Schemas](#) specification.

How to Customize Color Schemes in Schematron

The Schematron editor renders the XPath expressions with dedicated coloring schemes. To customize the coloring schemes, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight**.

Schematron Transformation Scenario

When you create a Schematron document, Oxygen XML Developer provides a built-in transformation scenario. You can use this scenario to obtain the XSLT style-sheet corresponding to the Schematron schema. You can apply this XSLT stylesheet to XML documents to obtain the Schematron validation results.

For more information about the Schematron support in Oxygen XML Developer, watch our video demonstrations:

<https://www.youtube.com/embed/HdcZA3DJi7E>

<https://www.youtube.com/embed/y3u3wlO92e4>

<https://www.youtube.com/embed/FQNSsg57S4E>

Related Information:

[Editing XML Documents in Text Mode](#) on page 359

[Associating a Schema to XML Documents](#) on page 420

Editing Schematron Schema in the Master Files Context

Smaller interrelated modules that define a complex Schematron cannot be correctly edited or validated individually, due to their interdependency with other modules. For example, a diagnostic defined in a main schema document is not visible when you edit an included module. Oxygen XML Developer provides the support for defining the main module (or modules), thus allowing you to edit any of the imported/included schema files in the context of the larger schema structure.

You can set a main Schematron document either using the [master files support from the Project view](#), or using a validation scenario.

To set a main file using a validation scenario, add validation units that point to the main schemas. Oxygen XML Developer warns you if the current module is not part of the dependencies graph computed for the main schema. In this case, it considers the current module as the main schema.

The advantages of editing in the context of main file include:

- Correct validation of a module in the context of a larger schema structure.
- [Content Completion Assistant](#) displays all the referable components valid in the current context. This includes components defined in modules other than the currently edited one.

Validating Schematron Documents

By default, a Schematron schema is validated as you type. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the [Enable automatic validation](#) option.

To validate a Schematron document manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. When Oxygen XML Developer validates a Schematron schema, it expands all the included modules so the entire schema hierarchy is validated. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Oxygen XML Developer offers an error management mechanism capable of pinpointing errors in XPath expressions and in the included schema modules.

Related Information:

[Presenting Schematron Validation Issues](#)

Presenting Schematron Validation Issues

The possible issues that might occur during the validation process when validating XML documents against Schematron are presented with colored underlines in the editing pane, colored markers in the right vertical stripe, and details about the issues are presented in the **Errors** panel at the bottom area of the Oxygen XML Developer window. Each error is flagged with a severity level that can be: *warning*, *error*, *fatal* or *info*.

To set a severity level, Oxygen XML Developer looks for the following information:

- The **role** attribute, which can have one of the following values:
 - **warn** or **warning** - Sets the severity level to *warning*. By default, underlined with a yellow squiggly line in the editing pane and a yellow marker in the right vertical stripe.
 - **error** - Sets the severity level to *error*. By default, underlined with a red squiggly line in the editing pane and a red marker in the right vertical stripe.
 - **fatal** - Sets the severity level to *fatal*. By default, underlined with a red squiggly line in the editing pane and a red marker in the right vertical stripe.
 - **info** or **information** - Sets the severity level to *info*. By default, underlined with a blue squiggly line in the editing pane and a blue marker in the right vertical stripe.
- The start of the message, after trimming leading white-spaces. Oxygen XML Developer looks to match the following exact string of characters (case sensitive):
 - **Warning:** - Sets the severity level to *warning*. By default, underlined with a yellow squiggly line in the editing pane and a yellow marker in the right vertical stripe.
 - **Error:** - Sets the severity level to *error*. By default, underlined with a red squiggly line in the editing pane and a red marker in the right vertical stripe.
 - **Fatal:** - Sets the severity level to *fatal*. By default, underlined with a red squiggly line in the editing pane and a red marker in the right vertical stripe.
 - **Info:** - Sets the severity level to *info*. By default, underlined with a blue squiggly line in the editing pane and a blue marker in the right vertical stripe.
- If none of the previous rules match, Oxygen XML Developer sets the severity level to *error*. By default, underlined with a red squiggly line in the editing pane and a red marker in the right vertical stripe.

Tip: You can configure the color for each type in the [Document Checking preferences page](#).

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Validation Scenario](#) on page 408

[Associating a Schema to XML Documents](#) on page 420

[Presenting Validation Errors in Text Mode](#) on page 207

Content Completion in Schematron Documents

Oxygen XML Developer helps you edit a Schematron schema through the [Content Completion Assistant](#), offering proposals that are valid at the cursor position. It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

When you edit the value of an attribute that refers a component, the proposed components are collected from the entire schema hierarchy. For example, if the editing context is `phase/active/@pattern`, the *Content Completion Assistant* proposes all the defined patterns.

Note: For Schematron resources, the *Content Completion Assistant* collects its components starting from the [master files](#). The *master files* can be defined in the project or in the associated validation scenario. For further details about the *Master Files* support go to [Defining Master Files at Project Level](#).

If the editing context is an attribute value that is an XPath expression (such as `assert/@test` or `report/@test`), the *Content Completion Assistant* offers the names of XPath functions, the XPath axes, and user-defined variables.

The *Content Completion Assistant* displays XSLT 1.0 functions and optionally XSLT 2.0 / 3.0 functions in the attributes *path*, *select*, *context*, *subject*, *test* depending on [the Schematron options](#) that are set in Preferences pages. If the Saxon 6.5.5 namespace (`xmlns:saxon="http://icl.com/saxon"`) or the Saxon 9.8.0.8

namespace is declared in the Schematron schema (xmlns:saxon="http://saxon.sf.net/") the content completion also displays the XSLT Saxon extension functions as in the following figure:

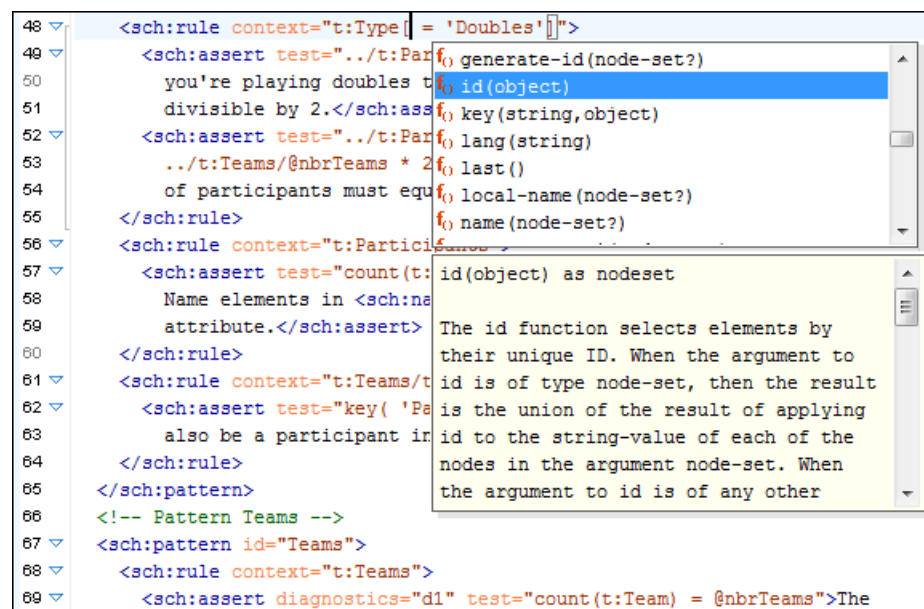


Figure 390: XSLT Extension Functions in Schematron Schema Content Completion

The *Content Completion Assistant* also includes [code templates that can be used to quickly insert code fragments](#) into Schematron documents.

Syntax Highlighting in Schematron

Oxygen XML Developer supports syntax highlighting in Schematron schemas to improve the readability of the content and reduce the time it takes to internalize the semantics of the structured content.

To customize the colors or styles used for the syntax highlighting colors for Schematron schemas, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **XML** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.
5. Select the **XML** tab in the **Preview** pane to see the effects of your changes.

Tip: Oxygen XML Developer also allows you to specify syntax highlighting colors for specific XML elements and attributes with specific namespace prefixes. This can be done in the **Editor > Syntax Highlight > Elements/Attributes by Prefix** preferences page.

Related Information:

[Syntax Highlight Preferences](#) on page 86

XML Schema or RELAX NG with Embedded Schematron Rules

Schematron rules can be embedded into an XML Schema through annotations (using the `appinfo` element), or in any element on any level of a RELAX NG Schema (taking into account that the RELAX NG validator ignores all elements that are not in the RELAX NG namespace).

Oxygen XML Developer accepts such documents as Schematron validation schemas and it is able to extract and use the embedded rules.

Validating XML Documents with XML Schema and Embedded Schematron

To validate an XML document with XML Schema and its embedded Schematron, you can associate the document like this:

```
<?xml-model href="percent.xsd" type="application/xml"
            schematypens="http://purl.oclc.org/dsdl/schematron"?>
```

Validating XML Documents with Relax NG and Embedded Schematron

To validate an XML document with RELAX NG schema and its embedded Schematron rules, you need to associate the document with both schemas like this:

```
<?xml-model href="percent.rng" type="application/xml"
            schematypens="http://relaxng.org/ns/structure/1.0"?>
<?xml-model href="percent.rng" type="application/xml"
            schematypens="http://purl.oclc.org/dsdl/schematron"?>
```

The second association validates your document with Schematron rules extracted from the RELAX NG Schema.

Note: When you work with XML Schema or Relax NG documents that have embedded Schematron rules Oxygen XML Developer provides two built-in validation scenarios: **Validate XML Schema with embedded Schematron** for XML schema , and **Validate Relax NG with embedded Schematron** for Relax NG. You can use one of these scenarios to validate the embedded Schematron rules.

Example: Embedded Schematron in XML Schema

```
<xsd:appinfo>
  <sch:pattern>
    <sch:rule context="...">
      <sch:assert test="...">Message.</sch:assert>
    </sch:rule>
  </sch:pattern>
</xsd:appinfo>
```

Example: Embedded Schematron in Relax NG Schema

```
<grammar
  xmlns="http://relaxng.org/ns/structure/1.0"
  xmlns:sch="http://purl.oclc.org/dsdl/schematron" >
  <sch:pattern>
    <sch:rule context="...">
      <sch:assert test="...">Message.</sch:assert>
    </sch:rule>
  </sch:pattern>
  <start>
    .....
  </start>
</grammar>
```

Related Information:

[Embed Schematron Quick Fixes in Relax NG or XML Schema](#) on page 659

Schematron Outline View

The **Outline** view for Schematron schemas presents a list of components in a tree-like structure and it allows for quick access to a component by name. By default, it is displayed on the left side of the editor. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

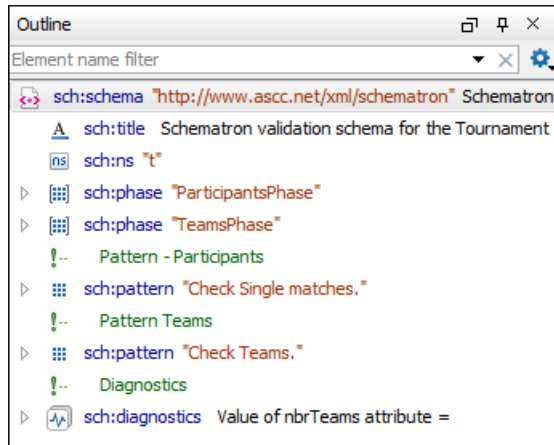


Figure 391: Schematron Outline View

The following actions are available in the  **Settings** menu on the **Outline** view toolbar:

Filter returns exact matches

The text filter of the **Outline** view returns only exact matches.

Selection update on cursor move

Controls the synchronization between **Outline** view and source document. The selection in the **Outline** view can be synchronized with the cursor moves or the changes in the editor. Selecting one of the components from the **Outline** view also selects the corresponding item in the source document.

Flat presentation mode of the filtered results

When active, the application flattens the filtered result elements to a single level.

Show comments and processing instructions

Show/hide comments and processing instructions in the **Outline** view.

Show element name

Show/hide element name.

Show text

Show/hide additional text content for the displayed elements.

Show attributes

Show/hide attribute values for the displayed elements. The displayed attribute values can be changed from [the Outline preferences panel](#).

Configure displayed attributes

Displays the [XML Structured Outline preferences page](#).

The following contextual menu actions are also available in the **Outline** view:

Append Child

Displays a list of elements that you can insert as children of the current element.

Insert Before

Displays a list of elements that you can insert as siblings of the current element, before the current element.

Insert After

Displays a list of elements that you can insert as siblings of the current element, after the current element.

Edit Attributes

Opens a dialog box that allows you to edit the attributes of the currently selected component.

Toggle Comment

Comments/uncomments the currently selected element.

Cut

Cuts the currently selected component.

Copy

Copies the currently selected component.

Delete

Deletes the currently selected component.

Expand More

Expands the structure of a component in the **Outline** view.

Collapse All

Collapses the structure of all the component in the **Outline** view.

The upper part of the **Outline** view contains a filter box that allows you to focus on the relevant components. Type a text fragment in the filter box and only the components that match it are presented. For advanced usage you can use wildcard characters (*, ?) and separate multiple patterns with commas.

Schematron Resource Hierarchy/Dependencies View

The **Resource Hierarchy/Dependencies** view allows you to see the hierarchy/dependencies for a Schematron schema. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

If you want to see the hierarchy of a schema, select the desired schema in the **Project view** and choose **Resource Hierarchy** from the contextual menu.

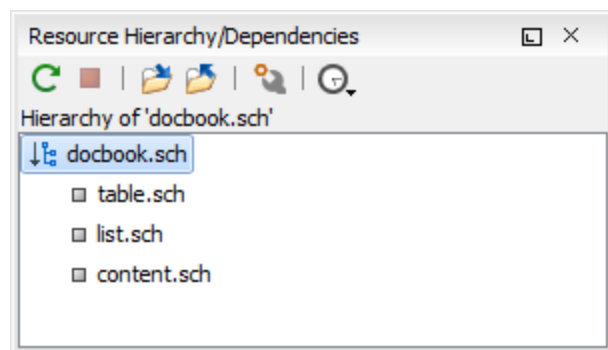


Figure 392: Resource Hierarchy/Dependencies View

If you want to see the dependencies of a schema, select the desired schema in the **Project view** and choose **Resource Dependencies** from the contextual menu.

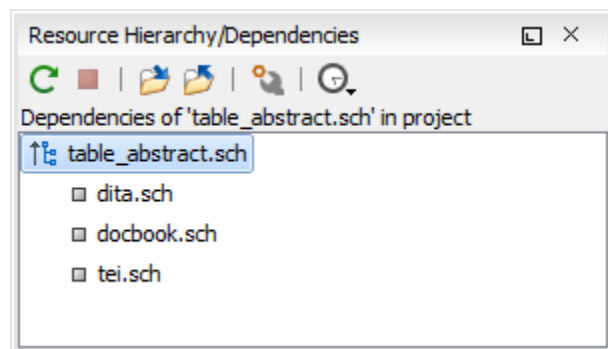


Figure 393: Resource Hierarchy/Dependencies View - Dependencies for `table_abstract.sch`

The following actions are available in the **Resource Hierarchy/Dependencies** view:

Refresh

Refreshes the Hierarchy/Dependencies structure.

Stop

Stops the hierarchy/dependencies computing.

Show Hierarchy

Allows you to choose a resource to compute the hierarchy structure.

Show Dependencies

Allows you to choose a resource to compute the dependencies structure.

Configure

Allows you to configure a scope to compute the dependencies structure. There is also an option for automatically using the defined scope for future operations.

History

Provides access to the list of previously computed dependencies. Use the  **Clear history** button to remove all items from this list.

The contextual menu contains the following actions:

Open

Opens the resource. You can also double-click a resource in the Hierarchy/Dependencies structure to open it.

Copy location

Copies the location of the resource.

Move resource

Moves the selected resource.

Rename resource

Renames the selected resource.

Show Resource Hierarchy

Shows the hierarchy for the selected resource.

Show Resource Dependencies

Shows the dependencies for the selected resource.

Add to Master Files

Adds the currently selected resource in [the Master Files directory](#).

Expand All

Expands all the children of the selected resource from the Hierarchy/Dependencies structure.

Collapse All

Collapses all children of the selected resource from the Hierarchy/Dependencies structure.

Tip: When a recursive reference is encountered in the Hierarchy view, the reference is marked with a special icon .

Note: The **Move resource** or **Rename resource** actions give you the option to [update the references to the resource](#).

Moving/Renaming Schematron Resources

You can move and rename a resource presented in the **Resource/Hierarchy Dependencies** view, using the **Rename resource** and **Move resource** refactoring actions from the contextual menu.

When you select the **Rename** action in the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Rename resource** dialog box is displayed. The following fields are available:

- **New name** - Presents the current name of the edited resource and allows you to modify it.
- **Update references** - Select this option to update the references to the resource you are renaming.

When you select the **Move** action from the contextual menu of the **Resource/Hierarchy Dependencies** view, the **Move resource** dialog box is displayed. The following fields are available:

- **Destination** - Presents the path to the current location of the resource you want to move and gives you the option to introduce a new location.
- **New name** - Presents the current name of the moved resource and gives you the option to change it.
- **Update references of the moved resource(s)** - Select this option to update the references to the resource you are moving, in accordance with the new location and name.

If the **Update references of the moved resource(s)** option is selected, a **Preview** option (which opens the **Preview** dialog box) is available for both actions. The **Preview** dialog box presents a list with the resources that are updated.

Highlight Component Occurrences in Schematron Documents

When you position your mouse cursor over a component in a Schematron document, Oxygen XML Developer searches for the component declaration and all its references and highlights them automatically.

Customizable colors are used: one for the component definition and another one for component references. Occurrences are displayed until another component is selected.

To change the default behavior of **Highlight Component Occurrences**, open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File** **Ctrl + Shift + U** (**Command + Shift + U on OS X**) action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Searching and Refactoring Operations in Schematron Documents

Search Actions

The following search actions can be applied on pattern, phase, or diagnostic types and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

Refactoring Actions

The following refactoring actions can be applied on pattern, phase, or diagnostic types and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.

-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

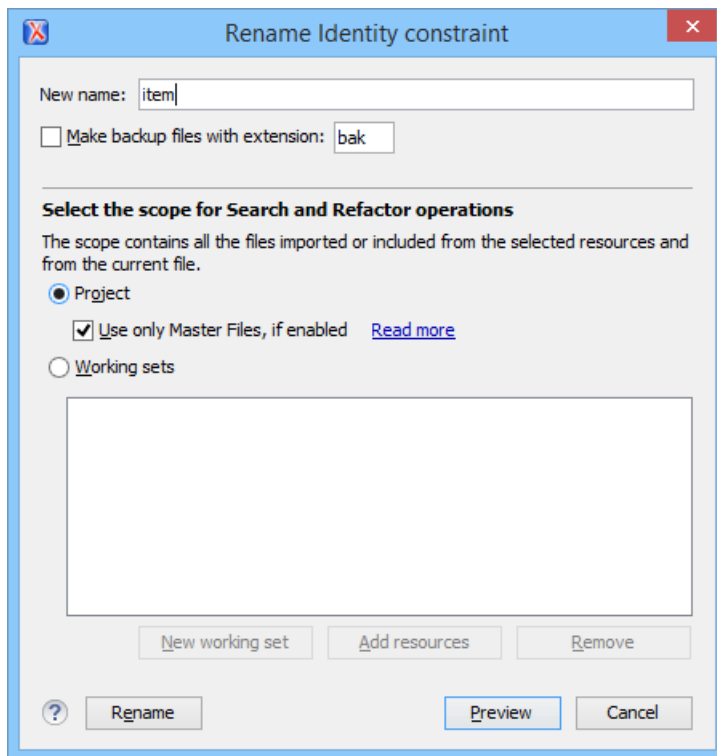


Figure 394: Rename Identity Constraint Dialog Box

Searching and Refactoring Operations Scope in Schematron Documents

The *scope* is a collection of documents that define the context of a search and refactor operation. To control it you can use the  **Change scope** operation, available in the *Quick Assist* action set or on the **Resource Hierarchy/Dependency View** toolbar. You can restrict the scope to the current project or to one or multiple *working sets*. The **Use only Master Files, if enabled** checkbox allows you to restrict the scope of the search and refactor operations to the resources from the **Master Files** directory. Click **read more** for details about the *Master Files* support.

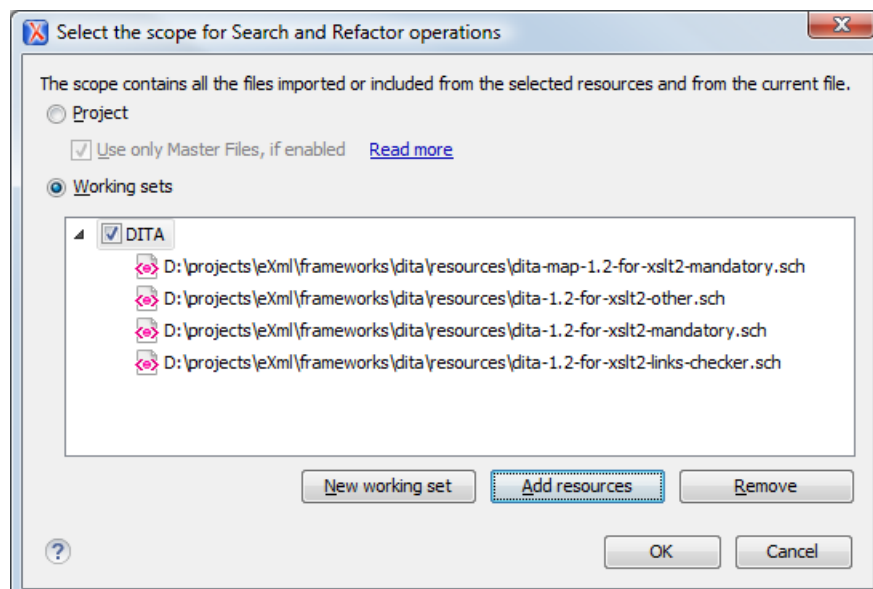


Figure 395: Change Scope Dialog Box

The scope you define is applied to all future search and refactor operations until you modify it. Contextual menu actions allow you to add or delete files, folders, and other resources to the [working set](#) structure.

Quick Assist Support in Schematron Documents

The [Quick Assist support](#) improves the development work flow, offering fast access to the most commonly used actions when you edit schema documents.

The [Quick Assist feature](#) is activated automatically when the cursor is positioned over the name of a component. It is accessible via a yellow bulb icon (💡) placed at the current line in the stripe on the left side of the editor. Also, you can invoke the *quick assist* menu by using the **Alt + 1** (**Meta + Alt + 1** on Mac OS X) keyboard shortcuts.

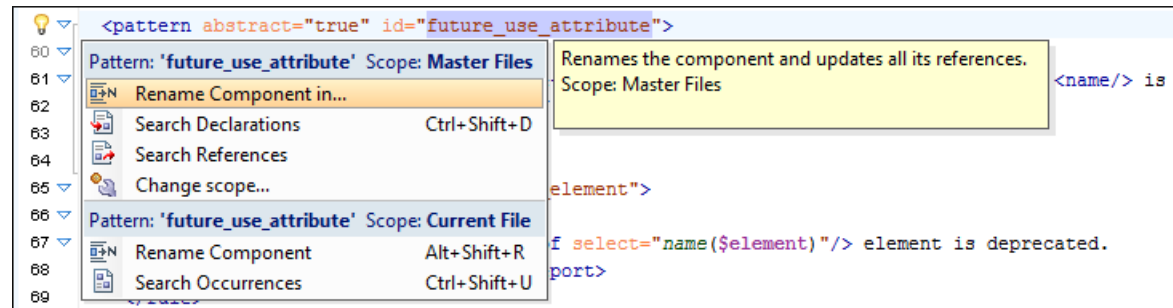


Figure 396: Schematron Quick Assist Support

The *Quick Assist* support offers direct access to the following actions:

Rename Component in

Renames the component and all its dependencies.

Search Declarations

Searches the declaration of the component in a predefined scope. It is available only when the context represents a component name reference.

Search References

Searches all references of the component in a predefined scope.

Component Dependencies

Searches the component dependencies in a predefined scope.

Change Scope

Configures the scope that will be used for future search or refactor operations.

Rename Component

Allows you to rename the current component in-place.

Search Occurrences

Searches all occurrences of the component within the current file.

Schematron Unit Test (XSpec)

XSpec is a behavior driven development (BDD) *framework* for XSLT, XQuery, and Schematron. XSpec consists of a syntax for describing the behavior of your XSLT, XQuery, or Schematron code, and some code that enables you to test your code against those descriptions.

Creating a Schematron Unit Test

To create a Schematron Unit Test, go to **File > New > Schematron Unit Test**. This is simple document template to help you get started.

Running a Schematron Unit Test

To run a Schematron Unit Test, open the XSpec file in an editor and click  **Apply Transformation Scenario(s)** on the main toolbar. This will run the built-in **Run XSpec Test** transformation scenario that is defined in the XSpec [framework](#).

Testing a Stylesheet

An XSpec file contains one or more test scenarios.

Example

Suppose you have this Schematron rule that says sections should have a title:

```
<sch:pattern>
  <sch:rule context="section">
    <sch:assert test="title" id="a002">
      section should have a title
    </sch:assert>
  </sch:rule>
</sch:pattern>
```

The XSpec test could look like this:

```
<x:description xmlns:x="http://www.jenitennison.com/xslt/xspec" schematron="demo-01.sch">
  <x:scenario label="section should have a title">
    <x:context>
      <article>
        <section>
          <title>Introduction</title>
          <p>This is an example.</p>
        </section>
        <section>
          <p>This is an example.</p>
        </section>
      </article>
    </x:context>

    <x:expect-not-assert id="a002" location="/article[1]/section[1]" />
    <x:expect-assert id="a002" location="/article[1]/section[2]" />
  </x:scenario>
</x:description>
```

The `sch:assert` with the `id="a002"` is not expected to be triggered on the first section since it includes a title. This requirement is expressed with the `x:expect-not-assert` element.

Since the second section does not have a title, you would expect the Schematron rule to be triggered and this requirement is expressed with the `x:expect-assert` element.

For more details about how to write Schematron tests and various samples, see <https://github.com/xspec/xspec/wiki/Writing-Scenarios-for-Schematron#writing-tests>.

Adding a Catalog to an XSpec Transformation

If your Schematron needs a catalog, you can add one to the XSpec transformation by doing one of the following:

- If you are using a [project](#) in Oxygen XML Developer, create a `catalog.xml` file in the project directory. This catalog will then be loaded automatically.
- [Edit](#) the **Run XSpec Test** transformation scenario, go to the **Parameters** tab, and set the value of the `catalog` parameter to the location of your catalog file.

Editing Schematron Quick Fixes

Oxygen XML Developer provides support for editing the [Schematron Quick Fixes](#). You can define a library of *Quick Fixes* by editing them directly in the current Schematron file or in a separate file. Oxygen XML Developer assists you in editing Schematron *Quick Fixes* with schema-based content completion, syntax highlighting, and validation as you type.

For information about applying and detecting the Schematron schemas that include SQF, see [Associating a Schema to XML Documents](#) on page 420.

Related Information:

[Oxygen XML Blog: Schematron Checks to Help Technical Writing](#)

Schematron Quick Fixes (SQF)

Oxygen XML Developer provides support for Schematron *Quick Fixes* (SQF). They help you resolve issues that appear in XML documents that are validated against Schematron schemas by offering you solution proposals. The Schematron *Quick Fixes* are an extension of the Schematron language and they allow you to define fixes for Schematron validation messages. Specifically, they are associated with *assert* or *report* messages.

A typical use case is using Schematron *Quick Fixes* to assist content authors with common editing tasks. For example, you can use Schematron rules to automatically report certain validation warnings (or errors) when performing regular editing tasks, such as inserting specific elements or changing IDs to match specific naming conventions. For more details and examples, please see the following blog post: <http://blog.oxygenxml.com/2015/05/schematron-checks-to-help-technical.html>.

Displaying the Schematron Quick Fix Proposals

The defined Schematron *Quick Fixes* are displayed on validation errors in **Text** mode.

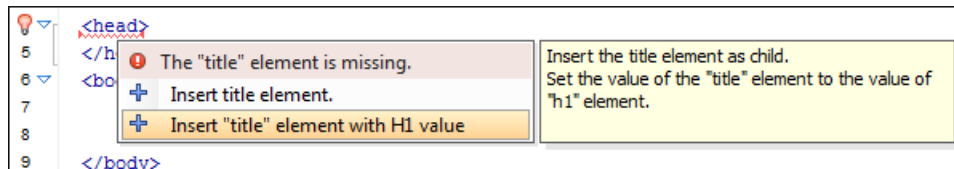


Figure 397: Example of a Schematron Quick Fix

Related Information:

[Editing Schematron Quick Fixes](#) on page 650

[Schematron Quick Fix Specifications](#)

[Presenting Schematron Validation Issues](#)

Defining Schematron Quick Fixes

You can define and customize Schematron *Quick Fixes* directly in the current Schematron file or in a separate Schematron file. The Schematron *Quick Fixes* are an extension of the Schematron language and they allow you to define fixes for Schematron error messages. You can refer the *Quick Fixes* from the *assert* or *report* elements in the values of the `sqf:fix` attributes.

Defining a Schematron Quick Fix

The basics of a Schematron *Quick Fix* is defined by an ID, name, description, and the operations to be executed.

- **ID** - Defined by the `id` attribute from the `fix` element and must be unique in the current context. It is used to refer the *Quick Fix* from a *report* or *assert* element.
- **Name** - The name of the *Quick Fix* is defined by the `title` element.
- **Description** - Defined by the text in the paragraphs (`p`) of the `description` element.
- **Operations** - The following basic types of *operations (elements)* are supported:
 - `<sqf:add>` Element - To add a new node or fragment in the document.
 - `<sqf:delete>` Element - To remove a node from the document.
 - `<sqf:replace>` Element - To replace a node with another node or fragment.
 - `<sqf:stringReplace>` Element - To replace text content with other text or a fragment.

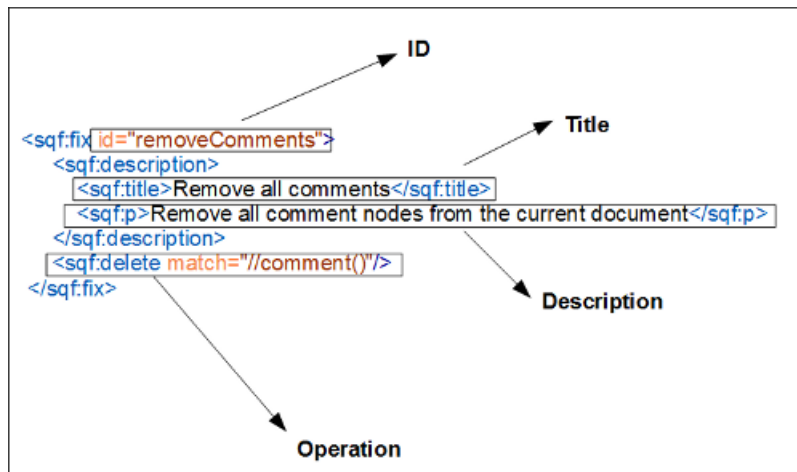


Figure 398: Schematron Quick Fix Components

The assertion message that generates the *Quick Fix* is added as the description of the problem to be fixed. The title is presented as the name of the *Quick Fix*. The content of the paragraphs (p) within the description element are presented in the tooltip message when the *Quick Fix* is selected.

Additional Elements Supported in the Schematron Quick Fixes

<sqf:user-entry>

This element defines a value that must be set manually by the user. For more information, see [User Entry SQF Operation](#) on page 655.

<sqf:call-fix>

This element calls another *Quick Fix* within a *Quick Fix*. The called *Quick Fix* must be defined globally or in the same Schematron rule as the calling *Quick Fix*. A calling *Quick Fix* adopts the activity elements of the called *Quick Fix* and should not include other activity elements. You can also specify which parameters are sent by using the `<sqf:with-param>` child element.

<sqf:group>

Allows you to group multiple *Quick Fixes* and refer them from an assert or report element.

<sqf:fixes>

Is defined globally and contains global fixes and groups of fixes.

<sqf:copy-of>

Used to copy the selected nodes that are specified by the select attribute. The element with its attribute is treated as an `xsl:copy-of` with a select attribute, as defined in the XSLT specification.

<sqf:param>

Defines a parameter for a *Quick Fix*. If the parameter is defined as abstract then the type and default value should not be specified and the fix can be called from an abstract pattern that defines this parameter.

Other SQF Notes

Note: The `sqf:default-fix` attribute is ignored in Oxygen XML Developer.

For more details on editing Schematron *Quick Fixes*, go to: [Schematron Quick Fix Specifications](#)

Basic Schematron Quick Fix Operations

There are four basic operations that can be executed in a Schematron *Quick Fix*: **Add**, **Delete**, **Replace**, and **String Replace**.

Add

The `<sqf:add>` element allows you to add a node to the instance. An *anchor* node is required to select the position for the new node. The *anchor* node can be selected by the match attribute. Otherwise, it is selected by the context attribute of the rule.

The `target` attribute defines the name of the node to be added. It is required if the value of the `node-type` attribute is set to anything other than "comment".

The `<sqf:add>` element has a `position` attribute and it determines the position relative to the *anchor* node. The new node could be specified as the first child of the *anchor* node, the last child of the *anchor* node, before the *anchor* node, or after the *anchor* node (first-child is the default value). If you want to add an attribute to the *anchor* node, do not use the `position` attribute.

Note: If you insert an element and its content is empty, Oxygen XML Developer will insert the required element content.

An Example of the `<sqf:add>` Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process"
  queryBinding="xslt2">
  <pattern>
    <rule context="head">
      <assert test="title" sqf:fix="addTitle">title element missing.</assert>
      <sqf:fix id="addTitle">
        <sqf:description>
          <sqf:title>Insert title element.</sqf:title>
        </sqf:description>
        <sqf:add target="title" node-type="element">Title text</sqf:add>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Specific Add Operations:

- **Insert Element** - To insert an element, use the `<sqf:add>` element, set the value of the `node-type` to "element", and specify the element *QName* with the `target` attribute. If the element has a prefix, it must be defined in the Schematron using a namespace declaration (`<ns uri="namespace" prefix="prefix"/>`).
- **Insert Attribute** - To insert an attribute, use the `<sqf:add>` element, set the value of the `node-type` to "attribute", and specify the attribute *QName* with the `target` attribute. If the attribute has a prefix, it must be defined in the Schematron using a namespace declaration (`<ns uri="namespace" prefix="prefix"/>`).
- **Insert Fragment** - If the `node-type` is not specified, the `<sqf:add>` element will insert an XML fragment. The XML fragment must be well formed. You can specify the fragment in the `add` element or by using the `select` attribute.
- **Insert Comment** - To insert a comment, use the `<sqf:add>` element and set the value of the `node-type` to "comment".
- **Insert Processing Instruction** - To insert a processing instruction, use the `<sqf:add>` element, set the value of the `node-type` to "pi" or "processing-instruction", and specify the name of the processing instruction in the `target` attribute.

Delete

The `<sqf:delete>` element allows you to remove any type of node (such as elements, attributes, text, comments, or processing instructions). To specify nodes for deletion the `<sqf:delete>` element can include a `match` attribute that is an XPath expression (the default value is `.`). If the `match` attribute is not included, it deletes the context node of the Schematron rule.

An Example of the `<sqf:delete>` Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron" queryBinding="xslt2"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process">
  <pattern>
    <rule context="*[@xml:lang]">
      <report test="@xml:lang" sqf:fix="remove_lang">
        The attribute "xml:lang" is forbidden.</report>
      <sqf:fix id="remove_lang">
        <sqf:description>
          <sqf:title>Remove "xml:lang" attribute</sqf:title>
        </sqf:description>
        <sqf:delete match="@xml:lang"/>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Replace

The `<sqf:replace>` element allows you to replace nodes. Similar to the `<sqf:delete>` element, it can include a `match` attribute. Otherwise, it replaces the context node of the rule. The `<sqf:replace>` element has three tasks. It identifies the nodes to be replaced, defines the replacing nodes, and defines their content.

An Example of the `<sqf:replace>` Element:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process"
  queryBinding="xslt2">
  <pattern>
    <rule context="title">
      <report test="exists(ph)" sqf:fix="resolvePh" role="warn">
        ph element is not allowed in title.</report>
      <sqf:fix id="resolvePh">
        <sqf:description>
          <sqf:title>Change the ph element into text</sqf:title>
        </sqf:description>
        <sqf:replace match="ph">
          <value-of select="."/>
        </sqf:replace>
      </sqf:fix>
    </rule>
  </pattern>
</schema>
```

Other Attributes for Replace Operations:

- **node-type** - Determines the type of the replacing node. The permitted values include:
 - `keep` - Keeps the node type of the node to be replaced.
 - `element` - Replaces the node with an element.
 - `attribute` - Replaces the node with an attribute.
 - `pi` - Replaces the node with a processing instruction.
 - `comment` - Replaces the node with a comment.
- **target** - By using a [QName](#) it gives the replacing node a name. This is necessary when the value of the `node-type` attribute is anything other than "comment".
- **select** - Allows you to choose the content of the replacing nodes. You can use XPath expressions with the `select` attribute. If the `select` attribute is not specified then the content of the `<sqf:replace>` element is used instead.

String Replace

The `<sqf:stringReplace>` element is different from the others. It can be used to find a sub-string of text content and replace it with nodes or other strings.

Attributes for the String Replace Operation:

- **match** - Allows you to select text nodes that contain the sub-strings you want to replace.
- **select** - Allows you to select the replacing fragment, in case you do not want to set it in the content of the `stringReplace` element.
- **regex** - Matches the sub-strings using a regular expression.

Note: Consider the following information about using regular expressions in the `stringReplace` element:

- The regular expressions from this operation are compiled as Java regular expressions. For more information, see <https://docs.oracle.com/javase/7/docs/api/java/util/regex/Pattern.html>.
- The **j flag** allows you to use the standard Java regular expression engine, which allows native Java regular expression syntax. This allows, for example, the use of `\b` in a regular expression to match word boundaries. For more information, see <http://www.saxonica.com/html/documentation/functions/fn/matches.html>.
- Regular expressions in the `<sqf:stringReplace>` element always have the *dot matches all* flag set to "true". Therefore, the line terminator will also be matched by the regular expression.
- **flags** - Specifies flags to control the interpretation of the regular expression (given in the `regex` attribute).



Attention: The context of the content within the `<sqf:stringReplace>` element is set to the whole text node, rather than the current sub-string.

An Example of the <sqf:stringReplace> Element:

```
<?xml version="1.0" encoding="UTF-8"?>
<sch:schema xmlns:sch="http://purl.oclc.org/dsdl/schematron"
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process"
  queryBinding="xslt2">
  <sch:pattern>
    <sch:rule context="text()">
      <sch:report test="matches(., 'Oxygen', 'i')">
        <sqf:fix id="changeWord">The oXygen word is not allowed</sch:report>
        <sqf:fix id="changeWord">
          <sqf:description>
            <sqf:title>Replace word with product</sqf:title>
          </sqf:description>
          <sqf:stringReplace regex="Oxygen" flags="i"><ph keyref="product"/>
          </sqf:stringReplace>
        </sqf:fix>
      </sch:rule>
    </sch:pattern>
  </sch:schema>
```

Related Information:

[User Entry SQF Operation](#) on page 655

[Restricting Quick Fix Operations](#) on page 655

User Entry SQF Operation

The <sqf:user-entry> element defines a value that must be set manually by the user. If multiple user-entry elements are defined, Oxygen XML Developer will display a dialog box for each one, in which the user can specify values. Also, the <user-entry> element can be used as an XPath variable where the XPath variable is the name of the user-entry. Note that the default attribute defines a default value for the operation by using an XPath expression (as in the example below) and its value will be presented in the user entry dialog box.

An Example of the <sqf:user-entry> Element:

```
<sqf:fix id="editTitle">
  <sqf:description>
    <sqf:title>Edit the journal title</sqf:title>
  </sqf:description>
  <sqf:user-entry name="newTitle" default="@title">
    <sqf:description>
      <sqf:title>Edit the title:</sqf:title>
    </sqf:description>
  </sqf:user-entry>
  <sqf:replace match="@title" target="title" node-type="keep" select="$newTitle"/>
</sqf:fix>
```

Related Information:

[Basic Schematron Quick Fix Operations](#) on page 652

Restricting Quick Fix Operations

To restrict a [Quick Fix](#) or a specific operation to only be available if certain conditions are met, the use-when attribute can be included in the <sqf:fix> element or any of the SQF operation elements. The condition of the use-when attribute is an XPath expression and the fix or operation will be performed only if the condition is satisfied. In the following example, the use-when condition is applied to the <sqf:fix> element:

```
<sqf:fix id="last" use-when="$colWidthSummarized - 100 lt $lastWidth"
  role="replace">
  <sqf:description>
    <sqf:title>Subtract excessive width from the last element.</sqf:title>
  </sqf:description>
  <let name="delta" value="$colWidthSummarized - 100"/>
  <sqf:add match="html:col[last()]" target="width" node-type="attribute">
    <let name="newWidth" value="number(substring-before(@width,'%')) - $delta"/>
    <value-of select="concat($newWidth,'%')"/>
  </sqf:add>
</sqf:fix>
```

Related Information:

[Basic Schematron Quick Fix Operations](#) on page 652

Formatting/Indenting Content Inserted by SQF Operations

Content that is inserted by the **Add**, **Replace**, or **String Replace** Schematron *Quick Fix* operations is automatically indented unless you set the value of the `xml:space` attribute to `preserve` on the operation element. There are several methods available to format the content that is inserted:

- **xml:text** - You can use an `xml:text` element to format the inserted content and keep the automatic indentation, as in the following example:

```
<sqf:add position="last-child">
  <row><xml:text>
    </xml:text>
    <entry>First column</entry><xml:text>
    </xml:text>
    <entry>Second column</entry><xml:text>
    </xml:text>
  </row><xml:text>
</xml:text>
</sqf:add>
```

- **xml:space** - Use the `xml:space` attribute and set its value to `preserve` to format the content and specify the spacing between elements, as in the following example:

```
<sqf:add node-type="element" target="codeblock" xml:space="preserve">
/* a long sample program */
Do forever
  Say "Hello, World"
End</sqf:add>
```

Related Information:

[Basic Schematron Quick Fix Operations](#) on page 652

Executing Schematron Quick Fixes in Other Documents

You can apply Schematron *Quick Fixes* over nodes from referenced documents (using `XInclude` or external entities), and you can access them as nodes in your current document.

Also, you can apply the *Quick Fixes* over other documents using the `doc()` function in the value of the `match` attribute. For example, you can add a new key in the `keylist.xml` file using the following operation:

```
<sqf:add match="doc('keylist.xml')/KeyList" target="Key"
node-type="element" select="Key2">
```

Generate Multiple Similar Quick Fixes

You can generate the same Schematron *Quick Fix* for multiple matches. To do this, you can add the `use-for-each` attribute inside the `sqf:fix` element and for each match of the XPath expression in the value of the `use-for-each` attribute, a Quick Fix will be presented to the user. The XPath expression does not change the context of the Quick Fix. If you want to access the current match from the XPath expression, you can use the `$sqf:current` variable.

Example:

Suppose you want to restrict the user from entering more than 4 list items in a list. The following example presents an error on any list that has more than 4 list items and offers a Quick Fix with multiple proposals where the user would specify which list item to remove.

```
<sch:rule context="ul">
  <sch:report test="count(li) gt 4" sqf:fix="removeAnyItem">
    The list cannot contain more than 4 entries.
  </sch:report>
  <sqf:fix id="removeAnyItem" use-for-each="1 to count(li)">
    <sqf:description>
      <sqf:title>Remove item #<sch:value-of select="$sqf:current"/></sqf:title>
    </sqf:description>
    <sqf:delete match="li[$sqf:current]"/>
  </sqf:fix>
</sch:rule>
```

Localizing SQF Messages

Oxygen XML Developer provides support for presenting Schematron Quick Fix messages in multiple languages. The language used for the SQF messages is the language specified in the ['Message Language' option in the](#)

[Schematron preferences page](#). If you want to provide an alternative message for a specific language, you can reference IDs or key values for the specific alternate text phrase. In Oxygen XML Developer, the alternate text phrase is defined in a `sch:diagnostic` element.

Example:

The following example presents a quick fix with a different message depending on whether the user's language is English or German.

```
<sch:rule context="dog">
  <sch:assert test="bone" diagnostics="d_en d_de" sqf:fix="addBone" >
    A dog should have a bone.</sch:assert>

  <sqf:fix id="addBone">
    <sqf:description>
      <sqf:title ref="fix_en fix_de" xml:lang="en">Add a bone</sqf:title>
      <sqf:p ref="fix_desc_en fix_desc_de" xml:lang="en">Add bone element as child</sqf:p>
    </sqf:description>
    <sqf:add node-type="element" target="bone" />
  </sqf:fix>
</sch:rule>
...
<sch:diagnostics xml:lang="en">
  <sch:diagnostic id="d_en"> A dog should have a bone. </sch:diagnostic>
  <sch:diagnostic id="fix_en"> Add a bone </sch:diagnostic>
  <sch:diagnostic id="fix_desc_en">Add a bone element as child</sch:diagnostic>
</sch:diagnostics>
<sch:diagnostics xml:lang="de">
  <sch:diagnostic id="d_de"> Ein Hund sollte ein Bein haben. </sch:diagnostic>
  <sch:diagnostic id="fix_de"> FÅgen Sie einen Knochen hinzu </sch:diagnostic>
  <sch:diagnostic id="fix_desc_de"> FÅgen Sie ein Knochelement als
    untergeordnetes Element hinzu </sch:diagnostic>
</sch:diagnostics>
```

Validating Schematron Quick Fixes

By default, Schematron [Quick Fixes](#) are validated as you edit them within the Schematron file or while editing them in a separate file. To change this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Editor > Document Checking**, and deselect the [Enable automatic validation](#) option.

To validate Schematron *Quick Fixes* manually, select the  **Validate** action from the  **Validation** toolbar drop-down menu or the **Document > Validate** menu. The validation problems are highlighted directly in the editor, making it easy to locate and fix any issues.

Related Information:

[Validating XML Documents Against a Schema](#) on page 403

[Validation Scenario](#) on page 408

[Presenting Validation Errors in Text Mode](#) on page 207

Content Completion in SQF

Oxygen XML Developer helps you edit Schematron [Quick Fixes](#) embedded in a Schematron document by offering proposals that are valid at the cursor position in a [Content Completion Assistant](#). It can be manually activated with the **Ctrl + Space (Command + Space on OS X)** shortcut.

When you edit the value of an attribute that references a *Quick Fix ID*, the ids are collected from the entire definition scope. For example, if the editing context is `assert/@sqf:fix`, the *Content Completion Assistant* proposes all fixes defined locally and globally.

If the editing context is an attribute value that is an XPath expression (such as `sqf:add/@match` or `replace/@select`), the *Content Completion Assistant* offers the names of XPath functions, the XPath axes, and user-defined variables and parameters.

The *Content Completion Assistant* displays XSLT 1.0 functions (and optionally XSLT 2.0 / 3.0 functions) in the attributes *path*, *select*, *context*, *subject*, and *test*, depending on the [Schematron options](#) that are set in Preferences pages. If the Saxon 6.5.5 namespace (`xmlns:saxon="http://icl.com/saxon"`) or the Saxon 9.8.0.8 namespace is declared in the Schematron schema (`xmlns:saxon="http://saxon.sf.net/"`) the content completion also displays the XSLT Saxon extension functions.

Highlight Quick Fix Occurrences in SQF

When you position your mouse cursor over a *Quick Fix* ID in a Schematron document, Oxygen XML Developer searches for the *Quick Fix* declaration and all its references and highlights them automatically.

Customizable colors are used: one for the *Quick Fix* definition and another one for its references. Occurrences are displayed until another *Quick Fix* is selected.

To change the default behavior of **Highlight Component Occurrences**, open the **Preferences** dialog box (**Options > Preferences**) and go to **Editor > Mark Occurrences**. You can also trigger a search using the **Search > Search Occurrences in File (Ctrl + Shift + U (Command + Shift + U on OS X))** action from contextual menu. Matches are displayed in separate tabs of the **Results** view.

Searching and Refactoring Operations in SQF

Search Actions

The following search actions can be applied on *Quick Fix* IDs and are available from the **Search** submenu in the contextual menu of the current editor or from the **Document > References** menu:

-  **Search References** - Searches all references of the item found at current cursor position in the defined scope, if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box is displayed and you have the possibility to define another search scope.
- **Search References in** - Searches all references of the item found at current cursor position in the file or files that you specify when define a scope in the **Search References** dialog box.
-  **Search Declarations** - Searches all declarations of the item found at current cursor position in the defined scope if any. If a scope is defined, but the current edited resource is not part of the range of resources determined by this, a warning dialog box will be displayed and you have the possibility to define another search scope.
- **Search Declarations in** - Searches all declarations of the item found at current cursor position in the file or files that you specify when you define a scope for the search operation.
-  **Search Occurrences in File** - Searches all occurrences of the item at the cursor position in the currently edited file.

Refactoring Actions

The following refactoring actions can be applied on *Quick Fix* IDs and are available from the **Refactoring** submenu in the contextual menu of the current editor or from the **Document > Refactoring** menu:

- **Rename Component** - Allows you to rename the current component (in-place). The component and all its references in the document are highlighted with a thin border and the changes you make to the component at the cursor position are updated in real time to all occurrences of the component. To exit the in-place editing, press the **Esc** or **Enter** key on your keyboard.
-  **Rename Component in** - Opens a dialog box that allows you to rename the selected component by specifying the new component name and the files to be affected by the modification. If you click the **Preview** button, you can view the files to be affected by the action.

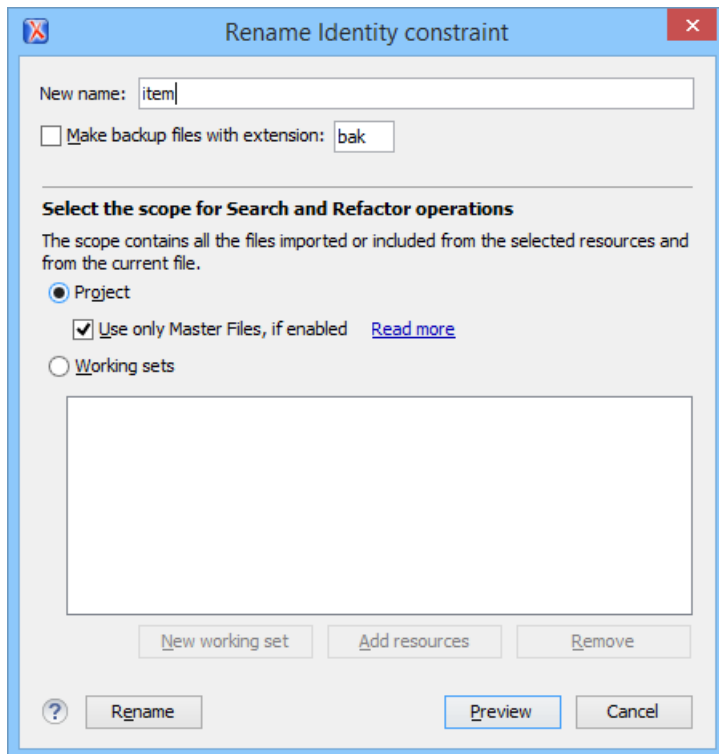


Figure 399: Rename Identity Constraint Dialog Box

Embed Schematron Quick Fixes in Relax NG or XML Schema

Schematron *Quick Fixes* can be embedded into an XML Schema through annotations (using the `appinfo` element), or in a schematron rule embedded in the RELAX NG Schema. For more information about embedding schematron in XML Schema or Relax NG, see [XML Schema or RELAX NG with Embedded Schematron Rules](#) on page 642.

Oxygen XML Developer is able to extract and use the embedded Schematron *Quick Fixes*. To make the embedded Schematron *Quick Fixes* available, follow these steps:

1. Define a [validation against a schema](#).
2. For the **Schema type**, choose XML Schema or Relax NG.
3. Select the **Embedded schematron rules** option.

Example: Embedded Schematron Quick Fix in XML Schema

```
<xsd:appinfo>
  <sch:pattern>
    <sch:rule context="...">
      <sch:assert test="..." sqf:fix="fixId">Message.</sch:assert>
      <sqf:fix id="fixId">
        .....
      </sqf:fix>
    </sch:rule>
  </sch:pattern>
</xsd:appinfo>
```

Example: Embedded Schematron Quick Fix in Relax NG

```
<grammar
  xmlns="http://relaxng.org/ns/structure/1.0"
  xmlns:sch="http://purl.oclc.org/dsdl/schematron" >
  <sch:pattern>
    <sch:rule context="...">
      <sch:assert test="..." sqf:fix="fixId">Message.</sch:assert>
      <sqf:fix id="fixId">
        .....
      </sqf:fix>
    </sch:rule>
  </sch:pattern>
</start>
```

```
.....  
</start>  
</grammar>
```

Tip: For more extensive examples, see our samples in the `[OXYGEN_INSTALL_DIR]/samples/schematron` folder.

Related Information:

[XML Schema or RELAX NG with Embedded Schematron Rules](#) on page 642

[Defining Schematron Quick Fixes](#) on page 651

Integrating SQF in a Framework

You can use Schematron [Quick Fixes](#) to assist your content authors by imposing rules for an entire *framework* (document type) and offering fixes when a rule violation is detected.

For example, if you are using DITA, you may want your contributors to avoid inserting a figure (`fig` element) inside a paragraph (`p` element) that contains other content since it may result in undesirable placement or spacing in the output. The Schematron rule and its *Quick Fix* for this particular use-case could look like this:

```
<schema xmlns="http://purl.oclc.org/dsdl/schematron"  
  xmlns:sqf="http://www.schematron-quickfix.com/validator/process"  
  queryBinding="xslt2">  
  <pattern id="check.figure.location">  
    <rule context="p/fig">  
      <report test="true()" role="warn" sqf:fix="moveAfter">  
        A figure inside a paragraph doesn't transform well into PDF. </report>  
      <sqf:fix id="moveAfter">  
        <sqf:description>  
          <sqf:title>Move after the paragraph.</sqf:title>  
        </sqf:description>  
        <let name="figToMove" value="."/>  
        <sqf:add match="parent::p" select="$figToMove" position="after"/>  
        <sqf:delete match="."/>  
      </sqf:fix>  
    </rule>  
  </pattern>  
</schema>
```

The result of this example would be that the user will see a warning if they insert a `fig` element inside a `p` element and they are presented with the option of selecting the *Quick Fix* that would move the figure outside the paragraph.

How to Integrate SQF in a Framework

To integrate a Schematron *Quick Fix* in a *framework*, follow these steps:

1. [Define a Schematron Quick Fix for a rule](#) in an existing or new Schematron file.
2. Save it somewhere in your *framework* directory. For example, the default *framework* directory for DITA is located in: `[OXYGEN_INSTALL_DIR]/frameworks/dita/`.
3. Add a reference to the Schematron file that includes the SQF in your *framework* by following the procedure in [Associating a Schema in Validation Scenarios Defined in the Document Type](#) on page 423.
4. Open a document in your *framework* and test the new rule and *Quick Fix*.
5. You can continue to refine the rule and develop additional rules as needed.

Related Information:

[Defining Schematron Quick Fixes](#) on page 651

[Basic Schematron Quick Fix Operations](#) on page 652

[Associating a Schema in Validation Scenarios Defined in the Document Type](#) on page 423

Editing SVG Files

SVG (Scalable Vector Graphics) is a platform for two-dimensional graphics. It has two parts: an XML-based file format and a programming API for graphical applications. Some of the key features include support for shapes, text, and embedded raster graphics with many painting styles, scripting through languages such as *ECMAScript*, and support for animation.

SVG is a vendor-neutral, open standard that has important industry support. Companies such as Adobe, Apple, and IBM have contributed to its W3C specifications. Many documentation [frameworks](#) (including DocBook) have support for SVG by defining the graphics directly in the document.

Oxygen XML Developer adds SVG support by using the [Batik distribution](#) package (an open source project developed by the Apache Software Foundation) and the [default XML Catalog](#) resolves the SVG DTD.

Note: Batik partially supports SVG 1.1. For a detailed list of supported elements, attributes, and properties, see the [Batik Implementation Status](#) page.

How to Render SVG Images that Use Java Scripting

1. Copy the `js.jar` library from the [Batik distribution](#) into the Oxygen XML Developer `lib` folder.
2. Restart the application.

SVG 1.2 Rendering Issues

Oxygen XML Developer uses the *Apache Batik* open source library to render SVG images and it only has partial support for SVG 1.2. For more information, see <http://xmlgraphics.apache.org/batik/dev/svg12.html>.

This partial support could lead to some rendering issues in Oxygen XML Developer. For example, if you are using the *Inkscape* SVG editor, it is possible for it to save the SVG as 1.1, while using SVG 1.2 elements (such as `flowRoot`) inside it. This means that the image will not be properly rendered inside the application.

Standalone SVG Viewer

Oxygen XML Developer includes a simple **SVG Viewer** that allows you to work with SVG images.

To open the viewer, select **SVG Viewer** from the **Tools** menu.

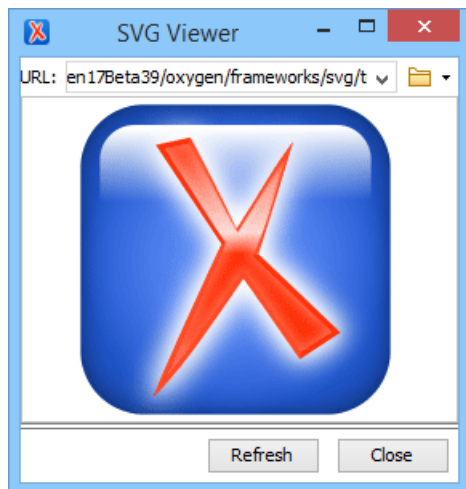


Figure 400: SVG Viewer

You can browse for and open any SVG file that has the `.svg` or `.svgz` extension.

If the file is included in the current project, you can open it in the viewer by right-clicking the image file in the [Project view](#) and selecting **Open with > SVG Viewer**.

Actions Available in the SVG Viewer

The following actions are available in the **SVG Viewer**:

Zoom in

To zoom in on an image, use any of the following methods:

- Scroll **forward** with the mouse wheel.
- Select **Zoom in** from the contextual menu.
- Use the **Ctrl + I (Command + I on OS X)** keyboard shortcut.

Zoom out

To zoom in on an image, use any of the following methods:

- Scroll **backward** with the mouse wheel.
- Use the **Ctrl + O (Command + O on OS X)** keyboard shortcut.
- Select **Zoom out** from the contextual menu.

Rotate

To rotate an image, use either of the following methods:

- Use the **Ctrl + Right-Click + Drag (Command + Right-Click + Drag on OS X)** shortcut.
- Select **Rotate** from the contextual menu. This rotates the image exactly 90 degrees clockwise.

Refresh

To refresh (or reset) an image, use either of the following methods:

- Use the **Ctrl + T (Command + T on OS X)** keyboard shortcut.
- Select **Refresh** from the contextual menu.

Move

To move an image, use either of the following methods:

- Use the **Arrow Keys** on your keyboard.
- Use the **Shift + Left-Click + Drag** shortcut.

Pan

To pan an image, **click and drag** the image with your mouse.

Related Information:

[Editing SVG Files](#) on page 660

Integrated SVG Viewer in the Results Panel

Oxygen XML Developer includes an integrated **SVG Viewer** that can render the results of an XSLT transformation scenario that generates SVG images in the **Results panel** at the bottom of the editor. This is useful for developing XSL stylesheets with the capability of producing SVG graphics.

To enable this feature, select **Show in results view as > SVG** in the **Output tab of the XSLT transformation scenario configuration dialog box**. When you run the transformation, the SVG result is then rendered in an integrated SVG viewer in the **Results panel**.

Example of a Use-Case

Suppose you have an XML document that describes the evolution of your sales over a time period and you want to create a graphic for it. You could use the following steps to accomplish this task:

1. Start with a static SVG image, written directly in Oxygen XML Developer or exported from an external graphics tool.
2. Extract the parts that are dependent upon the data from the XML document and create an XSL template to produce the image.
3. Create an **XML transformation with XSLT scenario**.
4. While configuring the transformation scenario, select **Show in results view as > SVG in the Output tab** of the configuration dialog box.
5. Run the transformation.

The SVG image is rendered in an integrated SVG viewer in the **Results panel** at the bottom of the editor.



Figure 401: Integrated SVG Viewer

Editing XHTML Documents

Oxygen XML Developer provides support for editing XHTML files. Oxygen XML Developer includes XHTML catalogs and document templates to help you get started. You can also find a sample file in the `[OXYGEN_INSTALL_DIR]/samples/xhtml1` folder.

The XHTML editing features include:

- **Source Editing** - You can edit XHTML files in the **Text editing mode** (XML source editor) using all of its [useful features](#).
- **Validation** - Easily identify errors and their location with the Oxygen XML Developer [XML validation features](#).
- **Content Completion** - The [Content Completion Assistant](#) displays a list of context-sensitive proposals that are valid at the current cursor position. In **Text** mode, it can be manually activated with the **Ctrl + Space** (**Command + Space on OS X**) shortcut, while in **Author** mode, it is activated by simply pressing **Enter**.
- **Import HTML as XHTML** - Oxygen XML Developer includes support for [importing HTML files as an XML document](#).
- **Remote Editing** - Oxygen XML Developer has built-in support for [editing documents that are stored on remote servers through FTP, SFTP, and WebDAV protocols](#), allowing you to edit XHTML pages from your web server.
- **Syntax Highlighting** - XHTML documents with embedded CSS, JS, PHP, and JSP scripts are rendered with dedicated coloring schemes. To customize them, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **Editor > Syntax Highlight**. Select and expand the **XHTML** section in the top pane and you can see the effects of your changes in the **Preview** pane.

Related Information:

[XHTML Document Type \(Framework\)](#) on page 691

Editing Markdown Documents

Markdown was created as a lightweight markup language with plain text formatting syntax designed to provide a syntax that is very easy to read and write, and to convert it to HTML and other formats. It is often used by content contributors who want a quick and easy way to write content without having to take their fingers off the keyboard and without having to learn numerous codes or shortcuts, and it can easily be shared interchangeably between virtually any types of contributor and system.

Oxygen XML Developer provides a built-in Markdown editor that allows you to convert Markdown syntax to HTML or DITA and it includes a preview panel to help you visualize the final output. Aside from the plain text syntax that is common amongst most Markdown applications, the editor in Oxygen XML Developer also integrates many other powerful features that content authors are accustomed to using for other types of documents. Some of these additional unique features include:

- Additional toolbar and contextual menu actions.

- Automatic validation to help keep the syntax valid.
- Dedicated syntax highlighting to make Markdown documents even easier to read and write.
- Unique features for creating Markdown documents directly in [DITA maps](#) and converting Markdown documents to DITA topics.
- Specialized syntax rules to combine popular syntax features from several specifications.

Markdown Editor

Oxygen XML Developer provides an intuitive, dynamic, and easy-to-use Markdown editor for writing and converting Markdown documents. It is a split-screen editor with two panels that are synchronized in real-time. The left side is a simple text editor that is specially designed for writing Markdown syntax. The right side is a WYSIWYG style preview of how changes will look in the output.

Markdown Text Editor Pane (Left Side)

The left pane is a simple text editor that is refined to accept Markdown syntax. At the same time, you still have many of the actions, options, and features that you are used to when editing any other type of document in Oxygen XML Developer.

The features of this special editor that are unique for Markdown documents include:

- **Unique Markdown Syntax Rules** - The Markdown editor in Oxygen XML Developer uses [an integration of rules](#) that combine rules from common default Markdown syntax along with many of the rules used in the GitHub Flavored Markdown syntax.
- **Syntax Highlighting** - The Oxygen XML Developer syntax highlighting feature is integrated into the Markdown text editor to make it easier to read and write Markdown syntax. You can even [customize the colors and styles for the syntax highlighting](#).
- **Automatic Spell Checking** - The Markdown editor supports the Oxygen XML Developer [automatic spell checking feature](#) that reports possible misspelled words as you type. You simply need to select the **Automatic spell check option in the Spell Check preferences page**, then click the **Select editors** button and select **Markdown Editor**.
- **Helpful Toolbar and Contextual Menu Actions** - A [variety of unique actions](#) are available from the toolbar to help you insert proper Markdown syntax. The contextual menu also includes some common editing actions, as well as unique actions to export (convert) Markdown documents to HTML or DITA.
- **Shortcut Keys** - Many of the [shortcut keys that are most commonly used](#) in Oxygen XML Developer also work in the Markdown editor.

WYSIWYG Preview Pane (Right Side)

The right pane is a WYSIWYG *Preview* pane that shows a visual representation of how changes made in the left-side text editor will be converted to HTML or DITA output. The changes you make in the text editor are parsed continually and they are immediately visible in the *Preview* pane. There are two tabs available in the *Preview* pane, one for visualizing DITA output and one for visualizing HTML output. You can switch between the two tabs at the bottom of the pane.

The *Preview* pane includes the following unique features:

- **WYSIWYG Visualization** - This pane presents the Markdown syntax from the left-side text editor in a visual WYSIWYG style interface that is automatically synchronized as you type.
- **Export Options** - The **DITA** tab includes a contextual menu action to [export \(convert\) the current Markdown document to a DITA topic](#). Similarly, the **HTML** tab includes a contextual menu action to [export \(convert\) it to an XHTML document](#).
- **Automatic Validation** - As you edit Markdown documents, they are [validated automatically](#). The conversion engine constantly tries to parse your changes and if a change results in an error that prevents the parser from converting the syntax, an error message will be displayed in the *Preview* pane or [Results view](#) at the bottom of the editor.
- **Print Feature** - The Markdown editor includes a **Print** action that is available in the contextual menu and it allows you to configure options for printing the current document as you see it in the *Preview* pane.
- **Specialized DITA Features** - The Markdown editor includes some unique, [specialized features to integrate it with the powerful DITA support](#) in Oxygen XML Developer.

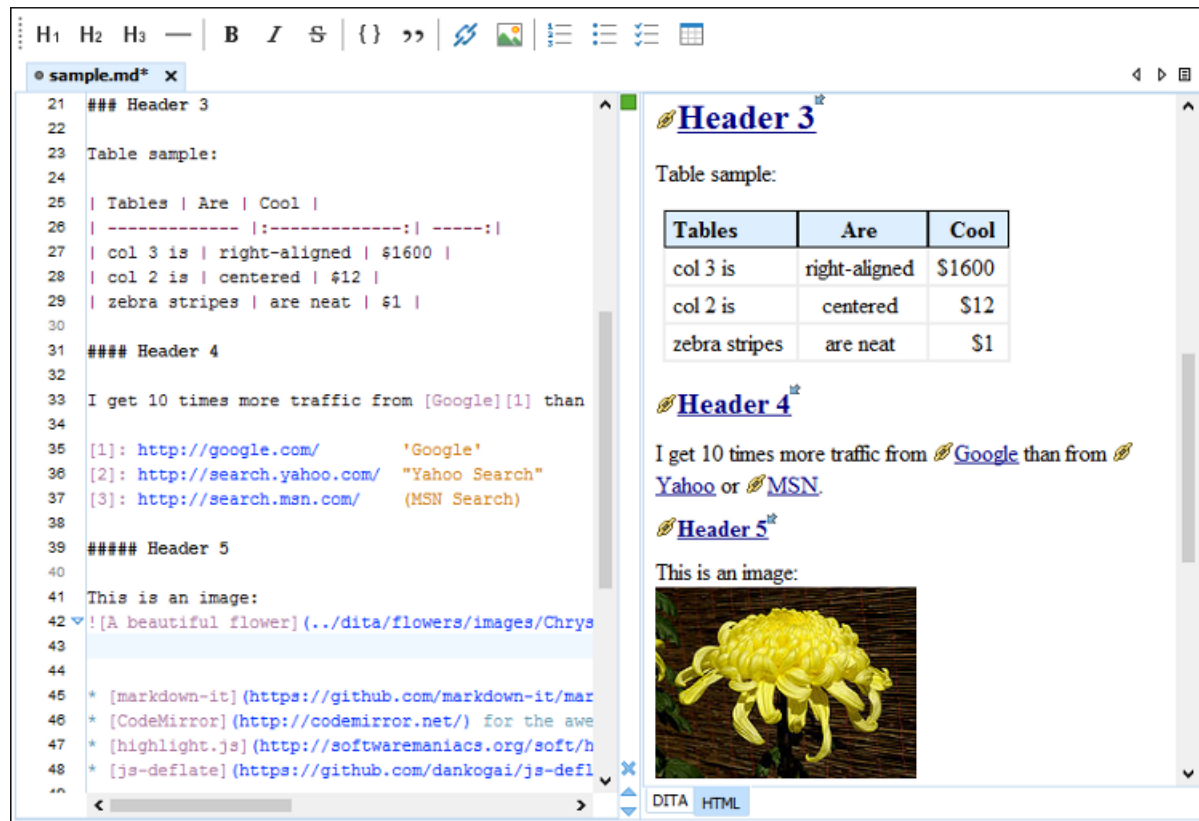


Figure 402: Markdown Editor in Oxygen XML Developer

Related Information:

[Markdown Editor Syntax Rules and Specifications](#) on page 671

[Actions Available in the Markdown Editor](#) on page 665

[Working with Markdown Documents in DITA](#) on page 670

[Creating New Markdown Documents](#) on page 665

Creating New Markdown Documents

To create a new Markdown document in Oxygen XML Developer, follow these steps:

1. Click the **New** button on the toolbar or select **File > New**.
2. Select the **Markdown** document template (in the **New Document** folder).
3. Click the **Create** button.

Result: A new Markdown document is created and it is opened in the specialized [Markdown Editor](#).

Related Information:

[Markdown Editor](#) on page 664

Actions Available in the Markdown Editor

Aside from the actions that are available in Oxygen XML Developer for any type of document (such as the actions in the various menus and the common sections of the toolbar), a variety of unique actions are also available in the Markdown editor, from the toolbar and contextual menu.

Toolbar Actions

The following default actions are readily available on the toolbar when editing Markdown documents:

H₁Header (1st Level)

Inserts an [atx-style first level header](#) at the cursor position.

H₂Header (2st Level)

Inserts an [atx-style second level header](#) at the cursor position.

H₃Header (3rd Level)

Inserts an [atx-style third level header](#) at the cursor position.

—Horizontal Rule

Inserts a [horizontal rule](#) at the cursor position.

B Bold (Strong)

Marks the selected text with [bold](#).

I Italic (Emphasis)

Marks the selected text with [italics](#).

~~S Strikethrough~~

Marks the selected text with a [strikethrough](#).

{ }Code Block

Inserts (or surrounds selected text in) a [codeblock](#).

””Blockquote

Inserts a [blockquote](#) at the cursor position.

Insert Link

Opens the **Insert Link** dialog box that allows you to define a [link](#) to insert at the cursor position.

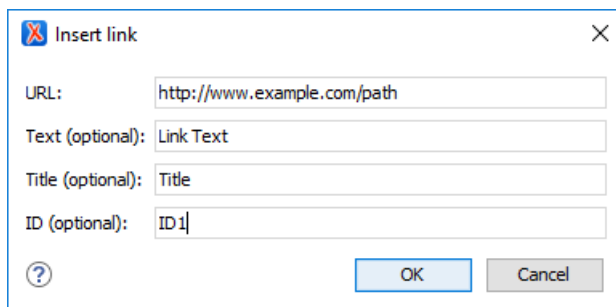


Figure 403: Insert Link Dialog Box

Insert Image

Opens the **Insert Image** dialog box that allows you to define an [image](#) to insert at the cursor position. You can type the URL of the image you want to insert or use browsing tools in the  **Browse** drop-down menu.

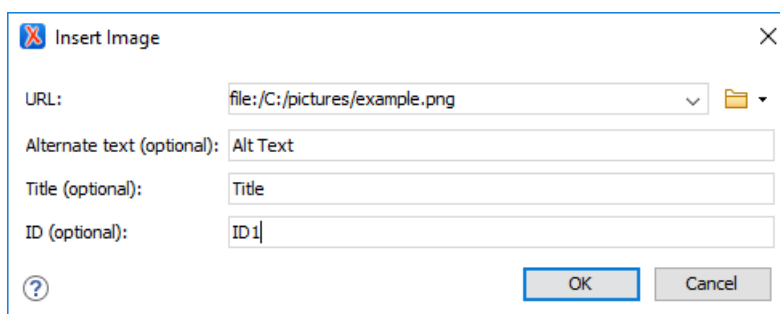


Figure 404: Insert Image Dialog Box

Insert Ordered List

Inserts an [ordered list](#) at the cursor position. Three child list items are also automatically inserted by default. You can also use this action to convert selected content to an ordered list.

Insert Unordered List

Inserts an [unordered list](#) at the cursor position. Three child list items are also automatically inserted by default. You can also use this action to convert selected content to an unordered list.

Insert Task List

Inserts a [task list](#) at the cursor position. Three child list items are also automatically inserted by default. You can also use this action to convert selected content to a task list.

Insert Table

Inserts a [table](#) at the cursor position.

Contextual Menu Actions

The following default actions are available in the contextual menu when editing Markdown documents:

Cut, **Copy**, **Paste**

Use these actions to execute the typical editing actions on the currently selected content.

Source submenu

This submenu includes the following actions:

To Upper Case

Converts the content selection to upper case characters.

To Lower Case

Converts the content selection to lower case characters.

Capitalize Lines

It capitalizes the first letter found on every new line that is selected. Only the first letter is affected, the rest of the line remains the same. If the first character on the new line is not a letter then no changes are made.

Convert Hexadecimal Sequence to Character (Ctrl + Shift + X (Command + Shift + X on OS X))

Converts a sequence of hexadecimal characters to the corresponding Unicode character. The action can be invoked if there is a selection containing a valid hexadecimal sequence or if the cursor is placed at the right side of a valid hexadecimal sequence. A valid hexadecimal sequence can be composed of 2 to 4 hexadecimal characters and may or may not be preceded by the 0x or 0X prefix. Examples of valid sequences and the characters they will be converted to:

- 0x0045 will be converted to E
- 0X0125 to ĥ
- 265 to #
- 2190 to #

Base64 Encode/Decode submenu

This submenu includes the following actions for encoding or decoding **base64** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32,](#)

[Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Base32 Encode/Decode submenu

This submenu includes the following actions for encoding or decoding **base32** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Hex Encode/Decode submenu

This submenu includes the following actions for encoding or decoding **hex** schemes:

Import File to Encode and Insert

Encodes a file and then inserts the encoded content into the current document at the cursor position.

Decode Selection and Export to File

Decodes a selection of text from the current document and then exports (saves) the result to another file.

Encode Selection

Replaces a selection of text with the result of encoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Decode Selection

Replaces a selection of text with the result of decoding that selection. By default, a dialog box is displayed that allows you to select the encoding to use. There is an option to choose to not show this dialog box in the future. In this case, the encoding that is specified in the [Encoding for Base64, Base32, Hex conversions](#) option in the [Encoding preferences page](#) will be used. Likewise, the same is true if the [Show the dialog box for choosing the encoding for Base64, Base 32, Hex conversions](#) option is not selected in the [Messages](#) preference page.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Join and Normalize Lines (Ctrl + J (Command + J on OS X))

For the current selection, this action joins the lines by replacing the *line separator* with a single space character. It also normalizes the whitespaces by replacing a sequence of such characters with a single space.

Insert new line after (Ctrl + Alt + Enter (Command + Alt + Enter on OS X))

This action has the same result as moving the cursor to the end of the current line and pressing the *ENTER* key.

Modify All Matches

Use this option to modify (in-place) all the occurrences of the selected content (or the contiguous fragment where the cursor is located). When you use this option, a thin rectangle replaces the highlights and allows you to start editing. If matches with different letter cases are found, a dialog box is displayed that allows you select whether you want to modify only matches with the same letter case or all matches.

Open submenu

The following actions are available in this submenu:

Open File at Cursor

Opens the file at the cursor position in a new panel. If the file path represents a directory path, it will be opened in system file browser. If the file at the specified location does not exist, an error dialog box is displayed and it includes a **Create new file** button that starts the **New document** wizard. This allows you to choose the type or the template for the file. If the action succeeds, the file is created with the referenced location and name and is opened in a new editor panel.

Open File at Cursor in System Application

Opens the file (identified by its link) or web page (identified by a web link) found at cursor position. The target is opened in the default system application associated with that file type.

Compare

Opens the current file in [the Compare Files tool](#).

Show/Hide Preview

A toggle action that shows or hides the *Preview* pane.

Export as DITA Topic

Converts the current Markdown document into a DITA topic.

Export as HTML

Converts the current Markdown document into an XHTML document.

Print (Available in the *Preview* pane)

Opens a page setup dialog box that allows you to configure printing options for the current document.

Related Information:

[Markdown Editor](#) on page 664

[Working with Markdown Documents in DITA](#) on page 670

[Markdown Editor Syntax Rules and Specifications](#) on page 671

Syntax Highlighting in the Markdown Editor

Oxygen XML Developer supports syntax highlighting in the Markdown editor to improve the readability of the content and make it easier to internalize the semantics of the content.

To customize the colors or styles used for the syntax highlighting colors for Markdown documents, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**).
2. Go to **Editor > Syntax Highlight**.
3. Select and expand the **Markdown** section in the top pane.
4. Select the component you want to change and customize the colors or styles using the selectors to the right of the pane.

You can see the effects of your changes in the **Preview** pane.

Related Information:

[Syntax Highlight Preferences](#) on page 86

[Markdown Editor](#) on page 664

Automatic Validation in Markdown Documents

Markdown documents are validated automatically as you type. The conversion engine constantly tries to parse your changes to display the results in the *Preview* pane. If a change results in an error that prevents the parser from converting the syntax, an error message will be displayed in the **DITA** tab or in the **Results view** at the bottom of the editor.

The types of errors that will be reported include the following:

- Improper order of headers.
- The syntax in a documents begins with something other than a 1st level header.
- Tags are not closed properly if XHTML markup is used in the document.
- Invalid tag names if XHTML markup is used in the document.
- Markup is not well formed if XHTML markup is used in the document.

Related Information:

[Markdown Editor](#) on page 664

Working with Markdown Documents in DITA

Oxygen XML Developer includes some unique features that allow you to easily integrate Markdown documents in a DITA project. This is especially helpful for teams that have contributors who are familiar with the Markdown syntax, but they want their output to be generated from DITA projects. The integration between the Markdown editor and DITA includes actions to export or convert Markdown documents to DITA topics and the **DITA** tab in the *Preview* pane provides a visualization of how the topic will look after conversion.

Export Markdown as a DITA Topic

The Markdown editor includes an option to quickly convert the current Markdown document into a DITA topic. The **Export as DITA Topic** action is available in the contextual menu of the left-side text editor and the right-side *Preview* pane when the **DITA** tab selected.

The conversion creates a new XML file that is defined as a DITA topic and opens it in the **Text** editing mode. You can then work with the document as you would with any other DITA topic, although you may need to manually correct some issues where the parser could not properly map Markdown syntax to DITA markup.

Tip: Oxygen XML Developer comes with a sample ditamap project for converting Markdown to DITA. Go to the [Project view](#), open the sample .xpr project, and navigate to the dita/markdown-dita folder.

Related Information:

[Markdown Editor](#) on page 664

[Actions Available in the Markdown Editor](#) on page 665

[Markdown Editor Syntax Rules and Specifications](#) on page 671

[Automatic Validation in Markdown Documents](#) on page 670

Markdown Editor Syntax Rules and Specifications

The Markdown editor in Oxygen XML Developer uses rules that were integrated from the most common set of [default Markdown syntax rules](#) along with many of the [GitHub Flavored Markdown rules](#).

The Oxygen XML Developer implementation of the most commonly used syntax rules are as follows:

Headers

The Markdown editor supports two styles of headers, *Setext* and *Atx*.

- **Setext Style**

Setext-style headers are underlined using equal signs (for first-level headers) and dashes (for second-level headers). Any number of equal signs or dashes will result in the same output.

Example: Setext Style Headers

```
First-Level Header (H1)
=====

Second-Level Header (H2)
-----
```

- **Atx Style**

Atx-style headers use 1-6 hash characters at the start of the line, corresponding to header levels 1-6. Optionally, you may close atx-style headers. This is purely cosmetic and the closing hashes do not need to match the number of hashes used to open the header. It is the number of opening hashes that determines the header level.

Example: Atx Style Headers

```
# H1 text #
## H2 text
### H3 text #####
#### H4 text
##### H5 text ###
##### H6 text
```

Horizontal Rules (for HMTL output only)

You can produce a horizontal rule tag (<hr />) by placing three or more hyphens, asterisks, or underscores on a line by themselves (they also need to be preceded and followed by a blank line). Optionally, they can be separated by spaces.

- **Example: Horizontal Rules**

```
* * *
```

```
*****
```

```
-----
```

```
- - - -
```

Paragraphs and Line Breaks

A paragraph is simply one or more consecutive lines of text, separated by one or more blank lines. The text at the beginning of a paragraph should not be indented with spaces or tabs. To create a new paragraph, simply insert a blank line in between them.

Important: When converting to HTML, if you break a paragraph on multiple lines (without a blank line in between them), it will create a break tag (
. When converting to DITA, the text is kept in a single paragraph in this case and a blank line is required to break a paragraph. This behavior differs slightly from the default Markdown rules.

- **Example: Paragraphs**

```
This is a paragraph that contains
two lines of text. (In HTML, a break tag is created in between the two lines)

This is a new paragraph.
```

Styling Text

The Markdown editor supports some syntax rules for styling text (such as bold, italic, or strikethrough).

- **Italic (Emphasis)** - Text wrapped with one asterisk or underscore produces an italic (emphasis) tag.

```
*italic*
_italic_
```

- **Bold (Strong)** - Text wrapped with two asterisks or underscores produces a bold (strong) tag.

```
**bold**
__bold__
```

- **Strikethrough** - In HTML only, text wrapped with two tildes (~~) produces a strikethrough tag.

```
~~strikethrough~~
```

Tip: You can also combine these styling rules. For example, ***BoldText*** *BoldText* **would produce italicized text within bold text. Also, if you surround an asterisk or underscore with spaces, it will be treated as a literal asterisk or underscore. To produce a literal asterisk or underscore at a position where it would otherwise be used as an styling delimiter, you can escape it with a backslash (for example, *literal asterisks*.**

Links

The Markdown editor supports two types of links, *inline* and *reference*. In both cases, it begins with link text that is delimited by [square brackets].

- **Inline Links**

To create an inline link, use a set of regular parentheses immediately after the closing square bracket for the link text. Inside the parentheses, put the URL where you want the link to point, and optionally a title surrounded in quotes. Also, if you are referencing a local resource on the same server, you can use relative paths.

Examples: Inline Link

With a title:

```
Text with [example link text](http://www.example.com/path "Title") inline link and title.
```

Without a title:

```
Text with [example link text](http://www.example.com/path) inline link without a title.
```

Relative path:

```
Text with [example link text](/relative_path/) inline link with relative path.
```

- **Reference Links**

Reference-type links use a second set of square brackets that include a label (link identifier) to identify the link (it may consist of letters, numbers, spaces, and punctuation and it is not case sensitive). You can optionally use a space to separate the sets of brackets. The labels (link identifiers) are only used for creating the links and do not appear in the output.

```
Text with [link text1][id 1] a reference-type link and [link text2][id_2] another one.
```

Then, somewhere in the document, you need to define your link label on a line by itself. The link identifier must be within square brackets followed by a colon, then after one or more spaces the URL for the link. Optionally this can be followed by a title enclosed in single quotes, double quotes, or parentheses. Also, the link may optionally be enclosed in angle brackets (< >).

```
[id 1]: http://example1.com/ "Optional Title"
[id_2]: <http://example2.com/> "Optional Title2"
```

Other notes about Reference Links:

- You can put the title on a second line and use extra spaces or tabs for padding. This is useful for aesthetics when the URL is long.

```
[id]: http://example.com/long/path/to/resource/here
    "Optional Title Here"
```

- The label (link identifier) can be missing, in which case the link text (in square brackets) is used as the name.

```
[My Link][]
```

and then defined as:

```
[My Link]: http://example.com/
```

Automatic Links

The Markdown editor supports a shortcut style for creating automatic links for URLs and email addresses. You simply surround the URL or email address with angle brackets.

Note: These automatic links only work properly in HTML conversions. The *Preview* pane may display them properly in the DITA tab, but the DITA output will not properly recognize the format.

- **URLs**

By surrounding a URL with angle brackets, you can show the actual text of the URL while also making it clickable in the output.

```
<http://example.com/>
```

For example, in HTML it is converted to:

```
<a href="http://example.com/">http://example.com/</a>
```

- **Email Addresses**

Automatic links for email addresses work similarly, except that Markdown will also perform a bit of randomized decimal and hex entity-encoding to help obscure your address from address-harvesting *spambots*.

```
<address@example.com>
```

In HTML, it is converted to something like:

```
<a href="mailto:address@example.com">address@example.com</a>
```

```
&#115;&#115;&#64;&#101;&#120;&#x61;&#109;&#x70;&#x6C;e&#x2E;&#99;&#111;&#109; ">&#x61;&#x64;&#x64;&#x72;&#x65;&#115;&#115;&#64;&#101;&#120;&#x61;&#109;&#x70;&#x6C;e&#x2E;&#99;&#111;&#109; </a>
```

Images

The Markdown editor uses an image syntax that is intended to resemble the syntax for links, allowing for the same two types: *inline* and *reference*. In both cases, the syntax for images begin with an exclamation mark, followed by `alt` attribute text surrounded by square brackets., and then followed by a set of parentheses that contain the URL or path to the image.

- **Inline Images**

For inline images, use a set of regular parentheses immediately after the closing square bracket for the `alt` attribute text. Inside the parentheses, put the URL or path of the image, and optionally a title surrounded in quotes.

Examples: Inline Images

With a title:

```
Text with ![Alt text](/path/to/img.jpg "Optional title") inline image and a title.
```

Without a title:

```
Text with ![Alt text](/path/to/img.jpg) inline link without a title.
```

- **Reference Images**

For reference-type images, use a second set of square brackets that include a label (image identifier) to identify the image (it may consist of letters, numbers, spaces, and punctuation and it is not case sensitive). You can optionally use a space to separate the sets of brackets. The labels (image identifiers) do not appear in the output.

```
Text with ![Alt text1][id] a reference-type image.
```

Then, somewhere in the document, you need to define your image label on a line by itself. The image identifier must be within square brackets followed by a colon, then after one or more spaces the URL or path of the image. Optionally this can be followed by a title enclosed in single quotes, double quotes, or parentheses.

```
[id]: url/to/image "Optional Title"
```

Blockquotes

The Markdown editor uses email-style greater than characters (`>`) for *blockquotes*. You only need to put the `>` before the first line of a hard-wrapped paragraph, but it looks better (and is more clear) if you put a `>` before every line.

- **Example: Blockquotes**

```
> This is a blockquote with two paragraphs. Lorem ipsum dolor sit amet,
> consectetur adipiscing elit. Aliquam hendrerit mi posuere lectus.
> Vestibulum enim wisi, viverra nec, fringilla in, laoreet vitae, risus.
>
> Donec sit amet nisl. Aliquam semper ipsum sit amet velit. Suspendisse
> id sem consectetur libero luctus adipiscing.
```

- *Blockquotes* can be nested by adding additional levels of `>` characters.

Example: Nested Blockquotes

```
> This is the first level of quoting.
>
> > This is nested blockquote.
>
> Back to the first level.
```

- *Blockquotes* can also contain other Markdown elements (such as headers, lists, and code blocks).

Example: Blockquotes with Other Markdown Elements

```
> ## This is a header.
>
> 1.   This is the first list item.
> 2.   This is the second list item.
>
> Here's some example code:
>
>     return shell_exec("echo $input | $markdown_script")
```

Quoting Code (Inline and Code Blocks)

The Markdown editor supports quoting code or commands inline within a sentence or in distinct blocks.

- **Inline**

You can quote or emphasize code within a sentence (inline) with single backticks (`). The text within the backticks will not be formatted.

Example: Inline Code Emphasis

```
This is a normal sentence with a `code` in the middle.
```

- **Code Blocks**

You can format code or text into its own distinct block by inserting a blank line before and after the content and using at least 4 spaces (or 1 tab), or by using opening and closing triple backticks (```) on separate lines.

Example: Code Block

```
This is a normal paragraph:
    This is a code block
This is a normal paragraph:
```
This is a code block
```
```

One level of indentation is removed from each line of a codeblock and it continues until it reaches a line that is not indented (or until the closing backticks).

Example: Code Block with Indentation

```
    tell application "something"
        beep
    end tell
```

For example, in HTML the result would look like this:

```
<pre><code>tell application "Foo"
    beep
end tell
</code></pre>
```

You can also add an optional language identifier to enable syntax highlighting in your code blocks. The Oxygen XML Developer Markdown editor supports the following languages: *Java*, *JavaScript*, *CSS*, and *Python*.

Example: Syntax Highlighting in Code Block

```
```css
input[type="submit"] {
 color: white;
 font-weight: bold;
}
```

### **Inline XHTML (for HMTL output only)**

The Markdown editor supports writing inline XHTML. Since Markdown is just a writing format, it requires a conversion for publishing purposes. If you are using the HTML conversion, for any markup that is not covered by Markdown syntax, you can simply use XHTML syntax.

- **Example: Inline XHTML**

```
This is a regular paragraph.

<table>
 <tr>
 <td>Col 1</td>
 <td>Col 2</td>
 </tr>
</table>

This is another regular paragraph.
```

## Lists

The Markdown editor supports ordered and unordered lists. You can also insert [blockquotes](#) and [code blocks](#) inside list items. List markers typically start at the left margin, but may be indented by up to three spaces.

- **Unordered Lists**

For unordered lists, you can use asterisks (\*), plus signs (+), and hyphens (-) interchangeably.

```
* List item 1
+ List item 2
- List item 3
```

- **Ordered Lists**

For ordered lists, use numbers followed by periods. The actual numbers you use have no effect on the output. It simply converts them to list items within an ordered list and the actual number of list items will determine the numbers in the output.

```
1. List item 1
8. List item 2
5. List item 3
```

- **Nested Lists**

You can create nested lists by indenting lines by two spaces.

```
1. Ordered list item 1
 1. Nested ordered list item 1
 2. Nested ordered list item 2
 * 2nd level nested unordered list item 1
 * 2nd level nested unordered list item 2
 * 3rd level nested unordered list item 1
2. Ordered list item 2
```

- **Paragraphs Inside Lists**

If list items are separated by blank lines, Markdown will wrap the items in a paragraph in the output.

```
* List item 1

* List item 2
```

For both DITA and HTML output, this would result in:

```

<p>List item 1</p>
<p>List item 2</p>

```

- **Multiple Paragraphs Inside Lists**

List items may consist of multiple paragraphs. Each subsequent paragraph in a list item must be indented by either 4 spaces or one tab. Optionally, you can also indent each line of a paragraph to make it look nicer.

```
1. This is a list item with two paragraphs. Lorem ipsum dolor
 sit amet, consectetur adipiscing elit. Aliquam hendrerit
 mi posuere lectus.

 Vestibulum enim wisi, viverra nec, fringilla in, laoreet
 vitae, risus. Donec sit amet nisl. Aliquam semper ipsum
 sit amet velit.

2. Suspendisse id sem consectetur libero luctus adipiscing.
```

- **Blockquotes Inside Lists**

To put a *blockquote* within a list item, the blockquote delimiters (>) need to be indented so that it is under the first letter of the text after the list item marker.

```
* A list item with a blockquote:
> This is a blockquote
> inside a list item.
```

- **Code Blocks Inside Lists**

To put a code block within a list item, insert an empty line in between the list item and the code block, and the code block needs to be indented twice (with 8 spaces or 2 tabs), or if you are using the triple backticks method, the opening triple backtick needs to be indented with 4 spaces or 1 tab.

```
* A list item with a code block:

 This is a code block inside a list item

    ```  
    This is a code block inside a list item using the backticks method  
    ```
```

## Task Lists

You can create task lists by prefacing list items with a hyphen followed by a space followed by square brackets (- [ ]). To mark a task as complete, use - [x].

- **Example: Task Lists**

```
- [] Unfinished task 1
- [x] Finished task 2
```

## Definition Lists

You can create definition lists by using a colon plus a space for each list item.

- **Example: Definition Lists**

```
Term 1
: Definition A
: Definition B
```

## Tables

You can create tables in the Markdown editor by using pipes (|) and hyphens (-).

- **Creating a Table**

Pipes are used to separate each column, while hyphens are used to create column headers. The pipes on either end of the table are optional. Cells can vary in width and do not need to be perfectly aligned within columns, but there must be at least three hyphens in each column of the header row.

```
First Header	Second Header
Column 1 Row 1 Cell	Column 2 Row 1 Cell
Column 1 Row 2 Cell	Column 2 Row 2 Cell
```

- **Formatting Rules in Table Cells**

You can use formatting rules inside the cells of the table (such as links, inline code blocks, and text styling).

```
First Header	Second Header
`inline code`	Content with bold text inside cell
```

- **Aligning Text in Tables**

You can align text to the left, right, or center of a column by including colons (:) to the left, right, or on both sides of the hyphens within the header row.

```
Left-aligned	Center-aligned	Right-aligned
Content Cell	Content Cell	Content Cell
```

- **Joining Cells (Span a Cell Over Multiple Columns)**

You can join cells horizontally (span a cell over multiple columns) by using multiple consecutive pipe characters (|) to the right of the particular cell. The number of consecutive pipes indicate the number of columns the cell will span (| | for two, | | | for three, and so on).

```
First Header	Second Header	Third Header	Fourth Header
Content Cell	*Cell Span Over 3 Columns*		
```

## Emoji

You can add *emoji* in the Markdown editor by surrounding the EMOJICODE with colons (:EMOJICODE:).

- **Example: Emoji**

```
:smile:
:laughing:
```

The resulting emoticons will appear in the output, but they are not displayed in the *Preview* pane.

For a full list of available emoji codes, see [Emoji Cheat Sheet](#).

## Backslash Escapes

You can ignore Markdown formatting by using backslash escapes (\\) to generate literal characters that would otherwise have special meaning in the Markdown syntax. For example, if you want to surround a word with literal asterisks (instead of an italic or emphasis tag), you can use backslashes to escape the asterisks.

```
literal asterisks
```

The Markdown editor provides backslash escapes for the following characters:

```
\ backslash
` backtick
* asterisk
_ underscore
{ } curly braces
[] square brackets
() parentheses
hash mark
+ plus sign
- minus sign (hyphen)
. dot
! exclamation mark
```

## Automatic Escaping for Special Characters

The Markdown editor includes support for automatically escaping special characters such as angle brackets (< >) and ampersands (&). If you want to use them as literal characters, you must escape them as entities, as in the table below. The exception to this is in HTML output, if the special characters for a valid tag (for example, <b>), they are treated as literal characters and escaping is not necessary.

| Literal Character | Escaping Code |
|-------------------|---------------|
| <                 | &lt;          |
| >                 | &gt;          |
| &                 | &amp;         |

## Footnotes

The Markdown editor in Oxygen XML Developer supports normal and inline footnotes. The following examples show the required syntax.

- **Example: Normal Footnote**

```
Here is a footnote reference,[^1]
```

```
[^1]: Here is the footnote.
```

- **Example: Normal Footnote with Multiple Blocks**

```
Here is a footnote reference,[^longnote]
```

```
[^longnote]: Here is the footnote with multiple blocks.
```

```
 Subsequent paragraphs are indented with 4 spaces or 1 tab to show that they
 belong to the previous footnote.
```

- **Example: Inline Footnote**

```
Here is an inline note.^[Inlines notes are easier to write, since
you don't have to pick an identifier and move down to type the
note.]
```

**Related Information:**

[Default Markdown Syntax](#)

[GitHub Flavored Markdown Rules](#)

[Markdown Editor](#) on page 664

[Actions Available in the Markdown Editor](#) on page 665

## Built-in XML Frameworks

---

### Topics:

- [Predefined Document Types \(Frameworks\)](#)
- [Other Supported Document Types](#)

A [framework](#) is associated to an XML document type according to a set of rules. It also includes a variety of settings that improve editing capabilities in the **Author** mode for its particular file type. These settings include:

- A default grammar used for validation and content completion in **Text** mode.
- Predefined scenarios used for transformations for the class of XML documents defined by the document type.
- [XML Catalogs](#).
- Directories with document templates.

Oxygen XML Developer includes built-in support for many common document types. Each [document type is defined in a framework](#).

For more information about configuring a *framework* in Oxygen XML Developer, watch our video:

<https://www.youtube.com/embed/Q91IU4qqzpk>

## Predefined Document Types (Frameworks)

---

Oxygen XML Developer includes a variety of specialized editors, views, and features that are dynamic according to the type of document that you open or create. The type of documents that are supported include the most popular predefined XML [frameworks](#) that include a full set of features as well as other document types that include more generic or common features.

### Predefined Frameworks

The following predefined document types (*frameworks*) are fully supported in Oxygen XML Developer and each of these document types include built-in transformation scenarios, validation, content completion and document templates:

- [DocBook 4](#) - A document type standard for books, articles, and other prose documents (particularly technical documentation).
- [DocBook 5](#) - An enhanced (version 5) document type standard designed for a variety of documents (particularly technical documentation).
- [DITA](#) - An XML-based architecture designed for authoring, producing, and delivering technical information.
- [DITA Map](#) - A document type that collects and organizes references to DITA topics or other maps.
- [XHTML](#) - Extensible HyperText Markup Language includes the same depth of expression as HTML, but also conforms to XML syntax.
- [TEI ODD](#) - Text Encoding Initiative One Document Does it all is an XML-conformant specification that allows you to create TEI P5 schema in a literate programming style.
- [TEI P5](#) - The Text Encoding Initiative guidelines is a standard for the academic community that collectively define an XML format for text that is primarily semantic rather than presentational.
- [JATS](#) - The NISO Journal Article Tag Suite is a technical standard that defines an XML format for scientific literature.

## DocBook 4 Document Type (Framework)

*DocBook* is a very popular set of tags for describing books, articles, and other prose documents, particularly technical documentation. DocBook provides a vast number of semantic element tags, divided into three broad categories: structural, *block-level*, and *inline*. DocBook content can then be published in a variety of formats, including HTML, PDF, WebHelp, and EPUB.

### File Definition

A file is considered to be a *DocBook 4* document when one of the following conditions are true:

- The root element name is `book` or `article`.
- The PUBLIC ID of the document contains the string `-//OASIS//DTD DocBook XML`.

### Default Document Templates

There are a variety of default *DocBook 4* templates available when creating [new documents from templates](#) and they can be found in: **Framework Templates > DocBook 4**.

The default templates for DocBook 4 documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Docbook 4` folder.

### Default Schema for Validation and Content Completion

The default schema that is used if one is not detected in the DocBook 4 file is `docbookxi.dtd` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/4.5/dtd/`.

### Default XML Catalog

The default [XML Catalog](#), `catalog.xml`, is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/`.

### Transformation Scenarios

Oxygen XML Developer includes numerous built-in DocBook transformation scenarios that allow you to transform DocBook 4 documents to a variety of outputs, such as WebHelp, PDF, HTML, HTML Chunk, XHTML, XHTML Chunk, and EPUB. All of them are listed in the **DocBook 4** section in the [Configure Transformation Scenario\(s\) dialog box](#).

For more information, see the [DocBook Transformation Scenarios](#) on page 699 section.

### Resources

- [DocBook Specifications](#)

### Related Information:

[Editing XML Documents in Text Mode](#) on page 359

### Inserting an `olink` in DocBook Documents

The `olink` element is used for linking to resources outside the current DocBook document. The `targetdoc` attribute is used for the document ID that contains the target element and the `targetptr` attribute for the ID of the target element (the value of an `id` or `xml:id` attribute). The combination of those two attributes provides a unique identifier to locate cross references.

For example, a *Mail Administrator Guide* with the document ID `MailAdminGuide` might contain a chapter about user accounts, like this:

```
<chapter id="user_accounts">
<title>Administering User Accounts</title>
<para>blah blah</para>
```

You can form a cross reference to that chapter by adding an olink, as in the following example:

```
You may need to update your
<olink targetdoc="MailAdminGuide" targetptr="user_accounts">user accounts
</olink>
when you get a new machine.
```

To use an olink to create links between documents, follow these steps:

1. Decide which documents are to be included in the domain for cross referencing.

A unique ID must be assigned to each document that will be referenced with an olink. It is usually added as an id (or xml:id for DocBook5) attribute to the root element of the document.

2. Decide on your output hierarchy.

For creating links between documents, the relative locations of the output documents must be known. Before going further you must decide the names and locations of the output directories for all the documents from the domain. Each directory will be represented by an element: <dir name="directory\_name">, in the target database document.

3. Create the target database document.

Each collection of documents has a master target database document that is used to resolve all olinks from that collection. The target database document is an XML file that is created once. It provides a means for pulling in the target data for each document. The database document is static and all the document data is pulled in dynamically.

**Example:** The following is an example of a target database document. It structures a collection of documents in a sitemap element that provides the relative locations of the outputs (HTML in this example). Then it pulls in the individual target data using system entity references to target data files that will be created in the next step.

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE targetset [
<!ENTITY ugtargets SYSTEM "file:///doc/userguide/target.db">
<!ENTITY agttargets SYSTEM "file:///doc/adminguide/target.db">
<!ENTITY reftargets SYSTEM "file:///doc/man/target.db">
]>
<targetset>
 <targetsetinfo>
 Description of this target database document,
 which is for the examples in olink doc.
 </targetsetinfo>

 <!-- Site map for generating relative paths between documents -->
 <sitemap>
 <dir name="documentation">
 <dir name="guides">
 <dir name="mailuser">
 <document targetdoc="MailUserGuide"
 baseuri="userguide.html">
 &ugtargets;
 </document>
 </dir>
 <dir name="mailadmin">
 <document targetdoc="MailAdminGuide">
 &agttargets;
 </document>
 </dir>
 </dir>
 <dir name="reference">
 <dir name="mailref">
 <document targetdoc="MailReference">
 &reftargets;
 </document>
 </dir>
 </dir>
 </dir>
 </sitemap>
</targetset>
```

4. Generate the target data files by executing a DocBook transformation scenario.

Before applying the transformation, you need to edit the transformation scenario, go to the **Parameters** tab, and make sure the value of the collect.xref.targets parameter is set to yes. The default name of a target data file is target.db, but it can be changed by setting an absolute file path in the targets.filename parameter.



**Example:** An example of a target .db file:

```
<div element="book" href="#MailAdminGuide" number="1" targetptr="user_accounts">
 <ttl>Administering User Accounts</ttl>
 <xrefext>How to administer user accounts</xrefext>
 <div element="part" href="#d5e4" number="1">
 <ttl>First Part</ttl>
 <xrefext>Part I, "First Part"</xrefext>
 <div element="chapter" href="#d5e6" number="1">
 <ttl>Chapter Title</ttl>
 <xrefext>Chapter 1, Chapter Title</xrefext>
 <div element="sect1" href="#src_chapter" number="1" targetptr="src_chapter">
 <ttl>Section1 Title</ttl>
 <xrefext>xreflabel_here</xrefext>
 </div>
 </div>
 </div>
</div>
```

5. Insert olink elements in the DocBook documents.

When editing a DocBook XML document in **Author** mode, the **Insert OLink** action is available in the  **Link** drop-down menu from the toolbar. This action opens the **Insert OLink** dialog box that allows you to select the target of an olink from the list of all possible targets from a specified target database document (specified in the **Targetset URL** field). Once a **Targetset URL** is selected, the structure of the target documents is presented. For each target document (targetdoc), its content is displayed, allowing you to easily identify the appropriate targetptr. You can also use the search fields to quickly identify a target. If you already know the values for the targetdoc and targetptr attributes, you can insert them directly in the corresponding fields.

**Example:** In the following image, the target database document is called `target.xml`, `dbadmin` is selected for the target document (targetdoc), and `bldinit` is selected as the value for the targetptr attribute. Notice that you can also add XREF text into the olink by using the xrefext field.

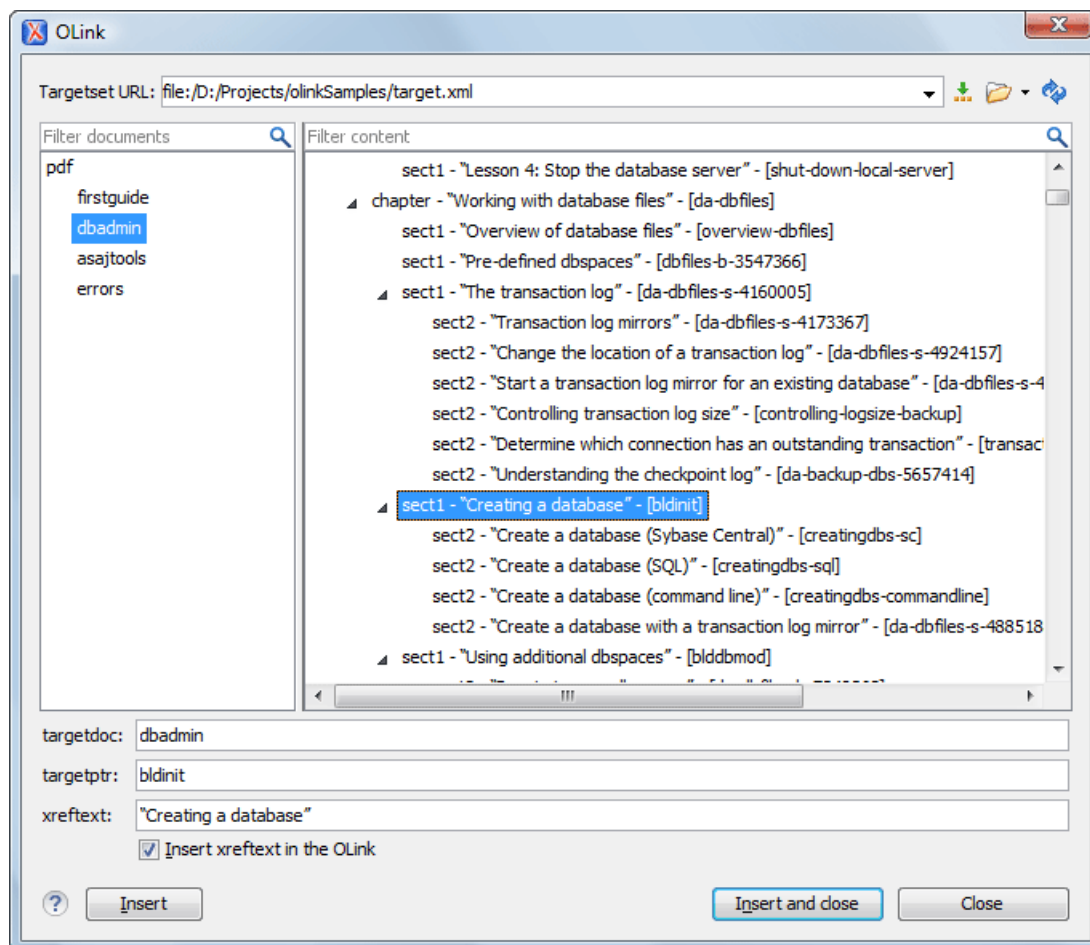


**Figure 405: Insert OLink Dialog Box**

6. Process a DocBook transformation for each document to generate the output.
  - a) Edit the transformation scenario and set the value of the `target.database.document` parameter to be the URL of the target database document.
  - b) Apply the transformation scenario.

## DocBook 5 Document Type (Framework)

*DocBook* is a very popular set of tags for describing books, articles, and other prose documents, particularly technical documentation. DocBook provides a vast number of semantic element tags, divided into three broad categories: structural, *block-level*, and *inline*. DocBook content can then be published in a variety of formats, including HTML, PDF, WebHelp, and EPUB.

### File Definition

A file is considered to be a DocBook 5 document when the namespace is `http://docbook.org/ns/docbook`.

### Default Document Templates

There are a variety of default *DocBook* 5 templates available when creating [new documents from templates](#) and they can be found in: **Framework Templates > DocBook 5 > DocBook 5.0** and **Framework Templates > DocBook 5 > DocBook 5.1**.

New document templates for both DocBook 5 documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Docbook5.0` folder.

New document templates for both DocBook 5.1 documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Docbook5.1` folder.

### Default Schema for Validation and Content Completion

The default schema that is used if one is not detected is `docbookx1.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/5.0/rng/` (or for DocBook 5.1 in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/5.1/rng/`). Other types of schemas for various DocBook versions are also located in various folders inside the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/` directory.

### Transformation Scenarios

Oxygen XML Developer includes numerous built-in DocBook transformation scenarios that allow you to transform DocBook 5 documents to a variety of outputs, such as WebHelp, PDF, HTML, HTML Chunk, XHTML, XHTML Chunk, and EPUB. Oxygen XML Developer also includes a DocBook 5.1 transformation scenario for [Assembly documents](#). All of them are listed in the **DocBook 5** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

For more information, see the [DocBook Transformation Scenarios](#) on page 699 section.

### Resources

- [DocBook 5.0 \(and older\) Specifications](#)
- [Docbook 5.1 Specifications](#)
- [DocBook 5.1: The Definitive Guide](#)

### Related Information:

[Editing XML Documents in Text Mode](#) on page 359

[DocBook 5.1 Assembly](#) on page 687

[DocBook 5.1 Topic](#) on page 688

### Inserting an olink in DocBook Documents

The `olink` element is used for linking to resources outside the current DocBook document. The `targetdoc` attribute is used for the document ID that contains the target element and the `targetptr` attribute for the ID of

the target element (the value of an `id` or `xml:id` attribute). The combination of those two attributes provides a unique identifier to locate cross references.

For example, a *Mail Administrator Guide* with the document ID `MailAdminGuide` might contain a chapter about user accounts, like this:

```
<chapter id="user_accounts">
<title>Administering User Accounts</title>
<para>blah blah</para>
```

You can form a cross reference to that chapter by adding an `olink`, as in the following example:

```
You may need to update your
<olink targetdoc="MailAdminGuide" targetptr="user_accounts">user accounts
</olink>
when you get a new machine.
```

To use an `olink` to create links between documents, follow these steps:

1. Decide which documents are to be included in the domain for cross referencing.

A unique ID must be assigned to each document that will be referenced with an `olink`. It is usually added as an `id` (or `xml:id` for DocBook5) attribute to the root element of the document.

2. Decide on your output hierarchy.

For creating links between documents, the relative locations of the output documents must be known. Before going further you must decide the names and locations of the output directories for all the documents from the domain. Each directory will be represented by an element: `<dir name="directory_name">`, in the target database document.

3. Create the target database document.

Each collection of documents has a master target database document that is used to resolve all `olinks` from that collection. The target database document is an XML file that is created once. It provides a means for pulling in the target data for each document. The database document is static and all the document data is pulled in dynamically.

**Example:** The following is an example of a target database document. It structures a collection of documents in a `sitemap` element that provides the relative locations of the outputs (HTML in this example). Then it pulls in the individual target data using system entity references to target data files that will be created in the next step.

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE targetset [
<!ENTITY ugtargets SYSTEM "file:///doc/userguide/target.db">
<!ENTITY agttargets SYSTEM "file:///doc/adminguide/target.db">
<!ENTITY reftargets SYSTEM "file:///doc/man/target.db">
]>
<targetset>
 <targetsetinfo>
 Description of this target database document,
 which is for the examples in olink doc.
 </targetsetinfo>

 <!-- Site map for generating relative paths between documents -->
 <sitemap>
 <dir name="documentation">
 <dir name="guides">
 <dir name="mailuser">
 <document targetdoc="MailUserGuide"
 baseuri="userguide.html">
 &ugtargets;
 </document>
 </dir>
 <dir name="mailadmin">
 <document targetdoc="MailAdminGuide">
 &agttargets;
 </document>
 </dir>
 <dir name="reference">
 <dir name="mailref">
 <document targetdoc="MailReference">
 &reftargets;
 </document>
 </dir>
 </dir>
 </dir>
 </sitemap>
```

```
</targetset>
```

4. Generate the target data files by executing a DocBook transformation scenario.

Before applying the transformation, you need to edit the transformation scenario, go to the **Parameters** tab, and make sure the value of the `collect.xref.targets` parameter is set to `yes`. The default name of a target data file is `target.db`, but it can be changed by setting an absolute file path in the `targets.filename` parameter.

**Example:** An example of a `target.db` file:

```
<div element="book" href="#MailAdminGuide" number="1" targetptr="user_accounts">
 <ttl>Administering User Accounts</ttl>
 <xreftext>How to administer user accounts</xreftext>
 <div element="part" href="#d5e4" number="1">
 <ttl>First Part</ttl>
 <xreftext>Part I, "First Part"</xreftext>
 <div element="chapter" href="#d5e6" number="1">
 <ttl>Chapter Title</ttl>
 <xreftext>Chapter 1, Chapter Title</xreftext>
 <div element="sect1" href="#src_chapter" number="1" targetptr="src_chapter">
 <ttl>Section1 Title</ttl>
 <xreftext>xreflabel_here</xreftext>
 </div>
 </div>
 </div>
</div>
```

5. Insert olink elements in the DocBook documents.

When editing a DocBook XML document in **Author** mode, the **Insert OLink** action is available in the  **Link** drop-down menu from the toolbar. This action opens the **Insert OLink** dialog box that allows you to select the target of an olink from the list of all possible targets from a specified target database document (specified in the **Targetset URL** field). Once a **Targetset URL** is selected, the structure of the target documents is presented. For each target document (targetdoc), its content is displayed, allowing you to easily identify the appropriate targetptr. You can also use the search fields to quickly identify a target. If you already know the values for the targetdoc and targetptr attributes, you can insert them directly in the corresponding fields.

**Example:** In the following image, the target database document is called `target.xml`, `dbadmin` is selected for the target document (targetdoc), and `bldinit` is selected as the value for the targetptr attribute. Notice that you can also add XREF text into the olink by using the `xreftext` field.

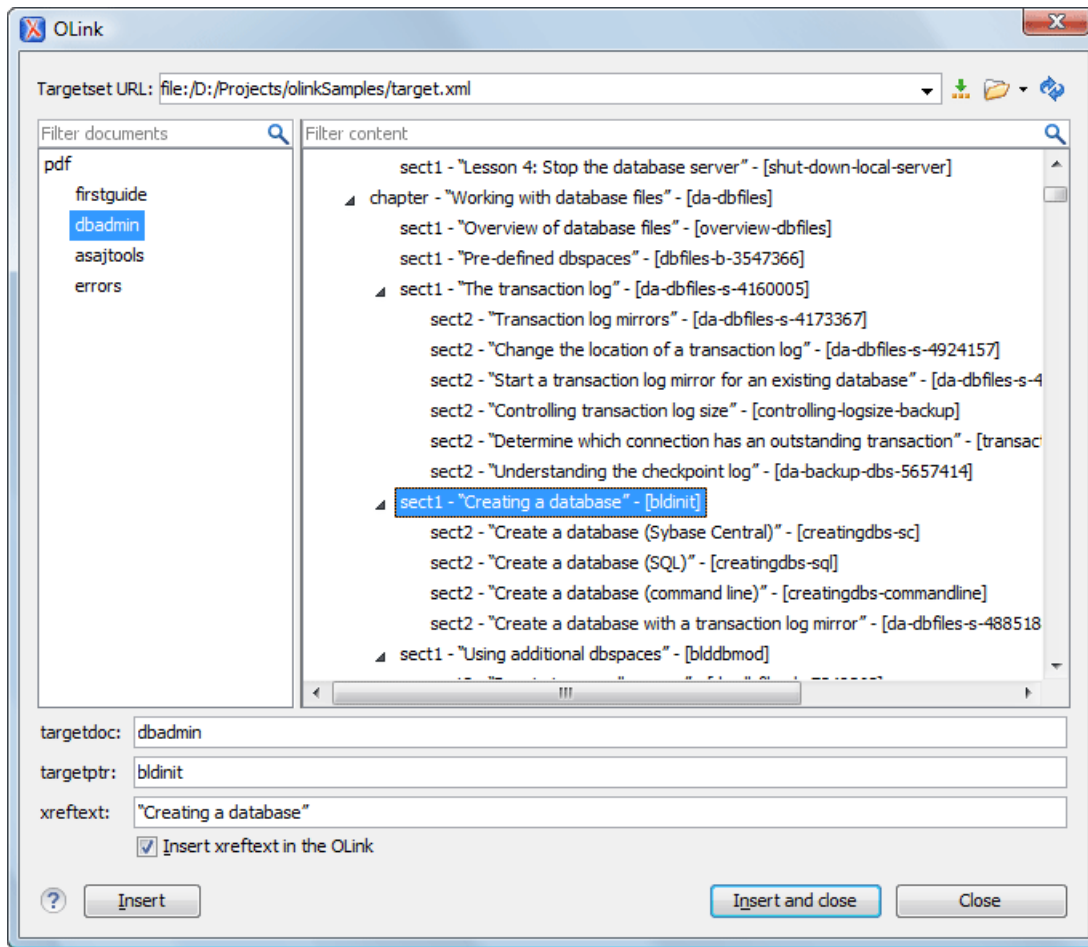


**Figure 406: Insert OLink Dialog Box**

6. Process a DocBook transformation for each document to generate the output.
  - a) Edit the transformation scenario and set the value of the `target.database.document` parameter to be the URL of the target database document.
  - b) Apply the transformation scenario.

## DocBook 5.1 Assembly

The DocBook *Assembly* document type was introduced with DocBook 5.1 and it is used to define the hierarchy and relationships for a collection of resources. It is especially helpful for topic-oriented authoring scenarios since it assembles a set of resources (such as [DocBook 5.1 topics](#)) to form a hierarchical structure for a larger publication.

An *Assembly* document usually has four major parts:

- **Resources** - Identifies a collection of resources (such as topics). An *Assembly* may identify one or more collections.
- **Structure** - Identifies an artifact to be assembled. A document in this case is the particular collection of resources (such as topics) that forms the documentation. Within the `structure` element, an `output` element can be used to identify the type of output to be generated and `module` elements can be used to identify the resources to be included. An *Assembly* may identify one or more *structures*.
- **Relationships** - Identifies relationships between resources. These relationships may be manifested in any number of *structures* during assembly. An *Assembly* may identify any number of relationships.
- **Transformations** - Identifies transformations that can be applied during assembly. An *Assembly* may identify any number of transformations.

For detailed information about the DocBook *Assembly* document type, see [DocBook 5.1: The Definitive Guide - DocBook Assemblies](#).

## File Definition

A file is considered to be an *Assembly* when the root name is `assembly`.

## Default Document Templates

A default **Assembly** document template is available when creating [new documents from templates](#) and it can be found in: **Framework Templates > DocBook 5 > DocBook 5.1**.

The default template for DocBook Assembly documents is located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Docbook5.1` folder.

## Default Schema for Validation and Content Completion

The default schema that is used if one is not detected is `docbookxi.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/5.1/rng/`.

## Transformation Scenarios

Oxygen XML Developer includes a built-in transformation scenario that can be applied on an *Assembly* file to generate an *assembled* (merged) DocBook file. The scenario is called **DocBook Assembly** and is found in the **DocBook 5** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

## Resources

- [DocBook 5.1: The Definitive Guide - DocBook Assemblies](#)
- [Docbook 5.1 Specifications](#)
- Sample files: `[OXYGEN_INSTALL_DIR]/samples/docbook/v5/assembly/`

## DocBook 5.1 Topic

The DocBook *Topic* document type was introduced with DocBook 5.1 and it is used as a modular unit of documentation. It is similar to the concept of the DITA *Topic* and can be used as modular resources in conjunction with [DocBook 5.1 Assembly](#) documents.

For detailed information about the DocBook *Topic* document type, see [DocBook 5.1: The Definitive Guide - Topic](#).

## File Definition

A DocBook file is considered to be a *Topic* when the root name is `topic`.

## Default Document Templates

A default **Topic** document template is available when creating [new documents from templates](#) and it can be found in: **Framework Templates > DocBook 5 > DocBook 5.1**.

The default template for DocBook Assembly documents is located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Docbook5.1` folder.

## Default Schema for Validation and Content Completion

The default schema that is used if one is not detected is `docbookxi.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/5.1/rng/`.

## Transformation Scenarios

Since DocBook *Topics* are modular resources, they are *assembled* and transformed in the [DocBook Assembly transformation process](#). You can also use any of the built-in DocBook transformation scenarios to transform individual DocBook *Topics* to a variety of outputs, such as PDF, HTML, EPUB, and more. They are found in the **DocBook 5** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

## Resources

- [DocBook 5.1: The Definitive Guide - Topic](#)
- [Docbook 5.1 Specifications](#)
- Sample files: `[OXYGEN_INSTALL_DIR]/samples/docbook/v5/assembly/`

## Related Information:

[DocBook 5.1 Assembly](#) on page 687

## DocBook Targetset Document Type (Framework)

DocBook *Targetset* documents are used to resolve cross references with the DocBook olink.

### File Definition

A file is considered to be a *Targetset* when the root name is `targetset`.

### Default Document Templates

A default **Map** document template is available when creating [new documents from templates](#) and it can be found in: **Framework Templates > DocBook Targetset**.

The default template for DocBook Targetset documents is located in the `[OXYGEN_INSTALL_DIR]/frameworks/docbook/templates/Targetset` folder.

### Default Schema for Validation and Content Completion

The default schema, `targetdatabase.dtd`, for this type of document is stored in `[OXYGEN_INSTALL_DIR]/frameworks/docbook/xsl/common/`.

## Resources

- [DocBook Specifications](#)

## DITA Topics Document Type (Framework)

The Darwin Information Typing Architecture (DITA) is an XML-based architecture for authoring, producing, and delivering technical information. It divides content into small, self-contained topics that you can reuse in various deliverables. The extensibility of DITA permits organizations to define specific information structures while still using standard tools to work with them. DITA content is created as topics, each an individual XML file. Typically, each topic has a defined primary objective and structure, and DITA also includes several specialized topic types (*task*, *concept*, *reference*, *glossary entry*).

### File Definition

A file is considered to be a DITA topic document when one of the following conditions are true:

- The root element name is one of the following: `concept`, `task`, `reference`, `dita`, or `topic`.
- The PUBLIC ID of the document is a PUBLIC ID for the elements listed above.
- The root element of the file has an attribute named `DITAArchVersion` for the “`http://dita.oasis-open.org/architecture/2005/`” namespace. This enhanced case of matching is only applied when the [Enable DTD/XML Schema processing in document type detection option](#) is selected from the [Document Type Association preferences page](#).

### Default Document Templates

There are a variety of default *DITA topic* templates available when creating [new documents from templates](#) and they can be found in various folders inside: **Framework Templates > DITA**.

The default templates for DITA topic documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/dita/templates/topic` folder.



## Default Schema for Validation and Content Completion

Default schemas that are used if one is not detected in the DITA documents are stored in the various folders inside *DITA-OT-DIR/dtd/* or *DITA-OT-DIR/schema/*.

## Default XML Catalogs

The default [XML Catalogs](#) for the DITA topic document type are as follows:

- *DITA-OT-DIR/catalog-dita.xml*
- *[OXYGEN\_INSTALL\_DIR]/frameworks/dita/catalog.xml*
- *[OXYGEN\_INSTALL\_DIR]/frameworks/dita/plugin/catalog.xml*
- *[OXYGEN\_INSTALL\_DIR]/frameworks/dita/styleguide/catalog.xml*

## Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform individual DITA Topics to a XHTML or PDF output. They can be found in the **DITA** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

## Resources

- [DITA Specifications](#)
- [DITA Style Guide Best Practices for Authors](#)
- [Oxygen Video Tutorial: DITA Editing](#)

## Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## DITA Map Document Type (Framework)

[DITA maps](#) are documents that collect and organize references to DITA topics to indicate the relationships between the topics. They can be used as a container for topics used to transform a collection of content into a publication and they offer a sequence and structure to the topics. They can also serve as outlines or tables of contents for DITA deliverables and as build manifests for DITA projects. *DITA maps* allow scalable reuse of content across multiple contexts. Maps can reference topics or other maps, and can contain a variety of content types and metadata.

## File Definition

A file is considered to be a *DITA map* document when one of the following conditions are true:

- The root element name is one of the following: map, bookmap.
- The public ID of the document is `-//OASIS//DTD DITA Map` or `-//OASIS//DTD DITA BookMap`.
- The root element of the file has an attribute named `class` that contains the value `map/map` and a `DITAArchVersion` attribute from the <http://dita.oasis-open.org/architecture/2005/> namespace. This enhanced case of matching is only applied when the [Enable DTD/XML Schema processing in document type detection](#) option from the [Document Type Association](#) preferences page is selected.

## Default Document Templates

There are a variety of default *DITA map* templates available when creating [new documents from templates](#) and they can be found in various folders inside: **Framework Templates > DITA Map**.

The default templates for *DITA map* documents are located in the *[OXYGEN\_INSTALL\_DIR]/frameworks/sita/templates/map* folder.

## Default Schema for Validation and Content Completion

Default schemas that are used if one is not detected in the *DITA map* document are stored in the various folders inside *DITA-OT-DIR/dtd/* or *DITA-OT-DIR/schema/*.



## Default XML Catalogs

The default [XML Catalogs](#) for the *DITA map* document type are as follows:

- `[OXYGEN_INSTALL_DIR]/frameworks/dita/catalog.xml`
- `DITA-OT-DIR/catalog-dita.xml`

## Transformation Scenarios

Oxygen XML Developer includes numerous built-in transformation scenarios that allow you to transform *DITA maps* to a variety of outputs, such as WebHelp, PDF, ODF, XHTML, EPUB, and CHM. All of them are listed in the **DITA Map** section in the [Configure Transformation Scenario\(s\) dialog box](#).

For more information, see the [DITA Map Transformation Scenarios](#) on page 703 section.

## Resources

- [DITA Specifications](#)
- [DITA Style Guide Best Practices for Authors](#)
- [Oxygen Video Tutorial: DITA Maps Manager](#)

## Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## XHTML Document Type (Framework)

The Extensible HyperText Markup Language (XHTML), is a markup language that has the same depth of expression as HTML, but also conforms to XML syntax.

### File Definition

A file is considered to be an XHTML document when the root element name is `html`.

### Default Document Templates

There are a variety of default *XHTML* templates available when creating [new documents from templates](#) and they can be found in: **Framework Templates > XHTML**.

The default templates for XHTML documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/xhtml/templates/` folder.

### Default Schema for Validation and Content Completion

Default schemas that are used if one is not detected in the XHTML file are stored in the following locations:

- XHTML 1.0 - `[OXYGEN_INSTALL_DIR]/frameworks/xhtml/dtd/` or `[OXYGEN_INSTALL_DIR]/frameworks/xhtml/nvdl/`.
- XHTML 1.1 - `[OXYGEN_INSTALL_DIR]/frameworks/xhtml11/dtd/` or `[OXYGEN_INSTALL_DIR]/frameworks/xhtml11/schema/`.
- XHTML 5 - `[OXYGEN_INSTALL_DIR]/frameworks/xhtml/xhtml5 (epub3)/`.

## Default XML Catalogs

The default [XML Catalogs](#) for the XHTML document type are as follows:

- `[OXYGEN_INSTALL_DIR]/frameworks/xhtml/dtd/xhtmlcatalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/relaxng/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/nvdl/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/xhtml11/dtd/xhtmlcatalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/xhtml11/schema/xhtmlcatalog.xml`
- `[OXYGEN_INSTALL_DIR]/xhtml5 (epub3)/catalog-compatible.xml`

## Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform XHTML documents to several types of DITA document types (topic, task, concept, reference). They can be found in the **XHTML** section in the [Configure Transformation Scenario\(s\) dialog box](#).

## Resources

- [XHTML Specifications](#)

## Related Information:

[Editing XHTML Documents](#) on page 663

[Editing XML Documents in Text Mode](#) on page 359

## TEI P5 Document Type (Framework)

The *TEI* (*Text Encoding Initiative*) document type is an international and interdisciplinary standard that enables libraries, museums, publishers, and individual scholars to represent a variety of literary and linguistic texts for online research, teaching, and preservation.

## File Definition

A file is considered to be a TEI P5 document when one of the following conditions are true:

- The document namespace is *http://www.tei-c.org/ns/1.0*.
- The public ID of the document is *-//TEI P5*.

## Default Document Templates

There are a variety of default *TEI P5* templates available when creating [new documents from templates](#) and they can be found in: **Framework Templates > TEI P5**.

The default templates for TEI P5 documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/tei/templates/TEI P5` folder.

## Default Schema for Validation and Content Completion

The default schema that is used if one is not detected in the TEI P5 document is `tei_all.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/relaxng/`.

## Default XML Catalogs

The default [XML Catalogs](#) for the TEI P5 document type are as follows:

- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/schema/dtd/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/dtd/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/stylesheet/catalog.xml`

## Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform TEI P5 documents to a variety of outputs, such as PDF, XHTML, EPUB, DOCX, and ODT. They can be found in the **TEI P5** section in the [Configure Transformation Scenario\(s\) dialog box](#).

## Resources

- [TEI: P5 Guidelines](#)

## Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## Customization of TEI Frameworks Using the Compiled Sources

The following procedure describes how to update to the latest stable version of TEI Schema and TEI XSL, already integrated in the TEI [framework](#) for Oxygen XML Developer.

1. Go to <https://code.google.com/p/oxygen-tei/>;
2. Go to **Downloads**;
3. Download the latest uploaded .zip file;
4. Unpack the .zip file and copy its content in the Oxygen XML Developer frameworks folder.

## TEI ODD Document Type (Framework)

The *TEI ODD* (*Text Encoding Initiative - One Document Does it all*) document type is a TEI XML-conformant specification format that allows you to create a custom TEI P5 schema in a literate programming fashion. A system of XSLT stylesheets called [Roma](#) was created by the TEI Consortium for manipulating the ODD files.

### File Definition

A file is considered to be a TEI ODD document when the following conditions are true:

- The file extension is .odd.
- The document namespace is <http://www.tei-c.org/ns/1.0>.

### Default Document Templates

There is a default *TEI ODD* document template available when creating [new documents from templates](#) and they can be found in: **Framework Templates > TEI ODD**.

The default template is located in the `[OXYGEN_INSTALL_DIR]/frameworks/tei/templates/TEI ODD` folder.

### Default Schema for Validation and Content Completion

The default schema that is used if one is not detected in the TEI ODD document is `tei_odds.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/relaxng/`.

### Default XML Catalogs

The default [XML Catalogs](#) for the TEI ODD document type are as follows:

- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/schema/catalog.xml`

### Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform TEI ODD documents to a variety of outputs, such as PDF, XHTML, EPUB, DOCX, ODT, RNG, DTD, and XML Schema. They can be found in the **TEI ODD** section in the [Configure Transformation Scenario\(s\) dialog box](#).

### Resources

- [TEI: Getting Started with ODD](#)

### Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## jTEI Document Type (Framework)

The *jTEI* (*Journal of the Text Encoding Initiative*) document type is a highly restrictive customization (only about 80 elements are included) of the TEI P5 *framework*.

## File Definition

A file is considered to be a *jTEI* document when the root element is named *TEI*, it is in the namespace *http://www.tei-c.org/ns/1.0*, and the @rend attribute is set to "jTEI".

## Default Document Templates

There is a default **jTEI Article** template available when creating [new documents from templates](#) and they can be found in: **Framework Templates > TEI JTEI**.

The default template is located in the `[OXYGEN_INSTALL_DIR]/frameworks/tei/templates/TEI jTEI` folder.

## Default Schema for Validation and Content Completion

The default schema that is used if one is not detected is `tei_jtei.rng` and it is stored in `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/relaxng/`.

## Default XML Catalogs

The default [XML Catalogs](#) for jTEI are as follows:

- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/schema/dtd/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/custom/schema/dtd/catalog.xml`
- `[OXYGEN_INSTALL_DIR]/frameworks/tei/xml/tei/stylesheet/catalog.xml`

## Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform jTEI documents to PDF and ODT. They can be found in the **TEI JTEI** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

## Resources

- [jTEI Article Guidelines](#)

## Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## JATS Document Type (Framework)

The *JATS (NISO Journal Article Tag Suite)* document type is a technical standard that defines an XML format for scientific literature.

## File Definition

A file is considered to be a JATS document when the PUBLIC ID of the document contains the string `-//NLM//DTD`.

## Default Document Templates

There are some default *JATS* templates available when creating [new documents from templates](#) and they can be found in: **Framework Templates > JATSKit - NISO JATS and NLM BITS**

The default templates for JATS documents are located in the `[OXYGEN_INSTALL_DIR]/frameworks/jats/templates/` folder.

## Default Schema for Validation and Content Completion

Default schemas that are used if one is not detected in the JATS document are stored in `[OXYGEN_INSTALL_DIR]/frameworks/jats/lib/schemas/`.

## Default XML Catalog

The default [XML Catalog](#), `jatskit-catalog.xml`, is stored in `[OXYGEN_INSTALL_DIR]/frameworks/jats/lib/schemas/`.

## Transformation Scenarios

Oxygen XML Developer includes built-in transformation scenarios that allow you to transform JATS documents to a variety of outputs, such as PDF, HTML, and EPUB. They can be found in the **JATSKit** section in the [Configure Transformation Scenario\(s\)](#) dialog box.

## Resources

- 
- [NLM Journal Archiving and Interchange Tag Suite](#)

## Related Information:

[Editing XML Documents in Text Mode](#) on page 359

## EPUB Document Type (Framework)

**EPUB** is an e-book file format that is a ZIP archive and can be downloaded and read on devices such as phones, tablets, computers, or e-readers. Oxygen XML Developer includes an [Archive Browser view](#) that allows you to view the contents and structure of this type of file.

Three distinct [frameworks](#) are supported for the EPUB document type:

- **NCX** - A declarative global navigation definition.
- **OCF** - The Open Container Format (OCF) defines a mechanism by which all components of an Open Publication Structure (OPS) can be combined into a single file system entity.
- **OPF** - The Open Packaging Format (OPF) defines the mechanism by which all components of a published work that conforms to the Open Publication Structure (OPS) standard (including metadata, reading order, and navigational information) are packaged in an OPS Publication.

**Note:** Oxygen XML Developer supports OPF 2.0, OPF 3.0, and OPF 3.1.

## File Definition

A file is considered to be an *EPUB* document if it has a file extension of `.epub`.

## Default Document Templates

There are a variety of default *EPUB* templates available when creating [new documents from templates](#) and they can be found the following folders in **Framework Templates**: **NCX**, **OCF**, **OPF 2.0**, **OPF 3.0**, and **OPF 3.1**.

- The default templates for the **NCX** document types are located in the `[OXYGEN_INSTALL_DIR]/frameworks/ncx/templates` folder.
- The default templates for the **OCF** document types are located in the `[OXYGEN_INSTALL_DIR]/frameworks/ocf/templates` folder.
- The default template for the **OPF 2.0** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/templates/2.0` folder.
- The default template for the **OPF 3.0** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/templates/3.0` folder.
- The default template for the **OPF 3.1** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/templates/3.1` folder.

## Default Schema

The default schema files for the various types of EPUB document types are located in the following directories:

- The default schema files for the **NCX** document types are located in the `[OXYGEN_INSTALL_DIR]/frameworks/ncx/schemas` folder.

- The default schema files for the **OCF** document types are located in the `[OXYGEN_INSTALL_DIR]/frameworks/ocf/schemas` folder.
- The default schema files for the **OPF 2.0** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/schemas/2.0` folder.
- The default schema files for the **OPF 3.0** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/schemas/3.0` folder.
- The default schema files for the **OPF 3.1** document type is located in the `[OXYGEN_INSTALL_DIR]/frameworks/opf/schemas/3.1` folder.

#### Related Information:

[Working with Archive Files](#) on page 950

## Other Supported Document Types

---

Along with the [fully supported predefined frameworks \(document types\)](#), Oxygen XML Developer also provides limited support (including document templates) for editing a variety of other document types. All the specialized views, editors, actions, and options are dynamic according to the type of file that is opened or created. Other document types that are supported in Oxygen XML Developer include:

- [EPUB \(NCX, OCF, OPF 2.0, 3.0, & 3.1\)](#) - A standard for e-book files.
- [OOXML](#) - An XML-based file format for representing spreadsheets, charts, presentations, and word processing documents.
- [ODF](#) - An free and open-source XML-based file format for electronic office documents, such as spreadsheets, charts, presentations, and word processing documents.
- [DocBook Targetset](#) - For resolving cross-references when using *olinks*.
- [Ant Build Scripts](#) - A tool for automating software build processes, written in Java and primarily intended for use with Java.
- [XSLT Stylesheets](#) - A document type that provides a visual mode for editing XSLT stylesheets.
- [WSDL](#) - Web Services Description Language is an XML language for describing the functionality offered by a web service.
- [Schematron](#) - For making assertions about the presence or absence of patterns in XML documents. This document type applies to the ISO Schematron version.
- [Schematron Quick Fixes \(SQF\)](#) - An extension of the ISO standard Schematron, allows developers to define *Quick Fixes* for Schematron errors.
- [StratML \(Part 1 & 2\)](#) - Part 1 and 2 of the Strategy Markup Language specification.
- [XProc](#) - A document type for processing XProc script files.
- [XML Schema](#) - Documents that provide support for editing annotations.
- [SVG](#) - Scalable Vector Graphics is a language for describing two-dimensional graphics in XML.
- [XLIFF \(1.2 & 2.0\)](#) - XML Localization Interchange File Format is a standard for passing data between tools during a localization process.
- [XQuery](#) - The common query language for XML.
- [CSS](#) - Cascading Style Sheets is a language used for describing the look and formatting of a document.
- [LESS](#) - A dynamic style sheet language that can be compiled into CSS.
- [Relax NG Schema](#) - A schema language that specifies a pattern for the structure and content of an XML document.
- [NVDL Schema](#) - Namespace Validation Dispatching Language allows you to specify sections of XML documents to be validated against various schemas.
- [JSON](#) - JavaScript Object Notation is a lightweight data-interchange format.
- [Markdown](#) - A lightweight markup language with plain text formatting syntax that can be converted to HTML or DITA.
- [JavaScript](#) - Programming language of HTML and the Web.
- [XMLSpec](#) - A markup language for W3C specifications and other technical reports.
- [DITaval](#) - DITA conditional processing profile to identify the values you want to conditionally process for a particular output, build, or other purpose.

- Daisy - A technical standard for digital audio books, periodicals, and computerized text. It is designed to be an audio substitute for print material.
- EAD - Encoded Archival Description is an XML standard for encoding archival finding aids.
- KML - Keyhole Markup Language is an XML notation for expressing geographic visualization in maps and browsers.
- Maven Project & Settings - Project or settings file for Maven build automation tool that is primarily used for Java projects.
- Oasis *XML Catalog* - An [XML Catalog](#) document that describes a mapping between external entity references and locally-cached equivalents.
- [Other Non-XML Files](#)- Oxygen XML Developer also includes a simple text editor and a variety of helpful features for creating and editing non-XML files.

## Transforming Documents

---

### Topics:

- [Transformation Scenarios](#)
- [WebHelp Output](#)
- [PDF Output](#)

XML documents can be transformed into a variety of user-friendly output formats that can be viewed by end users. This process is known as a *transformation*.

Oxygen XML Developer includes numerous built-in transformation possibilities to publish XML content in various output formats (such as WebHelp, PDF, CHM, EPUB, JavaHelp, Eclipse Help, XHTML, etc.)

For transformations that are not included in your installed version of Oxygen XML Developer, simply install the tool chain required to perform the specific transformation and process the files in accordance with the processor instructions. A multitude of target formats are possible. The basic condition for a transformation to any format is that your source document is well-formed.

## Transformation Scenarios

---

A transformation scenario is a set of complex operations and settings that gives you the possibility to obtain outputs of multiple types (XML, HTML, PDF, EPUB, etc.) from the same source of XML files and stylesheets.

**Note:** You need to use the appropriate stylesheet according to the source definition and the desired output. For example, if you want to transform into an HTML format using a DocBook stylesheet, your source XML document should conform with the DocBook DTD.

Executing a transformation scenario implies multiple actions, such as:

- Validating the input file.
- Obtaining intermediate output files (for example, formatting objects for the XML to PDF transformation).
- Using transformation engines to produce the output.

Before transforming an XML document in Oxygen XML Developer, you need to define a transformation scenario to apply to that document. A scenario is a set of values for various parameters that define a transformation. It is not related to a particular document, but rather to a document type. Oxygen XML Developer included [preconfigured built-in transformation scenarios](#), but you can also [create new transformation scenarios](#).

When creating new transformation scenarios, the types that are available include:

- **Scenarios that Apply to XML Files** - This type of scenario contains the location of an XSLT stylesheet that is applied on the edited XML document, as well as other transformation parameters. For more information, see [XML Transformation with XSLT](#) on page 749 and [XML Transformation with XQuery](#) on page 758.
- **Scenarios that Apply to XSLT Files** - This type of scenario contains the location of an XML document that the edited XSLT stylesheet is applied to, as well as other transform parameters. For more information, see [XSLT Transformation](#) on page 775.
- **Scenarios that Apply to XQuery Files** - This type of scenario contains the location of an XML source, that the edited XQuery file is applied to, as well as other transform parameters. When the XML source is a native XML database, the XML source field of the scenario is empty because the XML data is read with XQuery-specific functions, such as `document()`. When the XML source is a local XML file, the URL of the file is specified in the XML input field of the scenario. For more information, see [XQuery Transformation](#) on page 787.



- **Scenarios that Apply to SQL Files** - This type of scenario specifies a database connection for the database server that runs the SQL file that is associated with the scenario. The data processed by the SQL script is located in the database.
- **Scenarios that Apply to XProc Files** - This type of scenario contains the location of an XProc script, as well as other transform parameters. For more information, see [SQL Transformation](#) on page 792.
- **DITA-OT Scenarios** - This type of scenario provides the parameters for an Ant transformation that executes a DITA-OT build script. Oxygen XML Developer includes a built-in version of Ant and a built-in version of DITA-OT, although you can also set other versions in the scenario. For more information, see [DITA OT Transformation](#) on page 763.
- **ANT Scenarios** - This type of scenario contains the location of an Ant build script, as well as other transform parameters. For more information, see [Ant Transformation](#) on page 773.

**Note:**

Status messages generated during the transformation process are displayed in the [Information view](#).

## Built-in Transformation Scenarios

Oxygen XML Developer includes preconfigured built-in transformation scenarios that are used for common transformations. They can be found in the various sections in the [Configure Transformation Scenario\(s\) dialog box](#) or [Transformation Scenarios view](#). All the predefined *document types (frameworks)* that are included in Oxygen XML Developer have various transformation scenarios in their specific sections, including the most popular *frameworks*, such as DITA, DocBook, TEI, XHTML, JATS, OOXML, and more.

To obtain the desired output, use one of the following actions from the toolbar or **Transform** submenu in the contextual menu of the [Project view](#):

-  **Apply Transformation Scenario(s) (Ctrl + Shift + T (Command + Shift + T on OS X))** - If you have associated transformation scenarios for the current document, this action will simply [apply the association](#) and begin the transformation process. If an association is not detected, this action will open the [Configure Transformation Scenario\(s\) dialog box](#) where you can choose the scenarios you want to apply.
-  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** - This action will open the [Configure Transformation Scenario\(s\) dialog box](#) where you can choose the scenarios you want to apply.

**Note:**

- You can apply a transformation even if the current document is not associated with a transformation scenario.
- If the document contains an `xml-stylesheet` processing instruction that references an XSLT stylesheet (commonly used to display the document in web browsers), Oxygen XML Developer prompts you to associate the document with a built-in transformation scenario.
- The default transformation scenario is suggested based on the processing instruction from the edited document.

**Related Information:**

[Creating New Transformation Scenarios](#) on page 749  
[Editing a Transformation Scenario](#) on page 793  
[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795  
[Applying Associated Transformation Scenarios](#) on page 795  
[Transformation Scenarios View](#) on page 799

### DocBook Transformation Scenarios

Built-in transformation scenarios allow you to transform DocBook documents to a variety of outputs, such as WebHelp, PDF, HTML, HTML Chunk, XHTML, XHTML Chunk, and EPUB. Oxygen XML Developer also includes a DocBook 5.1 transformation scenario for *Assembly* documents. All of them are listed in the **DocBook 4** and **DocBook 5** sections in the [Configure Transformation Scenario\(s\) dialog box](#).

**Related Information:**

[Editing a Transformation Scenario](#) on page 793  
[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

## DocBook to WebHelp Classic Transformation

DocBook documents can be transformed into several types of WebHelp systems.

### WebHelp Classic Output

To publish a DocBook document as a **WebHelp Classic** system, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
2. Select the **DocBook WebHelp Classic** scenario from the **DocBook 4** or **DocBook 5** section.
3. Click **Apply associated**.

When the **DocBook WebHelp Classic** transformation is complete, the output is automatically opened in your default browser.

### WebHelp Classic with Feedback Output

To publish a DocBook document as a **WebHelp Classic with Feedback** system, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp Classic with Feedback** scenario from the **DocBook 4** or **DocBook 5** section.
3. Click **Apply associated**.
4. Enter the documentation product ID and the documentation version.

When the **DocBook WebHelp Classic with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the instructions to complete the system deployment. For more information, see [Deploying a Feedback-Enabled System](#) on page 864.

For more information about the feedback-enabled WebHelp system, watch our video demonstration:

<https://www.youtube.com/embed/eoQ2uxHvppE>

## Customizing DocBook WebHelp Transformation Scenarios

To customize a DocBook WebHelp transformation scenario, you can edit various parameters, including the following most commonly used ones:

### **args.default.language**

This parameter is used if the language is not detected in the *DITA map*. The default value is `en-us`.

### **clean.output**

Deletes all files from the output folder before the transformation is performed (only `no` and `yes` values are valid and the default value is `no`).

### **l10n.gentext.default.language**

This parameter is used to identify the correct stemmer that differs from language to language. For example, for English the value of this parameter is `en` or for French it is `fr`, and so on.

### **use.stemming**

Controls whether or not you want to include stemming search algorithms into the published output (default setting is `false`).

### **webhelp.copyright**

Adds a small copyright text that appears at the end of the **Table of Contents** pane.

### **webhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

### **webhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

## webhelp.footer.file

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate div or span element, and the code for each script element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs); }
 (document, 'script', 'facebook-jssdk')); -->
 </script>
 <div data-share="true" data-show-faces="true" data-action="like"
 data-layout="standard" class="fb-like"/>
</div>
```

## webhelp.footer.include

Specifies whether or not to include footer in each WebHelp page. Possible values: yes, no. If set to no, no footer is added to the WebHelp pages. If set to yes and the webhelp.footer.file parameter has a value, then the content of that file is used as footer. If the webhelp.footer.file has no value then a default Oxygen footer is inserted in each WebHelp page.

## webhelp.logo.image.target.url

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

## webhelp.logo.image

Specifies a path to an image displayed as a logo in the left side of the output header.

## webhelp.product.id (available only for Feedback-enabled systems)

This parameter specifies a short name for the documentation target, or product (for example, mobile-phone-user-guide, hvac-installation-guide).

**Note:** You can deploy documentation for multiple products on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: < > / \ ' ( ) { } = ; \* % + &.

## webhelp.product.version (available only for Feedback-enabled systems)

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.

**Note:** Multiple documentation versions can be deployed on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: < > / \ ' ( ) { } = ; \* % + &.

## webhelp.search.ranking

If this parameter is set to false then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is true).

## webhelp.skin.css

Path to a CSS file that sets the style theme in the WebHelp Classic output. It can be one of the predefined skin CSS from the OXYGEN\_INSTALL\_DIR\frameworks\docbook\xsl\com.oxygenxml.webhelp.classic\predefined-skins directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

For more information about all the DocBook transformation parameters, go to <http://docbook.sourceforge.net/release/xsl/current/doc/fo/index.html>.

## Related Information:

[DITA Map to WebHelp Classic Transformation](#) on page 708

## DocBook to DITA Transformation

Oxygen XML Developer includes a built-in transformation scenario that is designed to convert DocBook content to DITA. This transformation scenario is based upon a DITA Open Toolkit plugin that is available at [sourceforge.net](http://sourceforge.net).

To convert a DocBook document to DITA, follow these steps:

1. Use one of the following two methods to begin the transformation process:
  - To apply the transformation scenario to a newly opened file, use the  **Apply Transformation Scenario(s) (Ctrl + Shift + T (Command + Shift + T on OS X))** action from the toolbar or the **Document > Transformation** menu.
  - To customize the transformation or change the scenario that is associated with the document, use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu.
2. Select the **DocBook to DITA** transformation scenario in the **DocBook 4** or **DocBook 5** section.
3. Click the **Apply associated** button to run the transformation.

**Step Result:** The transformation will convert as many of the DocBook elements into equivalent DITA elements as it can recognize in its mapping process. For elements that cannot be mapped, the transformation will insert XML comments so that you can see which elements could not be converted.
4. Adjust the resulting DITA composite to suit your needs. You may have to remove comments, fix validation errors, adjust certain attributes, or split the content into individual topics.

### Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

## DocBook to PDF Transformation

Oxygen XML Developer includes a built-in transformation scenario that is designed to convert DocBook content to PDF.

To convert a DocBook document to PDF, follow these steps:

1. Use one of the following two methods to begin the transformation process:
  - To apply the transformation scenario to a newly opened file, use the  **Apply Transformation Scenario(s) (Ctrl + Shift + T (Command + Shift + T on OS X))** action from the toolbar or the **Document > Transformation** menu.
  - To customize the transformation or change the scenario that is associated with the document, use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu.
2. Select the **DocBook PDF** transformation scenario in the **DocBook 4** or **DocBook 5** section.
3. Click the **Apply associated** button to run the transformation.

For information about customizing the PDF output for DocBook content, see [DocBook to PDF Output Customization](#) on page 935.

### Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[DocBook to PDF Output Customization](#) on page 935

## DocBook to EPUB Transformation

Oxygen XML Developer includes a built-in transformation scenario that is designed to convert DocBook content to EPUB. The EPUB specification recommends the use of *OpenType* fonts (recognized by their .otf file extension) whenever possible. To use a specific font, follow these steps:

1. Declare it in your CSS file, as in the following example:

```
@font-face {
 font-family: "MyFont";
 font-weight: bold;
 font-style: normal;
 src: url(fonts/MyFont.otf);
}
```

2. In the CSS, specify where this font is used. To set it as default for h1 elements, use the font-family rule, as in the following example:

```
h1 {
 font-size: 20pt;
 margin-bottom: 20px;
 font-weight: bold;
 font-family: "MyFont";
 text-align: center;
}
```

3. Open the [Configure Transformation Scenario\(s\) dialog box](#), select the **DocBook EPUB** transformation scenario in the **DocBook 4** or **DocBook 5** section, and click **Edit**.
4. In the **Parameters** tab, set the `epub.embedded.fonts` parameter to `fonts/MyFont.otf`. If you need to provide more files, use commas to separate their file paths.

**Note:** The `html.stylesheet` parameter allows you to include a custom CSS in the output EPUB.

5. Run the transformation scenario.

### DITA Map Transformation Scenarios

Built-in transformation scenarios allow you to transform [DITA maps](#) to a variety of outputs, such as WebHelp, PDF, ODF, XHTML, EPUB, CHM, Kindle, and MS Word. Oxygen XML Developer also includes a special [Run DITA-OT Integrator](#) that can be used to integrate a DITA-OT plugin and a **DITA Map Metrics Report** transformation that generates a statistics report for your DITA map. All of them are listed in the **DITA Map** section in the [Configure Transformation Scenario\(s\) dialog box](#).

A variety of transformations scenarios are available for [DITA maps](#):

- Predefined transformation scenarios allow you to transform a *DITA map* to a variety of outputs, such as WebHelp, PDF, ODF, XHTML, EPUB, CHM, Kindle, and MS Word.
- [Run DITA-OT Integrator](#) - Use this transformation scenario if you want to integrate a DITA-OT plugin. This scenario runs an Ant task that integrates all the plugins from the DITA-OT/plugins directory.
- **DITA Map Metrics Report** - Use this type of transformation scenario if you want to generate a *DITA map* statistics report. They contain information such as the number of processed maps and topics, content reuse percentage, number of elements, attributes, words, and characters used in the entire *DITA map* structure, DITA conditional processing attributes used in the *DITA maps*, and more.

### Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Applying Associated Transformation Scenarios](#) on page 795

### DITA Map to WebHelp Responsive Transformation

DITA content can be transformed into several types of WebHelp Responsive systems.

### WebHelp Responsive Output

To publish a [DITA map](#) as **WebHelp Responsive** output, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Responsive** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined [publishing templates](#) that you can use for the layout of your WebHelp system output. You can also [create your own publishing templates or edit existing ones](#).
  - **Parameters Tab** - This tab includes numerous parameters that can be set to customize your WebHelp system output. See the [Parameters section](#) below for details about the most commonly used parameters for WebHelp Responsive transformations.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to process the transformation.

When the **DITA Map WebHelp Responsive** transformation is complete, the output is automatically opened in your default browser.

### WebHelp Responsive with Feedback Output

To publish a [DITA map](#) as a **WebHelp Responsive with Feedback** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Responsive with Feedback** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined [publishing templates](#) that you can use for the layout of your WebHelp system output. You can also [create your own publishing templates or edit existing ones](#).
  - **Parameters Tab** - This tab includes numerous parameters that can be set to customize your WebHelp system output. See the [Parameters section](#) below for details about the most commonly used parameters for WebHelp Responsive transformations.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to begin the transformation.
5. Enter the documentation product ID (value for the `webhelp.product.id` parameter) and the documentation version (value for the `webhelp.product.version` parameter).

When the **DITA Map WebHelp Responsive with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the [instructions to complete the system deployment](#).

### Parameters for Customizing WebHelp Responsive Output

To customize a transformation scenario, you can edit various parameters, including the following most commonly used ones:

#### **args.default.language**

This parameter is used if the language is not detected in the *DITA map*. The default value is `en-us`.

#### **clean.output**

Deletes all files from the output folder before the transformation is performed (only `no` and `yes` values are valid and the default value is `no`).

#### **editlink.remote.ditamap.url**

Use this parameter in conjunction with `editlink.web.author.url` to add an *Edit* link next to the topic title in the WebHelp output. When a user clicks the link, the topic is opened in Oxygen XML Web Author where they can make changes that can be saved to a file server. The value should be set as the custom URL of



the *main DITA map*. For example, a GitHub custom URL might look like this: `https://getFileContent/oxyengxml/userguide/master/UserGuide.ditamap`.

#### **editlink.web.author.url**

This parameter needs to be used in conjunction with `editlink.remote.ditamap.url` to add an *Edit* link next to the topic title in the WebHelp output. When a user clicks the link, the topic is opened in Oxygen XML Web Author where they can make changes that can be saved to a file server. The value should be set as the URL of the Web Author installation. For example: `https://www.oxygenxml.com/oxygen-xml-web-author/`.

#### **editlink.present.only.path.to.topic**

When this parameter is set to "true", the DITA topic path is displayed to the right of each topic title in the WebHelp Responsive output. Also, when this parameter is used, the `editlink.remote.ditamap.url` and `editlink.web.author.url` parameters are ignored.

#### **fix.external.refs.com.oxygenxml (Only supported when the DITA OT transformation process is started from Oxygen XML Developer)**

The DITA Open Toolkit usually has problems processing references that point to locations outside of the directory of the processed *DITA map*. This parameter is used to specify whether or not the application should try to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references. The fix has no impact on your edited DITA content. Allowed values: `true` or `false` (default).

#### **force.unique**

When set to `true` (default value), the transformation will be forced to create unique output files for each instance of a resource when a map contains multiple references to a single topic.

#### **use.stemming**

Controls whether or not you want to include stemming search algorithms into the published output (default setting is `false`).

#### **webhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

#### **webhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

#### **webhelp.reload.stylesheet**

Set this parameter to `true` if you have out of memory problems when generating WebHelp. It will increase processing time but decrease the memory footprint. The default value is `false`.

#### **webhelp.search.custom.excludes.file**

The path of the file that contains name patterns for HTML files that should not be indexed by the WebHelp search engine. Each exclude pattern must be on a new line. The patterns are considered to be relative to the output directory, and they accept wildcards such as `'*'` (matches zero or more characters) or `'?'` (matches one character). For more information about the patterns, see <https://ant.apache.org/manual/dirtasks.html#patterns>.

#### **webhelp.search.japanese.dictionary**

The file path of the dictionary that will be used by the *Kuromoji* morphological engine for indexing Japanese content in the WebHelp pages.

#### **webhelp.search.enable.pagination**

Specifies whether or not search results will be displayed on multiple pages. Allowed values are `yes` or `no`.

#### **webhelp.search.page.numberOfItems**

Specifies the number of search results items displayed on each page. This parameter is only used when the `webhelp.search.enable.pagination` parameter is enabled.

#### **webhelp.search.ranking**

If this parameter is set to `false` then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

### **webhelp.show.changes.and.comments**

When set to yes, user comments, replies to comments, and tracked changes are published in the WebHelp output. The default value is no.

### **webhelp.sitemap.base.url**

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the *DITA map*, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

### **webhelp.sitemap.change.frequency**

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq` element is not added in `sitemap.xml`. Allowed values: `<empty string>` (default), `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, `never`.

### **webhelp.sitemap.priority**

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority). For example, 0.3, 0.5, or 0.8. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

## **Parameters Specific to WebHelp Responsive Output**

### **webhelp.default.collection.type.sequence**

Specifies if the **sequence** value will be used by default when the `collection-type` attribute is not specified. This option is helpful if you want to have *Next* and *Previous* navigational buttons generated for all HTML pages. Allowed values are **no** (default) and **yes**.

### **webhelp.enable.search.autocomplete**

Specifies if the *Autocomplete* feature is enabled in the WebHelp search text field. The default value is yes.

### **webhelp.fragment.after.body**

In the generated output it displays a given XHTML fragment after the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.logo\_and\_title**

In the generated output it displays a given XHTML fragment after the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.main.page.search**

In the generated output it displays a given XHTML fragment after the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment after the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.top\_menu**

In the generated output it displays a given XHTML fragment after the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.body**

In the generated output it displays a given XHTML fragment before the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.logo\_and\_title**

In the generated output it displays a given XHTML fragment before the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.main.page.search**

In the generated output it displays a given XHTML fragment before the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.



**webhelp.fragment.before.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment before the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**webhelp.fragment.before.top\_menu**

In the generated output it displays a given XHTML fragment before the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**webhelp.fragment.footer**

In the generated output it displays a given XHTML fragment as the page footer. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**webhelp.fragment.head**

In the generated output it inserts a given XHTML fragment in the <head> element. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**webhelp.fragment.welcome**

In the generated output it displays a given XHTML fragment as a welcome message (or title). The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**webhelp.merge.nested.topics.related.links**

Specifies if the related links from nested topics will be merged with the links in the parent topic. Thus the links will be moved from the topic content to the related links component and all of the links from the same group (for example, *Related Tasks*, *Related References*, *Related Information*) are merged into a single group. The default value is yes.

**webhelp.show.breadcrumb**

Specifies if the breadcrumb component will be presented in the output. The default value is yes.

**webhelp.show.child.links**

Specifies if child links will be generated in the output for all topics that have subtopics. The default value is no.

**webhelp.show.indexterms.link**

Specifies if an icon that links to the index will be presented in the output. The default value is yes.

**webhelp.show.main.page.tiles**

Specifies if the tiles component will be presented in the main page of the output. For a *tree* style layout, this parameter should be set to no.

**webhelp.show.main.page.toc**

Specifies if the table of contents will be presented in the main page of the output. The default value is yes.

**webhelp.show.navigation.links**

Specifies if navigation links will be presented in the output. The default value is yes.

**webhelp.show.print.link**

Specifies if a print link or icon will be presented within each topic in the output. The default value is yes.

**webhelp.show.related.links**

Specifies if the related links component will be presented in the WebHelp Responsive output. The default value is yes. The `webhelp.merge.nested.topics.related.links` parameter can be used in conjunction with this one to merge the related links from nested topics into the links in the parent topic.

**webhelp.show.publication.toc**

Specifies if a table of contents will be presented on the left side of each topic in the output. The default value is yes.

**webhelp.show.topic.toc**

Specifies if a topic table of contents will be presented on the right side of each topic in the output. This table of contents contains links to each section within the current topic and the section corresponding to the current scroll position is highlighted. The default value is yes.

**webhelp.show.top.menu**

Specifies if a menu will be presented at the topic of the main page in the output. The default value is yes.

### **webhelp.publication.toc.hide.chunked.topics**

Specifies if the table of contents will contain links for *chunked* topics. The default value is yes.

### **webhelp.publication.toc.links**

Specifies which links will be included in the table of contents. The possible values are:

- **chapter** (default) - The TOC will include links for the current topic, its children, its siblings, and its direct ancestor (including the direct ancestor's siblings), and the parent chapter.
- **topic** - The TOC will only include links for the current topic and its direct children.
- **all** - The TOC will include all links.

### **webhelp.publication.toc.tooltip.position**

By default, if a topic contains a `shortdesc` element, its content is displayed in a tooltip when the user hovers over its link in the table of contents. This parameter controls whether or not this tooltip is displayed and its position relative to the link. The possible values are:

- **left** (default)
- **right**
- **top**
- **bottom**
- **hidden** - The tooltip will not be displayed.

### **webhelp.top.menu.depth**

Specifies the maximum depth level of the topics that will be included in the top menu. The default value is 3. A value of 0 means that the menu has unlimited depth.

### **webhelp.topic.collapsible.elements.initial.state**

Specifies the initial state of collapsible elements (tables with titles, nested topics with titles, sections with titles, index term groups). The possible values are `collapsed` or `expanded` (default value).

### **Related Information:**

[Customizing the WebHelp Responsive Output](#) on page 897

[WebHelp Responsive Output Layout and Features](#) on page 854

## **DITA Map to WebHelp Classic Transformation**

DITA content can be transformed into several types of WebHelp Classic systems.

### **WebHelp Classic Output**

To publish a [DITA map](#) as a **WebHelp Classic** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Classic** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- [Skins Tab](#) - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - [Parameters Tab](#) - This tab includes numerous parameters that can be set to customize your WebHelp system output. See the [Parameters section](#) below for details about the most commonly used parameters for WebHelp Responsive transformations.
  - [Filters Tab](#) - This tab allows you to filter certain content elements from the generated output.
  - [Advanced Tab](#) - This tab allows you to specify some advanced options for the transformation scenario.
  - [Output Tab](#) - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to process the transformation.

When the **DITA Map WebHelp Classic** transformation is complete, the output is automatically opened in your default browser.

### WebHelp Classic with Feedback Output

To publish a *DITA map* as a **WebHelp Classic with Feedback** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Classic with Feedback** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Skins Tab** - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - **Parameters Tab** - This tab includes numerous parameters that can be set to customize your WebHelp system output. See the [Parameters section](#) below for details about the most commonly used parameters for WebHelp Responsive transformations.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to begin the transformation.
  5. Enter the documentation product ID (value for the `webhelp.product.id` parameter) and the documentation version (value for the `webhelp.product.version` parameter).

When the **DITA Map WebHelp Classic with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the [instructions to complete the system deployment](#).

For more information about the feedback-enabled WebHelp system, watch our video demonstration:

<https://www.youtube.com/embed/eoQ2uxHvppE>

### Parameters for Customizing WebHelp Classic Output

To customize a transformation scenario, you can edit various parameters, including the following most commonly used ones:

#### **args.default.language**

This parameter is used if the language is not detected in the *DITA map*. The default value is `en-us`.

#### **clean.output**

Deletes all files from the output folder before the transformation is performed (only `no` and `yes` values are valid and the default value is `no`).

#### **fix.external.refs.com.oxygenxml** (Only supported when the DITA OT transformation process is started from Oxygen XML Developer)

The DITA Open Toolkit usually has problems processing references that point to locations outside of the directory of the processed *DITA map*. This parameter is used to specify whether or not the application should try to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references. The fix has no impact on your edited DITA content. Allowed values: `true` or `false` (default).

#### **force.unique**

When set to `true` (default value), the transformation will be forced to create unique output files for each instance of a resource when a map contains multiple references to a single topic.

#### **use.stemming**

Controls whether or not you want to include stemming search algorithms into the published output (default setting is `false`).

**webhelp.body.script**

URL value that specifies the location of a well-formed XHTML file containing the custom script that will be copied in the <body> section of every WebHelp page.

**webhelp.copyright**

Adds a small copyright text that appears at the end of the **Table of Contents** pane.

**webhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

**webhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

**webhelp.footer.file**

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate div or span element, and the code for each script element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs); }
 (document, 'script', 'facebook-jssdk')); -->
 </script>
 <div data-share="true" data-show-faces="true" data-action="like"
 data-layout="standard" class="fb-like"/>
</div>
```

**webhelp.footer.include**

Specifies whether or not to include footer in each WebHelp page. Possible values: yes, no. If set to no, no footer is added to the WebHelp pages. If set to yes and the webhelp.footer.file parameter has a value, then the content of that file is used as footer. If the webhelp.footer.file has no value then a default **Oxygen** footer is inserted in each WebHelp page.

**webhelp.google.search.results**

A file path that specifies the location of a well-formed XHTML file containing the Google Custom Search Engine element gcse:searchresults-only. You can use all supported attributes for this element. It is recommend to set the linkTarget attribute to frm for frameless (iframe) version of WebHelp or to contentWin for the frameset version of WebHelp. The default value for this attribute is \_blank and the search results will be loaded in a new window. If this parameter is not specified, the following code will be used <gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>

**webhelp.google.search.script**

A file path that specifies the location of a well-formed XHTML file containing the Custom Search Engine script from Google.

**webhelp.head.script**

URL value that specifies the location of a well-formed XHTML file containing the custom script that will be copied in the <head> section of every WebHelp page.

**webhelp.logo.image.target.url**

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

**webhelp.logo.image**

Specifies a path to an image displayed as a logo in the left side of the output header.

**webhelp.reload.stylesheet**

Set this parameter to true if you have out of memory problems when generating WebHelp. It will increase processing time but decrease the memory footprint. The default value is false.

#### **webhelp.search.custom.excludes.file**

The path of the file that contains name patterns for HTML files that should not be indexed by the WebHelp search engine. Each exclude pattern must be on a new line. The patterns are considered to be relative to the output directory, and they accept wildcards such as '\*' (matches zero or more characters) or '?' (matches one character). For more information about the patterns, see <https://ant.apache.org/manual/dirtasks.html#patterns>.

#### **webhelp.search.japanese.dictionary**

The file path of the dictionary that will be used by the *Kuromoji* morphological engine for indexing Japanese content in the WebHelp pages.

#### **webhelp.search.ranking**

If this parameter is set to `false` then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

#### **webhelp.show.changes.and.comments**

When set to `yes`, user comments, replies to comments, and tracked changes are published in the WebHelp output. The default value is `no`.

#### **webhelp.sitemap.base.url**

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the *DITA map*, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

#### **webhelp.sitemap.change.frequency**

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq` element is not added in `sitemap.xml`. Allowed values: `<empty string>` (default), `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, `never`.

#### **webhelp.sitemap.priority**

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority). For example, 0.3, 0.5, or 0.8. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

#### **Related Information:**

[Customizing WebHelp Classic Output](#) on page 823

[WebHelp Classic Output Layout and Features](#) on page 803

#### **DITA Map to PDF Transformation**

Oxygen XML Developer comes bundled with the DITA Open Toolkit that provides a mechanism for converting *DITA maps* to PDF output.

#### **Creating a DITA Map to PDF Transformation Scenario**

To create a *DITA Map to PDF* transformation scenario, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** button.
2. Select **DITA Map PDF** and click the **Edit** button (or use the **Duplicate** button if your *framework* is read-only).
3. Use the various tabs to configure the transformation scenario. In the **Parameters** tab, you can use a variety of parameters to customize the output. For example, the following parameters are just a few of the most commonly used ones:
  - `show.changes.and.comments` - If set to `yes`, user comments, replies to comments, and *tracked changes* are published in the PDF output.
  - `customization.dir` - Specifies the path to a customization directory.
4. Click **OK** and then the **Apply Associated** button to run the transformation scenario.

## Related Information:

[DITA Map to PDF Output Customization](#) on page 930

## DITA Map to PDF WYSIWYG Transformation

Oxygen XML Developer comes bundled with a **DITA-OT CSS Publishing to PDF plugin** that allows you to convert [DITA maps](#) to PDF using a CSS layout processor. Oxygen XML Developer also comes bundled with a built-in CSS-based PDF processing engine called **Oxygen PDF Chemistry**. For those who are familiar with CSS, this makes it very easy to style and customize the PDF output of your DITA projects without having to work with *xsl:fo* customizations. Oxygen XML Developer also supports a few third-party processors.

The following processors are supported:

- **Oxygen PDF Chemistry** - A built-in processor that is bundled with Oxygen XML Developer. For more information, see the [Oxygen PDF Chemistry User Guide](#).
- **Prince Print with CSS** (not included in the Oxygen XML Developer installation kit) - A third-party component that needs to be purchased from <http://www.princexml.com>.
- **Antenna House Formatter** (not included in the Oxygen XML Developer installation kit) - A third-party component that needs to be purchased from <http://www.antennahouse.com/antenna1/formatter/>.

The **DITA-OT CSS Publishing to PDF plugin** is located in the following directory: *DITA-OT-DIR/plugins/com.oxygenxml.pdf.css*. Although it includes a set of CSS files in its *css* subfolder, when this plugin is used in Oxygen XML Developer, the CSS files located in the `${frameworks}` directory take precedence.

## Creating the Transformation Scenario

To create an **DITA Map to PDF WYSIWYG** transformation scenario, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** button.
2. Select **DITA Map PDF - WYSIWYG**.
3. In the **CSS Processor** tab, choose the processor type. You can select between **Oxygen PDF Chemistry**, **Prince XML**, or **Antenna House**.
4. In the **Parameters** tab, configure any of the following parameters (if applicable):
  - **css.processor.path.chemistry** (if you are using the **Oxygen PDF Chemistry** processor) - Specifies the path to the **Oxygen PDF Chemistry** executable file that will be run to generate the PDF. If this parameter is not set, your system's PATH environment variable will be used to find and start the **Oxygen PDF Chemistry** processor.
  - **css.processor.path.prince** (if you are using the **Prince Print with CSS** processor) - Specifies the path to the Prince executable file that will be run to produce the PDF. If you installed Prince using its default settings, you can leave this blank.
  - **css.processor.path.antenna-house** (if you are using the **Antenna House Formatter** processor) - Specifies the path to the Antenna House executable file that will be run to produce the PDF. If you installed Antenna House using its default settings, you can leave this blank.
  - **show.changes.and.comments** - When set to yes, user comments, replies to comments, and *tracked changes* are published in the PDF output. The default value is no.
  - **dita.css.list** - Allows you to specify a list of CSS URLs to be used by the PDF processor (instead of the default CSS files). The files must have URL syntax and be separated using semicolons.
  - **args.css** - Allows you to specify a path to a custom CSS to be used in addition to those specified in the `dita.css.list` parameter.
5. Click **OK** and run the transformation scenario.

## Customizing the Output

The **DITA-OT CSS Publishing to PDF plugin** makes it very easy to style and customize the PDF output of your DITA projects without having to work with *xsl:fo* customizations. You can style the PDF output by simply using a custom CSS to change the styling and then re-running the transformation scenario until you get the desired result.

For more information, see the [Customization CSS section](#). It offers numerous tips and examples for customizing the CSS for the PDF output.

## Changing the Style of an Element

To change the style of a particular element, you need to create an additional CSS file that will store the customization rules. Once you have created this file, you need to instruct the editor how to use this additional CSS.

- Specify the path to your custom CSS using the `args.css` parameter:
  1. Edit a **DITA map to PDF WYSIWYG** transformation scenario.
  2. In the **Parameters** tab, specify the path to your custom CSS files in the `args.css` parameter.
  3. Click **OK** and run the transformation scenario.

This method is appropriate if you just want to apply the styling customization to the output.

### Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Oxygen PDF Chemistry User Guide](#)

[Customization CSS](#) on page 713

### Customization CSS

The publishing process of the **DITA Map PDF - WYSIWYG** transformation scenario is driven by a customization CSS.

To change the styling of the output:

1. Create a custom CSS file that will contain all your customizations. It is recommended to create this file in your project directory.

**Important:** Always use CSS rules that match the DITA class attribute values. Avoid using CSS selectors containing element names, because they have a weaker specificity and will not override the styles defined in the built-in CSS files. For instance, to match the `p` element, use its class attribute:

```
*[class ~= "topic/p"] {
 color: gray;
}
```

Instead of:

```
p {
 color: gray;
}
```

**Tip:** You can organize the CSS rules in separate files, but they all need to be imported from a single master CSS file. For simplicity, this manual provides instructions based upon a single CSS file.

**Note:** [LESS](#) files are supported (LESS is a CSS pre-processor with a CSS-like syntax, but has a lot of features designed to speed up development).

2. Add the custom CSS rules. See the topics in this section for assistance with specific types of customizations.
3. In the **DITA Map PDF - WYSIWYG** transformation scenario, set the full path to the custom CSS file as the value of the `args.css` parameter.

### Debugging the CSS

If you notice that some of the CSS properties were not applied, some typical debugging steps might include the following:


1. The first thing you should try is to check the file structure of the **merged map**. This can be found in the `out/pdf-css` directory and it has the `.merged.xml` file extension. You can open this file in **Oxygen XML Editor/Author** to examine the XML structure. Optionally, you can pretty print it (**Format and Indent**) to make the structure easier to read.
2. Then check that the CSS selector is written correctly.
3. If you still cannot identify the problem, then inspect how the styles are applied (you can try one of the methods listed below).




## Inspecting the Applied Styles Using the Chrome Browser

To inspect the applied CSS styles using Chrome:

1. Open the .merged.xml file in Chrome.
2. Click on the element you want to inspect.
3. Activate the **Chrome Developer Tools** by using **⌘ > More Tools > Developer Tools**, or press **CTRL+SHIFT+I**.
4. Activate the **Rendering** pane by using **⌘ > More Tools > Rendering**:

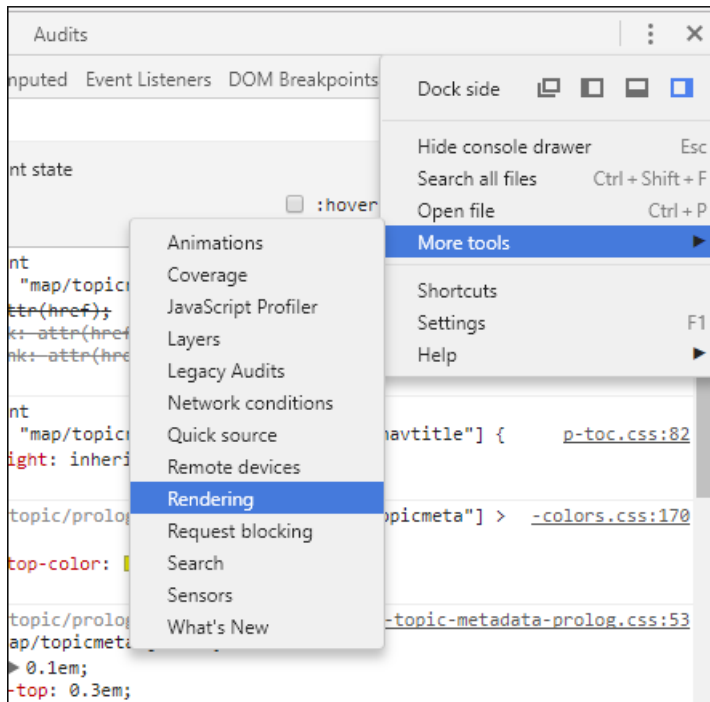

5. In the **Rendering** pane, select **print** from the **Emulate CSS media** section. This will activate the CSS selectors enclosed in `@media print {..}`.

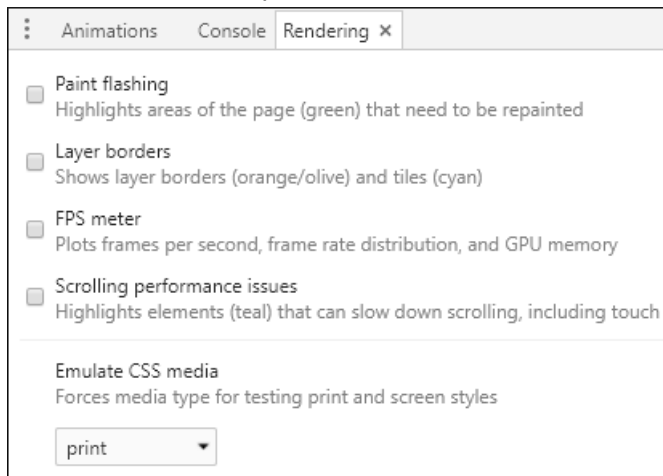

**Note:** This allows you to debug styling of elements, table of contents, and index, but not the styles of the page margin boxes (headers, footers) or page breaks.

**Tip:** In the left pane of the **Developer Tools** interface, you can inspect elements and their styles in the **Elements** tab. You can click on any of the links to display the applied CSS files in the **Styles** tab in the right pane. Editing the styles in that pane results in a live preview of how the change will affect the output.



**CAUTION:** Do not modify the built-in rules directly in the CSS files from the **Oxygen XML Editor/Author** installation. Instead, copy the rules to your own customization CSS.

## Inspecting the Applied Styles Using Oxygen XML Editor/Author

To inspect styles:



1. Open the file ending in `.merged.xml` file in **Oxygen XML Editor/Author**
2. From the **Styles** toolbar, choose the **+ Print Ready** entry. This will activate the CSS selectors enclosed in `@media print {..}`.
3. Click on the element you want to style. Use the **Inspect Styles** action from the Contextual Menu. A specialized view will show the built-in CSS rules.

**Note:** This allows you to debug styling of elements, but not of the page margin boxes (headers, footers) or page breaks.



**CAUTION:** Do not modify the built-in rules directly in the CSS files from the **Oxygen XML Editor/Author** installation. Instead, copy the rules to your own customization CSS.

## Other techniques

These are some other techniques you may find useful:

- Add background and borders properties to the specific CSS rule. If they do not appear in the output then there is a problem with the rule selector.
- Try to use the `!important` notation to the property that is not applied, or make the selector more specific (you can add more parent selectors).
- To figure out how the elements are mapped into PDF, you can use this fragment in the customization CSS:

```
* {
 border: 1pt solid blue !important;
}

*:before(1000) {
 content: oxy_name() !important;
 color: orange;
}

*:before(999) {
 content: "[class= ' ' attr(class) ' '] " !important;
 color: orange;
}
```

This will show the element name, its class attribute, and will paint a blue border around each of the elements in the output. It will not show the page margin boxes or some content elements that were hidden.

## Page Size

This is where you can find information on how the page sizes are defined.

### Page Size - Built-in CSS rules

The `[PLUGIN_DIR]/css/p-page-size.css` file contains the default page rules. It uses the US-LETTER size (8.5in by 11in). The content of this file is:

```
@page {
 padding-top: 0.2em;
 padding-bottom: 0.2em;
 size: us-letter;
 margin: 1in;
}
```

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

### How to Change the Page Size

Suppose you want to publish using the standard A4 page size, with a margin of 2cm.

In your [customization css](#), use:

```
@page {
 size: A4;
 margin: 2cm;
}
```

If you need different margins depending on the page side:

```
@page {
 size: A4;
 margin: 2cm;
}
```

```
@page :left{
 margin-right:4cm;
}
@page :right{
 margin-left:4cm;
}
```

This would only increase the gutter margins or the inside margins needed for binding of the final book. The other margins would remain 2cm.

## How to Change the Page Orientation

Suppose you want to publish on a landscape page. The default is portrait, so you need to change it by using the size property. This will contain both the physical measurements and the orientation. In your [customization css](#), use:

```
@page {
 size: us-letter landscape;
}
```

## How to Change the Page Settings for a Specific Element

Suppose your publication is mainly using a portrait page orientation, but there are some topics that have wide images. To avoid having the images bleeding outside of the page, you could use a wider page setting (landscape).

1. Mark the topic with an @outputclass attribute and give it a distinct value (for example, **wide**).
2. In your [customization css](#), match the topic from the CSS and associate it with a named page. This page has landscape orientation and small margins.

```
*[class ~= "topic/topic"][outputclass = 'wide'] {
 page: wide-page;
}

@page wide-page {
 size: letter landscape;
 margin: 0.5in;
}
```

**Note:** You can extend the example on any DITA element that should be displayed on wider page. Change the CSS selector to:

```
*[outputclass = 'wide'] {
 page: wide-page;
}
```

## Metadata

DITA has a solid vocabulary for specifying metadata. There are <prolog> elements in the topics, and <topicmeta>, <bookmeta> elements in the bookmaps. They can be used to define authors, dates, audiences, organizations, etc. See: <https://www.oxygenxml.com/dita/1.3/specs/archSpec/base/metadata-in-maps-and-topics.html>

It is up to you to decide where this information should be presented, in the PDF content or in the PDF document properties.

## Metadata - Input XML fragment

In the merged map, the metadata section is placed inside the <oxy:front-page> element. This is different from the original placement in the map or bookmap - after the title, but allows usage of information from it in the title page.

## Bookmaps

This is an example of a section taken from a merged bookmap where the CSS processor is applied to obtain the PDF. It only contains some of the possible metadata elements. The bookmeta metadata section is inherited from topicmeta:

```
<bookmap xmlns:ditaarch="http://dita.oasis-open.org/architecture/2005/"
 xmlns:opentopic-index="http://www.idiominc.com/opentopic/index" cascade="merge" class="- map/map bookmap/bookmap
 ditaarch:DITAArchVersion="1.3" >
```

```

<oxy:front-page xmlns:oxy="http://www.oxygenxml.com/extensions/author">
 <bookmeta xmlns:dita-ot="http://dita-ot.sourceforge.net/ns/201007/dita-ot"
 class="- map/topicmeta bookmap/bookmeta ">
 <author class="- topic/author ">Howe Tuduit</author>
 <bookid class="- topic/data bookmap/bookid ">
 <isbn class="- topic/data bookmap/isbn ">071271271X</isbn>
 <booknumber class="- topic/data bookmap/booknumber ">SG99-9999-00</booknumber>
 <maintainer class="- topic/data bookmap/maintainer ">
 <organization class="- topic/data bookmap/organization ">Retro Tools</organization>
 <person class="- topic/data bookmap/person "/>
 </maintainer>
 </bookid>
 <bookrights class="- topic/data bookmap/bookrights ">
 <bookowner class="- topic/data bookmap/bookowner ">
 <organization class="- topic/data bookmap/organization ">Retro Tools, Inc.</organization>
 </bookowner>
 </bookrights>
 </bookmeta>

 <oxy:front-page-title>
 ...

```

## Maps

The maps have a more simple structure, they use the `<topicmeta>` element for metadata sections. This is also a simplified example, as there may be many more elements in the metadata section:

```

<map xmlns:ditaarch="http://dita.oasis-open.org/architecture/2005/"
 xmlns:opentopic-index="http://www.idiominc.com/opentopic/index" cascade="merge" class="- map/map "
 ditaarch:DITAArchVersion="1.3">
 ...

 <oxy:front-page xmlns:oxy="http://www.oxygenxml.com/extensions/author">

 <topicmeta xmlns:dita-ot="http://dita-ot.sourceforge.net/ns/201007/dita-ot" is-chapter="true"
 class="- map/topicmeta ">
 <author class="- topic/author ">Dan Caprioara</author>
 <metadata class="- topic/metadata ">
 <prodinfo class="- topic/prodinfo ">
 <prodname class="- topic/prodname ">oXygen PDF CSS DITA Plugin</prodname>
 </prodinfo>
 </metadata>
 <audience class="- topic/audience "/>
 </topicmeta>

 ...

```

## Metadata - Built-in CSS rules

The `[PLUGIN_DIR]/css/p-meta.css` file contains the rules that extract metadata. The `<topicmeta>` can be used as a child of `map`, or a `topicref`. The `map <topicmeta>` is moved into the `<oxy:front-page>` element, so its local name is used to differentiate between the two cases and the CSS selectors will start with it.

```

/*
 * =====
 * PDF metadata
 * =====
 */
@media oxygen-chemistry {

 /*
 * Titles (maps).
 */
 *[class ~="map/map"] > *[class ~="topic/title"] {
 -oxy-pdf-meta-title: content();
 }
 *[class ~="map/map"][title] {
 -oxy-pdf-meta-title: attr(title);
 }

 /*
 * Titles (bookmaps).
 */
 front-page *[class ~="bookmap/booktitle"] > *[class ~="bookmap/mainbooktitle"] {
 -oxy-pdf-meta-title: content();
 }

 /*
 * Subject (bookmaps), using the alternate title.
 */
 front-page *[class ~="bookmap/booktitle"] > *[class ~="bookmap/booktitlealt"] {
 -oxy-pdf-meta-description: content();
 }

```

```

}

/*
 * Author (maps and bookmaps)
 */
/* Bookmeta is a specialization of topicmeta.
 */
front-page *[class ~= "map/topicmeta"] > *[class ~= "topic/author"] {
 -oxy-pdf-meta-author: content();
}

/*
 * Created (maps and bookmaps)
 */
front-page *[class ~= "map/topicmeta"] > *[class ~= "topic/critdates"] > *[class ~= "topic/created"] {
 -oxy-pdf-meta-custom: "Created" attr(date);
}

/*
 * Revised (maps and bookmaps) - can have multiple occurrences, so we aggregate them.
 */
front-page *[class ~= "map/topicmeta"] > *[class ~= "topic/critdates"]:has(*[class ~= "topic/revised"]) {
 -oxy-pdf-meta-custom: "Revised" oxy_xpath('string-join(*[contains(@class, " topic/revised ")])/@modified, ", " ');
}

/*
 * Keywords (maps and bookmaps).
 */
front-page *[class ~= "map/topicmeta"] > *[class ~= "topic/keywords"] > *[class ~= "topic/keyword"] {
 -oxy-pdf-meta-keyword: content();
}

/*
 * Organization holding the book rights. (bookmaps)
 */
front-page *[class ~= "bookmap/bookmeta"] > *[class ~= "bookmap/bookrights"] > *[class ~= "bookmap/bookowner"] {
 -oxy-pdf-meta-custom: "Book rights owner" content();
}

/*
 * ISBN (bookmaps)
 */
front-page *[class ~= "bookmap/bookmeta"] > *[class ~= "bookmap/bookid"] > *[class ~= "bookmap/isbn"] {
 -oxy-pdf-meta-custom: "ISBN" content();
}

/*
 * Maintainer (bookmaps)
 */
front-page *[class ~= "bookmap/bookmeta"] > *[class ~= "bookmap/bookid"] > *[class ~= "bookmap/maintainer"] {
 -oxy-pdf-meta-custom: "Maintainer" content();
}

}

/*
 * Reset the topicmeta styles, in editor are used uses colors.
 * The topicmeta is used in the metadata section of the map, but
 * also in each topicref from the TOC.
 * The metadata section from the map is hidden.
 */
*[class~="map/topicmeta"] {
 border-color: transparent;
 color:inherit;
 background-color: inherit;
 border:none;
 margin:0;
 padding:0;
}
*[class~="map/topicmeta"]:before {
 content: none;
}

```

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

## How to Add the Publication Audience to the Custom PDF Metadata

The audience element indicates the users the publication is addressing. This can be placed inside a `<topicmeta>` element in a `<map>` as in the following example:

```

<map>
 ...
 <topicmeta>
 ...
 <audience type="programmer" job="programming" experiencelevel="expert"/>

```


To collect the @type attribute, add the following in your [customization css](#):

```
map > *[class ~= "map/topicmeta"] > *[class ~= "topic/audience"] {
 -oxy-pdf-meta-custom: "Audience" attr(type);
}
```

**Note:** It is best to use the class selector (such as `*[class ~= "map/topicmeta"]`) instead of `topicmeta` to cover cases where the elements are specialized (for instance, in a bookmap the bookmeta is a `topicmeta`, so your selector will also function for bookmaps, not only simple maps.

**Note:** The selector begins with `map >` to choose the `<topicmeta>` that is a direct child of the map, not other `<topicmeta>` elements from other `<topicref>` elements.

The metadata is displayed in the **Custom** tab of the **Document Properties** dialog box from Acrobat Reader:

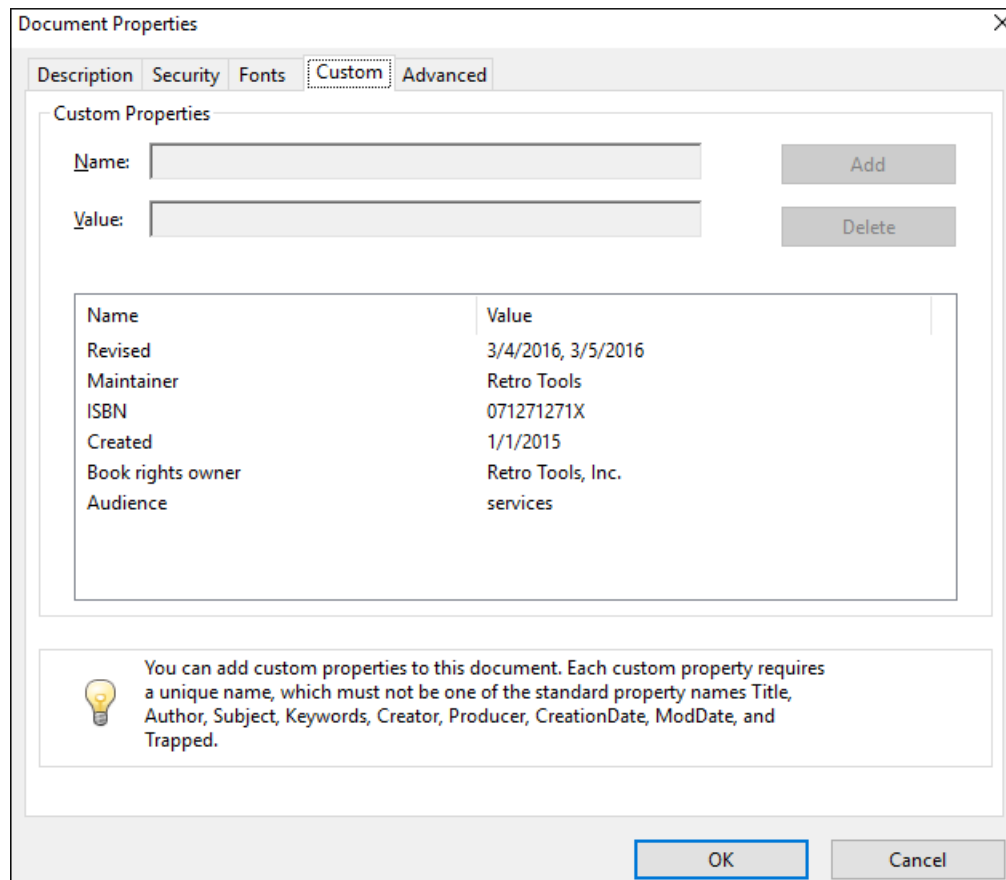

## How to Show Metadata in the Cover Page

Suppose you need to present the **author** and the **ISBN** just under the publication title. Your bookmap contains:

```
<bookmap id="taskbook">
 <booktitle>
 <booklibrary>Retro Tools</booklibrary>
 <mainbooktitle>Product tasks</mainbooktitle>
 <booktitlealt>Tasks and what they can do</booktitlealt>
 </booktitle>
 <bookmeta>
 <author>Howe Tudit</author>
 <critdates>
 <created date="1/1/2015"/>
 <revised modified="3/4/2016"/>
 <revised modified="3/5/2016"/>
 </critdates>
 <bookid>
 <isbn>071271271X</isbn>
 <booknumber>SG99-9999-00</booknumber>
 </bookmeta>
</bookmap>
```

The entire `<booktitle>` element content is displayed on the first page of the PDF, so suppose you need to add the information after it.

In your [customization css](#), add the following CSS rules:

```
*[class ~= "bookmap/booktitle"]:after {
 display: block;
 content: "by " oxy_xpath('//*[contains(@class, " bookmap/bookmeta ")]/*[contains(@class, " topic/author ")]/text()');
 margin-top: 4em;
 text-align: center;
 color: gray;
}
*[class ~= "bookmap/booktitle"]:after(2) {
 display: block;
 content: "ISBN "oxy_xpath('//*[contains(@class, " bookmap/isbn ")]/text()');
 text-align: center;
 color: gray;
}
```

The following CSS extensions were used in this example:

- **oxy\_xpath** - Executes an XPath expression and returns a string content.
- **:after(N)** - Creates more than one *after* pseudo element. The argument value represents how far the generated content is from the real content. In the example above, the content of the `:after` is closer to the title (upper) than the content of the `:after(2)`.

### Generating Synthetic Pages for Metadata.

Suppose you need to show this information on a page that follows the title page, instead of on the title page. In this case, you need to prepare a named page and place the content on it. In your [customization css](#), add the following CSS rules:

```
@page page-for-meta {
 background-color: yellow; /* Just to see it better*/
 @top-left-corner {
 content: ""; /* Remove the default header */
 }
 @top-right-corner {
 content: ""; /* Remove the default header */
 }
}

*[class ~= "bookmap/booktitle"]:after {
 page: page-for-meta;
}
*[class ~= "bookmap/booktitle"]:after(2) {
 page: page-for-meta;
}
```

### How to Show Metadata in the Header or Footer

If you need to add some of the map metadata to the header of the front page (for example, the **creation date**), add the following CSS rules in your [customization css](#):

```
front-page > *[class ~= "map/topicmeta"] > *[class ~= "topic/critdates"] > *[class ~= "topic/created"]{
 string-set: mapcreated attr(date);
}

@page front-page {
 @top-center {
 content: "Created: " string(mapcreated);
 }
}
```

**Note:** The *front-page* is the name of a page that used to present the `<oxygen:front-page>` element. The above page rule is combined with the default styles.

### How to Show Arbitrary/Computed Data in the Header or Footer

The header and footer are composed of page margin boxes that can be populated with static text, by using *string-sets*.

You can extract and process data from any location in your document by executing XPath expressions. You can bind the evaluation result to a CSS *string-set* and then use it in the page margin boxes.

The following example counts the words from the publication and shows it in the front page footer.

In your [customization css](#), add the following CSS rules:

```
*[class ~= "map/map"]{
 string-set: number-of-words oxy_xpath("string-length(normalize-space(.)) - string-length(translate(normalize-space(.), ' ', '')) + 1");
}

@page front-page {
 @bottom-center {
 content: "Number of words: " string(number-of-words);
 }
}
```

**Note:** This example counts all the words, including the ones from the TOC, but does not take into account the static labels.

**Note:** Preferably define the string set directly on the root element if you intend to use it in the front page.

**Note:** The context node for the XPath execution is(are) the one(s) matched by the CSS selector.

#### Related Information:

### Cover (Title) Page

Customizing the cover page is one of the most requested customization requests.

### Cover Page - Input XML fragment

The merged map contains a `<oxy:front-page>` element, child of the root element. This contains the metadata and an `<oxy:front-page-title>` element with the title structure.

```
<bookmap xmlns:ditaarch="http://dita.oasis-open.org/architecture/2005/" ...>
 <oxy:front-page xmlns:oxy="http://www.oxygenxml.com/extensions/author">
 <bookmeta xmlns:dita-ot="http://dita-ot.sourceforge.net/ns/201007/dita-ot"
 ...
 </bookmeta>
 <oxy:front-page-title>
 <booktitle xmlns:dita-ot="http://dita-ot.sourceforge.net/ns/201007/dita-ot"
 class="- topic/title bookmap/booktitle ">
 <booklibrary class="- topic/ph bookmap/booklibrary ">Retro Tools</booklibrary>
 <mainbooktitle class="- topic/ph bookmap/mainbooktitle ">Product tasks</mainbooktitle>
 <booktitlealt class="- topic/ph bookmap/booktitlealt ">Tasks and what they can do</booktitlealt>
 </booktitle>
 </oxy:front-page-title>
 </oxy:front-page>
</bookmap>
```

### Cover Page - Built-in CSS rules

The `<oxy:front-page>` element is associated with a page named *front-page* with no headers or footers. The `<oxy:front-page-title>` is styled with a bigger font. The built-in CSS rules are in `[PLUGIN_DIR]/css/p-front-page.css`.

```
@media print {
 front-page {
 page: front-page;
 }

 front-page-title {
 display: block;
 text-align: center;
 margin-top: 3in;
 font-size: 2em;
 font-family: arial, helvetica, sans-serif;
 font-weight: bold;
 }

 @page front-page {
 @top-left-corner { content: none }
 @top-left { content: none }
 @top-center { content: none }
 @top-right { content: none }
 @top-right-corner { content: none }
 @bottom-left-corner { content: none }
 @bottom-left { content: none }
 @bottom-center { content: none }
 @bottom-right { content: none }
 @bottom-right-corner { content: none }
 }
}
```

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

## How to Add a Background Image for the Cover

The simplest way is to create an SVG image as large as the entire physical page and set it as the background for the *front-page*.

Consider the following SVG document (cover . svg).

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE svg PUBLIC "-//W3C//DTD SVG 1.1//EN" "http://www.w3.org/Graphics/SVG/1.1/DTD/svg11.dtd">
<svg xmlns="http://www.w3.org/2000/svg" width="8.5in" height="11in">
 <desc>A gradient as big as a page.</desc>
 <defs>
 <linearGradient id="lc"
 x1="0%" y1="0%"
 x2="0%" y2="100%"
 spreadMethod="pad">
 <stop offset="0%" stop-color="#00DD00" stop-opacity="1"/>
 <stop offset="100%" stop-color="#00AA00" stop-opacity="1"/>
 </linearGradient>
 </defs>
 <rect x="0" y="0" width="100%" height="100%" rx="10" ry="10"
 style="fill:url(#lc);
 stroke: #005000;
 stroke-width: 3;"/>
 <text x="45%" y="95%" color="#FFFFAA" font-size="0.7cm"> Sample </text>
</svg>
```

It shows a gradient (but it can be anything, created with any tool) and the "Sample" text. It is as large as a US-LETTER page and can be used in a publication using this page size.

**Note:** You can use raster image formats (such as PNG or JPEG), but it is best to use vector images (such as SVG or PDF). They can be scaled and produce better results when printed.

In your [customization css](#), add the following:

```
@page front-page {
 background-image: url("us-letter.svg");
 background-position:center;
}
```

**Note:** For smaller artworks, you can use background-position with percentage values.

**Note:** The text from the SVG or PDF background images are searchable in the PDF reader.

### Related Information:

[Oxygen PDF Chemistry: Graphics](#)

## How to Change Styling of the Cover Page Title

Match the `<front-page-title>` in your [customization css](#):

```
front-page-title {
 margin-top: 1in;
 font-size: 3em;
}
```

## How to Add Text to the Cover Page

If you need to add arbitrary text to the cover page, you can use the `<oxy:front-page-title>` element as an anchor and add as many blocks of text as you need after it, and style them differently.


In your [customization css](#), add the following:

```
front-page-title:after(1) {
 display:block;
 content: "DRAFT VERSION";
 font-size: large;
 color: red;
 text-align:center;
}

front-page-title:after(2) {
 display:block;
 content: "DO NOT DISTRIBUTE WITHOUT PERMISSION";
 font-size: large;
 color: red;
 text-align:center;
 font-style: italic;
}
```



The result is:

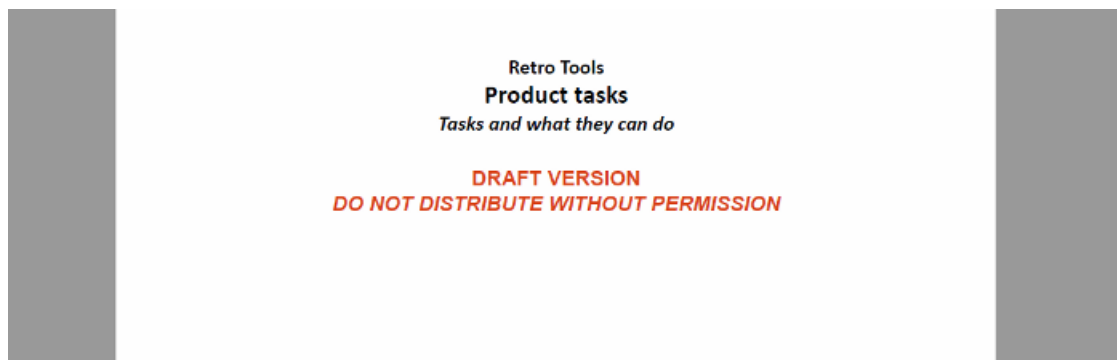

To use content from the document, you can use the `oxy_xpath` function in the content property. For a more complex example, including the generation of a new page for the synthetic `:after` elements, see: [How to Show Metadata in the Cover Page](#) on page 719.

**Related Information:**

[How to Show Metadata in the Cover Page](#) on page 719

### How to Place Cover on the Right or Left Side

The merged map contains a `<oxy:front-page>` element that is displayed as the cover.

In your [customization css](#), add the following CSS rules:

```
front-page{
 page-break-before:left;
}
```

**Note:** This will create an empty page at the beginning of the publication, moving the cover content on the needed side.

For more information, see: [Oxygen PDF Chemistry: Controlling Page Breaks](#).

**Related Information:**

[Double Side Pagination](#) on page 731

### How to Add a Specific Number of Empty Pages After the Cover Page

In your [customization css](#), add the following CSS rules:

```
@page my-blank-page {
 /* Hide the page numbers */
 @top-left {content: none};
 @top-right {content: none};
}

front-page:after(1){
 page:my-blank-page;
 display:block;
 content: "\2002";
 color:transparent;
 page-break-after:always;
}

front-page:after(2){
 page:my-blank-page;
 display:block;
 content: "\2002";
 page-break-after:always;
}

front-page:after(3){
 page:my-blank-page;
 display:block;
 content: "\2002";
 page-break-after:always;
}
```

**Note:** The `"\2002"` character is a space that is not shown on the pages, but gives a value for the content property.

## Related Information:

[How to Force an Odd or Even Number of Pages in a Chapter](#) on page 731

## Front Matter and Back Matter

The *front matter* is a series of topics that are usually placed after the cover page and before the TOC or the content.

The *back matter* is a series of topics that are usually placed after the content of the book.

## Front Matter and Back Matter - Input XML fragment

The frontmatter topics are wrapped in an `<oxy:front-matter>` element, that has the class `bookmap/frontmatter` (it is a clone of the original `<frontmatter>` element from the map):

## Front Matter and Back Matter - Built-in CSS

The built-in CSS rules are in `[PLUGIN_DIR]/css/p-bookmap-frontmatter-backmatter.css`. By default, it associates the `<oxy:front-matter>` and `<oxy:back-matter>` elements with the *matter* page, that has no headers or other page margin boxes. Each of the child topics start on a new page.

The content of this file is:

```
@media print {
 front-matter,
 back-matter {
 page: matter-page;
 }

 /* Put the sections on a separate page. */
 front-matter > *[class ~="topic/topic"],
 back-matter > *[class ~="topic/topic"]{
 page-break-before: always;
 }
}
```

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

## Related Information:

[Page Headers and Footers](#) on page 735

## How to Remove Page Breaks Between Front Matter Child Topics

If you do not like the fact that all the topics that enter a bookmap `<frontmatter>` start on a new page, you can disable this by using the following rules in your [customization css](#):

```
front-matter > *[class ~="topic/topic"],
back-matter > *[class ~="topic/topic"]{
 page-break-before: auto;
}
```

## How to Style the Front Matter and Back Matter Topics

Suppose you want the topics from the *front matter* and *back matter* to start at the middle of the page and use a smaller fine print.

In your [customization css](#), add the following:

```
front-matter > *[class ~="topic/topic"] {
 margin-top: 50%;
 border-top: 5pt solid silver;
 font-size: 0.5em;
}
```

## Numbering

The default numbering system is to only number the chapters in the TOC and in the content (shallow numbering).

**Note:** For a plain DITA map, the chapters are the `<topicref>` elements that are placed on the first level. For bookmaps, the chapters are the topics referenced by a `<chapter>` element.

The numbering affects three parts of your publication, the table of contents, headers/footers, and chapter titles:

### The Table of Contents

The table of contents is a tree of `<topicref>` elements.

```
<map xmlns:ditaarch="http://dita.oasis-open.org/architecture/2005/" ...>
 <oxy:front-page xmlns:oxy="http://www.oxygenxml.com/extensions/author">
 ...
 </oxy:front-page>
 <opentopic:map xmlns:opentopic="http://www.idiominc.com/opentopic">
 <title class="- topic/title">Publication Title</title>

 <topicref is-chapter="true" class="- map/topicref " ... >
 <topicmeta class="- map/topicmeta " ... >
 <navtitle href="#unique_1" class="- topic/navtitle">Overview</navtitle>
 </topicmeta>
 <topicref class="- map/topicref " ...>
 <topicmeta class="- map/topicmeta " data-topic-id="dcp_resources">
 <navtitle href="#unique_2" class="- topic/navtitle">Resources</navtitle>
 </topicmeta>
 </topicref>
 </opentopic:map>
 </map>
```

**Note:** The `<opentopic:map>` element contains the effective table of contents structure.

**Note:** The TOC items are the elements with the class: `- map / topicref`.

**Note:** The ones identified as chapters have the `@is-chapter` attribute set.

### The Header and Footers

These are based on string sets generated for the titles. The complete set of strings is defined in: `[INSTALLATION_DIR]/css/print/p-pages-and-headers.css`.

The CSS rules that build the string sets are matching the map title from the front page and the titles from the content.

```
<oxy:front-page xmlns:oxy="http://www.oxygenxml.com/extensions/author">
 <oxy:front-page-title>
 <title class="- topic/title">Publication Title</title>
 </oxy:front-page-title>
</oxy:front-page>
```

The main content is organized as follows:

```
<map xmlns:ditaarch="http://dita.oasis-open.org/architecture/2005/" ...>
 ...
 <opentopic:map xmlns:opentopic="http://www.idiominc.com/opentopic">
 ...
 </opentopic:map>

 <topic is-chapter="true" oid="dcp_overview">
 <title class="- topic/title">Overview</title>
 <body class="- topic/body">
 ...
 </body>
 <topic class="- topic/topic " id="unique_2" oid="dcp_resources">
 <title class="- topic/title">Resources</title>
 ...
 </topic>
 <topic class="- topic/topic " id="unique_2" oid="dcp_parameters">
 <title class="- topic/title">Parameters</title>
 ...
 </topic>
 </topic>
```

**Note:** The topic content comes after the `<opentopic:map>` element.

**Note:** The child topics are the elements that have the class `- topic/topic` included in the parents.

**Note:** The ones identified as chapters have the `@is-chapter` attribute set.

## The Titles of Chapters

The titles from the content are children of the topics:

```
<topic class="- topic/topic " id="unique_2" oid="dcpp_parameters">
 <title class="- topic/title ">Parameters</title>
 ...
</topic>
```

**Note:** The title elements have the class: - topic/title. The actual element name can be different.

### Numbering - Built-in CSS rules

This section contains information about how to deal with shallow or deep chapter numbering.

#### CSS for Shallow Numbering

There is a file located in [PLUGIN\_DIR]/css/print/p-numbering-shallow. The following examples are from this file.

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

The counters should be reset on the root element. This is the element that has the class map/map. Note that bookmaps derive from maps and the following selector will also match them:

```
*[class ~="map/map"] {
 counter-reset: page 1
 toc-chapter 0
 chapter 0
 figcount 0
 tablecount 0;
}
```

## Table of Contents

There is only one counter for the chapters, named toc-chapter. This is reset on the book parts (for bookmaps) and is incremented on each chapter that is not a part.

**Note:** The parts are also marked as chapters.

```
*[class ~="map/topicref"][is-chapter]:not([is-part]) {
 counter-increment: toc-chapter;
}
*[class ~="map/topicref"][is-part] {
 counter-reset: toc-chapter !important;
 counter-increment: toc-part;
}

/* All other topicrefs that follow a part should not have a number (i.e appendices) */
*[class ~="map/topicref"][is-part] ~ *[class ~="map/topicref"]:not([is-part]) > *[class ~="map/topicmeta"] >
 *[class ~="topic/navtitle"]:before{
 content: none !important;
 counter-increment: none;
}
```

To display the numbers in the TOC, a :before pseudo element is used on the navigation titles from the <topicref> elements:

```
*[class ~="map/topicref"][is-part] > *[class ~="map/topicmeta"] > *[class ~="topic/navtitle"]:before{
 content: "Part " counter(toc-part, upper-roman) ". " !important;
 color: inherit;
}
*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicmeta"] > *[class ~="topic/
navtitle"]:before{
 content: "Chapter " counter(toc-chapter) ". " !important;
 color: inherit;
}
```

## The Titles of Chapters in the Main Content

The part and chapter counters are incremented on the elements that have the class topic/topic:

```
*[class ~="topic/topic"][is-part]{
 counter-increment: part;
 counter-reset: chapter;
}
*[class ~="topic/topic"][is-chapter]:not([is-part]){
 counter-increment: chapter;
}
```

```
}
```

Except for <frontmatter>, <backmatter>, and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"],
*[class ~= "bookmap/frontmatter"] * [class ~= "topic/topic"],
*[class ~= "bookmap/backmatter"],
*[class ~= "bookmap/backmatter"] * [class ~= "topic/topic"],
*[class ~= "topic/topic"][is-part] ~ * [class ~= "topic/topic"]:not([is-part]) {
 counter-increment: none !important;
 counter-reset: chapter part;
}
```

These counters are used in the content, before the titles:

```
*[class ~= "topic/topic"][is-part] > * [class ~= "topic/title"]:before {
 content: "Part " counter(part, upper-roman) ". ";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > * [class ~= "topic/title"]:before {
 content: "Chapter " counter(chapter) ". ";
}
```

Except for <frontmatter>, <backmatter>, and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"] > * [class ~= "topic/title"]:before,
*[class ~= "bookmap/frontmatter"] * [class ~= "topic/topic"] > * [class ~= "topic/title"]:before,
*[class ~= "bookmap/backmatter"] > * [class ~= "topic/title"]:before,
*[class ~= "bookmap/backmatter"] * [class ~= "topic/topic"] > * [class ~= "topic/title"]:before,
*[class ~= "topic/topic"][is-part] ~ * [class ~= "topic/topic"]:not([is-part]) > * [class ~= "topic/title"]:before,
*[class ~= "topic/topic"][is-part] ~ * [class ~= "topic/topic"]:not([is-part]) * [class ~= "topic/topic"] > * [class
 ~= "topic/title"]:before{
 content: none !important;
}
```

## Headers

Define the string-sets used in the header, using the part and chapter counters:

```
*[class ~= "topic/topic"][is-part] > * [class ~= "topic/title"] {
 string-set: parttitle " / " counter(part, upper-roman) " - " content(), chaptertitle ""; /* Avoid propagating a
 past chapter title on a new part */
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > * [class ~= "topic/title"] {
 string-set: chaptertitle " / " counter(chapter) " - " content();
}
```

Except for front matter, backmatter and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"] > * [class ~= "topic/title"],
*[class ~= "bookmap/frontmatter"] * [class ~= "topic/topic"] > * [class ~= "topic/title"],
*[class ~= "bookmap/backmatter"] > * [class ~= "topic/title"],
*[class ~= "bookmap/backmatter"] * [class ~= "topic/topic"] > * [class ~= "topic/title"],
*[class ~= "topic/topic"][is-part] ~ * [class ~= "topic/topic"]:not([is-part]) > * [class ~= "topic/title"],
*[class ~= "topic/topic"][is-part] ~ * [class ~= "topic/topic"]:not([is-part]) * [class ~= "topic/topic"] > * [class
 ~= "topic/title"]{
 string-set: parttitle "", chaptertitle "";
}
```

## CSS for Deep Numbering

The CSS file responsible for deep numbering is [PLUGIN\_DIR]/css/print/p-optional-numbering-deep.css. The following examples are taken from this file.

**Note:** This CSS file is not used by default. To use it, you should copy it and then import it from your [customization css](#).

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

For implementing the deep numbering, first the counters for the root element should be reset. In our example, the root is the element that has the class attribute set to map/map. Note that the following selector will also match bookmaps, as they are derived from maps:

```
*[class ~= "map/map"] {
 counter-reset: page 1
 toc-chapter 0
 toc-section1 0
 toc-section2 0
 toc-section3 0
 toc-section4 0
}
```

```

chapter 0
section1 0
section2 0
section3 0
section4 0
figcount 0
tablecount 0;
}

```

## Table of Contents

There are counters for parts (toc-part), chapters (toc-chapter) and sections (toc-section1, toc-section2, toc-section3).

**Note:** The parts are also marked as chapters.

```

*[class ~="map/topicref"][is-chapter]:not([is-part]) {
 counter-increment:toc-chapter;
 counter-reset: toc-section1;
}
*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicref"]{
 counter-increment:toc-section1;
 counter-reset: toc-section2;
}
*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicref"] > *[class ~="map/topicref"]{
 counter-increment:toc-section2;
 counter-reset: toc-section3;
}

/*
 All the parts get a part number.
 Each chapter gets a chapter number.
 All other topicrefs following a part do not have a number.
*/
*[class ~="map/topicref"][is-part] {
 counter-reset:toc-chapter !important;
 counter-increment:toc-part;
}

/* All other topicrefs that follow a part should not have a number (i.e appendices) */
*[class ~="map/topicref"][is-part] ~ *[class ~="map/topicref"]:not([is-part]) > *[class ~="map/topicmeta"]:before{
 content: none !important;
 counter-increment:none;
}

*[class ~="map/topicmeta"] > *[class ~="topic/navtitle"]:before {
 display:none !important; /* In case this CSS is used in cascade with the shallow numbering. */
}

```

To display the numbers in the table of contents, a pseudo :before element is used on <topicmeta> (this contains the TOC label and the header and page number).

To avoid wrapping the text under the chapter/section number, these pseudo elements are moved to the left of the <topicmeta> using position **absolute**:

```

*[class ~="map/topicref"] {
 position:relative;
}

*[class ~="map/topicref"] > *[class ~="map/topicmeta"]:before {
 display:block;
 position:absolute; /* If the TOC item is wrapping, it won't wrap under the numbering. */
 top:0.4em; /* This aligns the before with the TOC item text. */
}

*[class ~="map/topicref"][is-part] > *[class ~="map/topicmeta"]:before {
 left: -1.5em; /* Increase the value of width and left as the depth increases. */
 width:1em;
}

*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicmeta"]:before {
 left: -1.5em;
 width:1em;
}

*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicref"] > *[class ~="map/topicmeta"]:before {
 left: -2em;
 width:2em;
}

*[class ~="map/topicref"][is-chapter]:not([is-part]) > *[class ~="map/topicref"] > *[class ~="map/topicref"] >
*[class ~="map/topicmeta"]:before {
 left: -2.5em;
 width:2.5em;
}

```

And now the content for each pseudo element (depending on its depth) is set:

```
*[class ~= "map/topicref"][is-part] > *[class ~= "map/topicmeta"]:before {
 content: counter(toc-part, upper-roman) ".";
}
*[class ~= "map/topicref"][is-chapter]:not([is-part]) > *[class ~= "map/topicmeta"]:before {
 content: counter(toc-chapter) ".";
}
*[class ~= "map/topicref"][is-chapter]:not([is-part]) > *[class ~= "map/topicref"] > *[class ~= "map/
topicmeta"]:before {
 content: counter(toc-chapter) "." counter(toc-section1);
}
*[class ~= "map/topicref"][is-chapter]:not([is-part]) > *[class ~= "map/topicref"] > *[class ~= "map/topicref"] >
*[class ~= "map/topicmeta"]:before {
 content: counter(toc-chapter) "." counter(toc-section1) "." counter(toc-section2);
}
*[class ~= "map/topicref"][is-chapter]:not([is-part]) > *[class ~= "map/topicref"] > *[class ~= "map/topicref"] >
*[class ~= "map/topicref"] > *[class ~= "map/topicmeta"]:before {
 content: counter(toc-chapter) "." counter(toc-section1) "." counter(toc-section2) "." counter(toc-section3);
}
}
```

## The Titles of Chapters in the Main Content

The part, chapter and section1/section2/section3 counters are incremented on the elements that have the class topic/topic:

```
*[class ~= "topic/topic"][is-part]{
 counter-increment: part;
 counter-reset: chapter;
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) {
 counter-increment: chapter;
 counter-reset: section1;
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] {
 counter-increment: section1;
 counter-reset: section2;
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/topic"] {
 counter-increment: section2;
 counter-reset: section3;
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/topic"] >
*[class ~= "topic/topic"] {
 counter-increment: section3;
 counter-reset: section4;
}
}
```

Now avoid incrementing the counters for <frontmatter>, <backmatter>, and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"],
*[class ~= "bookmap/frontmatter"] *[class ~= "topic/topic"],
*[class ~= "bookmap/backmatter"],
*[class ~= "bookmap/backmatter"] *[class ~= "topic/topic"],
*[class ~= "topic/topic"][is-part] ~ *[class ~= "topic/topic"]:not([is-part]) {
 counter-increment: none !important;
 counter-reset: part chapter section1 section2 section3 section4 !important;
}
}
```

The following counters are used in the content, before the titles:

```
*[class ~= "topic/topic"][is-part] > *[class ~= "topic/title"]:before{
 content: counter(part, upper-roman) ".";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/title"]:before{
 content: counter(chapter) ".";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/title"]:before{
 content: counter(chapter) "." counter(section1) ".";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/topic"] >
*[class ~= "topic/title"]:before{
 content: counter(chapter) "." counter(section1) "." counter(section2) ".";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/topic"] >
*[class ~= "topic/topic"] > *[class ~= "topic/title"]:before{
 content: counter(chapter) "." counter(section1) "." counter(section2) "." counter(section3) ".";
}
}
```

Avoid however setting content for <frontmatter>, <backmatter>, and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"] > *[class ~= "topic/title"]:before,
*[class ~= "bookmap/frontmatter"] *[class ~= "topic/topic"] > *[class ~= "topic/title"]:before,
*[class ~= "bookmap/backmatter"] > *[class ~= "topic/title"]:before,
*[class ~= "bookmap/backmatter"] *[class ~= "topic/topic"] > *[class ~= "topic/title"]:before,
*[class ~= "topic/topic"][is-part] ~ *[class ~= "topic/topic"]:not([is-part]) > *[class ~= "topic/title"]:before,
*[class ~= "topic/topic"][is-part] ~ *[class ~= "topic/topic"]:not([is-part]) *[class ~= "topic/topic"] > *[class
 ~= "topic/title"]:before{
 content:none !important;
}
```

## Headers

Define the string-sets used in the header and make use of counters:

```
*[class ~= "topic/topic"][is-part] > *[class ~= "topic/title"] {
 string-set: parttitle " | " counter(part, upper-roman) " - " content(), chaptertitle ""; /* Avoid propagating a
 past chapter title on a new part */
}[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/title"] {
 string-set: chaptertitle " | " counter(chapter) " - " content(), sectiontitle "";
}
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/topic"] > *[class ~= "topic/title"] {
 string-set: sectiontitle " | " counter(chapter) "." counter(section) " - " content();
}
```

Avoid using counters for <frontmatter>, <backmatter>, and other topics following the last book part (for bookmaps).

```
*[class ~= "bookmap/frontmatter"] > *[class ~= "topic/title"],
*[class ~= "bookmap/frontmatter"] *[class ~= "topic/topic"] > *[class ~= "topic/title"],
*[class ~= "bookmap/backmatter"] > *[class ~= "topic/title"],
*[class ~= "bookmap/backmatter"] *[class ~= "topic/topic"] > *[class ~= "topic/title"],
*[class ~= "topic/topic"][is-part] ~ *[class ~= "topic/topic"]:not([is-part]) > *[class ~= "topic/title"],
*[class ~= "topic/topic"][is-part] ~ *[class ~= "topic/topic"]:not([is-part]) *[class ~= "topic/topic"] > *[class
 ~= "topic/title"]{
 string-set: parttitle "", chaptertitle "", sectiontitle "";
}
```

## How to Reset the Page Numbers after the TOC

In your [customization css](#), use the following rule:

```
*[class ~= "map/map"] > map + *[class ~= "topic/topic"]{
 counter-reset: page 1;
}
```

The map selector matches the <opentopic:map> element that contains the table of contents. So, the effect is to reset the page number at the beginning of the first topic following the TOC.

## How to Remove the 'chapter NN' Prefix from Table of Contents and Content.

If you are using the shallow numbering CSS (this is the default), and you want to hide the "Chapter" prefix, use the following rules in your [customization css](#):

For the TOC:

```
*[class ~= "map/topicmeta"] > *[class ~= "topic/navtitle"]:before {
 display:none !important;
}
```

For the titles in the content, change the content of the title :before (this example just uses the chapter number):

```
*[class ~= "topic/topic"][is-chapter]:not([is-part]) > *[class ~= "topic/title"]:before {
 content: counter(chapter) ". ";
}
```

## How to Use a Deeper Numbering for Sections

If you need a deeper numbering, that goes to the sections and subsections, import the rules defined in the [INSTALLATION\_DIRECTORY]/css/print/p-optional-double-side-pagination.css from your [customization css](#).



## Related Information:

[CSS for Deep Numbering](#) on page 727

## Double Side Pagination

By default, the processor generates pages that are mirror images (the right page has the header on the right side, the left pages have the header on the left side). The chapters follow one another with no constraint on the page side.

**Note:** For a plain DITA map, the chapters are the `<topicref>` elements that are placed on the first level. For bookmarks, the chapters are the topics referenced by a `<chapter>` element.

This section contains information about how to position the start of the chapters on an odd folio number. Some of the CSS rules given here as examples are already listed in: `[INSTALLATION_DIRECTORY]/css/print/p-optional-double-side-pagination.css`. You may choose to import this file from your [customization css](#).

## How to Start Chapters on Odd Pages

A common use case is to arrange the chapters of the publication to start on an odd page number.

In your [customization css](#), add the following:

```
@page chapter {
 -oxy-initial-page-number: auto-odd;
}
@page table-of-contents {
 -oxy-initial-page-number: auto-odd;
}
```

Supported values for `-oxy-initial-page-number` include: **auto**, **auto-even**, **auto-odd**, or a number.

## How to Style the Empty (Blank) Pages

By making the chapters start on an odd page, the CSS processor might add blank pages to the previous page sequence as padding.

To style those blank pages add the following code in your [customization css](#):

```
@page chapter:blank, table-of-contents:blank {
 @top-left { content: none; }
 @top-center { content: none; }
 @top-right { content: none; }
 @bottom-left { content: none; }
 @bottom-center { content: none; }
 @bottom-right { content: none; }
}
```

**Note:** This just removes the headers and footers, but you can use a background image or a header with "Intentionally left blank" text.

## Related Information:

[How to Add a Background Image for the Cover](#) on page 722

## How to Force an Odd or Even Number of Pages in a Chapter

Another use case is to specify a number of pages for a section. Suppose that you have a table of contents that follows the cover page and you need to have an even number of pages. Hence, the next chapter would start on an even page.

In your [customization css](#), use the `-oxy-force-page-count` property with an even value:

```
@page table-of-contents {
 -oxy-force-page-count: even;
}
```

Supported values for `-oxy-force-page-count` include: **even**, **odd**, **end-on-even**, **end-on-odd**, **auto**, **no-force**.

## How to Style the First page of a Chapter

You can use the `:first` page rule selector to control how the first page of a chapter looks. Suppose that you have defined the following layout for your default page and you want to put the publication title (the `map:tile` string) on the header of the first page (instead of the chapter name that is displayed on this page):

In your [customization css](#), add the following:

```
@page chapter:first {
 @top-right-corner { content: string(maptitle); }
 @top-left { content: none; }
}
```

## Table of Contents

The table of contents is a hierarchy of topic titles with links to the topic content.

### Table of contents - Input XML fragment

In the merged DITA map, the `<opentopic:map>` contains a hierarchy of `<topicref>` elements, or other elements (such as `<chapter>` or `<part>`) that are specializations of `<topicref>`.

Each of the `<topicref>` elements include a *metadata* section that includes the topic title.

```
<bookmap ...>

<oxy:front-page> ... </oxy:front-page>
<oxy:front-matter> ... </oxy:front-matter>

<opentopic:map xmlns:opentopic="http://www.idiominc.com/opentopic">

 <oxy:toc-title xmlns:oxy="http://www.oxygenxml.com/extensions/author" empty="true" />

 <booktitle class="- topic/title bookmap/booktitle ">
 <booklibrary class="- topic/ph bookmap/booklibrary ">Retro Tools</booklibrary>
 <mainbooktitle class="- topic/ph bookmap/mainbooktitle ">Product tasks</mainbooktitle>
 <booktitlealt class="- topic/ph bookmap/booktitlealt ">Tasks and what they can do</booktitlealt>
 </booktitle>

 <chapter is-chapter="true"
 class="- map/topicref bookmap/chapter " href="#unique_5" type="topic">
 <topicmeta class="- map/topicmeta " data-topic-id="installing">
 <navtitle href="#unique_5" class="- topic/navtitle ">Installing</navtitle>
 ...
 </topicmeta>

 <topicref class="- map/topicref " href="#unique_6" type="task">
 <topicmeta class="- map/topicmeta " data-topic-id="installstorage">
 <navtitle href="#unique_6" class="- topic/navtitle ">Installing hard drives or other
 storage</navtitle>
 ...
 </topicmeta>
 </topicref>
 ...
 </chapter>
```

**Note:** The `<oxy:toc-title>` element is used as a placeholder for the name of the TOC. For instance, you can use the string "Contents", specified on a pseudo element, in the CSS.

### Table of contents - Built-in CSS

The built-in CSS rules are in: `[PLUGIN_DIR]/css/p-toc.css`.

#### Related Information:

[Page Headers and Footers](#) on page 735

### How to Style the Table of Contents Entries

You can change the font of the labels and aspect of the dots and page numbers from the table of contents.

**Note:** Each of the items from the table of contents is an element that has the `map/topicref` class.

The following example uses the italic font for the label and changes the color and style of the connecting line between the title and the page number.

In your [customization css](#), add the next two selectors:

```
/* The toc item label - the topic title */
*[class ~="map/topicref"] *[class ~="topic/navtitle"] {
 font-style:italic;
 color: navy;
}

/* The dotted line between the topic name and the page number. */
*[class ~="map/topicref"] *[class ~="topic/navtitle"]:after {
 content: leader('-') target-counter(attr(href), page);
}
```

```

 color: navy;
}

```

And if you need to alter the indent of the nested table of contents items, use the following selector:

```

*[class ~= "map/topicref"] *[class ~= "map/topicref"] {
 margin-left: 1em;
}

```

The numbers can be styled like this:

```

*[class ~= "map/topicref"] > *[class ~= "map/topicmeta"]:before,
*[class ~= "map/topicref"]
 > *[class ~= "map/topicmeta"] > *[class ~= "topic/navtitle"]:before{
 color:blue;
}

```

## How to Change the Header of the Table of Contents

In the built-in CSS, there is a page named *table-of-contents*. The default is to have the word 'Contents' in its header (this is localized, using the `toc-header` string defined in the `p-18n.css`) alternating in the left or right side of the header:

```

@page table-of-contents:left {
 @top-left {
 content: string(toc-header) " / " counter(page, lower-roman);
 font-size: 8pt;
 }
}
@page table-of-contents:right {
 @top-right {
 content: string(toc-header) " / " counter(page, lower-roman);
 font-size: 8pt;
 }
}

```

If you need to change this string, or change the color, you should use the following `@page` selectors as a starting point in your [customization css](#):

```

@page table-of-contents:left {
 @top-left {
 content: "My publication table of contents / " counter(page, lower-roman);
 color:red;
 }
}
@page table-of-contents:right {
 @top-right {
 content: "My publication table of contents / " counter(page, lower-roman);
 color:red;
 }
}

```

### Related Information:

[Localization](#) on page 743

## How to Make the Table of Contents Start on an Odd Page

In your [customization css](#), add the following snippet for the *table-of-contents* page:

```

@page table-of-contents{
 -oxy-initial-page-number: auto-odd;
}

```

### Related Information:

[Double Side Pagination](#) on page 731

## How to Display a Topic Before the Table of Contents

To display a topic before the *table-of-contents* page, follow these steps:

1. Make sure the topic is referenced on the first level in the DITA map.
2. Set the `@outputclass` to **before-toc** on the root element of the topic.

```

<topic id="MyTopic" outputclass="before-toc">

```

**Result:** When the PDF is processed, the topic will automatically appear before the table of contents.

## PDF Bookmarks

The PDF Bookmarks are used to generate a hierarchical structure similar to a table of contents in a specialized view of your PDF Reader.

### PDF Bookmarks - Built-in CSS

The PDF bookmarks are generated by matching the titles from the topics in the content. The built-in CSS rules are in: [PLUGIN\_DIR]/css/p-bookmarks.css.

```
*[class~="topic/topic"] > *[class~="topic/title"] {
 bookmark-label:content(before) content(text);
 -ah-bookmark-label:content(before) content();
}

*[class~="topic/topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 1;
 -ah-bookmark-level: 1;
 bookmark-level: 1;
}

*[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 2;
 -ah-bookmark-level: 2;
 bookmark-level: 2;
}

*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 3;
 -ah-bookmark-level: 3;
 bookmark-level: 3;
}

*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/
title"] {
 prince-bookmark-level: 4;
 -ah-bookmark-level: 4;
 bookmark-level: 4;
}

*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 5;
 -ah-bookmark-level: 5;
 bookmark-level: 5;
}

*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] *[class~="topic/topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 6;
 -ah-bookmark-level: 6;
 bookmark-level: 6;
}

*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/title"] {
 prince-bookmark-level: 7;
 -ah-bookmark-level: 7;
 bookmark-level: 7;
}
```

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

### How to Control the Depth of the Sections From the PDF Bookmarks.

By default, the PDF bookmarks are generated for up to 7 levels. If you need to limit them (for example to 2 levels), you can use the following CSS rules in your [customization css](#):

```
*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/title"],
*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/
title"],
*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] > *[class~="topic/title"],
*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] *[class~="topic/topic"] > *[class~="topic/title"],
*[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/topic"] *[class~="topic/
topic"] *[class~="topic/topic"] *[class~="topic/topic"] > *[class~="topic/title"] {
 bookmark-label:none;
}
```

These rules clear the labels generated by the titles starting with the depth 3 (the topic nesting level is given by the selectors `*[class~="topic/topic"]`).

### How to Remove the Numbering From the PDF Bookmarks

By default, the PDF bookmark labels are generated while taking the text set before the chapters titles into account. Since this usually contains the part, chapter, or section numbers, the PDF Bookmarks will make use of them.

The solution is to remove the content (before) from the bookmark-label, leaving just the content (text).

In your [customization css](#), add the following CSS rules:

```
*[class~="topic/topic"] > *[class~="topic/title"] {
 bookmark-label: content(text);
 -ah-bookmark-label: content();
}
```

#### Related Information:

[Numbering](#) on page 724

### Page Headers and Footers

The page headers and footers use the string sets defined for publication, chapter, and section titles. These string-sets are defined in the [numbering css](#). This section contains information about how they are used in the page definitions.

### Page Headers and Footers - Built-in CSS

All page definitions are found in: [PLUGIN\_DIR]css/print/p-pages-and-headers.css.

**Note:** This is listed solely for illustration purposes, as the plugin might use something different.

There are pages for:

#### Default Page

The default page imposes a header that contains the publication title, chapter, and section title. They alternate on the left or right side of the page:

```
@page :left {
 @top-left {
 content: string(maptitle) string(parttitle) string(chaptertitle) string(sectiontitle) " / "
 counter(page);
 font-size: 8pt;
 }
}

@page :right {
 @top-right {
 content: string(maptitle) string(parttitle) string(chaptertitle) string(sectiontitle) " / "
 counter(page);
 font-size: 8pt;
 }
}
```

#### Chapter Page

This is inherited from the default page. The chapter page is associated to the topics marked as chapters, usually the ones that are direct children of the map. It clears the header from the first page of each chapter.

```
@page chapter {
 /* Currently inherit from the default page. */
}

/* No headers on the chapter first page. */
@page chapter:first:left {
 @top-left {
 content: none;
 }
}

@page chapter:first:right {
 @top-right {
 content: none;
 }
}
```

## Front Matter and Back Matter page

The bookmap front matter and back matter page. It clears the headers.

```
@page matter-page {
 @top-left-corner { content: none }
 @top-left { content: none }
 @top-center { content: none }
 @top-right { content: none }
 @top-right-corner { content: none }
 @bottom-left-corner { content: none }
 @bottom-left { content: none }
 @bottom-center { content: none }
 @bottom-right { content: none }
 @bottom-right-corner { content: none }
}
```

## Blank Pages

Clears the header for the blank pages that may be created by a page-break-before, page-break-after, or by using [double side pagination](#):

```
@page :blank{
 @top-left {
 content: none;
 }
 @top-right {
 content: none;
 }
}
```

## Index Page

The page that contains the index terms (appears only if there are such items in your topics). It uses a lower roman page number in the footer:

```
@page index {
 @top-left-corner { content: none }
 @top-left { content: none }
 @top-center { content: none }
 @top-right { content: none }
 @top-right-corner { content: none }
 @bottom-left-corner { content: none }
 @bottom-left { content: none }
 @bottom-center { content: counter(page, lower-alpha) }
 @bottom-right { content: none }
 @bottom-right-corner { content: none }
}
@media oxygen-chemistry {
 @page index {
 column-count: 2;
 column-fill: auto;
 }
}
```

When transformed with Chemistry, the page layout is spread on two columns.

## Large Tables Page

The big tables are placed on a rotated page, with orientation landscape:

```
@page landscape-page :right {
 size: landscape;

 @top-left {
 content: none;
 }
 @top-center {
 content: none;
 }
 @top-right {
 content: none;
 }

 @right-bottom {
 content: string(maptitle) string(parttitle) string(chaptertitle) string(sectiontitle) " / " counter(page);
 font-size: 8pt;
 transform: rotate(90);
 vertical-align: middle;
 }
}
```

```

 text-align: right;
 }
}

@page landscape-page :left {
 size: landscape;

 @top-left {
 content: none;
 }
 @top-center {
 content: none;
 }
 @top-right {
 content: none;
 }

 @right-top {
 content: string(maptitle) string(parttitle) string(chaptertitle) string(sectiontitle) " / " counter(page);
 font-size: 8pt;
 transform: rotate(90);
 vertical-align: middle;
 text-align: left;
 }
}

```

## How to Add a Multi-line Copyright Notice to the Footer

Suppose you want to add a footer with the following two lines of text at the end of each page that is shown on the right side:

```

© 2017 - My Company Ltd
All rights reserved

```

For this, you need to specify a rule that matches all the right pages and adds that content in the bottom-center. In your [customization css](#), add the following CSS rule:

```

@page :right{
 @bottom-center {
 content: "© 2017 - My Company Ltd \A All rights reserved";
 font-size: 0.5em;
 color: silver;
 }
}

```

**Note:** Other page rules (such as the *table-of-contents*) override the contents of the @bottom-center because they are more specific. If you need to also print the copyright in the TOC pages, then use this as the selector:

```

@page :right, table-of-contents:right {
 ...
}

```

**Note:** To use new lines (\n characters) in your headers or footers, use the \A notation, as in the example above.

## How to Add a Background Image to the Header

A common use-case is to add a background image to one of the page corners.

```

@page :left {
 @bottom-left-corner{
 content: " ";
 background-image: url('https://www.oxygenxml.com/resellers/resources/OxygenXMLEditor_icon.svg');
 background-repeat:no-repeat;
 background-position:50% 50%;
 }
}

```

**Important:** Always specify a content property. If not, the page margin box will not be generated.

**Note:** You can use raster image formats (such as PNG or JPEG), but it is best to use vector images (such as SVG or PDF). They can be scaled and produce better results when printed.

### Related Information:

[Images](#) on page 744

[How to Add a Background Image for the Cover](#) on page 722

## How to Simplify the Header (Only Keep the Chapter Title)

The headers display information such as *map title*, *part title*, *chapter title*, and *section title*, ending in the page number.

```
content: string(maptitle) string(parttitle) string(chaptertitle) string(sectiontitle) " | " counter(page);
```

This might be too much if you have long titles. The solution is to override the default header content.

In your [customization css](#), add the following CSS rule:

```
@page :left {
 @top-left {
 content: string(chaptertitle) " | " counter(page);
 }
}
@page :right {
 @top-right {
 content: string(chaptertitle) " | " counter(page);
 }
}
```

## How to Change the Header Separators (Between Sections and Chapter Titles)

There are a number of strings defined for part, chapter, and sections. Each of these strings start with the " | " character as a separator. For example, in the header of a page, you may find a sequence of strings:

```
My Publication | Introduction | Getting Started
```

1. "My Publication" is the value of the `maptitle` string.
2. "Introduction" is the value of the `chaptertitle` string.
3. "Getting Started" is the value of the `sectiontitle` string.

There might be cases where you want to change this separator. You will need to recompose the header content using the above string sets. Suppose you want to use "-" as a separator. In your [customization css](#), add the following CSS rule:

```
*[class ~="topic/topic"][is-part] > *[class ~="topic/title"] {
 string-set: parttitle "-" counter(part, upper-roman) "-" content(), chaptertitle ""; /* Avoid propagating a
 past chapter title on a new part */
}
*[class ~="topic/topic"][is-chapter]:not([is-part]) > *[class ~="topic/title"] {
 string-set: chaptertitle "-" counter(chapter) "-" content();
}
```

If you enabled the [CSS for Deep Numbering](#) on page 727, then use:

```
/*
 * Alter the string sets that are shown in the header of the page.
 */
*[class ~="topic/topic"][is-part] > *[class ~="topic/title"] {
 string-set: parttitle "-" counter(part, upper-roman) "-" content(), chaptertitle ""; /* Avoid propagating a
 past chapter title on a new part */
}
*[class ~="topic/topic"][is-chapter]:not([is-part]) > *[class ~="topic/title"] {
 string-set: chaptertitle "-" counter(chapter) "-" content(), sectiontitle "";
}
*[class ~="topic/topic"][is-chapter]:not([is-part]) > *[class ~="topic/topic"] > *[class ~="topic/title"] {
 string-set: sectiontitle "-" counter(chapter) "." counter(section1) "-" content();
}
```

## How to Change the Header Styling Depending on Page Side

To modify the styling of the default page headers, add the following CSS rule in your [customization css](#):

```
@page :left {
 @top-left {
 color:navy;
 font-style:italic;
 }
 @top-right {
 color:red;
 }
}
```

If you intend to modify **just the headers of the table of contents**, use the `table-of-contents` page rule selector:

```
@page table-of-contents:left {
```



```

@top-left {
 color:navy;
 font-style:italic;
}
@top-right {
 color:red;
}
}

```

## Index

The index section collects all the index terms from the publication and shows them in a sorted tree.

### Index - Input XML fragment

The structure that holds the index tree is the `<opentopic-index:index.groups>` element.

Each of the groups contain:

- A label, the starting letter ("T" in the following example).
- A tree of `<opentopic-index:index.entry>` elements.

Each of the entries contain:

- The formatted value (`<opentopic-index:formatted-value>`).
- A link to the publication content (`<opentopic-index:refID>/<oxy:index-link>`).
- Possibly other child entries.

### Index - Built-in CSS

All index styling is found in: `[PLUGIN_DIR]css/print/p-index.css`.

### How to Style the Index Page Title and the Grouping Letters

In your [customization css](#), add the following CSS rules:

```

index\.groups index\.group label {
 font-size:1.5em;
 color:navy;
}

index\.groups:before {
 content: "- Index - ";
 color:navy;
 font-size: 4em;
}

```

The result is:

**- Index -**

**F**  
 footer 37

**H**  
 header 37

**T**  
 table of contents 32  
 change header 35  
 style 34

### How to Style the Index Terms Labels

In your [customization css](#), add the following CSS rule:

```
index\.groups formatted-value {
 font-style:oblique;
 color:gray;
}
```

The result is:

# Index

|                          |    |
|--------------------------|----|
| <b>F</b>                 |    |
| <i>footer</i>            | 37 |
| <b>H</b>                 |    |
| <i>header</i>            | 37 |
| <b>T</b>                 |    |
| <i>table of contents</i> | 32 |
| <i>change header</i>     | 35 |
| <i>style</i>             | 34 |

## How to Add Filling Dots Between the Index Labels and the Page Numbers

Suppose you want the leader CSS content to generate a row of dots. It is necessary that the parent entry have the text justified.

In your [customization css](#), add the following CSS rule:

```
index\.entry {
 text-align:justify;
}
index\.entry formatted-value:after {
 content:leader('.');
}
```

The output now contains the dots:

# Index

|                                |    |
|--------------------------------|----|
| <b>F</b>                       |    |
| <i>footer</i> .....            | 37 |
| <b>H</b>                       |    |
| <i>header</i> .....            | 37 |
| <b>T</b>                       |    |
| <i>table of contents</i> ..... | 32 |
| <i>change header</i> .....     | 35 |
| <i>style</i> .....             | 34 |

## How to Change the Index Page Number Format

The page number is reset at the beginning of the index page by the built-in CSS rule:

```
index\.groups {
 counter-reset: page 1;
}
```

If you want to start the page counter from a different initial number, just change the value of this counter.

If you need to style the page number differently (for example, using decimals), add the following CSS rule in your [customization css](#):

```
@page index {
 @bottom-center {
 content: counter(page, decimal) }
}
```

## Page Breaks

The page breaks can be controlled in multiple ways:

1. By creating an @page and assigning it to an element will create a page break between this element and the sibling elements that have a different page.
2. Using the CSS properties: page-break-before page-break-after.

### Related Information:

[Double Side Pagination](#) on page 731

## Page Breaks - Built-in CSS

Page break properties are used in: [PLUGIN\_DIR]css/print/p-page-breaks.css.

## How to Avoid Page Breaks in Lists and Tables

To avoid splitting elements over two pages, you can use the page-break-inside CSS property. For example, if you want to impose this on tables and lists, then add the following rules to your [customization css](#):

```
*[class ~="topic/table"] {
 page-break-inside:avoid;
}
*[class ~="topic/ol"] {
 page-break-inside:avoid;
}
*[class ~="topic/ul"] {
 page-break-inside:avoid;
}
```

**Note:** Since the task steps are inherited from topic/ol, they will also not be split over two separate pages. However, if you want to allow this, add the following CSS rule:

```
*[class ~="task/steps"] {
 page-break-inside:auto;
}
```

**Note:** Another way to do this is to mark the element with an @outputclass set to page-break-avoid.

## How to Force a Page Break Before or After a Topic or Another Element

If you want to force a page break, mark the topic (or any other element you need to control page breaking for) with an @outputclass set to one of these values:

### page-break-before

Use this for a page break before the marked element.

### page-break-after

Use this for a page break after the marked element.

### page-break-avoid

Use this to avoid page breaks inside the marked element.

To force a page break before a certain topic, you should write:

```
<topic outputclass="page-break-before" ... >
```

You can also control page breaking for lists, paragraphs, or any other block type elements. The following example avoids page breaks inside an ordered list:

```
<ol outputclass="page-break-avoid" ... >
```

## How to Enforce a Number of Lines from Paragraphs that Continue in Next Page

In typography, an *orphan* is the first line of a paragraph that appears alone at the bottom of a page (the paragraph continues on a following page), while a *widow* is the last line of a paragraph that appears alone at the top of a page. The default is 2 for each of them. You can control this number by adding the following to your [customization css](#):

```
:root {
 widows:4;
 orphans:4;
}
```

## Hyphenation

Hyphenation specifies how words should be hyphenated when text wraps across multiple lines.

### How to Enable Hyphenation for Entire Map

To enable hyphenation for your entire map:

1. Make sure you set an `@xml:lang` attribute on the root of your map.
2. In your [customization css](#), add:

```
:root {
 hyphens: auto;
}
```

3. To except certain elements from being hyphenated, use `hyphens: none`. The following example excludes the `<keyword>` elements from being hyphenated:

```
*[class ~= "topic/keyword"] {
 hyphens: none;
}
```

### How to Enable/Disable Hyphenation for Tables

To enable hyphenation for your entire map:

1. Make sure you set an `@xml:lang` attribute on the root of your map or your table elements.
2. In your [customization css](#), add:

```
*[class ~= "topic/table"] {
 hyphens: auto;
}
```

3. To except certain elements from being hyphenated, use `hyphens: none`. The following example excludes the `<keyword>` elements from being hyphenated:

```
*[class ~= "topic/keyword"] {
 hyphens: none;
}
```

## Accessibility

By default, the PDF documents produced using this plugin are partially accessible in the sense that most of the paragraphs, tables, lists, headers, and footers are tagged automatically so a PDF reader can use this information to present the content.

### Related Information:

[Oxygen PDF Chemistry: Accessibility](#)

### Accessibility - Built-in CSS

Accessibility properties are defined in `[PLUGIN_DIR]css/print/p-accessibility.css`.

### How to Create Fully Accessible Documents

To make your documents fully accessible (**PDF/UA1**), do the following:

1. In your [customization css](#), specify fonts for all elements and for all page margin boxes. There should be no text that falls back to the basic provided fonts (Times, Courier, etc.). For instance, you can use:

```
:root { font-family: Arial }
@page {
 @top-left { font-family: Arial }
```

```
} ...
```

2. Specify an @alt attribute with a description on any image.
3. Change the Chemistry invocation from the build.xml file, adding the argument -pdf-ua. There are two targets to change: chemistry and chemistry.embedded.

## Localization

The **DITA-OT CSS Publishing to PDF plugin** comes with localized CSS strings for English and German. In the future, support for more languages will be added.

### Localization - Built-in CSS

The built-in localization strings for editing and printing media are defined in:

- [PLUGIN\_DIR]css/core/-i18n.css
- [PLUGIN\_DIR]css/core/-i18n-en.css
- [PLUGIN\_DIR]css/core/-i18n-de.css
- [PLUGIN\_DIR]css/core/-i18n-fr.css

There are several strings that are used only in the printed media, such as the table of contents title or the index page title. They can be found in the following CSS files:

- [PLUGIN\_DIR]css/print/p-i18n.css
- [PLUGIN\_DIR]css/print/p-i18n-en.css
- [PLUGIN\_DIR]css/print/p-i18n-de.css
- [PLUGIN\_DIR]css/print/p-i18n-fr.css

**Note:** The actual number of localization files may vary.

### How to Enable German Localization

Suppose you need to produce your publication for a German audience. In this case, you would want the text from the headers and footers to be translated to German.

To achieve that, set the @xml:lang attribute on the root of your DITA map to de\_de.



**Warning:** The default.language transformation parameter is not taken into account.

### How to Create a Localization CSS for Another Language

Suppose you want to localize your publishing for the Dutch language (language code nl). To do this, use the following procedure:

1. Copy and paste the contents of the following files in your [customization css](#):
  - [PLUGIN\_DIR]/css/core/-i18n-de.css
  - [PLUGIN\_DIR]/css/print/p-i18n-de.css
2. Search for and replace :lang(de) with :lang(nl).
3. In an editor, open the English localization files, side by side with your customization CSS:
  - [PLUGIN\_DIR]/css/core/-i18n-en.css
  - [PLUGIN\_DIR]css/print/p-i18n-en.css
4. Translate each of the strings from your customization, using the English localization as reference.

This is a very simple example of localizing just the table of contents, index page title, and the figure and table captions:

```
/* Title in the TOC page */
toc-title[empty]:lang(nl):before {
 content: "Inhoud";
}

/* This string is used in the TOC page header. */
:root:lang(nl) {
 string-set: toc-header "Inhoud";
}

/* Title in the Index page */
```

```

index\.groups:lang(nl):before {
 content: "Index";
}

@media print {
 *[class ~= "topic/table"] > *[class ~= "topic/title"]:lang(de):before {
 content: "Tafel " counter(tablecount) ": ";
 }
}
@media print {
 *[class ~= "topic/fig"] > *[class ~= "topic/title"]:lang(de):before {
 content: "Figuur " counter(figcount) ": ";
 }
}
...

```

## Styling the Content

If you need to change the styles of the elements from the topic contents, you should create a [customization CSS](#) and then add CSS rules. To create the CSS rules, you can use the development tools described in [Debugging the CSS](#) on page 713.

## Links

Links allow the users to navigate through the documentation.

### How to Remove 'on page NNN' Link Label

For paper printed materials, it is desirable that the links display a label (similar to "on page 54") after their text content. This gives the user the possibility to identify the target page. However, if the produced PDF is not printed on paper and is intended only for electronic use, this label may create clutter and makes the document harder to read. To eliminate this label, add the following in your [customization css](#):

```

*[class ~= "topic/xref"][href]:after,
*[class ~= "topic/link"][href]:after {
 content: none;
}

```

### How to Change Link Styles

Suppose you want the links to be bold and with an underline. In your [customization css](#), add this snippet:

```

*[class ~= "topic/xref"][href]:after,
*[class ~= "topic/link"][href]:after {
 font-weight: bold;
 text-decoration: underline;
}

```

## Images

Images are an important part of a publication.

**Note:** You can use raster image formats (such as PNG or JPEG), but it is best to use vector images (such as SVG or PDF). They can be scaled and produce better results when printed.

### Images - Built-in CSS

Image properties are defined in `[PLUGIN_DIR]css/print/p-images.css`.

```

*[class ~= "topic/image"] {
 prince-image-resolution: 120dpi;
 -ah-image-resolution: 120dpi;
 image-resolution: 120dpi;
 /* The US-letter page size minus page margins. See p-page-size.css for the current page size. */
 max-width: 6.5in;
}

```

### How to Fix Image Bleeding - Control Image Size

Sometimes the images may be too big for the page. The built-in CSS rules specify a maximum size for images, limiting to the width of the parent block. But if the parent block is itself too wide and bleeds out of page, you might consider specifying a length.

In your [customization css](#), add the following snippet:

```

*[class ~= "topic/image"] {
 ...
 /* The US-letter page size minus page margins. See p-page-size.css for the current page size. */
}

```

```
 } max-width: 6.5in;
}
```

## How to Change Image Resolution

This is a good technique to change the size of all **raster** images from your documentation. This will not work for vector images, such as PDF or SVG. If the images (PNG, for example) contain the image resolution in their metadata, this will be taken into account. For all other images, the default resolution is 120dpi.

If the default resolution is not good (suppose you need a higher pixel density of 300dpi), you can change it by adding the following in your [customization css](#):

```
*[class ~="topic/image"] {
 prince-image-resolution: 300dpi;
 -ah-image-resolution: 300dpi;
 image-resolution: 300dpi;
}
```

## How to Place Big Images on Rotated Pages

Very wide images may bleed out of the page. One solution for this is to use landscape pages for these wide images.

In your [customization css](#), add:

```
*[class~="topic/image"][outputclass='land'] {
 page: landscape-page;
}
```

Setting the attribute @outputclass = 'land' on the table element will force the table on a new landscape page.

Another solution is to set an @outputclass attribute on the image, then create a rule that matches it, and associate a landscape page for it.

## How to Place a Text and Image Side by Side

If you need to align text and an image side by side, you can use the following technique:

1. Organize your text and image under a <div> element like this:

```
...
<div outputclass="side-by-side">
 <p> This will be in the left side, the next figure in the right. </p>
 <fig>
 <image href="cactus.jpeg" />
 </fig>
</div>
...
```

**Note:** You can use the @outputclass attribute to mark the <div> elements that have this special layout.

2. In your [customization css](#), add:

```
*[outputclass ~="side-by-side"] > *[class ~="topic/p"] {
 display:inline-block;
 width: 45%;
}

*[outputclass ~="side-by-side"] > *[class ~="topic/fig"] {
 display:inline-block;
 width: 45%;
}
```

The image should fill the entire width of the parent <fig> element:

```
*[outputclass ~="side-by-side"] > *[class ~="topic/fig"] > *[class ~="topic/image"] {
 width:100%;
}
```

By default, the bottom of the image is on the same line as the text baseline. If you want the text and the image to be aligned at the top, add these lines:

```
*[outputclass ~="side-by-side"] > *[class ~="topic/p"] {
 vertical-align:top;
}

*[outputclass ~="side-by-side"] > *[class ~="topic/fig"] {
 vertical-align:top;
 font-size:0pt;
}
```

```
}
```

**Note:** The font-size:0pt is needed to remove the font ascent and descent around the image rectangle.

## Tables

Tables are widely used in technical documentation. This section contains information about the CSS rules that are used to style them and how to fix some problems.

### Tables - Built-in CSS

There is a combination of CSS files that address tables: [PLUGIN\_DIR]/css/core/-table-html-cals.css, [PLUGIN\_DIR]/css/core/-table-cals.css.

### How to Deal With Wide Tables - Page Rotation

Some of the tables can have a large number of columns. In this case, the table may bleed out of the page. One solution is to use landscape pages for these tables.

Setting the attribute @orient = 'land' on the table element will force the table on a new landscape page.

Another solution is to use automatic detection of wide tables (5 or more columns):

```
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='5'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='6'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='7'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='8'] {
 page: landscape-page;
 max-width: 100%;
 page-break-before: avoid;
}
```

**Note:** The landscape-page page layout is defined in the [PLUGIN\_DIR]css/print/p-pages-and-headers.css.

If you want to rotate the entire topic that contains the big table, use:

```
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='5'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='6'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='7'],
*[class~="topic/table"] > *[class~="topic/tgroup"] [cols='8'] {
 max-width: 100%;
 table-layout: auto;
}

[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"]
[cols='5']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"]
[cols='6']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"]
[cols='7']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"]
[cols='8']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *[class~="topic/table"] >
*[class~="topic/tgroup"] [cols='5']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *[class~="topic/table"] >
*[class~="topic/tgroup"] [cols='6']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *[class~="topic/table"] >
*[class~="topic/tgroup"] [cols='7']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *[class~="topic/table"] >
*[class~="topic/tgroup"] [cols='8']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *:not([class~="topic/
topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"] [cols='5']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *:not([class~="topic/
topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"] [cols='6']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *:not([class~="topic/
topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"] [cols='7']),
[class~="topic/topic"]:has(:not([class~="topic/topic"]) > *:not([class~="topic/topic"]) > *:not([class~="topic/
topic"]) > *[class~="topic/table"] > *[class~="topic/tgroup"] [cols='8']){
 page: landscape-page;
}
```

### How to Fix Text Bleeding From Table Cells

Slim tables or tables that have many columns make the text from the cells to be confined to a small horizontal space. Long words would bleed outside the cell boundaries. To fix this, you should enable hyphenation in your tables, thus making the words spread on multiple lines. In your [customization CSS](#), add:

```
*[class~="topic/table"] {
 hyphens: auto;
}
```



## Related Information:

[Hyphenation](#) on page 742

### How to Enable the Automatic Table Layout

The DITA specification indicates that tables should have a fixed layout. However, you can get a more optimal arrangement of the cells using the automatic layout. In your [customization CSS](#), add:

```
*[class~="topic/tgroup"] {
 table-layout:auto !important;
}
```

If you want to control which table you want this layout, you can set the @outputclass attribute on the <table> element:

```
<table outputclass='auto_tbl'> ... </table>
```

Then, in the CSS, use a rule that matches the @outputclass:

```
*[class~="topic/table"][outputclass='auto_tbl'] > *[class~="topic/tgroup"] {
 table-layout:auto !important;
}
```

**Important:** Make sure the tables have no column width specified.

### DITA Map to MS Office Word Transformation

Oxygen XML Developer comes bundled with a transformation scenario that allows you to convert [DITA maps](#) to Microsoft Office Word documents. It utilizes the [DITA to Word plugin created by Jarno Elovirta](#). This *plugin* contains a Word document named **Normal.docx** (located in: `[OXYGEN_INSTALL_DIR]/frameworks/dita/DITA-OT2.x/plugins/com.elovirta.ooxml/resources`) that is used by the transformation scenario as a template to generate the final Word document.

**Tip:** You can make general modifications to the **Normal.docx** template file to alter the published output.

### Configuring the Transformation Scenario

To configure an **DITA Map to MS Office Word** transformation scenario, follow these steps:

1. Open the DITA map.
2. Click the  **Configure Transformation Scenario(s)** button.
3. Select **DITA Map MS Office Word**.
4. For advanced customizations, in the **Parameters** tab you can use any of the following parameters that are unique to this transformation scenario to specify paths to files that affect the output in various ways:
  - `dotx.file` - Specifies the path to a Word template file (.docx) that will be used in the transformation to generate the final Word document. Set this parameter if you want to use a different template file other than the **Normal.docx** file that is used by default.
  - `document.flat.xsl` - Specifies the path to a pre-process clean-up stylesheet.
  - `core.xsl` - Specifies the path to a core metadata stylesheet.
  - `custom.xsl` - Specifies the path to a custom metadata stylesheet.
  - `document.xsl` - Specifies the path to a main document stylesheet.
  - `comments.xsl` - Specifies the path to a comments stylesheet.
  - `numbering.xsl` - Specifies the path to a list and title numbering stylesheet.
  - `footnotes.xsl` - Specifies the path to a footnote stylesheet.
  - `document.xml.xsl` - Specifies the path to a document relations metadata stylesheet.
  - `inkscape.exec` - Specifies the path to an Inkscape (open-source vector graphics editor) executable file.
5. Click **OK** and run the transformation scenario.

**Result:** The result of the transformation will automatically be opened in your system's default word processing application (such as Microsoft Word).

## Related Information:

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

## DITA Map to CHM (Compiled HTML Help) Transformation

To perform a *Compiled HTML Help (CHM)* transformation, Oxygen XML Developer needs Microsoft HTML Help Workshop to be installed on your computer. Oxygen XML Developer automatically detects HTML Help Workshop and uses it.

**Note:** HTML Help Workshop might fail if the files used for transformation contain accents in their names, due to different encodings used when writing the *.hhp* and *.hhc* files. If the transformation fails to produce the CHM output but the *.hhp* (HTML Help Project) file is already generated, you can manually try to build the CHM output using HTML Help Workshop.

## Changing the Output Encoding

Oxygen XML Developer uses the `htmlhelp.locale` parameter to correctly display specific characters of different languages in the output of the *Compiled HTML Help (CHM)* transformation. By default, the **DITA Map CHM** transformation scenario that comes bundled with Oxygen XML Developer has the `htmlhelp.locale` parameter set to `en-US`.

To customize this parameter, follow this procedure:

1. Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu.
2. Select the **DITA Map CHM** transformation scenario and click the **Edit** button.
3. In the **Parameter** tab, search for the `htmlhelp.locale` parameter and change its value to the desired language tag.

**Note:** The format of the `htmlhelp.locale` parameter is `LL-CC`, where `LL` represents the language code (`en`, for example) and `CC` represents the country code (`US`, for example). The language codes are contained in the ISO 639-1 standard and the country codes are contained in the ISO 3166-1 standard. For further details about language tags, go to <http://www.rfc-editor.org/rfc/rfc5646.txt>.

## DITA Map to Kindle Transformation

Oxygen XML Developer requires *KindleGen* to generate Kindle output from *DITA maps*. To install *KindleGen* for use by Oxygen XML Developer, follow these steps:

1. Go to [www.amazon.com/kindleformat/kindlegen](http://www.amazon.com/kindleformat/kindlegen) and download the zip file that matches your operating system.
2. Unzip the file on your local disk.
3. Start Oxygen XML Developer and open a *DITA map*.
4. Click the  **Configure Transformation Scenario(s)** button.
5. Select the **DITA Map Kindle** transformation and press the **Edit** button to edit it.
6. Go to **Parameters** tab and set the `kindlegen.executable` parameter as the path to the *KindleGen* directory.
7. Accept the changes.

## Run DITA OT Integrator Transformation

Oxygen XML Developer comes bundled with a transformation scenario designed to integrate DITA-OT [plugins](#). These DITA-OT *plugins* are used for various customizations. It is called **Run DITA-OT Integrator** and is found in the **DITA Map** section of the  **Configure Transformation Scenario(s)** dialog box.



**Attention:** The integration will be performed on the DITA-OT version specified in the [DITA Open Toolkit section of the DITA preferences page](#).

## Running the Transformation Scenario

To integrate a DITA OT *plugin*, follow these steps:

1. If Oxygen XML Developer was installed in the default location, you may need to restart and run it as an administrator.
2. Select the  **Apply Transformation Scenario(s)** or  **Configure Transformation Scenario(s)** action from the **DITA Maps Manager** toolbar (you could also use the same action on the main toolbar or open the [Transformation Scenarios view](#)).
3. Select the **Run DITA-OT Integrator** transformation scenario. If the *integrator* is not visible, select the **Show all scenarios** action that is available in the  **Settings** drop-down menu.
4. [Apply the scenario](#).
5. Check the **Results** panel at the bottom of the application to make sure the build was successful.
6. Restart Oxygen XML Developer with your normal permissions.

#### Related Information:

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Localizing the Interface of DITA Map to WebHelp Classic Output](#)

## Creating New Transformation Scenarios

Defining a transformation scenario is the first step in the process of transforming a document. This section includes information on the types of new scenarios that are available in Oxygen XML Developer and how to create each type of transformation.

### XML Transformation with XSLT

This type of transformation specifies the transformation parameters and location of an XSLT stylesheet that is applied to the edited XML document. This scenario is useful when you develop an XML document and the XSLT document is in its final form.

To create an **XML transformation with XSLT** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XSLT**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **XML transformation with XSLT**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

### XSLT Tab

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **XSLT** tab contains the following options:

#### XML URL

Specifies the source XML file. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.

**Note:** If the transformer engine is Saxon 9.x and a custom URI resolver is configured in the [advanced Saxon preferences page](#), the XML input of the transformation is passed to that URI resolver. If the transformer engine is one of the built-in XSLT 2.0 / 3.0 engines and [the name of an initial template](#) is specified in the scenario, the **XML URL** field can be empty. The **XML URL** field can also be empty if you use [external XSLT processors](#). Otherwise, a value is mandatory in this field.

## XSL URL

Specifies the source XSL file that the transformation will use. You can specify the path by using the text field, its history drop-down, the  [Insert Editor Variables](#) button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

## Use "xml-stylesheet" declaration

If selected, the scenario applies the stylesheet specified explicitly in the XML document with the `xml-stylesheet` processing instruction. By default, this option is deselected and the transformation applies the XSLT stylesheet that is specified in the **XSL URL** field.

## Transformer

This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These include the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).

## Advanced options

Allows you to configure the [advanced options of the Saxon HE/PE/EE engine](#) for the current transformation scenario. To configure the same options globally, go to the [Saxon-HE/PE/EE preferences page](#). For the current transformation scenario, these **Advanced options** override the options configured in that preferences page.

## Parameters

Opens a [Configure parameters dialog box](#) that allows you to configure the XSLT parameters used in the current transformation. In this dialog box, you can also configure the parameters for [additional XSLT stylesheets](#). If the XSLT transformation engine is custom-defined, you can not use this dialog box to configure the parameters sent to the custom engine. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XSLT engine to include the necessary parameters in the command line that starts the transformation process.

## Extensions

Opens a [dialog box for configuring the XSLT extension JARS or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.

## Additional XSLT stylesheets

Opens a [dialog box for adding XSLT stylesheets](#) that are applied on the main stylesheet specified in the **XSL URL** field. This is useful when a chain of XSLT stylesheets must be applied to the input XML document.

## XSLT Parameters

The global parameters of the XSLT stylesheet used in a transformation scenario can be configured by using the **Parameters** button in the **XSLT** tab of a new or edited transformation scenario dialog box.

The resulting dialog box includes a table that displays all the parameters of the current XSLT stylesheet, all imported and included stylesheets, and all [additional stylesheets](#), along with their descriptions and current values. You can also add, edit, and remove parameters, and you can use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

If the **XPath** column is selected, the parameter value is evaluated as an XPath expression before starting the XSLT transformation.

## Example:

For example, you can use expressions such as:

```
doc('test.xml')//entry
//person[@atr='val']
```

**Note:**

1. The **doc** function solves the argument relative to the XSL stylesheet location. You can use full paths or [editor variables](#) (such as `${cfdu}` [current file directory]) to specify other locations: `doc('${cfdu}/test.xml')//*`
2. You cannot use XSLT Functions. Only XPath functions are allowed.

Below the table, the following actions are available for managing the parameters:

**New**

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

**Edit**

Opens the **Edit Parameter** dialog box that allows you to edit the selected parameter. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

**Unset**

Resets the selected parameter to its default value. Available only for edited parameters with set values.

**Delete**

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

The bottom panel presents the following:

- The default value of the parameter selected in the table.
- A description of the parameter, if available.
- The system ID of the stylesheet that declares it.

**Related Information:**

[Editor Variables](#) on page 151

*XSLT Extensions*

The **Extensions** button opens a dialog box that allows you to specify the [JARS](#) and classes that contain extension functions called from the XSLT file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

**Tip:** You can specify the path to the resources using wildcards (for example, `${oxygenHome}/lib/*.jar`).

An extension function called from the XSLT file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the  **Move up** or  **Move down** buttons.

*Additional XSLT Stylesheets*

Use the **Additional XSLT Stylesheets** button in the **XSLT** tab to display a list of additional XSLT stylesheets to be used in the transformation and you can add files to the list or edit existing entries. The following actions are available:

**Add**

Adds a stylesheet in the **Additional XSLT stylesheets** list using a file browser dialog box. You can type an [editor variable](#) in the file name field of the browser dialog box. The name of the stylesheet will be added in the list after the current selection.

**Remove**

Deletes the selected stylesheet from the **Additional XSLT stylesheets** list.

**Open**

Opens the selected stylesheet in a separate view.

**Up**

Moves the selected stylesheet up in the list.

**Down**

Moves the selected stylesheet down in the list.

*Advanced Saxon HE/PE/EE XSLT Transformation Options*

The XSLT transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options as [those in the Saxon HE/PE/EE preferences page](#) but they are configured as a specific set of transformation options for each transformation scenario, while the values set in the preferences page apply as global options. The advanced options configured in a transformation scenario override the [global options](#) defined in the preferences page.

**Saxon-HE/PE/EE Options**

The advanced options for Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

**Mode ("-im")**

A Saxon-specific option that sets the initial mode for the transformation.

**Template ("-it")**

A Saxon-specific option that sets the name of the initial XSLT template to be executed.

**Use a configuration file ("-config")**

Sets a Saxon 9.8.0.8 configuration file that is executed for XSLT transformation and validation processes.

**Debugger trace into XPath expressions (applies to debugging sessions)**

Instructs the [XSLT Debugger](#) to *step into* XPath expressions.

**Enable Optimizations ("-opt")**

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

**Line numbering ("-l")**

Line numbers where errors occur are included in the output messages.

**Expand attributes defaults ("-expand")**

Specifies whether or not the attributes defined in the associated DTD or XML Schema are expanded in the output of the transformation you are executing.

**DTD validation of the source ("-dtd")**

Specifies whether or not the source document will be validated against their associated DTD. You can choose from the following:

- **On** - Requests DTD validation of the source file and of any files read using the `document ( )` function.
- **Off** - (default setting) Suppresses DTD validation.
- **Recover** - Performs DTD validation but treats the errors as non-fatal.

**Note:** Any external DTD is likely to be read even if not used for validation, since DTDs can contain definitions of entities.

**Recoverable errors ("-warnings")**

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.



## Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

## Saxon-PE/EE Options

The following advanced options are specific for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

### Register Saxon-JS extension functions and instructions

Registers the Saxon-CE extension functions and instructions when compiling a stylesheet using the Saxon 9.8.0.8 processors.

**Note:** Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).

### Allow calls on extension functions ("-ext")

If selected, the stylesheet is allowed to call external Java functions. This does not affect calls on integrated extension functions, including Saxon and EXSLT extension functions. This option is useful when loading an untrusted stylesheet (such as from a remote site using `http://[URL]`). It ensures that the stylesheet cannot call arbitrary Java methods and thus gain privileged access to resources on your machine.

### Enable assertions ("-ea")

In XSLT 3.0, you can use the `xsl:assert` element to make assertions in the form of XPath expressions, causing a dynamic error if the assertion turns out to be false. If this option is selected, XSLT 3.0 `xsl:assert` instructions are enabled. If it is not selected (default), the assertions are ignored.

## Saxon-EE Options

The advanced options that are specific for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

### XML Schema version

Use this option to change the default XML Schema version for this transformation. To change the default XML Schema version globally, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema** and use the [Default XML Schema version option](#).

### Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

### Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

## Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

## Enable streaming mode

Selecting this option will allow an XSLT to run in streaming mode. It is not selected by default.

## Other Options

### Initializer class

Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the *net.sf.saxon.lib.Initializer* interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from the command line, but the same code may be invoked to perform initialization when running user application code.

## FO Processor Tab (XSLT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **FO Processor** tab contains the following options:

### Perform FO Processing

Specifies whether or not an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.

### Input

Choose between the following options to specify which input file to use:

- **XSLT result as input** - The FO processor is applied to the result of the XSLT transformation that is defined in the **XSLT** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.

### Method

The output format of the FO processing. The available options depend on the selected processor type.

### Processor

Specifies the FO processor to be used for the transformation. It can be the built-in Apache FOP processor or an [external processor](#).

## Output Tab (XSLT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab contains the following options:

### Prompt for file

At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.

### Save As

The path of the file where the result of the transformation is stored. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Open in Browser/System Application

If selected, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).

**Note:** To set the web browser that is used for displaying HTML/XHTML pages, go to **Options > Preferences > Global**, and set it in the **Default Internet browser** field.



- **Output file** - When **Open in Browser/System Application** is selected, you can use this button to automatically open the default output file at the end of the transformation.
- **Other location** - When **Open in Browser/System Application** is selected, you can use this option to open the file specified in this field at the end of the transformation. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Open in editor

When this option is selected, at the end of the transformation, the default output file is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).

### Show in results view as

You can choose to view the results in one of the following:

- **XML** - If this is selected, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#).
- **SVG** - If this is selected, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the Results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **XHTML** - This option is only available if **Open in Browser/System Application** is not selected. If selected, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.

**Important:** When transforming very large documents, you should be aware that selecting this option may result in very long processing times. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by selecting the **Open in Browser/System Application** option instead.

- **Image URLs are relative to** - If **Show in results view as XHTML** is selected, this option specifies the path used to resolve image paths contained in the transformation result. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Generating Output Using an XSLT Processor

This section explains how to configure an XSLT processor and extensions for such a processor in Oxygen XML Developer.

#### Supported XSLT Processors

Oxygen XML Developer includes the following XSLT processors:

- **Xalan 2.7.2** - [Xalan-Java](#) is an XSLT processor for transforming XML documents into HTML, text, or other XML document types. It implements XSL Transformations (XSLT) Version 1.0 and XML Path Language (XPath) Version 1.0.
- **Saxon 6.5.5** - [Saxon 6.5.5](#) is an XSLT processor that implements the Version 1.0 XSLT and XPath with a number of powerful extensions. This version of Saxon also includes many of the new features that were first defined in the XSLT 1.1 working draft, but for conformance and portability reasons these are not available if the stylesheet header specifies `version="1.0"`.
- **Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE)** - [Saxon-HE/PE](#) implements the basic conformance level for XSLT 2.0 / 3.0 and XQuery 1.0. The term *basic XSLT 2.0 / 3.0 processor* is defined in the draft XSLT 2.0 / 3.0 specifications. It is a conformance level that requires support for all features of the language other than those that involve schema processing. The HE product remains open source, but removes some of the more advanced features that are present in Saxon-PE.
- **Saxon 9.8.0.8 Enterprise Edition (EE)** - [Saxon EE](#) is the schema-aware edition of Saxon and it is one of the built-in processors included in Oxygen XML Developer. Saxon EE includes an XML Schema processor, and schema-aware XSLT, XQuery, and XPath processors.

The validation in schema aware transformations is done according to the W3C XML Schema 1.0 or 1.1. This can be [configured in Preferences](#).

**Note:** Oxygen XML Developer implements a Saxon *framework* that allows you to create Saxon configuration files. Two templates are available: **Saxon collection catalog** and **Saxon configuration**. Both of these templates support content completion, element annotation, and attribute annotation.

**Note:** Saxon can use the *ICU-J localization library* (saxon9-icu.jar) to add support for sorting and date/number formatting in a wide variety of languages. This library is not included in the Oxygen XML Developer installation kit. However, Saxon will use the default collation and localization support available in the currently used JRE. To enable this capability, follow these steps:

1. Download Saxon 9.8.0.8 Professional Edition (PE) or Enterprise Edition (EE) from <http://www.saxonica.com>.
2. Unpack the downloaded archive.
3. Create a new XSLT transformation scenario (or edit an existing one). In the **XSLT** tab, click the **Extensions** button to open the list of additional libraries used by the transformation process.
4. Click **Add** and browse to the folder where you unpacked the downloaded archive and choose the saxon9-icu.jar file.

Note that the saxon9-icu.jar should NOT be added to the application library folder because it will conflict with another version of the ICU-J library that comes bundled with Oxygen XML Developer.

- **Saxon-CE (Client Edition)** is Saxonica's implementation of XSLT 2.0 for use on web browsers. Oxygen XML Developer provides support for editing stylesheets that contain Saxon-CE extension functions and instructions. This support improves the validation, content completion, and syntax highlighting.

**Note:** Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).


**Note:** A specific template, named **Saxon-CE stylesheet**, is available in the [New document wizard](#).

- **Xsltproc (libxslt)** - **Libxslt** is the XSLT C library developed for the Gnome project. **Libxslt** is based on *libxml2*, the XML C library developed for the Gnome project. It also implements most of the EXSLT set of processor-portable extensions, functions, and some of Saxon's evaluate and expression extensions.

Oxygen XML Developer uses **Libxslt** through its command line tool (*Xsltproc*). Depending on your operating system, you must download the Libxslt libraries on your machine from <http://xmlsoft.org/XSLT/downloads.html> and place them in a local folder. Then you need to update the PATH environmental variable to contain the parent folder where the xsltproc executable is located.

**Tip:** As an example, a Windows installation of the Xsltproc engine would follow these steps:

1. Go to <ftp://ftp.zlatkovic.com/libxml/> and download the following ZIP files: **iconv-1.9.2.win32.zip**, **libxml2-2.7.8.win32.zip**, **libxslt-1.1.26.win32.zip**, **zlib-1.2.5.win32.zip**.
2. Unzip all of them into the same folder of your choice.
3. Edit the PATH environment variable and add the bin folder for all four archives:

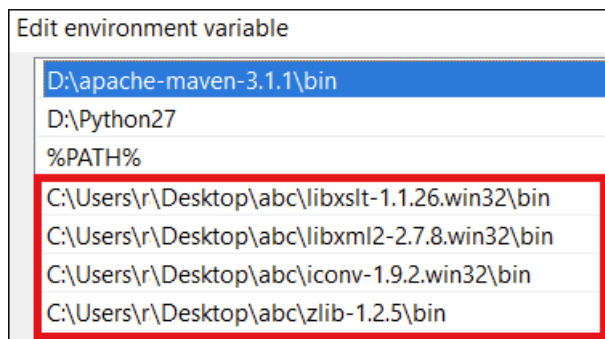

4. Restart Oxygen XML Developer.

**Result:** You can now use the **xsltproc** processor as an XSLT engine in the XSLT transformation scenario.

**Note:** The Xsltproc processor can be configured from the [XSLTPROC options page](#).



**CAUTION:** There is a known problem where file paths that contain spaces are not handled correctly in the LIBXML processor. For example, the built-in [XML Catalog](#) files of the predefined document types

(DocBook, TEI, DITA, etc.) are not handled properly by LIBXML if Oxygen XML Developer is installed in the default location on Windows (C:\Program Files). This is because the built-in *XML catalog* files are stored in the `[OXYGEN_INSTALL_DIR]/frameworks` subdirectory of the installation directory, and in this case it contains a space character.

- **MSXML 4.0** - **MSXML 4.0** is available only on Windows platforms. It can be used for [transformation](#) and [validation of XSLT stylesheets](#).

Oxygen XML Developer uses the Microsoft XML parser through its command line tool [msxsl.exe](#).

Since `msxsl.exe` is only a wrapper, Microsoft Core XML Services (MSXML) must be installed on the computer. Otherwise, you will get a corresponding warning. You can get the latest Microsoft XML parser from [Microsoft web-site](#).

- **MSXML .NET** - **MSXML .NET** is available only on Windows platforms. It can be used for [transformation](#) and [validation of XSLT stylesheets](#).

Oxygen XML Developer performs XSLT transformations and validations using the .NET Framework XSLT implementation (*System.Xml.Xsl.XslTransform* class) through the **nxslt** command line utility. The **nxslt** version included in Oxygen XML Developer is 1.6.

You should have the .NET Framework version 1.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed. Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 1.0** - A transformer based on the **System.Xml** 1.0 library available in the .NET 1.0 and .NET 1.1 frameworks from Microsoft (<http://msdn.microsoft.com/xml/>). It is available only on Windows.

You should have the .NET Framework version 1.0 or 1.1 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed. Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 2.0** - A transformer based on the **System.Xml** 2.0 library available in the .NET 2.0 Framework from [Microsoft](#). It is available only on Windows.

You should have the .NET Framework version 2.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 2.0 to be installed. Exit code: 128.

You can get the .NET Framework version 2.0 from the [Microsoft website](#).

For information about configuring the XSLT preferences, see the [XSLT options](#) section.

### Configuring Custom XSLT Processors

Oxygen XML Developer allows you to configure custom processors to be used for running XSLT and XQuery transformations.

To add a new custom processor, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **XML > XSLT-FO-XQuery > Custom Engines**.
2. Click the **New** button at the bottom of the dialog box.
3. Configure the [parameters for the custom engine](#).
4. Click **OK**.

#### Note:

The output messages of a custom processor are displayed in an output view at the bottom of the application window. If an output message follows [the format of an Oxygen XML Developer linked message](#), clicking it highlights the location of the message in an editor panel containing the file referenced in the message.

#### Related Information:

[Custom Engines Preferences](#) on page 114

## Configuring the XSLT Processor Extensions Paths

The Xalan and Saxon processors support the use of extension elements and extension functions. Unlike a literal result element, which the stylesheet simply transfers to the result tree, an extension element performs an action. The extension is usually used because the XSLT stylesheet fails in providing adequate functions for accomplishing a more complex task.

For more information about how to use extensions, see the following links:

- **Xalan** - <http://xml.apache.org/xalan-j/extensions.html>
- **Saxon 6.5.5** - <http://saxon.sourceforge.net/saxon6.5.5/extensions.html>
- **Saxon 9.8.0.8** - <http://www.saxonica.com/documentation9.5/index.html#!extensibility>

To set an XSLT processor extension (a directory or a jar file), use the **Extensions** button in the **Edit scenario** dialog box.

## XML Transformation with XQuery

This type of transformation specifies the transform parameters and location of an XQuery file that is applied to the edited XML document.

Use the **XML transformation with XQuery** scenario to apply a transformation in which an XQuery file queries an XML file for the output results.

To create an **XML transformation with XQuery** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XML transformation with XQuery**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **XML transformation with XQuery**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

## XQuery Tab

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **XQuery** tab contains the following options:

### XML URL

Specifies the source XML file. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.

**Note:** If the transformer engine is Saxon 9.x and a custom URI resolver is configured in the [advanced Saxon preferences page](#), the XML input of the transformation is passed to that URI resolver.

### XQuery URL

Specifies the source XQuery file to be used for the transformation. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-

down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

## Transformer

This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These include the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).

## Advanced options

Allows you to configure the [advanced options of the Saxon HE/PE/EE engine](#) for the current transformation scenario. To configure the same options globally, go to the [Saxon-HE/PE/EE preferences page](#). For the current transformation scenario, these **Advanced options** override the options configured in that preferences page.

## Parameters

Opens the [Configure parameters dialog box](#) for configuring the XQuery parameters. You can use the buttons in this dialog box to add, edit, or remove parameters. If the XQuery transformation engine is custom-defined, you can not use this dialog box to set parameters. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XQuery engine to include the necessary parameters in the command line that starts the transformation process.

## Extensions

Opens a [dialog box for configuring the XQuery extension JARS or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.

### *XQuery Parameters*

The global parameters of the XQuery file used in a transformation scenario can be configured by using the **Parameters** button in the **XQuery** tab.

The resulting dialog box includes a table that displays all the parameters of the current XQuery file, along with their descriptions and current values. You can also add, edit, and remove parameters, and use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

If the **XPath** column is selected, the parameter value is evaluated as an XPath expression before starting the XQuery transformation.

### **Example:**

For example, you can use expressions such as:

```
doc('test.xml')//entry
//person[@atr='val']
```

### **Note:**

1. The **doc** function solves the argument relative to the XQuery file location. You can use full paths or [editor variables](#) (such as `${cfdu}` [current file directory]) to specify other locations: `doc(' ${cfdu}/test.xml' )//*`
2. Only XPath functions are allowed.

Below the table, the following actions are available for managing the parameters:

### **New**

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

## Edit

Opens the **Edit Parameter** dialog box that allows you to edit the selected parameter. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

## Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

## Delete

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

The bottom panel presents the following:

- The default value of the parameter selected in the table.
- A description of the parameter, if available.
- The system ID of the stylesheet that declares it.

## Related Information:

[Editor Variables](#) on page 151

## XQuery Extensions

The **Extensions** button is used to specify the [JAR](#) and classes that contain extension functions called from the XQuery file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

An extension function called from the XQuery file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the **↑ Move up** or **↓ Move down** buttons.

## Advanced Saxon HE/PE/EE XQuery Transformation Options

The XQuery transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options as [those in the Saxon HE/PE/EE preferences page](#) but they are configured as a specific set of transformation options for each transformation scenario, while the values set in the preferences page apply as global options. The advanced options configured in a transformation scenario override the [global options](#) defined in the preferences page.

## Saxon-HE/PE/EE Options

The advanced options for Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

### Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is used for XQuery transformation and validation scenarios.

### Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

### Use linked tree model ("-tree:linked")

This option activates the linked tree model.

### Recoverable errors ("-warnings")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.



## Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

## Saxon-PE/EE Options

The following advanced options are specific for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

### Allow calls on extension functions ("-ext")

If selected, calls on external functions are allowed. Selecting this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

## Saxon-EE Options

The advanced options that are specific for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

### Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

### Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

### Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

### Enable XQuery update ("-update:(on|off)")

This option controls whether or not XQuery update syntax is accepted. The default value is off.

### Backup files updated by XQuery ("-backup:(on|off)")

If selected, backup versions for any XML files updated with an XQuery Update are generated. This option is available when the **Enable XQuery update** option is selected.

## Other Options

### Initializer class

Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the `net.sf.saxon.lib.Initializer` interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from

the command line, but the same code may be invoked to perform initialization when running user application code.

### FO Processor Tab (XQuery Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **FO Processor** tab contains the following options:

#### Perform FO Processing

Specifies whether or not an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.

#### Input

Choose between the following options to specify which input file to use:

- **XQuery result as input** - The FO processor is applied to the result of the XQuery transformation that is defined in the **XQuery** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.

#### Method

The output format of the FO processing. The available options depend on the selected processor type.

#### Processor

Specifies the FO processor to be used for the transformation. It can be the built-in Apache FOP processor or an [external processor](#).

### Output Tab (XQuery Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab contains the following options:

#### Present as a sequence

Selecting this option will reduce the time necessary to fetch the full results, as it will only fetch the first chunk of the results.

#### Prompt for file

At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.

#### Save As

The path of the file where the result of the transformation is stored. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

#### Open in Browser/System Application

If selected, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).

**Note:** To set the web browser that is used for displaying HTML/XHTML pages, go to **Options > Preferences > Global**, and set it in the **Default Internet browser** field.

- **Output file** - When **Open in Browser/System Application** is selected, you can use this button to automatically open the default output file at the end of the transformation.
- **Other location** - When **Open in Browser/System Application** is selected, you can use this option to open the file specified in this field at the end of the transformation. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

#### Open in editor

When this option is selected, at the end of the transformation, the default output file is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).



## Show in results view as

You can choose to view the results in one of the following:

- **XML** - If this is selected, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#).
- **SVG** - If this is selected, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the Results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **XHTML** - This option is only available if **Open in Browser/System Application** is not selected. If selected, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.

**Important:** When transforming very large documents, you should be aware that selecting this option may result in very long processing times. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by selecting the **Open in Browser/System Application** option instead.

- **Image URLs are relative to** - If **Show in results view as XHTML** is selected, this option specifies the path used to resolve image paths contained in the transformation result. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the [Browse](#) button.

## DITA OT Transformation

This type of transformation specifies the parameters for an Ant transformation that executes a DITA-OT build script. Oxygen XML Developer includes a built-in version of Ant and a built-in version of DITA-OT, but other versions can be set in the scenario.

To create a **DITA OT Transformation** scenario, use one of the following methods:

- Use the [Configure Transformation Scenario\(s\) \(Ctrl + Shift + C \(Command + Shift + C on OS X\)\)](#) action from the **DITA Maps Manager** toolbar, main toolbar, or the **Document > Transformation** menu. Then click the **New** button and select **DITA OT Transformation**.
- Go to **Window > Show View** and select [Transformation Scenarios](#) to display [this view](#). Click the **+ New Scenario** drop-down menu button and select **DITA OT Transformation**.

Both methods open the **DITA Transformation Type** dialog box that presents the list of possible outputs.

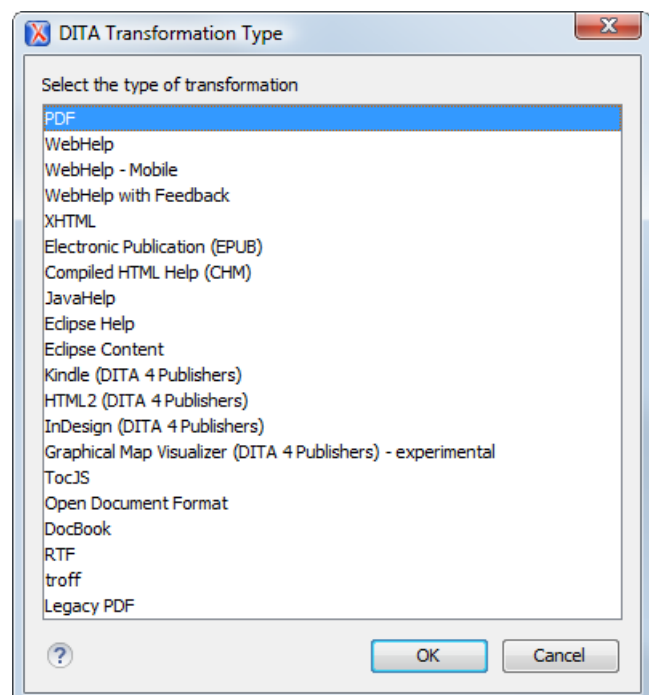


Figure 407: DITA Transformation Type Dialog Box

Select the desired type of output and click **OK**. This opens the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation. Some of these tabs are only available for certain output types (for example, a **Skins** tab is only available for **WebHelp Classic** and **WebHelp Classic with Feedback** output types, a **Templates** tab is available only for **WebHelp Responsive** and **WebHelp Responsive with Feedback**, and a **FO Processor** tab is available for PDF output).

### Skins Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Skins** tab is available for DITA OT transformations with **WebHelp Classic** or **WebHelp Classic with Feedback** output types and it provides a set of predefined skins that you can use as a base for your WebHelp system output.

A *skin* is a collection of CSS properties that can alter the look of the output by changing colors, font types, borders, margins, and paddings. This allows you to rapidly adapt the look and feel of your output.

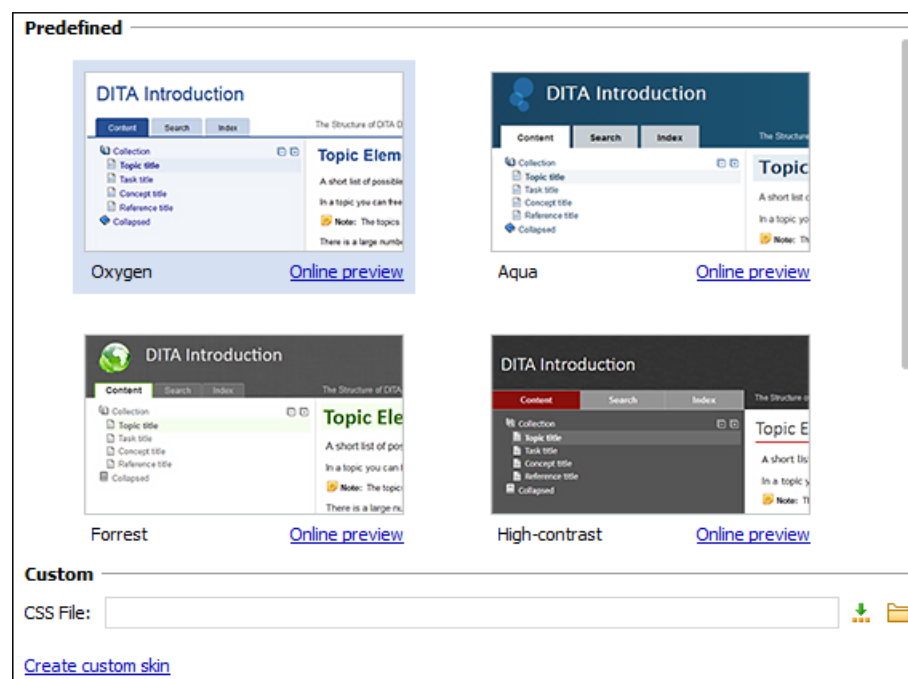


**Figure 408: Skins Tab**

The **Skins** tab includes the following sections:

#### Predefined Skins

This section presents the predefined skins that are included in Oxygen XML Developer. The predefined skins cover a wide range of chromatic themes, ranging from a very light one to a high-contrast variant. To see how the *skin* looks when applied on a sample documentation project that is stored on the Oxygen XML Developer website, press the **Online preview** link.

#### Custom Skins

You can use this section to customize the look of the output.

## CSS File

You can set this field to point to a custom CSS stylesheet or customized skin. A custom CSS file will overwrite a skin selection.

**Note:** The output can also be styled by setting the `args.css` parameter in the **Parameters** tab. The properties taken from the stylesheet referenced in this parameter take precedence over the properties declared in the skin set in the **Skins** tab.

## Create custom skin

Use this link to open the [WebHelp Skin Builder](#) tool.

## Templates Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Templates** tab is available for DITA OT transformations with **WebHelp Responsive** or **WebHelp Responsive with Feedback** output types and it provides a set of predefined [publishing templates](#). You can use one of them to publish your documentation or as a starting point for a new publishing template.

There are two main types of templates, *Tiles* and *Tree* and each of the built-in templates includes of version of each type. You can click on the tags at the top of the pane to filter the templates and narrow your search. You can filter them by either **tiles** or **tree** and then various color schemes. Each built-in template also includes an **Online preview** link that opens a webpage in your default browser that provides a sample of how the main page will look when that particular template is used to generate the output.

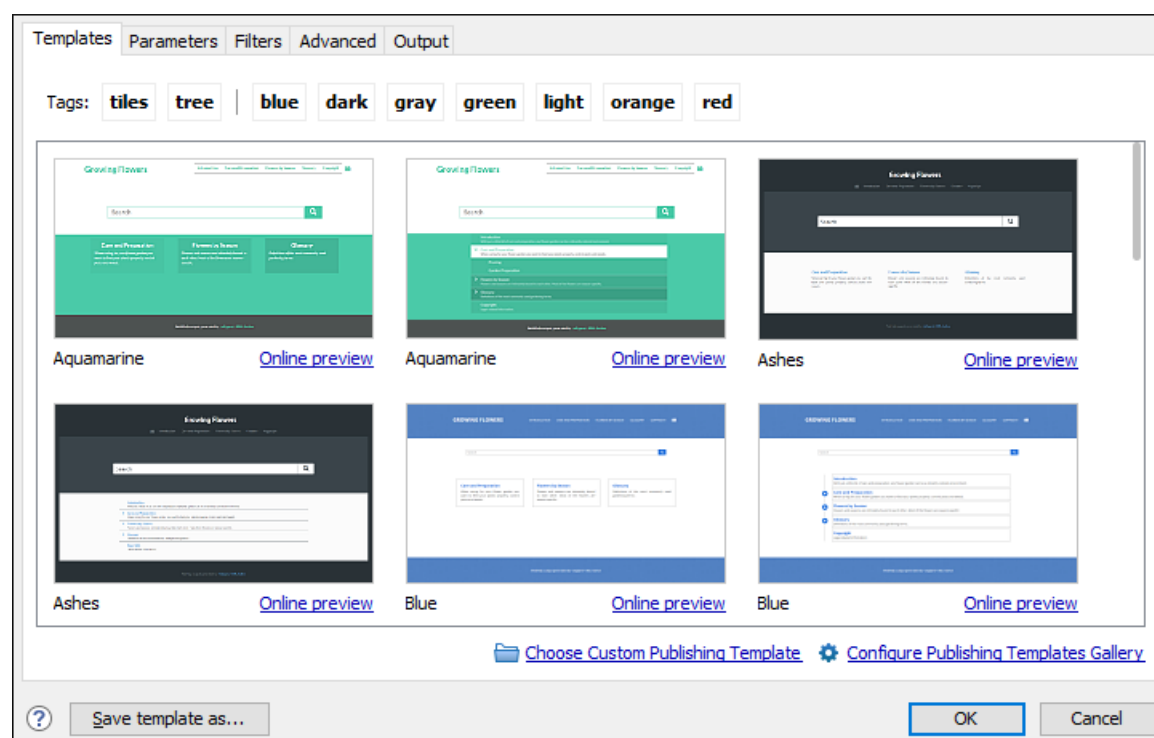


Figure 409: Templates Tab

The two main types of layouts:

### Tiles

The main page in the WebHelp output presents a tile for each main topic (chapter) of the documentation. Each tile includes a link to the topic and a short description.

### Tree

The main page in the WebHelp output presents a tree-like table of contents with links to the first and second level topics in the publication.

## Built-in Templates Location

All built-in templates are stored in the following directory: *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/templates*.

## Save Template As Button

You can use the **Save template as** button (at the bottom-left of the transformation dialog box) to export the currently selected template into a new template package that can be used as a starting point to [create your own custom template](#). Clicking this button will open a [template package configuration dialog box](#) that contains some options and displays the parameters that will be exported to your template package.

## Selecting Custom Templates

Once you are finished configuring your template, you can click the **Choose Custom Publishing Template** link to select your template.

You can also [add your custom templates](#) to the list of templates displayed in the **Templates** tab. To do this, store them in a directory, then click the **Configure Publishing Templates Gallery** link and add that directory to the list. All the templates contained in your template directory will be displayed in the preview pane along with all the built-in templates.

## Template Errors

When the **Templates** tab is opened, all templates (built-in and custom) are loaded and validated. Specifically, certain elements in the [template descriptor file](#) are checked for validity. If errors are encountered that prevents the template from loading, the following message will be displayed toward the bottom of the dialog box:

 Some templates could not be loaded. [More details](#)

If you click the **More details** link, a window will open with more information about the encountered error. For example, it might offer a hint for which element is missing from the expected [descriptor file structure](#).

Also, if a template could be loaded, but certain elements could not be found in the [descriptor file](#), a warning icon () will be displayed on the template's image (in the **Templates** tab of the transformation dialog box). For example, this happens if a valid [preview-image element](#) cannot be found.

## Sharing Publishing Template

To share a publishing template with others, following these steps:

1. Copy your template in a new folder.
2. Go to **Options > Preferences > DITA > Publishing** and add that new folder to the list.
3. Switch the option as the bottom of that preferences page to **Project Options**.
4. Share your project file (.xpr).

### Related Information:

[Publishing Templates](#) on page 869

[Working with Publishing Templates](#) on page 897

### Template Package Configuration Dialog Box

The **Save template as** button (at the bottom-left of the transformation dialog box for **WebHelp Responsive** transformations) can be used to export the currently selected template into a new template package that can be used as a starting point to [create your own custom template](#). The result will be a ZIP archive that contains a [template descriptor file](#) and other resources (such as CSS files) that were attached to the selected template.

Clicking the **Save template as** button opens a template package configuration dialog box contains the following options and components:

## Name

Required field used to specify the name for the new template. This will become the text value of the name element in the [template descriptor file](#). This information is displayed as the name of the template in the transformation scenario dialog box.

## Description

Optional field used to specify a template description. This will become the text value of the description element in the [template descriptor file](#). This information is displayed when the user hovers over the template in the transformation scenario dialog box.

## Parameter Table

This table displays the parameters that will be exported. Only relevant parameters are exported. The parameters and their values will be inserted in the [parameters section of the template descriptor file](#). If any of the parameter values point to a file path that references a template resource (such as CSS files, custom HTML fragments, images), those resources will automatically be copied to the new template package and their references will be changed accordingly.

**Note:** Additional resources that are referenced in CSS files, HTML fragments, or other resources will not be copied to the new template package, so you will need to copy them manually and update their references in the [template descriptor file](#).

## Include HTML Page Layout Files

Select this option if you want to copy the default [HTML Page Layout Files](#) into your template package. They are helpful if you want to change the structure of the generated HTML pages.

## Save as

Use this field to specify the name and path of the ZIP file where the template will be saved.

The following parameters will be set in the new template package:

| Name         | Value |
|--------------|-------|
| force-unique | true  |

☐ Include HTML Page Layout Files

Save as:

[Read more about Oxygen Publishing Templates](#)

Figure 410: Template Package Configuration Dialog Box

## FO Processor Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **FO Processor** tab is available for DITA OT transformations with a **PDF** output type.

This tab allows you to select an FO Processor to be used for the transformation.

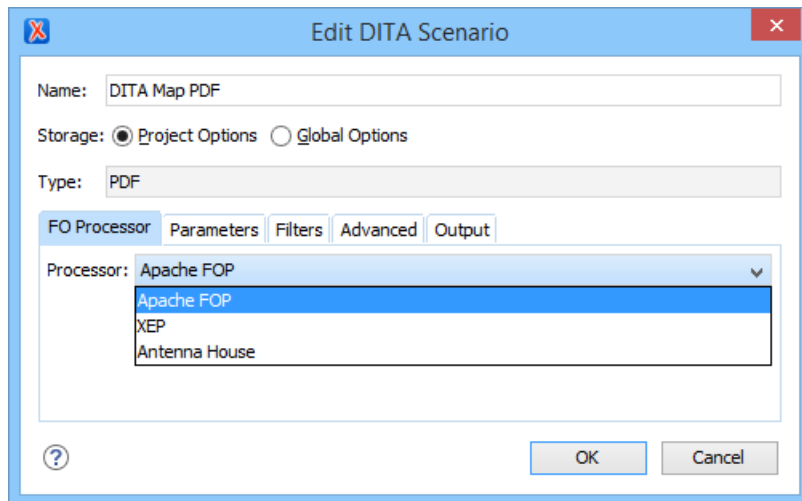


**Figure 411: FO Processor Configuration Tab**

You can choose one of the following processors:

### Apache FOP

The default processor that comes bundled with Oxygen XML Developer.

### XEP

The [RenderX XEP](#) processor. If XEP is already installed, Oxygen XML Developer displays the detected installation path under the drop-down menu. XEP is considered installed if it was detected in one of the following sources:

- XEP was configured as an external FO Processor in the [FO Processors option page](#).
- The system property `com.oxygenxml.xep.location` was set to point to the XEP executable file for the platform (for example: `xep.bat` on Windows).
- XEP was installed in the `DITA-OT-DIR/plugins/org.dita.pdf2/lib` directory of the Oxygen XML Developer installation directory.

### Antenna House

The [Antenna House](#) (AH Formatter) processor. If Antenna House is already installed, Oxygen XML Developer displays the detected installation path under the drop-down menu. Antenna House is considered installed if it was detected in one of the following sources:

- Environment variable set by Antenna House installation (the newest installation version will be used).
- Antenna House was added as an external FO Processor in the Oxygen XML Developer preferences pages.

To further customize the PDF output obtained from the Antenna House processor, follow these steps:

1. **Edit** the transformation scenario.
2. Open the [Parameters tab](#).
3. Add the `env.AXF_OPT` parameter and point to the Antenna House configuration file.

### Related Information:

[FO Processors Preferences](#) on page 111

[Generating PDF Output Using an XSL-FO Processor](#) on page 936

### Parameters Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Parameters** tab allows you to configure the parameters sent to the DITA-OT build file.

The table in this tab displays all the parameters that the DITA-OT documentation specifies as available for each chosen type of transformation (for example, XHTML or PDF), along with their description and current values. You can find more information about each parameter in the [DITA OT Documentation](#). You can also add, edit, and

remove parameters, and you can use the text box to filter or search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

Depending on the type of a parameter, its value can be one of the following:

- A simple text field for simple parameter values.
- A combo box with some predefined values.
- A file chooser and an [editor variable](#) selector to simplify setting a file path as the value of a parameter.

**Note:** To input parameter values at runtime, use the [ask editor variable](#) in the **Value** column.

Below the table, the following actions are available for managing parameters:

#### New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. You can specify the **Value** of the parameter by using the  [Insert Editor Variables](#) button or the  **Browse** button.

#### Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

#### Edit

Opens the **Edit Parameter** dialog box that allows you to change the value of the selected parameter or its description.

#### Delete

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

### WebHelp Responsive Parameters Contributed by an Oxygen Publishing Template

WebHelp Responsive [transformation parameters that are defined in an Oxygen Publishing Template descriptor file](#) are displayed in italics. After [creating a publishing template](#) and [adding it to the templates gallery](#), when you select the template in the **Templates** tab, the **Parameters** tab will automatically be updated to include the parameters defined in the template descriptor file.

#### Related Information:

[DITA Open Toolkit Documentation](#)

### Filters Tab (DITA Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Filters** tab allows you to add filters to remove certain content elements from the generated output.

You can choose one of the following options to define filters:

#### Use DITAVAL file

If you already have a *DITAVAL* file associated with the [DITA map](#), you can specify the file to be used when filtering content. You can specify the path by using the text field, its history drop-down, the  [Insert Editor Variables](#) button, or the browsing tools in the  **Browse** drop-down list. You can find out more about constructing a *DITAVAL* file in the [DITA Documentation](#).



**Attention:** If a filter file is specified in the `args.filter` parameter (in the [Parameters](#) tab), that file takes precedence over a *DITAVAL* file specified here.

#### Exclude from output all elements with any of the following attributes

By using the  **New**,  **Edit**, or  **Delete** buttons at the bottom of the pane, you can configure a list of attributes (name and value) to exclude all elements that contain any of these attributes from the output.

### Advanced Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.



The **Advanced** tab allows you to specify advanced options for the transformation scenario.

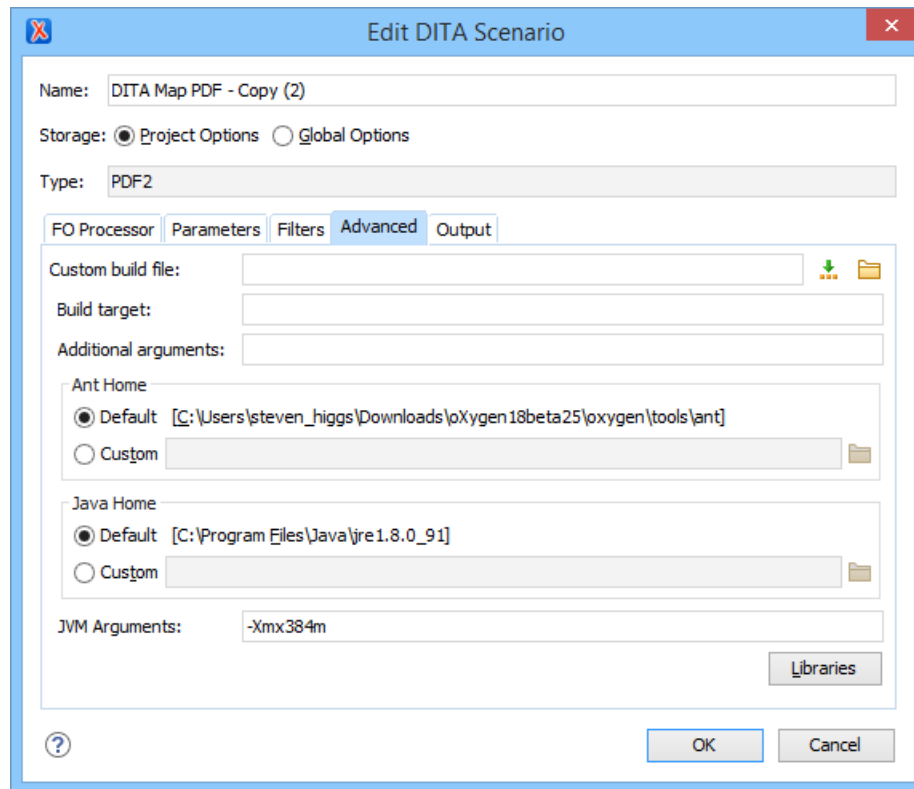


**Figure 412: Advanced Settings Tab**

You can specify the following parameters:

#### **Custom build file**

If you use a custom DITA-OT build file, you can specify the path to the customized build file. If empty, the `build.xml` file from the `dita.dir` parameter that is configured in the [Parameters](#) tab is used. You can specify the path by using the text field, the  [Insert Editor Variables](#) button, or the  **Browse** button.

#### **Build target**

Optionally, you can specify a build target for the build file. If no target is specified, the default `init` target is used.

#### **Additional arguments**

You can specify additional command line arguments to be passed to the transformation (such as `-verbose`).

#### **Ant Home**

You can choose between the default or custom Ant installation to run the transformation. The default path can be configured in the [Ant preferences](#) page.

#### **Java Home**

You can choose between the default or custom Java installation to run the transformation. The default path is the Java installation that is used by Oxygen XML Developer.

**Note:** It may be possible that the used Java version is incompatible with the DITA Open Toolkit engine. For example, DITA-OT 2.0 and newer requires Java 1.7 or newer. Thus, if you encounter related errors running the transformation, consider installing a Java VM that is supported by the DITA OT publishing engine and using it in the **Java Home** text field.

#### **JVM Arguments**

This parameter allows you to set specific parameters for the Java Virtual Machine used by Ant. For example, if it is set to `-Xmx384m`, the transformation process is allowed to use 384 megabytes of memory. When



performing a large transformation, you may want to increase the memory allocated to the Java Virtual Machine. This will help avoid *Out of Memory* error messages (**OutOfMemoryError**).

## Libraries

By default, Oxygen XML Developer adds libraries (as high priority) that are not transformation-dependent and also patches for certain DITA Open Toolkit bugs. You can use this button to specify additional libraries ([JAR](#) files or additional class paths) to be used by the Ant transformer.

**Tip:** You can specify the path to the additional libraries using wildcards (for example, `${oxygenHome}/lib/*.jar`).

## Output Tab (DITA OT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab allows you to configure options that are related to the location where the output is generated.

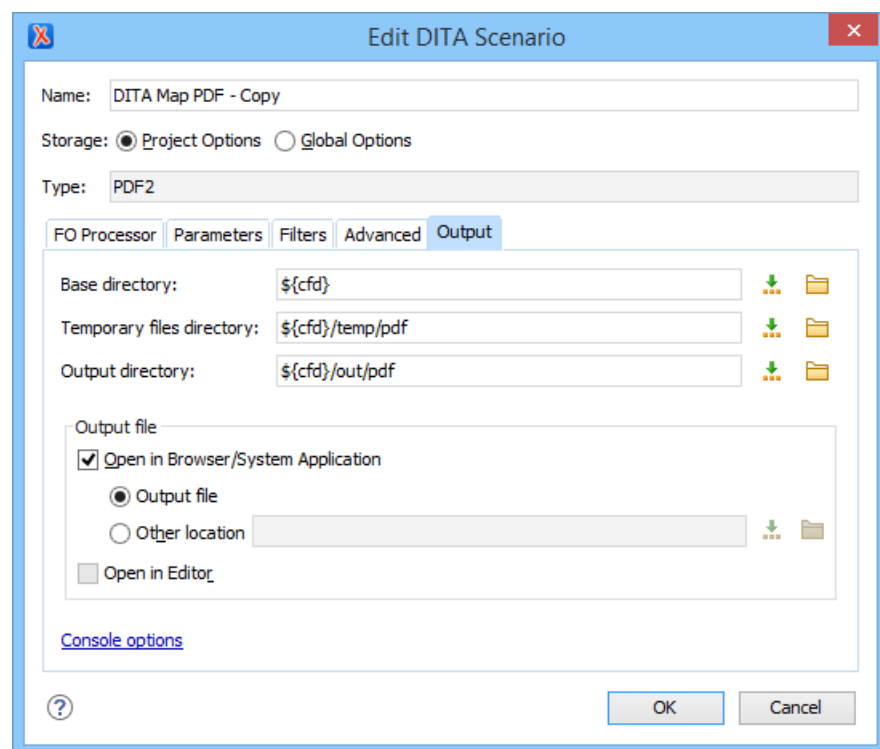


**Figure 413: Output Settings Tab**

You can specify the following parameters:

### Base directory

All the relative paths that appear as values in parameters are considered relative to the base directory. The default value is the directory where the transformed map is located. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the [Browse](#) button.

### Temporary files directory

This directory is used to store pre-processed temporary files until the final output is obtained. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the [Browse](#) button.

### Output directory

The folder where the content of the final output is stored. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the [Browse](#) button.

**Note:** If the *DITA map* or topic is opened from a remote location or a ZIP file, the parameters must specify absolute paths.

## Open in Browser/System Application

If selected, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).

**Note:** To set the web browser that is used for displaying HTML/XHTML pages, go to **Options > Preferences > Global**, and set it in the **Default Internet browser** field.

- **Output file** - When **Open in Browser/System Application** is selected, you can use this button to automatically open the default output file at the end of the transformation.
- **Other location** - When **Open in Browser/System Application** is selected, you can use this option to open the file specified in this field at the end of the transformation. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

## Open in editor

When this option is selected, at the end of the transformation, the default output file is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).

## Troubleshooting DITA Transformation Errors

If a DITA transformation results in errors or warnings, the information is displayed in the message panel at the bottom of the editor. The information includes the severity, description of the problem, the name of the resource, and the path of the resource.

To help prevent and solve DITA transformation problems, follow these steps:

1. Validate your DITA documents by using the  **Validate** action from the  **Validation** toolbar drop-down menu, the **Document > Validate** menu, or from the **Validate** menu when invoking the contextual menu in the **Project** view.
2. If this action results in validation errors, solve them prior to executing the transformation. Also, you should pay attention to the warning messages because they may identify problems in the transformation.
3. [Run the DITA transformation scenario](#).
4. If the transformation results in errors or warnings, they are displayed in the **Results panel** at the bottom of the editor. The following information is presented to help you troubleshoot the problems:
  - **Severity** - The first column displays the following icons that indicate the severity of the problem:
    - **Informational** - The transformation encountered a condition of which you should be aware.
    -  **Warning** - The transformation encountered a problem that should be corrected.
    -  **Error** - The transformation encountered a more severe problem, and the output is affected or cannot be generated.
  - **Info** - You can click the  **See More** icon to open a web page that contains details about DITA-OT error messages.
  - **Description** - A description of the problem.
  - **Resource** - The name of the transformation resource.
  - **System ID** - The path of the transformation resource.
5. Use this information or other resources from the online DITA-OT community to solve the transformation problems before re-executing the transformation scenario.
6. If you need to contact the *Oxygen* technical support team, they will need you to send the entire transformation scenario execution log. To obtain it:
  - a. Go to the **Options > Preferences > DITA** preferences page and set the **Show console output** option to **Always**.
  - b. Execute the transformation scenario again. The console output messages are displayed in the **DITA OT** view.
  - c. Copy the entire log, save it in a text file, then send it to the *Oxygen* technical support team.
  - d. After your issue has been solved, go back to the **Options > Preferences > DITA** preferences page and set the **Show console output** option to **When build fails**.

## Ant Transformation

This type of transformation allows you to configure the options and parameters of an Ant build script.

An Ant transformation scenario is usually associated with an Ant build script. Oxygen XML Developer runs an Ant transformation scenario as an external process that executes the Ant build script with the built-in Ant distribution ([Apache Ant](#) version 1.9.8) that is included with the application, or optionally with a custom Ant distribution configured in the scenario.

To create an Ant transformation scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **ANT transformation**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **ANT transformation**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

### Related Information:

[Transforming Ant Build Files](#) on page 498

## Options Tab (Ant Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Options** tab allows you to specify the following options:

### Working directory

The path of the current directory of the Ant external process. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Build file

The Ant script file that is the input of the Ant external process. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Build target

Optionally, you can specify a build target for the Ant script file. If no target is specified, the Ant target that is specified as the default in the Ant script file is used.

### Additional arguments

You can specify additional command line arguments to be passed to the transformation (such as - verbose).

### Ant Home

You can choose between the default or custom Ant installation to run the transformation. The default path can be configured in the [Ant preferences page](#).

### Java Home

You can choose between the default or custom Java installation to run the transformation. The default path is the Java installation that is used by Oxygen XML Developer.

## JVM Arguments

This parameter allows you to set specific parameters for the Java Virtual Machine used by Ant. For example, if it is set to **-Xmx384m**, the transformation process is allowed to use 384 megabytes of memory. When performing a large transformation, you may want to increase the memory allocated to the Java Virtual Machine. This will help avoid *Out of Memory* error messages (**OutOfMemoryError**).

## Libraries

By default, Oxygen XML Developer adds libraries (as high priority) that are not transformation-dependent and also patches for certain DITA Open Toolkit bugs. You can use this button to specify additional libraries ([JAR](#) files or additional class paths) to be used by the Ant transformer.

**Tip:** You can specify the path to the additional libraries using wildcards (for example, `${oxygenHome}/lib/*.jar`).

## Parameters Tab (Ant Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Parameters** tab allows you to configure the parameters that are accessible as Ant properties in the Ant build script.

The table displays all the parameters that are available in the Ant build script, along with their description and current values. You can also add, edit, and remove parameters, and use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

Depending on the type of a parameter, its value can be one of the following:

- A simple text field for simple parameter values.
- A combo box with some predefined values.
- A file chooser and an [editor variable](#) selector to simplify setting a file path as the value of a parameter.

**Note:** To input parameter values at runtime, use the [ask editor variable](#) in the **Value** column.

Below the table, the following actions are available for managing parameters:

### New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. You can specify the **Value** of the parameter by using the  [Insert Editor Variables](#) button or the  **Browse** button.

### Edit

Opens the **Edit Parameter** dialog box that allows you to change the value of the selected parameter or its description.

### Delete

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

These parameters are also available for the built-in validation processor and the [Content Completion Assistant](#).

## Related Information:

[Content Completion in Ant Build Files](#) on page 499

## Output Tab (Ant Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab contains the following options:

### Open

Allows you to specify the file to open automatically when the transformation is finished. This is usually the output file of the Ant process. You can specify the path by using the text field, the  [Insert Editor Variables](#) button, or the  **Browse** button.

- **In System Application** - The file specified in the **Open** text box is opened in the system application that is set in the operating system as the default application for that type of file (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).
- **In Editor** - The file specified in the **Open** text box is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor).

### Show console output

Allows you to specify when to display the console output log in the message panel at the bottom of the editor. The following options are available:

- **When build fails** - Displays the console output log only if the build fails.
- **Always** - Displays the console output log, regardless of whether or not the build fails.

### XSLT Transformation

This type of transformation specifies the parameters and location of an XML document that the edited XSLT stylesheet is applied on. This scenario is useful when you develop an XSLT document and the XML document is in its final form.

To create an **XSLT transformation** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XSLT transformation**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **XSLT transformation**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

### XSLT Tab

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **XSLT** tab contains the following options:

#### XML URL

Specifies the source XML file. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.

**Note:** If the transformer engine is Saxon 9.x and a custom URI resolver is configured in the [advanced Saxon preferences page](#), the XML input of the transformation is passed to that URI resolver. If the transformer engine is one of the built-in XSLT 2.0 / 3.0 engines and [the name of an initial template](#) is specified in the scenario, the **XML URL** field can be empty. The **XML URL** field can also be empty if you use [external XSLT processors](#). Otherwise, a value is mandatory in this field.

#### XSL URL

Specifies the source XSL file that the transformation will use. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down

list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

### Use "xml-stylesheet" declaration

If selected, the scenario applies the stylesheet specified explicitly in the XML document with the `xml-stylesheet` processing instruction. By default, this option is deselected and the transformation applies the XSLT stylesheet that is specified in the **XSL URL** field.

### Transformer

This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These include the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).

### Advanced options

Allows you to configure the [advanced options of the Saxon HE/PE/EE engine](#) for the current transformation scenario. To configure the same options globally, go to the [Saxon-HE/PE/EE preferences page](#). For the current transformation scenario, these **Advanced options** override the options configured in that preferences page.

### Parameters

Opens a [Configure parameters dialog box](#) that allows you to configure the XSLT parameters used in the current transformation. In this dialog box, you can also configure the parameters for [additional XSLT stylesheets](#). If the XSLT transformation engine is custom-defined, you can not use this dialog box to configure the parameters sent to the custom engine. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XSLT engine to include the necessary parameters in the command line that starts the transformation process.

### Extensions

Opens a [dialog box for configuring the XSLT extension JARS or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.

### Additional XSLT stylesheets

Opens a [dialog box for adding XSLT stylesheets](#) that are applied on the main stylesheet specified in the **XSL URL** field. This is useful when a chain of XSLT stylesheets must be applied to the input XML document.

### *XSLT Parameters*

The global parameters of the XSLT stylesheet used in a transformation scenario can be configured by using the **Parameters** button in the **XSLT** tab of a new or edited transformation scenario dialog box.

The resulting dialog box includes a table that displays all the parameters of the current XSLT stylesheet, all imported and included stylesheets, and all [additional stylesheets](#), along with their descriptions and current values. You can also add, edit, and remove parameters, and you can use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

If the **XPath** column is selected, the parameter value is evaluated as an XPath expression before starting the XSLT transformation.

### **Example:**

For example, you can use expressions such as:

```
doc('test.xml')//entry
//person[@atr='val']
```

### **Note:**

1. The **doc** function solves the argument relative to the XSL stylesheet location. You can use full paths or [editor variables](#) (such as `${cfdu}` [current file directory]) to specify other locations: `doc(' ${cfdu}/test.xml ' ) //`  
\*
2. You cannot use XSLT Functions. Only XPath functions are allowed.

Below the table, the following actions are available for managing the parameters:

## New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

## Edit

Opens the **Edit Parameter** dialog box that allows you to edit the selected parameter. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

## Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

## Delete

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

The bottom panel presents the following:

- The default value of the parameter selected in the table.
- A description of the parameter, if available.
- The system ID of the stylesheet that declares it.

## Related Information:

[Editor Variables](#) on page 151

## XSLT Extensions

The **Extensions** button opens a dialog box that allows you to specify the [JARS](#) and classes that contain extension functions called from the XSLT file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

**Tip:** You can specify the path to the resources using wildcards (for example, `${oxygenHome}/lib/*.jar`).

An extension function called from the XSLT file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the  **Move up** or  **Move down** buttons.

## Additional XSLT Stylesheets

Use the **Additional XSLT Stylesheets** button in the **XSLT** tab to display a list of additional XSLT stylesheets to be used in the transformation and you can add files to the list or edit existing entries. The following actions are available:

## Add

Adds a stylesheet in the **Additional XSLT stylesheets** list using a file browser dialog box. You can type an [editor variable](#) in the file name field of the browser dialog box. The name of the stylesheet will be added in the list after the current selection.

## Remove

Deletes the selected stylesheet from the **Additional XSLT stylesheets** list.

## Open

Opens the selected stylesheet in a separate view.

## Up

Moves the selected stylesheet up in the list.

## Down

Moves the selected stylesheet down in the list.

## Advanced Saxon HE/PE/EE XSLT Transformation Options

The XSLT transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options as [those in the Saxon HE/PE/EE preferences page](#) but they are configured as a specific set of transformation



options for each transformation scenario, while the values set in the preferences page apply as global options. The advanced options configured in a transformation scenario override the [global options](#) defined in the preferences page.

### Saxon-HE/PE/EE Options

The advanced options for Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

#### Mode ("-im")

A Saxon-specific option that sets the initial mode for the transformation.

#### Template ("-it")

A Saxon-specific option that sets the name of the initial XSLT template to be executed.

#### Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is executed for XSLT transformation and validation processes.

#### Debugger trace into XPath expressions (applies to debugging sessions)

Instructs the [XSLT Debugger](#) to *step into* XPath expressions.

#### Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

#### Line numbering ("-l")

Line numbers where errors occur are included in the output messages.

#### Expand attributes defaults ("-expand")

Specifies whether or not the attributes defined in the associated DTD or XML Schema are expanded in the output of the transformation you are executing.

#### DTD validation of the source ("-dtd")

Specifies whether or not the source document will be validated against their associated DTD. You can choose from the following:

- **On** - Requests DTD validation of the source file and of any files read using the `document ( )` function.
- **Off** - (default setting) Suppresses DTD validation.
- **Recover** - Performs DTD validation but treats the errors as non-fatal.

**Note:** Any external DTD is likely to be read even if not used for validation, since DTDs can contain definitions of entities.

#### Recoverable errors ("-warnings")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.

#### Strip whitespaces ("-strip")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.



## Saxon-PE/EE Options

The following advanced options are specific for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

### Register Saxon-JS extension functions and instructions

Registers the Saxon-CE extension functions and instructions when compiling a stylesheet using the Saxon 9.8.0.8 processors.

**Note:** Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).

### Allow calls on extension functions ("-ext")

If selected, the stylesheet is allowed to call external Java functions. This does not affect calls on integrated extension functions, including Saxon and EXSLT extension functions. This option is useful when loading an untrusted stylesheet (such as from a remote site using `http://[URL]`). It ensures that the stylesheet cannot call arbitrary Java methods and thus gain privileged access to resources on your machine.

### Enable assertions ("-ea")

In XSLT 3.0, you can use the `xsl:assert` element to make assertions in the form of XPath expressions, causing a dynamic error if the assertion turns out to be false. If this option is selected, XSLT 3.0 `xsl:assert` instructions are enabled. If it is not selected (default), the assertions are ignored.

## Saxon-EE Options

The advanced options that are specific for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

### XML Schema version

Use this option to change the default XML Schema version for this transformation. To change the default XML Schema version globally, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Parser > XML Schema** and use the [Default XML Schema version option](#).

### Validation of the source file ("-val")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

### Validation errors in the result tree treated as warnings ("-outval")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

### Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

### Enable streaming mode

Selecting this option will allow an XSLT to run in streaming mode. It is not selected by default.

## Other Options

### Initializer class

Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the `net.sf.saxon.lib.Initializer` interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-

HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from the command line, but the same code may be invoked to perform initialization when running user application code.

### FO Processor Tab (XSLT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **FO Processor** tab contains the following options:

#### Perform FO Processing

Specifies whether or not an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.

#### Input

Choose between the following options to specify which input file to use:

- **XSLT result as input** - The FO processor is applied to the result of the XSLT transformation that is defined in the **XSLT** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.

#### Method

The output format of the FO processing. The available options depend on the selected processor type.

#### Processor

Specifies the FO processor to be used for the transformation. It can be the built-in Apache FOP processor or an [external processor](#).

### Output Tab (XSLT Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab contains the following options:

#### Prompt for file

At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.

#### Save As

The path of the file where the result of the transformation is stored. You can specify the path by using the text field, the  [Insert Editor Variables](#) button, or the  **Browse** button.

#### Open in Browser/System Application

If selected, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).

**Note:** To set the web browser that is used for displaying HTML/XHTML pages, go to **Options > Preferences > Global**, and set it in the **Default Internet browser** field.

- **Output file** - When **Open in Browser/System Application** is selected, you can use this button to automatically open the default output file at the end of the transformation.
- **Other location** - When **Open in Browser/System Application** is selected, you can use this option to open the file specified in this field at the end of the transformation. You can specify the path by using the text field, the  [Insert Editor Variables](#) button, or the  **Browse** button.

#### Open in editor

When this option is selected, at the end of the transformation, the default output file is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).

#### Show in results view as

You can choose to view the results in one of the following:

- **XML** - If this is selected, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#).
- **SVG** - If this is selected, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the Results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **XHTML** - This option is only available if **Open in Browser/System Application** is not selected. If selected, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.

**Important:** When transforming very large documents, you should be aware that selecting this option may result in very long processing times. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by selecting the **Open in Browser/System Application** option instead.

- **Image URLs are relative to** - If **Show in results view as XHTML** is selected, this option specifies the path used to resolve image paths contained in the transformation result. You can specify the path by using the text field, the [Insert Editor Variables](#) button, or the  **Browse** button.

## Generating Output Using an XSLT Processor

This section explains how to configure an XSLT processor and extensions for such a processor in Oxygen XML Developer.

### Supported XSLT Processors

Oxygen XML Developer includes the following XSLT processors:

- **Xalan 2.7.2** - [Xalan-Java](#) is an XSLT processor for transforming XML documents into HTML, text, or other XML document types. It implements XSL Transformations (XSLT) Version 1.0 and XML Path Language (XPath) Version 1.0.
- **Saxon 6.5.5** - [Saxon 6.5.5](#) is an XSLT processor that implements the Version 1.0 XSLT and XPath with a number of powerful extensions. This version of Saxon also includes many of the new features that were first defined in the XSLT 1.1 working draft, but for conformance and portability reasons these are not available if the stylesheet header specifies `version="1.0"`.
- **Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE)** - [Saxon-HE/PE](#) implements the basic conformance level for XSLT 2.0 / 3.0 and XQuery 1.0. The term *basic XSLT 2.0 / 3.0 processor* is defined in the draft XSLT 2.0 / 3.0 specifications. It is a conformance level that requires support for all features of the language other than those that involve schema processing. The HE product remains open source, but removes some of the more advanced features that are present in Saxon-PE.
- **Saxon 9.8.0.8 Enterprise Edition (EE)** - [Saxon EE](#) is the schema-aware edition of Saxon and it is one of the built-in processors included in Oxygen XML Developer. Saxon EE includes an XML Schema processor, and schema-aware XSLT, XQuery, and XPath processors.

The validation in schema aware transformations is done according to the W3C XML Schema 1.0 or 1.1. This can be [configured in Preferences](#).

**Note:** Oxygen XML Developer implements a Saxon *framework* that allows you to create Saxon configuration files. Two templates are available: **Saxon collection catalog** and **Saxon configuration**. Both of these templates support content completion, element annotation, and attribute annotation.

**Note:** Saxon can use the *ICU-J localization library* (`saxon9-icu.jar`) to add support for sorting and date/number formatting in a wide variety of languages. This library is not included in the Oxygen XML Developer installation kit. However, Saxon will use the default collation and localization support available in the currently used JRE. To enable this capability, follow these steps:

1. Download Saxon 9.8.0.8 Professional Edition (PE) or Enterprise Edition (EE) from <http://www.saxonica.com>.
2. Unpack the downloaded archive.
3. Create a new XSLT transformation scenario (or edit an existing one). In the **XSLT** tab, click the **Extensions** button to open the list of additional libraries used by the transformation process.
4. Click **Add** and browse to the folder where you unpacked the downloaded archive and choose the `saxon9-icu.jar` file.

Note that the `saxon9-icu.jar` should NOT be added to the application library folder because it will conflict with another version of the ICU-J library that comes bundled with Oxygen XML Developer.

- **Saxon-CE (Client Edition)** is Saxonica's implementation of XSLT 2.0 for use on web browsers. Oxygen XML Developer provides support for editing stylesheets that contain Saxon-CE extension functions and instructions. This support improves the validation, content completion, and syntax highlighting.

**Note:** Saxon-CE, being JavaScript-based, was designed to run inside a web browser. This means that you will use Oxygen XML Developer only for developing the Saxon-CE stylesheet, leaving the execution part to a web browser. See more details about [executing such a stylesheet on Saxonica's website](#).


**Note:** A specific template, named **Saxon-CE stylesheet**, is available in the [New document wizard](#).

- **Xsltproc (libxslt)** - **Libxslt** is the XSLT C library developed for the Gnome project. **Libxslt** is based on *libxml2*, the XML C library developed for the Gnome project. It also implements most of the EXSLT set of processor-portable extensions, functions, and some of Saxon's evaluate and expression extensions.

Oxygen XML Developer uses **Libxslt** through its command line tool (*Xsltproc*). Depending on your operating system, you must download the Libxslt libraries on your machine from <http://xmlsoft.org/XSLT/downloads.html> and place them in a local folder. Then you need to update the PATH environmental variable to contain the parent folder where the `xsltproc` executable is located.

**Tip:** As an example, a Windows installation of the Xsltproc engine would follow these steps:

1. Go to <ftp://ftp.zlatkovic.com/libxml/> and download the following ZIP files: **iconv-1.9.2.win32.zip**, **libxml2-2.7.8.win32.zip**, **libxslt-1.1.26.win32.zip**, **zlib-1.2.5.win32.zip**.
2. Unzip all of them into the same folder of your choice.
3. Edit the PATH environment variable and add the bin folder for all four archives:

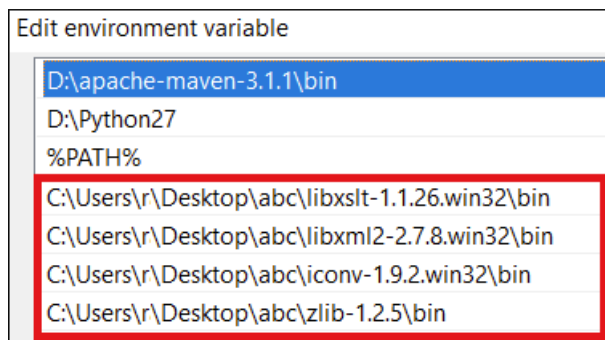

4. Restart Oxygen XML Developer.

**Result:** You can now use the **xsltproc** processor as an XSLT engine in the XSLT transformation scenario.

**Note:** The Xsltproc processor can be configured from the [XSLTPROC options page](#).



**CAUTION:** There is a known problem where file paths that contain spaces are not handled correctly in the LIBXML processor. For example, the built-in *XML Catalog* files of the predefined document types (DocBook, TEI, DITA, etc.) are not handled properly by LIBXML if Oxygen XML Developer is installed in the default location on Windows (C:\Program Files). This is because the built-in *XML catalog* files are stored in the `[OXYGEN_INSTALL_DIR]\frameworks` subdirectory of the installation directory, and in this case it contains a space character.

- **MSXML 4.0** - **MSXML 4.0** is available only on Windows platforms. It can be used for [transformation](#) and [validation of XSLT stylesheets](#).

Oxygen XML Developer uses the Microsoft XML parser through its command line tool [msxsl.exe](#).

Since `msxsl.exe` is only a wrapper, Microsoft Core XML Services (MSXML) must be installed on the computer. Otherwise, you will get a corresponding warning. You can get the latest Microsoft XML parser from [Microsoft web-site](#).

- **MSXML .NET** - **MSXML .NET** is available only on Windows platforms. It can be used for [transformation](#) and [validation of XSLT stylesheets](#).

Oxygen XML Developer performs XSLT transformations and validations using the .NET Framework XSLT implementation (*System.Xml.Xsl.XslTransform* class) through the **nxslt** command line utility. The **nxslt** version included in Oxygen XML Developer is 1.6.

You should have the .NET Framework version 1.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed. Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 1.0** - A transformer based on the **System.Xml** 1.0 library available in the .NET 1.0 and .NET 1.1 frameworks from Microsoft (<http://msdn.microsoft.com/xml/>). It is available only on Windows.

You should have the .NET Framework version 1.0 or 1.1 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 1.0 to be installed. Exit code: 128.

You can get the .NET Framework version 1.0 from the [Microsoft website](#).

- **.NET 2.0** - A transformer based on the **System.Xml** 2.0 library available in the .NET 2.0 Framework from [Microsoft](#). It is available only on Windows.

You should have the .NET Framework version 2.0 already installed on your system. Otherwise, you will get the following warning: MSXML.NET requires .NET Framework version 2.0 to be installed. Exit code: 128.

You can get the .NET Framework version 2.0 from the [Microsoft website](#).

For information about configuring the XSLT preferences, see the [XSLT options](#) section.

#### *Configuring Custom XSLT Processors*

Oxygen XML Developer allows you to configure custom processors to be used for running XSLT and XQuery transformations.

To add a new custom processor, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **XML > XSLT-FO-XQuery > Custom Engines**.
2. Click the **New** button at the bottom of the dialog box.
3. Configure the [parameters for the custom engine](#).
4. Click **OK**.

#### **Note:**

The output messages of a custom processor are displayed in an output view at the bottom of the application window. If an output message follows [the format of an Oxygen XML Developer linked message](#), clicking it highlights the location of the message in an editor panel containing the file referenced in the message.

#### **Related Information:**

[Custom Engines Preferences](#) on page 114

#### *Configuring the XSLT Processor Extensions Paths*

The Xalan and Saxon processors support the use of extension elements and extension functions. Unlike a literal result element, which the stylesheet simply transfers to the result tree, an extension element performs an action. The extension is usually used because the XSLT stylesheet fails in providing adequate functions for accomplishing a more complex task.

For more information about how to use extensions, see the following links:

- **Xalan** - <http://xml.apache.org/xalan-j/extensions.html>
- **Saxon 6.5.5** - <http://saxon.sourceforge.net/saxon6.5.5/extensions.html>
- **Saxon 9.8.0.8** - <http://www.saxonica.com/documentation9.5/index.html#!extensibility>

To set an XSLT processor extension (a directory or a jar file), use the [Extensions](#) button in the **Edit scenario** dialog box.

## XProc Transformation

This type of transformation specifies the parameters and location of an XProc script.

A sequence of transformations described by an XProc script can be executed with an XProc transformation scenario. To create an **XProc transformation** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XProc transformation**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **XProc transformation**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

### Related Information:

[Integrating an External XProc Engine](#) on page 786

[Editing XProc Scripts](#) on page 638

## XProc Tab

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **XProc** tab contains the following options:

### XProc URL

Specify the source XSL file to be used by the transformation. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

### Processor

Allows you to select the XProc engine to be used for the transformation. You can select the built-in *Calabash* engine or a custom engine that is [configured in the Preferences dialog box](#).

### Inputs Tab (XProc Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Inputs** tab contains a list with the ports that the XProc script uses to read input data. Use the **Filter** text box to search for a specific term in the entire ports collection.

Each input port has an assigned name in the XProc script. The XProc engine reads data from the URL specified in the **URL** column.

The following actions are available for managing the input ports:

### New

Opens an **Edit** dialog box that allows you to add a new port and its URL. The [built-in editor variables](#) and [custom editor variables](#) can be used to specify the URL.



## Edit

Opens an **Edit** dialog box that allows you to modify the selected port and its URL. The [built-in editor variables](#) and [custom editor variables](#) can be used to specify the URL.

## Delete

Removes the selected port from the list. It is available only for new ports that have been added to the list.

## Parameters Tab (XProc Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Parameters** tab presents a list of ports and parameters collected from the XProc script. The tab is divided into three sections:

### List of Ports

In this section, you can use the **New** and **Delete** buttons to add or remove ports.

### List of Parameters

This section presents a list of parameters for each port and includes columns for the parameter name, namespace URI, and its value. Use the **Filter** text box to search for a specific term in the entire parameters collection. You can use the **New** and **Delete** buttons to add or remove parameters. You can edit the value of each cell in this table by double-clicking the cell. You can also sort the parameters by clicking the column headers.

### Editor Variable Information

The [built-in editor variables](#) and [custom editor variables](#) can be used for specifying the URI. The message pane at the bottom of the dialog box provides more information about the editor variables that can be used.

## Outputs Tab (XProc Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Outputs** tab displays a list of output ports (along with the URL) collected from the XProc script. Use the **Filter** text box to search for a specific term in the entire ports collection. You can also sort the columns by clicking the column headers.

The following actions are available for managing the output ports:

### New

Opens an **Edit** dialog box that allows you to add a new output port and its URL. An [editor variable](#) can be inserted for the URL by using the  **Insert Editor Variables** button. There is also a **Show in transformation results view** option that allows you to select whether or not the results will be displayed in the output [Results view](#).

### Edit

Opens an **Edit** dialog box that allows you to edit an existing output port and its URL. An [editor variable](#) can be inserted for the URL by using the  **Insert Editor Variables** button. There is also a **Show in transformation results view** option that allows you to select whether or not the results will be displayed in the output [Results view](#).

### Delete

Removes the selected output port from the list. It is available only for new ports that have been added to the list.

Additional options that are available at the bottom of this tab include:

### Open in Editor

If this option is selected, the XProc transformation result is automatically opened in an editor panel.

### Open in Browser/System Application

If this option is selected, you can specify a file to be opened at the end of the XProc transformation in the browser or system application that is associated with the file type. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list.

## Results

The result of the XProc transformation can be displayed as a sequence in an output view with two sections:

- A list with the output ports on the left side.
- The content that correspond to the selected output port on the right side.

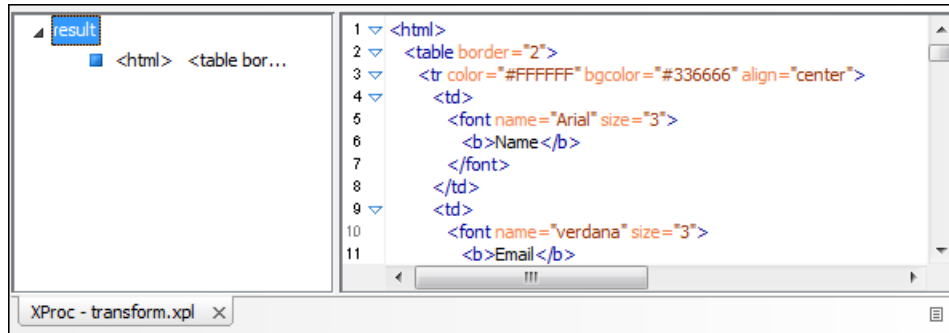


Figure 414: XProc Transformation Results View

## Options Tab (XProc Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Options** tab displays a list of the options collected from the XProc script. The tab is divided into two sections:

### List of Options

This section presents a list of options and includes columns for the option name, namespace URI, and its value. Use the **Filter** text box to search for a specific term in the entire options collection. You can use the **New** and **Delete** buttons to add or remove options. You can edit the value of each cell in this table by double-clicking the cell. You can also sort the parameters by clicking the column headers. The names of edited options are displayed in bold.

### Editor Variable Information

The [built-in editor variables](#) and [custom editor variables](#) can be used for specifying the URI. This section provides more information about the editor variables that can be used.

## Integrating an External XProc Engine

If you edit an XProc transformation scenario, there is a **Processor** drop-down menu where you can select the XProc engine to be used for the transformation. You can select the built-in *Calabash* engine or a custom engine based on another XProc implementation. For example, there is a public project on GitHub that is an implementation for integrating Morgana XProc with Oxygen XML Developer: <https://github.com/xml-project/support-for-xmleditor>. Also, the Javadoc documentation of the XProc API is available for download from the application website as a zip file: [xprocAPI.zip](#).

To create an XProc integration project, follow these steps:

1. Move the `oxygen.jar` file from `[OXYGEN_INSTALL_DIR]/lib` to the `lib` folder of your project.
2. Implement the `ro.sync.xml.transformer.xproc.api.XProcTransformerInterface` interface.
3. Create a [Java archive \(JAR\)](#) from the classes you created.
4. Create an `engine.xml` file according to the `engine.dtd` file. The attributes of the engine element are as follows:
  - a. **name** - The name of the XProc engine.
  - b. **description** - A short description of the XProc engine.
  - c. **class** - The complete name of the class that implements `ro.sync.xml.transformer.xproc.api.XProcTransformerInterface`.
  - d. **version** - The version of the integration.
  - e. **engineVersion** - The version of the integrated engine.
  - f. **vendor** - The name of the vendor / implementer.



**g. supportsValidation** - **true** if the engine supports validation (otherwise, **false**).

The engine element has only one child, runtime. The runtime element contains several library elements with the name attribute containing the relative or absolute location of the libraries necessary to run this integration.

5. Create a new folder (for example, named MyXprocEngine) and place the engine.xml and all the libraries necessary to run the new integration in that folder.
6. Place that new folder (i.e. MyXprocEngine) inside a new plugin folder. This new plugin folder should also contain a plugin.xml file that points to the new engine folder (i.e. MyXprocEngine).

The plugin.xml file would look like this (it is based on the [AdditionalXProcEngine extension](#)):

```
<plugin
 id="morgana.xproc.addon"
 name="Contribute Morgana XProc"
 description="Contribute Morgana XProc"
 version="1.0"
 vendor="SyncroSoft"
 class="ro.sync.exml.plugin.Plugin"
 classLoaderType="preferReferencedResources">
 <extension type="AdditionalXProcEngine" path="MyXprocEngine/"></extension>
</plugin>
```

#### Related Information:

[Editing XProc Scripts](#) on page 638

[Creating an XProc Transformation Scenario](#) on page 784

This type of transformation specifies the parameters and location of an XProc script.

#### XQuery Transformation

This type of transformation specifies the parameters and location of an XML source that the edited XQuery file is applied on.

**Note:** When the XML source is a native XML database, the source field of the scenario is empty because the XML data is read with XQuery-specific functions, such as document(). When the XML source is a local XML file, the URL of the file is specified in the input field of the scenario.

To create an **XQuery transformation** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **XQuery transformation**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **XQuery transformation**.

Both methods open the **New Scenario** dialog box.

The upper part of the dialog box allows you to specify the **Name** of the transformation scenario and the following **Storage** options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

The lower part of the dialog box contains several tabs that allow you to configure the options that control the transformation.

#### XQuery Tab

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **XQuery** tab contains the following options:

## XML URL

Specifies the source XML file. You can specify the path by using the text field, its history drop-down, the  [Insert Editor Variables](#) button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, then the file is used directly from its remote location.

**Note:** If the transformer engine is Saxon 9.x and a custom URI resolver is configured in the [advanced Saxon preferences page](#), the XML input of the transformation is passed to that URI resolver.

## XQuery URL

Specifies the source XQuery file to be used for the transformation. You can specify the path by using the text field, its history drop-down, the  [Insert Editor Variables](#) button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel. This URL is resolved through the catalog resolver. If the catalog does not have a mapping for the URL, the file is used directly from its remote location.

## Transformer

This drop-down menu presents all the transformation engines available to Oxygen XML Developer for performing a transformation. These include the built-in engines and [the external engines defined in the Custom Engines preferences page](#). The engine you choose is used as the default transformation engine. Also, if an XSLT or XQuery document does not have an associated validation scenario, this transformation engine is used in the validation process (if it provides validation support).

## Advanced options

Allows you to configure the [advanced options of the Saxon HE/PE/EE engine](#) for the current transformation scenario. To configure the same options globally, go to the [Saxon-HE/PE/EE preferences page](#). For the current transformation scenario, these **Advanced options** override the options configured in that preferences page.

## Parameters

Opens the [Configure parameters dialog box](#) for configuring the XQuery parameters. You can use the buttons in this dialog box to add, edit, or remove parameters. If the XQuery transformation engine is custom-defined, you can not use this dialog box to set parameters. Instead, you can copy all parameters from the dialog box using contextual menu actions and edit the custom XQuery engine to include the necessary parameters in the command line that starts the transformation process.

## Extensions

Opens a [dialog box for configuring the XQuery extension JARS or classes](#) that define extension Java functions or extension XSLT elements used in the transformation.

### *XQuery Parameters*

The global parameters of the XQuery file used in a transformation scenario can be configured by using the **Parameters** button in the **XQuery** tab.

The resulting dialog box includes a table that displays all the parameters of the current XQuery file, along with their descriptions and current values. You can also add, edit, and remove parameters, and use the **Filter** text box to search for a specific term in the entire parameters collection. Note that edited parameters are displayed with their name in bold.

If the **XPath** column is selected, the parameter value is evaluated as an XPath expression before starting the XQuery transformation.

### Example:

For example, you can use expressions such as:

```
doc('test.xml')//entry
//person[@atr='val']
```

### **Note:**

1. The **doc** function solves the argument relative to the XQuery file location. You can use full paths or [editor variables](#) (such as `${cfdu}` [current file directory]) to specify other locations: `doc(' ${cfdu}/test.xml' ) //`  
\*
2. Only XPath functions are allowed.

Below the table, the following actions are available for managing the parameters:

#### New

Opens the **Add Parameter** dialog box that allows you to add a new parameter to the list. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

#### Edit

Opens the **Edit Parameter** dialog box that allows you to edit the selected parameter. An [editor variable](#) can be inserted in the text box using the  **Insert Editor Variables** button. If the **Evaluate as XPath** option is selected, the parameter will be evaluated as an XPath expression.

#### Unset

Resets the selected parameter to its default value. Available only for edited parameters with set values.

#### Delete

Removes the selected parameter from the list. It is available only for new parameters that have been added to the list.

The bottom panel presents the following:

- The default value of the parameter selected in the table.
- A description of the parameter, if available.
- The system ID of the stylesheet that declares it.

#### Related Information:

[Editor Variables](#) on page 151

#### XQuery Extensions

The **Extensions** button is used to specify the [JAR](#) and classes that contain extension functions called from the XQuery file of the current transformation scenario. You can use the **Add**, **Edit**, and **Remove** buttons to configure the extensions.

An extension function called from the XQuery file of the current transformation scenario will be searched, in the specified extensions, in the order displayed in this dialog box. To change the order of the items, select the item to be moved and press the  **Move up** or  **Move down** buttons.

#### Advanced Saxon HE/PE/EE XQuery Transformation Options

The XQuery transformation scenario allows you to configure advanced options that are specific for the Saxon HE (Home Edition), PE (Professional Edition), and EE (Enterprise Edition) engines. They are the same options as [those in the Saxon HE/PE/EE preferences page](#) but they are configured as a specific set of transformation options for each transformation scenario, while the values set in the preferences page apply as global options. The advanced options configured in a transformation scenario override the [global options](#) defined in the preferences page.

#### Saxon-HE/PE/EE Options

The advanced options for Saxon 9.8.0.8 Home Edition (HE), Professional Edition (PE), and Enterprise Edition (EE) are as follows:

##### Use a configuration file ("-config")

Sets a Saxon 9.8.0.8 configuration file that is used for XQuery transformation and validation scenarios.

##### Enable Optimizations ("-opt")

This option is selected by default, which means that optimization is enabled. If not selected, the optimization is suppressed, which is helpful when reducing the compiling time is important, optimization conflicts with debugging, or optimization causes extension functions with side-effects to behave unpredictably.

### Use linked tree model ("**-tree:linked**")

This option activates the linked tree model.

### Recoverable errors ("**-warnings**")

Allows you to choose how dynamic errors are handled. The following options can be selected:

- **Recover silently ("silent")** - Continues processing without reporting the error.
- **Recover with warnings ("recover")** - Issues a warning but continues processing.
- **Signal the error and do not attempt recovery ("fatal")** - Issues an error and stops processing.

### Strip whitespaces ("**-strip**")

Allows you to choose how the *strip whitespaces* operation is handled. You can choose one of the following values:

- **All ("all")** - Strips *all* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document.
- **Ignore ("ignorable")** - Strips all *ignorable* whitespace text nodes from source documents before any further processing, regardless of any `xml:space` attributes in the source document. Whitespace text nodes are ignorable if they appear in elements defined in the DTD or schema as having element-only content.
- **None ("none")** - Strips *no* whitespace before further processing.

### Saxon-PE/EE Options

The following advanced options are specific for Saxon 9.8.0.8 Professional Edition (PE) and Enterprise Edition (EE) only:

#### Allow calls on extension functions ("**-ext**")

If selected, calls on external functions are allowed. Selecting this option is recommended in an environment where untrusted stylesheets may be executed. It also disables user-defined extension elements and the writing of multiple output files, both of which carry similar security risks.

### Saxon-EE Options

The advanced options that are specific for Saxon 9.8.0.8 Enterprise Edition (EE) are as follows:

#### Validation of the source file ("**-val**")

Requests schema-based validation of the source file and of any files read using `document()` or similar functions. It can have the following values:

- **Schema validation ("strict")** - This mode requires an XML Schema and allows for parsing the source documents with strict schema-validation enabled.
- **Lax schema validation ("lax")** - If an XML Schema is provided, this mode allows for parsing the source documents with schema-validation enabled but the validation will not fail if, for example, element declarations are not found.
- **Disable schema validation** - This specifies that the source documents should be parsed with schema-validation disabled.

#### Validation errors in the result tree treated as warnings ("**-outval**")

Normally, if validation of result documents is requested, a validation error is fatal. Selecting this option causes such validation failures to be treated as warnings.

#### Write comments for non-fatal validation errors of the result document

The validation messages for non-fatal errors are written (wherever possible) as a comment in the result document itself.

#### Enable XQuery update ("**-update:(on|off)**")

This option controls whether or not XQuery update syntax is accepted. The default value is off.

#### Backup files updated by XQuery ("**-backup:(on|off)**")

If selected, backup versions for any XML files updated with an XQuery Update are generated. This option is available when the **Enable XQuery update** option is selected.

## Other Options

### Initializer class

Equivalent to the `-init` Saxon command-line argument. The value is the name of a user-supplied class that implements the *net.sf.saxon.lib.Initializer* interface. This initializer is called during the initialization process, and may be used to set any options required on the configuration programmatically. It is particularly useful for tasks such as registering extension functions, collations, or external object models, especially in Saxon-HE where the option cannot be set via a configuration file. Saxon only calls the initializer when running from the command line, but the same code may be invoked to perform initialization when running user application code.

### FO Processor Tab (XQuery Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **FO Processor** tab contains the following options:

#### Perform FO Processing

Specifies whether or not an FO processor is applied (either the built-in Apache FOP engine or an external engine defined in **Preferences**) during the transformation.

#### Input

Choose between the following options to specify which input file to use:

- **XQuery result as input** - The FO processor is applied to the result of the XQuery transformation that is defined in the **XQuery** tab.
- **XML URL as input** - The FO processor is applied to the input XML file.

#### Method

The output format of the FO processing. The available options depend on the selected processor type.

#### Processor

Specifies the FO processor to be used for the transformation. It can be the built-in Apache FOP processor or an [external processor](#).

### Output Tab (XQuery Transformations)

When you [create a new transformation scenario](#) or [edit an existing one](#), a configuration dialog box allows you to customize the transformation with various options in several tabs.

The **Output** tab contains the following options:

#### Present as a sequence

Selecting this option will reduce the time necessary to fetch the full results, as it will only fetch the first chunk of the results.

#### Prompt for file

At the end of the transformation, a file browser dialog box is displayed for specifying the path and name of the file that stores the transformation result.

#### Save As

The path of the file where the result of the transformation is stored. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

#### Open in Browser/System Application

If selected, Oxygen XML Developer automatically opens the result of the transformation in a system application associated with the file type of the result (for example, in Windows *PDF* files are often opened in *Acrobat Reader*).

**Note:** To set the web browser that is used for displaying HTML/XHTML pages, go to **Options > Preferences > Global**, and set it in the **Default Internet browser** field.

- **Output file** - When **Open in Browser/System Application** is selected, you can use this button to automatically open the default output file at the end of the transformation.

- **Other location** - When **Open in Browser/System Application** is selected, you can use this option to open the file specified in this field at the end of the transformation. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

### Open in editor

When this option is selected, at the end of the transformation, the default output file is opened in a new editor panel with the appropriate built-in editor type (for example, if the result is an XML file it is opened in the built-in XML editor, or if it is an XSL-FO file it is opened with the built-in FO editor).

### Show in results view as

You can choose to view the results in one of the following:

- **XML** - If this is selected, Oxygen XML Developer displays the transformation result in an XML viewer panel at the bottom of the application window with [syntax highlighting](#).
- **SVG** - If this is selected, Oxygen XML Developer displays the transformation result in an [integrated SVG viewer in the Results panel](#) at the bottom of the application window and renders the result as an SVG image.
- **XHTML** - This option is only available if **Open in Browser/System Application** is not selected. If selected, Oxygen XML Developer displays the transformation result in a built-in XHTML browser panel at the bottom of the application window.

**Important:** When transforming very large documents, you should be aware that selecting this option may result in very long processing times. This drawback is due to the built-in Java XHTML browser implementation. To avoid delays for large documents, if you want to see the XHTML result of the transformation, you should use an external browser by selecting the **Open in Browser/System Application** option instead.

- **Image URLs are relative to** - If **Show in results view as XHTML** is selected, this option specifies the path used to resolve image paths contained in the transformation result. You can specify the path by using the text field, the  **Insert Editor Variables** button, or the  **Browse** button.

## SQL Transformation

This type of transformation specifies a database connection for the database server that runs the SQL file associated with the scenario. The data processed by the SQL script is located in the database.

To create an **SQL transformation** scenario, use one of the following methods:

- Use the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu. Then click the **New** button and select **SQL transformation**.
- Go to **Window > Show View** and select  **Transformation Scenarios** to display [this view](#). Click the  **New Scenario** drop-down menu button and select **SQL transformation**.

Both methods open the **New Scenario** dialog box. This dialog box allows you to configure the following options that control the transformation:

### Name

The unique name of the SQL transformation scenario.

### Storage

Allows you to select one of the following storage options:

- **Project Options** - The scenario is stored in the project file and can be shared with other users. For example, if your project is saved on a source versioning/sharing system (CVS, SVN, Source Safe, etc.) or a shared folder, your team can use the scenarios that you store in the project file.
- **Global Options** - The scenario is saved in the global options that are stored in the user home directory and is not accessible to other users.

## SQL URL

Allows you to specify the URL of the SQL script. You can specify the path by using the text field, its history drop-down, the  **Insert Editor Variables** button, or the browsing tools in the  **Browse** drop-down list. You can also use the  **Open in editor** button to open the specified file in the editor panel.

## Connection

Allows you to select a connection from a drop-down list. To configure a connection, use the  **Advanced options** button to open the [Data Source preferences page](#).

## Parameters

Allows you to add or configure parameters for the transformation.

## Editing a Transformation Scenario

Editing a transformation scenario is useful if you need to configure some of its parameters.

**Note:** Since transformation scenarios that are associated with predefined [frameworks](#) are read-only, to edit one of these scenarios you will need to [duplicate it and edit the duplicated scenario](#).

To configure an existing transformation scenario, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** (**Ctrl + Shift + C (Command + Shift + C on OS X)**) action from the toolbar or the **Document > Transformation** menu.  
**Step Result:** The **Configure Transformation Scenario(s)** dialog box is opened.
2. Select the particular transformation scenario and click the **Edit** button at the bottom of the dialog box or from the contextual menu.

**Tip:** You could also select the scenario and the  **Edit** button in the **Transformation Scenarios** view to achieve the same result.

**Result:** This will open an **Edit scenario** configuration dialog box that allows you to configure various options in several tabs, depending on the type of transformation scenario that was selected.

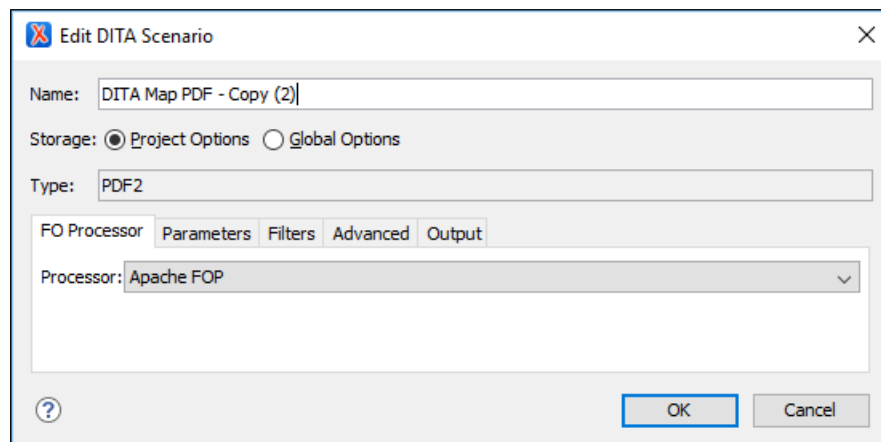


Figure 415: Edit Scenarios Configuration Dialog Box

## Transformation Types

The **Configure Transformation Scenario(s)** dialog box contains a **Type** column that shows you the transformation type for each of the listed scenarios. Each type of transformation contains includes some tabs with various configuration options.

The following is a list of the transformation types and their particular tabs (click the name of each tab below to see details about all the options that are available):

- **DITA OT** - This type of transformation includes configurable options in the following tabs:
  - **Skins Tab** (Available for **WebHelp Classic** and **WebHelp Classic with Feedback**)



- [Templates Tab](#) (Available for **WebHelp Responsive** and **WebHelp Responsive with Feedback**)
- [FO Processor Tab](#) (Available for PDF output)
- [Parameters Tab](#)
- [Filters Tab](#)
- [Advanced Tab](#)
- [Output Tab](#)
- **ANT** - This type of transformation includes configurable options in the following tabs:
  - [Options Tab](#)
  - [Parameters Tab](#)
  - [Output Tab](#)
- **XSLT** - This type of transformation includes configurable options in the following tabs:
  - [XSLT Tab](#)
  - [FO Processor Tab](#)
  - [Output Tab](#)
- **XProc** - This type of transformation includes configurable options in the following tabs:
  - [XProc Tab](#)
  - [Inputs Tab](#)
  - [Parameters Tab](#)
  - [Outputs Tab](#)
  - [Options Tab](#)
- **XQuery** - This type of transformation includes configurable options in the following tabs:
  - [XQuery Tab](#)
  - [FO Processor Tab](#)
  - [Output Tab](#)

**Related Information:**

[Creating New Transformation Scenarios](#) on page 749

[Duplicating a Transformation Scenario](#) on page 794

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Applying Associated Transformation Scenarios](#) on page 795

## Duplicating a Transformation Scenario

Duplicating a transformation scenario is useful for creating a scenario that is similar to an existing one or to edit a predefined transformation scenario.

To configure an existing transformation scenario, follow these steps:

1. Select the  **Configure Transformation Scenario(s) (Ctrl + Shift + C (Command + Shift + C on OS X))** action from the toolbar or the **Document > Transformation** menu.

**Step Result:** The [Configure Transformation Scenario\(s\) dialog box](#) is opened.

2. Select the particular transformation scenario and click the **Duplicate** button at the bottom of the dialog box or from the contextual menu.

**Tip:** You could also select the scenario and the  **Duplicate** button in the [Transformation Scenarios view](#) to achieve the same result.

**Result:** This will open an **Edit scenario** configuration dialog box that allows you to configure various options in several tabs, depending on the type of transformation scenario that was selected. For information about all the specific options in the various tabs, see the [Transformation Types section](#).

**Related Information:**

[Creating New Transformation Scenarios](#) on page 749

[Editing a Transformation Scenario](#) on page 793



## Applying Associated Transformation Scenarios

If you have associated transformation scenarios for the current document (in the [Configure Transformation Scenario\(s\) dialog box](#) or [Transformation Scenarios view](#)), Oxygen XML Developer included an  **Apply Transformation Scenario(s)** action that allows you to quickly apply the associated transformation scenarios on the current document. Note that if an association is not detected, this action will open the [Configure Transformation Scenario\(s\) dialog box](#) where you can choose the scenarios you want to apply.

The  **Apply Transformation Scenario(s)** action can be initiated from any of the following methods:

- Use the **Ctrl + Shift + T (Command + Shift + T on OS X)** keyboard shortcut.
- Click the  **Apply Transformation Scenario(s)** button on the main toolbar.
- Click the  **Apply Transformation Scenario(s)** button on the toolbar in the [Transformation Scenarios view](#).
- Right-click a file in the [Project view](#) and select **Transform >  Apply Transformation Scenario(s)**.
- Use the **Apply Associated** button in the [Configure Transformation Scenario\(s\) dialog box](#).

### Related Information:

[Creating New Transformation Scenarios](#) on page 749

[Editing a Transformation Scenario](#) on page 793

[Configure Transformation Scenario\(s\) Dialog Box](#) on page 795

[Transformation Scenarios View](#) on page 799

## Configure Transformation Scenario(s) Dialog Box

You can use the **Configure Transformation Scenarios(s)** dialog box for [editing existing transformation scenarios](#) or [creating new ones](#).

To open this dialog box, use the  **Configure Transformation Scenario(s)** (**Ctrl + Shift + C (Command + Shift + C on OS X)**) action from the toolbar or the **Document > Transformation** menu.

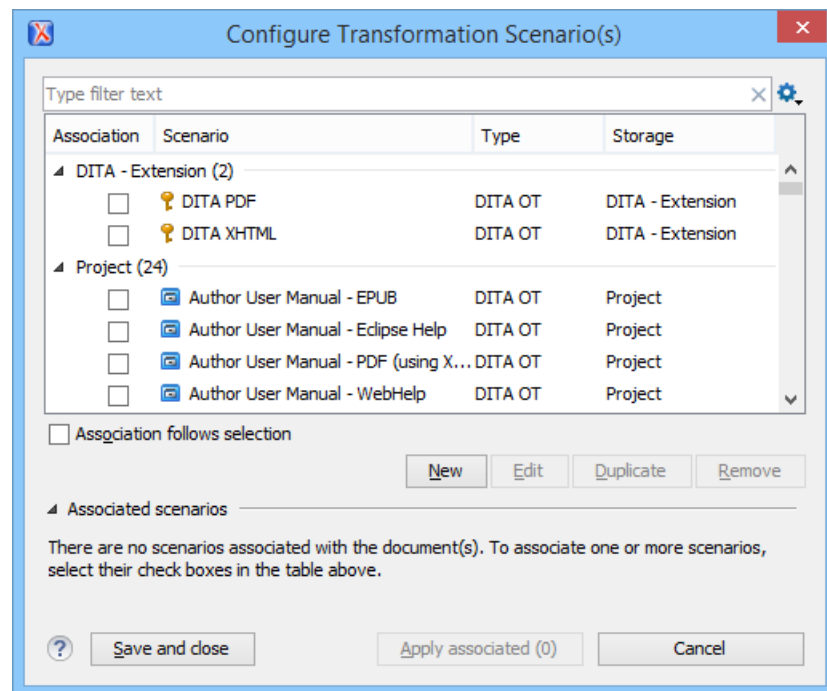


Figure 416: Configure Transformation Scenario(s) Dialog Box

## Top Section

The top section of the dialog box contains a filter that allows you to search through the scenarios list and the  **Settings** button allows you to configure the following options:

### Show all scenarios

Select this option to display all the available scenarios, regardless of the document they are associated with.

### Show only the scenarios available for the editor

Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.

### Show associated scenarios

Select this option to only display the scenarios associated with the document you are editing.

## Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the scenarios file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.
- Keep both scenarios.

**Note:** When you keep both scenarios, Oxygen XML Developer adds `imported` to the name of the imported scenario.

## Export selected scenarios

Use this option to export selected scenarios individually. Oxygen XML Developer creates a scenarios file that contains the scenarios that you export. This is useful if you want to share scenarios with others or export them to another computer.

## Middle Section

The middle section of the dialog box displays the scenarios that you can apply to the current document. You can view both the scenarios associated with the current document type and the scenarios defined at [project level](#). The following columns are used to display the transformation scenarios:

- **Association** - The checkboxes in this column mark whether or not a transformation scenario is associated with the current document.
- **Scenario** - This column presents the names of the transformation scenarios.
- **Type** - If the **Show Type** contextual menu option is selected, this column displays the type of the transformation scenario. For further details about the types of transformation scenarios that are available in Oxygen XML Developer, see the [Transformation Types section](#).
- **Storage** - If the **Show Storage** contextual menu option is selected, this column displays where a transformation scenario is stored.

To sort each column you can left-click its header. The contextual menu of each header also includes the following actions:

### Show Type

Use this option to display the transformation type of each scenario.

### Show Storage

Use this option to display the storage location of the scenarios.

### Group by Association

Select this option to group the scenarios depending on whether or not they are associated with the current document.

### Group by Type

Select this option to group the scenarios by their type.

## Group by Storage

Select this option to group the scenarios by their storage location.

## Ungroup all

Select this option to ungroup all the scenarios.

## Reset Layout

Select this option to restore the default settings of the layout.

Each transformation scenarios listed in the middle section of the dialog box also includes the following contextual menu actions:

### Edit

This button opens the [Edit Scenario configuration dialog box](#) that allows you to configure the options of the transformations scenario.

### Duplicate

Use this button to create a [duplicate transformation scenario](#).

### Remove

Use this button to remove custom transformation scenarios.

## Change storage

Allows you to change the storage location of a transformation scenario to [Project Options](#) or [Global Options](#). You are also able to keep the original storage location and make a copy of the selected scenario in the new storage location.

### Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the `scenarios` file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.
- Keep both scenarios.

**Note:** When you keep both scenarios, Oxygen XML Developer adds `imported` to the name of the imported scenario.

### Export selected scenarios

Use this option to export selected scenarios individually. Oxygen XML Developer creates a `scenarios` file that contains the scenarios that you export. This is useful if you want to share scenarios with others or export them to another computer.

## Bottom Section

The bottom section of the dialog box contains the following actions and information:

### Association follows selection

Select this checkbox to automatically associate selected transformation scenarios with the current document. This option can also be used for multiple selections.

**Note:** When this option is selected, the **Association** column is hidden.

## New

This button allows you to [create a new transformation scenario](#).

## Edit

This button opens the **Edit Scenario** dialog box that allows you to configure the options of the transformations scenario. For information about all the specific options in the various tabs, see the [Transformation Types section](#).

**Note:** If you try to edit a transformation scenario associated with a defined document type, Oxygen XML Developer displays a warning message to inform you that this is not possible and gives you the option to create a [duplicate transformation scenario](#) to edit instead.

### Duplicate

Use this button to create a [duplicate transformation scenario](#).

### Remove

Use this button to remove transformation scenarios.

**Note:** Removing scenarios associated with a defined document type is not allowed.

### Associated scenarios section

Displays the scenarios that are associated with the current document. Selecting a checkbox in the [Association column](#) in the list of scenarios will add that scenario to this section. To remove a scenario from being associated with the current document, simply click the remove icon (✕) to the right of the scenario name.

### Save and close

Saves the current configuration and closes the dialog box.

### Apply associated

Use this button to apply the associated scenarios and run the transformation on the current document.

### Cancel

Cancels any changes made in the dialog box and reverts to the previously saved association.

Your selections in the **Configure Transformation Scenarios(s)** dialog box are persistent so the configured associations for the current document will be remembered after the dialog box is closed.

### Related Information:

[Editing a Transformation Scenario](#) on page 793

[Duplicating a Transformation Scenario](#) on page 794

[Applying Associated Transformation Scenarios](#) on page 795

[Creating New Transformation Scenarios](#) on page 749

[Sharing Transformation Scenarios](#) on page 799

## Batch Transformations

A transformation action can be applied on a batch of selected files [from the contextual menu of the Project view](#) without having to open the files involved in the transformation. You can apply the same scenario to a batch of files or multiple scenarios to a single file or batch of files.

1. (Optional, but recommended) Organize the files you want to transform in logical folders.
  - a) Create a logical folder in the [Project view](#) by using the **New > Logical Folder** action from the contextual menu of the root file.
  - b) Add files you want to transform to the logical folder by using the  **Add Files** or  **Add Edited File** actions from the contextual menu of the logical folder.

**Note:** You can skip this step if the files are already in a dedicated folder that does not include any additional files or folders. You can also manually select the individual files in the [Project view](#) each time you want to transform them, but this can be tedious.
2. Select the files you want to transform (or the newly created logical folder) and from the contextual menu, select **Transform >  Configure Transformation Scenario(s)** to choose one or more transformation scenarios to be applied on all the files in the logical folder.
3. Use Oxygen XML Developer [editor variables](#) to specify the input and output files. This ensures that each file from the selected set of resources is processed and that the output is not overwritten by the subsequent processing.
  - a) Edit the transformation scenario to make sure the appropriate [editor variable](#) is assigned for the input file. For example, for a *DocBook PDF transformation* make sure the **XML URL** input box is set to the

[\\${currentFileURL}](#) editor variable. For a DITA PDF transformation make sure the `args.input` parameter is set to the [\\${cf}](#) editor variable.


- b) Edit the transformation scenario to make sure the appropriate editor variable is assigned for the output file. For example, for an **XML transformation with XSLT**, switch to the **Output** tab and set the path of the output file using a construct of [editor variables](#), such as `${cfd}/${cfn}.html`.
4. Now that logical folder has been associated with one or more transformation scenarios, whenever you want to apply the same batch transformation you can select **Transform** >  **Transform with** from the contextual menu and the same previously associated scenario(s) will be applied.
5. If you want a different type of transformation to be applied to each file inside the logical folder, associate individual scenarios for each file and select **Transform** >  **Apply Transformation Scenario(s)** from the contextual menu of the logical folder.

**Related Information:**

[Editor Variables](#) on page 151

## Sharing Transformation Scenarios

The transformation scenarios and their settings can be shared with other users by saving them at [project level](#) or by [exporting them to a specialized scenarios file](#) that can then be imported. When you create a new transformation scenario or edit an existing one, there is a **Storage** option to control whether the scenarios are stored in **Project Options** or **Global Options**.



Selecting **Project Options** stores the scenario in the project file and can be shared with other users that have access to the project. If your project is saved on a source versioning system (CVS, SVN, Source Safe, etc.) then your team will have access to the scenarios that you define. When you create a scenario at the project level, the URLs from the scenario become relative to the project URL.

Selecting **Global Options** stores the scenario in the global options that are stored in the user home directory.

You can also change the storage options on existing transformation scenarios by using the [Change storage action](#) from the contextual menu of the list of scenarios.

**Related Information:**

[Sharing Application Settings](#) on page 144

## Transformation Scenarios View

You can manage the transformation scenarios by using the **Transformation Scenarios** view. To open this view, select **Window** > **Show View** > **Transformation Scenarios**.

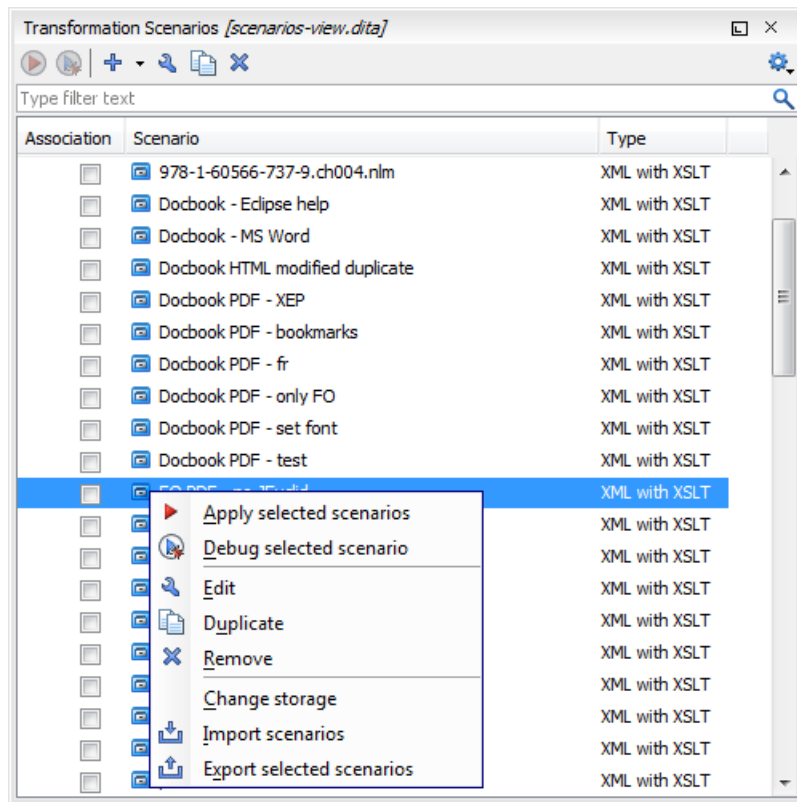


**Figure 417: Transformation Scenarios view**

Oxygen XML Developer supports multiple scenarios association. To associate multiple scenarios with a document, select the checkboxes in front of each scenario. You can also associate multiple scenarios with a document from the [Configure Transformation Scenario\(s\) dialog box](#).

The **Transformation Scenarios** view presents both global and [project-level](#) scenarios. By default, Oxygen XML Developer presents the items in the following order:

1. Scenarios that match the current [framework](#).
2. Scenarios that match the current project.
3. Scenarios that match other *frameworks*.

### Toolbar/Contextual Menu Actions and Options

The following actions and options are available on the toolbar or in the contextual menu:

#### **Apply selected scenarios**

Select this option to run the current transformation scenario.

#### **Debug selected scenario**

Select this option to switch to the **Debugger perspective** and initialize it with the parameters from the scenario (the XML, XSLT, or XQuery input, the transformation engine, the XSLT parameters).

#### **+ New**

This drop-down menu contains a list of the [scenarios that you can create](#). Oxygen XML Developer determines the most appropriate scenarios for the current type of file and displays them at the beginning of the list, followed by the rest of the scenarios.

#### **Duplicate**

Adds a new scenario to the list that is a duplicate of the current scenario. It is useful for creating a scenario that is similar to an existing one.



### Edit

Opens the dialog box that allows you to configure various options in several tabs, depending on the type of transformation scenario that was selected. For information about all the specific options in the various tabs, see the [Transformation Types section](#).

### ✕ Remove

Removes the current scenario from the list. This action is also available by using the **Delete** key.

### Change storage

Use this option to change the storage location of the selected scenario. You are also able to keep the original storage location and make a copy of the selected scenario in the target storage location.



### Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the `scenarios` file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.
- Keep both scenarios.

**Note:** When you keep both scenarios, Oxygen XML Developer adds `imported` to the name of the imported scenario.



### Export selected scenarios

Use this option to export transformation and validation scenarios individually. Oxygen XML Developer creates a `scenarios` file that contains the scenarios that you export.



### Settings

This drop-down menu allows you to configure the following options (many of these options are also available if you right-click the name of a column):

#### Show all scenarios

Select this option to display all the available scenarios, regardless of the document they are associated with.

#### Show only the scenarios available for the editor

Select this option to only display the scenarios that Oxygen XML Developer can apply for the current document type.

#### Show associated scenarios

Select this option to only display the scenarios associated with the document you are editing.

### Change storage

Use this option to change the storage location of the selected scenario to [Project Options](#) or [Global Options](#). You are also able to keep the original storage location and make a copy of the selected scenario in the new storage location.



### Import scenarios

This option opens the **Import scenarios** dialog box that allows you to select the `scenarios` file that contains the scenarios you want to import. If one of the scenarios you import is identical to an existing scenario, Oxygen XML Developer ignores it. If a conflict appears (an imported scenario has the same name as an existing one), you can choose between two options:

- Keep or replace the existing scenario.
- Keep both scenarios.

**Note:** When you keep both scenarios, Oxygen XML Developer adds `imported` to the name of the imported scenario.

### **Export selected scenarios**

Use this option to export selected scenarios individually. Oxygen XML Developer creates a scenarios file that contains the scenarios that you export. This is useful if you want to share scenarios with others or export them to another computer.

### **Show Type**

Use this option to display the transformation type of each scenario.

### **Show Storage**

Use this option to display the storage location of the scenarios.

### **Group by Association**

Select this option to group the scenarios depending on whether or not they are associated with the current document.

### **Group by Type**

Select this option to group the scenarios by their type.

### **Group by Storage**

Select this option to group the scenarios by their storage location.

### **Ungroup all**

Select this option to ungroup all the scenarios.

### **Reset Layout**

Select this option to restore the default settings of the layout.

Your selections in the **Transformation Scenarios** view are persistent so the configured associations for the current document will be remembered whenever the document is opened.

### **Related Information:**

[Editing a Transformation Scenario](#) on page 793

[Creating New Transformation Scenarios](#) on page 749

## WebHelp Output

**Oxygen XML WebHelp** provides the ability to generate two different types of output, **WebHelp Responsive** and **WebHelp Classic**. Both types include a feedback-enabled variant and each has its own set of options and features. The **WebHelp Responsive** variants are available for DITA documents while the **WebHelp Classic** variants are available for both DITA and DocBook.

**Table 62: WebHelp System Feature Matrix**

| Features                     | WebHelp System Variants |            |                     |         |
|------------------------------|-------------------------|------------|---------------------|---------|
|                              | Responsive w/ Feedback  | Responsive | Classic w/ Feedback | Classic |
| Desktop Systems              | ✓                       | ✓          | ✓                   | ✓       |
| Mobile Devices               | ✓                       | ✓          |                     |         |
| Predefined Skins             | ✓                       | ✓          | ✓                   | ✓       |
| Predefined Templates         | ✓                       | ✓          |                     |         |
| Search Capabilities          | ✓                       | ✓          | ✓                   | ✓       |
| Modern Layout                | ✓                       | ✓          |                     |         |
| Adaptable to Any Screen Size | ✓                       | ✓          |                     |         |



| Features                             | WebHelp System Variants |            |                     |         |
|--------------------------------------|-------------------------|------------|---------------------|---------|
|                                      | Responsive w/ Feedback  | Responsive | Classic w/ Feedback | Classic |
| Comments Section                     | ✓                       |            | ✓                   |         |
| DITA Documents                       | ✓                       | ✓          | ✓                   | ✓       |
| DocBook Documents                    |                         |            | ✓                   | ✓       |
| Tri-Pane Frames or Frameless Version |                         |            | ✓                   | ✓       |

## WebHelp Classic Output

The **WebHelp Classic** variant is designed for desktop systems when feedback from users is not necessary and it is available for DocBook and DITA document types. The **WebHelp Classic with Feedback** variant also includes a feedback system that allows your users to make comments and allows you to manage and reply to them. This section contains information about configuring a WebHelp Classic system and customizing the output.

This type of WebHelp system can be generated by using one of the following transformation scenarios:

- [DITA Map WebHelp Classic transformation scenario](#)
- [DITA Map WebHelp Classic with Feedback transformation scenario](#)
- [DocBook WebHelp Classic transformation scenario](#)
- [DocBook WebHelp Classic with Feedback transformation scenario](#)

### WebHelp Classic Output Layout and Features

#### Layout of the WebHelp Classic System Interface

The layout of the **WebHelp Classic** system is comprised of the following components:

##### Left Pane or Frame

This section on the left side of the help system includes the following tabs:

##### Content

A typical table of contents style presentation of your content. You can use the  **Expand all**/ **Collapse all** buttons to expand or collapse all the topics presented in the Table of Contents.

**Note:** You can enhance the appearance of items in the *Table of Contents*. See the [Customizing WebHelp Classic Output](#) chapter for more details.

##### Index

Presents the index terms for your content. If your content does not contain any `indexterm` elements, this tab is not generated.

##### Search Results

This tab is generated when the **Search** field is used. It presents the search results in the form of links to topics where the search terms are found, along with a rating scheme for each result. For more details, see the [Search Feature](#) section.

##### Upper Pane or Frame

The upper section of the help system includes the following features:

##### Search Field

Use this feature to perform searches in your content. When you enter search terms in this field, the results are displayed in the **Search Results** tab in the left section of the help system, along with a rating scheme for each result. For more details, see the [Search Feature](#) section.

## Frames Option

Click on this option to display the output rendered in HTML frames.

## Print Option

Opens a dialog box with various printing options and a print preview.

## Navigation Links

You can navigate through the content of your output using the navigation links or arrows in the upper-right part of the page. These arrows allow you to move to the [↑ Parent topic](#), [← Previous topic](#), or [→ Next topic](#). Links to the parent topics of the currently opened topic are also presented at the top of the page. For DITA output, these navigation links are controlled by the [collection-type attribute](#).

**Tip:** To hide the **Parent**, **Next**, and **Previous** links, you can edit the transformation scenario and set the value of the `args.hide.parent.link` parameter to yes.

## Main Pane or Frame

The content of the help pages are rendered and displayed in this main section.

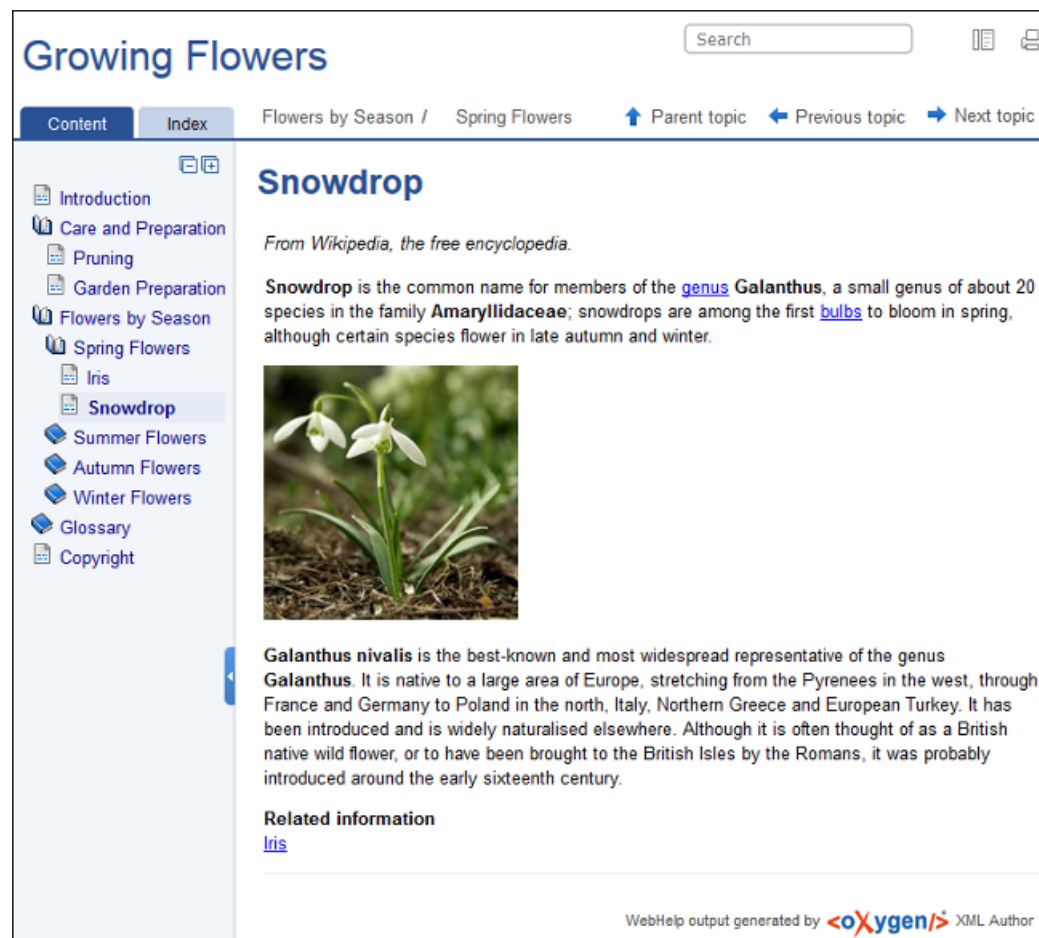


Figure 418: WebHelp Classic Output

## WebHelp Classic with Feedback Enabled

The **WebHelp Classic with Feedback** variant also contains a **Comments** section at the bottom of each topic. This section is where you can interact with users through a comment system. For information about deploying a feedback-enabled system, see [Deploying a Feedback-Enabled System](#) on page 864.

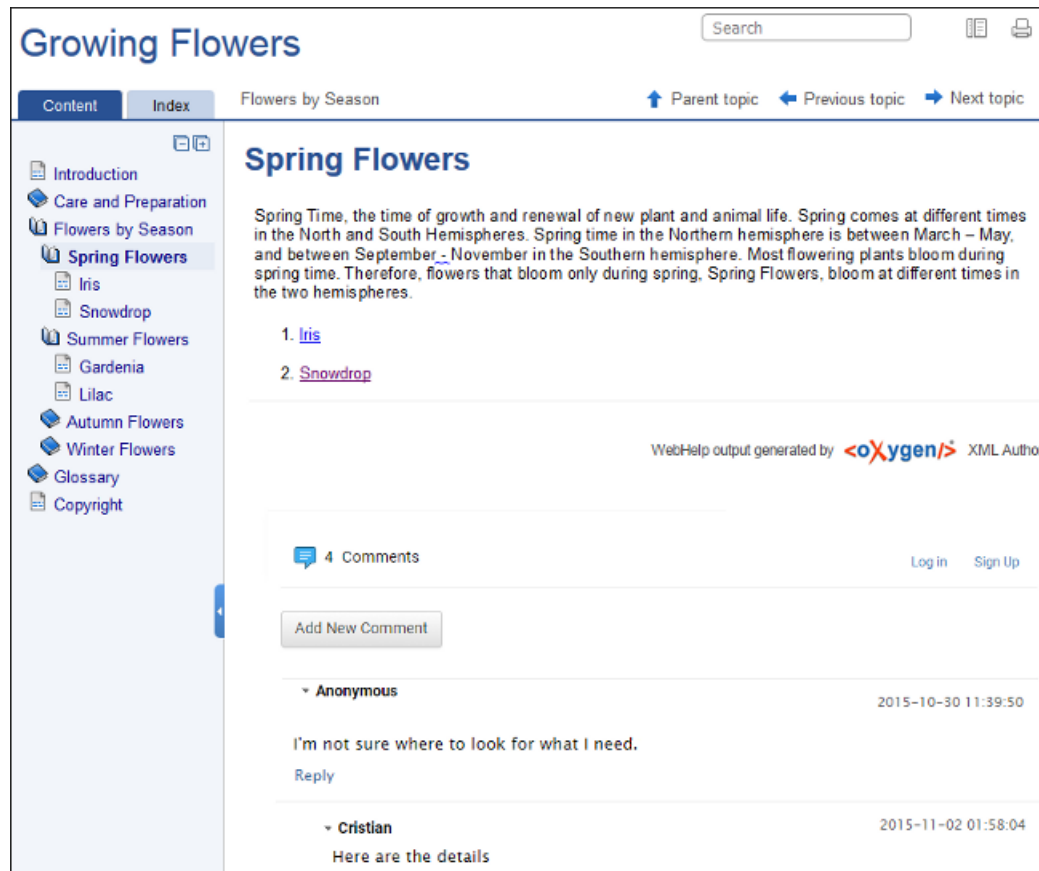


**Figure 419: WebHelp Classic with Feedback Comments Section**

To add a new comment, click the **Add New Comment** button, or click **Reply** to add a comment to an existing thread. You can click on the **Log in** button on the right side of this bar to be authenticated as a user and your user name will be included in any comments that you add. If you do not have a user name, you can click on the **Sign Up** button to create a new user.

After you log in, your name and user name are displayed in the **Comments** bar, along with the **Log off** and **Edit** buttons. Click the **Edit** button to open the **User Profile** dialog box where you can customize the following options:

- **Your Name** - You can use this field to edit the initial name that you used to create your user profile.
- **Your email address** - You can use this field to edit the initial email address that you used to create your profile.
- You can choose to receive an email in the following situations:
  - When a comment is left on a page that you commented on.
  - When a comment is left on any topic in the WebHelp Classic system.
  - When a reply is left to one of my comments.
- **New Password** - Allows you to enter a new password for your user account.

**Note:** The **Current Password** field from the top of the **User Profile** is mandatory if you want to save the changes you make.

If you are an administrator, you can manage user information and comments. For more information, see [Managing Users and Comments in a Feedback-Enabled System](#) on page 866.

## WebHelp Classic Search Engine

### Search Rules

Rules that are applied during a search include:

- You can use quotes to perform an exact search for multiple word phrases (for example, "grow flowers" will only return results if both words are found consecutively and exactly as they are typed in the search field). This type of search is known as a *phrase search*.

- *Boolean Search* is supported using the following operators: *and*, *or*, *not*. When there are two adjacent search terms without an operator, *or* is used as the default search operator (for example, *grow flowers* is the same as *grow or flowers*).
- The space character separates keywords (an expression such as *grow flowers* counts as two separate keywords: *grow* and *flowers*).
- *indexterm* and *keywords DITA* elements are an effective way to increase the ranking of a page (for example, content inside a *keywords* element weighs more than an *H1* HTML element).
- Words composed by merging two or more words with colon (":"), minus ("-"), underline ("\_"), or dot (".") characters count as a single word.
- Your search terms should contain two or more characters (note that stop words will be ignored). This rule does not apply to CJK (Chinese, Japanese, Korean) languages.

### 5-Star Rating Mechanism and Sorting

The **Search** feature is also enhanced with a rating mechanism that computes scores for every result that matches the search criteria. These scores are then translated into a 5-star rating scheme and the stars are displayed to the right of each result. The search results are sorted depending on the following:

- Search entries that satisfy the phrase search criterion are presented first.
- The number of keywords found in a single page (the higher the number, the better).
- The context (for example, a word found in a title scores better than a word found in unformatted text). The search ranking order, sorted by relevance is as follows:
  - The search term is included in a meta keyword
  - The search term is in the title of the page
  - The search term is in bold text in a paragraph
  - The search term is in normal text in a paragraph

### Excluded Terms

To improve performance, the **Search** feature excludes certain *stop words*. For example, the English version of such *stop words* include: *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*.

### WebHelp Classic Search Results Tab

When you enter search terms in the **Search** field at the top of the help system, the results are displayed in the **Search Results** tab in the left section. When you click on a result in the **Search Results** tab, that result is displayed in the main pane with the search terms highlighted. If you press **Enter** with the **Search** field empty, the highlights are removed.

Growing Flowers

the galanthus species

Content

Search Results

Index

Flowers by Season > Spring Flowers

9 documents found for "galanthus species".

Snowdrop

From Wikipedia, the free encyclopedia. Snowdrop is the common name for members of the genus *Galanthus*, a small genus of about 20 species in the family Amaryllidaceae; snowdrops are among the first to bloom in spring, although certain species flower in late autumn and winter.

★★★★★

Salvia

From Wikipedia, the free encyclopedia. Salvia is the largest genus of plants in the mint family, Lamiaceae, with approximately 900 species of shrubs, herbaceous perennials, and annuals. It is one of...

Missing: ★★★★★ galanthus

Lilac

From Wikipedia, the free encyclopedia. Lilac ( *Syringa* ) is a genus of about 20–25 species of flowering plants in the olive family ( Oleaceae ), native to Europe and Asia. They are deciduous shrubs or...

Missing: ★★★★★ galanthus

Snowdrop

From Wikipedia, the free encyclopedia.

Snowdrop

is the common name for members of the genus *Galanthus*, a small genus of about 20 species in the family Amaryllidaceae; snowdrops are among the first bulbs to bloom in spring, although certain species flower in late autumn and winter.



*Galanthus nivalis*

is the best-known and most widespread representative of the genus *Galanthus*. It is native to a large area of Europe, stretching from the Pyrenees in the west, through France and Germany to Poland in the north, Italy, Northern Greece and European Turkey. It has been introduced and is widely naturalised elsewhere. Although it is often thought of as a British native wild flower, or to have been brought to the British Isles by the Romans, it was probably introduced around the early sixteenth century.

All species of *Galanthus*

are *perennial*, herbaceous plants which grow from bulbs. The flower has no petals: it consists of six tepals, the outer three being larger and more convex than the inner series. An important feature which helps to distinguish between species (and to help to determine the parentage of hybrids) is their "*vermation*" (the arrangement of the emerging leaves relative to each other). This can be "*applanate*", "*supervolute*" or "*explicative*". In *applanate vermation* the two leaf blades are pressed flat to each other within the bud and as they emerge; *explicative* leaves are also pressed flat against each other, but the edges of the leaves are folded back or sometimes rolled; in *supervolute* plants one leaf is tightly clasped around the other within the bud and generally remains at the point where the leaves emerge from the soil.

Related information

[Iris](#)

WebHelp output generated by <oxygen/> XML Author

Figure 420: WebHelp Classic Search Results Tab

## Missing Terms

If you enter multiple search terms (other than *stop words*), for any result that the search engine found at least one term but not one or more of the other terms, the **Missing** terms will be listed below each result.

## Tag Element Scoring Values

HTML tag elements are also assigned a scoring value and these values are evaluated for the search results. For information about editing these values, see [Changing Element Scoring in Search Results](#) on page 829.

## Browser Compatibility

This output format is compatible with the most recent versions of the following common browsers:

- Edge
- Internet Explorer (IE 10 or newer)
- Chrome
- Firefox
- Safari
- Opera

**Important:** Due to some security restrictions in certain browsers (Google Chrome and Internet Explorer), WebHelp Classic pages loaded from the local system (through URLs of the `file:///...` format) may not

Transforming Documents

807

work properly. We recommend that you load WebHelp Classic pages in Google Chrome or Internet Explorer only from a web server (with a URL such as `http://your.server.com/webhelp/index.html` or `http://localhost/web_pages/index.html`).



**Warning:** Due to some restrictions in web browsers in regards to JavaScript code, the *frameless* version (`index.html` start page) of the WebHelp Classic system should only be loaded from a web server (with a URL such as `http://your.server.com/webhelp/index.html` or `http://localhost/web_pages/index.html`). When loading WebHelp Classic pages from the local file system, the *frameset* version (`index_frames.html` start page) of the WebHelp Classic system should be used instead (`file:///...`).

## Deploying a Feedback-Enabled System

### System Requirements

The feedback-enabled WebHelp system requires a standard server deployment. You can request this from your server administrator and it requires the following system components:

- A Web server (such as *Apache Web Server*)
- A *MySQL* or *MariaDB* database server
- A database admin tool (such as *phpMyAdmin*)
- PHP Version 5.1.6 or later

The WebHelp system supports most of the recent versions of the following browsers: Chrome, Firefox, Edge, Internet Explorer, Safari, Opera.

### Create WebHelp with Feedback Database

The **WebHelp with Feedback** system needs a database to store user details and the actual feedback, and a user added to it with all privileges. After this is created, you should have the following information:

- Database name
- Username
- Password

Exactly how you create the database and user depends on your web host and your particular needs.

#### Example:

The following procedure uses *phpMyAdmin* to create a MySQL database for the feedback system and a MySQL user with privileges for that database. The feedback system uses these credentials to connect to the database.

Using *phpMyAdmin* to create a database:

1. Access the *phpMyAdmin* instance running on your server.
2. Click *Databases* (in the right frame) and then create a *database*. You can give it any name you want (for example *comments*).
3. Create a user with connection privileges for this database.
4. Under *localhost*, in the right frame, click *Privileges* and then at the bottom of the page click the **reload the privileges** link.

### Deploying the WebHelp with Feedback Output

If you have a web server configured with PHP and MySQL, you can deploy the **WebHelp with Feedback** output by following these steps:

1. Connect to your server using an FTP client.
2. Locate the home directory (from now on, referred to as *DOCUMENT\_ROOT*) of your server.
3. Copy the transformation output folder into the *DOCUMENT\_ROOT* folder.
4. Rename it to something relevant (for example, *myProductWebHelp*).
5. Open the output folder (for example, `http://[YOUR_SERVER]/myProductWebHelp/`). You are redirected to the installation wizard. Proceed with the installation as follows:
  - a. Verify that the prerequisites are met.



b. Press **Start Installation**.

c. Configure the **Deployment Settings** section. Default values are provided, but you should adjust them as needed.

**Tip:** You can change some of the options later. The installation creates a `config.php` file in `[OXYGEN_WEBHELP_INSTALL_DIR]/feedback/resources/php/config/config.php` where all your configuration options are stored.

d. Configure the **MySQL Database Connection Settings** section. Use the information (database name, username, password) from the [Create WebHelp with Feedback Database section](#) to fill-in the appropriate text boxes.



**Warning:** Selecting the **Create new database structure** option will overwrite any existing data in the selected database, if it already exists. Therefore, it is useful the first time you install the **WebHelp with Feedback** system, but you do not want to select this option on subsequent deployments.

e. If you are using a domain (such as *OpenLDAP* or *Active Directory*) to manage users in your organization, select the **Enable LDAP Authentication** option. This will allow you to configure the LDAP server, which will provide information and credentials for users who will access the WebHelp system. Also, this will allow you to choose which of the domain users will have administrator privileges.

f. If the **Create new database structure** option is selected, the **Create WebHelp Administrator Account** section becomes available. Here you can set the administrator account data. The administrator is able to moderate new posts and manage WebHelp users.

The same database can be used to store comments for multiple **WebHelp with Feedback** deployments. If a topic is available in multiple deployments and there are comments associated with it, you can choose to display the comments in all deployments that share the database. To do this, select the **Display comments from other products** option. In the **Display comments from** section, a list with the deployments sharing the same database is displayed. Select the deployments allowed to share common feedback.

**Note:** You can restrict the displayed comments of a product depending on its version. If you have two products that use the same database and you restrict one of them to display comments starting from a certain version, the comments of the other product are also displayed from the specified version onwards.

g. Press **Next Step**.

h. Remove the installation folder from your web server.

**Important:** When you publish subsequent iterations of your **WebHelp with Feedback** system, you will not upload the `/install` folder in the output, as you only need it uploaded the first time you create the installation. On subsequent uploads, you will just upload the other output files.

i. In your Web browser, go to your **WebHelp with Feedback** system main page.

## Testing Your WebHelp with Feedback System

To test your system, create a user and post a comment. Check to see if the notification emails are delivered to your email inbox.

**Note:** To read debug messages generated by the system:

1. Enable *JavaScript* logging by doing one of the following:

- Open the `log.js` file, locate the `var log= new Log(Level.NONE);` line, and change the logging level to: `Level.INFO`, `Level.DEBUG`, `Level.WARN`, or `Level.ERROR`.
- Append `?log=true` to the WebHelp URL.

2. Inspect the PHP and Apache server log files.

## Documentation Product ID and Version

When you run a **WebHelp with Feedback** transformation scenario, by default you are prompted for a documentation product ID and version number. This is needed when multiple WebHelp systems are deployed on the same server. Think of your WebHelp output as a *product*. If you have three different WebHelp outputs, you have three different *products* (each with their own unique documentation product ID). This identifier is included in a configuration file so that comments are tied to a particular output (product ID and version number).

**Note:** The **WebHelp with Feedback** installation includes a configuration option (**Display comments from other products**) that allows you to choose to have comments visible in other specified *products*.

#### Related Information:

[Managing Users and Comments in a Feedback-Enabled System](#) on page 866

#### *Refreshing the Content of a Feedback-Enabled System*

It is common to update the content of an existing installation of a **WebHelp with Feedback** system on a regular basis. In this case, reinstalling the whole system is not a viable option since it might result in the loss of the comments associated with your topics. Also, reconfiguring the system every time you want to refresh it may be time consuming.

Fortunately, you can refresh just the content without losing the comments or the initial system configuration. To do so, follow these steps:


1. Execute the transformation scenario that produces the *WebHelp with Feedback* output directory.
2. Go to the output directory (specified in the **Output** tab of the transformation scenario), locate the `\feedback\resources\php\config\config.php` file, and delete it.
3. Locate the `\feedback\install` directory and delete it.
4. Copy the remaining structure of the output folder and paste it into your *WebHelp with Feedback* system installation directory, overwriting the existing content.

#### *Managing Users and Comments in a Feedback-Enabled System*

When you installed the **WebHelp with Feedback** system the first time (assuming the [Create new database structure option](#) was selected), you should have been prompted to create an administrator account (or a user named *administrator* was created by default). As an administrator, you have access to manage comments posted in your feedback-enabled WebHelp system. You can also manage the user information (such as role, status, or notification options).

To manage comments and user information, follow these steps:

1. At the bottom of each specific topic there is a **Comments** navigation bar and on the right side there is a **Log in** button. Click this button and log in with your administrator credentials. This gives you access to an **Admin Panel** button.
2. Click the **Admin Panel** button to display an administration page.

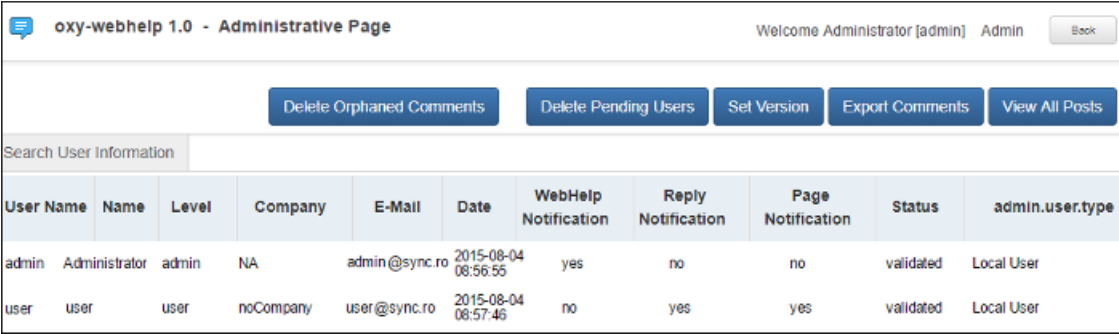

| oxy-webhelp 1.0 - Administrative Page                                                                                                                                    |               |       |           |               |                     |                      |                    |                   |           |                 |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|-----------|---------------|---------------------|----------------------|--------------------|-------------------|-----------|-----------------|
| Welcome Administrator [admin] Admin <a href="#">Back</a>                                                                                                                 |               |       |           |               |                     |                      |                    |                   |           |                 |
| <a href="#">Delete Orphaned Comments</a> <a href="#">Delete Pending Users</a> <a href="#">Set Version</a> <a href="#">Export Comments</a> <a href="#">View All Posts</a> |               |       |           |               |                     |                      |                    |                   |           |                 |
| Search User Information                                                                                                                                                  |               |       |           |               |                     |                      |                    |                   |           |                 |
| User Name                                                                                                                                                                | Name          | Level | Company   | E-Mail        | Date                | WebHelp Notification | Reply Notification | Page Notification | Status    | admin.user.type |
| admin                                                                                                                                                                    | Administrator | admin | NA        | admin@sync.ro | 2015-08-04 08:56:55 | yes                  | no                 | no                | validated | Local User      |
| user                                                                                                                                                                     | user          | user  | noCompany | user@sync.ro  | 2015-08-04 08:57:46 | no                   | yes                | yes               | validated | Local User      |

**Figure 421: Administrative Page**

3. Use this page to manage the following options:

#### **Delete Orphaned Comments**

Allows you to delete comments that are no longer associated with a topic in your WebHelp system.

#### **Delete Pending Users**

Allows you to delete user accounts that you do not wish to activate.

#### **View All Posts**

Allows you to view all the comments that are associated with topics in your WebHelp system.

#### **Export Comments**

Allows you to export all posts associated with topics in your WebHelp system into an XML file.



## Set Version

Use this action to display comments starting with a particular version.

## Manage User Information

To edit the details for a user, click on the corresponding row. This opens a window that allows you to customize the following information associated with the user:

### Name

The full name of the user.

### Level

Use this field to modify the privilege level (role) for the selected user. You can choose from the following:

- **User** - Regular user, able to post comments and receive e-mail notifications.
- **Moderator** - In addition to the regular **User** rights, this type of user has access to the **Admin Panel** where a moderator can view, delete, export comments, and set the version of the feedback-enabled WebHelp system.
- **Admin** - Full administrative privileges. Can manage WebHelp-specific settings, users, and their comments.

### Company

The name of the organization associated with the user.

### E-Mail

The contact email address for the user. This is also the address where the WebHelp system sends notifications.

### WebHelp Notification

When selected, the user receives notifications when comments are posted anywhere in your feedback-enabled WebHelp system.

### Reply Notification

When selected, the user receives notifications when comments are posted as a reply to one of their comments.

### Page Notification

When selected, the user receives notifications when comments are posted on a topic where they previously posted a comment.

### Date

The date the user registered is displayed.

### Status

Use this drop-down list to change the status of the user. You can choose from the following:

- **Created** - The user is created but does not yet have any rights for the feedback-enabled WebHelp system.
- **Validated** - The user is able to use the feedback-enabled WebHelp system.
- **Suspended** - The user has no rights for the feedback-enabled WebHelp system.



**Warning:** The key used for identifying the page a comment is attached to is the relative file path to the output page. Since the output file and folder names mirror the source, any change to the file name (or its folder) in the source will affect the comments associated with that WebHelp page. If you change the file name or path, the comment history for that topic will become orphaned (a change to the topic ID does not affect the comment history).

## Context-Sensitive WebHelp Classic System

Context-sensitive help systems assist users by providing specific informational topics for certain components of a user interface, such as a button or window. This mechanism works based on mappings between a unique ID defined in the topic and a corresponding HTML page.

## Generating Context-Sensitive Help

When WebHelp Classic output is generated, the transformation process produces an XML mapping file called `context-help-map.xml` and copies it in the output folder of the transformation. This XML file maps an ID to a corresponding HTML page through an `appContext` element, as in the following example:

```
<map productID="oxy-webhelp" productVersion="1.1">
 <appContext helpID="myapp-functionid1" path="tasks/app-help1.html"/>
 <appContext helpID="myapp-functionid2" path="tasks/app-help1.html"/>
</map>
```

The possible attributes are as follows:

### helpID

A Unique ID provided by a topic from two possible sources (`resourceid` element or the `id` attribute that is set on the topic root element):

#### resourceid

The `resourceid` element is mapped into the `appContext` element and can be specified in either the `topicref` within a *DITA map* or in a *prolog* within a DITA topic. The `resourceid` element accepts the following attributes:

- **appname** - A name for the external application that references the topic. If this attribute is not specified, its value is considered to be empty ("").
- **appid** - An ID used by an application to identify the topic.
- **id** - Specifies a value that is used by a specific application to identify the topic, but this attribute is ignored if an **appid** attribute is used. Also, starting with DITA 1.3, the **id** attribute was deprecated in favor of the **appid** attribute.

**Note:** Multiple `appid` values can be associated with a single `appname` value (and multiple `appname` values can be associated with a single `appid` value), but the values for both attributes work in combination to specify a specific ID for a specific application, and therefore each combination of values for the `appid` and `appname` attributes should be unique within the context of a single *root map*. For example, suppose that you need two different functions of an application to both open the same WebHelp page.

#### Example: resourceid Specified in a DITA Map

The `resourceid` element can be specified in a `topicmeta` element within a `topicref`.

```
<map title="App Help">
 <topicref href="app-help1.dita" type="task">
 <topicmeta>
 <resourceid appname="myapp" appid="functionid1"/>
 <resourceid appname="myapp" appid="functionid2"/>
 </topicmeta>
 </topicref>
</map>
```

#### Example: resourceid Specified in a DITA Topic

The `resourceid` element can be specified in a *prolog* element within a DITA topic.

```
<task id="app-help1">
 <title>My App Help</title>
 <prolog>
 <resourceid appname="myapp" appid="functionid1"/>
 <resourceid appname="myapp" appid="functionid2"/>
 </prolog>
 ...
</task>
```

For more information about the `resourceid` element, see [DITA Specifications: <resourceid>](#).

### id

If a `resourceid` element is not declared in the *DITA map* or DITA topic (as described above), the `id` attribute that is set on the topic root element is mapped into the `appContext` element.

**Important:** You should ensure that these defined IDs are unique in the context of the entire DITA project. If the IDs are not unique, the transformation scenario will display warning messages in the transformation console output and the help system will not work properly.

#### path

The path to a corresponding WebHelp page. This path is relative to the location of the `context-help-map.xml` mapping file.

#### productID (Applicable only if you are using the WebHelp Classic with Feedback transformation scenario)

The ID of the product for your documentation project.

#### productVersion (Applicable only if you are using the WebHelp Classic with Feedback transformation scenario)

The version of the product for your documentation project.

There are two ways of implementing context-sensitive help in your system:

- The XML mapping file can be loaded by a PHP script on the server side. The script receives the `contextId` value and will look it up in the XML file.
- Invoke one of the WebHelp system files `index.html` or `index_frames.html` and pass the `contextId` parameter with a specific value. The WebHelp system will automatically open the help page associated with the value of the `contextId` parameter.

**Note:** The `contextId` parameter is not case sensitive.

The following example will open a *frameless* version of the WebHelp system showing the page associated with the ID `dialog1ID`:

```
index.html?contextId=dialog1ID
```

The following example will open a *frameset* version of the WebHelp system showing the page associated with the ID `view1ID`:

```
index_frames.html?contextId=view1ID
```

**Tip:** You can use an [anchor](#) in the `contextId` parameter to jump to a specific section in a document. For example, `contextId=topicID#anchor`.

#### Context-Sensitive Queries

You can use the URL field in your browser to search for topics in a context-sensitive WebHelp system with the assistance of the following parameters:

- **contextId** - The WebHelp JavaScript engine will look for this value in the `context-help-map.xml` mapping file and load the corresponding help page.

**Note:** You can use an [anchor](#) in the `contextId` parameter to jump to a specific section in a document. For example, `contextId=topicID#anchor`.

- **appname** - You can use this parameter in conjunction with `contextId` to search for this value in the corresponding [appname attribute value](#) in the mapping file.

```
http://localhost/webhelp/index.html?contextId=topicID&appname=myApplication
```

#### Generating WebHelp Classic Output for DITA

The publishing process can be initiated from a transformation scenario within **Oxygen XML Editor/Author**, from a command line outside **Oxygen XML Editor/Author**, or from an integration server.

#### Running from Oxygen XML Editor/Author

To publish DITA content to WebHelp Classic output from a transformation scenario inside **Oxygen XML Editor/Author**, use one of the following procedures, depending on whether or not you want a feedback section in your output.

## WebHelp Classic Output

To publish a [DITA map](#) as a **WebHelp Classic** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Classic** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - **Parameters Tab** - This tab includes numerous transformation parameters that can be set to customize your WebHelp system output.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to process the transformation.

When the **DITA Map WebHelp Classic** transformation is complete, the output is automatically opened in your default browser.

To further customize this transformation, you can edit various parameters, including the following most commonly used ones:

## WebHelp Classic with Feedback Output

To publish a [DITA map](#) as a **WebHelp Classic with Feedback** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Classic with Feedback** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - **Parameters Tab** - This tab includes numerous transformation parameters that can be set to customize your WebHelp system output.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to begin the transformation.
  5. Enter the documentation product ID (value for the `webhelp.product.id` parameter) and the documentation version (value for the `webhelp.product.version` parameter).

When the **DITA Map WebHelp Classic with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the [instructions to complete the system deployment](#).

For more information about the feedback-enabled WebHelp system, watch our video demonstration:

<https://www.youtube.com/embed/eoQ2uxHvppE>

## Running from Command Line

To publish to the **WebHelp Classic** output from a command line outside of **Oxygen XML Editor/Author**, you can use the `dita` startup script that comes bundled with [DITA Open Toolkit](#) distribution.

### **Required Arguments for the *dita* Command Startup Script:**

[DITA-OT-DIR](#) on page 1264\bin\[executable] -i [path\_to\_input.ditamap] -f [transformation\_type]

#### **executable**

**Windows** - The dita.bat script located in: [DITA-OT-DIR](#) on page 1264\bin\.

**Linux/Mac OS X** - The dita script file located in: [DITA-OT-DIR](#) on page 1264/bin/.

#### **-i / -input**

Specifies the master file for your DITA documentation project. Typically this is a DITA map.

#### **-f / -format**

Specifies the transformation type. The **Oxygen XML WebHelp Plugin** contributes the following transformation types for DITA:

- **webhelp** - The transformation that produces **WebHelp Classic** output for desktop.
- **webhelp-feedback** - The transformation that produces feedback-enabled **WebHelp Classic with Feedback** for desktop.

### **Additional Options or Parameters:**

You can also use [DITA-OT options](#) to modify the command behavior or [additional configuration parameters that are contributed by the Oxygen XML WebHelp Plugin](#).

[DITA-OT-DIR](#) on page 1264\bin\[executable] -i [path\_to\_input.ditamap] -f [transformation\_type] [option] -D[parameter=value]

### **Command Line Examples:**

- **Windows:** dita.bat -i c:\mySample.ditamap -f webhelp-responsive -o c:\output -Dwebhelp.logo.image=C:\images\myLogo.jpg
- **Linux/Mac OS X:** dita -i C:/mySample.ditamap -f webhelp-responsive -o C:/output -Dwebhelp.logo.image=C:/images/myLogo.jpg

#### *Additional WebHelp Parameters for DITA*

You can append the following parameters to the command line that runs the transformation:

#### **-Dwebhelp.copyright (not available for WebHelp Responsive systems)**

Adds a small copyright text that appears at the end of the **Table of Contents** pane.

#### **-Dwebhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

#### **-Dwebhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

#### **-Dwebhelp.footer.file (not available for WebHelp Responsive systems)**

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate div or span element, and the code for each script element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs); }
 (document, 'script', 'facebook-jssdk')) -->
 </script>
 <div data-share="true" data-show-faces="true" data-action="like"
 data-layout="standard" class="fb-like"/>
</div>
```

**-Dwebhelp.footer.include (not available for WebHelp Responsive systems)**

Specifies whether or not to include footer in each WebHelp page. Possible values: yes, no. If set to no, no footer is added to the WebHelp pages. If set to yes and the `webhelp.footer.file` parameter has a value, then the content of that file is used as footer. If the `webhelp.footer.file` has no value then a default **Oxygen** footer is inserted in each WebHelp page.

**-Dwebhelp.google.search.results**

A file path that specifies the location of a well-formed XHTML file containing the Google Custom Search Engine element `gcse:searchresults-only`. You can use all supported attributes for this element. It is recommend to set the `linkTarget` attribute to `frm` for frameless (*iframe*) version of WebHelp or to `contentWin` for the frameset version of WebHelp. The default value for this attribute is `_blank` and the search results will be loaded in a new window. If this parameter is not specified, the following code will be used `<gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>`

**-Dwebhelp.google.search.script**

A file path that specifies the location of a well-formed XHTML file containing the Custom Search Engine script from Google.

**-Dwebhelp.logo.image.target.url**

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

**-Dwebhelp.logo.image**

Specifies a path to an image displayed as a logo in the left side of the output header.

**-Dwebhelp.product.id (available only for Feedback-enabled systems)**

This parameter specifies a short name for the documentation target, or product (for example, `mobile-phone-user-guide`, `hvac-installation-guide`).

**Note:** You can deploy documentation for multiple products on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

**-Dwebhelp.product.version (available only for Feedback-enabled systems)**

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.

**Note:** Multiple documentation versions can be deployed on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

**-Dwebhelp.search.japanese.dictionary**

The file path of the dictionary that will be used by the *Kuromoji* morphological engine for indexing Japanese content in the WebHelp pages.

**-Dwebhelp.search.ranking**

If this parameter is set to `false` then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

**-Dwebhelp.show.changes.and.comments**

When set to yes, user comments, replies to comments, and tracked changes are published in the WebHelp output. The default value is no.

**-Dwebhelp.sitemap.base.url**

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the *DITA map*, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

**-Dwebhelp.sitemap.change.frequency**

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq`

element is not added in `sitemap.xml`. Allowed values: <empty string> (default), always, hourly, daily, weekly, monthly, yearly, never.

**-Dwebhelp.sitemap.priority**

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority). For example, 0.3, 0.5, or 0.8. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

**-Dwebhelp.skin.css (available only for WebHelp Classic and WebHelp Classic with Feedback systems)**

Path to a CSS file that sets the style theme in the WebHelp Classic output. It can be one of the predefined skin CSS from the `DITA-OT-DIR/plugins/com.oxygenxml.webhelp.classic/predefined-skins` directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

**Parameters Specific to WebHelp Responsive Output (available only for WebHelp Responsive and WebHelp Responsive with Feedback systems)**

**-Dwebhelp.default.collection.type.sequence**

Specifies if the **sequence** value will be used by default when the `collection-type` attribute is not specified. This option is helpful if you want to have *Next* and *Previous* navigational buttons generated for all HTML pages. Allowed values are **no** (default) and **yes**.

**-Dwebhelp.enable.search.autocomplete**

Specifies if the *Autocomplete* feature is enabled in the WebHelp search text field. The default value is yes.

**-Dwebhelp.fragment.after.body**

In the generated output it displays a given XHTML fragment after the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.after.logo\_and\_title**

In the generated output it displays a given XHTML fragment after the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.after.main.page.search**

In the generated output it displays a given XHTML fragment after the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.after.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment after the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.after.top\_menu**

In the generated output it displays a given XHTML fragment after the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.before.body**

In the generated output it displays a given XHTML fragment before the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.before.logo\_and\_title**

In the generated output it displays a given XHTML fragment before the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.before.main.page.search**

In the generated output it displays a given XHTML fragment before the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.before.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment before the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.before.top\_menu**

In the generated output it displays a given XHTML fragment before the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.footer**

In the generated output it displays a given XHTML fragment as the page footer. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.head**

In the generated output it inserts a given XHTML fragment in the <head> element. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.fragment.welcome**

In the generated output it displays a given XHTML fragment as a welcome message (or title). The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**-Dwebhelp.merge.nested.topics.related.links**

Specifies if the related links from nested topics will be merged with the links in the parent topic. Thus the links will be moved from the topic content to the related links component and all of the links from the same group (for example, *Related Tasks*, *Related References*, *Related Information*) are merged into a single group. The default value is yes.

**-Dwebhelp.publishing.template.descriptor**

Specifies the name of the descriptor to be loaded from the WebHelp Responsive template package. If it is not specified, the first encountered descriptor will be automatically loaded.

**-Dwebhelp.publishing.template**

Specifies the path to the ZIP archive (or root folder) that contains your custom WebHelp Responsive template.

**-Dwebhelp.search.enable.pagination**

Specifies whether or not search results will be displayed on multiple pages. Allowed values are yes or no.

**-Dwebhelp.search.page.numberOfItems**

Specifies the number of search results items displayed on each page. This parameter is only used when the **webhelp.search.enable.pagination** parameter is enabled.

**-Dwebhelp.show.breadcrumb**

Specifies if the breadcrumb component will be presented in the output. The default value is yes.

**-Dwebhelp.show.child.links**

Specifies if child links will be generated in the output for all topics that have subtopics. The default value is no.

**-Dwebhelp.show.indexterms.link**

Specifies if an icon that links to the index will be presented in the output. The default value is yes.

**-Dwebhelp.show.main.page.tiles**

Specifies if the tiles component will be presented in the main page of the output. For a *tree* style layout, this parameter should be set to no.

**-Dwebhelp.show.main.page.toc**

Specifies if the table of contents will be presented in the main page of the output. The default value is yes.

**-Dwebhelp.show.navigation.links**

Specifies if navigation links will be presented in the output. The default value is yes.

**-Dwebhelp.show.print.link**

Specifies if a print link or icon will be presented within each topic in the output. The default value is yes.

**-Dwebhelp.show.publication.toc**

Specifies if a table of contents will be presented on the left side of each topic in the output. The default value is yes.

**-Dwebhelp.show.topic.toc**

Specifies if a topic table of contents will be presented on the right side of each topic in the output. This table of contents contains links to each section within the current topic and the section corresponding to the current scroll position is highlighted. The default value is yes.



#### **-Dwebhelp.show.top.menu**

Specifies if a menu will be presented at the top of the main page in the output. The default value is yes.

#### **-Dwebhelp.publication.toc.hide.chunked.topics**

Specifies if the table of contents will contain links for *chunked* topics. The default value is yes.

#### **-Dwebhelp.publication.toc.links**

Specifies which links will be included in the table of contents. The possible values are:

- **chapter** (default) - The TOC will include links for the current topic, its children, its siblings, and its direct ancestor (including the direct ancestor's siblings), and the parent chapter.
- **topic** - The TOC will only include links for the current topic and its direct children.
- **all** - The TOC will include all links.

#### **-Dwebhelp.publication.toc.tooltip.position**

By default, if a topic contains a `shortdesc` element, its content is displayed in a tooltip when the user hovers over its link in the table of contents. This parameter controls whether or not this tooltip is displayed and its position relative to the link. The possible values are:

- **left** (default)
- **right**
- **top**
- **bottom**
- **hidden** - The tooltip will not be displayed.

#### **-Dwebhelp.top.menu.depth**

Specifies the maximum depth level of the topics that will be included in the top menu. The default value is 3. A value of 0 means that the menu has unlimited depth.

#### **-Dwebhelp.topic.collapsible.elements.initial.state**

Specifies the initial state of collapsible elements (tables with titles, nested topics with titles, sections with titles, index term groups). The possible values are `collapsed` or `expanded` (default value).

**Note:** Note that the `fix.external.refs.com.oxygenxml` parameter is not supported. This parameter is normally used to specify whether or not the application tries to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references.

### **Further Customization**

If you need to further customize the transformation process, you can append other DITA-OT parameters as well. Any parameter that you want to append must follow the `-D` model of the above parameters. For example, to append the `args.csspath` parameter, use:

```
-Dargs.csspath=[CSS_FILE_PATH]
```

where `[CSS_FILE_PATH]` is the location of the directory that contains the CSS file.

#### **Related Information:**

[DITA-OT Parameter Reference](#)

### **Running from an Integration Server**

Oxygen XML Developer can be processed from an automatic publishing system, such as *Jenkins* or *Travis*.

#### *Automating DITA to WebHelp Output with Jenkins*

To integrate WebHelp output with the Jenkins continuous integration tool, follow these steps:

1. Create a Maven project to incorporate the DITA-OT that already integrates Oxygen XML Developer.
2. Go to the root of your Maven project and edit the `pom.xml` file to include the following fragment:

```
<properties>
 <oxygen-webhelp>${basedir}/tools/DITA-OT2.5.2/
 plugins/com.oxygenxml.webhelp.responsive</oxygen-webhelp>
</properties>
```

```
<plugin>
<artifactId>exec-maven-plugin</artifactId>
<groupId>org.codehaus.mojo</groupId>
<executions>
 <execution><!-- Run our version calculation script -->
 <id>Version Calculation</id>
 <phase>generate-sources</phase>
 <goals>
 <goal>exec</goal>
 </goals>
 <configuration>
 <executable>${oxygen-webhelp}/ditaWebhelp.bat</executable>
 </configuration>
 </execution>
</executions>
</plugin>
```

**Note:** In the fragment above it is assumed that you are using DITA-OT version 2.5.4. If you are using another version, please adjust the path accordingly.

3. Go to the Jenkins top page and [create a new Jenkins job](#). Configure this job to suit your particular requirements, such as the build frequency and location of the Maven project.

### Automating DITA to WebHelp Output with Travis CI

This topic assumes you have a DITA project hosted on a GitHub public or private repository.

The goal of this tutorial is to help you setup a Travis continuous integration job that automatically publishes your DITA project to [GitHub pages](#) after every commit. The published website will contain a feedback link on each page that would allow a contributor to easily suggest changes to the documentation by creating a pull request on GitHub with just a few clicks.

### Enable the Travis CI Build

1. [Sign in to Travis CI](#) with your GitHub account, accepting the GitHub [access permissions confirmation](#).
2. Once you are signed in, and you have synchronized your GitHub repositories, go to your [profile page](#) and enable Travis CI for the repository you want to build.

### Configure the Travis CI Build in your GitHub Project

1. Checkout your GitHub project locally.
2. Copy the `.travis` folder from [here](#) to the root directory of your project.
3. In the root of your GitHub project, add a file called `.travis.yml` with the following content:

```
language: dita
install:
 - echo "Installed"
script:
 - sh .travis/publish.sh
after_success:
 - sh .travis/deploy.sh
env:
 global:
 - DITAMAP=/path/to/your/ditamap/file
 - DITAAVAL=/path/to/your/ditaval/file
 - ANT_OPTS=-Xmx1024M
```

**Note:** Replace `/path/to/your/ditamap/file` and `/path/to/your/ditaval/file` with the appropriate paths to your *DITA map* and *ditaval* files.

4. Create a GitHub personal access token by following [this procedure](#).
5. [Define an environment variable in the repository settings](#) that has the name `GH_TOKEN` and the value equal with the GitHub personal access token created earlier.

### Register Your License Key

1. Edit your `.gitignore` file (or create it if it does not already exist) and add the following line:

```
licenseKey.txt
```

2. Copy your WebHelp license to the root of your GitHub project in a file called `licenseKey.txt`.

**Important:** The `licenseKey.txt` file should not be committed to GitHub as it contains a license key that is issued only to you.

3. [Encrypt the license key file](#) and **add** it to the `.travis.yml` configuration file. This way only the Travis CI server will be able to decrypt it during the build process.

### Commit to GitHub

1. Commit the following files and folders and push the commit to GitHub:

```
git add .gitignore licenseKey.txt.enc .travis.yml .travis/
git commit -m "Set up the Travis CI publishing system"
git push
```

2. Create a `gh-pages` branch in your GitHub project where the WebHelp output will be published. You can follow the procedure [here](#).

### Generating WebHelp Classic Output for DocBook

The publishing process can be initiated from a transformation scenario within **Oxygen XML Editor/Author** or from a command line outside **Oxygen XML Editor/Author**.

#### Running from Oxygen XML Editor/Author

To publish DocBook content to WebHelp Classic output from a transformation scenario inside **Oxygen XML Editor/Author**, use one of the following procedures, depending on whether or not you want a feedback section in your output.

#### WebHelp Classic Output

To publish a DocBook document as a **WebHelp Classic** system, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
2. Select the **DocBook WebHelp Classic** scenario from the **DocBook 4** or **DocBook 5** section.
3. Click **Apply associated**.

When the **DocBook WebHelp Classic** transformation is complete, the output is automatically opened in your default browser.

#### WebHelp Classic with Feedback Output

To publish a DocBook document as a **WebHelp Classic with Feedback** system, follow these steps:

1. Click  **Configure Transformation Scenarios**.
2. Select the **DocBook WebHelp Classic with Feedback** scenario from the **DocBook 4** or **DocBook 5** section.
3. Click **Apply associated**.
4. Enter the documentation product ID and the documentation version.

When the **DocBook WebHelp Classic with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the instructions to complete the system deployment. For more information, see [Deploying a Feedback-Enabled System](#) on page 864.

For more information about the feedback-enabled WebHelp system, watch our video demonstration:

<https://www.youtube.com/embed/eoQ2uxHvppE>

#### Running from Command Line

To run a DocBook to WebHelp transformation outside of **Oxygen XML Editor/Author**, use the following script file:

- **Windows** - [DocBook XSL directory]\com.oxygenxml.webhelp.classic\docbook.bat
- **Linux/Mac OS X** - [DocBook XSL directory]/com.oxygenxml.webhelp.classic/docbook.sh

Before running the script to generate output, you must customize it to specify various paths and transformation type. To do this, open the script file and edit the following variables:

- **JVM\_INSTALL\_DIR** - Specifies the path to the Java Virtual Machine installation directory on your disk.

- **ANT\_INSTALL\_DIR** - Specifies the path to the installation directory of Ant.
- **SAXON\_6\_DIR** - Specifies the path to the installation directory of Saxon 6.5.5.
- **SAXON\_9\_DIR** - Specifies the path to the installation directory of Saxon 9.1.0.8.
- **DOCBOOK\_XSL\_DIR** - Specifies the path to the installation directory of the DocBook XSL distribution.
- **TRANSTYPE** - Specifies the type of the transformation you want to apply. The **Oxygen XML WebHelp Plugin** contributes the following transformation types for DocBook:
  - **webhelp** - The transformation that produces **WebHelp Classic** output for desktop.
  - **webhelp-feedback** - The transformation that produces feedback-enabled **WebHelp Classic with Feedback** for desktop.
- **INPUT\_DIR** - Specifies the path to the input directory, containing the input XML file.
- **XML\_INPUT\_FILE** - Specifies the name of the input XML file.
- **OUTPUT\_DIR** - Specifies the path to the output directory where the transformation output is generated.
- **DOCBOOK\_XSL\_DIR\_URL** - Specifies the path to the directory of the DocBook XSL distribution in URL format.

You can also add [additional configuration parameters that are contributed by the Oxygen XML WebHelp Plugin](#).

#### *Additional WebHelp Parameters for DocBook*

You can use various parameters in the command line to customize the transformation. Some of the most commonly used parameters include:

#### **-Dargs.default.language**

This parameter is used if the language is not detected in the *DITA map*. The default value is en-us.

#### **-Dclean.output**

Deletes all files from the output folder before the transformation is performed (only no and yes values are valid and the default value is no).

#### **-Dl10n.gentext.default.language**

This parameter is used to identify the correct stemmer that differs from language to language. For example, for English the value of this parameter is en or for French it is fr, and so on.

#### **-Duse.stemming**

Controls whether or not you want to include stemming search algorithms into the published output (default setting is false).

#### **-Dwebhelp.copyright**

Adds a small copyright text that appears at the end of the **Table of Contents** pane.

#### **-Dwebhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

#### **-Dwebhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

#### **-Dwebhelp.footer.file**

Path to an XML file that includes the footer content for your WebHelp output pages. You can use this parameter to integrate social media features (such as widgets for Facebook™, Twitter™, Google Analytics, or Google+™). The file must be well-formed, each widget must be in separate div or span element, and the code for each script element is included in an XML comment (also, the start and end tags for the XML comment must be on a separate line). The following code excerpt is an example for adding a Facebook™ widget:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!-- (function(d, s, id) { var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs); }
 (document, 'script', 'facebook-jssdk')); -->
 </script>
 <div data-share="true" data-show-faces="true" data-action="like"
 data-layout="standard" class="fb-like"/>
</div>
```

#### **-Dwebhelp.footer.include**

Specifies whether or not to include footer in each WebHelp page. Possible values: yes, no. If set to no, no footer is added to the WebHelp pages. If set to yes and the `webhelp.footer.file` parameter has a value, then the content of that file is used as footer. If the `webhelp.footer.file` has no value then a default **Oxygen** footer is inserted in each WebHelp page.

#### **-Dwebhelp.logo.image.target.url**

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

#### **-Dwebhelp.logo.image**

Specifies a path to an image displayed as a logo in the left side of the output header.

#### **-Dwebhelp.product.id (available only for Feedback-enabled systems)**

This parameter specifies a short name for the documentation target, or product (for example, mobile-phone-user-guide, hvac-installation-guide).

**Note:** You can deploy documentation for multiple products on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

#### **-Dwebhelp.product.version (available only for Feedback-enabled systems)**

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.

**Note:** Multiple documentation versions can be deployed on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: `< > / \ ' ( ) { } = ; * % + &`.

#### **-Dwebhelp.search.ranking**

If this parameter is set to `false` then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

#### **-Dwebhelp.skin.css**

Path to a CSS file that sets the style theme in the WebHelp Classic output. It can be one of the predefined skin CSS from the `OXYGEN_INSTALL_DIR\frameworks\docbook\xsl\com.oxygenxml.webhelp.classic\predefined-skins` directory, or it can be a custom skin CSS generated with the [Oxygen Skin Builder](#) web application.

If you need to further customize your transformation, other DocBook XSL parameters can be appended. Any parameter that you want to append must follow the `-D` model of the above parameters. For example, you can append the `html.stylesheet` parameter in the following form:

```
-Dhtml.stylesheet=/path/to/directory/of/stylesheets.css
```

### **Customizing WebHelp Classic Output**

**Oxygen XML WebHelp** provides support for customizing the **WebHelp Classic** output to suit your specific needs. The **WebHelp Classic** type of output is designed for desktop systems and features a familiar *tri-pane* layout. You can use this system to publish DITA and DocBook document types. The **WebHelp Classic with Feedback** variant allows your users to add comments to your output.

To change the overall appearance of the **WebHelp Classic** output, you can use the visual [WebHelp Skin Builder tool](#), which does not require knowledge of CSS language. If you are familiar with CSS and coding, you can style your WebHelp output through your own custom stylesheets. You can also customize your output by modifying option and parameters in the transformation scenario.

This section includes topics that explain various ways to customize your WebHelp system output, such as how to improve the appearance of the Table of Contents, add logo images in the title area, integrate with social media, add custom headers and footers, and much more.

## Adding Custom HTML Content in WebHelp Classic Output

You can add custom HTML content in the WebHelp Classic output by inserting it in a well-formed XML file that will be referenced in the transformation. This content may include references to additional JavaScript, CSS, and other types of resources, or such resources can be inserted inline within the HTML content that is inserted in the XML file.

### Using Oxygen XML Editor/Author

To include custom HTML content in the WebHelp Classic output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Insert the HTML content in a well-formed XML file considering the following notes:

- **Well-Formedness** - If the file is not a [Well-formed XML document](#) (or fragments are not well-formed), the transformation will fail.

A common use case is if you want to include several `script` or `link` elements. In this case, the XML fragment has multiple root elements and to make it well-formed, you can wrap it in an `html` element. This element tag will be filtered out and only its children will be copied to the output documents. Similarly, you can wrap your content in `head`, `body`, `html/head`, or `html/body` elements.

- **Referencing Resources in the XML File** - You can include references to local resources (such as JavaScript or CSS files) by using the predefined `${oxygen-webhelp-output-dir}` macro to specify their paths relative to the output directory:

```
<html>
 <script type="text/javascript" src="${oxygen-webhelp-output-dir}/js/test.js"/>
 <link rel="stylesheet" type="text/css"
 href="${oxygen-webhelp-output-dir}/css/test.css" />
</html>
```

To copy the referenced resources to the output directory, follow the procedure in: [Copying Additional Resources to Output Directory](#).

- **Inline JavaScript or CSS Content** - If you want to include inline JavaScript or CSS content in the XML file, it is important to place this content inside an XML comment, as in the following examples:

JavaScript:

```
<script type="text/javascript">
 <!--
 /* Include JavaScript code here. */

 function myFunction() {
 return true;
 }
 -->
</script>
```

CSS:

```
<style>
 <!--
 /* Include CSS style rules here. */

 *{
 color:red
 }
 -->
</style>
```

2. Edit the WebHelp Classic transformation scenario.
3. Go to the **Parameters** tab.
4. Edit the value of the `webhelp.head.script` parameter and set it to reference the URL of the XML file created in step 1. Your additional content will be included at the end of the head element of your output document.

**Note:** If you want to include the content in the body element, use the `webhelp.body.script` parameter instead.

5. Click **OK** to save the changes and run the transformation scenario.

## Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To include custom HTML content in the WebHelp Classic output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Insert the HTML content in a well-formed XML file considering the following notes:

- **Well-Formedness** - If the file is not a [Well-formed XML document](#) (or fragments are not well-formed), the transformation will fail.

A common use case is if you want to include several script or link elements. In this case, the XML fragment has multiple root elements and to make it well-formed, you can wrap it in an html element. This element tag will be filtered out and only its children will be copied to the output documents. Similarly, you can wrap your content in head, body, html/head, or html/body elements.

- **Referencing Resources in the XML File** - You can include references to local resources (such as JavaScript or CSS files) by using the predefined `${oxygen-webhelp-output-dir}` macro to specify their paths relative to the output directory:

```
<html>
 <script type="text/javascript" src="${oxygen-webhelp-output-dir}/js/test.js"/>
 <link rel="stylesheet" type="text/css"
 href="${oxygen-webhelp-output-dir}/css/test.css" />
</html>
```

To copy the referenced resources to the output directory, follow the procedure in: [Copying Additional Resources to Output Directory](#).

- **Inline JavaScript or CSS Content** - If you want to include inline JavaScript or CSS content in the XML file, it is important to place this content inside an XML comment, as in the following examples:

JavaScript:

```
<script type="text/javascript">
 <!--
 /* Include JavaScript code here. */

 function myFunction() {
 return true;
 }
 -->
</script>
```

CSS:

```
<style>
 <!--
 /* Include CSS style rules here. */

 *{
 color:red
 }
 -->
</style>
```

2. Use the `webhelp.head.script` parameter in your transformation script and set its value to reference the URL of the XML file created in step 1. Your additional content will be included at the end of the head element of your output document.

**Note:** If you want to include the content in the body element, use the `webhelp.body.script` parameter instead.

3. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**



```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.head.script=c:\myFile.xml
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.head.script=C:/myFile.xml
```

#### Related Information:

[Copying Additional Resources to Output Directory](#)

### Adding a Favicon in WebHelp Systems

You can add a custom *favicon* to your WebHelp output by simply using a parameter in the transformation scenario to point to your *favicon* image. This is available for DITA and DocBook WebHelp output using **WebHelp Classic** or **WebHelp Classic with Feedback** transformations.

#### Using Oxygen XML Editor/Author

To add a *favicon* to your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit the WebHelp transformation scenario and open the **Parameters** tab.
2. Locate the `webhelp.favicon` parameter and enter the file path that points to the image that will be use as the *favicon*.
3. Run the transformation scenario.

**Result:** Browsers that provide *favicon* support will display the *favicon* (typically in the browser's address bar, in the list of bookmarks, and in the history).

#### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a *favicon* to your WebHelp output using a script outside of **Oxygen XML Editor/Author**, follow this procedure:

1. Specify the file path that points to the image that will be use as the *favicon* using the `webhelp.favicon` parameter.
2. Execute the transformation script.

**Result:** Browsers that provide *favicon* support will display the *favicon* (typically in the browser's address bar, in the list of bookmarks, and in the history).

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.favicon=c:\myFavicon.jpg
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.favicon=C:/myFavicon.jpg
```

### Adding a Logo Image in the Title Area

You can customize **WebHelp Classic** output to include a logo in the title area. It will be displayed before the publication title. You can also specify a URL that can be used to send users to a specific website when they click the logo image.

This customization can be done using a transformation scenario from within **Oxygen XML Editor/Author** or using a command line script outside of **Oxygen XML Editor/Author**.



## Using Oxygen XML Editor/Author

To add a logo in the title area of your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit a **WebHelp Classic** transformation scenario, then open the **Parameters** tab.
2. Specify the path to your logo in the `webhelp.logo.image` parameter.
3. If you also want to add a link to your website when you click the logo image, set the URL in the `webhelp.logo.image.target.url` parameter.
4. Run the transformation scenario.

## Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a logo in the title area of your WebHelp output using a script outside of **Oxygen XML Editor/Author**, follow this procedure:

1. Specify the path to your logo using the `webhelp.logo.image` parameter.
2. If you also want to add a link to your website when you click the logo image, set the URL using the `webhelp.logo.image.target.url` parameter.
3. Execute the transformation script.

For example:

- **Windows:**  

```
dita.bat -f webhelp -Dwebhelp.logo.image=c:\myLogo.jpg -
Dwebhelp.logo.image.target.url=http://sample-site.com
```
- **Mac OS X/ Linux:**  

```
dita -f webhelp -Dwebhelp.logo.image=C:/myLogo.jpg -
Dwebhelp.logo.image.target.url=http://sample-site.com
```

## Adding Video and Audio Objects in DITA WebHelp Classic

You can insert references to video and audio media resources (such as videos, audio clips, or embedded HTML frames) in your DITA topics and then publish them to WebHelp output. The media objects can be played directly in all HTML5-based outputs, including WebHelp systems.

To add media objects in the WebHelp output generated from DITA documents, follow the procedures below.

### Adding Videos to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the video by adding an `object` element, as in one of the following examples:

```
<object outputclass="video" type="video/mp4" data="MyVideo.mp4"/>
```

or, instead of the `data` attribute, you can specify the video using a parameter like this:

```
<object outputclass="video">
 <param name="src" value="videos/MyVideo.mp4"/>
</object>
```

2. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the `object` element to an HTML5 video element.

```
<video controls="controls"><source type="video/mp4" src="MyVideo.mp4"></source>
</video>
```

## Adding Audio Clips to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the audio clip by adding an `object` element, as in one of the following examples:

```
<object outputclass="audio" type="audio/mpeg" data="MyClip.mp3" />
```

or, instead of the `data` attribute, you can specify the video using a parameter like this:

```
<object outputclass="audio">
 <param name="src" value="audio/MyClip.mp3" />
</object>
```

2. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the `object` element to an HTML5 audio element.

```
<audio controls="controls"><source type="audio/mpeg" src="MyClip.mp3"></source>
</audio>
```

## Adding Embedded HTML Frames (such as YouTube videos) to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the embedded object by manually adding an `object` element, as in one of the following examples:

```
<object outputclass="iframe" data="https://www.youtube.com/embed/m_vv2s5Trn4" />
```

or, instead of the `data` attribute, you can specify the object using a parameter like this:

```
<object outputclass="iframe">
 <param name="src" value="http://www.youtube.com/embed/m_vv2s5Trn4" />
</object>
```

2. If you want the video to be allowed to play in full screen mode once the document is converted to XHTML output, also add an `allowfullscreen` parameter and set its value to **true**:

```
<object outputclass="iframe" data="https://www.youtube.com/embed/m_vv2s5Trn4" />
 <param name="allowfullscreen" value="true" />
</object>
```

3. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the `object` element to an HTML5 `iframe` element.

```
<iframe controls="controls" src="https://www.youtube.com/embed/m_vv2s5Trn4">
</iframe>
```

## Adding Videos in DocBook WebHelp Classic Output

You can insert references to videos in your DocBook topics and then publish them to **WebHelp Classic** output. The videos can be played directly in all HTML5-based outputs, including WebHelp systems.

To add videos in the **WebHelp Classic** output generated from DocBook documents, follow these steps:

1. Edit the DocBook document and reference the video using an `mediaobject` element, as in the following example:

```
<mediaobject>
 <videoobject>
 <videodata fileref="http://www.youtube.com/watch/v/VideoName" />
 </videoobject>
</mediaobject>
```

2. Apply a *WebHelp* or *WebHelp with Feedback* transformation scenario to obtain the output.

## Changing Number Styles for Ordered Lists

Ordered lists (`ol`) are usually numbered in XHTML output using numerals. If you want to change the numbering to alphabetical, follow these steps:

1. Define a custom `outputclass` value and set it as an attribute of the ordered list, as in the following example:

```
<ol outputclass="number-alpha">
 A
```

```

B
C


```

2. Add the following code snippet in a custom CSS file:

```

ol.number-alpha{
 list-style-type:lower-alpha;
}

```

3. Edit the WebHelp transformation scenario and open the **Parameters** tab.
  - a. For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
  - b. For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
4. Run the transformation scenario.

## Changing Element Scoring in Search Results

The WebHelp **Search** feature is enhanced with a rating mechanism that computes scores for every page that matches the search criteria. HTML tag elements are assigned a scoring value and these values are evaluated for the search results. The WebHelp directory includes a properties file that defines the scoring values for tag elements and this file can be edited to customize the values according to your needs.

To edit the scoring values of HTML tag element for enhancing WebHelp search results, follow these steps:

1. Edit the scoring properties file for DITA or DocBook WebHelp systems. The properties file includes instructions and examples to help you with your customization.
  - a) For DITA WebHelp Classic systems, edit the following file: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\indexer\scoring.properties`.
  - b) For DocBook WebHelp system, edit the following file: `[DocBook XSL directory]\com.oxygenxml.webhelp.classic\indexer\scoring.properties`.

The values that can be edited in the `scoring.properties` file:

```

h1 = 10
h2 = 9
h3 = 8
h4 = 7
h5 = 6
h6 = 5
b = 5
strong = 5
em = 3
i=3
u=3
div.toc=-10
title=20
div.ignore=ignored
meta_keywords = 20
meta_indexterms = 20
meta_description = 25
shortdesc=25

```

2. Save your changes to the file.
3. Re-run your WebHelp transformation.

## Changing the Icons in a WebHelp Classic Table of Contents

You can change the icons that appear in a WebHelp Classic table of contents by assigning new image files in a custom CSS file. By default, these icons are defined with the following CSS codes (the first example is the icon that appears for a collapsed menu and the second for an expanded menu):

```

.hasSubMenuClosed{
 background: url('../img/book_closed16.png') no-repeat;
 padding-left: 16px;
 cursor: pointer;
}

```

```

.hasSubMenuOpened{
 background: url('../img/book_opened16.png') no-repeat;
 padding-left: 16px;
 cursor: pointer;
}

```

## Using Oxygen XML Editor/Author

To assign other icons and use a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a custom CSS file that assigns your desired icons to the `.hasSubMenuClosed` and `.hasSubMenuOpened` properties.

```
.hasSubMenuClosed{
 background: url('TOC-my-closed-button.png') no-repeat;
}
```

```
.hasSubMenuOpened{
 background: url('TOC-my-opened-button.png') no-repeat;
}
```

2. It is recommended that you store the image files in the same directory as the default icons.
  - For DITA transformations: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\img\`.
  - For DocBook transformations: `[OXYGEN_INSTALL_DIR]\frameworks\docbook\xsl\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\img\`.
3. Edit the WebHelp transformation scenario and open the **Parameters** tab.
  - For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
  - For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
4. Run the WebHelp transformation scenario to generate the output.

## Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To assign other icons and use a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Create a custom CSS file that assigns your desired icons to the `.hasSubMenuClosed` and `.hasSubMenuOpened` properties.

```
.hasSubMenuClosed{
 background: url('TOC-my-closed-button.png') no-repeat;
}
```

```
.hasSubMenuOpened{
 background: url('TOC-my-opened-button.png') no-repeat;
}
```

2. It is recommended that you store the image files in the same directory as the default icons.
  - For DITA transformations: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\img\`.
  - For DocBook transformations: `[DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\img\`.
3. Reference your custom CSS file:
  - For DITA transformations, use the `args.css` parameter in your transformation script and set its value to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
  - For DocBook transformations, use the `html.stylesheet` parameter in your transformation script and set its value to the path of your custom CSS file.
4. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.css=c:\myFile.css -
Dargs.copycss=yes
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dargs.css=C:/myFile.css -
Dargs.copycss=yes
```

### Copying Additional Resources to Output Directory

You can copy additional resources (such as JavaScript, CSS or other resources) to the output directory of a WebHelp system by using the `webhelp.custom.resources` parameter.

### Using Oxygen XML Editor/Author

To copy additional resources to the output directory using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Place all your resources in the same directory.
2. Edit the WebHelp transformation scenario, then open the **Parameters** tab.
3. Edit the value for the `webhelp.custom.resources` parameter and set it to the absolute path of the directory in step 1.
4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

**Result:** All files from the new directory will be copied to the root of the WebHelp output directory.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To copy additional resources to the output directory using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Place all your resources in the same directory.
2. Specify the absolute path to that directory using the `webhelp.custom.resources` parameter.
3. Execute the transformation script.

**Result:** All files from the new directory will be copied to the root of the WebHelp output directory.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp-responsive -
Dwebhelp.custom.resources=c:\resources
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp-responsive -Dwebhelp.custom.resources=C:/
resources
```

### Customizing the Appearance of Selected Items in the Table of Contents

The appearance of selected items in the table of contents of WebHelp Classic output can be enhanced.

For example, to highlight the background of the selected item, follow these steps:

1. Locate the `toc.css` file in the following directory:

- a. For DITA transformations: *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\css*.
  - b. For DocBook transformations: *[DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\css*.
2. Edit that CSS file, find the `menuItemSelected` class, and change the value of the background property.
  3. Run the transformation.

**Note:** You can also overwrite the same value from your own custom CSS and then specify the path to your CSS in the transformation scenario by doing one of the following:

- For DITA transformations, use the `args.css` parameter and set its value to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- For DocBook transformations, use the `html.stylesheet` parameter and set its value to the path of your custom CSS file.

### Customizing WebHelp Output Through CSS Styling

The most common way to customize the look and style of your WebHelp output is to use custom CSS styling. This method can be used to make small, simple styling changes or more advanced, precise changes. To implement the styling in your WebHelp output, you simply need to create the custom CSS file and reference it in your transformation scenario or script. This custom file will be the final CSS to be applied so its content will override the styles in the other pre-existing CSS files.

### Using the CSS Inspector to Identify Content for Custom CSS File

You can use your browser's CSS inspector to identify the pertinent code in the current CSS files and you can even make changes directly in the CSS inspector to test the results so that you know exactly what content to use in your custom CSS file.

In most popular browsers (such as Chrome, Firefox, and Edge), you can access the CSS inspector by using **F12** or by selecting **Inspect Element** (or simply **Inspect**) from the contextual menu.

**Tip:** When using Safari on Mac OS X, you must first enable the Develop menu by going to the Advanced settings and selecting **Show Develop menu in menu bar**. Then you can select **Show Web Inspector** from the Develop menu or click **Command + Option + I**.

### Referencing the Custom CSS Using Oxygen XML Editor/Author

To use a custom CSS to style WebHelp output and use a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create your custom CSS file.
2. Edit the WebHelp transformation scenario and open the **Parameters** tab.
  - For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
  - For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.
3. Run the WebHelp transformation scenario to generate the output.

### Referencing the Custom CSS Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To use a custom CSS to style WebHelp output and use a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Create your custom CSS file.
2. Reference your custom CSS file:
  - For DITA transformations, use the `args.css` parameter in your transformation script and set its value to the path of your custom CSS file. Also, set the `args.copycss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
  - For DocBook transformations, use the `html.stylesheet` parameter in your transformation script and set its value to the path of your custom CSS file.
3. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.css=c:\myFile.css -
Dargs.copycss=yes
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dargs.css=C:/myFile.css -
Dargs.copycss=yes
```

### Disable Caching in WebHelp Classic Output

In cases where a set of WebHelp Classic pages need to be updated on a regular basis to deliver the latest version of the documentation, the WebHelp pages should always be requested from the server upon re-loading it in a Web browser on the client side, rather than re-using an outdated *cached* version in the browser.

To disable caching in WebHelp Classic output, follow this procedure:

1. Edit the following XSL file for DITA or DocBook WebHelp systems:
  - For DITA WebHelp systems, edit the following file: *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.classic\xsl\createMainFiles.xsl.
  - For DocBook WebHelp system, edit the following file: *[OXYGEN\_INSTALL\_DIR]*\frameworks\docbook\xsl\com.oxygenxml.webhelp.classic\xsl\createMainFiles.xsl.
2. Locate the following template in the XSL file: `<xsl:template name="create-toc-common-file">` and add the following code snippet:

```
<meta http-equiv="Pragma" content="no-cache" />
<meta http-equiv="Expires" content="-1" />
```

**Note:** The code should look like this:

```
<html>
 <head>
 <xsl:if test="$withFrames">
 <base target="contentwin" />
 </xsl:if>
 <meta http-equiv="Content-Type" content="text/html; charset=utf-8"/>
 <!-- Disable caching of WebHelp pages in web browser. -->
 <meta http-equiv="Pragma" content="no-cache" />
 <meta http-equiv="Expires" content="-1" />

```

3. Save your changes to the file.
4. Re-run your WebHelp transformation scenario.

### Excluding Certain DITA Topics from Search Results

There are several ways to exclude certain DITA resources from your WebHelp system's search results. This is useful if you have topics in your *DITA map* structure that you do not want to be included in search results for your WebHelp system. The first method involves setting a parameter in the WebHelp transformation scenario and the second involves setting an attribute for each DITA topic reference that you want to exclude.

#### Transformation Parameter Method

To exclude DITA topics from WebHelp search results using a transformation parameter, follow these steps:

1. Create a simple text file that will contain your excluded file patterns. Each pattern must be on a new line. The patterns are considered to be relative to the output directory and they accept wildcards such as `'*'`



(matches zero or more characters) or '?' (matches one character). For more information about the patterns, see <https://ant.apache.org/manual/dirtasks.html#patterns>.

**Example:** Suppose that in your project, you want to exclude all files located in the `resources` directory and all files located in the `topics` directory that have a `.bak` file extension. You could create a simple text file (for example, named `exclude.properties`), and add the following lines:

```
resources/*
topics/*.bak
```

2. Edit the WebHelp transformation scenario and open the **Parameters** tab.
3. Set the `webhelp.search.custom.excludes.file` parameter to specify the path to the file that contains the excluded file patterns (for example, `exclude.properties` in step 1).
4. Run the transformation scenario.

## Search Attribute Method

The WebHelp **Search** engine does not index DITA topics that have the `@search` attribute set to `no`.

To exclude DITA topics from WebHelp search results using this attribute, follow these steps:

1. Edit the *DITA map* and for any `topicref` that you want to exclude from search results, set the `search` attribute to `no`.

For example:

```
<topicref href="../../../topics/internal-topic1.dita" search="no"/>
```

2. Save your changes to the *DITA map*.
3. Run your WebHelp system transformation scenario.

## Flagging DITA Content in WebHelp Output

Flagging content in WebHelp output involves defining a set of images that will be used for marking content across your information set.

To flag DITA content, you need to create a filter file that defines properties that will be applied on elements to be flagged. Generally, flagging is supported for *block elements* (such as paragraphs), but not for phrase-level elements within a paragraph. This ensures that the images that will flag the content are easily scanned by the reader, instead of being buried in text.

## Using Oxygen XML Editor/Author

To flag content in the DITA Map to WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a DITA filter file in the directory where you want to add the file. Give the file a descriptive name, such as `audience-flag-build.ditaval`.
2. Define the property of the element you want to be flagged. For example, if you want to flag elements that have the `audience` attribute set to `programmer`, the content of the DITaval file should look like the following example:

```
<?xml version="1.0" encoding="UTF-8"?>
<val>
 <prop att="audience" val="programmer" action="flag"
 img="D:\resource\delta.gif" alt="sample alt text"/>
</val>
```

Note that for an element to be flagged, at least one attribute-value pair needs to have a property declared in the DITaval file.

3. Edit a **DITA Map to WebHelp** transformation scenario.
4. Specify the DITaval file in the **Filters** tab of the transformation scenario.
5. Run the transformation scenario.



## Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To flag content in the DITA Map to WebHelp output using a script outside of **Oxygen XML Editor/Author**, follow this procedure:

1. Create a DITA filter file in the directory where you want to add the file. Give the file a descriptive name, such as `audience-flag-build.ditaval`.
2. Define the property of the element you want to be flagged. For example, if you want to flag elements that have the audience attribute set to programmer, the content of the DITaval file should look like the following example:

```
<?xml version="1.0" encoding="UTF-8"?>
<val>
 <prop att="audience" val="programmer" action="flag"
 img="D:\resource\delta.gif" alt="sample alt text"/>
</val>
```

Note that for an element to be flagged, at least one attribute-value pair needs to have a property declared in the DITaval file.

3. Use the `args.filter` parameter in your transformation script and set its value to the path of the DITaval file.
4. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.filter=c:\myFile.ditaval
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dargs.filter=C:/myFile.ditaval
```

## Integrating Social Media and Google Tools in the WebHelp Classic Output

Oxygen XML Developer includes support for integrating some of the most popular social media sites in WebHelp output.

### *How to Add a Facebook Like Button in WebHelp Classic Output*

It is possible to integrate Facebook™ into your **WebHelp Classic** output and the widget will appear in the footer sections of your WebHelp page.

## Using Oxygen XML Editor/Author

To add a Facebook™ *Like* widget to your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Facebook Developers](#) website.
2. Fill-in the displayed form, then click the **Get Code** button.
3. Copy the two code snippets and paste them into a `<div>` element inside an XML file called `facebook-widget.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each script element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="facebook">
 <div id="fb-root"/>
```

```

<script>
 <!--
 (function(d, s, id) {
 var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs);
 }(document, 'script', 'facebook-jssdk'));
 -->
</script>
<div class="fb-like" data-layout="standard" data-action="like"
 data-show-faces="true" data-share="true"/>
</div>

```

4. In **Oxygen XML Editor/Author**, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp Classic transformation scenario (depending on your needs, it may be with or without feedback) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the webhelp.footer.file parameter to reference the facebook-widget.xml file that you created earlier.
7. Click **Ok** and run the transformation scenario.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a Facebook™ Like widget to your WebHelp output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Go to the [Facebook Developers](#) website.
2. Fill-in the displayed form, then click the **Get Code** button.
3. Copy the two code snippets and paste them into a <div> element inside an XML file called facebook-widget.xml. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each script element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```

<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!--
 (function(d, s, id) {
 var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs);
 }(document, 'script', 'facebook-jssdk'));
 -->
 </script>
 <div class="fb-like" data-layout="standard" data-action="like"
 data-show-faces="true" data-share="true"/>
</div>

```

4. Use the webhelp.footer.file parameter in your transformation script and set its value to reference the facebook-widget.xml file that you created earlier.
5. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.footer.file=c:\facebook-
widget.xml
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.footer.file=C:/facebook-
widget.xml
```

### How to Add a Google+ Button in WebHelp Classic Output

It is possible to integrate Google into your **WebHelp Classic** output and the widget will appear in the footer section of your WebHelp page.

### Using Oxygen XML Editor/Author

To add a Google+ widget to your WebHelp Classic output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Google Developers](https://developers.google.com/plus/buttons) website.
2. Fill-in the displayed form. The preview area on the right side displays the code and a preview of the widget.
3. Copy the code snippet displayed in the preview area and paste it into a div element inside an XML file called `google-plus-button.xml`. Make sure that the content of the file is well-formed. The content of the XML file should look like this:

```
<div id="google-plus">
 <!-- Place this tag in your head or just before your close body tag. -->
 <script src="https://apis.google.com/js/platform.js" async defer></script>

 <!-- Place this tag where you want the +1 button to render. -->
 <div class="g-plusone" data-annotation="inline" data-width="300"></div>
</div>
```

4. In **Oxygen XML Editor/Author**, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp Responsive transformation scenario (depending on your needs, it may be with or without feedback) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `google-plus-button.xml` file that you created earlier.
7. Click **Ok** and run the transformation scenario.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a Google+ widget to your WebHelp Classic output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Go to the [Google Developers](https://developers.google.com/plus/buttons) website.
2. Fill-in the displayed form. The preview area on the right side displays the code and a preview of the widget.
3. Copy the code snippet displayed in the preview area and paste it into a div element inside an XML file called `google-plus-button.xml`. Make sure that the content of the file is well-formed. The content of the XML file should look like this:

```
<div id="google-plus">
 <!-- Place this tag in your head or just before your close body tag. -->
 <script src="https://apis.google.com/js/platform.js" async defer></script>

 <!-- Place this tag where you want the +1 button to render. -->
 <div class="g-plusone" data-annotation="inline" data-width="300"></div>
</div>
```

4. Use the `webhelp.footer.file` parameter in your transformation script and set its value to reference the `google-plus-button.xml` file that you created earlier.
5. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.footer.file=c:\google-plus-button.xml
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.footer.file=C:/google-plus-button.xml
```

### *How to Add Tweet Button in WebHelp Classic Output*

It is possible to integrate *Twitter* into your **WebHelp Classic** output and the widget will appear in the footer section of your WebHelp page.

### **Using Oxygen XML Editor/Author**

To add a Twitter™ Tweet widget to your WebHelp Classic output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Tweet button generator](#) page.
2. Fill-in the displayed form. The **Preview and code** area displays the code that you will need.
3. Copy the code snippet displayed in the **Preview and code** area and paste it into a div element inside an XML file called `tweet-button.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each script element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="twitter">
 Tweet
 <script>
 <!--
 !function (d, s, id) {
 var
 js, fjs = d.getElementsByTagName(s)[0], p = /^http:/.test(d.location)
 ? 'http': 'https';
 if (! d.getElementById(id)) {
 js = d.createElement(s);
 js.id = id;
 js.src = p + '://platform.twitter.com/widgets.js';
 fjs.parentNode.insertBefore(js, fjs);
 }
 (document,
 'script', 'twitter-wjs');
 }
 -->
 </script>
</div>
```

4. In **Oxygen XML Editor/Author**, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
5. Select an existing WebHelp Responsive transformation scenario (depending on your needs, it may be with or without feedback) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
6. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `tweet-button.xml` file that you created earlier.
7. Click **Ok** and run the transformation scenario.

### **Using a Script Outside of Oxygen XML Editor/Author**

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a Twitter™ Tweet widget to your WebHelp Classic output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Go to the [Tweet button generator](#) page.
2. Fill-in the displayed form. The **Preview and code** area displays the code that you will need.
3. Copy the code snippet displayed in the **Preview and code** area and paste it into a div element inside an XML file called `tweet-button.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each script element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="twitter">
 Tweet
 <script>
 <!--
 !function(d,s,id){
 var
 js,fjs=d.getElementsByTagName(s)[0],p=/^http:/.test(d.location)
 ?'http':'https';
 if(!d.getElementById(id)){
 js=d.createElement(s);
 js.id=id;
 js.src=p+'://platform.twitter.com/widgets.js';
 fjs.parentNode.insertBefore(js,fjs);
 }
 }(document,
 'script','twitter-wjs');
 -->
 </script>
</div>
```

4. Use the `webhelp.footer.file` parameter in your transformation script and set its value to reference the `tweet-button.xml` file that you created earlier.
5. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.footer.file=c:\tweet-button.xml
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.footer.file=C:/tweet-button.xml
```

### How to Integrate Google Analytics in WebHelp Classic Output

You can use *Google Analytics* to track and report site data for your **WebHelp Classic** output.

### Using Oxygen XML Editor/Author

To integrate *Google Analytics* into your WebHelp Classic output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a new [Google Analytics account](#) (if you do not already have one) and log on.
2. Choose the Analytics solution that best fits the needs of your website.
3. Follow the on-screen instructions to obtain a **Tracking Code** that contains your *Tracking ID*. A **Tracking Code** looks like this:

```
<script>
 (function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||function(){
 (i[r].q=i[r].q||[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
 m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
 })(window,document,'script','//www.google-analytics.com/analytics.js','ga');

 ga('create','UA-XXXXXXX-X','auto');
 ga('send','pageview');
</script>
```

4. Save the Tracking Code (obtained in the previous step) in a new XML file called `googleAnalytics.xml`. Note that the file should only contain the tracking code.
5. In **Oxygen XML Editor/Author**, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
6. Select an existing WebHelp Responsive transformation scenario (depending on your needs, it may be with or without feedback) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
7. Switch to the **Parameters** tab and edit the `webhelp.footer.file` parameter to reference the `googleAnalytics.html` file that you created earlier.
8. Click **Ok** and run the transformation scenario.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To integrate *Google Analytics* into your WebHelp Classic output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Create a new [Google Analytics account](#) (if you do not already have one) and log on.
2. Choose the Analytics solution that best fits the needs of your website.
3. Follow the on-screen instructions to obtain a **Tracking Code** that contains your *Tracking ID*. A **Tracking Code** looks like this:

```
<script>
(function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||function(){
(i[r].q=i[r].q||[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
})(window,document,'script','//www.google-analytics.com/analytics.js','ga');

ga('create', 'UA-XXXXXXX-X', 'auto');
ga('send', 'pageview');
</script>
```

4. Save the Tracking Code (obtained in the previous step) in a new XML file called `googleAnalytics.xml`. Note that the file should only contain the tracking code.
5. Use the `webhelp.footer.file` parameter in your transformation script and set its value to reference the `googleAnalytics.html` file that you created earlier.
6. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.footer.file=c:\
\googleAnalytics.xml
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.footer.file=C:/
googleAnalytics.xml
```

### How to Integrate Google Search in WebHelp Classic Output

It is possible to integrate the *Google Search Engine* into your **WebHelp Classic** output and you can specify where you want the results to appear in your WebHelp page.

### Using Oxygen XML Editor/Author

To integrate the *Google Search Engine* into your WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Google Custom Search Engine page](#) using your Google account.

2. Select the **Create a custom search engine** button.
3. Follow the on-screen instructions to create a search engine for your site. At the end of this process you should obtain a code snippet that looks like this:

```
<script>
(function() {
 var cx =
 '000888210889775888983:8mn4x_mf-yg';
 var gcse = document.createElement('script');
 gcse.type = 'text/javascript';
 gcse.async = true;
 gcse.src = (document.location.protocol == 'https:' ?
 'https:' : 'http:') + '//www.google.com/cse/cse.js?cx=' + cx;
 var s = document.getElementsByTagName('script')[0];
 s.parentNode.insertBefore(gcse, s);
})();
</script>
```

4. Save the script into a well-formed HTML file called `googlecse.html`.
5. In **Oxygen XML Editor/Author**, click the  **Configure Transformation Scenario(s)** action from the toolbar (or the **Document > Transformation** menu).
6. Select an existing WebHelp Responsive transformation scenario (depending on your needs, it may be with or without feedback) and click the **Duplicate** button to open the **Edit Scenario** dialog box.
7. Switch to the **Parameters** tab and edit the `webhelp.google.search.script` parameter to reference the `googlecse.html` file that you created earlier.
8. You can also use the `webhelp.google.search.results` parameter to choose where to display the search results.
  - a. Create an HTML file with the following content: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>` (you must use the [HTML5 version for the GCSE](#)). For more information about other supported attributes, see [Google Custom Search: Supported Attributes](#).
  - b. Set the value of the `webhelp.google.search.results` parameter to the file path of the file you just created. If this parameter is not specified, the following code is used: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>`.
9. Click **Ok** and run the transformation scenario.

## Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To integrate the *Google Search Engine* into your WebHelp Classic output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Go to the [Google Custom Search Engine page](#) using your Google account.
2. Select the **Create a custom search engine** button.
3. Follow the on-screen instructions to create a search engine for your site. At the end of this process you should obtain a code snippet that looks like this:

```
<script>
(function() {
 var cx =
 '000888210889775888983:8mn4x_mf-yg';
 var gcse = document.createElement('script');
 gcse.type = 'text/javascript';
 gcse.async = true;
 gcse.src = (document.location.protocol == 'https:' ?
 'https:' : 'http:') + '//www.google.com/cse/cse.js?cx=' + cx;
 var s = document.getElementsByTagName('script')[0];
 s.parentNode.insertBefore(gcse, s);
})();
```



```
</script>
```

4. Save the script into a well-formed HTML file called `googlecse.html`.
5. Use the `webhelp.google.search.script` parameter in your transformation script and set its value to reference the `googlecse.html` file that you created earlier.
6. You can also use the `webhelp.google.search.results` parameter to choose where to display the search results.
  - a. Create an HTML file with the following content: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>` (you must use the [HTML5 version for the GCSE](#)). For more information about other supported attributes, see [Google Custom Search: Supported Attributes](#).
  - b. Set the value of the `webhelp.google.search.results` parameter to the file path of the file you just created. If this parameter is not specified, the following code is used: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>`.
7. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dwebhelp.google.search.script=c:\googlecse.html -Dwebhelp.google.search.results=c:\myFile.html
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dwebhelp.google.search.script=C:/googlecse.html -Dwebhelp.google.search.results=C:/myFile.html
```

## Localization in WebHelp Classic Output

This section contains topics that explain the localization support for DITA or DocBook WebHelp Classic transformations.

### *Localizing Email Notifications of WebHelp Classic with Feedback Output*

The feedback-enabled WebHelp systems use emails to notify users when comments are posted. These emails are based on templates stored in the WebHelp directory. The default messages are in English, French, German, and Japanese. These messages are copied into the WebHelp system deployment directory during the execution of the corresponding transformation scenario.

## Using Oxygen XML Editor/Author

To change the language of the emails for WebHelp Classic with Feedback output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create the following directory, depending on your framework:
  - **DITA:** `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code]` (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
  - **DocBook:** `[DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code]` (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
2. Copy all English template files from the following directory (depending on your framework) and paste them into the directory you just created.
  - **DITA:** `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\en`
  - **DocBook:** `[DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\en`
3. Edit the HTML files from the following directory (depending on your framework) and translate the content into your language.



- **DITA:** *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
  - **DocBook:** [DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
4. Edit a **WebHelp Classic with Feedback** transformation scenario and open the **Parameters** tab.
  5. In the **Parameters** tab, look for the `args.default.language` parameter and set its value to the appropriate language code (for example, *nl* for Dutch).
 

**Note:** If you set the parameter to a value such as `LanguageCode-CountryCode` (for example, *en-us*), the transformation scenario will only use the language code.
  6. Run the transformation scenario.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To change the language of the emails for WebHelp Classic with Feedback output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Create the following directory, depending on your framework:
  - **DITA:** *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
  - **DocBook:** [DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
2. Copy all English template files from the following directory (depending on your framework) and paste them into the directory you just created.
  - **DITA:** *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\en
  - **DocBook:** [DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\en
3. Edit the HTML files from the following directory (depending on your framework) and translate the content into your language.
  - **DITA:** *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
  - **DocBook:** [DocBook XSL directory]\com.oxygenxml.webhelp.classic\oxygen-webhelp\resources\php\templates\[Language code] (where the *Language code* is the 2-digit code, such as *nl* for Dutch)
4. Use the `args.default.language` parameter in your transformation script and set its value to the appropriate language code (for example, *nl* for Dutch).
 

**Note:** If you set the parameter to a value such as `LanguageCode-CountryCode` (for example, *en-us*), the transformation scenario will only use the language code.
5. Execute the transformation script.

For example, a DITA to WebHelp Classic with Feedback script might look like this:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp-feedback -Dargs.default.language=nl
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp-feedback -Dargs.default.language=nl
```

#### *Localizing the Interface of DITA Map to WebHelp Classic Output*

Static labels used in the WebHelp output are stored in translation files that have the *strings-lang1-lang2.xml* name format, where *lang1* and *lang2* are ISO language codes. For example, the US English labels are kept in the *strings-en-us.xml* file.

These translation files are collected from two locations:

- *DITA-OT-DIR*/xsl/common folder - DITA-OT's default translations.
- *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization folder - These translations are contributed by the WebHelp plugin and extend the default ones provided by DITA-OT. The labels defined in this folder take precedence over the DITA-OT default ones.

**Important:** If you need to customize the translation labels, you should do this by updating the translation files found in the *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization folder.

### Using Oxygen XML Editor/Author

To localize the interface of the DITA Map to WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Look for the *strings-[lang1]-[lang2].xml* file in *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, use the following procedure to create one:
  - a. Create a new *strings-fr-ca.xml* file in the *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization directory.
  - b. Copy all the labels found in the *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization/strings-en-us.xml and paste them into the newly created file.
  - c. Copy all the labels found in the *DITA-OT-DIR*/xsl/common/strings-en-us.xml and paste them into the newly created file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. Run the predefined transformation scenario called **Run DITA-OT Integrator** from the  **Apply Transformation Scenario(s)** or  **Configure Transformation Scenario(s)** dialog box. If the *integrator* is not visible, select the **Show all scenarios** action that is available in the  **Settings** drop-down menu.
4. Make sure that the new XML file that you created is listed in the file *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization/strings.xml. For example, the Canadian French file would be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
5. Edit any of the **DITA Map to WebHelp** transformation scenarios (with or without feedback) and set the `args.default.language` parameter to the code of the language you want to localize (for example, *fr-ca* for Canadian French).
6. Run the transformation scenario to produce the WebHelp output.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).

- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To localize the interface of the DITA Map to WebHelp output using a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Look for the *strings-[lang1]-[lang2].xml* file in *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization* directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, use the following procedure to create one:
  - a. Create a new *strings-fr-ca.xml* file in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization* directory.
  - b. Copy all the labels found in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization/strings-en-us.xml* and paste them into the newly created file.
  - c. Copy all the labels found in the *DITA-OT-DIR/xsl/common/strings-en-us.xml* and paste them into the newly created file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. In the home directory of the DITA Open Toolkit, run the *startcmd.bat* script on Windows or *startcmd.sh* script on Linux/Mac OS X. In the displayed command line interface console, run `ant -f integrator.xml`.
4. Make sure that the new XML file that you created is listed in the file *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization/strings.xml*. For example, the Canadian French file would be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
5. Use the `args.default.language` parameter in your transformation script and set its value to the appropriate language code (for example, *fr-ca* for Canadian French).
6. Execute the transformation script.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp-responsive -Dargs.default.language=fr-ca
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp-responsive -Dargs.default.language=fr-ca
```

#### Related Information:

[Indexing Japanese Content in WebHelp Classic](#) on page 846

#### Localizing the Interface of DocBook to WebHelp Classic Output

Static labels that are used in the WebHelp output are kept in translation files in the `[DocBook XSL directory]/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization` folder. Translation files have the *strings-lang1-lang2.xml* name format, where *lang1* and *lang2* are ISO language codes. For example, the US English text is kept in the *strings-en-us.xml* file.

To localize the interface of the WebHelp output for DocBook transformations, follow these steps:

1. Look for the *strings-[lang1]-[lang2].xml* file in `[DocBook XSL directory]/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization` directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, create one starting from the *strings-en-us.xml* file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. Make sure that the new XML file that you created in the previous two steps is listed in the file `[DocBook XSL directory]/com.oxygenxml.webhelp.classic/oxygen-webhelp/resources/localization/strings.xml`. In our example for the Canadian French file, it should be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.

4. Edit any of the DocBook to WebHelp transformation scenarios (with or without feedback) and set the `l10n.gentext.default.language` parameter to the code of the language you want to localize (for example, *fr-ca* for Canadian French).
5. Run the transformation scenario to produce the WebHelp output.

#### Related Information:

[Indexing Japanese Content in WebHelp Classic](#) on page 846

#### *Indexing Japanese Content in WebHelp Classic*

To optimize the indexing of Japanese content in WebHelp pages, the Lucene Kuromoji Japanese analyzer can be used. This analyzer is included in the **Oxygen XML Editor/Author** installation kit.

#### Using Oxygen XML Editor/Author

To activate the Japanese indexing in your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Set the language for your content to Japanese (depending on your framework):
  - **DITA:** Edit a **DITA to WebHelp** transformation scenario and in the **Parameters** tab, set the value of the `args.default.language` parameter to `ja-jp`.  
**Note:** Alternatively, you could set the `xml:lang` attribute on the root of the [DITA map](#) and the referenced topics to `ja-jp`. Another alternative for DITA output is to use the `webhelp.search.japanese.dictionary` parameter to specify a path to a Japanese dictionary that will be used by the *Kuromoji* morphological engine.
  - **DocBook:** Edit a **DocBook to WebHelp** transformation scenario and in the **Parameters** tab, set the value of the `l10n.gentext.default.language` parameter to `ja`.
2. Run the WebHelp transformation scenario to generate the output.

#### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To activate the Japanese indexing in your WebHelp output using a script outside of **Oxygen XML Editor/Author**, follow this procedure:

1. Set the language for your content to Japanese (depending on your framework):
  - **DITA:** Use the `args.default.language` parameter in your transformation script and set its value to `ja-jp`.  
**Note:** Alternatively, you could set the `xml:lang` attribute on the root of the [DITA map](#) and the referenced topics to `ja-jp`. Another alternative for DITA output is to use the `webhelp.search.japanese.dictionary` parameter to specify a path to a Japanese dictionary that will be used by the *Kuromoji* morphological engine.
  - **DocBook:** Use the `l10n.gentext.default.language` parameter in your transformation script and set its value to `ja`.
2. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**  
`dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.default.language=ja-jp`
- **Mac OS X/ Linux:**  
`dita -i C:/mySample.ditamap -f webhelp -Dargs.default.language=ja-jp`

## Related Information:

[Localizing the Interface of DITA Map to WebHelp Classic Output](#)

[Localizing the Interface of DocBook to WebHelp Classic Output](#) on page 845

### Activating Support for Right-to-Left (RTL) Languages

To activate support for RTL (right-to-left) languages in WebHelp output, edit the [DITA map](#) and set the `xml:lang` attribute on its root element (map). The corresponding attribute value can be set for following RTL languages:

- `ar-eg` - Arabic
- `he-il` - Hebrew
- `ur-pk` - Urdu

### Optimizing Search Results in WebHelp Classic

A **DITA Map WebHelp** transformation scenario can be configured to produce a `sitemap.xml` file that is used by search engines to aid crawling and indexing mechanisms. A *sitemap* lists all pages of a WebHelp system and allows webmasters to provide additional information about each page, such as the date it was last updated, change frequency, and importance of each page in relation to other pages in your WebHelp deployment.

The structure of the `sitemap.xml` file looks like this:

```
<urlset xmlns="http://www.sitemaps.org/schemas/sitemap/0.9">
 <url>
 <loc>http://www.example.com/topics/introduction.html</loc>
 <lastmod>2014-10-24</lastmod>
 <changefreq>weekly</changefreq>
 <priority>0.5</priority>
 </url>
 <url>
 <loc>http://www.example.com/topics/care.html#care</loc>
 <lastmod>2014-10-24</lastmod>
 <changefreq>weekly</changefreq>
 <priority>0.5</priority>
 </url>
</urlset>
```

Each page has a `<url>` element structure containing additional information, such as:

- **loc** - the URL of the page. This URL must begin with the protocol (such as `http`), if required by your web server. It is constructed from the value of the `webhelp.sitemap.base.url` parameter from the transformation scenario and the relative path to the page (collected from the `href` attribute of a `topicref` element in the *DITA map*).  
**Note:** The value must have fewer than 2,048 characters.
- **lastmod** (optional) - the date when the page was last modified. The date format is `YYYY-MM-DD`.
- **changefreq** (optional) - indicates how frequently the page is likely to change. This value provides general information to assist search engines, but may not correlate exactly to how often they crawl the page. Valid values are: `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, and `never`. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.change.frequency` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.  
**Note:** The value `always` should be used to describe documents that change each time they are accessed. The value `never` should be used to describe archived URLs.
- **priority** (optional) - the priority of this page relative to other pages on your site. Valid values range from 0.0 to 1.0. This value does not affect how your pages are compared to pages on other sites. It only lets the search engines know which pages you deem most important for the crawlers. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.priority` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.

### Creating and Editing the `sitemap.xml` File

Follow these steps to produce a `sitemap.xml` file for your WebHelp system, which can then be edited to fine-tune search engine optimization:

1. **Edit** the transformation scenario you currently use for obtaining your WebHelp output. This opens the **Edit DITA Scenario** dialog box.
2. Open the **Parameters** tab and set a value for the following parameters:
  - **webhelp.sitemap.base.url** - the URL of the location where your WebHelp system is deployed  
**Note:** This parameter is required for Oxygen XML Developer to generate the `sitemap.xml` file.
  - **webhelp.sitemap.change.frequency** - how frequently the WebHelp pages are likely to change (accepted values are: always, hourly, daily, weekly, monthly, yearly, and never)
  - **webhelp.sitemap.priority** - the priority of each page (value ranging from 0.0 to 1.0)
3. Run the transformation scenario.
4. Look for the `sitemap.xml` file in the transformation's output folder. Edit the file to fine-tune the parameters of each page, according to your needs.

## Overriding XSLT Processing Step of DITA WebHelp Classic Transformations

Since WebHelp output is primarily obtained by running XSLT transformations over the DITA input files (through the **DITA Map WebHelp Classic** transformation scenarios), one customization method would be to override the default XSLT templates that are used by the WebHelp transformations.

There are two methods available to override the XSLT stylesheets implied by the WebHelp transformation.

- The first method is to use one of the [WebHelp XSLT-import extension points](#) that allow you to import an XSLT stylesheet so that it becomes part of the normal build. This method uses the same mechanism as the [DITA-OT XSLT-import extension points](#). Note that this method will affect all the outputs generated with the WebHelp system.
- The second method implies that you will [create a DITA-OT extension plugin](#) with a custom *transtype* and use an Ant build file to define the transformation process. The main difference from the first customization method is that you will not affect all WebHelp transformations. Only the transformations that use the declared plugin *transtype* will be affected.

### WebHelp Classic XSLT-Import and XSLT-Parameter Extension Points

The WebHelp XSLT-Import extension points allows you to extend the XSLT stylesheets associated with some of the WebHelp transformation steps. The DITA-OT plug-in installer adds an XSLT import statement in the default WebHelp XSLT so that the XSLT stylesheet referenced by the extension point becomes part of the normal build.

#### Example:

```
<plugin id="com.oxygenxml.webhelp.classic.extension">
 <feature extension="com.oxygenxml.webhelp.classic.xsl.dita2webhelp"
 file="xsl/fixup.xsl"/>
</plugin>
```



**Attention:** The customizations you make by using this extension point will affect all WebHelp transformations. If you want to have a customization that is only available for a certain transformation, please use the [Overriding a WebHelp XSLT Stylesheet from an Ant Build File](#) method.

## XSLT-Import Extension Points

The following extension points are available:

### com.oxygenxml.webhelp.classic.xsl.dita2webhelp

Extension point to override the XSLT stylesheet (`dita2webhelpImpl.xsl`) that produces an HTML file for each DITA topic. The path to this stylesheet is: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\xsl\dita\desktop\dita2webhelpImpl.xsl`

### com.oxygenxml.webhelp.classic.xsl.createMainFiles

Extension point to override the XSLT stylesheet (`createMainFilesImpl.xsl`) that produces the WebHelp main HTML page (`index.html`). The path to this stylesheet is: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\xsl\dita\desktop\createMainFilesImpl.xsl`

### com.oxygenxml.webhelp.classic.xsl.createTocXML

Extension point to override the XSLT stylesheet (`tocDita.xsl`) that produces the `toc.xml` file. This file contains information extracted from the [DITA map](#) and it is mainly used to construct the WebHelp



Table of Contents and navigational links. The path to this stylesheet is: *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.classic\xsl\dita\tocDita.xsl*.

## XSLT-Parameter Extension Points

If your customization stylesheet declares one or more XSLT parameters and you want to control their values from the transformation scenario, you can use one of the following XSLT parameter extension points:

### **com.oxygenxml.webhelp.classic.xsl.dita2webhelp.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.classic.xsl.dita2webhelp](#) extension point.

### **com.oxygenxml.webhelp.classic.xsl.createMainFiles.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.classic.xsl.createMainFiles](#) extension point.

### **com.oxygenxml.webhelp.classic.xsl.createTocXML.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.classic.xsl.createTocXML](#) extension point.

## Related Information:

[\[DITA-OT\] XSLT-Import Extension Points](#)

[\[DITA-OT\] XSLT-Parameter Extension Points](#)

## *Overriding a WebHelp Classic XSLT Stylesheet from an Ant Build File*

To create a WebHelp XSLT customization that is only available for a certain DITA OT transformation, the extension plugin should [declare a custom transtype](#). The WebHelp XSLT stylesheets can be overridden from an ANT file provided by the DITA-OT extension plugin. From the Ant target associated with the plugin, you will specify a custom XSLT stylesheet that imports the original WebHelp stylesheet and add some customization templates.

The following procedure explains how to create a DITA-OT extension plugin that uses this extension method:

1. In the *DITA-OT-DIR\plugins\* folder, create a folder for this plugin (for example, *com.oxygenxml.webhelp.classic.custom*).
2. Create a **plugin.xml** file (in the folder you created in step 1) that specifies a new DITA-OT transtype and the build file associated with the plugin. For example:

```
<plugin id="com.oxygenxml.webhelp.classic.custom">
 <feature extension="dita.conductor.target.relative" file="integrator.xml"/>
 <transtype name="webhelp-classic-custom" extends="webhelp"
 desc="WebHelp Classic Customization"/>
</plugin>
```

3. Create the **integrator.xml** file that will import the actual plugin Ant build file.

```
<project basedir="." name="Webhelp Classic Customization">
 <import file="build.xml"/>
</project>
```

4. Create the **build.xml** file that overrides the value of properties associated with the [XSLT stylesheets used to produce HTML files](#). The following Ant properties can be overridden to specify your customization stylesheets:

### **args.wh.classic.topic.xsl**

Specify this property if you want to customize the [XSLT stylesheet used to produce an HTML file for each topic](#).

### **args.wh.classic.create.main.files.xsl**

Specify this property if you want to customize the [XSLT stylesheet used to produce the main HTML files](#).

### **args.wh.classic.createTocXML.xsl**

Specify this property if you want to customize the [XSLT stylesheet used to produce the toc.xml/ file](#). The toc.xml file contains information extracted from DITA map and it is mainly used to create the WebHelp TOC.

For example, to customize a WebHelp Classic transformation type, the build file should look like:

```
<project basedir="." name="Webhelp Classic Customization">
```

```

<target name="dita2webhelp-classic-custom">
 <!--
 Override this property if you want to customize the XSLT stylesheet
 used to produce an HTML file for each topic
 -->
 <property
 name="args.wh.classic.topic.xml"
 value="${dita.plugin.com.oxygenxml.webhelp.classic.custom.dir}
 /xsl/dita2webhelpCustom.xml"/>

 <!--
 Override this property if you want to customize the XSLT stylesheet
 used to produce the main HTML file.
 -->
 <property
 name="args.wh.classic.create.main.files.xml"
 value="${dita.plugin.com.oxygenxml.webhelp.classic.custom.dir}
 /xsl/createMainFilesCustom.xml"/>

 <!--
 Override this property if you want to customize the XSLT stylesheet
 used to produce the toc.xml file.
 -->
 <property
 name="args.wh.classic.createTocXML.xml"
 value="${dita.plugin.com.oxygenxml.webhelp.classic.custom.dir}
 /xsl/createTocXMLCustom.xml"/>

 <!--
 You need to delegate the build target:
 * dita2webhelp - for WebHelp Classic
 -->
 <antcall target="dita2webhelp" />
</target>
</project>

```

5. Create an **xsl** directory in the plugin customization directory (that you created in step 1) to store the customized XSLT stylesheets.
6. Install the extension plugin in the DITA Open Toolkit.

## Referencing the WebHelp XSLT Stylesheets from Your Customizations

Note that your customization stylesheets should import the original stylesheets that they override. To reference the WebHelp stylesheets, you can use the **plugin:com.oxygenxml.dita-ot.plugin.webhelp** prefix. This prefix is rewritten by an XML catalog to the WebHelp root directory.

### Customizing the **dita2webhelp.xml** Stylesheet

The XSLT stylesheet that customizes the WebHelp **dita2webhelp.xml** stylesheet should look like:

```

<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:xs="http://www.w3.org/2001/XMLSchema"
 xmlns:math="http://www.w3.org/2005/xpath-functions/math"
 exclude-result-prefixes="xs math"
 version="2.0">
 <!--
 Import the original stylesheet used to produce an HTML file for each topic.
 -->
 <xsl:import href="plugin:com.oxygenxml.webhelp.classic:xsl/
 dita/classic/dita2webhelp.xml"/>

 <!--
 Please add your customization templates here.
 -->
</xsl:stylesheet>

```

You need to import the following XSLT stylesheet:

```

<xsl:import href="plugin:com.oxygenxml.webhelp.classic:xsl/dita/desktop/
dita2webhelp.xml"/>

```

### Customizing the **createMainFiles.xml** Stylesheet

The XSLT stylesheet that customizes the WebHelp **createMainFiles.xml** stylesheet should look like:

```

<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:xs="http://www.w3.org/2001/XMLSchema"
 xmlns:math="http://www.w3.org/2005/xpath-functions/math"
 exclude-result-prefixes="xs math"
 version="2.0">
 <!--
 Import the original stylesheet used to produce the main HTML file.
 -->
 <xsl:import href="plugin:com.oxygenxml.webhelp.classic:xsl/dita/
 desktop/createMainFiles.xml"/>

 <!--
 Please add your customization templates here.
 -->

```



```
</xsl:stylesheet>
```

You need to import the following XSLT stylesheet:

```
<xsl:import href="plugin:com.oxygenxml.webhelp.classic:xsl/dita/desktop/
createMainFiles.xsl"/>
```

### Customizing the tocDita.xsl File

The XSLT stylesheet that customizes the WebHelp **tocDita.xsl** stylesheet should look like:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:xs="http://www.w3.org/2001/XMLSchema"
 xmlns:math="http://www.w3.org/2005/xpath-functions/math"
 exclude-result-prefixes="xs math"
 version="2.0">
 <!--
 Import the original stylesheet used to produce the toc.xml file.
 -->
 <xsl:import href="plugin:com.oxygenxml.webhelp.classic:xsl/dita/tocDita.xsl"/>
 <!--
 Please add your customization templates here.
 -->
</xsl:stylesheet>
```

### Publishing WebHelp Classic Output on a SharePoint Site

Since WebHelp output must be published locally, on the same machine where the WebHelp process is running, to publish your files directly to a SharePoint library you need to map a network drive to connect to SharePoint and change your file extensions to `.aspx`, as described in the steps below.

### Using Oxygen XML Editor/Author

To publish WebHelp Classic output on a SharePoint site and use a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Map a network drive to connect to your SharePoint library. For more information, see: <https://support.microsoft.com/en-us/kb/2616712>.
2. Edit the WebHelp transformation scenario and open the **Parameters** tab.
  - For a DITA transformation, set the `args.outext` parameter to `.aspx`.
  - For a DocBook transformation, set the `html.ext` parameter to `.aspx`.
3. Run the WebHelp transformation scenario to generate the output.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To publish WebHelp Classic output on a SharePoint site and use a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Map a network drive to connect to your SharePoint library. For more information, see: <https://support.microsoft.com/en-us/kb/2616712>.
2. Use the following parameter to change your file extensions to `.aspx`:
  - For DITA transformations, use the `args.outext` parameter in your transformation script and set its value to `.aspx`.
  - For DocBook transformations, use the `html.ext` parameter in your transformation script and set its value to `.aspx`.
3. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.outtext=.aspx
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dargs.outtext=.aspx
```

### Removing the *Previous/Next* Links from WebHelp Classic Output

The **Previous** and **Next** links that are created at the top area of each WebHelp Classic page can be hidden with a CSS code.

### Using Oxygen XML Editor/Author

To remove these links from WebHelp Classic output and use a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a custom CSS file and add the following CSS code:

```
.navparent, .navprev, .navnext {
 visibility:hidden;
}
```

2. Edit the WebHelp transformation scenario and open the **Parameters** tab.

- For a DITA transformation, set the `args.css` parameter to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- For a DocBook transformation, set the `html.stylesheet` parameter to the path of your custom CSS file.

3. Run the WebHelp transformation scenario to generate the output.

### Using a Script Outside of Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To remove these links from WebHelp Classic output and use a [script outside of Oxygen XML Editor/Author](#), follow this procedure:

1. Create a custom CSS file and add the following CSS code:

```
.navparent, .navprev, .navnext {
 visibility:hidden;
}
```

2. Reference your custom CSS file:

- For DITA transformations, use the `args.css` parameter in your transformation script and set its value to the path of your custom CSS file. Also, set the `args.copycss` parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
- For DocBook transformations, use the `html.stylesheet` parameter in your transformation script and set its value to the path of your custom CSS file.

3. Execute the transformation script.

For example, a DITA script might look like this::

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp -Dargs.css=c:\myFile.css -
Dargs.copycss=yes
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp -Dargs.css=C:/myFile.css -
Dargs.copycss=yes
```

## WebHelp Skin Builder

The **WebHelp Skin Builder** is a simple, easy-to-use tool, specially designed to assist users to visually customize the look and feel of the WebHelp output. It is implemented as an online tool hosted on the **Oxygen XML** website and allows you to experiment with various styles and colors over a documentation sample.

To be able to use the **Skin Builder**, you need:

- An Internet connection and unrestricted access to **Oxygen XML** website.
- A late version web browser.

To start the **Skin Builder**, do one of the following:

- For DocBook or DITA WebHelp systems, use a web browser to go to <https://www.oxygenxml.com/webhelp-skin-builder>.
- For DITA WebHelp systems, you can click the **Online preview** link in the **Skins tab** of a DITA OT transformation scenario. In the upper section of the preview, click the **Select Skin** button, then choose **Customize Skin**.

## Skin Builder Layout

The left side panel of the **Skin Builder** is divided into 3 sections:

- **Actions** - Contains the following two buttons:
  - **Import** - Opens an **Import CSS** dialog box that allows you to load a CSS stylesheet and apply it over the documentation sample.
  - **Export** - Saves all properties as a CSS file.
- **Settings** - Includes a **Highlight selection** option that helps you identify the areas affected by a particular element customization.
  - When hovering an item in the customizable elements menu, the affected sample area is highlighted with a dotted blue border.
  - When an item in the customizable elements menu is selected, the affected sample area is highlighted with a solid red border.
- **Customize** - Provides a series of customizable elements organized under four main categories:
  - Header
  - TOC Area
  - Vertical Splitter
  - Content

For each customizable element, you can alter properties such as background color or font face. Any alteration made in the customizable elements menu is applied in real time over the sample area.

## Creating a Customization Skin

1. You can start with one of the predefined skins or a CSS stylesheet applied over the sample using the **Import** button.
2. Use the elements in the **Customize** section to set properties that modify the look of the skin. By default, all customizable elements display a single property, but you can make more visible by clicking the **+ Add** button and choosing from the available properties.

**Note:** If you want to revert a particular property to its initial value, press the  **Reset** button.

3. When you are happy with the skin customizations you have made, press the **Export** button. All settings will be saved in a CSS file.

## Applying a Custom Skin to a DITA Map to WebHelp Classic Transformation Scenario

1. Start Oxygen XML Developer.
2. Load the *DITA map* you want to produce as a WebHelp output.

3. Edit a **DITA Map to WebHelp** transformation scenario. Set the previously exported CSS file in the **Custom** section of the **Skins** tab.
4. Run the transformation to obtain the WebHelp output.

#### **Apply a Customization Skin to a DocBook to WebHelp Classic Transformation Scenario**

1. Start Oxygen XML Developer.
2. Load the DocBook file you want to produce as a WebHelp output.
3. In the **Parameters** tab, set the `webhelp.skin.css` parameter to point to the previously exported CSS.
4. To customize the logo, use the following parameters: `webhelp.logo.image` and `webhelp.logo.image.target.url`.
5. Run the transformation to obtain the WebHelp output.

For more information about using the WebHelp Skin Builder, watch our video demonstration:

<https://www.youtube.com/embed/32PGX-PQx0>

#### **Related Information:**

[Skins Tab \(DITA OT Transformations\)](#)

## **WebHelp Responsive Output**

The **WebHelp Responsive** features a very flexible layout, is designed to adapt to any screen size to provide an optimal viewing and interaction experience. It is based upon the *Bootstrap* responsive front-end framework and is available for DITA document types.

The **WebHelp Responsive with Feedback** variant also includes a feedback system that allows your users to add comments and allows you to manage and reply to them.

WebHelp Responsive output can be generated by using the [DITA Map WebHelp Responsive](#) or [DITA Map WebHelp Responsive with Feedback](#) transformation scenario.

### **WebHelp Responsive Output Layout and Features**

This section contains information about the layout and features of the WebHelp Responsive output.

#### **HTML5 Responsive Pages**

You can select from several different styles of layouts (for example, by default, you can select either a *tiles* or *tree* style of layout). Furthermore, each of these layouts include a collection of skins that you can choose from, or you can customize your own.



Figure 422: WebHelp Responsive Output on a Normal Screen

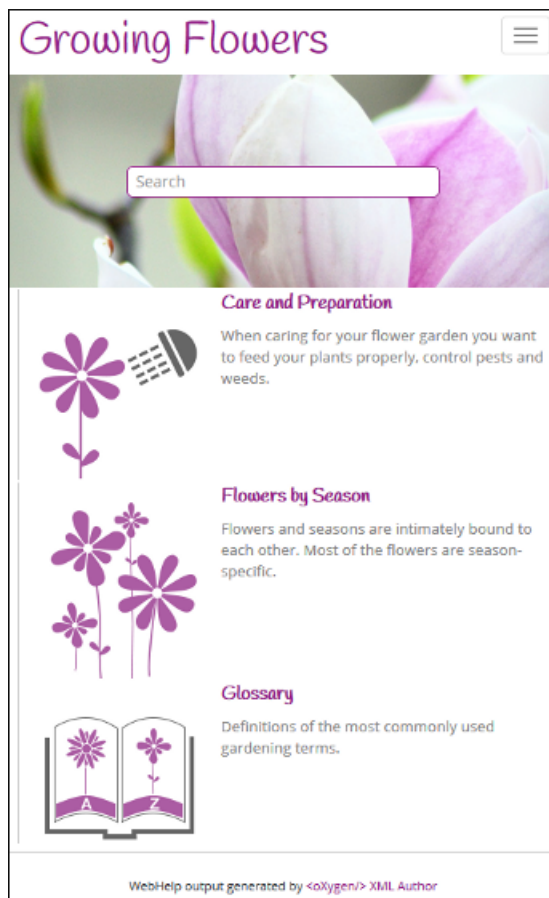


Figure 423: WebHelp Responsive Output on a Narrow Screen

## Main Page

The *Main Page* is the home page generated in the WebHelp Responsive output. The main function of the home page is to display top level information and provide links that help you easily navigate to any of the top level topics of the publication. These links can be rendered in either a *Tiles* or *Tree* style of layout. The main page also consists of various other components, such as a logo, title, menu, search field, or index link.

### Main Page - Tiles Layout

In the *tiles* presentation mode, a tile component is created for each chapter (first level topic) in the publication. The tile presents a link to the topic and its short description.

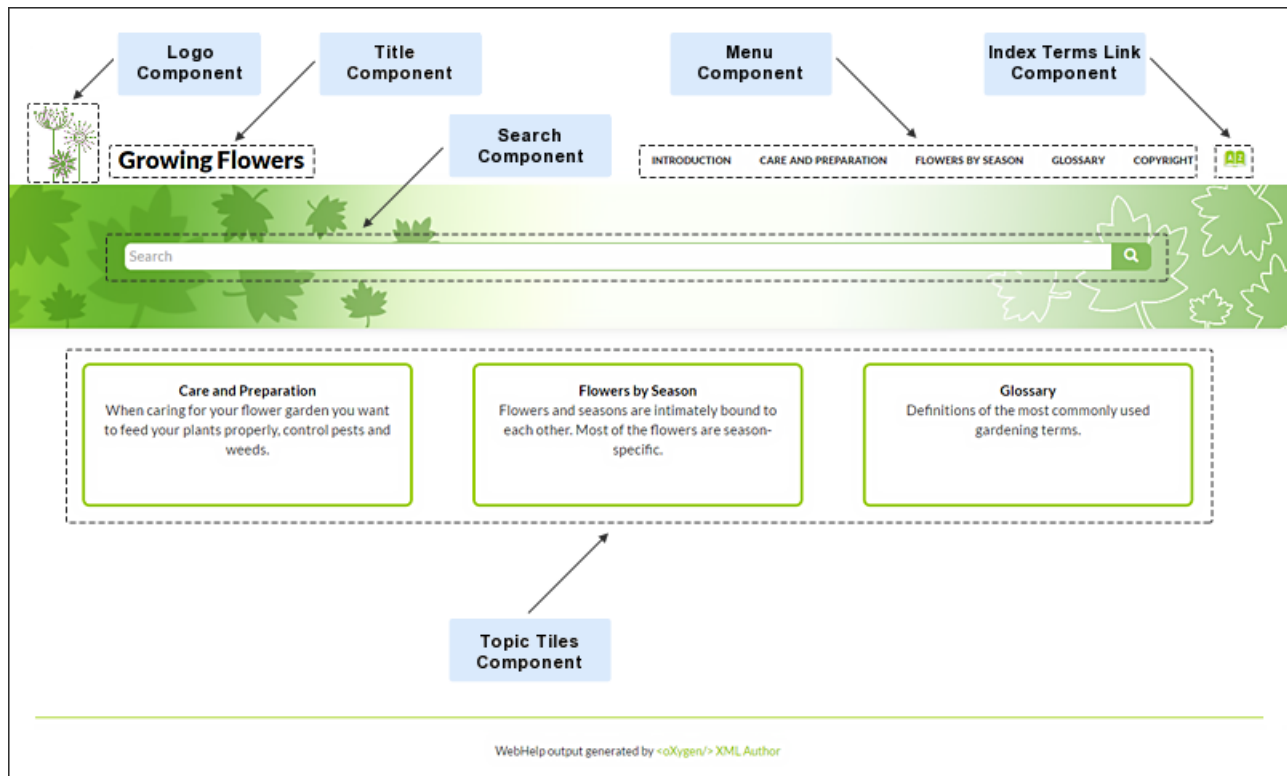


Figure 424: Main Page - Tiles Layout

### Main Page - Tree Layout

In the *tree* presentation mode, links to the first and second level topics in the publication are displayed using a tree-like component.

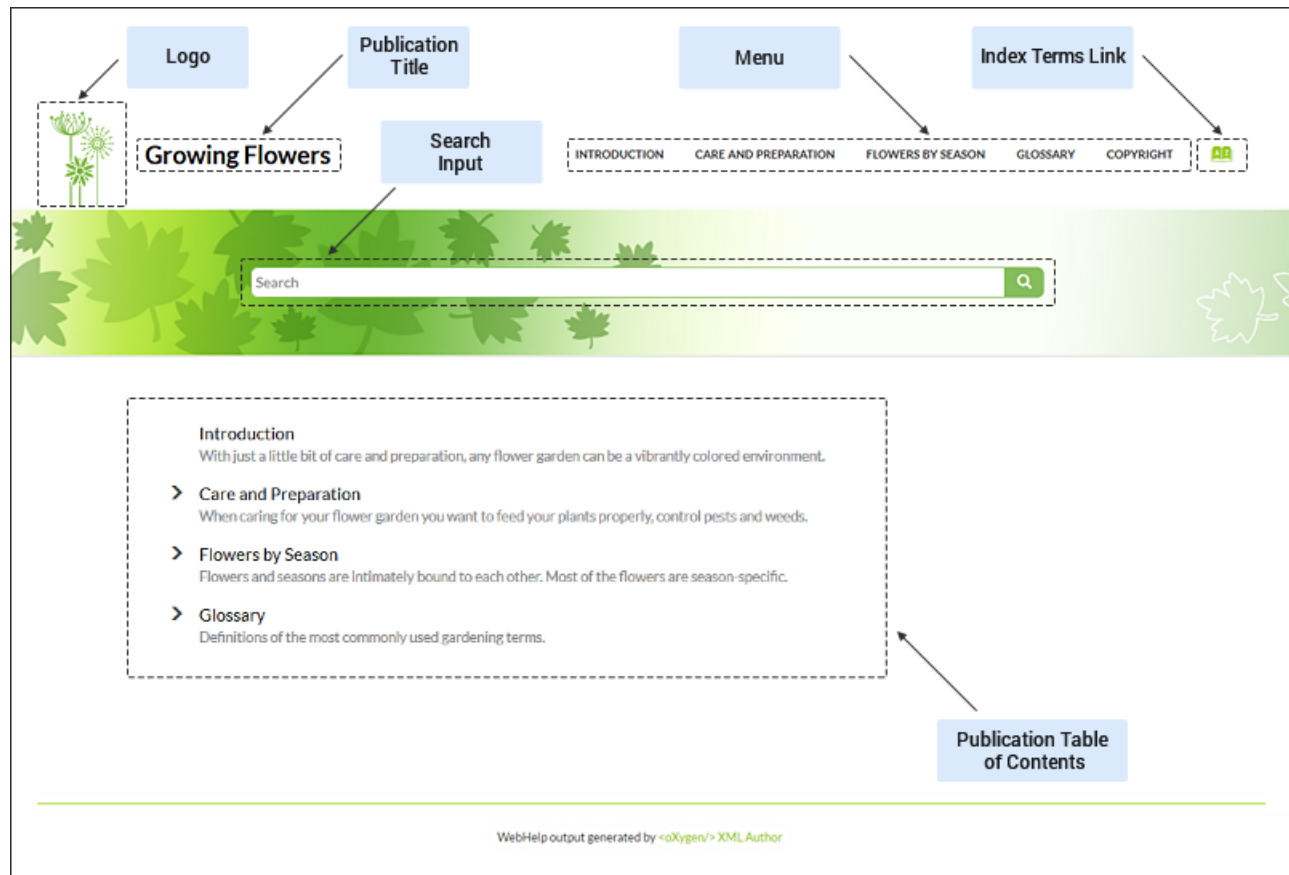


**Figure 425: Main Page - Tree Layout**

## Main Page Components

The layout components displayed in the main page are:

### Publication Title

The title of the publication. It is usually taken from the DITA map title.

### Logo

Displays a logo associated with the publication. Additionally you can set a target URL that will be opened when you click on the logo image.

The logo image can be specified using the [webhelp.logo.image transformation parameter](#). For target URL use the [webhelp.logo.image.target.url parameter](#).

### Menu

Helps you to navigate to your documentation. This component presents a set of links to all topics from your publication. For information about customizing the menu, see [How to Customize the Menu](#) on page 903 topic.

### Index terms link

Presents a link to the index terms page. You can control if this component is displayed by using the [webhelp.show.indexterms.link parameter](#).

### Search query input

Input text field allowing you to easily enter your search queries.

### Tiles area

This section contains a tile for each root topic of the published documentation.

### Topic Tile

A tile associated with a main topic. Each topic tile has three sections that corresponds to the topic title, short description, and image.



## Topic Tile Title

Presents the navigation title of the associated topic.

## Topic Tile Short Description

Presents the [short description](#) of the topic. It may be collected either from the topic or from the DITA map topic meta.

## Topic Tile Image

Presents an image associated with the topic. The [image association](#) is done in the DITA map.

## Tree area

An area containing topic titles from first and second level of your publication.

## Page Footer

WebHelp Responsive output footer.

## Topic Page

The *Topic Page* is the page generated for each DITA topic in the WebHelp Responsive output. The HTML pages produced for each topic consist of the topic content along with various other additional components, such as a title, menu, navigation breadcrumb, print icon, or side table of contents.

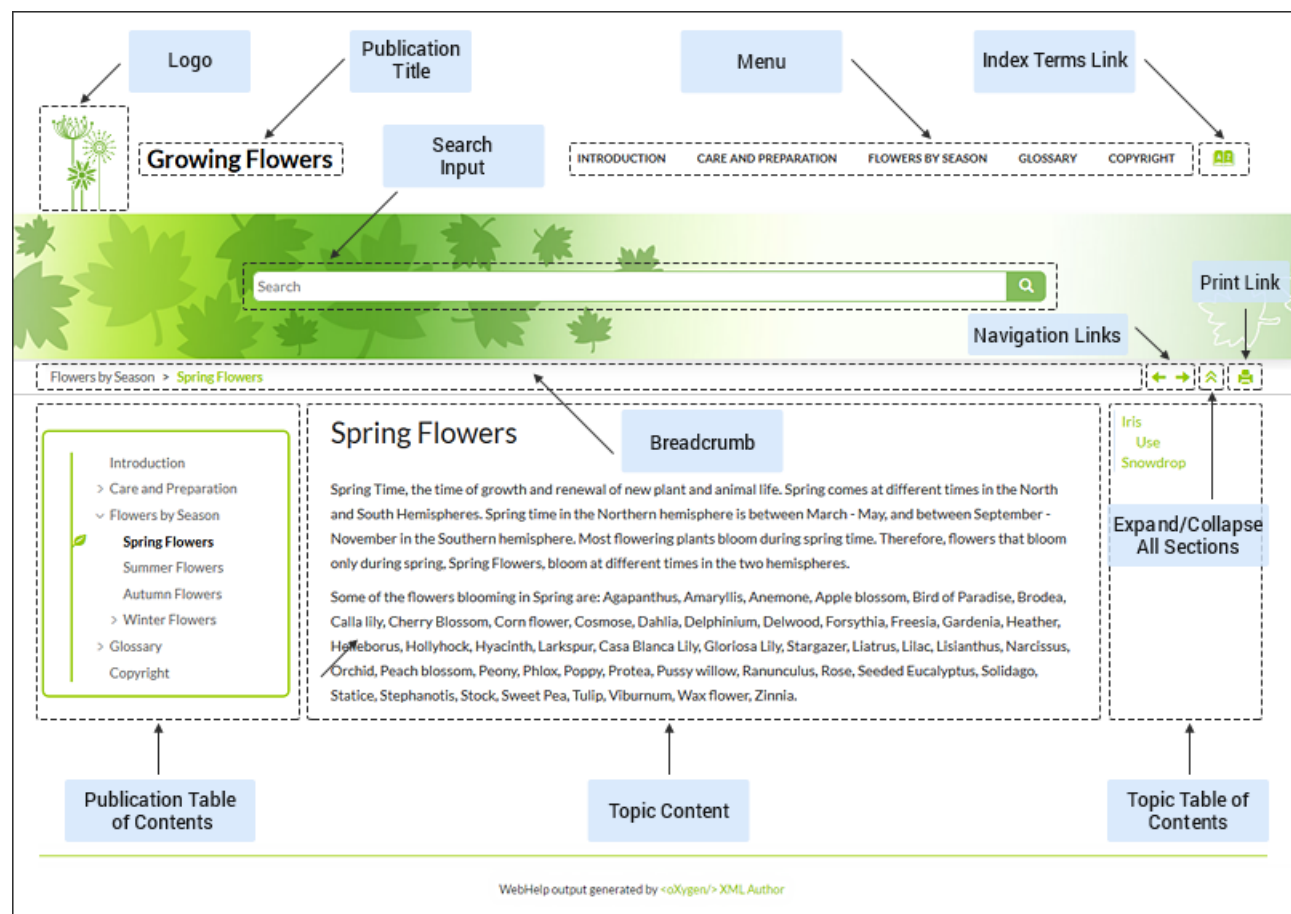


Figure 426: Topic Page

## Topic Page Components

The layout components displayed in this page are:

### Publication Title

The title of the publication. It is usually taken from the DITA map title.



## Logo

Displays a logo associated with the publication. Additionally you can set a target URL that will be opened when you click on the logo image.

The logo image can be specified using the [webhelp.logo.image transformation parameter](#). For target URL use the [webhelp.logo.image.target.url parameter](#).

## Menu

Helps you to navigate to your documentation. This component presents a set of links to all topics from your publication. For information about customizing the menu, see [How to Customize the Menu](#) on page 903 topic.

## Index terms link

Presents a link to the index terms page. You can control if this component is displayed by using the [webhelp.show.indexterms.link parameter](#).

## Print Icon

A print icon that opens the print dialog box for your particular browser.

## Search query input

Input text field allowing you to easily enter your search queries.

## Topic Content

Presents the content of the associated DITA topic.

## Breadcrumb

Presents the path of the current displayed DITA topic in documentation.

## Publication Table of Contents

A Table of Content for the publication displayed in the left side.

## Topic Table of Contents

A Table of Content for the topic displayed on the right side. This table of contents contains links to each section within the current topic and the section corresponding to the current scroll position is highlighted.

## Expand/Collapse Sections Icon

Icon that expands or collapses sections listed in the side table of contents within a topic.

## Page Footer

WebHelp Responsive output footer.

## Search Page

The *Search Page* presents search results in the WebHelp Responsive output. The HTML page consists of a search results component along with various other additional components, such as a title, menu, or index link.

When you enter search terms in the **Search** field, the results are displayed in a results page. When you click on a result, the topic is opened in the main pane and the search results are highlighted. If you want to remove the colored highlights, click the  **Toggle Highlights** button at the top-right side of the page. The **Search** field also includes an *autocomplete* feature.

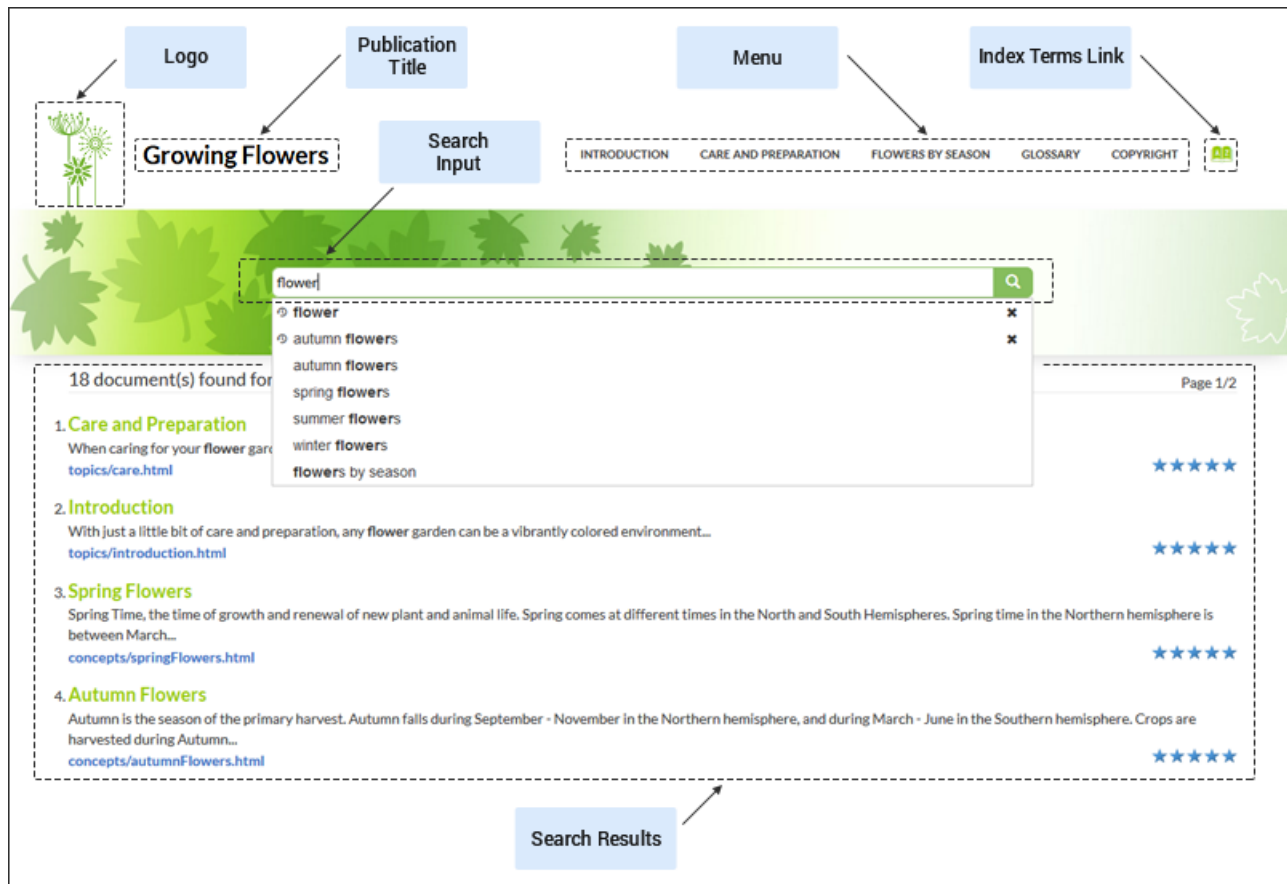


**Figure 427: Search Results Page**

### Autocomplete Suggestions in the Search Text Field

When you are typing in the search text field, proposals are presented to help you to compute the search query. The information proposed when you are typing is collected from:

- The search queries from the history of the previous searches.
- The titles collected from your documentation.
- Documentation index terms and keywords. For example, in a DITA topic, the keywords and index terms are specified in the topic prolog section like this:

```
<prolog>
 <metadata>
 <keywords><indexterm>databases</indexterm></keywords>
 <keyword>installing</keyword>
 <keyword>uninstalling</keyword>
 <keyword>prerequisites</keyword>
 </metadata>
</prolog>
```

### Missing Terms

If you enter multiple search terms (other than *stop words*), for any result that the search engine found at least one term but not one or more of the other terms, the **Missing** terms will be listed below each result.

### Search Page Components

The layout components displayed in the search page are:

#### Publication Title

The title of the publication. It is usually taken from the DITA map title.

## Logo

Displays a logo associated with the publication. Additionally you can set a target URL that will be opened when you click on the logo image.

The logo image can be specified using the [webhelp.logo.image transformation parameter](#). For target URL use the [webhelp.logo.image.target.url parameter](#).

## Menu

Helps you to navigate to your documentation. This component presents a set of links to all topics from your publication. For information about customizing the menu, see [How to Customize the Menu](#) on page 903 topic.

## Index terms link

Presents a link to the index terms page. You can control if this component is displayed by using the [webhelp.show.indexterms.link parameter](#).

## Search query input

Input text field allowing you to easily enter your search queries.

## Search results area

This section is where the search results are displayed.

## Page Footer

WebHelp Responsive output footer.

### Index Terms Page

The *Index Terms Page* page consists of an index terms section along with various other additional components, such as a title, menu, or search field.

An alphabet that contains the first letter of the documentation index terms is generated at the top of the index page. Each letter represents a link to a specific indices section. The indexes are presented in multiple columns to make it easier to read this page.

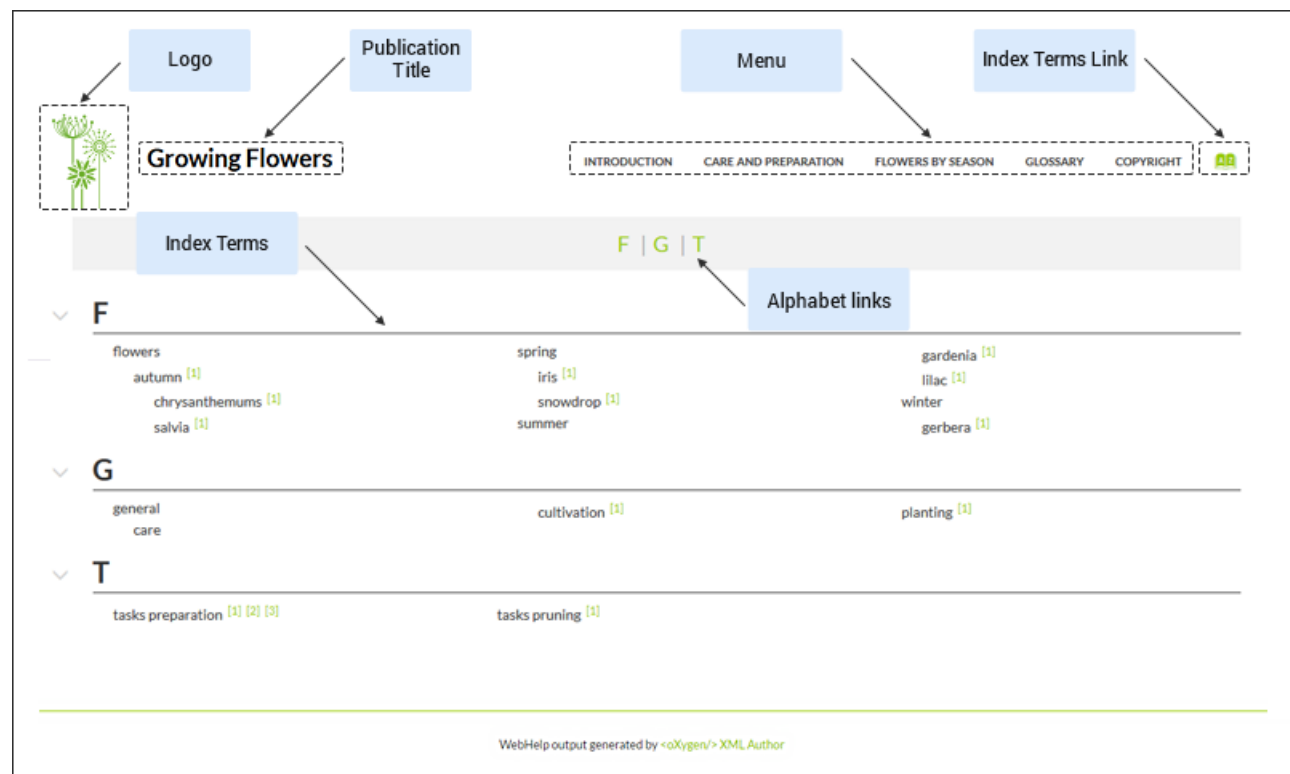


Figure 428: Index Terms Page

## Index Terms Page Components

The layout components displayed in this page are:

### Publication Title

The title of the publication. It is usually taken from the DITA map title.

### Logo

Displays a logo associated with the publication. Additionally you can set a target URL that will be opened when you click on the logo image.

The logo image can be specified using the [webhelp.logo.image transformation parameter](#). For target URL use the [webhelp.logo.image.target.url parameter](#).

### Menu

Helps you to navigate to your documentation. This component presents a set of links to all topics from your publication. For information about customizing the menu, see [How to Customize the Menu](#) on page 903 topic.

### Index terms link

Presents a link to the index terms page. You can control if this component is displayed by using the [webhelp.show.indexterms.link parameter](#).

### Index Terms Alphabet

An alphabet that contains the first letter of index terms. Each letter represents a link to a specific indices section.

### Index Term First Letter

The first letter of the index.

### Page Footer

WebHelp Responsive output footer.

### Search Engine

Search engine has two main components:

#### Search indexer

It is also known as a **spider**. This component is active when you publish your documentation to WebHelp and it is responsible for creating the *search index*. This component traverses all HTML pages (for DITA topics) to gather information.

#### Search interface

This component is an interface between the user and the *search index*. It helps the user to search through the *search index* and displays results in the search page.

### Search Rules

Rules that are applied during a search include:

- You can use quotes to perform an exact search for multiple word phrases (for example, "grow flowers" will only return results if both words are found consecutively and exactly as they are typed in the search field). This type of search is known as a *phrase search*.
- *Boolean Search* is supported using the following operators: *and*, *or*, *not*. When there are two adjacent search terms without an operator, *or* is used as the default search operator (for example, *grow flowers* is the same as *grow or flowers*).
- The space character separates keywords (an expression such as *grow flowers* counts as two separate keywords: *grow* and *flowers*).
- *indexterm* and *keywords* DITA elements are an effective way to increase the ranking of a page (for example, content inside a *keywords* element weighs more than an *H1* HTML element).
- Words composed by merging two or more words with colon (":"), minus ("-"), underline ("\_"), or dot (".") characters count as a single word.
- Your search terms should contain two or more characters (note that stop words will be ignored). This rule does not apply to CJK (Chinese, Japanese, Korean) languages.

## 5-Star Rating Mechanism and Sorting

The **Search** feature is also enhanced with a rating mechanism that computes scores for every result that matches the search criteria. These scores are then translated into a 5-star rating scheme and the stars are displayed to the right of each result. The search results are sorted depending on the following:

- Search entries that satisfy the phrase search criterion are presented first.
- The number of keywords found in a single page (the higher the number, the better).
- The context (for example, a word found in a title scores better than a word found in unformatted text). The search ranking order, sorted by relevance is as follows:
  - The search term is included in a meta keyword
  - The search term is in the title of the page
  - The search term is in bold text in a paragraph
  - The search term is in normal text in a paragraph

## Tag Element Scoring Values

HTML tag elements are also assigned a scoring value and these values are evaluated for the search results. For information about editing these values, see [How to Change Element Scoring in Search Results](#) on page 910.

## Excluded Terms

To improve performance, the **Search** feature excludes certain *stop words*. For example, the English version of such *stop words* include: *a, an, and, are, as, at, be, but, by, for, if, in, into, is, it, no, not, of, on, or, such, that, the, their, then, there, these, they, this, to, was, will, with*.

## Feedback System

The **WebHelp Responsive with Feedback** variant contains a **Comments** section at the bottom of each topic. This section is where you can interact with users through a comment system. For information about deploying a feedback-enabled system, see [Deploying a Feedback-Enabled System](#) on page 864.

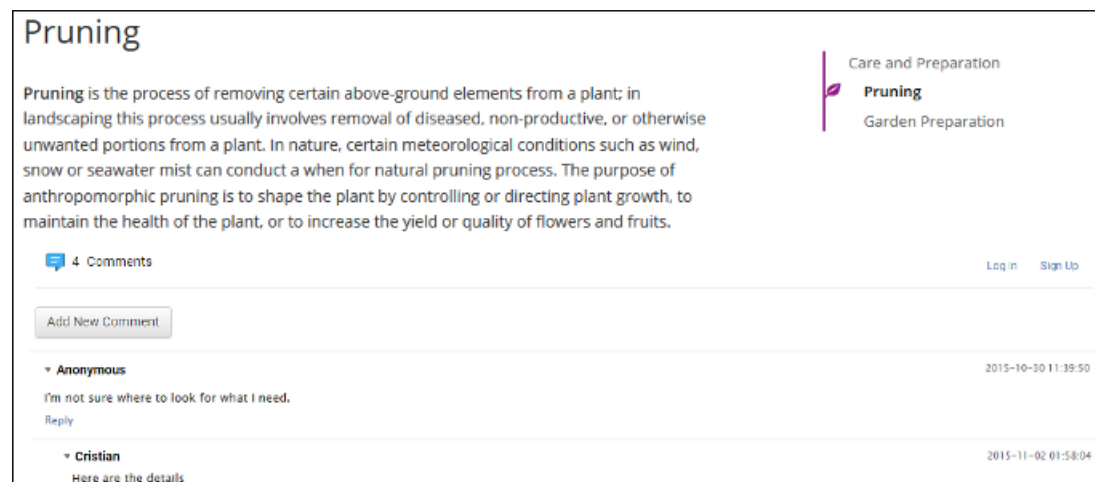


**Figure 429: WebHelp Responsive with Feedback Comments Section**

To add a new comment, click the **Add New Comment** button, or click **Reply** to add a comment to an existing thread. You can click on the **Log in** button on the right side of this bar to be authenticated as a user and your user name will be included in any comments that you add. If you do not have a user name, you can click on the **Sign Up** button to create a new user.

After you log in, your name and user name are displayed in the **Comments** bar, along with the **Log off** and **Edit** buttons. Click the **Edit** button to open the **User Profile** dialog box where you can customize the following options:

- **Your Name** - You can use this field to edit the initial name that you used to create your user profile.
- **Your email address** - You can use this field to edit the initial email address that you used to create your profile.
- You can choose to receive an email in the following situations:

- When a comment is left on a page that you commented on.
- When a comment is left on any topic in the WebHelp Classic system.
- When a reply is left to one of my comments.
- **New Password** - Allows you to enter a new password for your user account.

**Note:** The **Current Password** field from the top of the **User Profile** is mandatory if you want to save the changes you make.

If you are an administrator, you can manage user information and comments. For more information, see [Managing Users and Comments in a Feedback-Enabled System](#) on page 866.

#### Related Information:

[Deploying a Feedback-Enabled System](#) on page 864

*Deploying a Feedback-Enabled System*

### System Requirements

The feedback-enabled WebHelp system requires a standard server deployment. You can request this from your server administrator and it requires the following system components:

- A Web server (such as *Apache Web Server*)
- A *MySQL* or *MariaDB* database server
- A database admin tool (such as *phpMyAdmin*)
- PHP Version 5.1.6 or later

The WebHelp system supports most of the recent versions of the following browsers: Chrome, Firefox, Edge, Internet Explorer, Safari, Opera.

### Create WebHelp with Feedback Database

The **WebHelp with Feedback** system needs a database to store user details and the actual feedback, and a user added to it with all privileges. After this is created, you should have the following information:

- Database name
- Username
- Password

Exactly how you create the database and user depends on your web host and your particular needs.

#### Example:

The following procedure uses *phpMyAdmin* to create a MySQL database for the feedback system and a MySQL user with privileges for that database. The feedback system uses these credentials to connect to the database.

Using *phpMyAdmin* to create a database:

1. Access the *phpMyAdmin* instance running on your server.
2. Click *Databases* (in the right frame) and then create a *database*. You can give it any name you want (for example *comments*).
3. Create a user with connection privileges for this database.
4. Under *localhost*, in the right frame, click *Privileges* and then at the bottom of the page click the **reload the privileges** link.

### Deploying the WebHelp with Feedback Output

If you have a web server configured with PHP and MySQL, you can deploy the **WebHelp with Feedback** output by following these steps:

1. Connect to your server using an FTP client.
2. Locate the home directory (from now on, referred to as *DOCUMENT\_ROOT*) of your server.
3. Copy the transformation output folder into the *DOCUMENT\_ROOT* folder.
4. Rename it to something relevant (for example, *myProductWebHelp*).

5. Open the output folder (for example, `http://[YOUR_SERVER]/myProductWebHelp/`). You are redirected to the installation wizard. Proceed with the installation as follows:
  - a. Verify that the prerequisites are met.
  - b. Press **Start Installation**.
  - c. Configure the **Deployment Settings** section. Default values are provided, but you should adjust them as needed.

**Tip:** You can change some of the options later. The installation creates a `config.php` file in `[OXYGEN_WEBHELP_INSTALL_DIR]/feedback/resources/php/config/config.php` where all your configuration options are stored.

- d. Configure the **MySQL Database Connection Settings** section. Use the information (database name, username, password) from the [Create WebHelp with Feedback Database section](#) to fill-in the appropriate text boxes.



**Warning:** Selecting the **Create new database structure** option will overwrite any existing data in the selected database, if it already exists. Therefore, it is useful the first time you install the **WebHelp with Feedback** system, but you do not want to select this option on subsequent deployments.

- e. If you are using a domain (such as *OpenLDAP* or *Active Directory*) to manage users in your organization, select the **Enable LDAP Authentication** option. This will allow you to configure the LDAP server, which will provide information and credentials for users who will access the WebHelp system. Also, this will allow you to choose which of the domain users will have administrator privileges.
- f. If the **Create new database structure** option is selected, the **Create WebHelp Administrator Account** section becomes available. Here you can set the administrator account data. The administrator is able to moderate new posts and manage WebHelp users.

The same database can be used to store comments for multiple **WebHelp with Feedback** deployments. If a topic is available in multiple deployments and there are comments associated with it, you can choose to display the comments in all deployments that share the database. To do this, select the **Display comments from other products** option. In the **Display comments from** section, a list with the deployments sharing the same database is displayed. Select the deployments allowed to share common feedback.

**Note:** You can restrict the displayed comments of a product depending on its version. If you have two products that use the same database and you restrict one of them to display comments starting from a certain version, the comments of the other product are also displayed from the specified version onwards.

- g. Press **Next Step**.
- h. Remove the installation folder from your web server.

**Important:** When you publish subsequent iterations of your **WebHelp with Feedback** system, you will not upload the `/install` folder in the output, as you only need it uploaded the first time you create the installation. On subsequent uploads, you will just upload the other output files.

- i. In your Web browser, go to your **WebHelp with Feedback** system main page.

## Testing Your WebHelp with Feedback System

To test your system, create a user and post a comment. Check to see if the notification emails are delivered to your email inbox.

**Note:** To read debug messages generated by the system:

1. Enable *JavaScript* logging by doing one of the following:
  - Open the `log.js` file, locate the `var log= new Log(Level.NONE);` line, and change the logging level to: `Level.INFO`, `Level.DEBUG`, `Level.WARN`, or `Level.ERROR`.
  - Append `?log=true` to the WebHelp URL.
2. Inspect the PHP and Apache server log files.

## Documentation Product ID and Version

When you run a **WebHelp with Feedback** transformation scenario, by default you are prompted for a documentation product ID and version number. This is needed when multiple WebHelp systems are deployed on the same server. Think of your WebHelp output as a *product*. If you have three different WebHelp outputs, you



have three different *products* (each with their own unique documentation product ID). This identifier is included in a configuration file so that comments are tied to a particular output (product ID and version number).

**Note:** The **WebHelp with Feedback** installation includes a configuration option (**Display comments from other products**) that allows you to choose to have comments visible in other specified *products*.

#### Related Information:

[Managing Users and Comments in a Feedback-Enabled System](#) on page 866

### Refreshing the Content of a Feedback-Enabled System

It is common to update the content of an existing installation of a **WebHelp with Feedback** system on a regular basis. In this case, reinstalling the whole system is not a viable option since it might result in the loss of the comments associated with your topics. Also, reconfiguring the system every time you want to refresh it may be time consuming.

Fortunately, you can refresh just the content without losing the comments or the initial system configuration. To do so, follow these steps:


1. Execute the transformation scenario that produces the *WebHelp with Feedback* output directory.
2. Go to the output directory (specified in the **Output** tab of the transformation scenario), locate the \feedback\resources\php\config\config.php file, and delete it.
3. Locate the \feedback\install directory and delete it.
4. Copy the remaining structure of the output folder and paste it into your *WebHelp with Feedback* system installation directory, overwriting the existing content.

### Managing Users and Comments in a Feedback-Enabled System

When you installed the **WebHelp with Feedback** system the first time (assuming the [Create new database structure option](#) was selected), you should have been prompted to create an administrator account (or a user named *administrator* was created by default). As an administrator, you have access to manage comments posted in your feedback-enabled WebHelp system. You can also manage the user information (such as role, status, or notification options).

To manage comments and user information, follow these steps:

1. At the bottom of each specific topic there is a **Comments** navigation bar and on the right side there is a **Log in** button. Click this button and log in with your administrator credentials. This gives you access to an **Admin Panel** button.
2. Click the **Admin Panel** button to display an administration page.

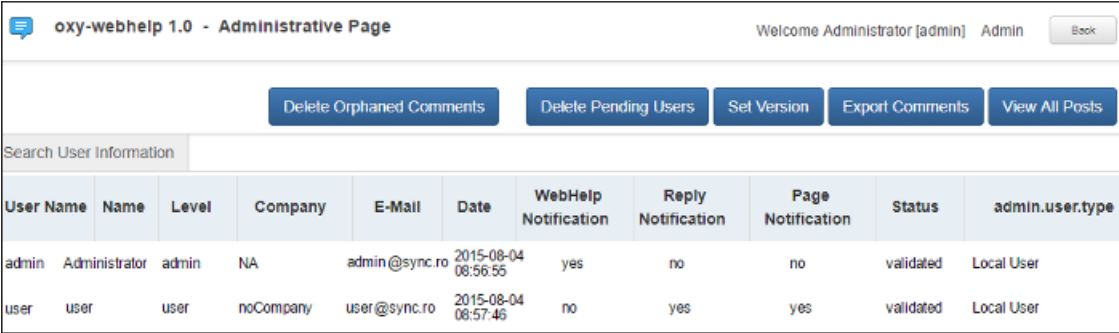

| User Name | Name          | Level | Company   | E-Mail        | Date                | WebHelp Notification | Reply Notification | Page Notification | Status    | admin.user.type |
|-----------|---------------|-------|-----------|---------------|---------------------|----------------------|--------------------|-------------------|-----------|-----------------|
| admin     | Administrator | admin | NA        | admin@sync.ro | 2015-08-04 08:56:55 | yes                  | no                 | no                | validated | Local User      |
| user      | user          | user  | noCompany | user@sync.ro  | 2015-08-04 08:57:46 | no                   | yes                | yes               | validated | Local User      |

**Figure 430: Administrative Page**

3. Use this page to manage the following options:

#### Delete Orphaned Comments

Allows you to delete comments that are no longer associated with a topic in your WebHelp system.

#### Delete Pending Users

Allows you to delete user accounts that you do not wish to activate.

#### View All Posts

Allows you to view all the comments that are associated with topics in your WebHelp system.



## Export Comments

Allows you to export all posts associated with topics in your WebHelp system into an XML file.

## Set Version

Use this action to display comments starting with a particular version.

## Manage User Information

To edit the details for a user, click on the corresponding row. This opens a window that allows you to customize the following information associated with the user:

### Name

The full name of the user.

### Level

Use this field to modify the privilege level (role) for the selected user. You can choose from the following:

- **User** - Regular user, able to post comments and receive e-mail notifications.
- **Moderator** - In addition to the regular **User** rights, this type of user has access to the **Admin Panel** where a moderator can view, delete, export comments, and set the version of the feedback-enabled WebHelp system.
- **Admin** - Full administrative privileges. Can manage WebHelp-specific settings, users, and their comments.

### Company

The name of the organization associated with the user.

### E-Mail

The contact email address for the user. This is also the address where the WebHelp system sends notifications.

### WebHelp Notification

When selected, the user receives notifications when comments are posted anywhere in your feedback-enabled WebHelp system.

### Reply Notification

When selected, the user receives notifications when comments are posted as a reply to one of their comments.

### Page Notification

When selected, the user receives notifications when comments are posted on a topic where they previously posted a comment.

### Date

The date the user registered is displayed.

### Status

Use this drop-down list to change the status of the user. You can choose from the following:

- **Created** - The user is created but does not yet have any rights for the feedback-enabled WebHelp system.
- **Validated** - The user is able to use the feedback-enabled WebHelp system.
- **Suspended** - The user has no rights for the feedback-enabled WebHelp system.



**Warning:** The key used for identifying the page a comment is attached to is the relative file path to the output page. Since the output file and folder names mirror the source, any change to the file name (or its folder) in the source will affect the comments associated with that WebHelp page. If you change the file name or path, the comment history for that topic will become orphaned (a change to the topic ID does not affect the comment history).

## Context-Sensitive Help System

Context-sensitive help systems assist users by providing specific informational topics for certain components of a user interface, such as a button or window. This mechanism works based on mappings between a unique ID defined in the topic and a corresponding HTML page.

## Generating Context-Sensitive Help

When WebHelp Responsive output is generated, the transformation process produces an XML mapping file called `context-help-map.xml` and copies it in the output folder of the transformation. This XML file maps an ID to a corresponding HTML page through an `appContext` element, as in the following example:

```
<map productID="oxy-webhelp" productVersion="1.1">
 <appContext helpID="myapp-functionid1" path="tasks/app-help1.html"/>
 <appContext helpID="myapp-functionid2" path="tasks/app-help1.html"/>
</map>
```

The possible attributes are as follows:

### helpID

A Unique ID provided by a topic from two possible sources (`resourceid` element or `id` attribute):

#### resourceid

The `resourceid` element is mapped into the `appContext` element and can be specified in either the `topicref` within a *DITA map* or in a *prolog* within a DITA topic. The `resourceid` element accepts the following attributes:

- **appname** - A name for the external application that references the topic. If this attribute is not specified, its value is considered to be empty ("").
- **appid** - An ID used by an application to identify the topic.
- **id** - Specifies a value that is used by a specific application to identify the topic, but this attribute is ignored if an **appid** attribute is used.

**Note:** Multiple `appid` values can be associated with a single `appname` value (and multiple `appname` values can be associated with a single `appid` value), but the values for both attributes work in combination to specify a specific ID for a specific application, and therefore each combination of values for the `appid` and `appname` attributes should be unique within the context of a single *root map*. For example, suppose that you need two different functions of an application to both open the same WebHelp page.

#### Example: resourceid Specified in a DITA Map

The `resourceid` element can be specified in a `topicmeta` element within a `topicref`.

```
<map title="App Help">
 <topicref href="app-help1.dita" type="task">
 <topicmeta>
 <resourceid appname="myapp" appid="functionid1"/>
 <resourceid appname="myapp" appid="functionid2"/>
 </topicmeta>
 </topicref>
</map>
```

#### Example: resourceid Specified in a DITA Topic

The `resourceid` element can be specified in a *prolog* element within a DITA topic.

```
<task id="app-help1">
 <title>My App Help</title>
 <prolog>
 <resourceid appname="myapp" appid="functionid1"/>
 <resourceid appname="myapp" appid="functionid2"/>
 </prolog>
 ...
</task>
```

For more information about the `resourceid` element, see [DITA Specifications: <resourceid>](#).

### id

If a `resourceid` element is not declared in the *DITA map* or DITA topic (as described above), the `id` attribute that is set on the topic root element is mapped into the `appContext` element.

**Important:** You should ensure that these defined IDs are unique in the context of the entire DITA project. If the IDs are not unique, the transformation scenario will display warning messages in the transformation console output and the help system will not work properly.

## path

The path to a corresponding WebHelp page. This path is relative to the location of the context-help-map.xml mapping file.

## productID (Applicable only if you are using the WebHelp Responsive with Feedback transformation scenario)

The ID of the product for your documentation project.

## productVersion (Applicable only if you are using the WebHelp Responsive with Feedback transformation scenario)

The version of the product for your documentation project.

There are two ways of implementing context-sensitive help in your system:

- The XML mapping file can be loaded by a PHP script on the server side. The script receives the contextId value and will look it up in the XML file.
- Invoke the index.html WebHelp system file and pass the contextId parameter with a specific value. The WebHelp system will automatically open the help page associated with the value of the contextId parameter.

```
index.html?contextId=myDITATopic
```

**Note:** The contextId parameter is not case sensitive.

## Context-Sensitive Queries

You can use the URL field in your browser to search for topics in a context-sensitive WebHelp system with the assistance of the following parameters:

- **contextId** - The WebHelp JavaScript engine will look for this value in the context-help-map.xml mapping file and load the corresponding help page.

**Note:** You can use an [anchor](#) in the contextId parameter to jump to a specific section in a document. For example, contextId=topicID#anchor.

- **appname** - You can use this parameter in conjunction with contextId to search for this value in the corresponding appname attribute value in the mapping file.

```
http://localhost/webhelp/index.html?contextId=topicID&appname=myApplication
```

Another parameter indicates the search query:

- **searchQuery** - You can use this parameter to perform a search operation when WebHelp is loaded. For example, if you want to open WebHelp showing all search results for *growing flowers*, the URL should look like this: `http://localhost/webhelp/index.html?searchQuery=growing%20flowers`.

## Publishing Templates

An *Oxygen Publishing Template* defines all aspects of the layout and styles for **WebHelp Responsive** output. It is a self-contained customization package stored as a ZIP archive or folder that can easily be shared with others. It provides the primary method for customizing the output.

Some possible customizations include:

- Add additional template resources to customize the output (such as logos, favicons, or CSS files).
- Change the layout of the main page or topic pages by customizing which components will be displayed and where they will be positioned in the page.
- Extend the default processing by specifying one or more XSLT extension points.
- Specify one or more transformation parameters to customize the output.

The following graphic is sample structure for an *Oxygen Publishing Template* package:

|                                             |                            |
|---------------------------------------------|----------------------------|
| publishing template                         |                            |
| CSS                                         |                            |
| oxygen-skin.css                             | Resources (CSS, JS, Fonts) |
| JS                                          |                            |
| fonts                                       |                            |
| HTML-Fragments                              |                            |
| webhelp.fragment.footer.html                | HTML fragments             |
| webhelp.fragment.before.logo_and_title.html |                            |
| XSLT-Extensions                             |                            |
| topic_page_extension.xsl                    | XSLT Extensions            |
| page-templates                              |                            |
| wt_index.html                               | HTML Page Layout Files     |
| wt_search.html                              |                            |
| wt_topic.html                               |                            |
| wt_terms.html                               |                            |
| template_descriptor.opt                     | Template Descriptor        |

**Figure 431: Oxygen Publishing Template Package**

#### Related Information:

[How to Create a Publishing Template](#) on page 898

[How to Edit a Publishing Template](#) on page 898

[How to Add a Publishing Template to the Publishing Templates Gallery](#) on page 898

[How to Use a Publishing Template from Command Line](#) on page 898

### Publishing Templates Gallery


Oxygen XML Developer comes bundled with a variety of built-in templates. You can use one of them to publish your documentation or as a starting point for a new publishing template.

#### Built-in Templates

There are two categories of templates, *Tiles* and *Tree*. You can see the built-in templates in the **Templates** tab when editing a WebHelp Responsive transformation scenario in **Oxygen XML Editor/Author**. Each one also includes an **Online preview** link that opens a webpage in your default browser that provides a sample of how the main page will look when that particular template is used to generate the output.


#### Tiles Templates

The main page in the WebHelp output presents a tile for each main topic (chapter) of the documentation.

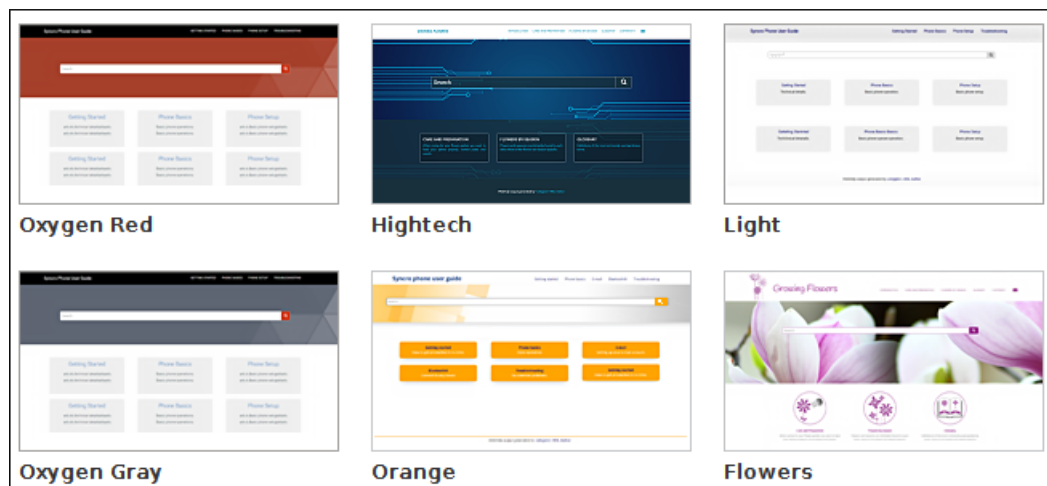

## Tree Templates

The main page in the WebHelp output presents a tree-like table of contents.

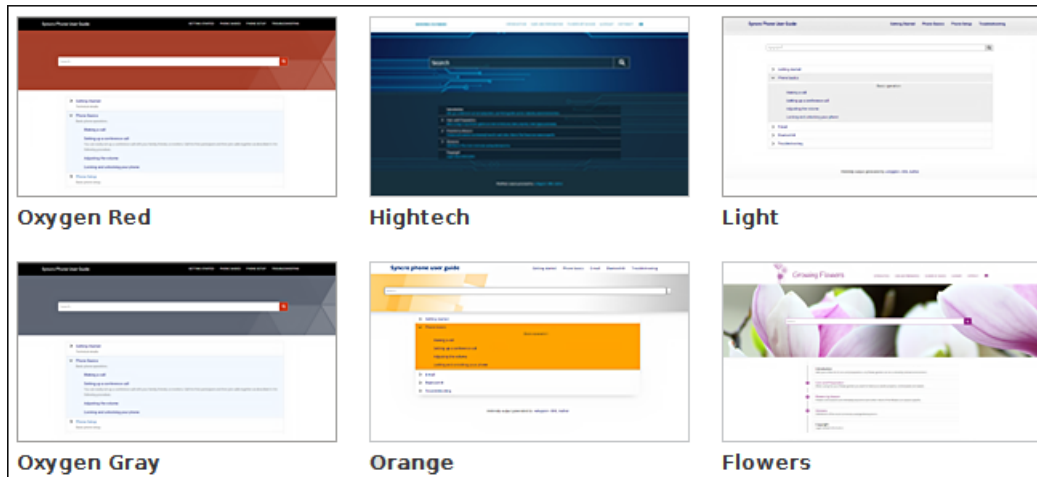

## Built-in Templates Location

All built-in templates are stored in the following directory: *DITA-OT-DIR*/plugins/com.oxygenxml.webhelp.responsive/templates.

## Custom Templates

You can use a built-in template as a starting point for [creating your own custom template](#). You can store all of your custom templates in a particular directory. Then, go to **Options > Preferences > DITA > Publishing** and add your directory to the list, and all the templates stored in that directory will be displayed in the preview pane in the transformation scenario's **Template** tab along with all the built-in templates.

## Sharing Publishing Template

To share a publishing template with others, following these steps:

1. Copy your template in a new folder.
2. Go to **Options > Preferences > DITA > Publishing** and add that new folder to the list.
3. Switch the option as the bottom of that preferences page to **Project Options**.
4. Share your project file (.xpr).

## Publishing Template Package Contents

An *Oxygen Publishing Template* package must contain a template descriptor file and some other resources (such as CSS files). All the template resources can be stored in either a ZIP archive or in a folder. It is recommended to use a ZIP archive because it is easier to share with others.

### Template Descriptor File

Each publishing template includes a descriptor file that defines the meta-data associated with template. It is an XML file that defines all the resources included in a template (such as HTML page layout files, CSS, JS, fonts, and transformation parameters).

The template descriptor file must have the .opt file extension and must be located in the templates' root folder.

A template descriptor might look like this:

```
<publishing-template>
 <name>Flowers</name>

 <webhelp>
 <tags>
 <tag>tree</tag>
 <tag>light</tag>
 </tags>
 <preview-image file="flowers-tree.png" />
 </webhelp>
</publishing-template>
```

```

 <!-- Resources (CSS, favicon, logo and others) -->
 <resources>
 <!-- Main CSS file -->
 <css file="flowers.css"/>

 <!-- Resources to copy to the output folder -->
 <fileset>
 <include name="resources/**/*"/>
 <exclude name="resources/**/*.svn"/>
 <exclude name="resources/**/*.git"/>
 </fileset>
 </resources>

 <parameters>
 <parameter name="webhelp.show.main.page.tiles" value="no"/>
 <parameter name="webhelp.show.main.page.toc" value="yes"/>
 <parameter name="webhelp.top.menu.depth" value="3"/>
 </parameters>
 </webhelp>
</publishing-template>

```

**Tip:** It is recommended to edit the template descriptor in **Oxygen XML Editor/Author** because it provides content completion and validation support.

## Template Name and Description

Each template descriptor file requires a **name** element. This information is displayed as the name of the template in the transformation scenario dialog box.

Optionally, you can include a **description** and it displayed when the user hovers over the template in the transformation scenario dialog box.

```

<publishing-template>
 <name>Lorem Ipsum</name>
 <description>Lorem ipsum dolor sit amet, consectetur adipiscing elit</description>
 ...

```

## Template Author

Optionally, you can include author information in the descriptor file and it displayed when the user hovers over the template in the transformation scenario dialog box. This information might be useful if users run into an issue or have questions about a certain template.

If you include the **author** element, a **name** is required and optionally you can include **email**, **organization**, and **organizationUrl** information.

```

<publishing-template>
 ...
 <author>
 <name>John Doe</name>
 <email>jdoe@example.com</email>
 <organization>ACME</organization>
 <organizationUrl>http://www.example.com/jdoe</organizationUrl>
 </author>
 ...

```

## Webhelp Element

The **webhelp** element contains various details that define the WebHelp Responsive output. The elements that are allowed in this **webhelp** section specify the [template tags](#), [template preview image](#), [resources](#) (such as CSS, JS, fonts, logos), [HTML page layout files](#), [transformation parameters](#), [HTML fragment extensions](#) (used to add fragments to placeholders), or [XSLT extensions](#).

```

<webhelp>
 <tags>
 ...
 </tags>
 <preview-image file="MyPreview.png"/>

 <resources>
 ...
 </resources>

 <html-page-layouts>
 ...
 </html-page-layouts>

```

```

<parameters>
...
</parameters>
</webhelp>

```

## Template Tags

The **tags** section provides meta information about the template (such as layout type or color theme). Each **tag** is displayed at the top of the **Templates** tab window in the transformation scenario dialog box and they help the user filter and find particular templates.

```

<publishing-template>
...
<webhelp>
<tags>
 <tag>tree</tag>
 <tag>dark</tag>
</tags>

```

## Template Preview Image

The **preview-image** element is used to specify an image that will be displayed in the transformation scenario dialog box. It provides a visual representation of the template to help the user select the right template. The image dimensions should be 200 x 115 pixels and the supported image formats are: JPEG, PNG, or GIF.

You can also include an **online-preview-url** element to specify the URL of a published sample of your template. This will display an **Online preview** link inside the image in the transformation scenario dialog box and if the user clicks that link, it will open the specified URL in their default browser.

```

<publishing-template>
...
<webhelp>
...
<preview-image file="ashes/ashes-tree.png"/>
<online-preview-url=https://www.example.com/samples/tiles/ashes</online-preview-url>

```

## Template Resources

The **resources** section of the descriptor file specifies a set of resources (CSS, JS, fonts, logos, etc.) that are used to customize various components in generated output. These resources will be copied to the output folder during the transformation process. At least one CSS file must be included, while the other types of resources are optional.

The types of resources that can be specified include:

- **CSS files** - One or more CSS files that will define the styles of all generated HTML pages.
- **Favicon** - You can specify the path to an image for the *favicon* associated with your website.
- **Logo** - You can specify the path to a logo image that will be displayed in the left side of the output header. Optionally, you can also specify a **target-url** that will redirect the user to the specified URL if they click the logo in the output.
- **Additional Resources (JS, Fonts)** - You can specify one or more sets of additional resources that will be copied to the output folder during the transformation process. These resources are specified with the **fileset** element and you can use one or more **include** and **exclude** elements. This semantic is similar to the [ANT FileSet](#).

```

<publishing-template>
...
<webhelp>
...
<resources>
 <css file="css/custom_styles.css"/>
 <css file="css/custom_fonts.css"/>

 <favicon file="images/favicon.png"/>

 <logo
 file="images/logo.png"
 target-url="http://www.example.com" />

 <fileset>
 <include name="common/**/*"/>
 <include name="JS/**/*"/>
 <exclude name="**/*.svn"/>
 </fileset>

```



```

 <exclude name="**/*.git"/>
 </fileset>
</resources>

```

**Note:** All relative paths specified in the descriptor file are relative to the template root folder.

The resources specified in the template descriptor are copied to the following output folder: `[WebHelp_OUTPUT_DIR]/oxygen-webhelp/template`. The following graphic illustrates the mapping between the template resources and the location where they will be copied to the output folder:

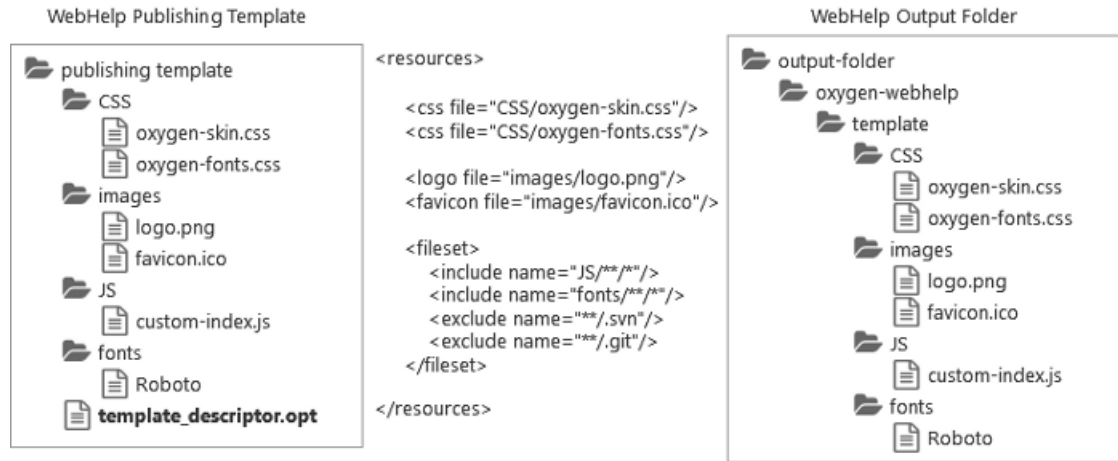


**Figure 432: Template Resources Mapping**

### HTML Page Layout Files

The HTML page layout files define the layout of the generated pages in the output. There are four types of pages (*main*, *search*, *topic*, *index*) and each type of page is a simple HTML file. Each type of page is defined inside an **html-page-layout-files** element in the descriptor file.

```

<publishing-template>
...
<webhelp>
...
<!-- HTML page layout files -->
<html-page-layout-files>
 <page-layout-file page="main" file="page-templates/wt_index.html"/>
 <page-layout-file page="search" file="page-templates/wt_search.html"/>
 <page-layout-file page="topic" file="page-templates/wt_topic.html"/>
 <page-layout-file page="index-terms" file="page-templates/wt_terms.html"/>
</html-page-layout-files>

```

These HTML files are not required in the descriptor file, but if you do use the **html-page-layout-files** element, you must specify all four types of pages (*main*, *search*, *topic*, *index*). If you do not specify these HTML page layout files, the files from the `[WebHelp_OUTPUT_DIR]/oxygen-webhelp/page-templates` folder will be used to define the layout of each type of page.

### HTML Page Components

Each type of page contains various components that control the layout of that page. The rendering of each component depends on the context where it is placed and its content depends on the transformed [DITA map](#).

Some of the components can be used in all four types of pages, while some are only available for certain pages. For instance, the *Publication Title* component can be used in all pages, but the *Navigation Breadcrumb* component can only be used in the **Topic Page**.

To include a component in the output of a particular type of page, you have to reference a specific element in that particular HTML file. All the elements associated with a component should belong to the `http://www.oxygenxml.com/webhelp/components` namespace.

Every component can contain custom content or reference another component. To specify where the component content will be located in the output, you can use the `whc:component_content` element as a descendant of



the component element. It can specify the location as before, after, or it can wrap the component content. The following snippet contains an example of each:

```
<whc:webhelp_search_input class="navbar-form wh_main_page_search"
 role="form" >
 <div class="custom-content-before">Enter search terms here:</div>
 <div class="custom-wrapper">
 <whc:component_content/>
 </div>
 <div class="custom-content-after">Results will be displayed in a new window.</div>
</whc:webhelp_search_input>
```

## Main Page

The *Main Page* is the home page generated in the WebHelp Responsive output. The name of the HTML file that defines this page is `wt_index.html` and it is located in the following directory: `[WebHelp_OUTPUT_DIR]/oxygen-webhelp/page-templates`.

The main function of the home page is to display top level information and provide links that help you easily navigate to any of the top level topics of the publication. These links can be rendered in either a *Tiles* or *Tree* style of layout. The HTML page produced for the home page also consists of various other components, such as a logo, title, menu, search field, or index link.

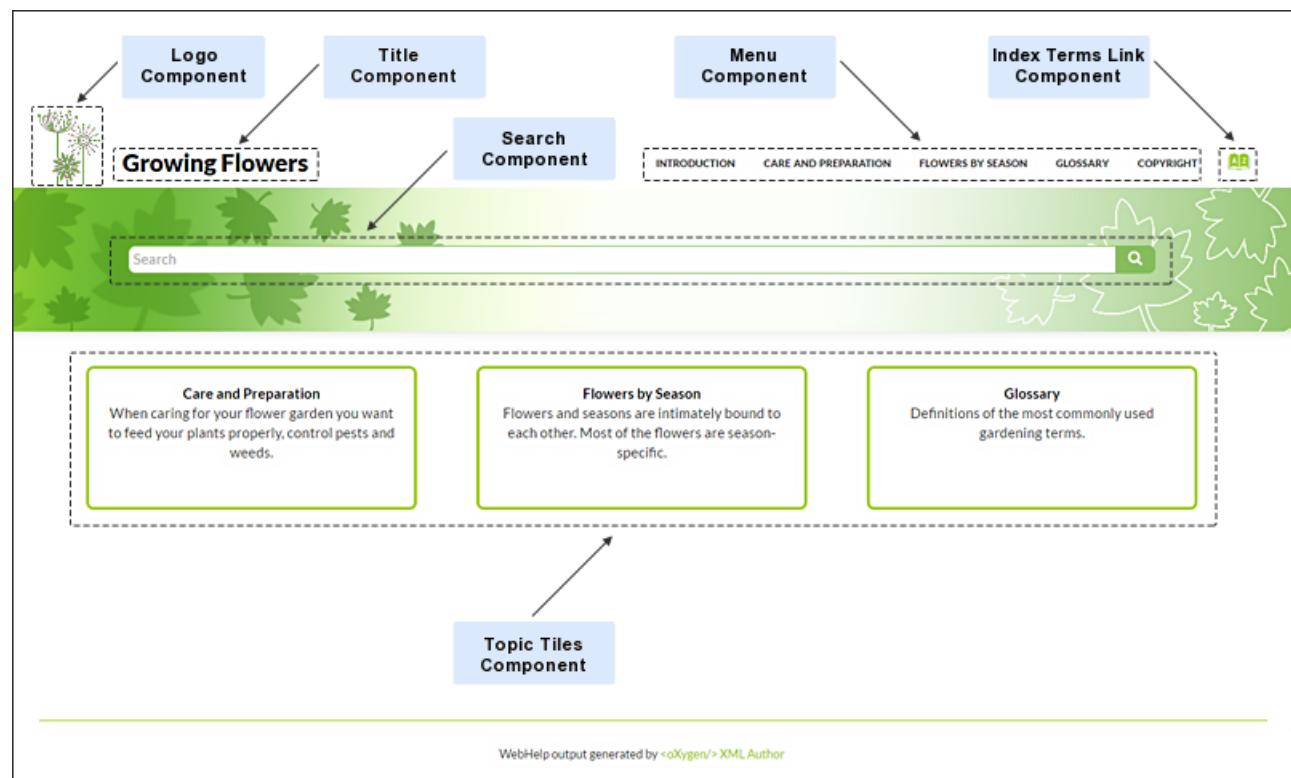


Figure 433: Examples of Main Page Components for a Tiles Style of Layout

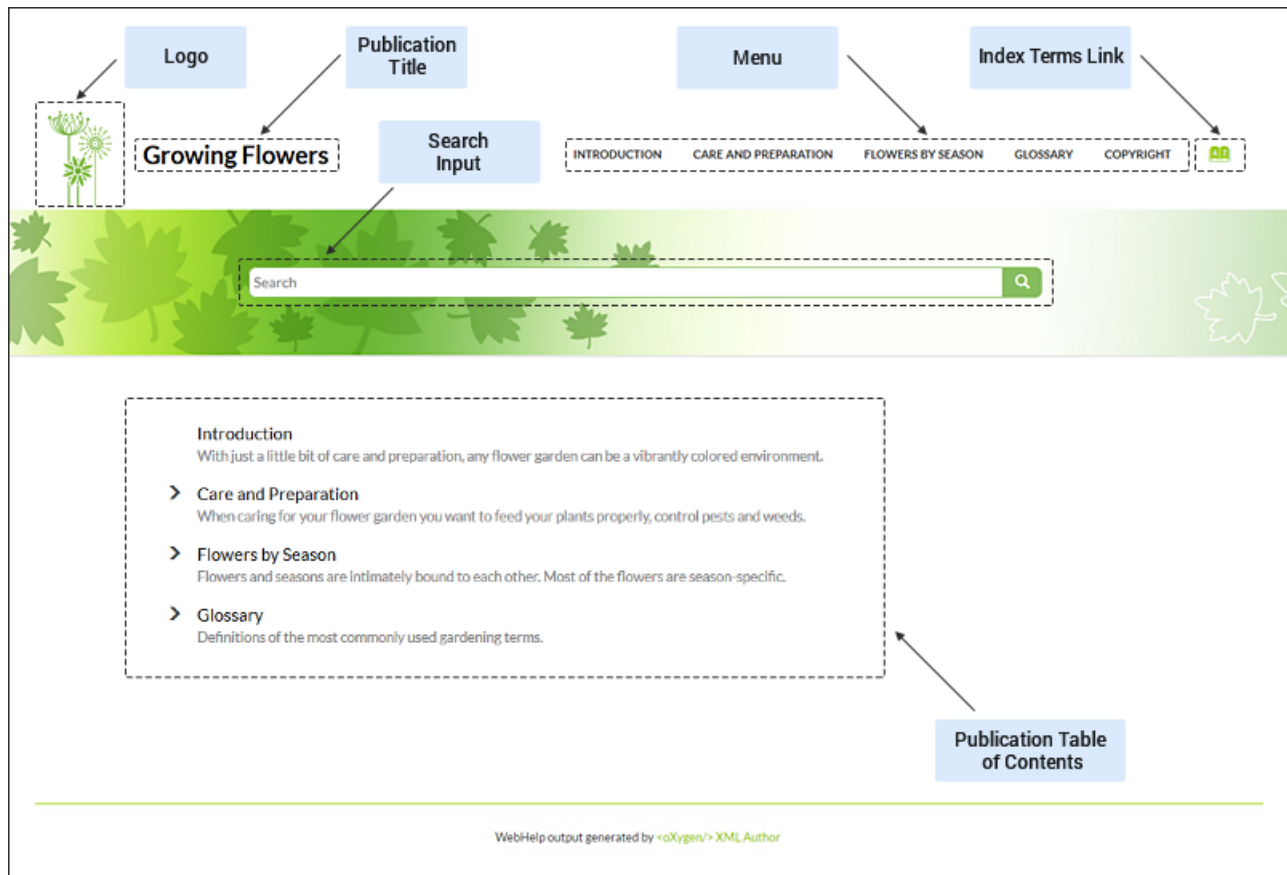


**Figure 434: Examples of Main Page Components for a Tree Style of Layout**

The following components can be referenced in the *Main Page* (wt\_index.html) file:

#### **Publication Title (webhelp\_publication\_title)**

This component generates the publication title in the output. To generate this component, the webhelp\_publication\_title element must be specified in the HTML file as in the following example:

```
<whc:webhelp_publication_title
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```

In the output, you will find an element with the class: wh\_publication\_title.

#### **Publication Logo (webhelp\_logo)**

This component generates a logo image in the output. To generate this component, the webhelp\_logo element must be specified in the HTML file as in the following example:

```
<whc:webhelp_logo
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```

In addition, you must also specify the path of the logo image in the webhelp\_logo.image transformation parameter (in the **Parameters** tab in the transformation scenario). You can set the webhelp\_logo.image.target.url parameter to generate a link to a URL when you click the logo image.

In the output, you will find an element with the class: wh\_logo.

#### **Search Input (webhelp\_search\_input)**

This component is used to generate the input widget associated with search function in the output. To generate this component, the webhelp\_search\_input element must be specified in the HTML file as in the following example:

```
<whc:webhelp_search_input
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```

In the output, you will find an element with the class: `wh_search_input`.

### Print Link (`webhelp_print_link`)

This component is used to generate a print icon that opens the print dialog box for your particular browser. To generate this component, the `webhelp_print_link` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_print_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_print_link`.

### Main Page Menu (`webhelp_topics_menu`)

This component generates a menu with all the documentation topics. To generate this component, the `webhelp_topics_menu` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topics_menu
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_topics_menu`.

You can control the maximum level of topics that will be included in the menu using the `webhelp.top.menu.depth` transformation parameter (in the **Parameters** tab of the transformation scenario).

For information about customizing the menu, see [How to Customize the Menu](#) on page 903.

### Main Page Topic Tiles (`webhelp_tiles`)

This component generates the tiles section in the main page. This section will contain a tile for each root topic of the published documentation. Each topic tile has three sections that corresponds to the topic title, short description, and image. To generate this component, the `webhelp_tiles` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_tiles
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_tiles`.

If you want to control the HTML structure that is generated for a WebHelp tile you can also specify the template for a tile by using the `whc:webhelp_tile` component, as in the following example:

```
<whc:webhelp_tile class="col-md-4">
 <!-- Place holder for tile's image -->
 <whc:webhelp_tile_image/>

 <div class="wh_tile_text">
 <!-- Place holder for tile's title -->
 <whc:webhelp_tile_title/>

 <!-- Place holder for tile's shordesc -->
 <whc:webhelp_tile_shordesc/>
 </div>
</whc:webhelp_tile>
```

For information about customizing the tiles, see [How to Configure the Tiles on the WebHelp Responsive Main Page](#) on page 905.

### Main Page Table of Contents (`webhelp_main_page_toc`)

This component generates a simplified Table of Contents. It is simplified because it contains only two levels from the documentation hierarchy. To generate this component, the `webhelp_main_page_toc` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_main_page_toc
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_main_page_toc`.

## Index Terms Link (webhelp\_indexterms\_link)

This component can be used to generate a link to the index terms page (indexterms.html). If the published documentation does not contain any index terms, then the link will not be generated. To generate this component, the webhelp\_indexterms\_link element must be specified in the HTML file as in the following example:

```
<whc:webhelp_indexterms_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_indexterms\_link. This element will contain a link to the indexterms.html page.

## Link to Skins Resources (webhelp\_skin\_resources)

This component can be used to add a link to resources for the current WebHelp skin (such as the CSS file). To generate this component, the webhelp\_skin\_resources element must be specified in the HTML file as in the following example:

```
<whc:webhelp_skin_resources/>
```

In the output, you will find a link to the skin resources.

## Topic Page

The *Topic Page* is the page generated for each DITA topic in the WebHelp Responsive output. The name of the HTML file that defines this page is wt\_topic.html and it is located in the following directory: [WebHelp\_OUTPUT\_DIR]/oxygen-webhelp/page-templates.

The HTML pages produced for each topic consist of the topic content along with various other additional components, such as a title, menu, navigation breadcrumb, print icon, or side table of contents.

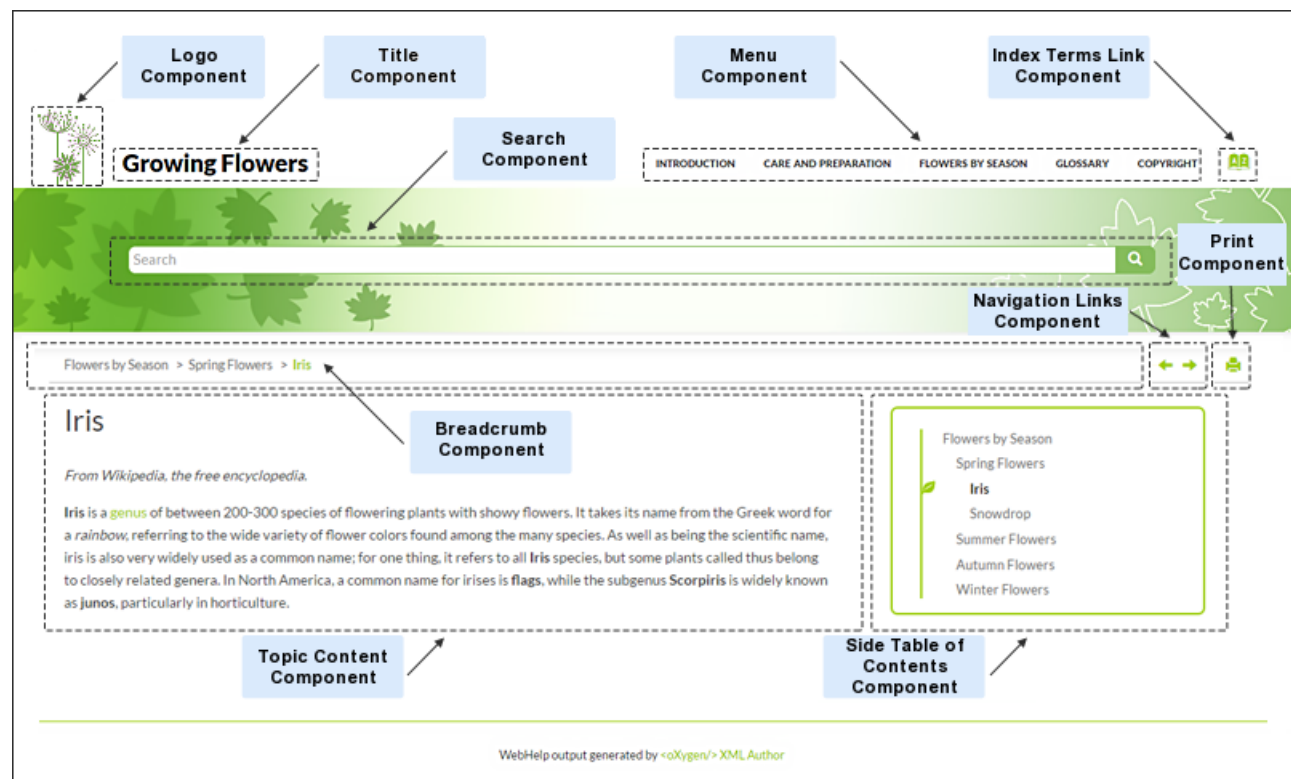


Figure 435: Examples of Topic Page Components

The following components can be referenced in the *Topic Page* (wt\_topic.html) file:

### Publication Title (webhelp\_publication\_title)

This component generates the publication title in the output. To generate this component, the webhelp\_publication\_title element must be specified in the HTML file as in the following example:

```
<whc:webhelp_publication_title
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_publication\_title.

### Publication Logo (webhelp\_logo)

This component generates a logo image in the output. To generate this component, the webhelp\_logo element must be specified in the HTML file as in the following example:

```
<whc:webhelp_logo
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In addition, you must also specify the path of the logo image in the webhelp\_logo.image transformation parameter (in the **Parameters** tab in the transformation scenario). You can set the webhelp\_logo.image.target.url parameter to generate a link to a URL when you click the logo image.

In the output, you will find an element with the class: wh\_logo.

### Search Input (webhelp\_search\_input)

This component is used to generate the input widget associated with search function in the output. To generate this component, the webhelp\_search\_input element must be specified in the HTML file as in the following example:

```
<whc:webhelp_search_input
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_search\_input.

### Topic Breadcrumb (webhelp\_breadcrumb)

This component generates a breadcrumb that displays the path of the current topic. To generate this component, the webhelp\_breadcrumb element must be specified in the HTML file as in the following example:

```
<whc:webhelp_breadcrumb
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_breadcrumb. This element will contain a list with items that correspond to the topics in the path. The first item in the list has a link to the main page with the home class. The last item in the list corresponds to the current topic and has the active class set.

### Navigation Links (webhelp\_navigation\_links)

This component generates navigation links to the next and previous topics. To generate this component, the webhelp\_navigation\_links element must be specified in the HTML file as in the following example:

```
<whc:webhelp_navigation_links
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_navigation\_links. This element will contain the links to the next and previous topics.

### Print Link (webhelp\_print\_link)

This component is used to generate a print icon that opens the print dialog box for your particular browser. To generate this component, the webhelp\_print\_link element must be specified in the HTML file as in the following example:

```
<whc:webhelp_print_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_print\_link.

### Topic Content (webhelp\_topic\_content)

This component generates the content of a topic and it represent the content of the HTML files as they are produced by the DITA-OT processor. To generate this component, the webhelp\_topic\_content element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topic_content
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_topic\_content.

### Publication TOC (webhelp\_publication\_toc)

This component generates a mini table of contents for the current topic (on the left side). It will contain links to the children of current topic, its siblings, and all of its ancestors. To generate this component, the webhelp\_publication\_toc element must be specified in the HTML file as in the following example:

```
<whc:webhelp_publication_toc
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_publication\_toc. This element will contain links to the topics that are close to the current topic.

### Topic TOC (webhelp\_topic\_toc)

This component generates a topic table of contents for the current topic (on the right side). This table of contents contains links to each section within the current topic and the section corresponding to the current scroll position is highlighted. To generate this component, the webhelp\_topic\_toc element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topic_toc
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_topic\_toc. This element will contain links to the topics that are close to the current topic.

### Expand/Collapse Sections (webhelp\_expand\_collapse\_sections)

This component is used to generate an icon that expands or collapses sections listed in the side table of contents within a topic. To generate this component, the webhelp\_expand\_collapse\_sections element must be specified in the HTML file as in the following example:

```
<whc:webhelp_expand_collapse_sections
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: webhelp\_expand\_collapse\_sections.

### Topic Feedback (webhelp\_feedback)

This component generates a placeholder for where the comments section will be presented. To generate this component, the webhelp\_feedback element must be specified in the HTML file as in the following example:

```
<whc:webhelp_feedback
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

### Main Page Menu (webhelp\_topics\_menu)

This component generates a menu with all the documentation topics. To generate this component, the webhelp\_topics\_menu element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topics_menu
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_topics\_menu.

You can control the maximum level of topics that will be included in the menu using the webhelp.top.menu.depth transformation parameter (in the **Parameters** tab of the transformation scenario).

For information about customizing the menu, see [How to Customize the Menu](#) on page 903.

### Index Terms Link (webhelp\_indexterms\_link)

This component can be used to generate a link to the index terms page (indexterms.html). If the published documentation does not contains any index terms, then the link will not be generated. To generate this component, the webhelp\_indexterms\_link element must be specified in the HTML file as in the following example:

```
<whc:webhelp_indexterms_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_indexterms\_link. This element will contain a link to the indexterms.html page.

### Child Links (webhelp\_child\_links)

For all topics with subtopics (child topics), this component generates a list of links to each child topic. To generate this component, the webhelp\_child\_links element must be specified in the HTML file as in the following example:

```
<whc:webhelp_child_links
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

### Related Links (webhelp\_related\_links)

For all topics that contain related links, this component generates a list of related links that will appear in the output. To generate this component, the webhelp\_related\_links element must be specified in the HTML file as in the following example:

```
<whc:webhelp_related_links
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

### Link to Skins Resources (webhelp\_skin\_resources)

This component can be used to add a link to resources for the current WebHelp skin (such as the CSS file). To generate this component, the webhelp\_skin\_resources element must be specified in the HTML file as in the following example:

```
<whc:webhelp_skin_resources/>
```

In the output, you will find a link to the skin resources.

## Search Results Page

The *Search Results Page* is the page generated that present search results in the WebHelp Responsive output. The name of the HTML file that defines this page is wt\_search.html and it is located in the following directory: [WebHelp\_OUTPUT\_DIR]/oxygen-webhelp/page-templates.

The HTML page that is produced consists of a search results component along with various other additional components, such as a title, menu, or index link.



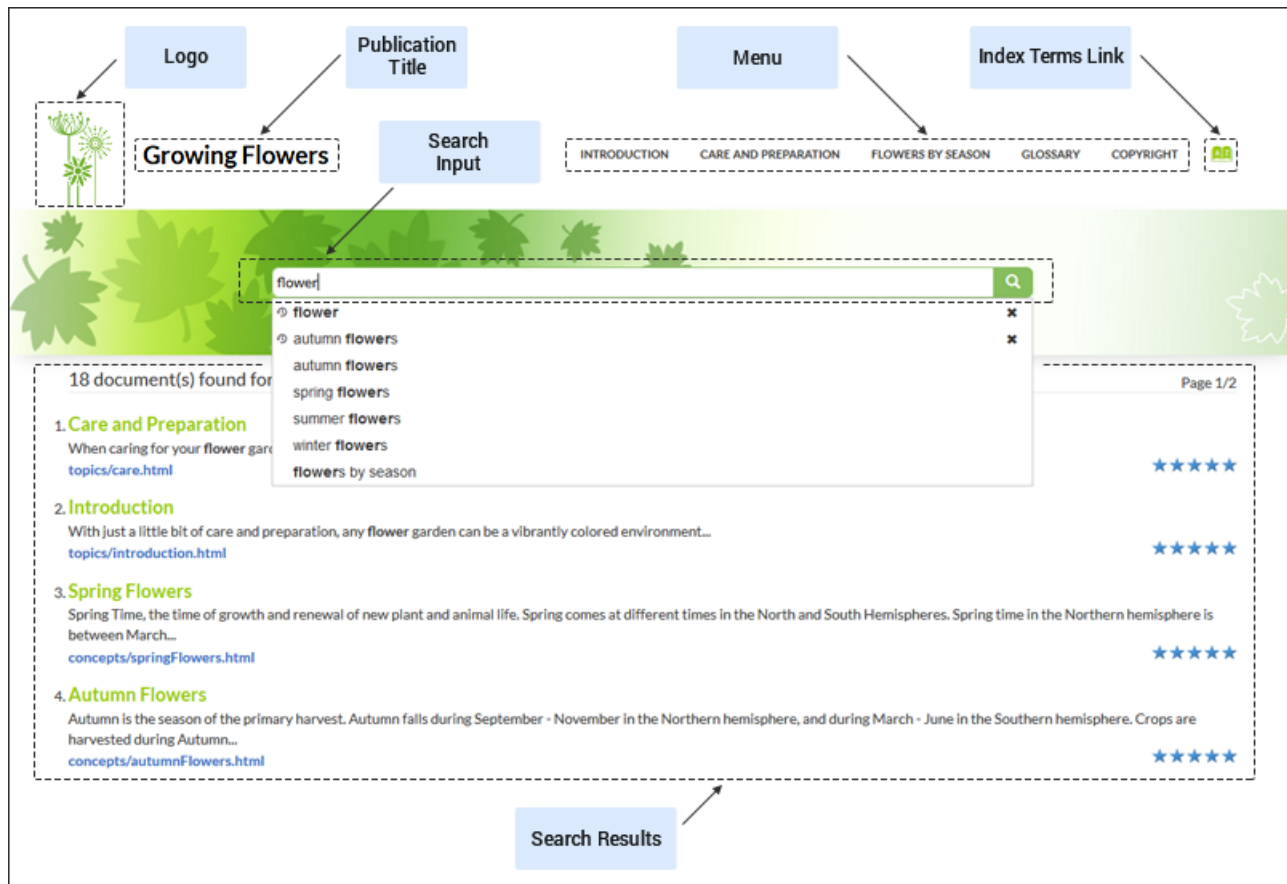


**Figure 436: Examples of Search Results Page Components**

The following components can be referenced in the *Search Results Page* (`wt_search.html`) file:

#### **Publication Title (`webhelp_publication_title`)**

This component generates the publication title in the output. To generate this component, the `webhelp_publication_title` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_publication_title
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```

In the output, you will find an element with the class: `wh_publication_title`.

#### **Publication Logo (`webhelp_logo`)**

This component generates a logo image in the output. To generate this component, the `webhelp_logo` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_logo
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```

In addition, you must also specify the path of the logo image in the `webhelp_logo.image` transformation parameter (in the **Parameters** tab in the transformation scenario). You can set the `webhelp_logo.image.target.url` parameter to generate a link to a URL when you click the logo image.

In the output, you will find an element with the class: `wh_logo`.

#### **Search Input (`webhelp_search_input`)**

This component is used to generate the input widget associated with search function in the output. To generate this component, the `webhelp_search_input` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_search_input
 xmlns:whc="http://www.oxygenxml.com/webhelp/components"/>
```



In the output, you will find an element with the class: `wh_search_input`.

### Search Results (`webhelp_search_results`)

This component is used to generate a placeholder to signal where the search results will be presented in the output. To generate this component, the `webhelp_search_results` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_search_results
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_search_results`.

### Print Link (`webhelp_print_link`)

This component is used to generate a print icon that opens the print dialog box for your particular browser. To generate this component, the `webhelp_print_link` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_print_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_print_link`.

### Main Page Menu (`webhelp_topics_menu`)

This component generates a menu with all the documentation topics. To generate this component, the `webhelp_topics_menu` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topics_menu
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_topics_menu`.

You can control the maximum level of topics that will be included in the menu using the `webhelp.top.menu.depth` transformation parameter (in the **Parameters** tab of the transformation scenario).

For information about customizing the menu, see [How to Customize the Menu](#) on page 903.

### Index Terms Link (`webhelp_indexterms_link`)

This component can be used to generate a link to the index terms page (`indexterms.html`). If the published documentation does not contain any index terms, then the link will not be generated. To generate this component, the `webhelp_indexterms_link` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_indexterms_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: `wh_indexterms_link`. This element will contain a link to the `indexterms.html` page.

### Link to Skins Resources (`webhelp_skin_resources`)

This component can be used to add a link to resources for the current WebHelp skin (such as the CSS file). To generate this component, the `webhelp_skin_resources` element must be specified in the HTML file as in the following example:

```
<whc:webhelp_skin_resources/>
```

In the output, you will find a link to the skin resources.

## Index Terms Page

The *Index Terms Page* is the page generated that presents index terms in the WebHelp Responsive output. The name of the HTML file that defines this page is `wt_terms.html` and it is located in the following directory: `[WebHelp_OUTPUT_DIR]/oxygen-webhelp/page-templates`.

The HTML page that is produced consists of an index terms section along with various other additional components, such as a title, menu, or search field.

An alphabet that contains the first letter of the documentation index terms is generated at the top of the index page. Each letter represents a link to a specific indices section.

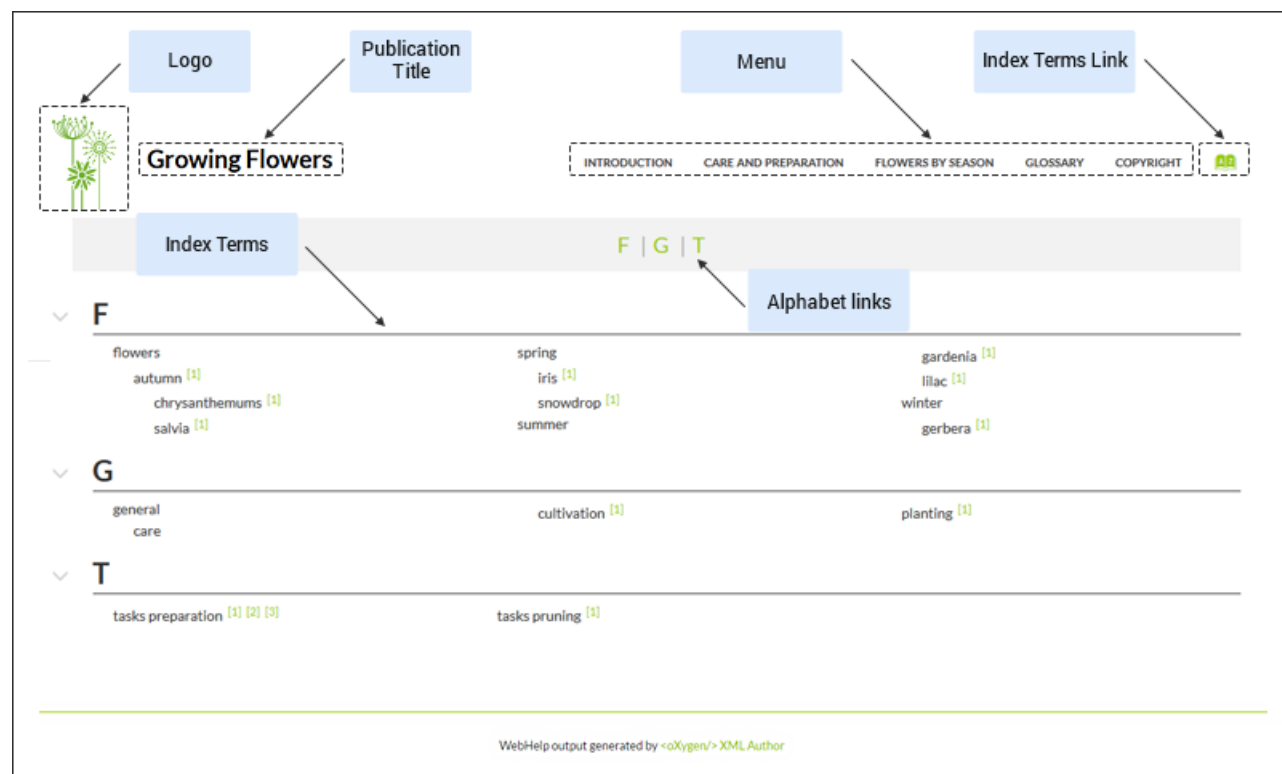


**Figure 437: Examples of Index Terms Page Components**

The following components can be referenced in the *Index Terms Page* (wt\_terms.html) file:

#### **Publication Title (webhelp\_publication\_title)**

This component generates the publication title in the output. To generate this component, the webhelp\_publication\_title element must be specified in the HTML file as in the following example:

```
<whc:webhelp_publication_title
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_publication\_title.

#### **Publication Logo (webhelp\_logo)**

This component generates a logo image in the output. To generate this component, the webhelp\_logo element must be specified in the HTML file as in the following example:

```
<whc:webhelp_logo
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In addition, you must also specify the path of the logo image in the webhelp\_logo.image transformation parameter (in the **Parameters** tab in the transformation scenario). You can set the webhelp\_logo.image.target.url parameter to generate a link to a URL when you click the logo image.

In the output, you will find an element with the class: wh\_logo.

#### **Search Input (webhelp\_search\_input)**

This component is used to generate the input widget associated with search function in the output. To generate this component, the webhelp\_search\_input element must be specified in the HTML file as in the following example:

```
<whc:webhelp_search_input
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_search\_input.

### Print Link (webhelp\_print\_link)

This component is used to generate a print icon that opens the print dialog box for your particular browser. To generate this component, the webhelp\_print\_link element must be specified in the HTML file as in the following example:

```
<whc:webhelp_print_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_print\_link.

### Main Page Menu (webhelp\_topics\_menu)

This component generates a menu with all the documentation topics. To generate this component, the webhelp\_topics\_menu element must be specified in the HTML file as in the following example:

```
<whc:webhelp_topics_menu
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_topics\_menu.

You can control the maximum level of topics that will be included in the menu using the webhelp.top.menu.depth transformation parameter (in the **Parameters** tab of the transformation scenario).

For information about customizing the menu, see [How to Customize the Menu](#) on page 903.

### Index Terms Link (webhelp\_indexterms\_link)

This component can be used to generate a link to the index terms page (indexterms.html). If the published documentation does not contain any index terms, then the link will not be generated. To generate this component, the webhelp\_indexterms\_link element must be specified in the HTML file as in the following example:

```
<whc:webhelp_indexterms_link
 xmlns:whc="http://www.oxygenxml.com/webhelp/components" />
```

In the output, you will find an element with the class: wh\_indexterms\_link. This element will contain a link to the indexterms.html page.

### Link to Skins Resources (webhelp\_skin\_resources)

This component can be used to add a link to resources for the current WebHelp skin (such as the CSS file). To generate this component, the webhelp\_skin\_resources element must be specified in the HTML file as in the following example:

```
<whc:webhelp_skin_resources />
```

In the output, you will find a link to the skin resources.

### HTML Fragment Extension Points

The HTML pages contain component placeholders that can be used to insert custom HTML fragments.

You can specify one or more HTML fragment extension points in the descriptor file using the following structure:

```
<publishing-template>
...
<webhelp>
...
 <html-fragments>
 <fragment
 file="html-fragments/webhelp.fragment.welcome"
 placeholder="webhelp.fragment.welcome" />
 <fragment
 file="html-fragments/webhelp.fragment.footer.html"
 placeholder="webhelp.fragment.footer" />
 </html-fragments>
...
</webhelp>
...
</publishing-template>
```

Some of these placeholders are left empty in the default output configurations, but you can use them to insert custom content.

Each placeholder has an associated parameter in the transformation. These predefined empty placeholder parameters are illustrated and described below.

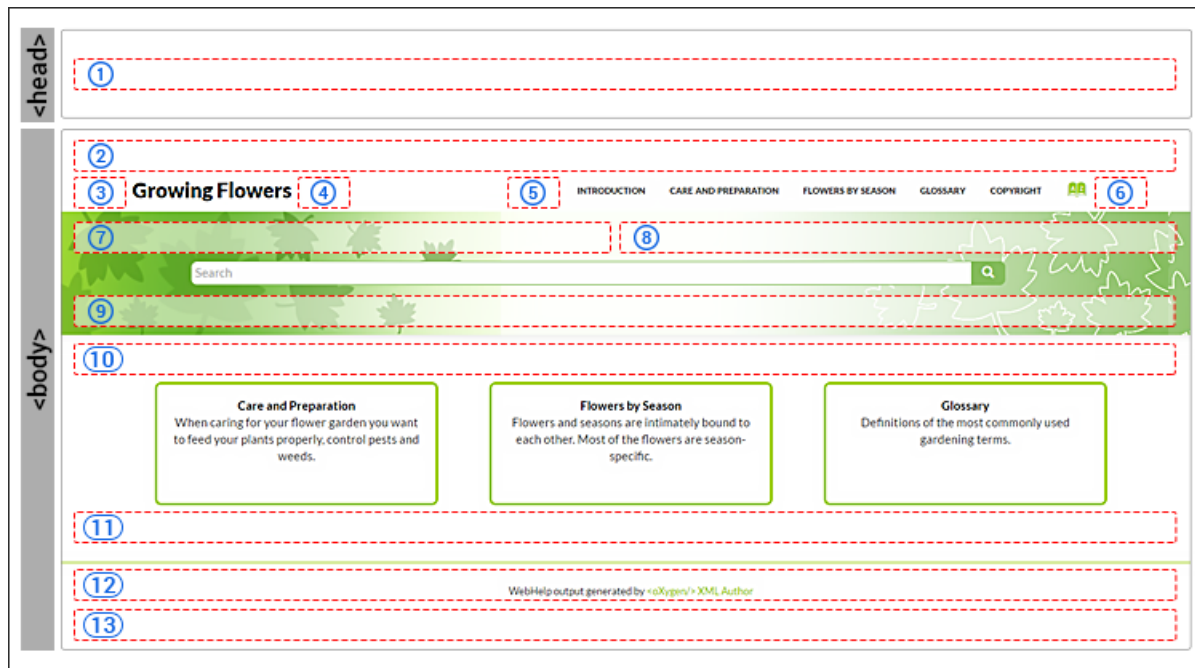


**Figure 438: Predefined Placeholders Diagram**

Each of these parameters can hold either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment:

**1- webhelp.fragment.head**

In the generated output it inserts a given XHTML fragment in the <head> element. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**2- webhelp.fragment.before.body**

In the generated output it displays a given XHTML fragment before the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**3- webhelp.fragment.before.logo\_and\_title**

In the generated output it displays a given XHTML fragment before the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**4- webhelp.fragment.after.logo\_and\_title**

In the generated output it displays a given XHTML fragment after the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**5- webhelp.fragment.before.top\_menu**

In the generated output it displays a given XHTML fragment before the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**6- webhelp.fragment.after.top\_menu**

In the generated output it displays a given XHTML fragment after the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**7- webhelp.fragment.before.main.page.search**

In the generated output it displays a given XHTML fragment before the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**8- webhelp.fragment.welcome**

In the generated output it displays a given XHTML fragment as a welcome message (or title). The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

**9- webhelp.fragment.after.main.page.search**

In the generated output it displays a given XHTML fragment after the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### 10- webhelp.fragment.before.toc\_or\_tiles

In the generated output it displays a given XHTML fragment before the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### 11- webhelp.fragment.after.toc\_or\_tiles

In the generated output it displays a given XHTML fragment after the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### 12- webhelp.fragment.footer

In the generated output it displays a given XHTML fragment as the page footer. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### 13- webhelp.fragment.after.body

In the generated output it displays a given XHTML fragment after the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### Related Information:

[How to Insert HTML Content in WebHelp Responsive Output](#) on page 901

### XSLT Extension Points

The publishing template allows supports one or more XSLT extension points. They are helpful when you want to change the structure of the HTML pages that are primarily generated from XSLT processing. They can be specified in the descriptor file using the following structure:

```
<publishing-template>
...
<webhelp>
...
<xslt>
 <extension
 id="com.oxygenxml.webhelp.xsl.dita2webhelp"
 file="xsl/customDita2webhelp.xsl" />
 <extension
 id="com.oxygenxml.webhelp.xsl.createMainPage"
 file="xsl/customMainPage.xsl" />
</xslt>
```

For more information, and a full list of the available extension points, see: [XSLT-Import and XSLT-Parameter Extension Points](#).

**Note:** You can read the value of a WebHelp transformation parameter from your XSLT extension stylesheets by using the `getParameter(param.name)` function from the `http://www.oxygenxml.com/functions` namespace.

### Transformation Parameters

You can also set one or more WebHelp transformation parameters in the descriptor file.

```
<publishing-template>
...
<webhelp>
...
<parameters>
 <parameter
 name="webhelp.show.main.page.toc"
 value="yes" />
 <parameter
 name="webhelp.top.menu.depth"
 value="3" />
 <parameter
 name="webhelp.fragment.welcome"
 value="html-fragment/webhelp.fragment.welcome.html"
 type="filePath" />
</parameters>
</webhelp>
```

The following information can be specified in the parameter element:

## Parameter name

The name of the parameter. It may be one of the [WebHelp Responsive transformation parameters](#) or a [DITA-OT HTML-based output parameter](#).

**Note:** It is not recommended to specify an input/output parameter in the descriptor file (such as the input Map, DITaval file, or temporary directory).

## Parameter Value

The value of the parameter. It should be a relative path to the template root folder for file paths parameters.

## Parameter Type

The type of the parameter: string or filepath. The string value is default.

After [creating a publishing template](#) and [adding it to the templates gallery](#), when you select the template in the transformation scenario dialog box, the **Parameters** tab will automatically be updated to include the parameters defined in the descriptor file. These parameters are displayed in italics.

## Generating WebHelp Responsive Output

The publishing process can be initiated from a transformation scenario within **Oxygen XML Editor/Author**, from a command line outside **Oxygen XML Editor/Author**, or from an integration server.

### Running from Oxygen XML Editor/Author

To publish to the WebHelp Responsive output from a transformation scenario inside **Oxygen XML Editor/Author**, use one of the following procedures, depending on whether or not you want a feedback section in your output.

## WebHelp Responsive Output

To publish a [DITA map](#) as **WebHelp Responsive** output, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Responsive** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - **Parameters Tab** - This tab includes numerous transformation parameters that can be set to customize your WebHelp system output.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to process the transformation.

When the **DITA Map WebHelp Responsive** transformation is complete, the output is automatically opened in your default browser.

## WebHelp Responsive with Feedback Output

To publish a [DITA map](#) as a **WebHelp Responsive with Feedback** system, follow these steps:

1. Select the  **Configure Transformation Scenario(s)** action from the toolbar.
2. Select the **DITA Map WebHelp Responsive with Feedback** scenario from the **DITA Map** section.
3. If you want to configure the transformation, click the **Edit** button.

**Step Result:** This opens an **Edit scenario** configuration dialog box that allows you to configure various options in the following tabs:

- **Templates Tab** - This tab contains a set of predefined skins that you can use for the layout of your WebHelp system output.
  - **Parameters Tab** - This tab includes numerous transformation parameters that can be set to customize your WebHelp system output.
  - **Filters Tab** - This tab allows you to filter certain content elements from the generated output.
  - **Advanced Tab** - This tab allows you to specify some advanced options for the transformation scenario.
  - **Output Tab** - This tab allows you to configure options that are related to the location where the output is generated.
4. Click **Apply associated** to begin the transformation.
  5. Enter the documentation product ID (value for the `webhelp.product.id` parameter) and the documentation version (value for the `webhelp.product.version` parameter).

When the **DITA Map WebHelp Responsive with Feedback** transformation is complete, your default browser opens the `installation.html` file. This file contains information about the output location, system requirements, installation instructions, and deployment of the output. Follow the [instructions to complete the system deployment](#).

### Running from Command Line

To publish to the WebHelp Responsive output from a command line outside of **Oxygen XML Editor/Author**, you can use the `dita` startup script that comes bundled with [DITA-OT](#) distribution.

#### dita Command Format

[DITA-OT](#) `dita` command has the following format:

```
DITA-OT-DIR/bin/dita --format=webhelp-responsive --input=input-file options
```

where the arguments are as follows:

#### dita

**Windows** - The `dita.bat` script located in: [DITA-OT-DIR](#) on page 1264\bin\.

**Linux/Mac OS X** - The `dita` script file located in: [DITA-OT-DIR](#) on page 1264/bin/.

#### --format=webhelp-responsive

Specifies the output format (transformation type) for WebHelp Responsive transformation.

#### --input=input-file

The `input-file` represents the path to the DITA map that you want to process.

#### options

options include the following optional build parameters:

#### --output=dir

#### -o dir

Specifies the path of the output directory; the path can be absolute or relative to the current directory. By default, the output is written to the `out` subdirectory of the current directory.

#### --filter=file

Specifies filter file(s) used to include, exclude, or flag content.

Relative paths are resolved against the current directory and internally converted to absolute paths.

#### --temp=dir

#### -t dir

Specifies the location of the temporary directory.

#### --verbose

#### -v

Verbose logging.

**--debug**  
**-d**  
 Debug logging.

**--logfile=file**  
**-l file**  
 Write logging messages to a file.

**--parameter=value**  
**-Dparameter=value**  
 Specify a value for a DITA-OT or Ant build parameter.

**--propertyfile=file**  
 Use build parameters defined in the referenced `.properties` file.  
 Build parameters specified on the command line override those set in the `.properties` file.

## WebHelp and DITA-OT parameters

In addition to the [transformation parameters that are specific to WebHelp Responsive](#), you can use to the [common DITA-OT transformation parameters](#) and the [HTML-based Output Parameters](#).

## Command Line Example

- Windows:

```
dita.bat
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.logo.image=C:\images\myLogo.jpg
```

- Linux/Mac OS X:

```
dita
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.logo.image=C:\images\myLogo.jpg
```

## Related Information:

[DITA-OT Documentation: Building Output Using the dita Command](#)

[DITA-OT Documentation: Publishing DITA Content](#)

[DITA-OT Documentation: HTML-based output parameters](#)

[WebHelp Responsive Output Parameters](#) on page 892

## Running from an Integration Server

Oxygen XML Developer can be processed from an automatic publishing system, such as *Jenkins* or *Travis*.

### *Automating DITA to WebHelp Output with Jenkins*

To integrate WebHelp output with the Jenkins continuous integration tool, follow these steps:

1. Create a Maven project to incorporate the DITA-OT that already integrates Oxygen XML Developer.
2. Go to the root of your Maven project and edit the `pom.xml` file to include the following fragment:

```
<properties>
 <oxygen-webhelp>${basedir}/tools/DITA-OT2.5.2/
 plugins/com.oxygenxml.webhelp.responsive</oxygen-webhelp>
</properties>

<plugin>
 <artifactId>exec-maven-plugin</artifactId>
 <groupId>org.codehaus.mojo</groupId>
 <executions>
 <execution><!-- Run our version calculation script -->
 <id>Version Calculation</id>
 <phase>generate-sources</phase>
 <goals>
 <goal>exec</goal>
```



```

</goals>
<configuration>
 <executable>${oxygen-webhelp}/ditaWebhelp.bat</executable>
</configuration>
</execution>
</executions>
</plugin>

```

**Note:** In the fragment above it is assumed that you are using DITA-OT version 2.5.4. If you are using another version, please adjust the path accordingly.

3. Go to the Jenkins top page and [create a new Jenkins job](#). Configure this job to suit your particular requirements, such as the build frequency and location of the Maven project.

### *Automating DITA to WebHelp Output with Travis CI*

This topic assumes you have a DITA project hosted on a GitHub public or private repository.

The goal of this tutorial is to help you setup a Travis continuous integration job that automatically publishes your DITA project to [GitHub pages](#) after every commit. The published website will contain a feedback link on each page that would allow a contributor to easily suggest changes to the documentation by creating a pull request on GitHub with just a few clicks.

### Enable the Travis CI Build

1. [Sign in to Travis CI](#) with your GitHub account, accepting the GitHub [access permissions confirmation](#).
2. Once you are signed in, and you have synchronized your GitHub repositories, go to your [profile page](#) and enable Travis CI for the repository you want to build.

### Configure the Travis CI Build in your GitHub Project

1. Checkout your GitHub project locally.
2. Copy the `.travis` folder from [here](#) to the root directory of your project.
3. In the root of your GitHub project, add a file called `.travis.yml` with the following content:

```

language: dita
install:
 - echo "Installed"
script:
 - sh .travis/publish.sh
after_success:
 - sh .travis/deploy.sh
env:
 global:
 - DITAMAP=/path/to/your/ditamap/file
 - DITAVAL=/path/to/your/ditaval/file
 - ANT_OPTS=-Xmx1024M

```

**Note:** Replace `/path/to/your/ditamap/file` and `/path/to/your/ditaval/file` with the appropriate paths to your *DITA map* and *ditaval* files.

4. Create a GitHub personal access token by following [this procedure](#).
5. [Define an environment variable in the repository settings](#) that has the name `GH_TOKEN` and the value equal with the GitHub personal access token created earlier.

### Register Your License Key

1. Edit your `.gitignore` file (or create it if it does not already exist) and add the following line:

```
licenseKey.txt
```

2. Copy your WebHelp license to the root of your GitHub project in a file called `licenseKey.txt`.

**Important:** The `licenseKey.txt` file should not be committed to GitHub as it contains a license key that is issued only to you.

3. [Encrypt the license key file](#) and **add** it to the `.travis.yml` configuration file. This way only the Travis CI server will be able to decrypt it during the build process.

## Commit to GitHub

1. Commit the following files and folders and push the commit to GitHub:

```
git add .gitignore licenseKey.txt.enc .travis.yml .travis/
git commit -m "Set up the Travis CI publishing system"
git push
```

2. Create a gh-pages branch in your GitHub project where the WebHelp output will be published. You can follow the procedure [here](#).

## WebHelp Responsive Transformation Parameters

In addition to the [common DITA-OT transformation parameters](#) and the [HTML-based Output Parameters](#), there are numerous other supported parameters that are specific to the WebHelp Responsive output.

### Publishing Template Parameters

#### **webhelp.publishing.template**

Specifies the path to the ZIP archive (or root folder) that contains your custom WebHelp Responsive template.

#### **webhelp.publishing.template.descriptor**

Specifies the name of the descriptor to be loaded from the WebHelp Responsive template package. If it is not specified, the first encountered descriptor will be automatically loaded.

### Custom Resource Parameters

#### **webhelp.custom.resources**

The file path to a directory that contains resources files. All files from this directory will be copied to the root of the WebHelp output.

#### **webhelp.favicon**

The file path that points to an image to be used as a *favicon* in the WebHelp output.

#### **webhelp.logo.image.target.url**

Specifies a target URL that is set on the logo image. When you click the logo image, you will be redirected to this address.

#### **webhelp.logo.image**

Specifies a path to an image displayed as a logo in the left side of the output header.

### Feedback-Enabled Parameters

#### **webhelp.product.id (available only for Feedback-enabled systems)**

This parameter specifies a short name for the documentation target, or product (for example, mobile-phone-user-guide, hvac-installation-guide).

**Note:** You can deploy documentation for multiple products on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: < > / \ ' ( ) { } = ; \* % + &.

#### **webhelp.product.version (available only for Feedback-enabled systems)**

Specifies the documentation version number (for example, 1.0, 2.5, etc.). New user comments are bound to this version.

**Note:** Multiple documentation versions can be deployed on the same server.

**Restriction:** The following characters are not allowed in the value of this parameter: < > / \ ' ( ) { } = ; \* % + &.

## HTML Fragment Extension Parameters

### **webhelp.fragment.after.body**

In the generated output it displays a given XHTML fragment after the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.logo\_and\_title**

In the generated output it displays a given XHTML fragment after the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.main.page.search**

In the generated output it displays a given XHTML fragment after the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment after the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.after.top\_menu**

In the generated output it displays a given XHTML fragment after the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.body**

In the generated output it displays a given XHTML fragment before the page body. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.logo\_and\_title**

In the generated output it displays a given XHTML fragment before the logo and title. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.main.page.search**

In the generated output it displays a given XHTML fragment before the search field. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.toc\_or\_tiles**

In the generated output it displays a given XHTML fragment before the table of contents or tiles in the main page. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.before.top\_menu**

In the generated output it displays a given XHTML fragment before the top menu. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.footer**

In the generated output it displays a given XHTML fragment as the page footer. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.head**

In the generated output it inserts a given XHTML fragment in the <head> element. The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

### **webhelp.fragment.welcome**

In the generated output it displays a given XHTML fragment as a welcome message (or title). The value of the parameter can be either an XHTML fragment or a path to a file that contains a well-formed XHTML fragment.

## Output Component Parameters

### **webhelp.default.collection.type.sequence**

Specifies if the **sequence** value will be used by default when the `collection-type` attribute is not specified. This option is helpful if you want to have *Next* and *Previous* navigational buttons generated for all HTML pages. Allowed values are **no** (default) and **yes**.

**webhelp.merge.nested.topics.related.links**

Specifies if the related links from nested topics will be merged with the links in the parent topic. Thus the links will be moved from the topic content to the related links component and all of the links from the same group (for example, *Related Tasks*, *Related References*, *Related Information*) are merged into a single group. The default value is yes.

**webhelp.show.breadcrumb**

Specifies if the breadcrumb component will be presented in the output. The default value is yes.

**webhelp.show.changes.and.comments**

When set to yes, user comments, replies to comments, and tracked changes are published in the WebHelp output. The default value is no.

**webhelp.show.child.links**

Specifies if child links will be generated in the output for all topics that have subtopics. The default value is no.

**webhelp.show.indexterms.link**

Specifies if an icon that links to the index will be presented in the output. The default value is yes.

**webhelp.show.main.page.tiles**

Specifies if the tiles component will be presented in the main page of the output. For a *tree* style layout, this parameter should be set to no.

**webhelp.show.main.page.toc**

Specifies if the table of contents will be presented in the main page of the output. The default value is yes.

**webhelp.show.navigation.links**

Specifies if navigation links will be presented in the output. The default value is yes.

**webhelp.show.print.link**

Specifies if a print link or icon will be presented within each topic in the output. The default value is yes.

**webhelp.show.publication.toc**

Specifies if a table of contents will be presented on the left side of each topic in the output. The default value is yes.

**webhelp.show.topic.toc**

Specifies if a topic table of contents will be presented on the right side of each topic in the output. This table of contents contains links to each section within the current topic and the section corresponding to the current scroll position is highlighted. The default value is yes.

**webhelp.show.top.menu**

Specifies if a menu will be presented at the topic of the main page in the output. The default value is yes.

**webhelp.publication.toc.hide.chunked.topics**

Specifies if the table of contents will contain links for *chunked* topics. The default value is yes.

**webhelp.publication.toc.links**

Specifies which links will be included in the table of contents. The possible values are:

- **chapter** (default) - The TOC will include links for the current topic, its children, its siblings, and its direct ancestor (including the direct ancestor's siblings), and the parent chapter.
- **topic** - The TOC will only include links for the current topic and its direct children.
- **all** - The TOC will include all links.

**webhelp.publication.toc.tooltip.position**

By default, if a topic contains a `shortdesc` element, its content is displayed in a tooltip when the user hovers over its link in the table of contents. This parameter controls whether or not this tooltip is displayed and its position relative to the link. The possible values are:

- **left** (default)
- **right**
- **top**
- **bottom**

- **hidden** - The tooltip will not be displayed.

#### **webhelp.top.menu.depth**

Specifies the maximum depth level of the topics that will be included in the top menu. The default value is 3. A value of 0 means that the menu has unlimited depth.

#### **webhelp.topic.collapsible.elements.initial.state**

Specifies the initial state of collapsible elements (tables with titles, nested topics with titles, sections with titles, index term groups). The possible values are collapsed or expanded (default value).

### **Search-Related Parameters**

#### **webhelp.search.japanese.dictionary**

The file path of the dictionary that will be used by the *Kuromoji* morphological engine for indexing Japanese content in the WebHelp pages.

#### **webhelp.search.ranking**

If this parameter is set to `false` then the 5-star rating mechanism is no longer included in the search results that are displayed on the **Search** tab (default setting is `true`).

#### **webhelp.sitemap.base.url**

Base URL for all the `loc` elements in the generated `sitemap.xml` file. The value of a `loc` element is computed as the relative file path from the `href` attribute of a `topicref` element from the *DITA map*, appended to this base URL value. The `loc` element is mandatory in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `sitemap.xml` file is not generated.

#### **webhelp.enable.search.autocomplete**

Specifies if the *Autocomplete* feature is enabled in the WebHelp search text field. The default value is `yes`.

#### **webhelp.search.enable.pagination**

Specifies whether or not search results will be displayed on multiple pages. Allowed values are `yes` or `no`.

#### **webhelp.search.page.numberOfItems**

Specifies the number of search results items displayed on each page. This parameter is only used when the **webhelp.search.enable.pagination** parameter is enabled.

#### **webhelp.sitemap.change.frequency**

The value of the `changefreq` element in the generated `sitemap.xml` file. The `changefreq` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `changefreq` element is not added in `sitemap.xml`. Allowed values: `<empty string>` (default), `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, `never`.

#### **webhelp.sitemap.priority**

The value of the `priority` element in the generated `sitemap.xml` file. It can be set to any fractional number between 0.0 (least important priority) and 1.0 (most important priority). For example, 0.3, 0.5, or 0.8. The `priority` element is optional in `sitemap.xml`. If you leave this parameter set to its default empty value, then the `priority` element is not added in `sitemap.xml`.

#### **webhelp.google.search.results**

A file path that specifies the location of a well-formed XHTML file containing the Google Custom Search Engine element `gcse:searchresults-only`. You can use all supported attributes for this element. It is recommend to set the `linkTarget` attribute to `frm` for frameless (*iframe*) version of WebHelp or to `contentWin` for the frameset version of WebHelp. The default value for this attribute is `_blank` and the search results will be loaded in a new window. If this parameter is not specified, the following code will be used `<gcse:searchresults-only linkTarget="frm"></gcse:searchresults-only>`

#### **webhelp.google.search.script**

A file path that specifies the location of a well-formed XHTML file containing the Custom Search Engine script from Google.

**Note:** The `fix.external.refs.com.oxygenxml` parameter is not supported when running the transformation from a command line. This parameter is normally used to specify whether or not the application tries to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references.

## Related Information:

[Generating WebHelp Responsive Output](#) on page 888  
[DITA-OT Parameter Reference](#)

## WebHelp Responsive XSLT-Import and XSLT-Parameter Extension Points

XSLT extension points can be used from either from an *Oxygen Publishing Template* or from a DITA-OT extension plug-in.

### Extension Points from an Oxygen Publishing Template

The publishing template allows you to specify one or more XSLT extension points. These extension points will affect only the transformations that use the particular template.

For an example of how to use these extension in a publishing template, see: [How to Use a XSLT Extension Point from a Publishing Template](#) topic.

#### Example:

```
<publishing-template>
...
<webhelp>
...
 <xslt>
 <extension
 id="com.oxygenxml.webhelp.xsl.createMainPage"
 file="xsl/customMainPage.xsl" />
 </xslt>

```

### Extension Points from a DITA-OT Extension Plug-in

The DITA-OT plug-in installer adds an XSLT import statement in the default WebHelp XSLT so that the XSLT stylesheet referenced by the extension point becomes part of the normal build. You can use these extension points to override XSLT processing steps.

#### Example:

```
<plugin id="com.oxygenxml.webhelp.responsive.extension">
 <feature extension="com.oxygenxml.webhelp.responsive.xsl.dita2webhelp"
 file="xsl/fixup.xsl" />
</plugin>
```

## XSLT-Import Extension Points

The following extension points are available:

### **com.oxygenxml.webhelp.xsl.dita2webhelp**

Extension point to override the XSLT stylesheet (dita2webhelp.xsl) that produces an HTML file for each DITA topic. The location of this topic is *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.responsive\xsl\dita2webhelp\dita2webhelp.xsl

### **com.oxygenxml.webhelp.xsl.createMainPage**

Extension point to override the XSLT stylesheet (createMainPage.xsl) that produces the WebHelp Responsive main HTML page (index.html). The location of this file is *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.responsive\xsl\mainFiles\createMainPage.xsl

### **com.oxygenxml.webhelp.xsl.createSearchPage**

Extension point to override the XSLT stylesheet (createSearchPage.xsl) that produces the WebHelp Responsive search HTML page (search.html). The location of this file is *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.responsive\xsl\mainFiles\createSearchPage.xsl

### **com.oxygenxml.webhelp.xsl.createIndexTermsPage**

Extension point to override the XSLT stylesheet (createIndextermsPage.xsl) that produces the WebHelp Responsive index terms HTML page (indexterms.html). The location of this file is *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.responsive\xsl\mainFiles\createIndextermsPage.xsl

## **com.oxygenxml.webhelp.xsl.createTocXML**

Extension point to override the XSLT stylesheet (`tocDita.xsl`) that produces the `toc.xml` file. This file contains information extracted from the *DITA map* and it is mainly used to construct the WebHelp Table of Contents and navigational links. The path to this stylesheet is: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\xsl\toc\tocDita.xsl`.

## **XSLT-Parameter Extension Points**

If your customization stylesheet declares one or more XSLT parameters and you want to control their values from the transformation scenario, you can use one of the following XSLT parameter extension points:

### **com.oxygenxml.webhelp.xsl.dita2webhelp.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.xsl.dita2webhelp extension point](#).

### **com.oxygenxml.webhelp.xsl.createMainPage.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.xsl.createMainPage extension point](#).

### **com.oxygenxml.webhelp.xsl.createSearchPage.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.xsl.createSearchPage extension point](#).

### **com.oxygenxml.webhelp.xsl.createIndexTermsPage.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.xsl.createIndexTermsPage extension point](#).

### **com.oxygenxml.webhelp.xsl.createTocXML.param**

Use this extension point to pass parameters to the stylesheet specified using the [com.oxygenxml.webhelp.xsl.createTocXML extension point](#).

## **Related Information:**

[How to Override an XSLT-processing step](#) on page 922

[\[DITA-OT\] XSLT-Import Extension Points](#)

[\[DITA-OT\] XSLT-Parameter Extension Points](#)

## **Customizing the WebHelp Responsive Output**

Oxygen XML Developer provides support for customizing the **WebHelp Responsive** output to suit your specific needs. The **WebHelp Responsive** output is based upon the *Bootstrap* responsive front-end framework and is available for DITA document types. The **WebHelp Responsive with Feedback** variant allows your users to add comments to your output.

To change the overall appearance of your **WebHelp Responsive** output, you can use several different customization methods or a combination of methods. If you are familiar with CSS and coding, you can style your WebHelp output through your own custom stylesheets. You can also customize your output by modifying existing templates, create your own layout pages, or by configuring certain options and parameters in the transformation scenario.

This section includes topics that explain various ways to customize your WebHelp Responsive system output, such as how to configure the tiles on the main page, add logos in the title area, integrate with social media, localizing the interface, and much more.

## **Working with Publishing Templates**

An *Oxygen Publishing Template* defines all aspects of the layout and styles of the **WebHelp Responsive** output. It is a self-contained customization package stored as a ZIP archive or folder that can easily be shared with others. It provides the primary method for customizing the output.

The recommended method for customizing the *WebHelp Responsive* output is to use a custom publishing template. This section contains a series of procedures about how to create, edit, publish, and share publishing templates.

## Related Information:

[Publishing Template Package Contents](#) on page 871

### *How to Create a Publishing Template*

The easiest way to create a new *Oxygen Publishing Template* is to select an existing template in the transformation scenario dialog box and use the **Save template as** button to save that template into a new template package that can be used as a starting point.

To create a new *Oxygen Publishing Template*, follow these steps:

1. Open the **WebHelp Responsive** transformation scenario dialog box and select the publishing template you want to export and use as a starting point.
2. Optional: You can set one or more transformation parameters from the **Parameters** tab and the edited parameters will be exported along with the selected template. You will see which parameters will be exported in the dialog box that is displayed after the next step.
3. Click the **Save template as** button.  
This opens a template package configuration dialog box that contains some options and displays the parameters that will be exported to your template package.
4. Specify a name for the new template.
5. Optional: Specify a template description.
6. Optional: Select the **Include HTML Page Layout Files** option if you want to copy the default [HTML Page Layout Files](#) in your template package. They are helpful if you want to change the structure of the generated HTML pages.
7. In the **Save as** field, specify the name and path of the ZIP file where the template will be saved.

A new ZIP archive will be created on disk in the specified location with the specified name.

### *How to Edit a Publishing Template*

To edit an existing *Oxygen Publishing Template* package, follow these steps:

1. Unzip the ZIP archive associated with the *Oxygen Publishing Template* in a separate folder.
2. Link the folder associated with the template in the **Project** view.
3. Using the **Project** view, you can modify the resources (CSS, JS, fonts) within the *Oxygen Publishing Template* folder to fit your needs.
4. Open the [publishing template descriptor file](#) (.opt extension) in the editor and modify to suit your needs.
5. Optional: Once you finish your customization, you can archive the folder as a ZIP file.

### *How to Add a Publishing Template to the Publishing Templates Gallery*

To add the publishing template to your templates gallery, follow these steps:

1. Open the transformation scenario dialog box.
2. In the **Templates** tab, click the **Configure Publishing Templates Gallery** link to.  
This will open the [DITA/Publishing preferences page](#).
3. Click the **Add** button and specify the location of your template directory.  
Your template directory is now added to the **Additional Publishing Templates Galleries** list.
4. Click **OK** to return to the transformation scenario dialog box.  
All the templates contained in your template directory will be displayed in the preview pane along with all the built-in templates.

### *How to Use a Publishing Template from Command Line*

Before you run the transformation, you need to know if the publishing template has a [single or multiple template descriptor files](#). If you don't know, open the ZIP archive or folder and check for files with the .opt extension.

#### Publishing Template with a Single Descriptor

A template with a single descriptor is used for a single customization.

To run from a command line, you need to use the [webhelp.publishing.template.parameter](#). This parameter specifies the path to the ZIP archive (or root folder) that contains your custom WebHelp Responsive template.



Command line example:

- **Windows:**

```
dita.bat
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.publishing.template=custom-template
```

- **Linux/Mac OS X:**

```
dita
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.publishing.template=custom-template
```

## Using a Publishing Template with Multiple Descriptors

A template with multiple descriptors contains multiple customizations.

Because the publishing template is self-contained, it is used to reuse resources that are common to multiple publications.

To run from a command line, you need to use the [webhelp.publishing.template](#) and [webhelp.publishing.template.descriptor](#) parameters.

The [webhelp.publishing.template](#) parameter specifies the path to the ZIP archive (or root folder) while the [webhelp.publishing.template.descriptor](#) parameter specifies the name of the descriptor you want to use.

Command line example:

- **Windows:**

```
dita.bat
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.publishing.template=custom-template
-Dwebhelp.publishing.template.descriptor=flowers.opt
```

- **Linux/Mac OS X:**

```
dita
--format=webhelp-responsive
--input=c:\mySample.ditamap
--output=c:\output
-Dwebhelp.publishing.template=custom-template
-Dwebhelp.publishing.template.descriptor=flowers.opt
```

## How to Share a Publishing Template

To share a publishing template with others, following these steps:

1. Copy your template in a new folder.
2. Go to **Options > Preferences > DITA > Publishing** and add that new folder to the list.
3. Switch the option at the bottom of that preferences page to **Project Options**.
4. Share your project file (.xpr).

## Troubleshooting: Errors Encountered when Loading Templates

When the **Templates** tab of a **WebHelp Responsive** transformation scenario dialog box is opened, all templates (built-in and custom) are loaded and validated. Specifically, certain elements in the [template descriptor file](#) are checked for validity. If errors are encountered that prevent the template from loading, the following message will be displayed toward the bottom of the dialog box:

 Some templates could not be loaded. [More details](#)

If you click the **More details** link, a window will open with more information about the encountered error. For example, it might offer a hint for which element is missing from the expected [descriptor file structure](#).

Also, if a template could be loaded, but certain elements could not be found in the [descriptor file](#), a warning icon (⚠️) will be displayed on the template's image (in the **Templates** tab of the transformation dialog box). For example, this happens if a valid [preview-image element](#) cannot be found.

## Changing the Layout and Styles

This section contains topics that explain how to customize the output using CSS, inserting HTML fragments, changing the layout of the main page, and more.

### *How to Customize the Output Using a CSS*

The most common way to customize WebHelp Responsive output is to use custom CSS styling. This method can be used to make small, simple styling changes or more advanced, precise changes. To implement the styling in your WebHelp output, you simply need to create the custom CSS file and reference it in your transformation scenario (using a *Oxygen Publishing Templater* or a transformation parameter). This custom file will be the final CSS to be applied so its content will override the styles in the other pre-existing CSS files.

### Using CSS Inspector to Identify Content for Custom CSS File

You can use your browser's CSS inspector to identify the pertinent code in the current CSS files and you can even make changes directly in the CSS inspector to test the results so that you know exactly what content to use in your custom CSS file.

In most popular browsers (such as Chrome, Firefox, and Edge), you can access the CSS inspector by using **F12** or by selecting **Inspect Element** (or simply **Inspect**) from the contextual menu.

**Tip:** When using Safari on Mac OS X, you must first enable the Develop menu by going to the Advanced settings and selecting **Show Develop menu in menu bar**. Then you can select **Show Web Inspector** from the Develop menu or click **Command + Option + I**.

### Create the Custom CSS

As a practical example, the following procedure would change the background color of the footer bar in the WebHelp output:

1. Use the browser's CSS inspector to identify the current CSS code that styles the footer bar. In this particular case, the pertinent code that would be identified is:

```
.wh_footer {
 font-size: 15px;
 line-height: 1.7em;
 background-color: #000;
}
```

2. If you want to test the color you want to apply as the background of this particular element, use the browser's CSS inspector to change the value of the background-color attribute. After you find a suitable color, copy that new code.
3. Create a custom CSS file and paste or enter the copied code. For example:

```
.wh_footer {
 background-color: #255890;
}
```

4. Save the custom CSS file at a location of your convenience.
5. Reference the CSS file in a *WebHelp Responsive* transformation using [an Oxygen Publishing Template](#) or the [args.css parameter](#).

### Referencing the CSS Using a Publishing Template

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Using the **Project** view, copy your custom CSS in a folder inside the publishing template root folder (for example, in the custom\_footer\_template/resources folder).
3. Open the [template descriptor file](#) associated with your publishing template and add your custom CSS in the *resources* section.

```
<publishing-template>
...
 <webhelp>
 ...
 <resources>
 ...
```

```
<css file="resources/MyCustom.css" />
```

4. Open the *DITA Map WebHelp Responsive* transformation scenario.
5. Click the **Choose Custom Publishing Template** link and select your template.
6. Click **OK** to save the changes to the transformation scenario.
7. Run the transformation scenario.

**Result:** Your custom CSS will be applied as a final layer on top of any existing CSS rules and the output will reflect the changes you made.

#### Referencing the CSS Using the *args.css* Parameter

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and open the **Parameters** tab.
2. Set the *args.css* parameter to the path of your custom CSS file.
3. Set the *args.copycss* parameter to yes to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

**Result:** Your custom CSS will be applied as a final layer on top of any existing CSS rules and the output will reflect the changes you made.

#### How to Insert HTML Content in WebHelp Responsive Output

You can add custom HTML content in the WebHelp Responsive output by inserting it in a well-formed XML file that will be referenced in the transformation (either from a *Oxygen Publishing Template* or using one of the [HTML fragment parameters](#)). This content may include references to additional JavaScript, CSS, and other types of resources, or such resources can be inserted inline within the HTML content that is inserted in the XML file.

#### The XML File

There are several things to consider in regards to this XML file:

- **Well-Formedness** - If the file is not a [Well-formed XML document](#) (or fragments are not well-formed), the transformation will fail.

A common use case is if you want to include several `script` or `link` elements. In this case, the XML fragment has multiple root elements and to make it well-formed, you can wrap it in an `html` element. This element tag will be filtered out and only its children will be copied to the output documents. Similarly, you can wrap your content in `head`, `body`, `html/head`, or `html/body` elements.

- **Referencing Resources in the XML File** - You can include references to local resources (such as JavaScript or CSS files) by using the predefined `${oxygen-webhelp-output-dir}` macro to specify their paths relative to the output directory:

```
<html>
 <script type="text/javascript" src="${oxygen-webhelp-output-dir}/js/test.js" />
 <link rel="stylesheet" type="text/css"
 href="${oxygen-webhelp-output-dir}/css/test.css" />
</html>
```

If you want that the path of your resource to be relative to the [templates directory](#), you can use the `${oxygen-webhelp-template-dir}` macro.

To copy the referenced resources to the output directory, follow the procedure in: [How to Copy Additional Resources to Output Directory](#) on page 907.

- **Inline JavaScript or CSS Content** - If you want to include inline JavaScript or CSS content in the XML file, it is important to place this content inside an XML comment, as in the following examples:

JavaScript:

```
<script type="text/javascript">
 <!--
 /* Include JavaScript code here. */

 function myFunction() {
 return true;
 }
 -->
```

```
</script>
```

CSS:

```
<style>
 <!--
 /* Include CSS style rules here. */

 *{
 color:red
 }
 -->
</style>
```

### Referencing the HTML fragment using a Publishing Template

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Insert the HTML content in a well-formed XML file (for example, `custom-html.html`).
3. Using the **Project** view, copy your custom HTML fragment in a folder inside publishing the template root folder (for example, in the `custom_footer_template/html-fragments` folder).
4. Open the [template descriptor file](#) associated with your publishing template and add a reference to the custom HTML fragment in the `html-fragments` section.

```
<publishing-template>
...
<webhelp>
...
 <html-fragments>
 <fragment
 file="html-fragments/custom-html.html"
 placeholder="webhelp.fragment.head"/>
```

**Note:** If you want to insert the content in another location within the output document, you can reference the XML file from any other [HTML Fragment extension points](#).

5. Open the *DITA Map WebHelp Responsive* transformation scenario.
6. Click the **Choose Custom Publishing Template** link and select your template.
7. Click **OK** to save the changes to the transformation scenario.
8. Run the transformation scenario.

**Results:** Your additional content will be included at the end of the head element of your output document.

### Referencing the HTML Fragment using a Transformation Parameter

1. Insert the HTML content in a well-formed XML file.
2. Edit the *DITA Map WebHelp Responsive* transformation scenario and open the **Parameters** tab.
3. Edit the value of the `webhelp.fragment.head` parameter and set it to the absolute path of your XML file.

**Note:** If you want to insert the content in another location within the output document, you can reference the XML file from any other [HTML Fragment extension points](#).

4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

**Results:** Your additional content will be included at the end of the head element of your output document.

#### Related Information:

[HTML Fragment Extension Points](#) on page 885

[Publishing Template Package Contents](#) on page 871

#### How to Change Numbering Styles for Ordered Lists

Ordered lists (`ol`) are usually numbered in XHTML output using numerals. If you want to change the numbering to alphabetical, follow these steps:

1. Define a custom `outputclass` value and set it as an attribute of the ordered list, as in the following example:

```
<ol outputclass="number-alpha">
 A
 B
```

```


```

2. Add the following code snippet in a custom CSS file:

```
ol.number-alpha{
 list-style-type:lower-alpha;
}
```

3. Reference the CSS file in a *WebHelp Responsive* transformation using [an Oxygen Publishing Template](#) or the `args.css` parameter.

### Referencing the Custom CSS from a Publishing Template

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Using the **Project** view, copy your custom CSS in a folder inside the publishing template root folder (for example, in the `custom_footer_template/resources` folder).
3. Open the [template descriptor file](#) associated with your publishing template and add your custom CSS in the *resources* section.

```
<publishing-template>
...
<webhelp>
...
<resources>
...
<css file="resources/MyCustom.css" />
```

4. Open the *DITA Map WebHelp Responsive* transformation scenario.
5. Click the **Choose Custom Publishing Template** link and select your template.
6. Click **OK** to save the changes to the transformation scenario.
7. Run the transformation scenario.

**Result:** Your custom CSS will be applied as a final layer on top of any existing CSS rules and the output will reflect the changes you made.

### Referencing the CSS Using the `args.css` Parameter

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and open the **Parameters** tab.
2. Set the `args.css` parameter to the path of your custom CSS file.
3. Set the `args.copypcss` parameter to `yes` to automatically copy your custom CSS in the output folder when the transformation scenario is processed.
4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

**Result:** Your custom CSS will be applied as a final layer on top of any existing CSS rules and the output will reflect the changes you made.

### How to Change the Main Page Layout

This section contains topics that explain how to customize the layout of the main page in the WebHelp Responsive output.

#### How to Customize the Menu

By default, the menu component is displayed in all WebHelp Responsive pages. However, you might want to hide it completely, or only display some of its menu entries.

### How to Hide Some of the Menu Entries

There are two methods for doing this. One of them involves editing the [DITA map](#) and marking the topics that do not need to be included in the menu, and another one that uses a small CSS customization.

#### Editing the DITA Map

To edit the metadata in the *DITA map* to control which topics will not be displayed in the menu, follow these steps:

1. Open the *DITA map* in the **Text** editing mode of Oxygen XML Developer.

2. Add the following metadata information in the `topicref` element (or any of its specializations) for each topic you do not want to be displayed in the menu:

```
<topicmeta>
 <data name="wh-menu">
 <data name="hide" value="yes"/>
 </data>
</topicmeta>
```

## Customizing the CSS

To customize the CSS to control which topics will not be displayed in the menu, follow these steps:

1. Make sure you set an ID on the topic that you do not want to include in the menu.
2. Create a new CSS file that contains a rule that hides the menu entry generated for the topic (identified by the topic ID `growing-flowers` in the following example). The CSS file should have content that is similar to this:

```
.wh_top_menu *[data-id='growing-flowers'] {
 display:none;
}
```

3. Reference the CSS file in a *WebHelp Responsive* transformation using [an Oxygen Publishing Template](#) or the `args.css` parameter.

## How to Hide the Entire Menu

If you do not want to include a main menu in the pages of the WebHelp Responsive output, you can instruct the transformation scenario to skip the menu generation completely.

### Using a Publishing Template

To hide the menu using an [Oxygen Publishing Template](#), follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the `webhelp.show.top.menu` parameter in the *parameters* section with its value set to `no`.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="webhelp.show.top.menu" value="no"/>
 </parameters>
</webhelp>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To hide the menu using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
2. Open the **Parameters** tab and set the `webhelp.show.top.menu` parameter to `no`.
3. Click **OK** to save the changes to the transformation scenario.
4. Run the transformation scenario.

## How to Add a Welcome Message in the WebHelp Responsive Main Page

The main page of the WebHelp Responsive output contains a set of [empty placeholders](#) that can be used to display customized text fragments. These placeholders are available to you through WebHelp Responsive transformation scenario parameters. For example, the placeholder identified through the `webhelp.fragment.welcome` parameter displays text content above the search box in the main page.

## Using a Publishing Template

To add a customized welcome message in the main page of the WebHelp Responsive output using an [Oxygen Publishing Template](#), follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the `webhelp.fragment.welcome` parameter in the `parameters` section with its value set to one of the following:
  - A small well-formed XHTML fragment (such as: `<i>Welcome to the User Guide</i>`).
  - A path to a file that contains well-formed XHTML content.

```
<publishing-template>
...
<webhelp>
...
<parameters>
 <parameter name="webhelp.fragment.welcome" value="c:\myMessage.xhtml" />
</parameters>
</webhelp>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

**Result:** In the WebHelp output, your custom message will be displayed above the search box in the main page.

## Using a Transformation Scenario in Oxygen XML Editor/Author

**Important:** Running WebHelp transformations from a script outside of **Oxygen XML Editor/Author** requires an additional license and some additional setup:

- You must have a valid license for the **Oxygen XML WebHelp Plugin** ([https://www.oxygenxml.com/buy\\_webhelp.html](https://www.oxygenxml.com/buy_webhelp.html)).
- The **Oxygen XML WebHelp Plugin** must be installed and integrated for [the DITA Open Toolkit](#) or [a DocBook XSL Distribution](#).

To add a customized welcome message in the main page of the WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
2. Open the **Parameters** tab and set the `webhelp.fragment.welcome` parameter with its value set to one of the following:
  - A small well-formed XHTML fragment (such as: `<i>Welcome to the User Guide</i>`).
  - A path to a file that contains well-formed XHTML content.
3. Click **OK** to save the changes to the transformation scenario.
4. Run the transformation scenario.

**Result:** In the WebHelp output, your custom message will be displayed above the search box in the main page.

## How to Configure the Tiles on the WebHelp Responsive Main Page

The *tiles* version of the main page of the WebHelp Responsive output displays a tile for each topic found on the first level of the [DITA map](#). However, you might want to customize the way they look or even to hide some of them.

Depending on your particular setup, you can choose to customize these tiles either by setting metadata information in the *DITA map* or by customizing the CSS that is associated with the *DITA map*.

## How to Hide Some of the Tiles

If your documentation is very large or there is a large number of topics on the first level, you might want to hide some of the tiles. Also, this might be useful if you only want to display the topics in the first page that are most relevant to your intended audience.



There are two methods for doing this. One of them involves editing the *DITA map* and marking the topics that do not need to be displayed as tiles, and another one that uses a small CSS customization level to hide some tiles identified by the ID of the topic.

### Editing the DITA Map

To edit the metadata in the *DITA map* to control which topics on the first level of the *DITA map* will not be displayed as a tile, follow these steps:

1. Open the *DITA map* in the **Text** editing mode of Oxygen XML Developer.
2. Add the following metadata information in the `topicref` element (or any of its specializations) for each first-level topic that you do not want to be displayed as a tile:

```
<topicmeta>
 <data name="wh-tile">
 <data name="hide" value="yes"/>
 </data>
</topicmeta>
```

### Customizing the CSS

To customize the CSS to control which topics on the first level of the *DITA map* will not be displayed as a tile, follow these steps:

1. Make sure you set an ID on the topic you want to hide.
2. Create a new CSS file that contains a rule that hides the tile generated for the topic (identified in the following example by the topic ID `growing-flowers`). The CSS file should have content that is similar to this:

```
.wh_tile [data-id='growing-flowers'] {
 display:none;
}
```

3. Reference the CSS file in a *WebHelp Responsive* transformation using [an Oxygen Publishing Template](#) or the `args.css` parameter.

### How to Add an Image to the Tiles

There are two methods that you can use to add an image to a tile. One of them involves editing the *DITA map*, and the other uses a CSS customization.

### Editing the DITA Map

To edit the metadata in the *DITA map* to set an image to be displayed in a tile, follow these steps:

1. Open the *DITA map* in the **Text** editing mode of Oxygen XML Developer.
2. Add the following metadata information in the `topicref` element (or any of its specializations) for each first-level topic that will have an image displayed in the corresponding tile:

```
<topicmeta>
 <data name="wh-tile">
 <data name="image" href="img/tile-image.png" format="png">
 <data name="attr-width" value="64"/>
 <data name="attr-height" value="64"/>
 </data>
 </data>
</topicmeta>
```

**Note:** The `attr-width` and `attr-height` attributes can be used to control the size of the image, but they are optional.

### Customizing the CSS

To customize the CSS to set an image to be displayed in a tile, follow these steps:

1. Make sure you set an ID on the topic that you want the tile include an image.
2. Create a new CSS file that contains a rule that associates an image with a specific tile. The CSS file should have content that is similar to this:

```
.wh_tile[data-id='growing-flowers']> div {
 background-image:url('resources/flower.png');
}
```



3. Reference the CSS file in a *WebHelp Responsive* transformation using [an Oxygen Publishing Template](#) or the `args.css` parameter.

### Adding Media Resources

This section contains topics that explain how to add media resources to the published output or the output directory.

#### *How to Copy Additional Resources to Output Directory*

You can copy additional resources (such as JavaScript, CSS, or other resources) to the output directory either by using an *Oxygen Publishing Template* or the `webhelp.custom.resources` parameter.

### Copying Additional Resources to the Output Directory using a Publishing Template

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Add a new `<fileset>` element in the [resources section of the template descriptor file](#).

```
<publishing-template>
...
<webhelp>
...
<resources>
 <fileset>
 <include name="custom-resources/**/*" />
 <exclude name="**/*.git" />
 </fileset>
</resources>
</webhelp>
</publishing-template>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

**Results:** All files from the custom resources directory will be copied to the *WebHelp Output Directory*/oxygen-webhelp/template folder.

### Copying Additional Resources to the Output Directory using a Transformation Parameter

1. Place all your resources in the same directory.
2. Edit the *DITA Map WebHelp Responsive* transformation scenario and open the **Parameters** tab.
3. Edit the value of the `webhelp.custom.resources` parameter and set it to the absolute path of the directory in step 1.
4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

**Results:** All files from the new directory will be copied to the root of the WebHelp output directory.

#### *How to Add a Logo Image in the Title Area*

You can customize **WebHelp Responsive** output to include a logo in the title area. It will be displayed before the publication title. You can also specify a URL that can be used to send users to a specific website when they click the logo image.

This customization can be done using an *Oxygen Publishing Template* or using a transformation scenario from within **Oxygen XML Editor/Author**.

### Using a Publishing Template

To add a logo in the title area of your WebHelp output using an *Oxygen Publishing Template*, follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the `webhelp.logo.image` parameter in the *parameters* section with its value set to path of your logo.
3. If you also want to add a link to your website when you click the logo image, set its URL in the `webhelp.logo.image.target.url` parameter.

```
<publishing-template>
...
</publishing-template>
```

```
<webhelp>
...
<parameters>
 <parameter name="webhelp.logo.image" value="c:\myLogo.jpg"/>
 <parameter name="webhelp.logo.image.target.url" value="http://sample.com"/>
</parameters>
</webhelp>
```

4. Open the *DITA Map WebHelp Responsive* transformation scenario.
5. Click the **Choose Custom Publishing Template** link and select your template.
6. Click **OK** to save the changes to the transformation scenario.
7. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To add a logo in the title area of your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
2. Open the **Parameters** tab and set the `webhelp.logo.image` parameter to the path of your logo.
3. If you also want to add a link to your website when you click the logo image, set its URL in the `webhelp.logo.image.target.url` parameter.
4. Click **OK** to save the changes to the transformation scenario.
5. Run the transformation scenario.

#### How to Add a Favicon in WebHelp Systems

You can add a custom *favicon* to your WebHelp output by simply using a parameter in the transformation scenario to point to your *favicon* image.

This customization can be done using an *Oxygen Publishing Template* or using a transformation scenario from within **Oxygen XML Editor/Author**.

### Using a Publishing Template

To add a *favicon* to your WebHelp output using an *Oxygen Publishing Template*, follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the `webhelp.favicon` parameter in the *parameters* section with its value set to path of your image.

```
<publishing-template>
...
<webhelp>
...
<parameters>
 <parameter name="webhelp.favicon" value="c:\myFavicon.jpg"/>
</parameters>
</webhelp>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

**Result:** Browsers that provide *favicon* support will display the *favicon* (typically in the browser's address bar, in the list of bookmarks, and in the history).

### Using a Transformation Scenario in Oxygen XML Editor/Author

To add a *favicon* to your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
2. Open the **Parameters** tab and set the `webhelp.favicon` parameter to the path of your image.
3. Click **OK** to save the changes to the transformation scenario.
4. Run the transformation scenario.

## How to Add Video and Audio Objects in DITA WebHelp Output

You can insert references to video and audio media resources (such as videos, audio clips, or embedded HTML frames) in your DITA topics and then publish them to WebHelp output. The media objects can be played directly in all HTML5-based outputs, including WebHelp systems.

To add media objects in the WebHelp output generated from DITA documents, follow the procedures below.

### Adding Videos to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the video by adding an object element, as in one of the following examples:

```
<object outputclass="video" type="video/mp4" data="MyVideo.mp4"/>
```

or, instead of the data attribute, you can specify the video using a parameter like this:

```
<object outputclass="video">
 <param name="src" value="videos/MyVideo.mp4"/>
</object>
```

2. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the object element to an HTML5 video element.

```
<video controls="controls"><source type="video/mp4" src="MyVideo.mp4"></source>
</video>
```

### Adding Audio Clips to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the audio clip by adding an object element, as in one of the following examples:

```
<object outputclass="audio" type="audio/mpeg" data="MyClip.mp3"/>
```

or, instead of the data attribute, you can specify the video using a parameter like this:

```
<object outputclass="audio">
 <param name="src" value="audio/MyClip.mp3"/>
</object>
```

2. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the object element to an HTML5 audio element.

```
<audio controls="controls"><source type="audio/mpeg" src="MyClip.mp3"></source>
</audio>
```

### Adding Embedded HTML Frames (such as YouTube videos) to DITA WebHelp Output

1. Edit the DITA topic and insert a reference to the embedded object by manually adding an object element, as in one of the following examples:

```
<object outputclass="iframe" data="https://www.youtube.com/embed/m_vv2s5Trn4"/>
```

or, instead of the data attribute, you can specify the object using a parameter like this:

```
<object outputclass="iframe">
 <param name="src" value="http://www.youtube.com/embed/m_vv2s5Trn4"/>
</object>
```

2. If you want the video to be allowed to play in full screen mode once the document is converted to XHTML output, also add an allowfullscreen parameter and set its value to **true**:

```
<object outputclass="iframe" data="https://www.youtube.com/embed/m_vv2s5Trn4"/>
 <param name="allowfullscreen" value="true"/>
</object>
```

3. Apply a **DITA to WebHelp** transformation to obtain the output.

**Result:** The transformation converts the object element to an HTML5 iframe element.

```
<iframe controls="controls" src="https://www.youtube.com/embed/m_vv2s5Trn4">
</iframe>
```

## Searching the Output

This section contains topics that explain how to use some of the search features in WebHelp Responsive output.

### *How to Change Element Scoring in Search Results*

The WebHelp **Search** feature is enhanced with a rating mechanism that computes scores for every page that matches the search criteria. HTML tag elements are assigned a scoring value and these values are evaluated for the search results. The WebHelp directory includes a properties file that defines the scoring values for tag elements and this file can be edited to customize the values according to your needs.

To edit the scoring values of HTML tag element for enhancing WebHelp search results, follow these steps:

1. Edit the scoring properties file for DITA. The properties file includes instructions and examples to help you with your customization. The file is located in: *DITA-OT-DIR*\plugins\com.oxygenxml.webhelp.responsive\indexer\scoring.properties.

The values that can be edited in the scoring.properties file:

```
h1 = 10
h2 = 9
h3 = 8
h4 = 7
h5 = 6
h6 = 5
b = 5
strong = 5
em = 3
i = 3
u = 3
div.toc = -10
title = 20
div.ignore = ignored
meta.keywords = 20
meta.indexterms = 20
meta.description = 25
shortdesc = 25
```

2. Save your changes to the file.
3. Re-run your WebHelp transformation.

### *How to Exclude Certain DITA Topics from Search Results*

There are several ways to exclude certain DITA resources from your WebHelp system's search results. This is useful if you have topics in your *DITA map* structure that you do not want to be included in search results for your WebHelp system. The first method involves setting a parameter in the WebHelp transformation scenario and the second involves setting an attribute for each DITA topic reference that you want to exclude.

## Transformation Parameter Method

To exclude DITA topics from WebHelp search results using a transformation parameter, follow these steps:

1. Create a simple text file that will contain your excluded file patterns. Each pattern must be on a new line. The patterns are considered to be relative to the output directory and they accept wildcards such as '\*' (matches zero or more characters) or '?' (matches one character). For more information about the patterns, see <https://ant.apache.org/manual/dirtasks.html#patterns>.

**Example:** Suppose that in your project, you want to exclude all files located in the resources directory and all files located in the topics directory that have a .bak file extension. You could create a simple text file (for example, named exclude.properties), and add the following lines:

```
resources/*
topics/*.bak
```

2. Set the webhelp.search.custom.excludes.file parameter to specify the path to the file that contains the excluded file patterns (for example, exclude.properties in step 1). The parameter can be specified in the [parameters section of the template descriptor file](#) associated with your publishing template or in the **Parameters** tab of the transformation scenario dialog box in **Oxygen XML Editor/Author**.

3. Run the transformation.

## Search Attribute Method

The WebHelp **Search** engine does not index DITA topics that have the `@search` attribute set to `no`.

To exclude DITA topics from WebHelp search results using this attribute, follow these steps:

1. Edit the *DITA map* and for any `topicref` that you want to exclude from search results, set the `search` attribute to `no`.

For example:

```
<topicref href="../../../topics/internal-topic1.dita" search="no"/>
```

2. Save your changes to the *DITA map*.
3. Run your WebHelp system transformation.

## How to Optimize Search Results

A **DITA Map WebHelp** transformation scenario can be configured to produce a `sitemap.xml` file that is used by search engines to aid crawling and indexing mechanisms. A *sitemap* lists all pages of a WebHelp system and allows webmasters to provide additional information about each page, such as the date it was last updated, change frequency, and importance of each page in relation to other pages in your WebHelp deployment.

The structure of the `sitemap.xml` file looks like this:

```
<urlset xmlns="http://www.sitemaps.org/schemas/sitemap/0.9">
 <url>
 <loc>http://www.example.com/topics/introduction.html</loc>
 <lastmod>2014-10-24</lastmod>
 <changefreq>weekly</changefreq>
 <priority>0.5</priority>
 </url>
 <url>
 <loc>http://www.example.com/topics/care.html#care</loc>
 <lastmod>2014-10-24</lastmod>
 <changefreq>weekly</changefreq>
 <priority>0.5</priority>
 </url>
 .
 .
</urlset>
```

Each page has a `<url>` element structure containing additional information, such as:

- **loc** - the URL of the page. This URL must begin with the protocol (such as `http`), if required by your web server. It is constructed from the value of the `webhelp.sitemap.base.url` parameter from the transformation scenario and the relative path to the page (collected from the `href` attribute of a `topicref` element in the *DITA map*).

**Note:** The value must have fewer than 2,048 characters.

- **lastmod** (optional) - the date when the page was last modified. The date format is `YYYY-MM-DD`.
- **changefreq** (optional) - indicates how frequently the page is likely to change. This value provides general information to assist search engines, but may not correlate exactly to how often they crawl the page. Valid values are: `always`, `hourly`, `daily`, `weekly`, `monthly`, `yearly`, and `never`. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.change.frequency` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.

**Note:** The value `always` should be used to describe documents that change each time they are accessed. The value `never` should be used to describe archived URLs.

- **priority** (optional) - the priority of this page relative to other pages on your site. Valid values range from 0.0 to 1.0. This value does not affect how your pages are compared to pages on other sites. It only lets the search engines know which pages you deem most important for the crawlers. The first time the `sitemap.xml` file is generated, the value is set based upon the value of the `webhelp.sitemap.priority` parameter in the DITA WebHelp transformation scenario. You can change the value in each `url` element by editing the `sitemap.xml` file.

## Creating and Editing the sitemap.xml File

Follow these steps to produce a `sitemap.xml` file for your WebHelp system, which can then be edited to fine-tune search engine optimization:

1. **Edit** the transformation scenario you currently use for obtaining your WebHelp output. This opens the **Edit DITA Scenario** dialog box.
2. Open the **Parameters** tab and set a value for the following parameters:
  - **webhelp.sitemap.base.url** - the URL of the location where your WebHelp system is deployed  
**Note:** This parameter is required for Oxygen XML Developer to generate the `sitemap.xml` file.
  - **webhelp.sitemap.change.frequency** - how frequently the WebHelp pages are likely to change (accepted values are: always, hourly, daily, weekly, monthly, yearly, and never)
  - **webhelp.sitemap.priority** - the priority of each page (value ranging from 0.0 to 1.0)
3. Run the transformation scenario.
4. Look for the `sitemap.xml` file in the transformation's output folder. Edit the file to fine-tune the parameters of each page, according to your needs.

### How to Index Japanese Content

To optimize the indexing of Japanese content in WebHelp pages, the Lucene Kuromoji Japanese analyzer can be used. This analyzer is included in the **Oxygen XML Editor/Author** installation kit.

## Using a Publishing Template

To add a logo in the title area of your WebHelp output using an [Oxygen Publishing Template](#), follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the `args.default.language` parameter in the `parameters` section with its value set to `ja-jp`.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="args.default.language" value="ja-jp" />
 </parameters>
</webhelp>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

## Using a Transformation Scenario in Oxygen XML Editor/Author

To activate the Japanese indexing in your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit a **DITA to WebHelp** transformation scenario and in the **Parameters** tab, set the value of the `args.default.language` parameter to `ja-jp`.  
**Note:** Alternatively, you could set the `xml:lang` attribute on the root of the [DITA map](#) and the referenced topics to `ja-jp`. Another alternative for DITA output is to use the `webhelp.search.japanese.dictionary` parameter to specify a path to a Japanese dictionary that will be used by the *Kuromoji* morphological engine.
2. Run the WebHelp transformation scenario to generate the output.

## Localization

This section contains topics that explain how to use the localization support in WebHelp Responsive output.

### How to Localize Email Notifications of Feedback System

The feedback-enabled WebHelp Responsive systems use emails to notify users when comments are posted. These emails are based on templates stored in the WebHelp directory. The default messages are in English,

French, German, and Japanese. These messages are copied into the WebHelp system deployment directory during the execution of the corresponding transformation scenario.

### Using a Publishing Template

To change the language of the emails for DITA Map WebHelp Responsive with Feedback output using an [Oxygen Publishing Template](#), follow this procedure:

1. Create the following directory:

```
DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\nl
```

2. Copy all English template files from *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\en* and paste them into the directory you just created.
3. Edit the HTML files from the *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\nl* directory and translate the content into your language.
4. Open the [template descriptor file](#) associated with your publishing template and add the `args.default.language` parameter in the *parameters* section with its value set to the appropriate language code (for example, `nl` for Dutch).

**Note:** If you set the parameter to a value such as `LanguageCode-CountryCode` (for example, `en-us`), the transformation scenario will only use the language code.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="args.default.language" value="nl"/>
 </parameters>
</webhelp>
```

5. Open the *DITA Map WebHelp Responsive* transformation scenario.
6. Click the **Choose Custom Publishing Template** link and select your template.
7. Click **OK** to save the changes to the transformation scenario.
8. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To change the language of the emails for DITA Map WebHelp Responsive with Feedback output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create the following directory:

```
DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\nl
```

2. Copy all English template files from *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\en* and paste them into the directory you just created.
3. Edit the HTML files from the *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\oxygen-webhelp\resources\php\templates\nl* directory and translate the content into your language.
4. Edit a **DITA Map WebHelp Responsive** transformation scenario and open the **Parameters** tab.
5. In the **Parameters** tab, look for the `args.default.language` parameter and set its value to the appropriate language code (for example, `nl` for Dutch).

**Note:** If you set the parameter to a value such as `LanguageCode-CountryCode` (for example, `en-us`), the transformation scenario will only use the language code.

6. Run the transformation scenario.

#### Related Information:

[Feedback System](#) on page 863



## How to Localize the Interface of WebHelp Responsive Output

Static labels used in the WebHelp output are stored in translation files that have the *strings-lang1-lang2.xml* name format, where *lang1* and *lang2* are ISO language codes. For example, the US English labels are kept in the *strings-en-us.xml* file.

These translation files are collected from two locations:

- *DITA-OT-DIR/xsl/common* folder - DITA-OT's default translations.
- *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* folder - These translations are contributed by the WebHelp plugin and extend the default ones provided by DITA-OT. The labels defined in this folder take precedence over the DITA-OT default ones.

**Important:** If you need to customize the translation labels, you should do this by updating the translation files found in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* folder.

## Using a Publishing Template

To localize the interface of the DITA Map to WebHelp output using an [Oxygen Publishing Template](#), follow this procedure:

1. Look for the *strings-[lang1]-[lang2].xml* file in *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, use the following procedure to create one:
  - a. Create a new *strings-fr-ca.xml* file in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* directory.
  - b. Copy all the labels found in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization/strings-en-us.xml* and paste them into the newly created file.
  - c. Copy all the labels found in the *DITA-OT-DIR/xsl/common/strings-en-us.xml* and paste them into the newly created file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. In the home directory of the DITA Open Toolkit, run the *startcmd.bat* script on Windows or *startcmd.sh* script on Linux/Mac OS X. In the displayed command line interface console, run `ant -f integrator.xml`.
4. Make sure that the new XML file that you created is listed in the file *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization/strings.xml*. For example, the Canadian French file would be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
5. Open the [template descriptor file](#) associated with your publishing template and add the `args.default.language` parameter in the *parameters* section with its value set to the appropriate language code (for example, *fr-ca* for Canadian French).

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="args.default.language" value="fr-ca"/>
 </parameters>
</webhelp>
```

6. Open the *DITA Map WebHelp Responsive* transformation scenario.
7. Click the **Choose Custom Publishing Template** link and select your template.
8. Click **OK** to save the changes to the transformation scenario.
9. Run the transformation scenario.

## Using a Transformation Scenario in Oxygen XML Editor/Author

To localize the interface of the DITA Map to WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:



1. Look for the *strings-[lang1]-[lang2].xml* file in *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* directory (for example, the Canadian French file would be: *strings-fr-ca.xml*). If it does not exist, use the following procedure to create one:
  - a. Create a new *strings-fr-ca.xml* file in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization* directory.
  - b. Copy all the labels found in the *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization/strings-en-us.xml* and paste them into the newly created file.
  - c. Copy all the labels found in the *DITA-OT-DIR/xsl/common/strings-en-us.xml* and paste them into the newly created file.
2. Translate all the labels from the above language file. Labels are stored in XML elements that have the following format: `<str name="Label name">Caption</str>`.
3. Run the predefined transformation scenario called **Run DITA-OT Integrator** from the  **Apply Transformation Scenario(s)** or  **Configure Transformation Scenario(s)** dialog box. If the *integrator* is not visible, select the **Show all scenarios** action that is available in the  **Settings** drop-down menu.
4. Make sure that the new XML file that you created is listed in the file *DITA-OT-DIR/plugins/com.oxygenxml.webhelp.responsive/oxygen-webhelp/resources/localization/strings.xml*. For example, the Canadian French file would be listed as: `<lang xml:lang="fr-ca" filename="strings-fr-ca.xml"/>`.
5. Edit a **DITA Map to WebHelp Responsive** transformation scenarios (with or without feedback) and set the `args.default.language` parameter to the code of the language you want to localize (for example, *fr-ca* for Canadian French).
6. Run the transformation scenario to produce the WebHelp output.

#### Related Information:

[How to Index Japanese Content](#) on page 912

#### *How to Activate Support for Right-to-Left (RTL) Languages*

To activate support for RTL (right-to-left) languages in WebHelp output, edit the [DITA map](#) and set the `xml:lang` attribute on its root element (map). The corresponding attribute value can be set for following RTL languages:

- `ar-eg` - Arabic
- `he-il` - Hebrew
- `ur-pk` - Urdu

#### **Integrate Social Media and Google Tools in the WebHelp Output**

Oxygen XML Developer includes support for integrating some of the most popular social media sites in WebHelp output.

#### *How to Add a Facebook Like Button in WebHelp Responsive Output*

It is possible to integrate Facebook™ into your **WebHelp Responsive** output and you can specify where you want the widget to appear in your WebHelp page.

#### **Using a Publishing Template**

To add a Facebook™ *Like* widget to your WebHelp output using an [Oxygen Publishing Template](#), follow this procedure:

1. Go to the [Facebook Developers](#) website.
2. Fill-in the displayed form, then click the **Get Code** button.
3. Copy the two code snippets and paste them into a `<div>` element inside an XML file called `facebook-widget.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each `script` element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!--
 (function(d, s, id) {
 var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs);
 }(document, 'script', 'facebook-jssdk'));
 -->
 </script>
 <div class="fb-like" data-layout="standard" data-action="like"
 data-show-faces="true" data-share="true"/>
</div>
```

4. Open the [template descriptor file](#) associated with your publishing template.
5. Use [one of the parameters that begin with webhelp.fragment](#) in the *html-fragments* section of the descriptor file. Set the value of that parameter to reference the `facebook-widget.xml` file that you created earlier.

```
<publishing-template>
...
<webhelp>
...
 <html-fragments>
 <fragment
 file="HTML-fragments/facebook-widget.xml"
 placeholder="webhelp.fragment.after.toc_or_tiles"/>
 </html-fragments>
 </webhelp>
```

6. Open the *DITA Map WebHelp Responsive* transformation scenario.
7. Click the **Choose Custom Publishing Template** link and select your template.
8. Click **OK** to save the changes to the transformation scenario.
9. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To add a Facebook™ Like widget to your WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Facebook Developers](#) website.
2. Fill-in the displayed form, then click the **Get Code** button.
3. Copy the two code snippets and paste them into a `<div>` element inside an XML file called `facebook-widget.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each `script` element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="facebook">
 <div id="fb-root"/>
 <script>
 <!--
 (function(d, s, id) {
 var js, fjs = d.getElementsByTagName(s)[0];
 if (d.getElementById(id)) return;
 js = d.createElement(s); js.id = id;
 js.src = "//connect.facebook.net/en_US/sdk.js#xfbml=1&version=v2.0";
 fjs.parentNode.insertBefore(js, fjs);
 }(document, 'script', 'facebook-jssdk'));
 -->
 </script>
 <div class="fb-like" data-layout="standard" data-action="like"
 data-show-faces="true" data-share="true"/>
</div>
```

4. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
5. Switch to the **Parameters** tab. Depending on where you want to display the button, edit [one of the parameters that begin with webhelp.fragment](#). Set that parameter to reference the `facebook-widget.xml` file that you created earlier.

6. Click **Ok** and run the transformation scenario.

#### How to Add a Google+ Button in WebHelp Responsive Output

It is possible to integrate Google into your **WebHelp Responsive** output and you can specify where you want the widget to appear in your WebHelp page.

### Using a Publishing Template

To add a Google+ widget to your WebHelp Responsive output using an [Oxygen Publishing Template](#), follow this procedure:

1. Go to the [Google Developers](#) website.
2. Fill-in the displayed form. The preview area on the right side displays the code and a preview of the widget.
3. Copy the code snippet displayed in the preview area and paste it into a div element inside an XML file called `google-plus-button.xml`. Make sure that the content of the file is well-formed. The content of the XML file should look like this:

```
<div id="google-plus">
 <!-- Place this tag in your head or just before your close body tag. -->
 <script src="https://apis.google.com/js/platform.js" async defer></script>

 <!-- Place this tag where you want the +1 button to render. -->
 <div class="g-plusone" data-annotation="inline" data-width="300"></div>
</div>
```

4. Open the [template descriptor file](#) associated with your publishing template.
5. Use [one of the parameters that begin with webhelp.fragment](#) in the `html-fragments` section of the descriptor file. Set the value of that parameter to reference the `google-plus-button.xml` file that you created earlier.

```
<publishing-template>
...
<webhelp>
...
 <html-fragments>
 <fragment
 file="HTML-fragments/google-plus-button.xml"
 placeholder="webhelp.fragment.after.toc_or_tiles"/>
 </html-fragments>
 </webhelp>
```

6. Open the *DITA Map WebHelp Responsive* transformation scenario.
7. Click the **Choose Custom Publishing Template** link and select your template.
8. Click **OK** to save the changes to the transformation scenario.
9. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To add a Google+ widget to your WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Google Developers](#) website.
2. Fill-in the displayed form. The preview area on the right side displays the code and a preview of the widget.
3. Copy the code snippet displayed in the preview area and paste it into a div element inside an XML file called `google-plus-button.xml`. Make sure that the content of the file is well-formed. The content of the XML file should look like this:

```
<div id="google-plus">
 <!-- Place this tag in your head or just before your close body tag. -->
 <script src="https://apis.google.com/js/platform.js" async defer></script>

 <!-- Place this tag where you want the +1 button to render. -->
 <div class="g-plusone" data-annotation="inline" data-width="300"></div>
</div>
```

4. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
5. Switch to the **Parameters** tab. Depending on where you want to display the button, edit [one of the parameters that begin with webhelp.fragment](#). Set that parameter to reference the `google-plus-button.xml` file that you created earlier.
6. Click **Ok** and run the transformation scenario.

## How to Add Tweet Button in WebHelp Responsive Output

It is possible to integrate *Twitter* into your **WebHelp Responsive** output and you can specify where you want the widget to appear in your WebHelp page.

### Using a Publishing Template

To add a Twitter™ Tweet widget to your WebHelp Responsive output using an *Oxygen Publishing Template*, follow this procedure:

1. Go to the [Tweet button generator](#) page.
2. Fill-in the displayed form. The **Preview and code** area displays the code that you will need.
3. Copy the code snippet displayed in the **Preview and code** area and paste it into a div element inside an XML file called `tweet-button.xml`. Make sure you follow these rules:
  - The file must be well-formed.
  - The code for each script element must be included in an XML comment.
  - The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="twitter">
 Tweet
 <script>
 <!--
 !function (d, s, id) {
 var
 js, fjs = d.getElementsByTagName(s)[0], p = /^http:/.test(d.location)
 ? 'http' : 'https';
 if (! d.getElementById(id)) {
 js = d.createElement(s);
 js.id = id;
 js.src = p + '://platform.twitter.com/widgets.js';
 fjs.parentNode.insertBefore(js, fjs);
 }
 }(document,
 'script', 'twitter-wjs');
 -->
 </script>
</div>
```

4. Open the [template descriptor file](#) associated with your publishing template.
5. Use [one of the parameters that begin with webhelp.fragment](#) in the *html-fragments* section of the descriptor file. Set the value of that parameter to reference the `tweet-button.xml` file that you created earlier.

```
<publishing-template>
...
 <webhelp>
 ...
 <html-fragments>
 <fragment
 file="HTML-fragments/tweet-button.xml"
 placeholder="webhelp.fragment.after.toc_or_tiles"/>
 </html-fragments>
 </webhelp>
 </publishing-template>
```

6. Open the *DITA Map WebHelp Responsive* transformation scenario.
7. Click the **Choose Custom Publishing Template** link and select your template.
8. Click **OK** to save the changes to the transformation scenario.
9. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To add a Twitter™ Tweet widget to your WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Tweet button generator](#) page.
2. Fill-in the displayed form. The **Preview and code** area displays the code that you will need.
3. Copy the code snippet displayed in the **Preview and code** area and paste it into a div element inside an XML file called `tweet-button.xml`. Make sure you follow these rules:
  - The file must be well-formed.

- The code for each script element must be included in an XML comment.
- The start and end tags for the XML comment must be on a separate line.

The content of the XML file should look like this:

```
<div id="twitter">
 Tweet
 <script>
 <!--
 !function(d,s,id){
 var
 js,fjs=d.getElementsByTagName(s)[0],p=/^http:/.test(d.location)
 ? 'http': 'https';
 if(!d.getElementById(id)){
 js=d.createElement(s);
 js.id=id;
 js.src=p+'://platform.twitter.com/widgets.js';
 fjs.parentNode.insertBefore(js,fjs);
 }
 (document,
 'script','twitter-wjs');
 -->
 </script>
 </div>
```

4. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
5. Switch to the **Parameters** tab. Depending on where you want to display the button, edit [one of the parameters that begin with `webhelp.fragment`](#). Set that parameter to reference the `tweet-button.xml` file that you created earlier.
6. Click **Ok** and run the transformation scenario.

#### How to Integrate Google Analytics in WebHelp Responsive Output

You can use *Google Analytics* to track and report site data for your **WebHelp Responsive** output.

#### Using a Publishing Template

To integrate *Google Analytics* into your WebHelp Responsive output using an [Oxygen Publishing Template](#), follow this procedure:

1. Create a new [Google Analytics account](#) (if you do not already have one) and log on.
2. Choose the Analytics solution that best fits the needs of your website.
3. Follow the on-screen instructions to obtain a **Tracking Code** that contains your *Tracking ID*. A **Tracking Code** looks like this:

```
<script>
 (function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||function(){
 (i[r].q=i[r].q||[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
 m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
 })(window,document,'script','//www.google-analytics.com/analytics.js','ga');

 ga('create','UA-XXXXXXX-X','auto');
 ga('send','pageview');
</script>
```

4. Save the Tracking Code (obtained in the previous step) in a new XML file called `googleAnalytics.xml`. Note that the file should only contain the tracking code.
5. Open the [template descriptor file](#) associated with your publishing template.
6. Use the [webhelp.fragment.after.body](#) parameter in the *html-fragments* section of the descriptor file. Set the value of that parameter to reference the `googleAnalytics.xml` file that you created earlier. The content of this file will be copied at the end of all generated output pages, right before the ending `<body>` element. This ensures that the page is loaded before the Google Analytics servers are contacted, thus reducing page loading time.

```
<publishing-template>
...
<webhelp>
...
 <html-fragments>
 <fragment
 file="HTML-fragments/googleAnalytics.xml"
 placeholder="webhelp.fragment.after.body" />
 </html-fragments>
 </webhelp>
```

7. Open the *DITA Map WebHelp Responsive* transformation scenario.
8. Click the **Choose Custom Publishing Template** link and select your template.
9. Click **OK** to save the changes to the transformation scenario.
10. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To integrate *Google Analytics* into your WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a new [Google Analytics account](#) (if you do not already have one) and log on.
2. Choose the Analytics solution that best fits the needs of your website.
3. Follow the on-screen instructions to obtain a **Tracking Code** that contains your *Tracking ID*. A **Tracking Code** looks like this:

```
<script>
(function(i,s,o,g,r,a,m){i['GoogleAnalyticsObject']=r;i[r]=i[r]||function(){
(i[r].q=i[r].q||[]).push(arguments)},i[r].l=1*new Date();a=s.createElement(o),
m=s.getElementsByTagName(o)[0];a.async=1;a.src=g;m.parentNode.insertBefore(a,m)
})(window,document,'script','/www.google-analytics.com/analytics.js','ga');

ga('create','UA-XXXXXXX-X','auto');
ga('send','pageview');
</script>
```

4. Save the Tracking Code (obtained in the previous step) in a new XML file called `googleAnalytics.xml`. Note that the file should only contain the tracking code.
5. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
6. Switch to the **Parameters** tab. Edit the [webhelp.fragment.after.body parameter](#) and set it to reference the `googleAnalytics.xml` file that you created earlier. The content of this file will be copied at the end of all generated output pages, right before the ending `<body>` element. This ensures that the page is loaded before the Google Analytics servers are contacted, thus reducing page loading time.
7. Click **Ok** and run the transformation scenario.

### How to Integrate Google Search in WebHelp Responsive Output

It is possible to integrate the *Google Search Engine* into your **WebHelp Responsive** output and you can specify where you want the results to appear in your WebHelp page.

### Using a Publishing Template

To integrate the *Google Search Engine* into your WebHelp Responsive output using an [Oxygen Publishing Template](#), follow this procedure:

1. Go to the [Google Custom Search Engine page](#) using your Google account.
2. Select the **Create a custom search engine** button.
3. Follow the on-screen instructions to create a search engine for your site. At the end of this process you should obtain a code snippet that looks like this:

```
<script>
(function() {
 var cx =
 '000888210889775888983:8mn4x_mf-yg';
 var gcse = document.createElement('script');
 gcse.type = 'text/javascript';
 gcse.async = true;
 gcse.src = (document.location.protocol == 'https:' ?
 'https:' : 'http:') + '//www.google.com/cse/cse.js?cx=' + cx;
 var s = document.getElementsByTagName('script')[0];
 s.parentNode.insertBefore(gcse, s);
})();
</script>
```

4. Save the script into a well-formed HTML file called `googlecse.html`.
5. Open the [template descriptor file](#) associated with your publishing template and add the `webhelp.google.search.script` parameter in the *parameters* section with its value set to reference the `googlecse.html` file that you created earlier.

```
<publishing-template>
```

```

...
<webhelp>
 ...
 <parameters>
 <parameter name="webhelp.google.search.script" value="resources/googlecse.html" />
 </parameters>
</webhelp>

```

6. You can also use the `webhelp.google.search.results` parameter to choose where to display the search results.
  - a. Create an HTML file with the following content: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>` (you must use the [HTML5 version for the GCSE](#)). For more information about other supported attributes, see [Google Custom Search: Supported Attributes](#).
  - b. Set the value of the `webhelp.google.search.results` parameter to the file path of the file you just created. If this parameter is not specified, the following code is used: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>`.
7. Open the *DITA Map WebHelp Responsive* transformation scenario.
8. Click the **Choose Custom Publishing Template** link and select your template.
9. Click **OK** to save the changes to the transformation scenario.
10. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To integrate the *Google Search Engine* into your WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Go to the [Google Custom Search Engine page](#) using your Google account.
2. Select the **Create a custom search engine** button.
3. Follow the on-screen instructions to create a search engine for your site. At the end of this process you should obtain a code snippet that looks like this:

```

<script>
(function() {
 var cx =
 '000888210889775888983:8mn4x_mf-yg';
 var gcse = document.createElement('script');
 gcse.type = 'text/javascript';
 gcse.async = true;
 gcse.src = (document.location.protocol == 'https:' ?
 'https:' : 'http:') + '//www.google.com/cse/cse.js?cx=' + cx;
 var s = document.getElementsByTagName('script')[0];
 s.parentNode.insertBefore(gcse, s);
})();
</script>

```

4. Save the script into a well-formed HTML file called `googlecse.html`.
5. Edit the *DITA Map WebHelp Responsive* transformation scenario and choose a *template*.
6. Switch to the **Parameters** tab and edit the `webhelp.google.search.script` parameter to reference the `googlecse.html` file that you created earlier.
7. You can also use the `webhelp.google.search.results` parameter to choose where to display the search results.
  - a. Create an HTML file with the following content: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>` (you must use the [HTML5 version for the GCSE](#)). For more information about other supported attributes, see [Google Custom Search: Supported Attributes](#).
  - b. Set the value of the `webhelp.google.search.results` parameter to the file path of the file you just created. If this parameter is not specified, the following code is used: `<div class="gcse-searchresults-only" data-autoSearchOnLoad="true" data-queryParameterName="searchQuery"></div>`.
8. Click **Ok** and run the transformation scenario.



## XSLT Extensions

Since WebHelp Responsive output is primarily obtained by running XSLT transformations over the DITA input files (through the **DITA Map WebHelp Responsive** transformation scenarios), one customization method would be to override the default XSLT templates that are used by the WebHelp Responsive transformations.

There are two methods available to override the XSLT stylesheets implied by the WebHelp Responsive transformation.

- Use XSLT-import extension points from an *Oxygen Publishing Template*.

**Note:** Use this method if you want to affect only the transformations that use this *publishing template*.

- Use XSLT-import extension points from a DITA-OT extension plugin.

**Note:** This method will affect all the outputs generated with the WebHelp system.

### Related Information:

[WebHelp Responsive XSLT-Import and XSLT-Parameter Extension Points](#) on page 896

#### How to Use XSLT Extension Points from a Publishing Template

This example demonstrates how to use WebHelp XSLT-import Extension Points from a *Oxygen Publishing Template*.

Use Case 1: Add Copyright Information Extracted from a DITA Bookmap

Suppose you want to customize the WebHelp Responsive main page by adding information about the legal rights associated with the book in the footer (for example, copyright dates and owner). This information is specified in the bookmap:

```
<bookrights>
 <copyrfirst>
 <year>2002</year>
 </copyrfirst>
 <copyrlast>
 <year>2017</year>
 </copyrlast>
 <bookowner>
 <organization>SyncRO Soft SRL</organization>
 </bookowner>
</bookrights>
```

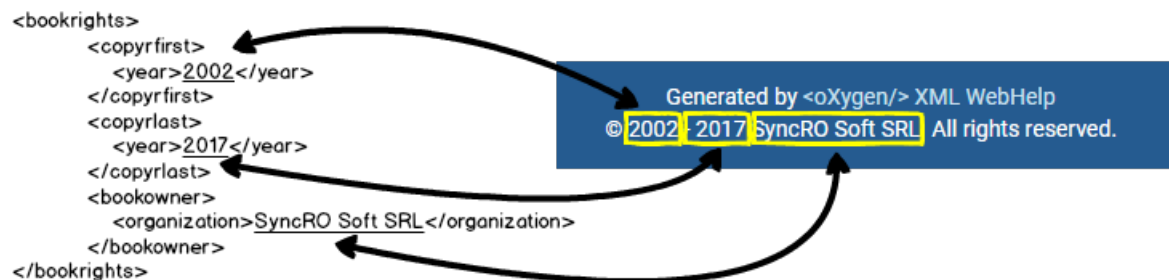


**Figure 439: Example: Copyright information added in the WebHelp footer**

The XSLT stylesheet that generates the main page is located in: `DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\xsl\mainFiles\createMainPage.xsl`. This XSLT stylesheet declares the `copy_template` mode that processes the [main page template](#) to expand its components. The main page template declares a component for the footer section that looks like this:

```
<div class=" footer-container text-center ">
 <whc:include_html href="{webhelp.fragment.footer}" />
</div>
```

In the following example, the extension stylesheet will add a template that matches this component. It applies the default processing and adds the copyright information at the end.

```
<xsl:template match="*:div[contains(@class, 'footer-container')]" mode="copy_template">
 <!-- Apply the default processing -->
 <xsl:next-match/>

 <!-- Add a div containing the copyright information -->
 <div class="copyright_info">
```



```

<xsl:choose>
 <!-- Adds the start-end years if they are defined -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst) and
 exists($toc/*:topicmeta/*:bookrights/*:copyrlast)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>
 -<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrlast"/>

 </xsl:when>

 <!-- Adds only the first year if last is not defined. -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>

 </xsl:when>
</xsl:choose>

<xsl:if test="exists($toc/*:topicmeta/*:bookrights/*:bookowner/*:organization)">

 <xsl:text> </xsl:text><xsl:value-of
 select="$toc/*:topicmeta/*:bookrights/*:bookowner/*:organization"/>
 <xsl:text>. All rights reserved.</xsl:text>

</xsl:if>
</div>
</xsl:template>

```

To add this functionality using a , follow these steps:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Link the folder associated with the template in the **Project** view.  
You should have the custom\_footer\_template folder linked in your project.
3. Using the **Project** view, create an xslt folder inside the project root folder.  
You should have the custom\_footer\_template/xsl folder in your project.
4. Create your customization stylesheet (for example, **custom\_mainpage.xsl**) in the custom\_footer\_template/xsl folder. Edit it to override the template that produces the footer section:

```

<xsl:template match="*:div[contains(@class, 'footer-container')]" mode="copy_template">
 <!-- Apply the default processing -->
 <xsl:next-match/>

 <!-- Add a div containing the copyright information -->
 <div class="copyright_info">
 <xsl:choose>
 <!-- Adds the start-end years if they are defined -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst) and
 exists($toc/*:topicmeta/*:bookrights/*:copyrlast)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>
 -<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrlast"/>

 </xsl:when>

 <!-- Adds only the first year if last is not defined. -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>

 </xsl:when>
 </xsl:choose>

 <xsl:if test="exists($toc/*:topicmeta/*:bookrights/*:bookowner/*:organization)">

 <xsl:text> </xsl:text><xsl:value-of
 select="$toc/*:topicmeta/*:bookrights/*:bookowner/*:organization"/>
 <xsl:text>. All rights reserved.</xsl:text>

 </xsl:if>
 </div>
</xsl:template>

```

5. Open the [template descriptor file](#) associated with your publishing template and set the XSLT stylesheet created in previous step with the `com.oxygenxml.webhelp.xsl.createMainPage` XSLT extension point.

```

<publishing-template>
 ...
 <webhelp>
 ...
 <xslt>
 <extension
 file="xslt/customMainPage.xsl"
 id="com.oxygenxml.webhelp.xsl.createMainPage" />
 </xslt>
 </webhelp>
</publishing-template>

```

6. Open the *DITA Map WebHelp Responsive* transformation scenario.
7. Click the **Choose Custom Publishing Template** link and select your template.
8. Click **OK** to save the changes to the transformation scenario.
9. Run the transformation scenario.

Use Case 2: Add generation time in the output footer

Another possible customization for the main page is to add the generation time in its footer. We will use a transformation parameter to control if this customization is active or not.




**Figure 440: Generation time added in the WebHelp footer**

To add this functionality, follow these steps:

1. In the customization stylesheet that you just created (for example, **custom\_mainpage.xsl**), modify the template by adding the following XSLT code at the end.

```
<xsl:if test="oxyf:getParameter('webhelp.footer.add.generation.time') = 'yes'">
 <div class="generation_time">
 Generation date: <xsl:value-of
 select="format-dateTime(
 current-dateTime(),
 '[h1]:[m01] [P] on [M01]/[D01]/[Y0001].')"/>
 </div>
</xsl:if>
```

**Note:** You can read the value of a WebHelp transformation parameter from your XSLT extension stylesheets by using the `getParameter(param.name)` function from the <http://www.oxygenxml.com/functions> namespace.

2. Open the [template descriptor file](#) associated with your publishing template and set the `webhelp.footer.add.generation.time` parameter to the default value.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter
 name="webhelp.footer.add.generation.time"
 value="yes" />
 </parameters>
</webhelp>
</publishing-template>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. In the **Parameters** tab, you can change the value of the `webhelp.footer.add.generation.time` parameter.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

#### *How to Use XSLT Extension Points from a DITA-OT Plugin*

In this example, the main page footer is modified by adding copyright information extracted from the DITA bookmap or by adding the output generation time. The first use-case uses an XSLT-Import extension point while the second uses an XSLT-Parameter extension point.

**Note:** This customization is available as a GitHub project at: <https://github.com/oxygenxml/com.oxygenxml.webhelp.responsive.custom.footer>.

#### **Use Case 1: WebHelp XSLT-Import extension point to add copyright information extracted from a DITA Bookmap**

Suppose you want to customize the WebHelp Responsive main page by adding information about the legal rights associated with the book in the footer (for example, copyright dates and owner). This information is specified in the bookmap:

```
<bookrights>
```

```

<copyrfirst>
 <year>2002</year>
</copyrfirst>
<copyrlast>
 <year>2017</year>
</copyrlast>
<bookowner>
 <organization>SyncRO Soft SRL</organization>
</bookowner>
</bookrights>

```

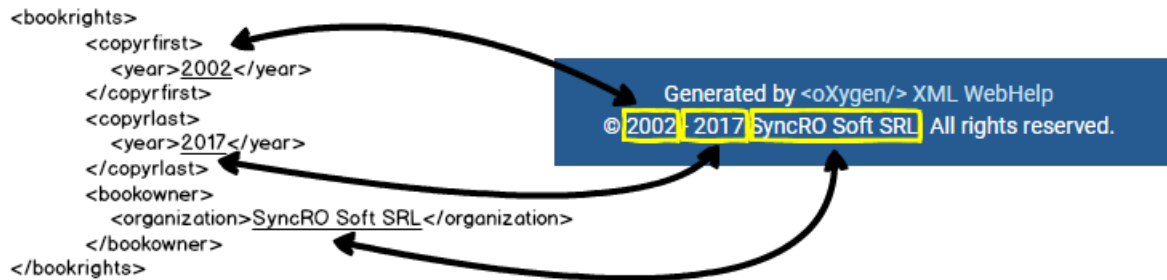


**Figure 441: Example: Copyright information added in the WebHelp footer**

The XSLT stylesheet that generates the main page is located in: *DITA-OT-DIR\plugins\com.oxygenxml.webhelp.responsive\xsl\mainFiles\createMainPage.xsl*. This XSLT stylesheet declares the `copy_template` mode that processes the main page template to expand its components. The [main page template](#) declares a component for the footer section that looks like this:

```

<div class=" footer-container text-center ">
 <whc:include_html href="{webhelp.fragment.footer}" />
</div>

```

In the following example, the extension stylesheet will add a template that matches this component. It applies the default processing and adds the copyright information at the end.

```

<xsl:template match="*div[contains(@class, 'footer-container')]" mode="copy_template">
 <!-- Apply the default processing -->
 <xsl:next-match/>

 <!-- Add a div containing the copyright information -->
 <div class="copyright_info">
 <xsl:choose>
 <!-- Adds the start-end years if they are defined -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst) and
 exists($toc/*:topicmeta/*:bookrights/*:copyrlast)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>
 -<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrlast"/>

 </xsl:when>

 <!-- Adds only the first year if last is not defined. -->
 <xsl:when test="exists($toc/*:topicmeta/*:bookrights/*:copyrfirst)">

 ©<xsl:value-of select="$toc/*:topicmeta/*:bookrights/*:copyrfirst"/>

 </xsl:when>
 </xsl:choose>

 <xsl:if test="exists($toc/*:topicmeta/*:bookrights/*:bookowner/*:organization)">

 <xsl:text> </xsl:text><xsl:value-of
 select="$toc/*:topicmeta/*:bookrights/*:bookowner/*:organization"/>
 <xsl:text>. All rights reserved.</xsl:text>

 </xsl:if>
 </div>
</xsl:template>

```

You can implement this functionality with a WebHelp extension plugin that uses the [com.oxygenxml.webhelp.xsl.createMainPage](#) extension point. This extension point allows you to specify a customization stylesheet that will override the template described above.

To add this functionality as a DITA-OT plugin, follow these steps:

1. In the *DITA-OT-DIR\plugins\* folder, create a folder for this plugin (for example, *com.oxygenxml.webhelp.responsive.custom.footer*).

2. Create a **plugin.xml** file (in the folder you created in step 1) that specifies the extension point and your customization stylesheet. For example:

```
<plugin id="com.oxygenxml.webhelp.responsive.custom.footer">
 <feature extension="com.oxygenxml.webhelp.xsl.createMainPage"
 file="custom_mainpage.xsl" />
</plugin>
```

3. Create your customization stylesheet (for example, **custom\_mainpage.xsl**), and edit it to override the template that produces the footer section:

```
<xsl:template match="*:div[contains(@class, 'footer-container')]" mode="copy_template">
 <!-- Apply the default processing -->
 <xsl:next-match/>

 <!-- Add a div containing the copyright information -->
 <div class="copyright_info">
 <xsl:choose>
 <!-- Adds the start-end years if they are defined -->
 <xsl:when test="exists($toc/ *:topicmeta/ *:bookrights/ *:copyrfirst) and
 exists($toc/ *:topicmeta/ *:bookrights/ *:copyrlast)">

 ©<xsl:value-of select="$toc/ *:topicmeta/ *:bookrights/ *:copyrfirst" />
 -<xsl:value-of select="$toc/ *:topicmeta/ *:bookrights/ *:copyrlast" />

 </xsl:when>

 <!-- Adds only the first year if last is not defined. -->
 <xsl:when test="exists($toc/ *:topicmeta/ *:bookrights/ *:copyrfirst)">

 ©<xsl:value-of select="$toc/ *:topicmeta/ *:bookrights/ *:copyrfirst" />

 </xsl:when>
 </xsl:choose>

 <xsl:if test="exists($toc/ *:topicmeta/ *:bookrights/ *:bookowner/ *:organization)">

 <xsl:text> </xsl:text><xsl:value-of
 select="$toc/ *:topicmeta/ *:bookrights/ *:bookowner/ *:organization" />
 <xsl:text>. All rights reserved.</xsl:text>

 </xsl:if>
 </div>
</xsl:template>
```

4. Use the **Run DITA-OT Integrator transformation scenario** found in the **DITA Map** section in the **Configure Transformation Scenario(s)** dialog box.
5. Run a **DITA Map WebHelp Responsive** transformation scenario to obtain the customized side TOC.

## Use-Case 2: WebHelp XSLT-Parameter extension point to control if generation time is displayed in the output

Another possible customization for the main page is to add the generation time in its footer. You can use an XSLT-Parameter extension point to control if this customization is active or not. In this case, you can use the [com.oxygenxml.webhelp.xsl.createMainPage.param](#) extension point.




**Figure 442: Generation time added in the WebHelp footer**

To add this functionality, follow these steps:

1. Create a DITA-OT plugin structure by following the first 3 steps in the [procedure above](#).
2. In the customization stylesheet that you just created (for example, **custom\_mainpage.xsl**), declare `webhelp.footer.add.generation.time` as a global parameter and modify the template by adding the following XSLT code at the end.

```
<xsl:if test="$webhelp.footer.add.generation.time = 'yes'">
 <div class="generation_time">
 Generation date: <xsl:value-of select="format-dateTime(
 current-dateTime(), '[h1]:[m01] [P] on [M01]/[D01]/[Y0001].')"/>
 </div>
</xsl:if>
```

3. Edit the **plugin.xml** file to specify the **com.oxygenxml.webhelp.xsl.createMainPage.param** extension point and a custom parameter file by adding the following line:

```
<feature extension="com.oxygenxml.webhelp.xsl.createMainPage.param" file="params.xml"/>
```

4. Create a custom parameter file (for example, **params.xml**). It should look like this:

```
<dummy>
 <param name="webhelp.footer.add.generation.time"
 expression="{webhelp.footer.add.generation.time}"
 if="webhelp.footer.add.generation.time"/>
</dummy>
```

5. Use the **Run DITA-OT Integrator transformation scenario** found in the **DITA Map** section in the **Configure Transformation Scenario(s)** dialog box.
6. Edit a **DITA Map WebHelp Responsive** transformation scenario and in the **Parameters** tab, specify the desired value (yes or no) for your custom parameter (webhelp.footer.add.generation.time).
7. Run the transformation scenario.

#### Related Information:

[\[DITA-OT\] XSLT-Import Extension Points](#)

[\[DITA-OT\] XSLT-Parameter Extension Points](#)

### Miscellaneous Customization Topics

This section contains miscellaneous topics about how to customize the WebHelp Responsive output.

#### *How to Add an Edit Link to Launch Oxygen XML Web Author*

You can embed *Edit* links in the DITA WebHelp Responsive output that will automatically launch a particular document in [Oxygen XML Web Author](#). A reviewer can then simply click the link and they will be redirected to the Oxygen XML Web Author editing page with that particular file open and editable.

### Using a Publishing Template

To embed an *Edit* link in the DITA Map WebHelp Responsive output using an [Oxygen Publishing Template](#), follow this procedure:

1. If you haven't already created a Publishing Template, see [Working with Publishing Templates](#) on page 897.
2. Open the [template descriptor file](#) associated with your publishing template and add the following parameters with their values set to the URLs:
  - **editlink.remote.ditamap.url** - The URL of the DITA Map suitable for opening in Oxygen XML Web Author.
  - **editlink.web.author.url** - The URL of the Oxygen XML Web Author installation.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="editlink.remote.ditamap.url"
 value="webdav-https://dav.box.com/dav/my.ditamap"/>
 <parameter name="editlink.web.author.url"
 value="https://www.oxygenxml.com/webauthor.html"/>
 </parameters>
</webhelp>
```

3. Open the *DITA Map WebHelp Responsive* transformation scenario.
4. Click the **Choose Custom Publishing Template** link and select your template.
5. Click **OK** to save the changes to the transformation scenario.
6. Run the transformation scenario.

**Result:** In the WebHelp output, all topics will have an **Edit** link to the right side of the title and clicking the link will launch that particular document in Oxygen XML Web Author.

For example:

- **Windows:**

```
dita.bat -i c:\mySample.ditamap -f webhelp-responsive -
Deditlink.remote.ditamap.url=webdav-https://dav.box.com/dav/my.ditamap -
Deditlink.web.author.url=https://www.oxygenxml.com/webauthor.html
```

- **Mac OS X/ Linux:**

```
dita -i C:/mySample.ditamap -f webhelp-responsive -
Deditlink.remote.ditamap.url=webdav-https://dav.box.com/dav/my.ditamap -
Deditlink.web.author.url=https://www.oxygenxml.com/webauthor.html
```

## Using a Transformation Scenario in Oxygen XML Editor/Author

To embed an *Edit* link in the DITA Map WebHelp Responsive output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Edit a **DITA Map WebHelp Responsive** transformation scenario and open the **Parameters** tab.
2. Set values for the following parameters:
  - **editlink.remote.ditamap.url** - The URL of the DITA Map suitable for opening in Oxygen XML Web Author.
  - **editlink.web.author.url** - The URL of the Oxygen XML Web Author installation.
3. Run the transformation scenario.

**Result:** In the WebHelp output, all topics will have an **Edit** link to the right side of the title and clicking the link will launch that particular document in Oxygen XML Web Author.

For more information, see <https://www.oxygenxml.com/doc/ug-waCustom/topics/webauthor-integrate-embedded-launch.html>.

### Related Information:

[Web Author Customization Guide: Embedding an Edit Link that will Launch Web Author](#)

### How to Flag DITA Content in WebHelp Output

Flagging content in WebHelp output involves defining a set of images that will be used for marking content across your information set.

To flag DITA content, you need to create a filter file that defines properties that will be applied on elements to be flagged. Generally, flagging is supported for *block elements* (such as paragraphs), but not for phrase-level elements within a paragraph. This ensures that the images that will flag the content are easily scanned by the reader, instead of being buried in text.

## Using a Publishing Template

To flag content in the DITA Map to WebHelp output using an *Oxygen Publishing Template*, follow this procedure:

1. Create a DITA filter file in the directory where you want to add the file. Give the file a descriptive name, such as audience-flag-build.ditaval.
2. Define the property of the element you want to be flagged. For example, if you want to flag elements that have the audience attribute set to programmer, the content of the DITaval file should look like the following example:

```
<?xml version="1.0" encoding="UTF-8"?>
<val>
 <prop att="audience" val="programmer" action="flag"
 img="D:\resource\delta.gif" alt="sample alt text"/>
</val>
```

Note that for an element to be flagged, at least one attribute-value pair needs to have a property declared in the DITaval file.

3. Open the [template descriptor file](#) associated with your publishing template and add the `args.filter` parameter in the `parameters` section with its value set to the path of the DITaval file.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="args.filter" value="resources/myFile.ditaval"/>
 </parameters>
</publishing-template>
```

```
</parameters>
</webhelp>
```

4. Open the *DITA Map WebHelp Responsive* transformation scenario.
5. Click the **Choose Custom Publishing Template** link and select your template.
6. Click **OK** to save the changes to the transformation scenario.
7. Run the transformation scenario.

### Using a Transformation Scenario in Oxygen XML Editor/Author

To flag content in the DITA Map to WebHelp output using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Create a DITA filter file in the directory where you want to add the file. Give the file a descriptive name, such as `audience-flag-build.ditaval`.
2. Define the property of the element you want to be flagged. For example, if you want to flag elements that have the audience attribute set to programmer, the content of the DITaval file should look like the following example:

```
<?xml version="1.0" encoding="UTF-8"?>
<val>
 <prop att="audience" val="programmer" action="flag"
 img="D:\resource\delta.gif" alt="sample alt text"/>
</val>
```

Note that for an element to be flagged, at least one attribute-value pair needs to have a property declared in the DITaval file.

3. Edit a **DITA Map to WebHelp** transformation scenario.
4. Specify the DITaval file in the **Filters** tab of the transformation scenario.
5. Run the transformation scenario.

#### *How to Deploy the Output on a SharePoint Site*

Since WebHelp output must be published locally, on the same machine where the WebHelp process is running, to publish your files directly to a SharePoint library you need to map a network drive to connect to SharePoint and change your file extensions to `.aspx`, as described in the steps below.

### Using a Script Outside of Oxygen XML Editor/Author

To publish WebHelp Responsive output on a SharePoint site using an *Oxygen Publishing Template*, follow this procedure:

1. Map a network drive to connect to your SharePoint library. For more information, see: <https://support.microsoft.com/en-us/kb/2616712>.
2. To allow browsers to open your published files (rather than downloading them), you need to change the file extensions from `.html` to `.aspx`.
3. Open the *template descriptor file* associated with your publishing template and add the `args.outext` parameter in the *parameters* section with its value set to `.aspx`.

```
<publishing-template>
...
<webhelp>
...
 <parameters>
 <parameter name="args.outext" value=".aspx"/>
 </parameters>
</webhelp>
```

4. Open the *DITA Map WebHelp Responsive* transformation scenario.
5. Click the **Choose Custom Publishing Template** link and select your template.
6. Click **OK** to save the changes to the transformation scenario.
7. Run the transformation scenario.



## Using a Transformation Scenario in Oxygen XML Editor/Author

To publish WebHelp Responsive output on a SharePoint site using a transformation scenario from within **Oxygen XML Editor/Author**, follow this procedure:

1. Map a network drive to connect to your SharePoint library. For more information, see: <https://support.microsoft.com/en-us/kb/2616712>.
2. To allow browsers to open your published files (rather than downloading them), you need to change the file extensions from `.html` to `.aspx`. Fortunately, this can be done in the transformation.
  - a. Edit the WebHelp transformation scenario and open the **Parameters** tab.
  - b. Set the `args.outext` parameter to `.aspx`.
  - c. Run the transformation scenario.

## PDF Output

---

Oxygen XML Developer provides support for generating PDF output using several different types of processors and there are numerous ways to customize the published output.

### PDF Output Customization

Oxygen XML Developer allows you to obtain PDF output using transformation scenarios for certain types of documents (for example, DITA, DocBook, TEI, and JATS). This section contains information about ways you can customize the PDF output to better fit your specific needs.

#### DITA Map to PDF Output Customization

Oxygen XML Developer comes bundled with the DITA Open Toolkit that provides a mechanism for converting *DITA maps* to PDF output. There are numerous ways that you can customize the PDF output and the topics in this section discuss some of those possibilities.

#### Creating a DITA Map to PDF Transformation Scenario

To create a *DITA Map to PDF* transformation scenario, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** button.
2. Select **DITA Map PDF** and click the **Edit** button (or use the **Duplicate** button if your *framework* is read-only).
3. Use the various tabs to configure the transformation scenario. In the **Parameters** tab, you can use a variety of parameters to customize the output. For example, the following parameters are just a few of the most commonly used ones:
  - `show.changes.and.comments` - If set to yes, user comments, replies to comments, and *tracked changes* are published in the PDF output.
  - `customization.dir` - Specifies the path to a customization directory.
  - `editlink.remote.ditamap.url` - When this parameter is set to "true", the DITA topic path is displayed to the right of each topic title in the PDF output.
4. Click **OK** and then the **Apply Associated** button to run the transformation scenario.

#### Customizing the PDF Output

DITA Open Toolkit PDF output can be customized in several ways:

- Creating a DITA Open Toolkit plugin that adds extensions to the PDF output. More details can be found in the [DITA Open Toolkit Documentation](#).
- Creating a customization directory and using it from the PDF transformation scenario. A small example of this procedure can be found below.



## How to Create a Customization Directory for PDF Output

The following procedure explains how to do a basic customization of the PDF output by setting up a customization directory. An example of a common use case is embedding a company logo image in the front matter of the book.

1. Copy the entire directory: *DITA-OT-DIR\plugins\org.dita.pdf2\Customization* to another location (for instance, *C:\Customization*).
2. Copy your logo image to: *C:\Customization\common\artwork\logo.png*.
3. Rename *C:\Customization\catalog.xml.orig* to: *C:\Customization\catalog.xml*.
4. Open the *catalog.xml* in Oxygen XML Developer and *uncomment* this line:

```
<!--uri name="cfg:fo/xsl/custom.xsl" uri="fo/xsl/custom.xsl"/-->
```

It now looks like this:

```
<uri name="cfg:fo/xsl/custom.xsl" uri="fo/xsl/custom.xsl"/>
```

5. Rename the file: *C:\Customization\fo\xsl\custom.xsl.orig* to: *C:\Customization\fo\xsl\custom.xsl*
6. Open the *custom.xsl* file in Oxygen XML Developer and create the template called **createFrontCoverContents** for DITA-OT 2.5.4.

**Tip:** You can copy the same template from *DITA-OT-DIR\plugins\org.dita.pdf2\xsl\fo\front-matter.xsl* and modify it in whatever way necessary to achieve your specific goal. This new template in the *custom.xsl* file will override the same template from *DITA-OT-DIR\plugins\org.dita.pdf2\xsl\fo\front-matter.xsl*.

### Example:

For example, if you are using DITA OT 2.5.4, the *custom.xsl* could look like this:

```
<?xml version='1.0'?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:fo="http://www.w3.org/1999/XSL/Format"
 version="2.0">

 <xsl:template name="createFrontCoverContents">
 <!-- set the title -->
 <fo:block xsl:use-attribute-sets="__frontmatter__title">
 <xsl:choose>
 <xsl:when test="$map/*[contains(@class,' topic/title ')]][1]">
 <xsl:apply-templates select="$map/*[contains(@class,' topic/title ')]][1]" />
 </xsl:when>
 <xsl:when test="$map/*[contains(@class,' bookmap/mainbooktitle ')]][1]">
 <xsl:apply-templates select="$map/*[contains
 (@class,' bookmap/mainbooktitle ')]][1]" />
 </xsl:when>
 <xsl:when test="//*[contains(@class,' map/map ')]/@title">
 <xsl:value-of select="//*[contains(@class,' map/map ')]/@title" />
 </xsl:when>
 <xsl:otherwise>
 <xsl:value-of select="/descendant::*[contains
 (@class,' topic/topic ')]][1]/*[contains(@class,' topic/title ')]" />
 </xsl:otherwise>
 </xsl:choose>
 </fo:block>

 <!-- set the subtitle -->
 <xsl:apply-templates select="$map/*[contains
 (@class,' bookmap/booktitlealt ')]" />
 <fo:block xsl:use-attribute-sets="__frontmatter__owner">
 <xsl:apply-templates select="$map/*[contains(@class,' bookmap/bookmeta ')]" />
 </fo:block>

 <!-- Load the image logo -->
 <fo:block text-align="center" width="100%">
 <fo:external-graphic
 src="url({concat($artworkPrefix,
 'Customization/OpenTopic/common/artwork/logo.png')})"
 />
 </fo:block>
 </xsl:template>
</xsl:stylesheet>
```

7. Edit the **DITA Map PDF** transformation scenario and in the **Parameters** tab, set the **customization.dir** parameter to *C:\Customization*.

**Tip:** For other specific examples, see [DITA-OT 2.x Documentation - PDF Customization Plugin](#).

#### Related Information:

[Automatic PDF plugin customization generator by Jarno Elovirta](#).

[DITA-OT 2.x Documentation - PDF Customization Plugin](#)

### Customizing the Header and Footer in PDF Output

The XSLT stylesheet *DITA-OT-DIR/plugins/org.dita.pdf2/xsl/fo/static-content.xsl* contains templates that output the static header and footers for various parts of the PDF such as the prolog, table of contents, front matter, or body.

The templates for generating a footer for pages in the body are called `insertBodyOddFooter` or `insertBodyEvenFooter`.

These templates get the static content from resource files that depend on the language used for generating the PDF. The default resource file is *DITA-OT-DIR/plugins/org.dita.pdf2/cfg/common/vars/en.xml*. These resource files contain variables (such as *Body odd footer*) that can be set to specific user values.

Instead of modifying these resource files directly, they can be overwritten with modified versions of the resources in a PDF customization directory as explained in [Customizing the PDF Output](#) on page 930.

### Adding a Watermark to PDF Output

To add a watermark to the PDF output of a [DITA map](#) transformation, create a DITA-OT customization directory and use it from a **DITA Map to PDF** transformation scenario, as in the following procedure:

1. Copy the entire directory: *DITA-OT-DIR\plugins\org.dita.pdf2\Customization* to another location (for instance, *C:\Customization*).
2. Copy your watermark image (for example, *watermark.png*) to: *C:\Customization\common\artwork\watermark.png*.
3. Rename the *C:\Customization\catalog.xml.orig* file to: *C:\Customization\catalog.xml*.
4. Open the *catalog.xml* in Oxygen XML Developer and *uncomment* this line:

```
<!--uri name="cfg:fo/xsl/custom.xsl" uri="fo/xsl/custom.xsl"/-->
```

The uncommented line should look like this:

```
<uri name="cfg:fo/xsl/custom.xsl" uri="fo/xsl/custom.xsl"/>
```

5. Rename the file: *C:\Customization\fo\xsl\custom.xsl.orig* to: *C:\Customization\fo\xsl\custom.xsl*
6. Open the *C:\Customization\fo\xsl\custom.xsl* file in Oxygen XML Developer to overwrite two XSLT templates:
  - The first template is located in the XSLT stylesheet *DITA-OT-DIR\plugins\org.dita.pdf2\xsl\fo\static-content.xsl* and we override it specifying a watermark image for every page in the PDF content, using a *block-container* element that references the watermark image file:

```
<fo:static-content flow-name="odd-body-header">
 <fo:block-container absolute-position="absolute"
 top="-2cm" left="-3cm" width="21cm" height="29.7cm"
 background-image="{concat($artworkPrefix,
 ' /Customization/OpenTopic/common/artwork/watermark.png')}">
 <fo:block/>
 </fo:block-container>
 <fo:block xsl:use-attribute-sets="__body__odd__header">
 <xsl:call-template name="insertVariable">
 <xsl:with-param name="theVariableID" select="'Body odd header'"/>
 <xsl:with-param name="theParameters">
 <prodname>
 <xsl:value-of select="$productName"/>
 </prodname>
 <heading>
 <fo:inline xsl:use-attribute-sets="__body__odd__header__heading">
 <fo:retrieve-marker retrieve-class-name="current-header"/>
 </fo:inline>
 </heading>
 <pagenum>
 <fo:inline xsl:use-attribute-sets="__body__odd__header__pagenum">
 <fo:page-number/>
 </fo:inline>
 </pagenum>
 </xsl:call-template>
 </fo:block>
 </fo:block>
</fo:static-content>
```

```

 </xsl:with-param>
 </xsl:call-template>
 </fo:block>
 </fo:static-content>
</xsl:template>

```

- The second template that we override is located in the XSLT stylesheet *DITA-OT-DIR\plugins\org.dita.pdf2\xsl\fo\commons.xsl* and is used for styling the first page of the output. We also override it by copying the original template content in our *custom.xsl* and adding the *block-container* element that references the watermark image file:

```

<xsl:template name="createFrontMatter_1.0">
 <fo:page-sequence master-reference="front-matter"
 xsl:use-attribute-sets="__force__page__count">
 <xsl:call-template name="insertFrontMatterStaticContents"/>
 <fo:flow flow-name="xsl-region-body">
 <fo:block-container absolute-position="absolute"
 top="-2cm" left="-3cm" width="21cm" height="29.7cm"
 background-image="{concat($artworkPrefix,
 '/Customization/OpenTopic/common/artwork/watermark.png')}"/>
 <fo:block/>
 </fo:block-container>
 <fo:block xsl:use-attribute-sets="__frontmatter">
 <!-- set the title -->
 <fo:block xsl:use-attribute-sets="__frontmatter__title">
 <xsl:choose>
 <xsl:when test="$map/*[contains(@class, ' topic/title ')] [1]">
 <xsl:apply-templates select="$map/*[contains(@class, ' topic/title ')] [1]" />
 </xsl:when>
 <xsl:when test="$map/*[contains(@class, ' bookmap/mainbooktitle ')] [1]">
 <xsl:apply-templates select="$map/*[contains
 (@class, ' bookmap/mainbooktitle ')] [1]" />
 </xsl:when>
 <xsl:when test="//*[contains(@class, ' map/map ')]/@title">
 <xsl:value-of select="//*[contains(@class, ' map/map ')]/@title" />
 </xsl:when>
 <xsl:otherwise>
 <xsl:value-of select="/descendant::*[contains
 (@class, ' topic/topic ')] [1]/*[contains(@class, ' topic/title ')]" />
 </xsl:otherwise>
 </xsl:choose>
 </fo:block>
 <!-- set the subtitle -->
 <xsl:apply-templates select="$map/*[contains
 (@class, ' bookmap/booktitlealt ')]" />
 <fo:block xsl:use-attribute-sets="__frontmatter__owner">
 <xsl:apply-templates select="$map/*[contains
 (@class, ' bookmap/bookmeta ')]" />
 </fo:block>
 </fo:block>
 <!--<xsl:call-template name="createPreface"/>-->
 </fo:flow>
</fo:page-sequence>
<xsl:if test="not($retain-bookmap-order)">
 <xsl:call-template name="createNotices"/>
</xsl:if>
</xsl:template>

```

7. Edit your **DITA Map PDF** transformation scenario. In the **Parameters** tab, set the **customization.dir** parameter to *C:\Customization*.

### Adding an Edit Link in PDF Output to Launch Oxygen XML Web Author

You can embed *Edit* links in the DITA Map PDF output that will automatically launch a particular document in [Oxygen XML Web Author](#). A reviewer can then simply click the link and they will be redirected to the Oxygen XML Web Author editing page with that particular file open and editable.

To embed an *Edit* link in the DITA Map PDF output, follow these steps:

1. Edit a **DITA Map PDF** transformation scenario and open the **Parameters** tab.
2. Set values for the following parameters:
  - **editlink.remote.ditamap.url** - The URL of the DITA Map suitable for opening in Oxygen XML Web Author.
  - **editlink.web.author.url** - The URL of the Oxygen XML Web Author installation.
3. Run the transformation scenario.

**Result:** In the PDF output, all topics will have an **Edit** link to the right side of the title and clicking the link will launch that particular document in Oxygen XML Web Author.

## Force Page Breaks Between Two Block Elements in PDF Output

Suppose that in your DITA content you have two *block elements*, such as two paragraphs:

```
<p>First para</p>
<p>Second para</p>
```

and you want to force a page break between them in the PDF output.

Here is how you can implement a DITA Open Toolkit *plugin* that would achieve this:

1. Define your custom processing instruction that marks the place where a page break should be inserted in the PDF, for example:

```
<p>First para</p>
<?pagebreak?>
<p>Second para</p>
```

2. Locate the **DITA Open Toolkit** distribution and in the `plugins` directory create a new *plugin* folder (for example, `DITA-OT-DIR/plugins/pdf-page-break`).
3. In this new folder, create a new `plugin.xml` file with the following content:

```
<plugin id="com.yourpackage.pagebreak">
 <feature extension="package.support.name" value="Force Page Break Plugin"/>
 <feature extension="package.support.email" value="support@youremail.com"/>
 <feature extension="package.version" value="1.0.0"/>
 <feature extension="dita.xsl.xslfo" value="pageBreak.xsl" type="file"/>
</plugin>
```

The most important feature in the *plugin* is that it will add a new XSLT stylesheet to the XSL processing that produces the PDF content.

4. In the same folder, create an XSLT stylesheet named `pageBreak.xsl` with the following content:

```
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:fo="http://www.w3.org/1999/XSL/Format" version="1.0">
 <xsl:template match="processing-instruction('pagebreak')">
 <fo:block break-after="page"/>
 </xsl:template>
</xsl:stylesheet>
```

The source code for the plugin can be found on GitHub here: <https://github.com/dita-community/org.dita-community.pdf-page-break>.

## Customizing note Images in PDF

To customize the images that appear next to each type of note in the PDF output, use a [PDF customization folder](#) with the following procedure:

1. Copy the `DITA-OT-DIR/plugins/org.dita.pdf2/cfg/common/vars/en.xml` file to the `[CUSTOMIZATION_DIR]\common\vars` folder.
2. Edit the copied `en.xml` file and modify, for example, the path to the image for `<note>` element with the type attribute set to `notice` from:

```
<variable id="notice Note Image
 Path">Configuration/OpenTopic/cfg/common/artwork/important.png</variable>
```

to:

```
<variable id="notice Note Image
 Path">Customization/OpenTopic/common/artwork/notice.gif</variable>
```

3. Add your custom **notice** image to `[CUSTOMIZATION_DIR]\common\artwork\notice.gif`.
4. Edit the **DITA Map PDF** transformation scenario and in the **Parameters** tab set the path for the `customization.dir` property to point to the customization folder. Also, set the `com.oxygenxml.use.custom.note.images` parameter to **no**.

## Show Comments and Tracked Changes in PDF Output

To include comments and *tracked changes* (stored within your DITA topics) in the PDF output, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** button.
2. Select **DITA Map PDF** and click the **Edit** button (or use the **Duplicate** button if your *framework* is read-only).

3. In the **Parameters** tab, set the value of the **show.changes.and.comments** parameter to yes.
4. Optionally, you can configure any of these other parameters to adjust the colors of the comments and tracked changes:
  - **ct.insert.color** - Specifies the color for insertion type tracked changes, as a plain color (i.e. red, yellow, blue), or with a hexadecimal equivalent (i.e. #FFFFFF). The default value is 'blue'.
  - **ct.delete.color** - Specifies the color for deletion type tracked changes, as a plain color (i.e. red, yellow, blue), or with a hexadecimal equivalent (i.e. #FFFFFF). The default value is 'red'.
  - **ct.comment.bg.color** - Specifies the background color for comment type tracked changes, as a plain color (i.e. red, yellow, blue), or with a hexadecimal equivalent (i.e. #FFFFFF). The default value is 'yellow'.
5. Click **OK** and then the **Apply Associated** button to run the transformation scenario.

**Result:** Comment threads and tracked changes will now appear in the PDF output. Details about each comment or change will be available in the footer section for each page.

### Set a Font for PDF Output Generated with FO Processor

When a [DITA map](#) is transformed to PDF using an FO processor and it contains some Unicode characters that cannot be rendered by the default PDF fonts, a font that is capable of rendering these characters must be configured and embedded in the PDF result.

The settings that must be modified for configuring a font for the built-in FO processor are detailed in [Add a Font to the Built-in FO Processor - Advanced Version](#) on page 937.

### DITA OT PDF Font Mapping

The DITA OT contains a file `DITA-OT-DIR/plugins/org.dita.pdf2/cfg/fo/font-mappings.xml` that maps logical fonts used in the XSLT stylesheets to physical fonts that will be used by the FO processor to generate the PDF output.

The XSLT stylesheets used to generate the XSL-FO output contain code like this:

```
<xsl:attribute name="font-family">monospace</xsl:attribute>
```

The font-family is defined to be *monospace*, but *monospace* is just an alias. It is not a physical font name. Therefore, another stage in the PDF generation takes this *monospace* alias and looks in the `font-mappings.xml`.

If it finds a mapping like this:

```
<aliases>
 <alias name="monospace">Monospaced</alias>
</aliases>
```

then it looks to see if the *Monospaced* has a *logical-font* definition and if so, it will use the *physical-font* specified there:

```
<logical-font name="Monospaced">
 <physical-font char-set="default">
 <font-face>Courier New, Courier</font-face>
 </physical-font>

</logical-font>
```

#### Important:

If no alias mapping is found for a font-family specified in the XSLT stylesheets, the processing defaults to **Helvetica**.

#### Related Information:

### DocBook to PDF Output Customization

When the default layout and output of the DocBook to PDF transformation needs to be customized, follow these steps:

1. Create a custom version of the DocBook title spec file.

You should start from a copy of the file [DocBook XSL directory]/fo/titlepage.templates.xml and customize it. The instructions for the spec file can be found [here](#).

An example of spec file:

```
<t:titlepage-content t:side="recto">
 <mediaobject/>
 <title
 t:named-template="book.verso.title"
 font-size="&hsize2;"
 font-weight="bold"
 font-family="{ $title.font.family }"/>
 <corpauthor/>
 . . .
</t:titlepage-content>
```

2. Generate a new XSLT stylesheet from the title spec file from the previous step.  
Apply [DocBook XSL directory]/template/titlepage.xsl to the title spec file. The result is an XSLT stylesheet (for example, mytitlepages.xsl).
3. Import mytitlepages.xsl in a [DocBook customization layer](#).  
The customization layer is the stylesheet that will be applied to the XML document. The mytitlepages.xsl should be imported with an element like this:

```
<xsl:import href="dir-name/mytitlepages.xsl"/>
```

4. Insert a logo image in the XML document.  
The path to the logo image must be inserted in the book/info/mediaobject element of the XML document.
5. Apply the customization layer to the XML document.  
A quick way is to duplicate the transformation scenario **DocBook PDF** that is included with Oxygen XML Developer and set the customization layer in [the XSL URL property of the scenario](#).

#### Related Information:

The book [DocBook XSL: The Complete Guide](#) by Bob Stayton contains more details about customizing the PDF output.

[Video demonstration for creating a DocBook customization layer in Oxygen XML Developer.](#)

#### Show Comments and Tracked Changes in DocBook 5 PDF Output

To include comments and *tracked changes* (stored within your DocBook 5 documents) in the PDF output, follow these steps:

1. Click the  **Configure Transformation Scenario(s)** button.
2. Select **DocBook PDF (Show Change Tracking and Comments)** in the **DocBook 5** section.
3. If you need to configure the transformation, click the **Edit** or **Duplicate** button, make your changes to the scenario, and click **OK**.
4. Click the **Apply Associated** button to run the transformation scenario.

**Result:** Comment threads and tracked changes will now appear in the PDF output. Details about each comment or change will be available in the footer section for each page.

## Generating PDF Output Using an XSL-FO Processor

This section explains how to apply XSL-FO processors when transforming XML documents to PDF format in Oxygen XML Developer.

#### Built-in XSL-FO Processor

The Oxygen XML Developer installation package is distributed with the [Apache FOP](#) that is a Formatting Objects processor for rendering your XML documents to PDF. *FOP* is a print and output independent formatter driven by XSL Formatting Objects. *FOP* is implemented as a Java application that reads a formatting object tree and renders the resulting pages to a specified output.

To see the version of the built-in XSL-FO processor for your installation, go to **Help > About > Libraries** and search for *Apache FOP*.

Other FO processors can be configured in [the Preferences dialog box](#).

### Add a Font to the Built-in FO Processor - Simple Version

If the font that must be set to Apache FOP is one of the fonts that are installed in the operating system you should follow the next steps for creating and setting a FOP configuration file that looks for the font that it needs in the system fonts. It is a simplified version of [the procedure for setting a custom font in Apache FOP](#).

1. Register the font in FOP configuration. (This is not necessary for DITA PDF transformations, skip to the next step)

- a) Create a FOP configuration file that specifies that FOP should look for fonts in the installed fonts of the operating system.

```
<fop version="1.0">
 <renderers>
 <renderer mime="application/pdf">
 <fonts>
 <auto-detect/>

 </render>
 </renderers>
</fop>
```

- b) [Open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XSLT/FO/XQuery > FO Processors**, and enter the path of the FOP configuration file in the **Configuration file** text field.

2. Set the font on the document content.

This is done usually with XSLT stylesheet parameters and depends on the document type processed by the stylesheet.

- For DocBook documents you can start with the predefined scenario called **DocBook PDF**, [edit the XSLT parameters](#) and set the font name (in our example the font family name is **Arial Unicode MS**) to the parameters `body.font.family` and `title.font.family`.
- For TEI documents you can start with the predefined scenario called **TEI PDF**, [edit the XSLT parameters](#) and set the font name (in our example **Arial Unicode MS**) to the parameters `bodyFont` and `sansFont`.
- For DITA transformations to PDF using DITA-OT you should modify the following two files:
  - `DITA-OT-DIR/plugins/org.dita.pdf2/cfg/fo/font-mappings.xml` - The font-face element included in each element `physical-font` having the attribute `char-set="default"` must contain the name of the font (**Arial Unicode MS** in our example)
  - `DITA-OT-DIR/plugins/org.dita.pdf2/fop/conf/fop.xconf` - An element `auto-detect` must be inserted in the element `font`, which is inside the element `renderer` that has the attribute `mime="application/pdf"`:

```
<renderer mime="application/pdf">

 <auto-detect/>

</renderer>
```

### Add a Font to the Built-in FO Processor - Advanced Version

If an XML document is transformed to PDF using the built-in Apache FOP processor but it contains some Unicode characters that cannot be rendered by the default PDF fonts, then a special font that is capable to render these characters must be configured and embedded in the PDF result.

**Important:** If this special font is installed in the operating system, there is a simple way of telling FOP to look for it. See [the simplified procedure for adding a font to FOP](#).

1. Locate the font.

First, find out the name of a font that has the glyphs for the special characters you used. One font that covers most characters, including Japanese, Cyrillic, and Greek, is Arial Unicode MS.



On Windows the fonts are located into the C:\Windows\Fonts directory. On Mac, they are placed in /Library/Fonts. To install a new font on your system, is enough to copy it in the Fonts directory.

2. Generate a font metrics file from the font file.

- a) Open a terminal.
- b) Change the working directory to the Oxygen XML Developer install directory.
- c) Create the following script file in the Oxygen XML Developer installation directory.

For OS X and Linux create a file `ttfConvert.sh`:

```
#!/bin/sh

export LIB=lib
export CP=$LIB/fop.jar
export CP=$CP:$LIB/avalon-framework-4.2.0.jar
export CP=$CP:$LIB/xercesImpl.jar
export CP=$CP:$LIB/commons-logging-1.1.3.jar
export CP=$CP:$LIB/commons-io-1.3.1.jar
export CP=$CP:$LIB/xmlgraphics-commons-1.5.jar
export CP=$CP:$LIB/xml-apis.jar
export CMD="java -cp $CP org.apache.fop.fonts.apps.TTFReader"
export FONT_DIR='.'

$CMD $FONT_DIR/Arialuni.ttf Arialuni.xml
```

For Windows create a file `ttfConvert.bat`:

```
@echo off
set LIB=lib
set CP=%LIB%\fop.jar
set CP=%CP%;%LIB%\avalon-framework-4.2.0.jar
set CP=%CP%;%LIB%\xercesImpl.jar
set CP=%CP%;%LIB%\commons-logging-1.1.3.jar
set CP=%CP%;%LIB%\commons-io-1.3.1.jar
set CP=%CP%;%LIB%\xmlgraphics-commons-1.5.jar
set CP=%CP%;%LIB%\xml-apis.jar
set CMD=java -cp "%CP%" org.apache.fop.fonts.apps.TTFReader
set FONT_DIR=C:\Windows\Fonts
%CMD% %FONT_DIR%\Arialuni.ttf Arialuni.xml
```

The paths specified in the file are relative to the Oxygen XML Developer installation directory. If you decide to create it in other directory, change the file paths accordingly.

The FONT\_DIR can be something different on your system. Check that it points to the correct font directory. If the Java executable is not in the PATH, specify the full path of the executable.

If the font has bold and italic variants, convert them too by adding two more lines to the script file:

- for OS X and Linux:

```
$CMD $FONT_DIR/Arialuni-Bold.ttf Arialuni-Bold.xml
$CMD $FONT_DIR/Arialuni-Italic.ttf Arialuni-Italic.xml
```

- for Windows:

```
%CMD% %FONT_DIR%\Arialuni-Bold.ttf Arialuni-Bold.xml
%CMD% %FONT_DIR%\Arialuni-Italic.ttf Arialuni-Italic.xml
```

d) Run the script.

On Linux and OS X, run the command `sh ttfConvert.sh` from the command line. On Windows, run the command `ttfConvert.bat` from the command line or double-click the file `ttfConvert.bat`.

3. Register the font in FOP configuration. (This is not necessary for DITA PDF transformations, skip to the next step)

- a) Create a FOP configuration file that specifies the font metrics file for your font.

```
<fop version="1.0">
 <base>./</base>
 <font-base>file:/C:/path/to/FOP/font/metrics/files/</font-base>
 <source-resolution>72</source-resolution>
 <target-resolution>72</target-resolution>
 <default-page-settings height="11in" width="8.26in"/>
 <renderers>
 <renderer mime="application/pdf">
 <filterList>
 <value>flate</value>
 </filterList>
 </renderers>
 </fop>
```



```

 <font metrics-url="Arialuni.xml" kerning="yes"
 embed-url="file:/Library/Fonts/Arialuni.ttf">
 <font-triplet name="Arialuni" style="normal"
 weight="normal"/>

 </fonts>
 </renderer>
 </renderers>
</fop>

```

The `embed-url` attribute points to the font file to be embedded. Specify it using the URL convention. The `metrics-url` attribute points to the font metrics file with a path relative to the base element. The triplet refers to the unique combination of name, weight, and style (italic) for each variation of the font. In our case is just one triplet, but if the font had variants, you would have to specify one for each variant. Here is an example for Arial Unicode if it had italic and bold variants:

```

<fop version="1.0">
 ...
 <fonts>
 <font metrics-url="Arialuni.xml" kerning="yes"
 embed-url="file:/Library/Fonts/Arialuni.ttf">
 <font-triplet name="Arialuni" style="normal"
 weight="normal"/>

 <font metrics-url="Arialuni-Bold.xml" kerning="yes"
 embed-url="file:/Library/Fonts/Arialuni-Bold.ttf">
 <font-triplet name="Arialuni" style="normal"
 weight="bold"/>

 <font metrics-url="Arialuni-Italic.xml" kerning="yes"
 embed-url="file:/Library/Fonts/Arialuni-Italic.ttf">
 <font-triplet name="Arialuni" style="italic"
 weight="normal"/>

 </fonts>
 ...
</fop>

```

More details about the FOP configuration file are available on the FOP website.

- b) [Open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XSLT/FO/XQuery > FO Processors**, and enter the path of the FOP configuration file in the **Configuration file** text field.
4. Set the font on the document content.

This is usually done with XSLT stylesheet parameters and depends on the document type processed by the stylesheet.

**DocBook Example:** For DocBook documents, you can start with the predefined scenario called **DocBook PDF**, [edit the XSLT parameters](#), and set the font name (in our example **Arialuni**) to the parameters `body.font.family` and `title.font.family`.

**TEI Example:** For TEI documents, you can start with the predefined scenario called **TEI PDF**, [edit the XSLT parameters](#), and set the font name (in our example **Arialuni**) to the parameters `bodyFont` and `sansFont`.

**DITA Example:** For DITA to PDF transformations using DITA-OT modify the following two files:

- `DITA-OT-DIR/plugins/org.dita.pdf2/cfg/fo/font-mappings.xml` - The font-face element included in each element physical-font having the attribute `char-set="default"` must contain the name of the font (*Arialuni* in our example)
- `DITA-OT-DIR/plugins/org.dita.pdf2/fop/conf/fop.xconf` - An element font must be inserted in the element fonts, which is inside the element renderer that has the attribute `mime="application/pdf"`:

```

<renderer mime="application/pdf">
 ...
 <fonts>
 <font metrics-url="Arialuni.xml" kerning="yes"
 embed-url="file:/Library/Fonts/Arialuni.ttf">
 <font-triplet name="Arialuni" style="normal"
 weight="normal"/>

 </fonts>
 ...
</renderer>

```

## Adding Libraries to the Built-in FO Processor (XML with XSLT and FO)

Starting with Oxygen XML Developer version 20.0, both hyphenation and PDF image support are enabled by default in the built-in Apache FO processor. For older version of Oxygen XML Developer, use the following procedures to enable such support.

### Adding Hyphenation Support for XML with XSLT Transformation Scenarios

If you want to add newer hyphenation libraries or you are using an older version of Oxygen XML Developer, follow this procedure:

1. Create a folder called `fop` in the `[OXYGEN_INSTALL_DIR]/lib` folder.
2. Download the compiled [JAR](#) from [OFFO](#).
3. Copy the `fop-hyph.jar` file into the `[OXYGEN_INSTALL_DIR]/lib/fop` folder.
4. Restart Oxygen XML Developer.

### Adding Support for PDF Images

To add support for PDF images in an older version of Oxygen XML Developer, follow these steps:

1. Create a folder called `fop` in the `[OXYGEN_INSTALL_DIR]/lib` folder.
2. Download the [fop-pdf-images](#) JAR libraries.
3. Copy the libraries into the `[OXYGEN_INSTALL_DIR]/lib/fop` folder.
4. Restart Oxygen XML Developer.

## Adding Libraries to the Built-in FO Processor (DITA-OT)

Starting with Oxygen XML Developer version 20.0, both hyphenation and PDF image support are enabled by default in the built-in DITA-OT FO processor. For older version of Oxygen XML Developer, use the following procedures to enable such support.

### Adding Hyphenation Support for DITA-OT Transformation Scenarios

1. Download the pre-compiled [JAR](#) from [OFFO](#).
2. Edit the DITA-OT transformation scenario and switch to the **Advanced** tab. Click the **Libraries** button and add the path to the `fop-hyph.jar` library.

### Adding Support for PDF Images

1. Download the [fop-pdf-images](#) JAR libraries.
2. Edit the DITA-OT transformation scenario and switch to the **Advanced** tab. Click the **Libraries** button and add the path to the libraries.

## How to Enable Debugging for FO Processor Transformations

If you encounter errors when running PDF transformations that use an FO processor, it is possible to enable debugging/logging to help you identify the problem. To enable debugging/logging for FO processing, follow this procedure:

1. Locate and edit the following configuration file: `[OXYGEN_INSTALL_DIR]/tools/config/log4j.xml`.

**Note:** You need write access to this folder, so if you do not have administrator permissions, you may first need to copy the file to another location where you have write access.

2. Edit the `priority` element (inside the root element) and change its value to **debug**.
3. Save the file in the original location.
4. Restart Oxygen XML Developer and re-run the transformation.

**Tip:** It is recommended that you use a small input file when trying to reproduce the problem, to make it easier to analyze the data in the log.

5. Once you are finished with the debugging session, remember to edit the `log4j.xml` file and change the `priority` element back to its original value. Otherwise, performance could be affected.

## Generating PDF Output Using a Calabash XProc Processor

To generate PDF output from your XProc pipeline (when using the Calabash XProc processor), follow these steps:

1. Open the `[OXYGEN_INSTALL_DIR]/lib/xproc/calabash/engine.xml` file.
2. Uncomment the `<system-property name="com.xmlcalabash.fo-processor" value="com.xmlcalabash.util.FoXEP"/>` system property.
3. Uncomment the `<system-property name="com.renderx.xep.CONFIG" file="../../tools/xep/xep.xml"/>` system property. Edit the file attribute to point to the configuration file that is usually located in the XEP installation folder.
4. Uncomment the references to the XEP libraries. Edit them to point to the matching library names from the XEP installation directory.
5. Restart Oxygen XML Developer.

## Debugging PDF Transformations

To debug a DITA PDF transformation scenario using the XSLT Debugger follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**), go to **XML > XML Catalog**, click **Add**, and select the file located at `DITA-OT-DIR\plugins\org.dita.pdf2\cfg\catalog.xml`.
2. Open the map and create a **DITA Map PDF** transformation scenario.
3. Edit the scenario, go to the **Parameters** tab and change the value of the **clean.temp** parameter to **no**.
4. Run the transformation scenario.
5. Open the **stage1.xml** file located in the temporary directory and **format and indent** it.
6. Create a transformation scenario for this XML file by associating the `topic2fo_shell_fop.xsl` stylesheet located at `DITA-OT-DIR\plugins\org.dita.pdf2\xsl\fo\topic2fo_shell_fop.xsl`. If you are specifically using the RenderX XEP or Antenna House FO processors to build the PDF output, you should use the XSL stylesheets `topic2fo_shell_xep.xsl` or `topic2fo_shell_axf.xsl` located in the same folder.
7. In the transformation scenario edit the XSLT Processor combo box choose the Saxon EE XSLT processor (the same processor used when the DITA OT transformation is executed).
8. In the transformation scenario, edit the **Parameters** list and set the parameter `locale` with the value `en_GB` and the parameter `customizationDir.url` to point either to your customization directory or to the default DITA OT customization directory. Its value should have a URL syntax like this: `file:///c:/path/to/DITA-OT-DIR/plugins/org.dita.pdf2/cfg`.
9. Debug the transformation scenario.

### Related Information:

[Debugging XSLT Stylesheets and XQuery Documents](#) on page 1022

[How to Enable Debugging for FO Processor Transformations](#) on page 940

## Working with XPath Expressions

### Topics:

- [XPath Toolbar](#)
- [XPath Builder View](#)
- [XPath Expression Results View](#)
- [XPath and XML Catalogs](#)
- [XPath Prefix Mapping](#)

XPath is a language for addressing specific parts of an XML document. XPath, such as the Document Object Model (DOM), models an XML document as a tree of nodes. An XPath expression is a mechanism for navigating through and selecting nodes from the XML document. An XPath expression is, in a way, analogous to an SQL query used to select records from a database.

There are various types of nodes, including element nodes, attribute nodes, and text nodes. XPath defines a way to compute a string-value for each type of node.

XPath defines a library of standard functions for working with strings, numbers and boolean expressions.

### Examples:

- **child::\*** - Selects all children of the root node.
- **./name** - Selects all elements having the name "name", descendants of the current node.
- **/catalog/cd[price>10.80]** - Selects all the cd elements that have a price element with a value larger than 10.80.

To find out more about XPath, go to <http://www.w3.org/TR/xpath>.

### Related Information:

[Content Completion in XPath Expressions](#) on page 468

[Find/Replace in Multiple Files](#) on page 314

[Find/Replace Dialog Box](#) on page 313

## XPath Toolbar

XPath is a query language for selecting nodes from an XML document. To use XPath expressions effectively, you need a good understanding of [the XPath Core Function Library](#).

### XPath Toolbar

Oxygen XML Developer provides an XPath toolbar to let you query XML documents fast and easy using XPath expressions.



Figure 443: XPath Toolbar

The XPath toolbar includes the following features:

### XPath version chooser drop-down menu

You can choose the XPath version from the drop-down menu available in the left side of the toolbar. Available options include **XPath 1.0**, **XPath 2.0**, **XPath 2.0 SA**, **XPath 3.0**, **XPath 3.0 SA**.

**Note:** The results returned by XPath 2.0 SA and XPath 3.0 SA have a location limited to the line number of the start element (there are no column information and no end specified).



**Warning:** Oxygen XML Developer uses Saxon to execute XPath 3.0 expressions, but implements a part of the 3.0 functions. When using a function that is not implemented, Oxygen XML Developer can return a compilation error.

### XPath scope menu

Oxygen XML Developer allows you to define a scope for which the XPath operation will be executed. You can choose where the XPath expression will be executed:

-  **Current file** - Current selected file only.
-  **Project** - All the files in the project.
-  **Selected project resources** - The files selected in the project.
-  **All opened files** - All files opened in the application.
-  **Opened archive** - Files open in the [Archive Browser view](#).
-  **Working sets** - The selected [working sets](#).

At the bottom of the scope menu the following scope configuration actions are available:

-  **Configure XPath working sets** - Allows you to configure and manage collections of files and folders, encapsulated in logical containers called [working sets](#).
-  **XPath file filter** - You can filter the files from the selected scope for which the XPath expression will be executed. By default, the XPath expression will be executed only on XML files, but you can also define a set of patterns that will filter out files from the current scope. If you select the **Include archive** option, the XPath expression will be also executed on the files in any archive (including EPUB and DocX) found at the current scope.

### History drop-down list

The XPath combo box keeps a history of the last 15 expressions that were used so that you can easily choose them again.

### //\*Switch to XPath Builder View

Opens the [XPath Builder view](#).

### Settings menu

The following actions are available in this drop-down menu:

-  **Update on cursor move** - When selected and you navigate through a document, the XPath expression corresponding to the XML node at the current cursor position is displayed.
-  **Evaluate as you type** - When you select this option, the XPath expression you are composing is evaluated in real time.

**Note:** This option and the automatic validation are disabled when you edit [huge documents](#) or when the scope is other than **Current file**.

-  **Options** - Opens the Preferences page of the currently selected processing engine.

**Note:** During the execution of an XPath expression, the XPath toolbar displays a  **Stop** button. Press this button to stop the XPath execution.

When you type expressions longer than 60 characters, a dialog box opens that offers you the possibility to switch to the [XPath Builder view](#).

### Related Information:

[XPath Expression Results View](#) on page 946

## XPath Builder View

---

The **XPath/XQuery Builder** view allows you to compose complex XPath expressions and execute them over the currently edited XML document. For XPath 2.0 / 3.0, you can use the `doc ( )` function to specify the source file for which the expressions are executed. When you connect to a database, the expressions are executed over that database. If you are using the **XPath/XQuery Builder** view and the current file is an XSLT document, Oxygen XML Developer executes the expressions over the XML document in the associated scenario.

If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu. You can also open it simply by pressing the  **Switch to XPath Builder View** button that is located on the [XPath toolbar](#).

The upper part of the view contains the following actions:

### XPath version chooser drop-down menu

A drop-down menu that allows you to select the type of the expression you want to execute. You can choose between:

- XPath 1.0 (Xerces-driven)
- XPath 2.0, XPath 2.0SA, XPath 3.0, XPath 3.0SA, Saxon-HE XQuery, Saxon-PE XQuery, or Saxon-EE XQuery (all of them are Saxon-driven)
- Custom connection to XML databases that can execute XQuery expressions

**Note:** The results returned by XPath 2.0 SA and XPath 3.0 SA have a location limited to the line number of the start element (there are no column information and no end specified).

**Note:** Oxygen XML Developer uses Saxon to execute XPath 3.0 expressions. Since Saxon implements a part of the 3.0 functions, when using a function that is not implemented, Oxygen XML Developer returns a compilation error.

### Execute XPath button

Use this button to start the execution of the XPath or XQuery expression you are editing. The result of the execution is displayed in the [Results view](#).

### Favorites button

Allows you to save certain expressions that you can later reuse. To add an expression as a favorite, press the star button and enter a name for it. The star turns yellow to confirm that the expression was saved. Expand the drop-down menu next to the star button to see all your favorites. Oxygen XML Developer automatically groups favorites in folders named after the method of execution.

### History drop-down menu

Keeps a list of the last 15 executed XPath expressions. Use the  **Clear history** action from the bottom of the list to remove them.

### Settings drop-down menu

Contains the following three options:

-  **Update on cursor move** - When selected and you navigate through a document, the XPath expression corresponding to the XML node at the current cursor position is displayed.
-  **Evaluate as you type** - When you select this option, the XPath expression you are composing is evaluated in real time.

**Note:** This option and the automatic validation are disabled when you edit [huge documents](#) or when the scope is other than **Current file**.

-  **Options** - Opens the Preferences page of the currently selected processing engine.

### XPath scope menu

Oxygen XML Developer allows you to define a scope for which the XPath operation will be executed. You can choose where the XPath expression will be executed:

-  **Current file** - Current selected file only.

-  **Project** - All the files in the project.
-  **Selected project resources** - The files selected in the project.
-  **All opened files** - All files opened in the application.
-  **Opened archive** - Files open in the **Archive Browser view**.
-  **Working sets** - The selected *working sets*.

At the bottom of the scope menu the following scope configuration actions are available:

-  **Configure XPath working sets** - Allows you to configure and manage collections of files and folders, encapsulated in logical containers called *working sets*.
-  **XPath file filter** - You can filter the files from the selected scope for which the XPath expression will be executed. By default, the XPath expression will be executed only on XML files, but you can also define a set of patterns that will filter out files from the current scope. If you select the **Include archive** option, the XPath expression will be also executed on the files in any archive (including EPUB and DocX) found at the current scope.

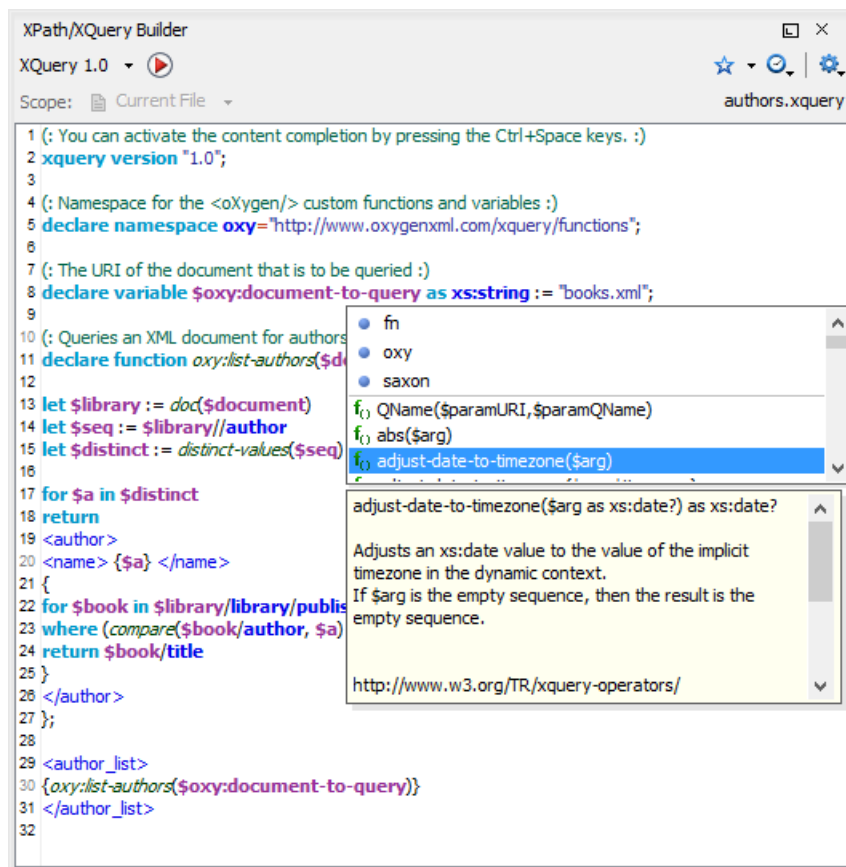


**Figure 444: XPath/XQuery Builder View**

While you edit an XPath or XQuery expression, Oxygen XML Developer assists you with the following features:

- **Content Completion Assistant** - It offers context-dependent proposals and takes into account the cursor position in the document you are editing. The set of functions proposed by the *Content Completion Assistant* also depends on the engine version. Select the engine version from the drop-down menu available in the toolbar.
- **Syntax Highlighting** - Allows you to identify the components of an expression. To customize the colors of the components of the expression, open the **Preferences dialog box (Options > Preferences)** and go to **Editor > Syntax Highlight**.
- **Automatic validation of the expression as you type.**



**Note:** When you type invalid syntax a red serrated line underlines the invalid fragments.

- Function signature and documentation balloon, when the cursor is located inside a function.

The usual edit actions ( **Cut**,  **Copy**,  **Paste**, **Select All**,  **Undo**,  **Redo**) are available in the contextual menu of the top editable part of the view.

**Related Information:**

[XPath Expression Results View](#) on page 946

## XPath Expression Results View

---

When you run an XPath expression, Oxygen XML Developer displays the results of its execution in the [Results view](#).

This view contains the following columns:

- **Description** - The result that Oxygen XML Developer displays when you run an XPath expression.
- **XPath location** - The path to the matched node.
- **Resource** - The name of the document that you run the XPath expression on.
- **System ID** - The path to the document itself.
- **Location** - The location of the result in the document.

To arrange the results depending on a column, click its header. To group the results by their resource, or by their system ID, right-click the header of any column in the **Results** view and select **Group by "Resource"** or **Group by "System ID"**. If no information regarding location is available, Oxygen XML Developer displays **Not available** in the **Location** column. Oxygen XML Developer displays the results in a valid XPath expression format.

```
- /node[value]/node[value]/node[value] -
```

The **Results** view also includes various toolbar and contextual menu actions. For more information, see [Results View](#) on page 203.

**Example:**

The following snippets are taken from a DocBook book based on the DocBook XML DTD. The book contains a number of chapters. To return all the chapter nodes of the book, enter `//chapter` in the XPath expression field and press **(Enter)**. This action returns all the chapter nodes of the DocBook book in the **Results View**. Click a record in the **Results View** to locate and highlight its corresponding chapter element and all its children nodes in the document you are editing.

To find all example nodes contained in the sect2 nodes of a DocBook XML document, use the following XPath expression: `//chapter/sect1/sect2/example`. Oxygen XML Developer adds a result in the **Results View** for each example node found in any sect2 node.

For example, if the result of the above XPath expression is:

```
- /chapter[1]/sect1[3]/sect2[7]/example[1]
```

it means that in the edited file, the example node is located in the first chapter, third section level one, seventh section level 2.



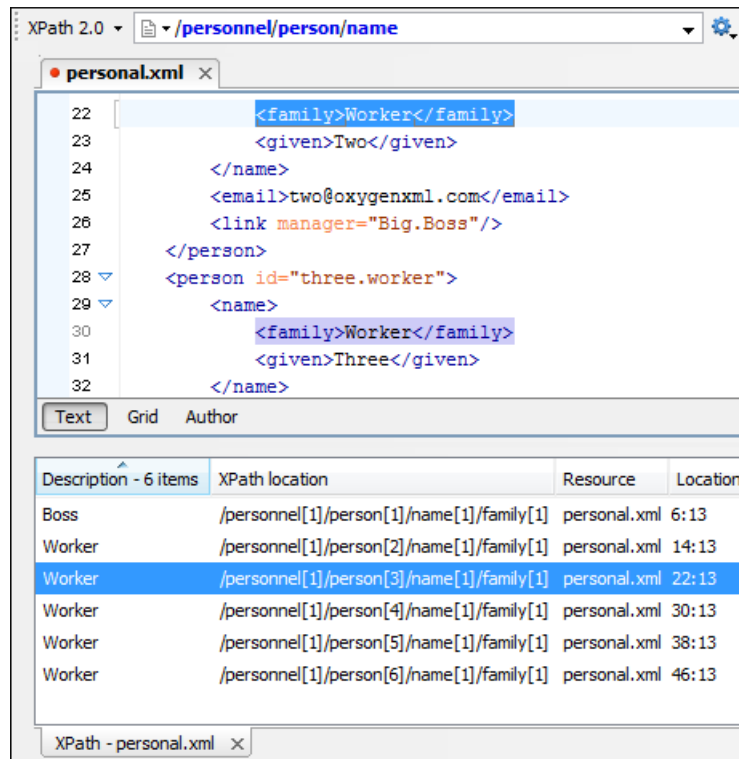


Figure 445: XPath Results Highlighted in Editor Panel with Character Precision

## XPath and XML Catalogs

The evaluation of the XPath expression tries to resolve the locations of documents referenced in the expression through *XML Catalogs*. These catalogs are configured in the [XML Catalog preferences](#) pages and the [XML Parser preferences](#).

### Example:

As an example, consider the evaluation of the `collection(URIofCollection)` function (XPath 2.0). To resolve the references from the files returned by the `collection()` function with an *XML catalog*, specify the class name of the catalog-enabled parser for parsing these collection files. The class name is `ro.sync.xml.parser.CatalogEnabledXMLReader`. Specify it as it follows:

```
let $docs := collection(iri-to-uri(
 "file:///D:/temp/test/XQuery-catalog/mydocsdire?recurse=yes;select=*.xml";
 parser=ro.sync.xml.parser.CatalogEnabledXMLReader"))
```

## XPath Prefix Mapping

To define default mappings between prefixes (that you can use in the [XPath toolbar](#)) and namespace URIs go to the [XPath preferences page](#) and enter the mappings in the **Default prefix-namespace mappings** table. The same preferences panel allows you to configure the default namespace used in XPath 2.0 expressions.

**Important:** If you define a default namespace, Oxygen XML Developer binds this namespace to the first free prefix from the list: `default`, `default1`, `default2`, and so on. For example, if you define the default namespace `xmlns="something"` and the prefix `default` is not associated with another namespace, you can match tags without prefix in an XPath expression typed in the XPath toolbar by using the prefix `default`. To find all the `level` elements when you define a default namespace in the root element, use this expression: `//default:level` in the XPath toolbar.

## Working with Archives

---

### Topics:

- [Browsing Archives](#)
- [Working with Archive Files](#)

Oxygen XML Developer includes a useful [Archive Browser view](#) that offers the means to work with files directly from various types of archives (for example, opening and saving files directly in archives, or browsing and modifying archive structures). The archive support is available for all ZIP-type archives, including:

- ZIP archives
- EPUB books
- [JAR archives](#)
- Office Open XML (OOXML) files
- Open Document Format (ODF) files
- [IDML files](#)

You can transform, validate, and perform many other operations on files directly from an archive. For instance, you can transform, or validate files directly from OOXML or ODF packages, and the structure and content of the ZIP archives can be opened, edited, and saved, similar to any other ZIP archive browsing tool. Also, when browsing for a URL in various dialog boxes, you can use the  **Browse for archived file** action to browse and select files from a particular archive.

For more information about working with an EPUB archive in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/OIGTNQwOCi8>

## Browsing Archives

---

Oxygen XML Developer includes a helper view called the **Archive Browser** that allows you to view the contents and structure of an archive, and it offers a variety of toolbar and contextual menu actions. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

To open an archive in the **Archive Browser** view, use one of the following methods:

- Open an archive from the [Project view](#).
- Select an archive in one of the file chooser dialog boxes in Oxygen XML Developer (such as the **Open** dialog box).
- Drag an archive from a system file explorer and drop it in the **Archives Browser** view.

When displaying an archive, the **Archive Browser** view locks the archive file. It is then automatically unlocked when the **Archive Browser** view is closed.

**Tip:** If a file is not recognized by Oxygen XML Developer as a supported archive type, you can add it from the [Archive preferences page](#).

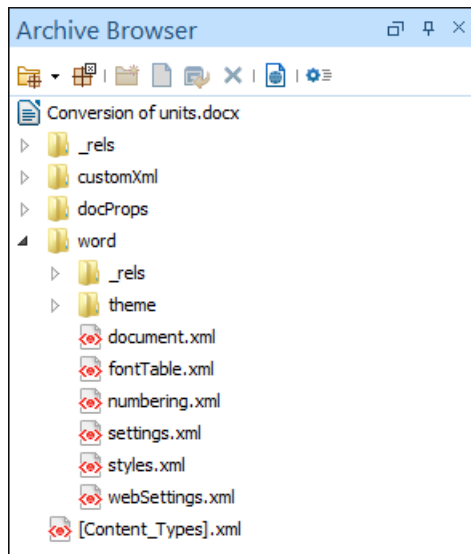


**Figure 446: Archive Browser**

### Archive Browser Toolbar Actions

The following actions are available on the **Archive Browser** toolbar:

#### **Open Archive menu**

Provides access to the  **Open Archive** action that opens a new archive in the browser. If the extension is not known as an archive extension, you will be directed to the [Archive preferences page](#) to add a new extension. The sub-menu keeps a list of recently open archive files and a **Clear history** action that allows you to delete the list.

#### **Close**

Closes the browsed archive and unlocks the archive file.

#### **Validate (available for EPUB archives only)**

Checks the EPUB archive to see if its content and structure is valid.

#### **New folder**

Creates a folder as child of the selected folder in the browsed archive.

#### **New file**

Creates a file as child of the selected folder in the browsed archive.

#### **Add files**

Adds existing files as children of the selected folder in the browsed archive.

**Note:** You can also add files in the archive by dragging them from the file browser or the [Project view](#) and dropping them in the **Archive Browser** view.

#### **Delete**

Deletes the selected resource in the browsed archive.

#### **Open in System Application**

Opens the selected resource in the default system application that is associated with that type of file.

#### **Archive Options**

Opens the [Archive preferences page](#).

## Archive Browser Contextual Menu Actions

The following additional actions are available from the contextual menu for resources in the **Archive Browser** view:

### **Open**

Opens a resource from the archive in the editor.

### **Extract**

Extracts a resource from the archive in a specified folder.

### **New folder**

Creates a folder as child of the selected folder in the browsed archive.

### **New file**

Creates a file as child of the selected folder in the browsed archive.

### **Add files**

Adds existing files as children of the selected folder in the browsed archive.

**Note:** On OS X, the **Add file** action is also available and it allows you to add one file at a time.

### **Rename**

Renames a resource in the archive.

### **Find/Replace in Files**

Opens the **Find/Replace in Files dialog box** that allows you to search for and replace specific pieces of text inside the archive.

### **Cut**

Cuts the selected archive resource.

### **Copy**

Copies the selected archive resource.

### **Paste**

Pastes a file or folder into the archive.

### **Delete**

Removes a file or folder from archive.

### **Preview**

Previews an image contained in the archive. See the [Image Preview](#) topic for more details.

### **Copy location**

Copies the URL location of the selected resource.

### **Refresh**

Refreshes the selected resource.

### **Properties**

Shows the properties of the selected resource.

For more information, watch our video demonstration about working with an EPUB in the **Archive Browser** view:

<https://www.youtube.com/embed/OIGTNQwOCi8>

## Working with Archive Files

---

Oxygen XML Developer includes support for working with various types of archives, including the following:

- **EPUB** - An e-book file format that can be used on many types of devices, such as smart phones, tablets, e-readers, or computers.

- **OOXML** - An XML-based file format for representing spreadsheets, charts, presentations, and word processing documents.
- **ODF** - An free and open-source XML-based file format for electronic office documents, such as spreadsheets, charts, presentations, and word processing documents.

When these types of files are opened in the **Archive Browser view**, their internal components are expanded:

- Document content (XHTML and image files).
- Packaging files.
- Container files.

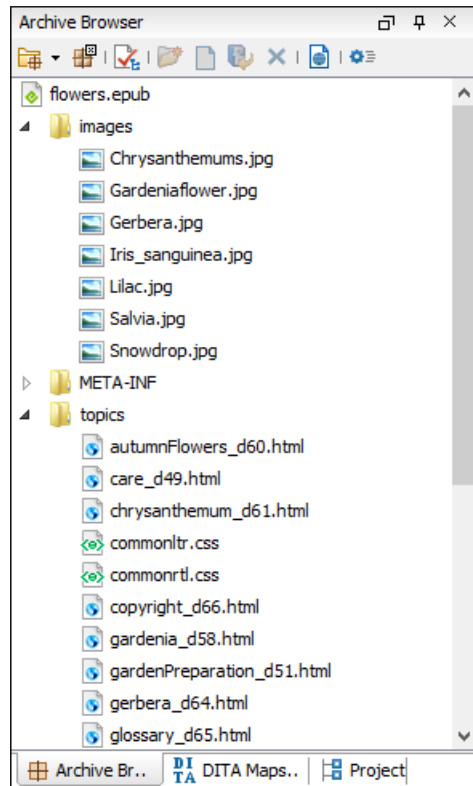


**Figure 447: EPUB File Displayed in the Archive Browser View**

When an archive is expanded in the **Archive Browser view**, you can add or delete files that compose the archive structure. All changes made to the structure of an archive are saved immediately. You can open files from within the archive to **edit them in the main editing pane and save changes** back to the archive. You can also use the **Open in System Application** action to open the archive in the default system application that is associated with that type of file.

### EPUB-Specific Validation

When working with EPUB archives, the **Archive Browser** includes a **Validate** action on the toolbar that checks the EPUB archive to make sure the structure and content are valid. Oxygen XML Developer uses the open-source *EpubCheck* validator to perform the validation. This validator detects many types of errors, including OCF container structure, OPF and OPS mark-up, as well as internal reference consistency.

For more information about working with an EPUB archive in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/OIGTNQwOCi8>

### Related Information:

[The Archive Browser View](#) on page 948

[EPUB Document Type \(Framework\)](#) on page 695

## Creating an Archive

To create an archive from scratch, follow these steps:

1. Go to **File > New** or click  **New** on the main toolbar.
2. Choose your particular type of archive template. For example, select one of the **ODF**, **OOXML**, or **EPUB** templates.
3. Click **Create** and choose the name and location of the file.
4. Click **Save**.

A skeleton archive is saved on disk and opened in the [Archive Browser view](#).

**Tip:** Use toolbar and contextual menu actions to edit, add, and remove resources from the archive. For EPUB archives, you can use the  **Validate** action to verify the integrity of the EPUB archive.

## Editing and Saving Files Inside an Archive

You can open files directly from an archive in the [Archive Browser view](#) and then edit them in the main editor pane. To open a file, simply double-click it or select  **Open** from the contextual menu.

When saving the file back to the archive, you are prompted to choose if you want the application to make a backup copy of the archive before saving the new content. If you choose **Never ask me again**, you will not be asked again to make backup copies. You can re-enable the pop-up message from the [Messages preferences page](#).

## Migrating Archives to DITA or TEI

Certain types of archives can be converted to DITA or TEI. For example, OOXML (Office Open XML) archive files with the DOCX file extension can be migrated to DITA or TEI.

To migrate DOCX files to DITA or TEI, follow these steps:

1. Open and expand the archive in the [Archive Browser](#).
2. Open the **document.xml** file contained in the archive.
3. Run one of the following predefined transformation scenarios:
  - a) **DOCX DITA** to migrate to DITA.
  - b) **DOCX TEI P5** to migrate to TEI.
4. You may need to do some manual reconfiguring to map DOCX styles to DITA or TEI content.

**Tip:** Oxygen XML Developer also includes a predefined transformation scenario called **ODT TEI P5** for converting ODF archive files with the ODT file extension to TEI and a similar process can be used to migrate ODT files to TEI.

## Databases and SharePoint

---

### Topics:

- [Working with Databases](#)
- [Integration with Microsoft SharePoint](#)

Oxygen XML Developer provides support for connecting and integrating with various databases and Microsoft SharePoint. This section includes information about the database-related features in Oxygen XML Developer. It explains how to connect with the supported databases, presents the actions that are available for each type, and includes information about SharePoint integration.

### Working with Databases

---

XML is a storage and interchange format for structured data and is supported by all major database systems. Oxygen XML Developer offers the means for managing the interaction with some of the most commonly used databases (both *Relational* and *Native XML* databases). Through this interaction, Oxygen XML Developer helps users with browsing, content editing, importing from databases, using XQuery with databases, SQL execution, and generating XML Schema from a database structure.

The types of connections that are supported in Oxygen XML Developer include:

- [IBM DB2](#)
- [Microsoft SQL Server](#)
- [Oracle Database](#)
- [PostgreSQL](#)
- [Berkeley DB XML](#)
- [eXist](#)
- [MarkLogic](#)
- [Documentum xDB \(X-Hive/DB\)](#)
- [MySQL](#)
- [Generic JDBC](#)
- [JDBC-ODBC](#)
- [BaseX](#)
- [WebDAV](#)
- [Microsoft SharePoint](#)

#### Related Information:

[Integration with Microsoft SharePoint](#) on page 1006

### Data Source Explorer View

The **Data Source Explorer** view displays your database connections. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

You can connect to a database simply by expanding the connection node (click the  connection) . The database structure can be expanded to resource level, or even all the way to column level for tables inside relational databases. Oxygen XML Developer supports multiple simultaneous database connections and the connection tree in the **Data Source Explorer** view provides an easy method for browsing them.



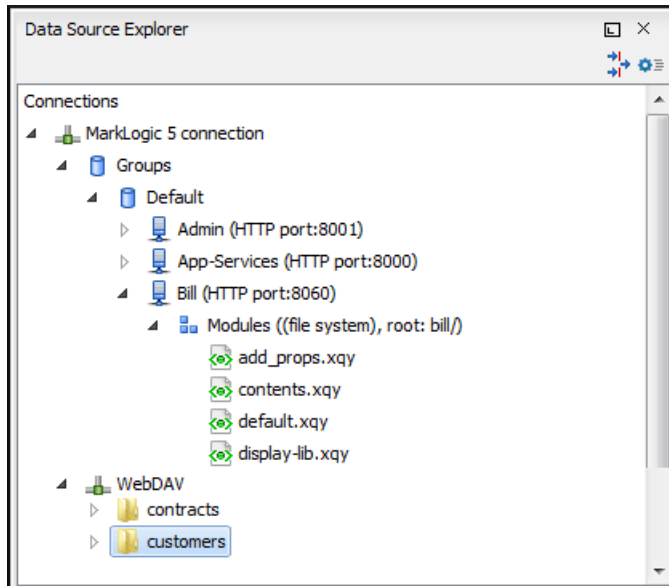


**Figure 448: Data Source Explorer View**

The objects (nodes) that are displayed in the **Data Source Explorer** view depend on the connection type and structure of the database. Various contextual menu actions are available for each hierarchical level and for some connections you can add or move resources in a container by simply dragging them from the **Project view**, a file browsing application, or another database.

### Toolbar Actions

The following actions are available in the toolbar of this view:

#### **Filters**

Opens the [Data Sources / Table Filters preferences page](#), allowing you to decide which table types are displayed in the **Data Source Explorer** view.

#### **Configure Database Sources**

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

### Database-Specific Contextual Menu Actions

Each specific type of database will also include its own specific contextual menu actions in the **Data Source Explorer** view. The actions depend on the type of database, the type of node, or the hierarchical level of the node in which the contextual menu is invoked.


For more information on the specific actions that are available, see the topics in this section for each specific type of database.

### Related Information:

[Data Sources Preferences](#) on page 120

## Table Explorer View

Relational databases tables in the [Data Source Explorer view](#) can be displayed and edited in the **Table Explorer** view by selecting the **Edit** action from the contextual menu of a  **Table** node or by double-clicking one of its fields. To modify the content of a cell, double-click it and start typing. When editing is complete, Oxygen XML Developer attempts to update the database with the new cell content.

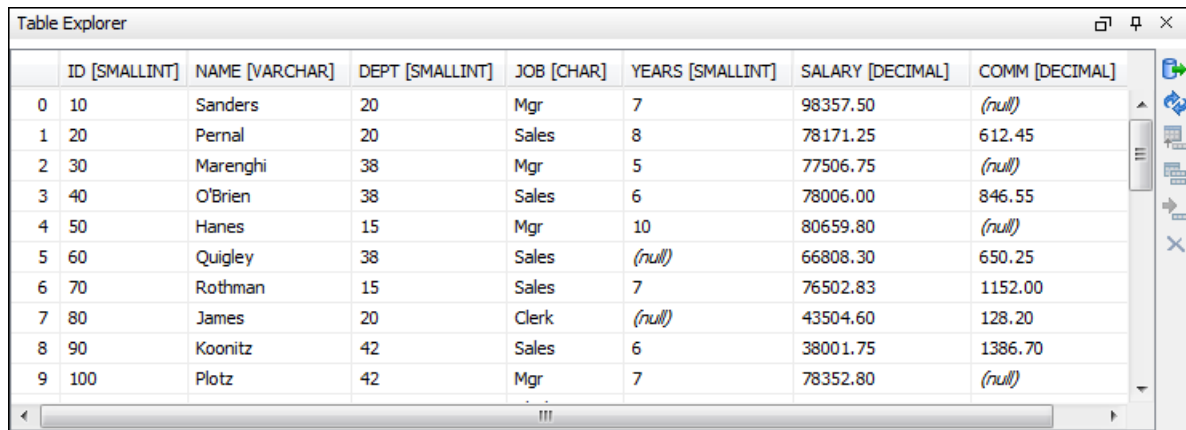

|   | ID [SMALLINT] | NAME [VARCHAR] | DEPT [SMALLINT] | JOB [CHAR] | YEARS [SMALLINT] | SALARY [DECIMAL] | COMM [DECIMAL] |
|---|---------------|----------------|-----------------|------------|------------------|------------------|----------------|
| 0 | 10            | Sanders        | 20              | Mgr        | 7                | 98357.50         | (null)         |
| 1 | 20            | Pernal         | 20              | Sales      | 8                | 78171.25         | 612.45         |
| 2 | 30            | Marenghi       | 38              | Mgr        | 5                | 77506.75         | (null)         |
| 3 | 40            | O'Brien        | 38              | Sales      | 6                | 78006.00         | 846.55         |
| 4 | 50            | Hanes          | 15              | Mgr        | 10               | 80659.80         | (null)         |
| 5 | 60            | Quigley        | 38              | Sales      | (null)           | 66808.30         | 650.25         |
| 6 | 70            | Rothman        | 15              | Sales      | 7                | 76502.83         | 1152.00        |
| 7 | 80            | James          | 20              | Clerk      | (null)           | 43504.60         | 128.20         |
| 8 | 90            | Koonitz        | 42              | Sales      | 6                | 38001.75         | 1386.70        |
| 9 | 100           | Plotz          | 42              | Mgr        | 7                | 78352.80         | (null)         |

**Figure 449: Table Explorer View**

You can sort the content of a table by one of its columns by clicking its column header.


Note the following:

- The first column is an index (not part of the table structure).
- Every column header contains the field name and its data type.
- The primary key columns are marked with this symbol: .
- Multiple tables are presented in a tabbed manner.

For performance issues, you can set the maximum number of cells that are displayed in the **Table Explorer** view (using the [Limit the number of cells option in the Data Sources Preferences page](#)). If a table that has more cells than the value set in the options is displayed in the **Table Explorer** view, a warning dialog box informs you that the table is only partially shown.

You are notified if the value you have entered in a cell is not valid (and thus cannot be updated).

- If the content of the edited cell does not belong to the data type of the column, the cell is marked by a red square and remains in an editing state until a correct value is inserted. For example, in the following figure propID contains LONG values. If a character or string is inserted, the cell will look like this:

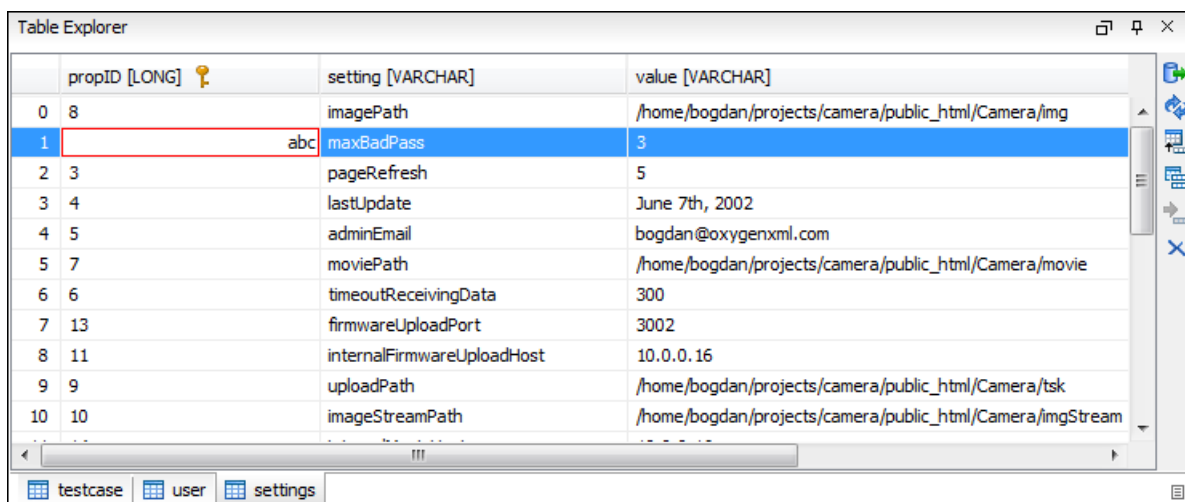

|    | propID [LONG]  | setting [VARCHAR]          | value [VARCHAR]                                           |
|----|---------------------------------------------------------------------------------------------------|----------------------------|-----------------------------------------------------------|
| 0  | 8                                                                                                 | imagePath                  | /home/bogdan/projects/camera/public_html/Camera/img       |
| 1  | abc                                                                                               | maxBadPass                 | 3                                                         |
| 2  | 3                                                                                                 | pageRefresh                | 5                                                         |
| 3  | 4                                                                                                 | lastUpdate                 | June 7th, 2002                                            |
| 4  | 5                                                                                                 | adminEmail                 | bogdan@oxygenxml.com                                      |
| 5  | 7                                                                                                 | moviePath                  | /home/bogdan/projects/camera/public_html/Camera/movie     |
| 6  | 6                                                                                                 | timeoutReceivingData       | 300                                                       |
| 7  | 13                                                                                                | firmwareUploadPort         | 3002                                                      |
| 8  | 11                                                                                                | internalFirmwareUploadHost | 10.0.0.16                                                 |
| 9  | 9                                                                                                 | uploadPath                 | /home/bogdan/projects/camera/public_html/Camera/tsk       |
| 10 | 10                                                                                                | imageStreamPath            | /home/bogdan/projects/camera/public_html/Camera/imgStream |

**Figure 450: Cell Containing an Invalid Value**

- If the constraints of the database are not met (for instance, primary key constraints), an information dialog box will appear, notifying you of the reason the database has not been updated. For example, in the table below, trying to set the second record in the primary key propID column to 8, results in a duplicate entry error since that value has already been used in the first record:

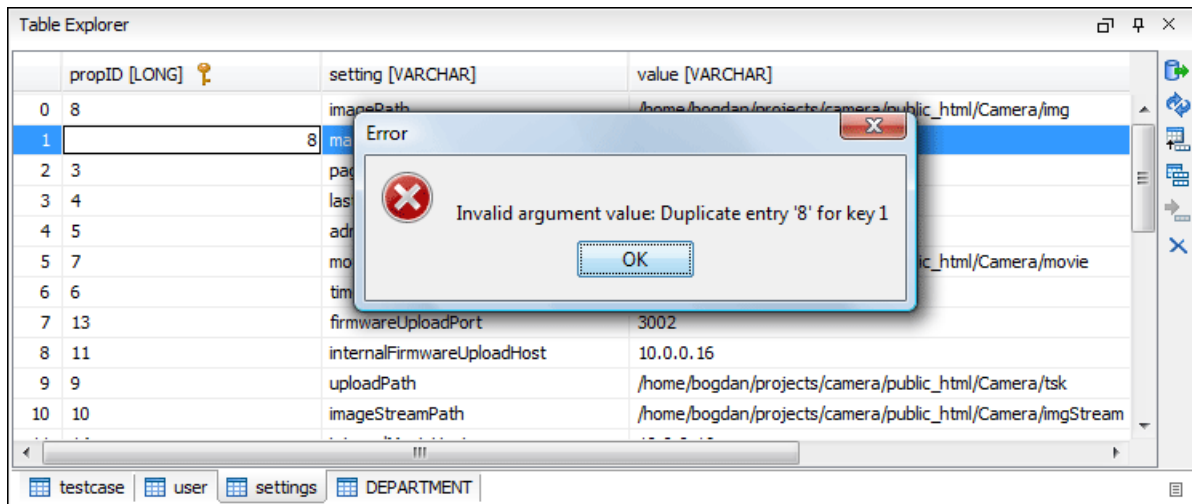


**Figure 451: Duplicate Entry for Primary Key**

### Table Explorer Contextual Menu Actions

Common editing actions ( **Cut**, **Copy**, **Paste**, **Select All**, **Undo**, **Redo**) are available in the contextual menu of an edited cell.

The contextual menu, available on every cell in the **Table Explorer** view, also includes the following actions:

#### Set NULL

Sets the content of the cell to **null**. This action is not available for columns that cannot have a value of **null**.

#### Insert row

Inserts an empty row in the table.

#### Duplicate row

Makes a copy of the selected row and adds it in the **Table Explorer** view. Note that the new row will not be inserted in the database table until all conflicts are resolved.

#### Commit row

Commits the selected row.

#### Delete row

Deletes the selected row.

#### Copy

Copies the content of the cell.

#### Paste

Pastes copied content into the selected cell.

### Table Explorer Toolbar Actions

The toolbar of the **Table Explorer** view also includes the following actions:

#### Export to XML

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from database](#) chapter) .

#### Refresh

Performs a refresh for the sub-tree of the selected node.

#### **Insert row**

Inserts an empty row in the table.

#### **Duplicate row**

Makes a copy of the selected row and adds it in the **Table Explorer** view. Note that the new row will not be inserted in the database table until all conflicts are resolved.

#### **Commit row**

Commits the selected row.

#### **Delete row**

Deletes the selected row.

#### **Related Information:**

[Data Source Explorer View](#) on page 953

## **Database Connection Support**

Oxygen XML Developer offers support for a variety of *Relational* and *Native XML* database connections. The database drivers and connections for various types of database are configured in the [Data Sources preferences page](#) and once configured, the database connections can be viewed and managed in the [Data Source Explorer view](#). Oxygen XML Developer also includes a [Database perspective](#) that helps you to manage databases.

The database support in Oxygen XML Developer offers a variety of capabilities, including:

- Browsing the structure of databases in the [Data Source Explorer view](#).
- Viewing relational tables in the [Table Explorer view](#).
- Executing SQL queries against databases.
- Calling stored procedures with input and output parameters.
- XQuery execution with databases.
- Exporting data from databases to XML.

### **Relational Database Support**

Relational databases use a relational model and are based on tables linked by a common key. Oxygen XML Developer offers support for the most commonly used relational databases, including:

- IBM DB2
- Oracle 11g
- Microsoft SQL Server
- PostgreSQL
- MySQL

Oxygen XML Developer also offers generic support (table browsing and execution of SQL queries) for any JDBC-compliant database (for example, *MariaDB*).

### **Native XML Database Support**

Native XML databases have an XML-based internal model and their fundamental unit of storage is XML. They use XML as an interface to specify documents as tree structured data that may contain unstructured text, but on disk the data is stored as optimized binary files. This makes query and retrieval processes faster. Oxygen XML Developer offers support for the most commonly used native XML databases, including:

- Berkeley DB XML
- eXist
- MarkLogic
- Documentum xDB (X-Hive/DB) 10
- Oracle XML DB
- Base X

## Related Information:

[WebDAV Connections](#) on page 997

[Integration with Microsoft SharePoint](#) on page 1006

## IBM DB2 Database Connections

Oxygen XML Developer includes support for IBM DB2 database connections. Oxygen XML Developer allows you to browse the structure of an IBM DB2 database in the [Data Source Explorer](#) view, open tables in the [Table Explorer](#) view, and perform various operations on the resources in the repository.

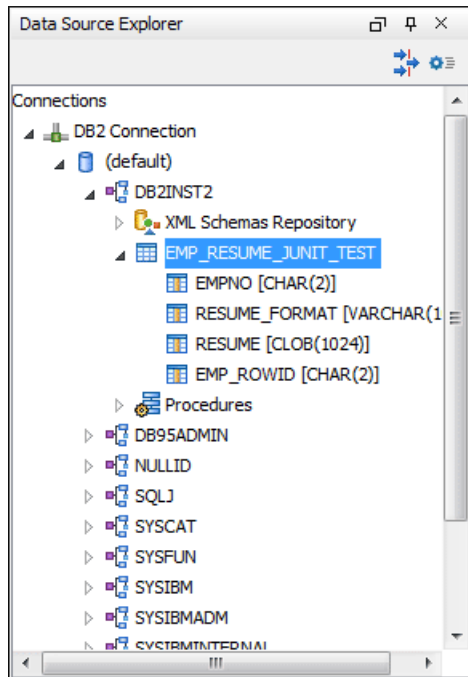


**Figure 452: IBM DB2 Database Connection**

## Configuring an IBM DB2 Database Connection

To configure the support for the IBM DB2 database, follow this procedure:

1. Go to the [IBM website](#) and in the *DB2 Clients and Development Tools* category select the *DB2 Driver for JDBC and SQLJ* download link. Fill out the download form and download the zip file. Unzip the zip file and use the `db2jcc.jar` and `db2jcc_license_cu.jar` files in Oxygen XML Developer for [configuring a DB2 data source](#).
2. [Configure IBM DB2 Data Source drivers](#).
3. [Configure an IBM DB2 Server Connection](#).
4. To view your connection, go to the [Data Source Explorer](#) view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).

### How to Configure IBM DB2 Data Source Drivers

Available in the Enterprise edition only.

To configure a data source for connecting to an IBM DB2 server, follow these steps:

1. Go to the [IBM website](#) and in the *DB2 Clients and Development Tools* category select the *DB2 Driver for JDBC and SQLJ* download link. Fill out the download form and download the zip file.
2. Unzip the downloaded archive.
3. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
4. Click the **+ New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

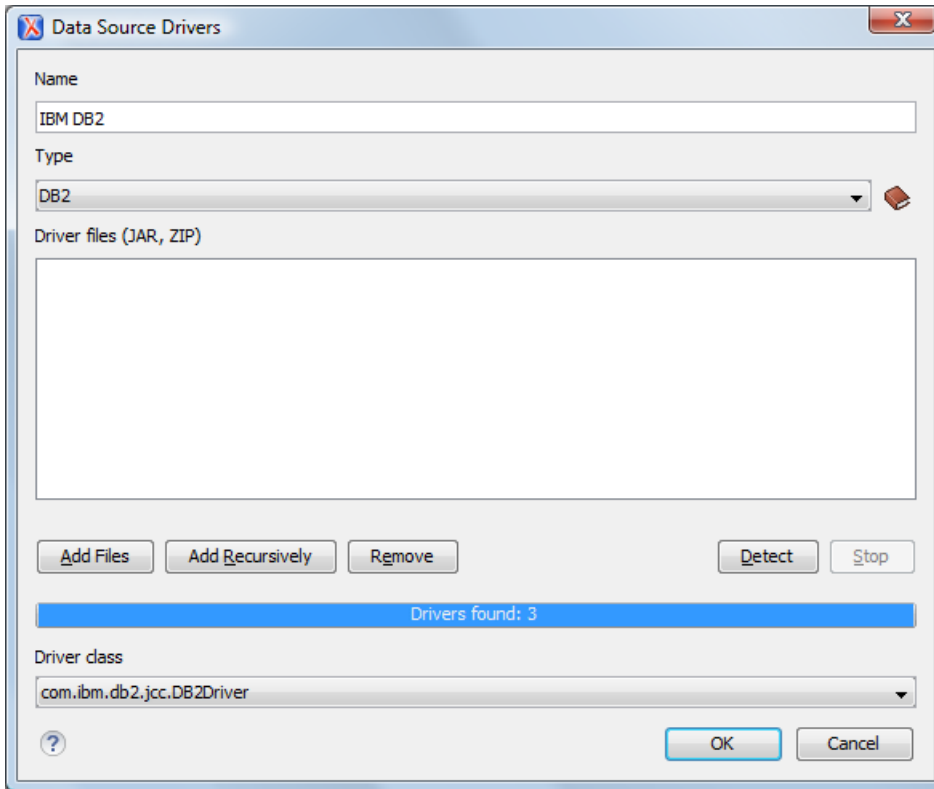


**Figure 453: Data Source Drivers Configuration Dialog Box**

5. Enter a unique name for the data source.
6. Select **DB2** in the driver **Type** drop-down menu.
7. Click the **Add Files** button and select the IBM DB2 driver files from the archive that you downloaded and unzipped.

The IBM DB2 driver files are:

- db2jcc.jar
- db2jcc\_license\_cisuz.jar
- db2jcc\_license\_cu.jar

8. Select the most appropriate **Driver class**.
9. Click the **OK** button to finish the data source configuration.
10. Continue on to [configure your IBM DB2 connection](#).

#### *How to Configure an IBM DB2 Connection*

The support to create an IBM DB2 connection is available in the Enterprise edition only.

To configure a connection to an IBM DB2 server, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

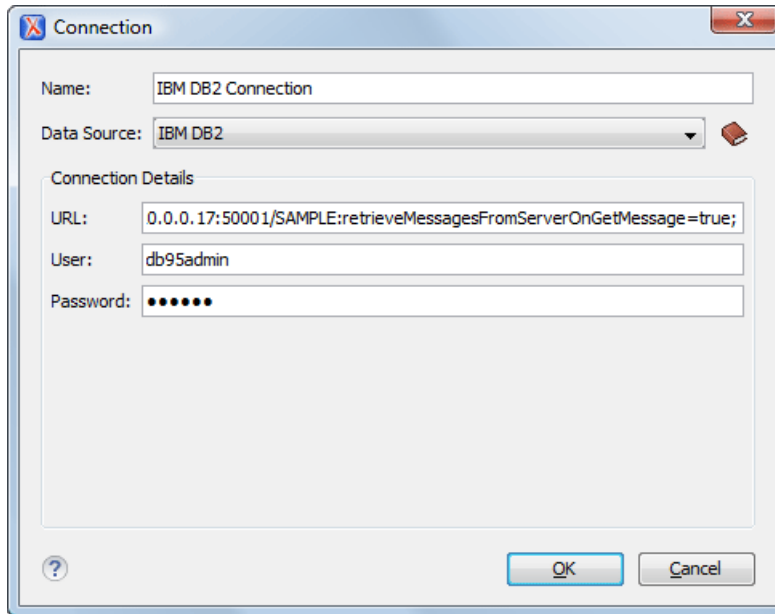


**Figure 454: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.
4. Select an *IBM DB2* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Enter the URL to the installed IBM DB2 engine.
  - b) Enter the user name to access the IBM DB2 engine.
  - c) Enter the password to access the IBM DB2 engine.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the *Database perspective*.

## IBM DB2 Contextual Menu Actions

### General Contextual Menu Actions

For relational databases, the following general actions are available in the contextual menu of the [Data Source Explorer view](#), depending on the node in which it is invoked:

#### Refresh

Performs a refresh on the selected node.

#### **Disconnect** (available on **Connection nodes**)

Closes the current database connection. If a table is already open, you are warned to close it before proceeding.

#### **Configure Database Sources** (available on **Connection nodes**)

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

#### **Edit** (available on **Table nodes**)

Opens the selected table in the [Table Explorer view](#).

#### **Export to XML** (available on **Table nodes**)

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from Database](#) chapter).

## Database-Specific Contextual Menu Actions

In addition to the general contextual menu actions in the [Data Source Explorer view](#), the various nodes in IBM DB2 connections include the following additional contextual menu actions:

### XML Schema Repository Level Nodes

#### Register

Opens a dialog box for adding a new schema file in the DB XML repository. In this dialog box, you enter a collection name and the necessary schema files. Schema dependencies management can be done by using the **Add** and **Remove** buttons.

### Schema Level Nodes

#### Unregister

Removes the selected schema from the XML Schema Repository.

#### View

Opens the selected schema in Oxygen XML Developer.

## Microsoft SQL Server Database Connections

Oxygen XML Developer includes support for Microsoft SQL Server database connections. Oxygen XML Developer allows you to browse the structure of a SQL Server database in the [Data Source Explorer view](#), open tables in the [Table Explorer view](#), and perform various operations on the resources in the repository.

### Configuring a Microsoft SQL Server Connection

To configure the support for a Microsoft SQL Server database, follow this procedure:

1. Download the appropriate MS SQL JDBC driver from the Microsoft website. For SQL Server 2008 R2 and older go to <http://www.microsoft.com/en-us/download/details.aspx?id=21599>. For SQL Server 2012 and 2014 go to <http://www.microsoft.com/en-us/download/details.aspx?id=11774>.
2. [Configure MS SQL Server Data Source drivers](#).
3. [Configure a MS SQL Server Connection](#).
4. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).

#### *How to Configure Microsoft SQL Server Data Source Drivers*

Available in the Enterprise edition only.

To configure a data source for connecting to a Microsoft SQL server, follow these steps:

1. Download the appropriate MS SQL JDBC driver from the Microsoft website. For SQL Server 2008 R2 and older, go to <http://www.microsoft.com/en-us/download/details.aspx?id=21599>. For SQL Server 2012 and 2014, go to <http://www.microsoft.com/en-us/download/details.aspx?id=11774>.
2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
3. Click the **+ New** button in the **Data Sources** panel.  
The dialog box for configuring a data source is opened.



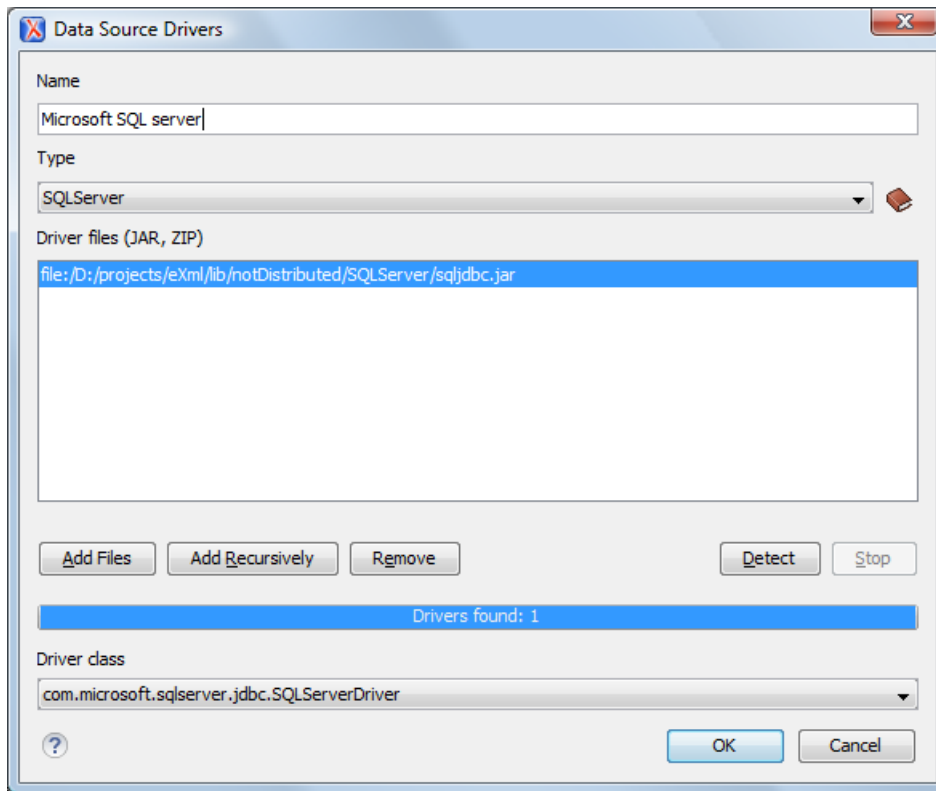


**Figure 455: Data Source Drivers Configuration Dialog Box**

4. Enter a unique name for the data source.
5. Select *SQLServer* in the driver **Type** drop-down menu.
6. Click the **Add Files** button and select the Microsoft SQL Server driver file that you downloaded.  
The SQL Server driver file is called `sqljdbc.jar`.
7. Select the most appropriate **Driver class**.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure your Microsoft SQL Server connection](#).

#### *How to Configure a Microsoft SQL Server Connection*

The support to configure a Microsoft SQL Server connection is available in the Enterprise edition only.

To configure a connection to a Microsoft SQL Server, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

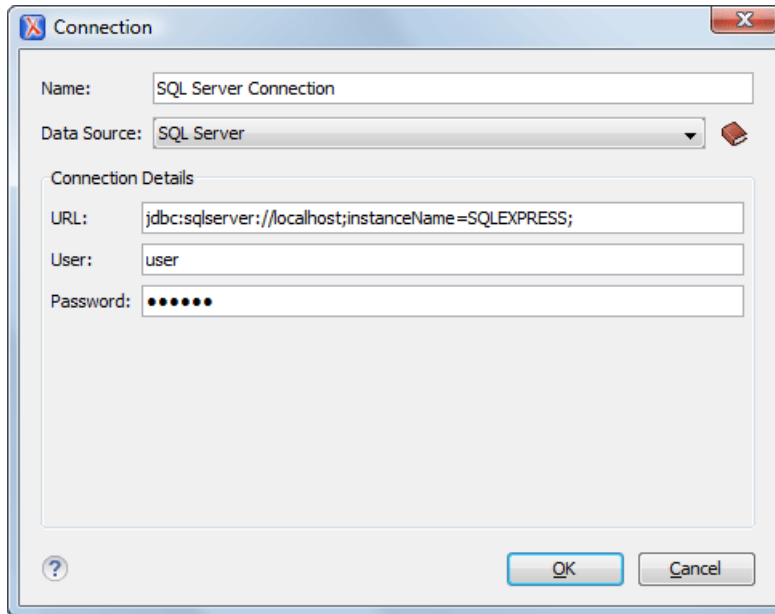


**Figure 456: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.
4. Select the *SQL Server* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Enter the URL of the SQL Server server.  
If you want to connect to the server using Windows integrated authentication, you must add **;integratedSecurity=true** to the end of the URL. The URL will look like this:

```
jdbc:sqlserver://localhost;instanceName=SQLEXPRESS;integratedSecurity=true;
```

**Note:** For integrated authentication, leave the **User** and **Password** fields empty.

- b) Enter the user name for the connection to the SQL Server.
  - c) Enter the password for the connection to the SQL Server.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the **Data Source Explorer** view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

## Microsoft SQL Server Contextual Menu Actions

### General Contextual Menu Actions

For relational databases, the following general actions are available in the contextual menu of the **Data Source Explorer** view, depending on the node in which it is invoked:

#### Refresh

Performs a refresh on the selected node.

#### **Disconnect** (available on Connection nodes)

Closes the current database connection. If a table is already open, you are warned to close it before proceeding.

#### **Configure Database Sources** (available on Connection nodes)

Opens the **Data Sources preferences page** where you can configure both data sources and connections.

#### **Edit** (available on Table nodes)

Opens the selected table in the **Table Explorer** view.

### **Export to XML (available on Table nodes)**

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from Database](#) chapter).

### **Database-Specific Contextual Menu Actions**

In addition to the general contextual menu actions in the [Data Source Explorer view](#), the resource level nodes in Microsoft SQL Server connections include the following additional contextual menu action:

### **XML Schema Repository Level Nodes**

#### **Register**

Opens a dialog box for adding a new schema file in the DB XML repository. In this dialog box, you enter a collection name and the necessary schema files. Schema dependencies management can be done by using the **Add** and **Remove** buttons.

### **Schema Level Nodes**

#### **Add**

Adds a new schema to the XML Schema files.

#### **Unregister**

Removes the selected schema from the XML Schema Repository.

#### **View**

Opens the selected schema in Oxygen XML Developer.

### **Oracle Database Connections**

The Oracle database is a common relational type of database system. Oxygen XML Developer comes with built-in support for the 11g version of the database system. The Oracle database also includes a Oracle XML DB component that adds native XML support. Oxygen XML Developer allows you to browse Oracle repositories in the [Data Source Explorer view](#), open tables in the [Table Explorer view](#), and perform various operations on the resources in the repository.

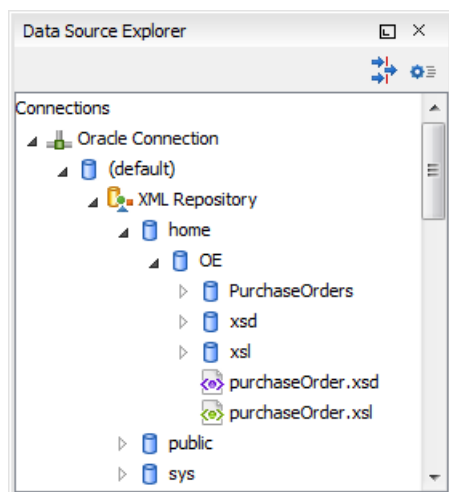


**Figure 457: Oracle Database Connection**

### **Related Information:**

[Using XQuery with Oracle XML DB](#)

### **Configuring an Oracle 11g Database Connection**

To configure the support for a Oracle 11g database, follow this procedure:

1. Go to <http://www.oracle.com/technetwork/database/enterprise-edition/jdbc-112010-090769.html> and download the Oracle 11g JDBC driver called `ojdbc6.jar`.

2. [Configure Oracle 11g Data Source drivers](#).
3. [Configure an Oracle 11g Connection](#).
4. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).

#### How to Configure Oracle 11g Data Source Drivers

Available in the Enterprise edition only.

To configure a data source for connecting to an Oracle 11g server, follow these steps:

1. Go to <http://www.oracle.com/technetwork/database/enterprise-edition/jdbc-112010-090769.html> and download the Oracle 11g JDBC driver called `ojdbc6.jar`.
2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
3. Click the **+ New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

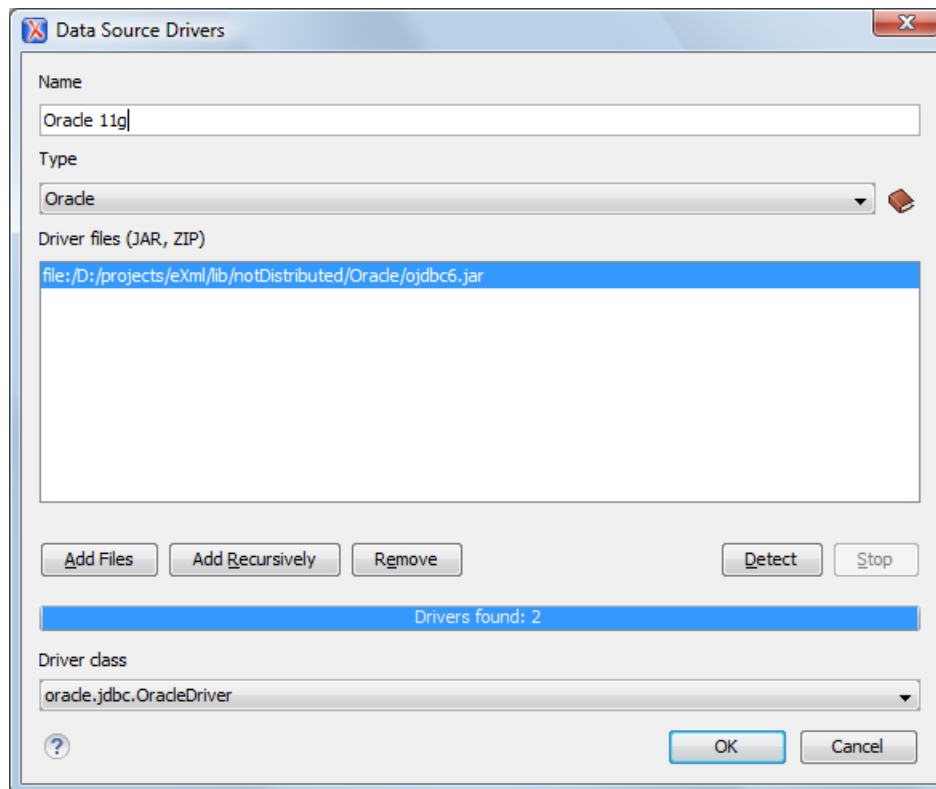


**Figure 458: Data Source Drivers Configuration Dialog Box**

4. Enter a unique name for the data source.
5. Select *Oracle* in the driver **Type** drop-down menu.
6. Click the **Add Files** button and select the Oracle driver file that you downloaded. The Oracle driver file is called `ojdbc5.jar`.
7. Select the most appropriate **Driver class**.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure your Oracle connection](#).

#### How to Configure an Oracle 11g Connection

Available in the Enterprise edition only.

To configure a connection to an Oracle 11g server, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.

2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

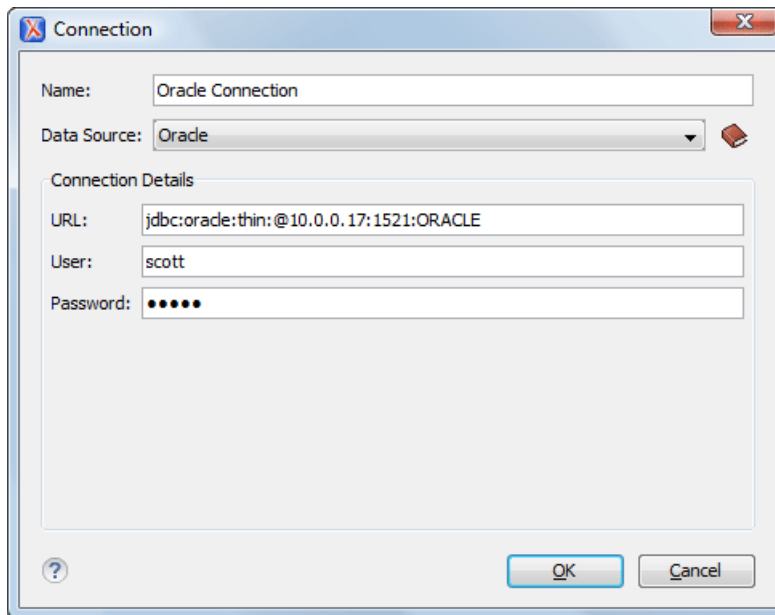


**Figure 459: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.
4. Select the *Oracle 11g* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Enter the URL of the Oracle server.
  - b) Enter the user name for the connection to the Oracle server.
  - c) Enter the password for the connection to the Oracle server.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### Oracle Database Contextual Menu Actions

#### General Contextual Menu Actions

For relational databases, the following general actions are available in the contextual menu of the [Data Source Explorer view](#), depending on the node in which it is invoked:

#### Refresh

Performs a refresh on the selected node.

#### **Disconnect** (available on Connection nodes)

Closes the current database connection. If a table is already open, you are warned to close it before proceeding.

#### **Configure Database Sources** (available on Connection nodes)

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

#### **Edit** (available on Table nodes)

Opens the selected table in the [Table Explorer view](#).

#### **Export to XML** (available on Table nodes)

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the [Import from Database](#) chapter).

## Database-Specific Contextual Menu Actions

In addition to the general contextual menu actions in the [Data Source Explorer view](#), the various nodes in Oracle database connections include the following additional contextual menu actions:

### XML Schema Repository Level Nodes

#### Register

Opens a dialog box for adding a new schema file in the XML repository. To add an XML Schema, enter the schema URI and location on your file system. *Local* scope means that the schema is visible only to the user who registers it. *Global* scope means that the schema is public.

**Note:** Registering a schema may involve dropping/creating types. Hence you need type-related privileges such as DROP TYPE, CREATE TYPE, and ALTER TYPE. You need privileges to delete and register the XML schemas involved in the registering process. You need all privileges on XMLType tables that conform to the registered schemas. For XMLType columns, the ALTER TABLE privilege is needed on corresponding tables. If there are schema-based XMLType tables or columns in other database schemas, you need privileges such as the following:

- CREATE ANY TABLE
- CREATE ANY INDEX
- SELECT ANY TABLE
- UPDATE ANY TABLE
- INSERT ANY TABLE
- DELETE ANY TABLE
- DROP ANY TABLE
- ALTER ANY TABLE
- DROP ANY INDEX

To avoid having to grant all these privileges to the schema owner, Oracle recommends that the registration be performed by a DBA if there are XML schema-based XMLType table or columns in other user database schemas.

### XML Repository Level Nodes

#### Add container

Adds a new child container to the current one.

#### Add resource

Adds a new resource to the folder.

### Container Level Nodes

#### Add container

Adds a new child container to the current one.

#### Add resource

Adds a new resource to the folder.

#### Delete

Deletes the current container.

#### Properties

Shows various properties of the current container.

### Resource Level Nodes

#### Open

Opens the selected resource in the editor.

#### Open in System Application

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default

application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

#### Rename

Renames the current resource

#### Move

Moves the current resource to a new container (also available through drag and drop).

#### ✕ Delete

Deletes the current container.

#### Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

#### 🔗 Properties

Shows various properties of the current container.

#### Compare

Compares two selected resources using the [Compare Files](#) tool.

### PostgreSQL Database Connections

Oxygen XML Developer includes support for PostgreSQL database connections. Oxygen XML Developer allows you to browse the structure of a PostgreSQL database in the [Data Source Explorer view](#), open tables in the [Table Explorer view](#), and perform various operations on the resources in the repository.

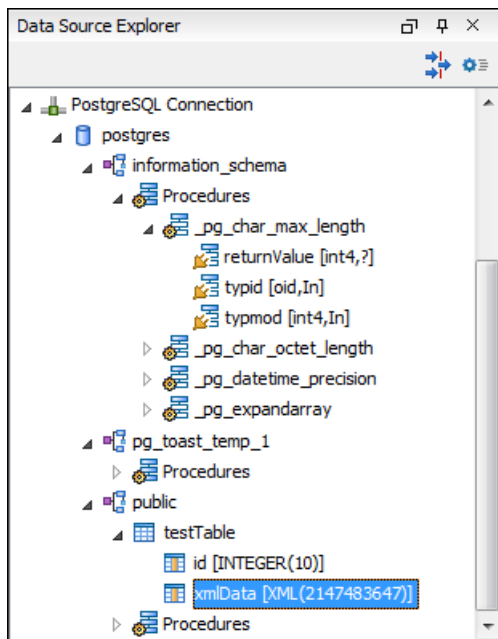


Figure 460: PostgreSQL Database Connection

#### Configuring a PostgreSQL Database Connection

To configure the support for a PostgreSQL database, follow this procedure:

1. Go to <http://jdbc.postgresql.org/download.html> and download the PostgreSQL 8.3 JDBC3 driver.
2. [Configure PostgreSQL Data Source drivers](#).
3. [Configure a PostgreSQL Connection](#).
4. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).

### How to Configure PostgreSQL 8.3 Data Source Drivers

To configure a data source for connecting to a PostgreSQL server, follow these steps:

1. Go to <http://jdbc.postgresql.org/download.html> and download the PostgreSQL 8.3 JDBC3 driver.
2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
3. Click the **+ New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

4. Enter a unique name for the data source.
5. Select *PostgreSQL* in the driver **Type** drop-down list.
6. Click the **Add Files** button and select the PostgreSQL driver file that you downloaded.  
The PostgreSQL driver file is called `postgresql-8.3-603.jdbc3.jar`.
7. Select the most appropriate **Driver class**.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure your PostgreSQL connection](#).

### How to Configure a PostgreSQL 8.3 Connection

To configure a connection to a PostgreSQL 8.3 server, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

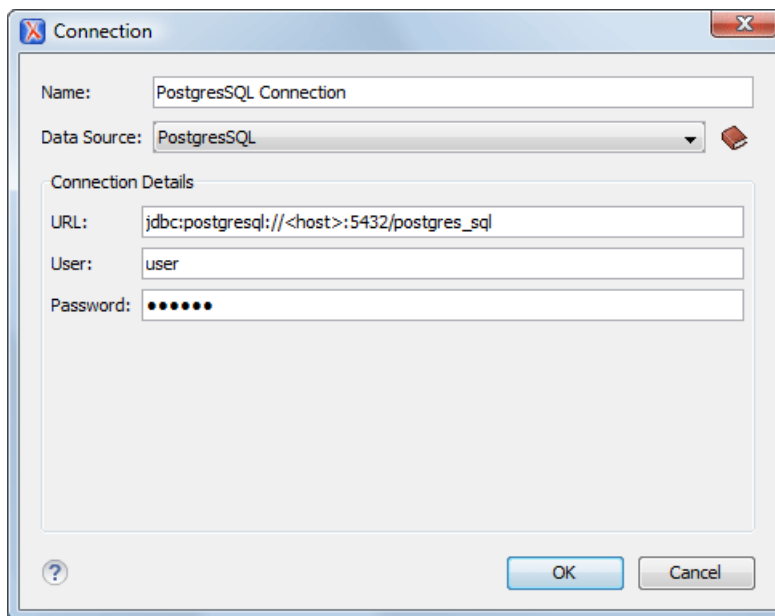


**Figure 461: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.
4. Select the *PostgreSQL 8.3* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Enter the URL of the PostgreSQL 8.3 server.
  - b) Enter the user name for the connection to the PostgreSQL 8.3 server.
  - c) Enter the password for the connection to the PostgreSQL 8.3 server.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.



## PostgreSQL Contextual Menu Actions

### General Contextual Menu Actions

For relational databases, the following general actions are available in the contextual menu of the **Data Source Explorer view**, depending on the node in which it is invoked:

#### Refresh

Performs a refresh on the selected node.

#### **Disconnect** (available on Connection nodes)

Closes the current database connection. If a table is already open, you are warned to close it before proceeding.

#### **Configure Database Sources** (available on Connection nodes)

Opens the **Data Sources preferences page** where you can configure both data sources and connections.

#### **Edit** (available on Table nodes)

Opens the selected table in the **Table Explorer view**.

#### **Export to XML** (available on Table nodes)

Opens the **Export Criteria** dialog box (a thorough description of this dialog box can be found in the **Import from Database** chapter).

### Database-Specific Contextual Menu Actions

In addition to the general contextual menu actions in the **Data Source Explorer view**, the resource level nodes in PostgreSQL connections include the following additional contextual menu action:

#### **Resource Level Nodes**

##### **Compare**

Compares two selected resources using the **Compare Files tool**.

### Berkeley DB XML Database Connections

Oxygen XML Developer includes support for Berkeley DB XML database connections. Oxygen XML Developer allows you to browse the structure of a Berkeley DB XML database in the **Data Source Explorer view** and perform various operations on the resources in the repository.

Oracle Berkeley DB XML is an open source, embeddable XML database with XQuery-based access to documents stored in containers and indexed based on their content. It is built on top of the Oracle Berkeley DB and inherits its features and attributes, along with native XML support. A detailed description can be found at: <http://www.oracle.com/us/products/database/berkeley-db/xml/overview/index.html>.

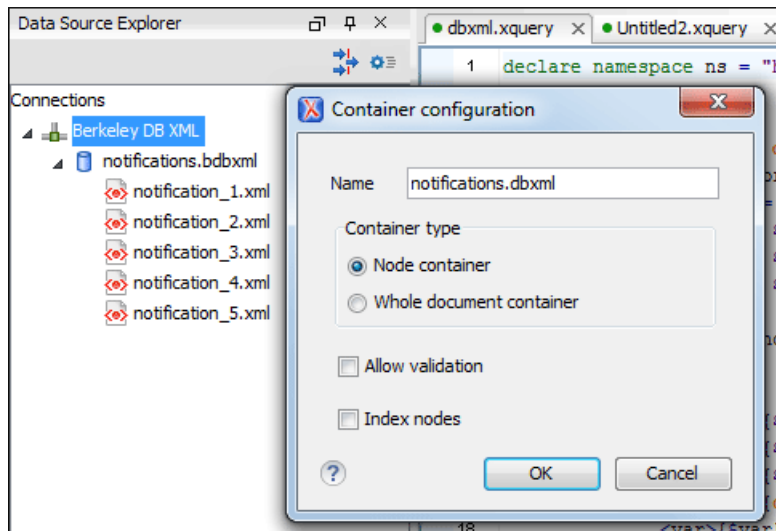


**Figure 462: Berkeley DB XML Connection**

### Configuring a Berkeley DB XML Database Connection

Follow this procedure to configure the support for a Berkeley DB XML database:

1. [Configure Berkeley DB XML Data Source drivers.](#)
2. [Configure a Berkeley DB XML Connection.](#)
3. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).

#### *How to Configure Berkeley DB XML Data Source Drivers*

For this procedure, you need to already have a Berkeley DB XML database installed on your system.

Oxygen XML Developer supports Berkeley DB XML versions 2.3.10, 2.4.13, 2.4.16 & 2.5.16. To configure a data source for a Berkeley DB XML database, follow these steps:

1. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.
2. Click the **+ New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *Berkeley DBXML* from the driver **Type** drop-down menu.
5. Click the **Add Files** button to add the Berkeley DB driver files.

The driver files for the Berkeley DB database (and their locations) are as follows:

- db.jar (check for it in [DBXML\_DIR]/lib or [DBXML\_DIR]/jar)
- dbxml.jar (check for it in [DBXML\_DIR]/lib or [DBXML\_DIR]/jar)

Where [DBXML\_DIR] is the Berkeley DB XML database root directory. For example, in Windows it is: C:\Program Files\Oracle\Berkeley DB XML <version>.

6. Click the **OK** button to finish the data source configuration.
7. Continue on to [configure your Berkeley DB XML connection](#).

#### *How to Configure a Berkeley DB XML Connection*

Oxygen XML Developer supports Berkeley DB XML versions 2.3.10, 2.4.13, 2.4.16 & 2.5.16. To configure a connection to a Berkeley DB XML database, follow these steps:

1. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select a previously configured Berkeley data source from the **Data Source** drop-down menu.
5. Enter the connection details.

- a) Set the path to the Berkeley DB XML database directory in the **Environment home directory field**. Use a directory with write access. DO NOT use the installation directory where Berkeley DB XML is installed if you do not have write access to that directory.
- b) Select the **Verbosity** level: *DEBUG*, *INFO*, *WARNING*, or *ERROR*.
- c) Optionally, you can select the **Join existing environment** checkbox.

If selected, an attempt is made to join an existing environment in the specified home directory and all the original environment settings are preserved. If that fails, try reconfiguring the connection with this option unchecked.

6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the **Data Source Explorer view** (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### Berkeley DB XML Contextual Menu Actions

While browsing Berkeley DB XML connections in the **Data Source Explorer view**, the various nodes include the following contextual menu actions:

#### **Connection Level Nodes**

##### **Configure Database Sources**

Opens the **Data Sources preferences page** where you can configure both data sources and connections.

##### **Disconnect**

Stops the connection.

##### **New Collection**

Opens a **Container configuration** dialog box that allows you to add a new container in the repository.

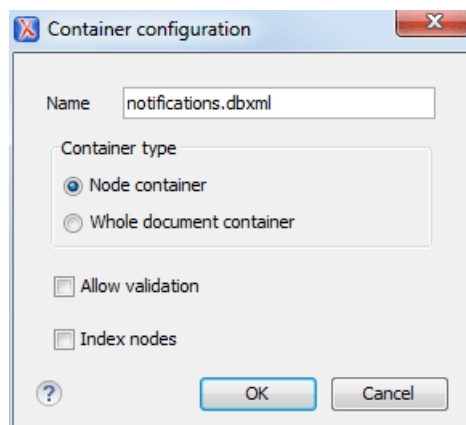


**Figure 463: Container Configuration Dialog Box**

This dialog box allows you to configure the following:

- **Name** - The name of the new container.
- **Container type** - At creation time, every container must have a type defined for it. This container type identifies how XML documents are stored in the container. As such, the container type can only be determined at container creation time. You cannot change it when subsequent container opens. You can select one of the following types:
  - **Node container** - XML documents are stored as individual nodes in the container. Each record in the underlying database contains a single leaf node, its attributes and attribute values (if any), and its text nodes (if any). Berkeley DB XML also keeps the information it requires to reassemble the document from the individual nodes stored in the underlying databases. This is the default selection and is the preferred container type.
  - **Whole document container** - The container contains entire documents. The documents are stored without any manipulation of line breaks or whitespace.
- **Allow validation** - If selected, documents will be validated when they are loaded into the container. The default behavior is to not validate documents.

- **Index nodes** - If selected, indices for the container will return nodes rather than documents. The default is to index at the document level. This property has no meaning if the container type is **Whole document container**.

### **Refresh**

Performs a refresh on the selected node.

### **Properties**

Shows various properties of the current container.

### **Find/Replace in Files**

Opens the **Find/Replace in Files dialog box** that allows you to find and replace text in multiple files from the connection.

## **Container Level Nodes**

### **Import Files**

Allows you to add a new file on the connection, in the current folder.

### **Export**

Allows you to export the folder on the remote connection to a local folder.

### **Cut**

Removes the current selection and places it in the clipboard.

### **Paste**

Pastes the copied selection.

### **Rename**

Renames the current resource

### **Delete**

Deletes the current container.

### **Edit indices**

Opens a **Container Indices** dialog box that allows you to configure indices properties for the selected Berkeley container.

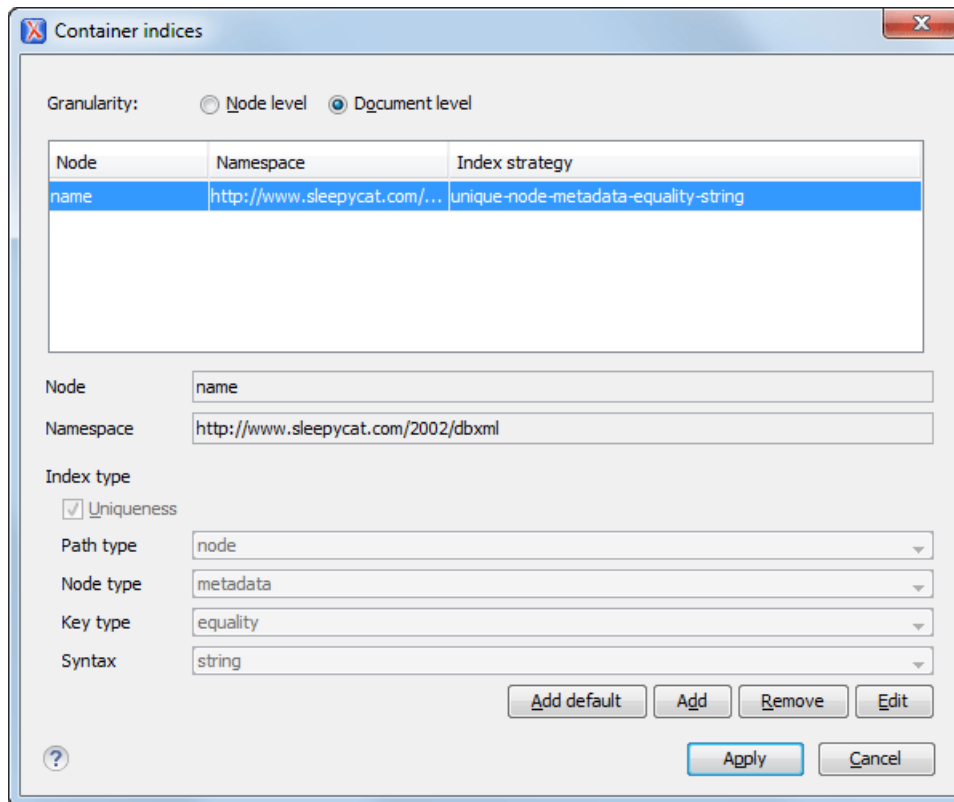


**Figure 464: Container Indices Dialog Box**

This dialog box allows you to configure the following properties:

- **Granularity** - A measure of the level of details of your data in the database. You can select one of the following:
  - **Document level** - Good option for retrieving large documents.
  - **Node level** - Good option for retrieving nodes from within documents.
- **Node** - The name of the node.
- **Namespace** - The index namespace.
- **Index type**:
  - **Uniqueness** - Indicates whether or not the indexed value must be unique within the container.
  - **Path type** - Drop-down menu that allows you to select from the following:
    - **node** - Indicates that you want to index a single node in the path.
    - **edge** - Indicates that you want to index the portion of the path where two nodes meet.
  - **Node type** - Drop-down menu that allows you to select from the following:
    - **element** - An element node in the document content.
    - **attribute** - An attribute node in the document content.
    - **metadata** - A node found only in the metadata content of a document.
  - **Key type** - Drop-down menu that allows you to select from the following:
    - **equality** - Improves the performances of tests that look for nodes with a specific value.
    - **presence** - Improves the performances of tests that look for the existence of a node regardless of its value.
    - **substring** - Improves the performance of tests that look for a node whose value contains a given sub-string.
  - **Syntax** - The syntax describes the type of data the index contains and is mostly used to determine how indexed values are compared. The default value is `string`.

### Refresh

Performs a refresh on the selected node.

### Properties

Shows various properties of the current container.

### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

## Resource Level Nodes

### Open

Opens the selected resource in the editor.

### Open in System Application

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

### Cut

Removes the current selection and places it in the clipboard.

### Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

### Rename

Renames the current resource

### Delete

Deletes the current container.

### Refresh

Performs a refresh on the selected node.

### Properties

Shows various properties of the current container.

### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

### Compare

Compares two selected resources using the [Compare Files tool](#).

## Debugging with Berkeley DB XML

The Berkeley DB XML database added a debugging interface starting with version 2.5. The current version is supported in the Oxygen XML Developer XQuery Debugger. [The same restrictions and peculiarities](#) apply for the Berkeley debugger as for the MarkLogic debugger.

## eXist Database Connections

Oxygen XML Developer includes support for eXist database connections. Oxygen XML Developer allows you to browse the structure of a eXist database in the [Data Source Explorer view](#) and perform various operations on the resources in the repository.

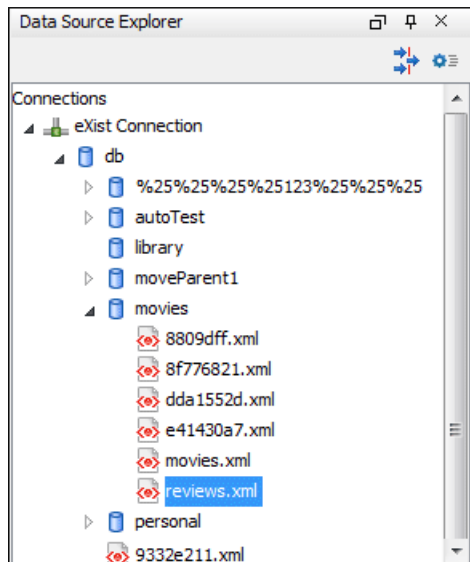


**Figure 465: eXist Database Connection**

### Configuring an eXist Database Connection

There are two ways to configure the support for an eXist database:

- Use the dedicated **Create eXist-db XML connection** wizard.
  1. Open the **Preferences** dialog box (**Options > Preferences**), go to **Data Sources** and click the **Create eXist-db XML connection** link.
  2. Enter your connection details in the connection wizard and click **OK**.
 

**Important:** To create an eXist connection using this wizard, Oxygen XML Developer expects the `exist / webstart/exist.jnlp` path to be accessible at the provided **Host** and **Port**.
  3. To view your connection, go to the **Data Source Explorer** view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.
- Use the **Data Sources** preferences page to configure your connection.
  1. **Configure eXist Data Source drivers**.
  2. **Configure an eXist Connection**.
  3. To view your connection, go to the **Data Source Explorer** view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

#### *How to Configure eXist Data Source Drivers*

For this procedure, you need to already have an eXist database server installed.

Oxygen XML Developer supports eXist database server versions up to and including version 3.0. To configure a data source for an eXist database, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select eXist from the driver **Type** drop-down menu.
5. Click the **Add Files** button to add the eXist driver files.

The following driver files should be added and they are found in the installation directory of the eXist database server. Make sure you copy the files from the installation of the eXist server where you want to connect from Oxygen XML Developer.

#### **eXist 3.x**

- `exist.jar`
- `lib/core/xmlldb.jar`

- lib/core/xmlrpc-client-3.1.x.jar
- lib/core/xmlrpc-common-3.1.x.jar
- lib/core/ws-commons-util-1.0.x.jar
- lib/core/slf4j-api-1.x.x.jar (if available)
- lib/core/slf4j-log4j12-1.x.x.jar (if available)

#### **eXist 4.x**

- exist.jar
- lib/core/log4j-api-\*.jar
- lib/core/log4j-jul-\*.jar
- lib/core/log4j-slf4j-impl-\*.jar
- lib/core/slf4j-api-\*.jar
- lib/core/ws-commons-util-\*.jar
- lib/core/xmldb.jar
- lib/core/xmlrpc-client-\*.jar
- lib/core/xmlrpc-common-\*.jar

The \* represents the version number.

6. Click the **OK** button to finish the data source configuration.
7. Continue on to [configure your eXist connection](#).

For more information about running XQuery against an eXist XML database, watch our video demonstration:

<https://www.youtube.com/embed/Yoc5h1zSddA>

#### *How to Configure an eXist Connection*

To configure a connection to an eXist database, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select a previously configured eXist data source from the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Set the URI to the installed eXist engine in the **XML DB URI** field.
  - b) Set the user name in the **User** field.
  - c) Set the password in the **Password** field.
  - d) Enter the start collection in the **Collection** field.

eXist organizes all documents in hierarchical collections. Collections are like directories. They are used to group related documents together. This text field allows the user to set the default collection name.

6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the **Data Source Explorer view** (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

For more information about running XQuery against an eXist XML database, watch our video demonstration:

<https://www.youtube.com/embed/Yoc5h1zSddA>

#### **eXist Contextual Menu Actions**

While browsing eXist database connections in the **Data Source Explorer view**, the various nodes include the following contextual menu actions:

##### **Connection Level Nodes**

##### **Configure Database Sources**

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.



### Disconnect

Stops the connection.



### Refresh

Performs a refresh on the selected node.



### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

## Container Level Nodes

### New File

Creates a new file on the connection, in the current folder.

### New Collection

Creates a new collection on the connection.

### Import Folders

Imports folders on the server.



### Import Files

Allows you to add a new file on the connection, in the current folder.

### Export

Allows you to export the folder on the remote connection to a local folder.



### Cut

Removes the current selection and places it in the clipboard.



### Paste

Pastes the copied selection.



### Refresh

Performs a refresh on the selected node.



### Properties

Shows various properties of the current container.



### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

## Resource Level Nodes

### Open

Opens the selected resource in the editor.

### Open in System Application

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

### Save As

Allows you to save the selected resource as a file on disk.



### Cut

Removes the current selection and places it in the clipboard.



### Copy

Copies the current selection into the clipboard.

### Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

### Rename

Renames the current resource



### Delete

Deletes the current container.



### Refresh

Performs a refresh on the selected node.



### Properties

Shows various properties of the current container.



### Find/Replace in Files

Opens the [Find/Replace in Files](#) dialog box that allows you to find and replace text in multiple files from the connection.

### Compare

Compares two selected resources using the [Compare Files](#) tool.

## MarkLogic Database Connections

Oxygen XML Developer Enterprise edition includes support for MarkLogic database connections. Once you [configure a MarkLogic connection](#), you can use the [Data Source Explorer](#) view to display all the application servers that are configured on the MarkLogic server. You can expand each application server and view all of its configured modules, and the [Data Source Explorer](#) view allows you to open and edit these modules.

**Note:** To browse modules located in a database, directory properties must be associated with them. These directory properties are generated automatically if the *directory creation* property of the database is set to automatic. If this property is set to **manual** or **manual-enforced**, add the directory properties of the modules manually, using the XQuery function `xdmp:directory-create()`. For example, for two documents with the `/code/modules/main.xqy` and `/code/modules/imports/import.xqy` IDs, run the following query:

```
(xdmp:directory-create('/code/modules/'), xdmp:directory-create('/code/modules/imports/'))
```

For more information about directory properties, go to: <http://blakeley.com/blogofile/2012/03/19/directory-assistance/>.

## MarkLogic and XQuery

MarkLogic connections can be used in conjunction with XQuery scripts to debug and solve problems with XQuery transformations. XQuery modules can also be validated using a MarkLogic server to allow you to spot possible issues without the need of actually executing the XQuery script.

When [debugging XQuery files with MarkLogic](#), you can use the [Data Source Explorer](#) view to open the files from the application server that is involved in the debugging process. By using the [Data Source Explorer](#) view, any imported modules are better identified by the MarkLogic server. You can also [use step actions and breakpoints](#) in the modules to help identify problems.

## Modules Container

For each Application server (for example: *Bill (HTTP port:8060)*), you have access to the XQuery modules that are visible to that server. When editing, executing, or debugging XQuery it is recommended to open the XQuery files from this  **Modules** container.

**Note:** You can also manage resources for a MarkLogic database through a WebDAV connection, although it is not recommended if you work with XQuery files since imported modules may not be resolved correctly.

## Requests Container

Each MarkLogic application server includes a  **Requests** container. In this container, Oxygen XML Developer displays both queries that are stopped for debugging purposes and queries that are still running. To clean up the entire **Requests** container at the end of your session, right-click it and use the **Cancel all requests** action.

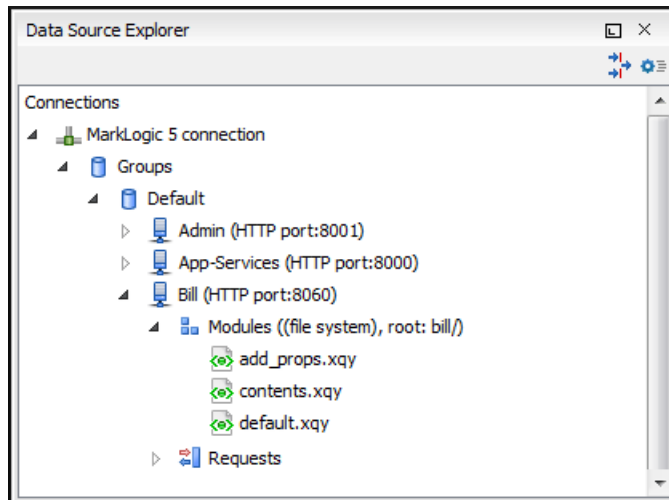


Figure 466: MarkLogic Connection in Data Source Explorer

### Configuring a MarkLogic Database Connection

Note that this feature is available in Oxygen XML Developer Enterprise edition only.

Follow this procedure to configure the support for a MarkLogic database connection:

1. Download the MarkLogic driver from [MarkLogic Community site](#).
2. [Configure MarkLogic Data Source drivers](#).
3. [Configure a MarkLogic Connection](#).
4. To view your connection, go to the **Data Source Explorer** view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

#### Related Information:

[MarkLogic Development in Oxygen XML Developer](#) on page 981

#### *How to Configure MarkLogic Data Source Drivers*

Available in the Enterprise edition only.

**Note:** Oxygen XML Developer supports MarkLogic version 4.0 or later.

To configure a data source for MarkLogic, follow this procedure:

1. Download the **XCC Java distribution** zip file from: <http://developer.marklogic.com/products/xcc>.
2. Unzip the downloaded archive.
3. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
4. Click the **+ New** button in the **Data Sources** panel.
5. Enter a unique name for the data source.
6. Select **MarkLogic** from the driver **Type** drop-down list.
7. Click the **Add Files** button and select the MarkLogic driver file from the `lib` folder of the archive that you downloaded and unzipped. The driver file name is `marklogic-xcc-{server_version}.jar`, where `{server_version}` is the MarkLogic server version.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure your MarkLogic Connection](#).

## How to Configure a MarkLogic Connection

Available in the Enterprise edition only.

**Note:** Oxygen XML Developer supports MarkLogic version 4.0 or later.

To configure a connection to a MarkLogic database, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select a previously configured MarkLogic data source from the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) The host name or IP address of the installed MarkLogic engine in the **XDBC Host** field.

Oxygen XML Developer uses XCC connector to interact with MarkLogic XDBC server and requires the basic authentication schema to be set. Starting with version MarkLogic 4.0 the default authentication method when you create an HTTP or WebDAV Server is *digest*, so make sure to change it to *basic*.
  - b) Set the port number of the MarkLogic engine in the **Port** field. A MarkLogic XDBC application server must be configured on the server on this port. This XDBC server will be used to process XQuery expressions against the server. Later, if you want to change the XDBC server, instead of editing the configuration just use the [Use it to execute queries](#) action from Data Source Explorer.
  - c) Set the user name to access the MarkLogic engine in the **User** field.
  - d) Set the password to access the MarkLogic engine in the **Password** field.
  - e) Optionally, in the **WebDAV URL** field, set the URL used for browsing the MarkLogic database in the [Data Source Explorer](#) view.

The **Database** field specifies the database for which the XQuery expressions are executed. If you set this option to default, the database associated to the application server of the configured port is used.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer](#) view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

## MarkLogic Development in Oxygen XML Developer

The Oxygen XML Developer support for MarkLogic includes features designed for developers, such as debugging XQuery transformations, remote and collaborative debugging, XQuery editing and validation, and an [XQuery builder](#) that helps to improve productivity.

### Working with XQuery Files

MarkLogic supports working with XQuery files to create queries over stored XML content. You can open an XQuery file, configure a transformation scenario to match your MarkLogic connection, write the XQuery, and then execute it.

When editing XQuery modules stored on the MarkLogic server, the [Outline view](#) collects and displays all the functions from all imported modules. The [Content Completion Assistant](#) also presents all of these functions along with the latest built-in XQuery functions in accordance with the server version.

When developing queries for MarkLogic, it is best to open the resources from the [Data Source Explorer](#) view. When you execute or debug XQuery files opened from this view, imported modules can be resolved better by the MarkLogic server. Another advantage is that validation is automatically performed on the MarkLogic server, including any imported modules.

### XQuery Debugging

Oxygen XML Developer allows you to use MarkLogic connections to debug real applications that use XQuery (for example, web applications that trigger XQuery executions). By setting the server in debug mode, you can intercept all the XQuery scripts that run on that server. Oxygen XML Developer connects to the MarkLogic server, shows you the running XQuery scripts, and allows you to debug them. The remote debugging support also allows you to debug collaboratively. Multiple users can participate in the same debugging session. You can start a debugging session and another user can continue it, and vice versa.

## Working with Modules

MarkLogic has a concept of two types of XQuery modules, *library* and *main* modules. A *library* module is used to define functions. Library modules cannot be evaluated directly. They are imported, either from other library modules or from main modules. A *main* module is used as an entry point that can be executed as an XQuery program. For more information on these types of modules, see [XQuery Library Modules and Main Modules](#).

When working with *library* modules, you need to create a validation scenario and associate it with the module. In the validation scenario you need to specify a main module as the entry point for validation. The modules need to be deployed on a MarkLogic server because Oxygen XML Developer will request the server to validate the modules.

To validate *library* modules stored on a MarkLogic server, follow these steps:

1. [Configure a MarkLogic database connection](#).
2. Expand the MarkLogic connection in the [Data Source Explorer view](#) and open the *library* modules. The *main* module must also be opened from the [Data Source Explorer view](#).
3. [Configure a validation scenario](#) for each *library* module. Specify the *main* module in the **URL of the file to validate** field.

**Result:** Validation is done on the server that contains the *main* module. The *main* module and all other *library* modules involved in the validation must be saved. Otherwise, the server will validate what was saved on the server, without the uncommitted changes. Also, the [Content Completion Assistant](#) and the [Outline view](#) should now present the functions from all the modules.

### Related Information:

[Debugging with MarkLogic](#) on page 982

[Configuring a MarkLogic Database Connection](#) on page 980

## Debugging with MarkLogic

Oxygen XML Developer includes support for debugging XQuery transformations that are executed against a MarkLogic database.

To use a debugging session against the MarkLogic engine, follow these steps:

1. Configure a [MarkLogic data source](#) and a [MarkLogic connection](#).
2. Make sure that the debugging support is enabled in the MarkLogic server that Oxygen XML Developer accesses. On the server side, debugging must be activated in the XDBC server and in the *Task Server* section of the server control console (the switch *debug allow*). If the debugging is not activated, the MarkLogic server reports a **DBG-TASKDEBUGALLOW** error.

**Note:** An XDBC application server must be running to connect to the MarkLogic server and this XDBC server will be used to process XQuery expressions against the server. You can change the XDBC application server that Oxygen XML Developer uses to process XQuery expressions by selecting the [Use it to execute queries action](#) from the contextual menu in the [Data Source Explorer view](#).

3. Open the XQuery file and start the debugging process.
  - If you want to debug an XQuery file stored on the MarkLogic server, we recommend you to use the [Data Source Explorer view](#) and open the file from the application server that is involved in the debugging process. This improves the resolving of any imported modules.
  - The MarkLogic XQuery debugger integrates seamlessly into the [XQuery Debugger perspective](#). If you have a MarkLogic validation scenario configured for the XQuery file, you can choose to [debug the scenario](#) directly.
  - Otherwise, switch to the [XQuery Debugger perspective](#), open the XQuery file in the editor, and select the MarkLogic connection in the XQuery engine selector from the [debug control toolbar](#).

For general information about how a debugging session is started and controlled, see the [Working with the Debugger](#) section.

In a MarkLogic debugging session, you can use step actions and [breakpoints](#) to help identify problems. When you [add a breakpoint](#) on a line where the debugger never stops, Oxygen XML Developer displays a warning message. These warnings are displayed for *breakpoints* you add either in the main XQuery (which you can open locally or from the server) or for *breakpoints* you add in any XQuery that is opened from the connection that participates in

the debugging session. For more information, see [Using Breakpoints for Debugging Queries that Import Modules with MarkLogic](#) on page 983.

## Remote Debugging with MarkLogic

Oxygen XML Developer allows you to debug remote applications that use XQuery (for example, web applications that trigger XQuery executions). Oxygen XML Developer connects to a MarkLogic server, shows you the running XQuery scripts and allows you to debug them. You can even pause the scripts so that you can start the debugging queries in the exact context of the application. You can also switch a server to debug mode to intercept all XQuery scripts.

Oxygen XML Developer also supports collaborative debugging. This feature allows multiple users to participate in the same debugging session. You can start a debugging session and at a certain point, another user can continue it.

**Important:** When using the remote debugging feature, the HTTP and the XDBC servers involved in the debugging session must have the same module configuration.

For more information about the XQuery debugger for MarkLogic, watch our video demonstration:

<https://www.youtube.com/embed/eQ4ThDZq1bk>

### Related Information:

[MarkLogic Development in Oxygen XML Developer](#) on page 981

[Configuring a MarkLogic Database Connection](#) on page 980

### *Using Breakpoints for Debugging Queries that Import Modules with MarkLogic*

When debugging queries that imports modules stored in the database, it is recommended to place [breakpoints](#) in the modules. When starting a new debugging session, make sure that the modules that you will debug are already opened in the editor. This is necessary so that the [breakpoints](#) in all the modules will be considered. Also, make sure that there are no other opened modules that are not involved in the current debugging session.

To place [breakpoints](#) in the modules, use the following procedure:

1. In the [Data Source Explorer view](#), open all the modules from the  **Modules** container of the [XDBC application server](#) that performs the debugging.
2. [Set breakpoints](#) in the module as needed.
3. [Continue debugging](#) the query.

If you get a warning that the [breakpoints](#) failed to initialize, try the following solutions:

- Check the [Breakpoints view](#) and make sure there are no older [breakpoints](#) (set on resources that are not part of the current debugging context).
- Make sure you open the modules from the context of the application server that does the debugging and place [breakpoints](#) there.

### Related Information:

[MarkLogic Database Connections](#) on page 979

[MarkLogic Development in Oxygen XML Developer](#) on page 981

### *Peculiarities and Limitations of the MarkLogic Debugger*

MarkLogic debugger has the following peculiarities and limitations:

- Debugging support is only available for MarkLogic server versions 4.0 or newer.
- For MarkLogic server versions 4.0 or newer, there are three XQuery syntaxes that are supported: '0.9-ml' (inherited from MarkLogic 3.2), '1.0-ml', and '1.0'.
- All declared variables are presented as strings. The **Value** column of the **Variables** view contains the expression from the variable declaration. It can be evaluated by copying the expression with the **Copy value** action from the contextual menu of the [Variables view](#) and pasting it in the [XWatch view](#).
- There is no support for [output to source mapping](#).
- There is no support for [showing the trace](#).

- You can only set [breakpoints](#) in imported modules in one of the following cases:
  - When you open the module from the context of the application server involved in the debugging, using the [Data Source Explorer view](#).
  - When the debugger automatically opens the modules in the Editor.
- No [breakpoints](#) are set in modules from the same server that are not involved in the current debugging session.
- No support for [profiling](#) when an XQuery transformation is executed in the debugger.

## MarkLogic Contextual Menu Actions

While browsing MarkLogic connections in the [Data Source Explorer view](#), the various nodes include the following contextual menu actions:

### Connection Level Nodes

#### Configure Database Sources

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

#### Disconnect

Stops the connection.

#### Refresh

Performs a refresh on the selected node.

#### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

### Container Level Nodes

#### Enable Debug Mode

Switches the server to a debugging mode. For more information, see [MarkLogic debugging sessions](#).

#### Use it to Execute Queries

The server will be used to process XQuery expressions against it.

#### Refresh

Performs a refresh on the selected node.

### Module or Folder Level Nodes

#### Export

Allows you to export the folder on the remote connection to a local folder.

#### Refresh

Performs a refresh on the selected node.

### Requests Level Nodes

#### Refresh

Performs a refresh on the selected node.

#### Cancel all requests

Cancels all queries that are either running or stopped on the application server. You can use this action to clean up the entire **Requests** container at the end of your sessions.

### Resource Level Nodes

#### Open

Opens the selected resource in the editor.



## Open in System Application

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

## Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

## Refresh

Performs a refresh on the selected node.

## Compare

Compares two selected resources using the [Compare Files tool](#).

## Related Information:

[Configuring a MarkLogic Database Connection](#) on page 980

[MarkLogic Development in Oxygen XML Developer](#) on page 981

[Debugging with MarkLogic](#) on page 982

## Documentum xDB (X-Hive/DB) 10 Database Connections [Deprecated]

Oxygen XML Developer includes support for Documentum xDB (X-Hive/DB) 10 database connections. Oxygen XML Developer allows you to browse the structure of a Documentum xDB (X-Hive/DB) 10 database in the [Data Source Explorer view](#) and perform various operations on the resources in the repository.

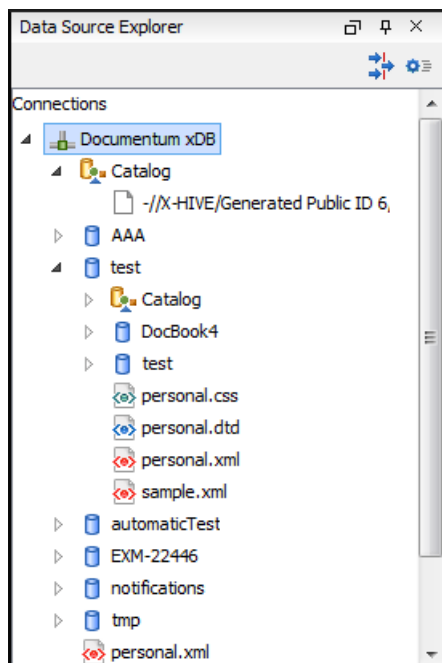


Figure 467: Documentum xDB (X-Hive/DB) 10 Connection

## Configuring a Documentum xDB (X-Hive/DB) 10 Database Connection [Deprecated]

Follow this procedure to configure the support for a Documentum xDB (X-Hive/DB) 10 database:

1. [Configure Documentum xDB Data Source drivers](#).
2. [Configure a Documentum xDB Connection](#).
3. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the [Database perspective](#).



### How to Configure Documentum xDB (X-Hive/DB) 10 Data Source Drivers [Deprecated]

Available in the Enterprise edition only. For this procedure, you need to already have a Documentum xDB server installed.

To configure a data source for Documentum xDB (X-Hive/DB) 10, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *Documentum xDB* from the driver **Type** drop-down menu.
5. Click the **Add** button to add the driver files.

The driver files for the Documentum xDB (X-Hive/DB) 10 database are found in the Documentum xDB (X-Hive/DB) 10 lib directory from the server installation folder:

- antlr-runtime.jar
- aspectjrt.jar
- icu4j.jar
- xhive.jar
- google-collect.jar

6. Click the **OK** button to finish the data source configuration.
7. Continue on to [configure your Documentum xDB \(X-Hive/DB\) 10 connection](#).

### How to Configure an Documentum xDB (X-Hive/DB) 10 Connection [Deprecated]

To configure a connection to a Documentum xDB (X-Hive/DB) 10 database, follow these steps:

**Note:** The bootstrap type of X-Hive/DB connections is not supported in Oxygen XML Developer. The following procedure explains the `xhive://` protocol connection type.

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select a previously configured data source from the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Set the URL property of the connection in the **URL** field.

If the property is a URL of the form `xhive://host:port`, the Documentum xDB (X-Hive/DB) 10 connection will attempt to connect to a Documentum xDB (X-Hive/DB) 10 server running behind the specified TCP/IP port.
  - b) Set the user name to access the Documentum xDB (X-Hive/DB) 10 engine in the **User** field.
  - c) Set the password to access the Documentum xDB (X-Hive/DB) 10 engine in the **Password** field.
  - d) Set the name of the database to access from the Documentum xDB (X-Hive/DB) 10 engine in the **Database** field.
  - e) Select the **Run XQuery in read / write session (with committing)** checkbox if you want to end the session with a commit. Otherwise, the session ends with a rollback.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### Documentum xDB (X-Hive/DB) 10 Contextual Menu Actions [Deprecated]

While browsing Documentum xDB (X-Hive/DB) 10 connections in the [Data Source Explorer view](#), the various nodes include the following contextual menu actions:

#### **Connection Level Nodes**

##### **Configure Database Sources**

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

**Disconnect**

Stops the connection.

**Add Library**

Allows you to add a new library.

 **Insert XML Instance**

Allows you to add a new XML resource directly into the database root. See [Documentum xDB \(X-Hive/DB\) 10 Parser Configuration](#) for more details.

 **Insert non-XML Instance**

Allows you to add a new non-XML resource directly in the database root.

 **Refresh**

Performs a refresh on the selected node.

 **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

 **Catalog Level Nodes****Add AS Models**

Allows you to add a new abstract schema model to the selected catalog.

**Export**

Allows you to export the folder on the remote connection to a local folder.

**Set Default Schema**

Allows you to set a default DTD to be used for parsing. It is not possible to set a default XML Schema.

**Clear Default Schema**

Allows you to clear the default DTD. The action is available only if there is a DTD set as default.

 **Refresh**

Performs a refresh on the selected node.

 **Properties**

Shows various properties of the current container.

 **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

 **Container (Library) Level Nodes****New File**

Creates a new file on the connection, in the current folder.

**Add Library**

Allows you to add a new library.

**Import Folders**

Imports folders on the server.

**Add Local Catalog**

Adds a catalog to the selected library. By default, only the root-library has a catalog, and all models are stored there.

 **Insert XML Instance**

Allows you to add a new XML resource directly into the database root. See [Documentum xDB \(X-Hive/DB\) 10 Parser Configuration](#) for more details.

### **Insert non-XML Instance**

Allows you to add a new non-XML resource directly in the database root.

### **Export**

Allows you to export the folder on the remote connection to a local folder.



### **Cut**

Removes the current selection and places it in the clipboard.



### **Copy**

Copies the current selection into the clipboard.



### **Paste**

Pastes the copied selection.

### **Rename**

Renames the current resource



### **Delete**

Deletes the current container.



### **Refresh**

Performs a refresh on the selected node.



### **Properties**

Shows various properties of the current container.



### **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

## **Resource Level Nodes**

### **Open**

Opens the selected resource in the editor.

### **Open in System Application**

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

### **Save As**

Allows you to save the selected resource as a file on disk.



### **Cut**

Removes the current selection and places it in the clipboard.



### **Copy**

Copies the current selection into the clipboard.

### **Copy location**

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

### **Add AS model**

Allows you to add an XML schema to the selected XML resource.

### **Set AS model**

Allows you to set an active AS model for the selected XML resource.

### Clear AS model

Allows you to clear the active AS model of the selected XML resource.

### Properties

Displays the resource properties. Available only for XML resources.

### Set Default Schema

Allows you to set the selected DTD to be used as default for parsing. The action is available only for DTD.

### Clear Default Schema

Allows you to unset the selected DTD. The action is available only if the selected DTD is the current default to be used for parsing.

### Rename

Renames the current resource



### Delete

Deletes the current container.



### Refresh

Performs a refresh on the selected node.



### Find/Replace in Files

Opens the [Find/Replace in Files](#) dialog box that allows you to find and replace text in multiple files from the connection.

### Compare

Compares two selected resources using the [Compare Files](#) tool.

## Documentum xDB (X-Hive/DB) 10 Parser Configuration for Adding XML Instances [Deprecated]

When an XML instance document is added to a Documentum xDB (X-Hive/DB) 10 connection or library, it is parsed with an internal XML parser of the database server. The following options are available for configuring this parser:

- DOM Level 3 parser configuration parameters. More about each parameter can be found here: [DOM Level 3 Configuration](#).
- Documentum xDB (X-Hive/DB) 10 specific parser parameters (for more information, consult the Documentum xDB (X-Hive/DB) 10 manual):
  - **xhive-store-schema** - If selected, the corresponding DTD or XML schemas are stored in the catalog during validated parsing.
  - **xhive-store-schema-only-internal-subset** - Stores only the internal sub-set of the document (not an external sub-set). This option modifies the **xhive-store-schema** (only has a function when that parameter is set to true, and when a DTD is involved). Select this option if you only want to store the internal sub-set of the document (not the external sub-set).
  - **xhive-ignore-catalog** - Ignores the corresponding DTD and XML schemas in the catalog during validated parsing.
  - **xhive-psvi** - Stores **psvi** information about elements and attributes. Documents parsed with this feature turned on give access to **psvi** information and enable support of data types by XQuery queries.
  - **xhive-sync-features** - With this convenience setting turned on, parameter settings of **XhiveDocumentIf** are synchronized with the parameter settings of **LSParser**. Note that parameter settings **xhive-psvi** and **schema-location** are always synchronized.

## Troubleshooting Documentum xDB [Deprecated]

### Question:

I am able to access my XML Database in the [Data Source Explorer](#) and open files for reading but when I try to save changes to a file back into the database, I receive the following error: **"Cannot save the file. DTD factory class org.apache.xerces.impl.dv.dtd.DTDDVFactoryImpl does not extend from DTDDVFactory"**. How can I fix this?

**Answer:**

xhive.jar contains a MANIFEST.MF with a classpath:

```
Class-Path: core/antlr-runtime.jar core/aspectjrt.jar core/fastutil-shrunk.jar
core/google-collect.jar core/icu4j.jar core/lucene-regex.jar core/lucene.jar
core/serializer.jar core/xalan.jar core/xercesImpl.jar
```

Since the driver was configured to use xhive.jar directly from the xDB installation (where many other JARS are located), core/xercesImpl.jar from the xDB installation directory is loaded even though it is not specified in the list of JARS from the data source driver configuration (it is in the classpath from xhive.jar - MANIFEST.MF). A simple workaround for this issue is to copy **ONLY** the JAR files used in the driver configuration to a separate folder and configure the data source driver to use them from there.

**MySQL Database Connections**

Oxygen XML Developer includes support for MySQL database connections. Oxygen XML Developer allows you to browse the structure of a SQL Server database in the [Data Source Explorer view](#), open tables in the [Table Explorer view](#), and perform various operations on the resources in the repository.

**Configuring a MySQL Database Connection**

To configure the support for a MySQL database, follow this procedure:

1. [Configure MySQL Data Source drivers](#).
2. [Configure a MySQL Connection](#).
3. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

*How to Configure MySQL Data Source Drivers*

To connect to a MySQL server, you need to create a generic JDBC type data source based on [the MySQL JDBC driver available on the MySQL website](#).

To configure this data source, follow these steps:

1. Go to [https://www.oxygenxml.com/database\\_drivers.html](https://www.oxygenxml.com/database_drivers.html) and download the appropriate MySQL driver.
2. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
3. Click the **+ New** button in the **Data Sources** panel.

The dialog box for configuring a data source is opened.

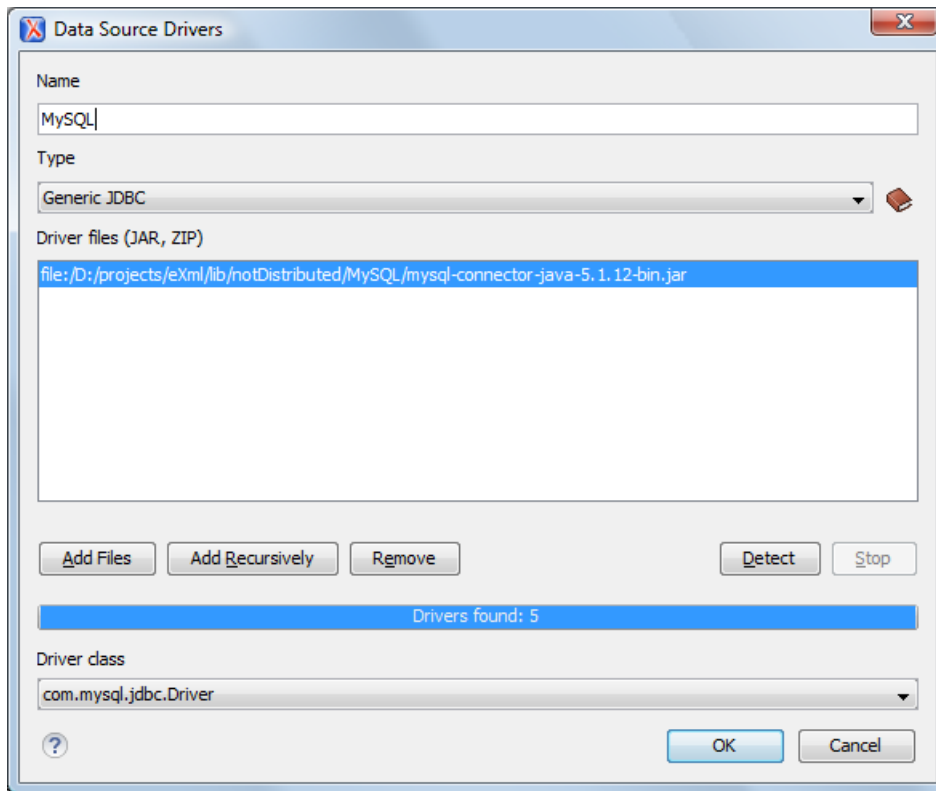


**Figure 468: Data Source Drivers Configuration Dialog Box**

4. Enter a unique name for the data source.
5. Select *Generic JDBC* in the driver **Type** drop-down list.
6. Click the **Add Files** button and select the MySQL driver file that you downloaded.  
The driver file for the MySQL server is called `mysql-com.jar`.
7. Select the most appropriate **Driver class**.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure your MySQL connection](#).

#### *How to Configure a MySQL Connection*

To configure a connection to a MySQL server, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

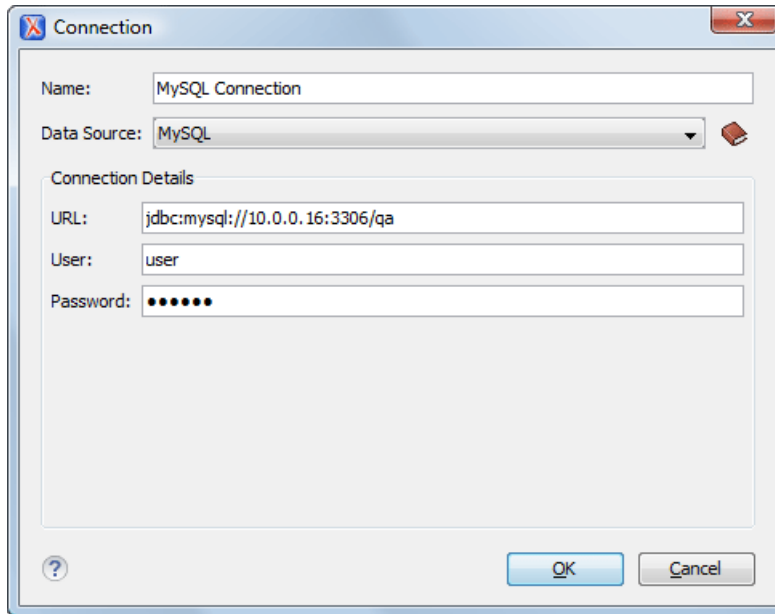


**Figure 469: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.
4. Select the *MySQL* data source in the **Data Source** drop-down list.
5. Enter the connection details.
  - a) Enter the URL of the MySQL server.
  - b) Enter the user name for the connection to the MySQL server.
  - c) Enter the password for the connection to the MySQL server.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### Generic JDBC Database Connections

Oxygen XML Developer includes support for Generic JDBC database connections.

#### Configuring a Generic JDBC Database Connection

To configure the support for a generic JDBC database, follow this procedure:

1. [Configure Generic JDBC Data Source drivers](#).
2. [Configure a Generic JDBC Connection](#).
3. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

#### *How to Configure Generic JDBC Data Source Drivers*

Starting with version 17, Oxygen XML Developer comes bundled with Java 8, which does not provide built-in access to JDBC-ODBC data sources. To access such sources, you need to find an alternative JDBC-ODBC bridge or use a platform-independent distribution of Oxygen XML Developer along with a Java VM version 7 or 6.

To configure a generic JDBC data source, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Data Sources** panel.
3. Enter a unique name for the data source.
4. Select *Generic JDBC* in the driver **Type** drop-down list.
5. Add the driver file(s) using the **Add Files** button.
6. Select the most appropriate **Driver class**.

7. Click the **OK** button to finish the data source configuration.
8. Continue on to [configure a generic JDBC connection](#).

#### *How to Configure a Generic JDBC Connection*

To configure a connection to a generic JDBC database, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select the *Generic JDBC* data source in the **Data Source** drop-down menu.
5. Enter the connection details.
  - a) Enter the URL of the generic JDBC database, with the following format: `jdbc: <subprotocol>: <subname>`.
  - b) Enter the user name for the connection to the generic JDBC database.
  - c) Enter the password for the connection to the generic JDBC database.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the **Data Source Explorer** view (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

#### **JDBC-ODBC Database Connections**

Oxygen XML Developer includes support for JDBC-ODBC database connections.

#### **How to Configure a JDBC-ODBC Connection**

Starting with version 17, Oxygen XML Developer comes bundled with Java 8, which does not provide built-in access to JDBC-ODBC data sources. To access such sources, you need to find an alternative JDBC-ODBC bridge or use a platform-independent distribution of Oxygen XML Developer along with a Java VM version 7 or 6.

To configure a connection to an ODBC data source, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.

The dialog box for configuring a database connection is displayed.

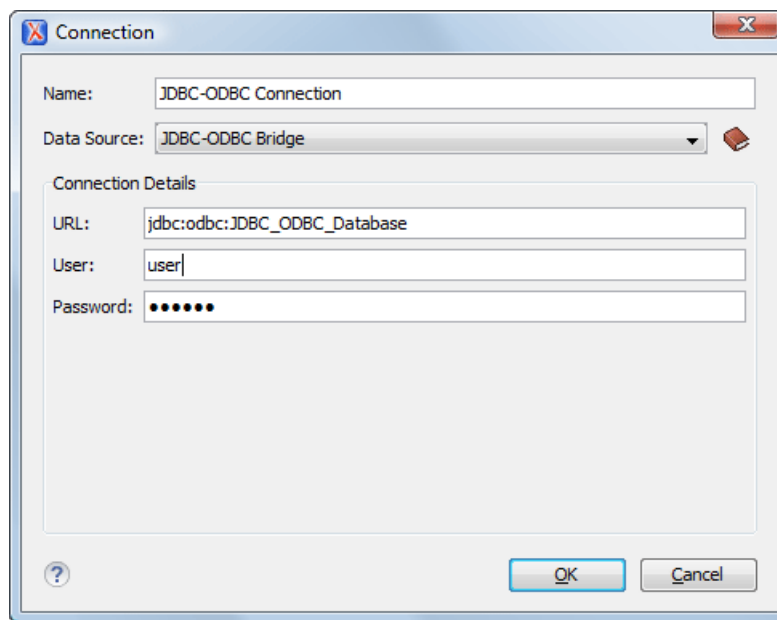


**Figure 470: Connection Configuration Dialog Box**

3. Enter a unique name for the connection.



4. Select *JDBC-ODBC Bridge* in the **Data Source** drop-down list.
5. Enter the connection details.
  - a) Enter the URL of the ODBC source.
  - b) Enter the user name of the ODBC source.
  - c) Enter the password of the ODBC source.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the **Data Source Explorer view** (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

## BaseX Database Connections

Oxygen XML Developer includes support for BaseX database connections using a WebDAV connection. BaseX is a light-weight XML database engine and XQuery processor. Oxygen XML Developer allows you to browse the structure of a BaseX database in the **Data Source Explorer view** and perform XQuery executions.

### How to Configure a BaseX Connection

To configure a BaseX connection, follow these steps:

1. First of all, make sure the BaseX HTTP Server is started. For details about starting the BaseX HTTP server, go to [http://docs.basex.org/wiki/Startup#BaseX\\_HTTP\\_Server](http://docs.basex.org/wiki/Startup#BaseX_HTTP_Server). The configuration file for the HTTP server is named `.basex` and is located in the BaseX installation directory. This file helps you to find out which port the HTTP server using. The default port for BaseX WebDAV is 8984.
2. To ensure that everything is functioning, open a WebDAV URL inside a browser and check to see if it works. For example, the following URL retrieves a document from a database named TEST: `http://localhost:8984/webdav/TEST/etc/factbook.xml`.
3. Once you are sure that the BaseX WebDAV service is working, you can configure the WebDAV connection in Oxygen XML Developer as described in [How to Configure a WebDAV Connection](#) on page 997. The WebDAV URL should resemble this: `http://{hostname}:{port}/webdav/`. If the BaseX server is running on your own machine and it has the default configuration, the data required by the WebDAV connection is:
  - WebDAV URL: `http://localhost:8984/webdav`
  - User: `admin`
  - Password: `admin`
4. Once the WebDAV connection is created, to view your connection, go to the **Data Source Explorer view** (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### BaseX Contextual Menu Actions

While browsing BaseX connections in the **Data Source Explorer view**, the various nodes include the following contextual menu actions:

#### Connection Level Nodes

##### **Configure Database Sources**

Opens the **Data Sources preferences page** where you can configure both data sources and connections.

##### **Disconnect**

Stops the connection.

##### **New Folder**

Creates a new folder on the connection.

##### **Import Files**

Allows you to add a new file on the connection, in the current folder.

##### **Refresh**

Performs a refresh on the selected node.

### **Find/Replace in Files**

Opens the **Find/Replace in Files** dialog box that allows you to find and replace text in multiple files from the connection.

### **Folder Level Nodes**

#### **New File**

Creates a new file on the connection, in the current folder.

#### **New Folder**

Creates a new folder on the connection.

#### **Import Folders**

Imports folders on the server.

#### **Import Files**

Allows you to add a new file on the connection, in the current folder.

#### **Export**

Allows you to export the folder on the remote connection to a local folder.



#### **Cut**

Removes the current selection and places it in the clipboard.



#### **Copy**

Copies the current selection into the clipboard.



#### **Paste**

Pastes the copied selection.

#### **Rename**

Renames the current resource



#### **Delete**

Deletes the current container.



#### **Refresh**

Performs a refresh on the selected node.



### **Find/Replace in Files**

Opens the **Find/Replace in Files** dialog box that allows you to find and replace text in multiple files from the connection.

### **Resource Level Nodes**

#### **Open**

Opens the selected resource in the editor.

#### **Open in System Application**

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.



#### **Cut**

Removes the current selection and places it in the clipboard.



#### **Copy**

Copies the current selection into the clipboard.

### Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

### Rename

Renames the current resource



### Delete

Deletes the current container.



### Refresh

Performs a refresh on the selected node.



### Properties

Shows various properties of the current container.



### Find/Replace in Files

Opens the [Find/Replace in Files](#) dialog box that allows you to find and replace text in multiple files from the connection.

### Compare

Compares two selected resources using the [Compare Files](#) tool.

## Base X XQJ Connection

XQuery execution is possible in a BaseX connection through an XQJ connection.

**Important:** The XQJ connector is only capable of running XQuery 1.0 scripts, therefore XQuery 3.0 and 3.1 scripts are not supported.

### BaseX XQJ Data Source

First of all, create an XQJ data source as described in [How to Configure an XQJ Data Source](#) on page 996. The BaseX XQJ API-specific files that must be added in the configuration dialog box are `xqj-api-1.0.jar`, `xqj2-0.1.0.jar` and `basex-xqj-1.2.3.jar` (the version names of the JAR file may differ). These libraries can be downloaded from [xqj.net/basex/basex-xqj-1.2.3.zip](http://xqj.net/basex/basex-xqj-1.2.3.zip). As an alternative, you can also find the libraries in the BaseX installation directory, in the **lib** sub-directory.

### BaseX XQJ Connection

The next step is to create an [XQJ connection](#).

For a default BaseX configuration, the following connection details apply (you can modify them when necessary):

- **Port:** 1984
- **serverName:** localhost
- **user:** admin
- **password:** admin

### XQuery Execution

Now that the XQJ connection is configured, open the XQuery file you want to execute in Oxygen XML Developer and create an [XQuery Transformation](#) on page 787. In the **Transformer** drop-down menu, select the name of the XQJ connection you created. Apply the transformation scenario and the XQuery will be executed.

#### *How to Configure an XQJ Data Source*

Any transformer that offers an XQJ API implementation can be used when validating XQuery or transforming XML documents. An example of an XQuery engine that implements the XQJ API is [Zorba](#).

1. If your XQJ Implementation is native, make sure the directory containing the native libraries of the engine is added to your system environment variables: to **PATH** - on Windows, to **LD\_LIBRARY\_PATH** - on Linux, or to **DYLD\_LIBRARY\_PATH** - on OS X. Restart Oxygen XML Developer after configuring the environment variables.
2. Open the [Preferences](#) dialog box (**Options > Preferences**) and go to **Data Sources**.

3. Click the **+ New** button in the **Data Sources** panel.
4. Enter a unique name for the data source.
5. Select **XQuery API for Java (XQJ)** in the **Type** combo box.
6. Press the **Add** button to add XQJ API-specific files.  
You can manage the driver files using the **Add**, **Remove**, **Detect**, and **Stop** buttons.  
Oxygen XML Developer detects any implementation of `javax.xml.xquery.XQDataSource` and presents it in **Driver class** field.
7. Select the most suited driver in the **Driver class** combo box.
8. Click the **OK** button to finish the data source configuration.
9. Continue on to [configure the XQJ connection](#).

#### *How to Configure an XQJ Connection*

The steps for configuring an XQJ connection are the following:

1. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the previously configured [XQJ data sources](#) in the **Data Source** combo box.
5. Fill-in the connection details.  
The properties presented in the connection details table are automatically detected depending on the selected data source.
6. Click the **OK** button to finish the connection configuration.

## WebDAV Connections

Oxygen XML Developer includes support for WebDAV server connections. Oxygen XML Developer allows you to browse the structure of a WebDAV connection in the [Data Source Explorer view](#) and perform various operations on the resources in the repository.

### How to Configure a WebDAV Connection

By default, Oxygen XML Developer contains built-in data source drivers for **WebDAV** connections. Based on this data source, you can create a WebDAV connection for browsing and editing data from a database that provides a WebDAV interface. The connection is available in the [Data Source Explorer view](#).

To configure a WebDAV connection, follow these steps:

1. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.
2. Click the **+ New** button in the **Connections** panel.
3. Enter a unique name for the connection.
4. Select one of the WebDAV data sources in the **Data Source** drop-down menu.
5. Enter the connection details:
  - a) Set the URL to the WebDAV repository in the field **WebDAV URL**.
  - b) Set the user name that is used to access the WebDAV repository in the **User** field.
  - c) Set the password that is used to access the WebDAV repository in the **Password** field.
6. Click the **OK** button to finish the connection configuration.
7. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

For more information about the WebDAV support in Oxygen XML Developer, watch our video demonstration:

<https://www.youtube.com/embed/vDX036CqbmM>

## WebDAV Contextual Menu Actions

While browsing WebDAV connections in the [Data Source Explorer view](#), the various nodes include the following contextual menu actions:

### Connection Level Nodes

#### **Configure Database Sources**

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

#### **Disconnect**

Stops the connection.

#### **New Folder**

Creates a new folder on the connection.

#### **Import Files**

Allows you to add a new file on the connection, in the current folder.

#### **Refresh**

Performs a refresh on the selected node.

#### **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

### Folder Level Nodes

#### **New File**

Creates a new file on the connection, in the current folder.

#### **New Folder**

Creates a new folder on the connection.

#### **Import Folders**

Imports folders on the server.

#### **Import Files**

Allows you to add a new file on the connection, in the current folder.

#### **Export**

Allows you to export the folder on the remote connection to a local folder.

#### **Cut**

Removes the current selection and places it in the clipboard.

#### **Copy**

Copies the current selection into the clipboard.

#### **Paste**

Pastes the copied selection.

#### **Rename**

Renames the current resource

#### **Delete**

Deletes the current container.

#### **Refresh**

Performs a refresh on the selected node.

#### **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

## Resource Level Nodes

### Open

Opens the selected resource in the editor.

### Open in System Application

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.



### Cut

Removes the current selection and places it in the clipboard.



### Copy

Copies the current selection into the clipboard.

### Copy location

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

### Rename

Renames the current resource



### Delete

Deletes the current container.



### Refresh

Performs a refresh on the selected node.



### Properties

Shows various properties of the current container.



### Find/Replace in Files

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

### Compare

Compares two selected resources using the [Compare Files tool](#).

## SQL Execution Support

The database support in Oxygen XML Developer includes support for writing SQL statements, syntax highlighting, [folding](#), and dragging and dropping from the [Data Source Explorer view](#). It also includes transformation scenarios for executing the statements, and the results are displayed in the [Table Explorer view](#).

### Drag and Drop from Data Source Explorer View

Dragging operations from the [Data Source Explorer view](#) and dropping them in the SQL Editor allows you to create SQL statements quickly by inserting the names of tables and columns in the SQL statements.

1. Configure a database connection (see the specific procedure for your database server in the [Database Connection Support](#) section).
2. Browse to the table you will use in your statement.
3. Drag the table or a column of the table into the editor where a SQL file is open.

Drag and drop actions are available both on the table and on its fields. A pop-up menu is displayed in the SQL editor.

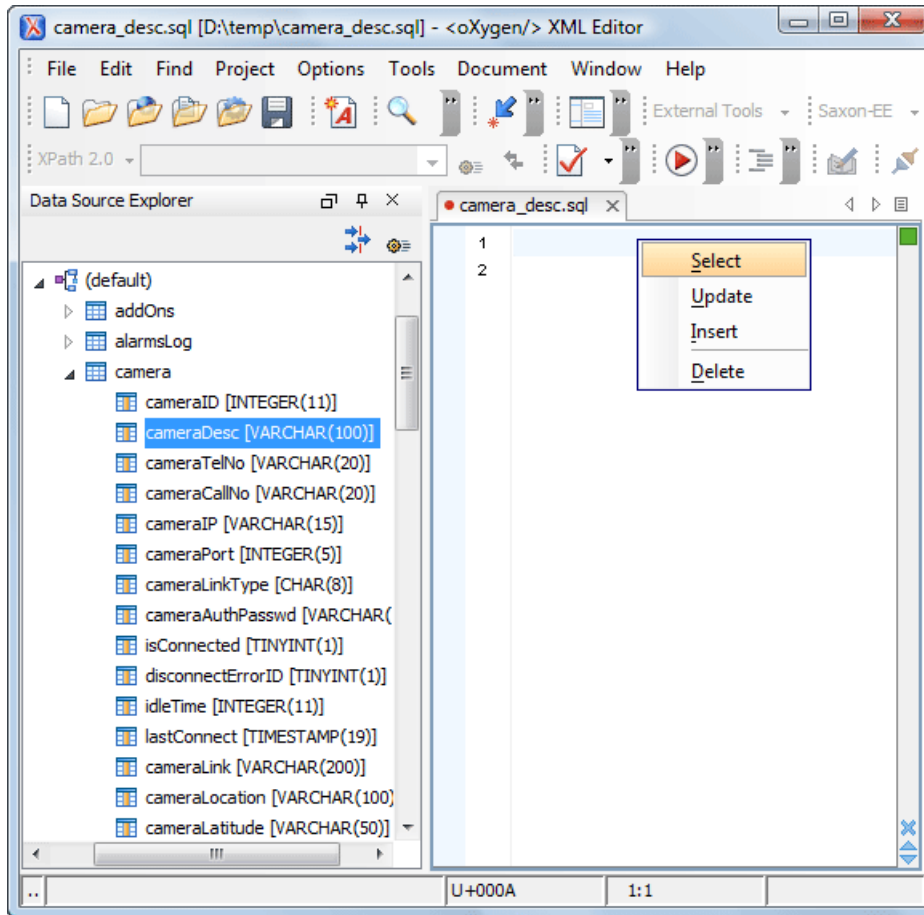


**Figure 471: SQL Statement Editing with Drag and Drop**

4. Select the type of statement from the pop-up menu.

Depending on your choice, dragging a table results in one of the following statements being inserted into the document:

- **SELECT** ``field1`,`field2`, ... FROM `catalog`.`table`` (for example: SELECT ``DEPT`,`DEPTNAME`,`LOCATION` FROM `camera`.`cameraDesc``)
- **UPDATE** ``catalog`.`table` SET `field1`=,`field2`=,...` (for example: UPDATE ``camera`.`cameraDesc` SET `DEPT`=, `DEPTNAME`=, `LOCATION`=`)
- **INSERT INTO** ``catalog`.`table` ( `field1`,`field2`, ...) VALUES ( , , )` (for example: INSERT INTO ``camera`.`cameraDesc` ( `DEPT`,`DEPTNAME`,`LOCATION`) VALUES ( , , )`)
- **DELETE FROM** ``catalog`.`table`` (for example: DELETE FROM ``camera`.`cameraDesc``)

Depending on your choice, dragging a column results in one of the following statements being inserted into the document:

- **SELECT** ``field` FROM `catalog`.`table`` (for example: SELECT ``DEPT` FROM `camera`.`cameraDesc``)
- **UPDATE** ``catalog`.`table` SET `field`=` (for example: UPDATE ``camera`.`cameraDesc` SET `DEPT`=`)
- **INSERT INTO** ``catalog`.`table` ( `field1`) VALUES ()` (for example: INSERT INTO ``camera`.`cameraDesc` ( `DEPT`) VALUES ()`)
- **DELETE FROM** ``catalog`.`table`` (for example: DELETE FROM ``camera`.`cameraDesc` WHERE `DEPT`=`)

## SQL Validation

SQL validation support is offered for IBM DB2. Note that if you choose a connection that does not support SQL validation, you will receive a warning when trying to validate. The SQL document is validated using the connection from the associated transformation scenario.

## Executing SQL Statements

The steps for executing an SQL statement on a relational database are as follows:

1. Configure a [transformation scenario](#) using the  **Configure Transformation Scenario(s)** action from the toolbar or the **Document > Transformation** menu.

A SQL transformation scenario needs a database connection. You can configure a connection using the  **Preferences** button from the SQL transformation dialog box.

The dialog box contains the list of existing scenarios that apply to SQL documents.

2. Set parameter values for SQL placeholders using the **Parameters** button from the SQL transformation dialog box.

For example, in `SELECT * FROM `test`.`department` where DEPT = ? or DEPTNAME = ?` the two parameters can be configured for the place holders (?) in the transformation scenario.

When the SQL statement is executed, the first placeholder is replaced with the value set for the first parameter in the scenario, the second placeholder is replaced by the second parameter value, and so on.

**Restriction:** When a stored procedure is called in an SQL statement executed on an SQL Server database, mixing inline parameter values with values specified using the **Parameters** button of the scenario dialog box is not recommended. This is due to a limitation of the SQL Server driver for Java applications. An example of stored procedure that is not recommended: `call dbo.Test(22, ?)`.

3. Execute the SQL scenario by clicking the **OK** or **Apply associated** button.

The result of a SQL transformation is [displayed in a view](#) at the bottom of the Oxygen XML Developer window.

4. View more complex return values of the SQL transformation in a separate editor panel.

A more complex value returned by the SQL query (for example, an *XMLTYPE* or *CLOB* value) cannot be displayed entirely in the result table.

- a) Right-click the cell containing the complex value.
- b) Select the action **Copy cell** from the contextual menu.  
The action copies the value in the clipboard.
- c) Paste the value into an appropriate editor.

For example, you can paste the value in an opened XQuery editor panel of Oxygen XML Developer.

## XQuery and Databases

XQuery is a native XML query language that is useful for querying XML views of relational data to create XML results. It also provides the mechanism to efficiently and easily extract information from Native XML Databases (NXD) and relational data. The following database systems supported in Oxygen XML Developer offer XQuery support:

- *Native XML Databases:*
  - Berkeley DB XML
  - eXist
  - MarkLogic (validation support available starting with version 5)
  - Documentum xDB (X-Hive/DB) 10
- *Relational Databases:*
  - IBM DB2
  - Microsoft SQL Server (validation support not available)
  - Oracle (validation support not available)

### Related Information:

[Editing XQuery Documents](#) on page 572



## Build Queries with Drag and Drop from the Data Source Explorer View

When a query is edited in the XQuery editor, the XPath expressions can be composed quickly by dragging them from the [Data Source Explorer view](#) and dropping them into the editor panel.

1. [Configure the data source drivers](#) for the particular relational database in the [Data Sources preferences page](#).
2. [Configure the connection](#) for the particular relational database in the [Data Sources preferences page](#).
3. Browse the connection in the [Data Source Explorer view](#), expanded to the table or column that you want to insert in the query.
4. Drag the table or column name to the XQuery editor panel.
5. Drop the table or column name where the XPath expression is needed.

An XPath expression that selects the dragged name is inserted in the XQuery document at the cursor position.

## XQuery Validation When Connected to a Database

With Oxygen XML Developer, you can validate your XQuery documents when connected to a database. When you open an XQuery document from a connection that supports validation (for example, MarkLogic, or eXist), by default Oxygen XML Developer uses this connection for validation. If you open an XQuery file using a MarkLogic connection, the validation resolves imports better.

### Related Information:

[XQuery Validation](#) on page 572

## XQuery Transformation for Databases

XQuery is designed to retrieve and interpret XML data from any source, whether it is a database or document. Data is stored in relational databases but it is often required that the data be extracted and transformed as XML when interfacing to other components and services. Also, it is an XPath-based querying language supported by most NXD vendors. To perform a query, you need an XQuery transformation scenario.

1. [Configure the data source drivers and the connection](#) for the particular database.
2. Configure an XQuery transformation scenario.
  - a) Click the  **Configure Transformation Scenario** toolbar button or go to menu **Document > Transformation > Configure Transformation Scenario**.  
The [Configure Transformation Scenario dialog box](#) is opened.
  - b) Click the **New** button toward the bottom of the dialog box.
  - c) Select [XML Transformation with XQUERY](#).

The **New Scenario** dialog box for configuring an XQuery scenario is opened.



**Figure 472: New Scenario Dialog Box**

- d) Insert the scenario name in the dialog box for editing the scenario.
- e) Choose the database connection in the **Transformer** drop-down list.
- f) Configure any other parameters as needed.

For an XQuery transformation, the output tab has an option called **Sequence** that allows you to run an XQuery in lazy mode. The amount of data extracted from the database is controlled from the [Size limit on Sequence view option](#) in the **XQuery** preferences page. If you choose **Perform FO Processing** in the **FO Processor** tab, the **Sequence** option is ignored.

- g) Click the **OK** button to finish editing the scenario.

Once the scenario is associated with the XQuery file, the query can include calls to specific XQuery functions that are implemented by that engine. The available functions depend on the target database engine selected in the scenario. For example, for eXist and Berkeley DB XML, the [Content Completion Assistant](#) lists the functions supported by that database engine. This is useful for only inserting calls to the supported functions (standard XQuery functions or extension ones) into the query .

**Note:** An XQuery transformation is executed against a Berkeley DB XML server as a transaction using the query transaction support of the server.

### 3. Run the transformation scenario.

To view a more complex value returned by the query that cannot be entirely displayed in the XQuery query result table at the bottom of the Oxygen XML Developer window (for example, an XMLTYPE or CLOB value), do the following:

- Right-click that table cell.
- Select the **Copy cell** action from the contextual menu to copy the value into the clipboard.
- Paste the value wherever you need it (for example, in an opened XQuery editor panel of Oxygen XML Developer).

#### Related Information:

[XML Transformation with XQuery](#) on page 758

This type of transformation specifies the transform parameters and location of an XQuery file that is applied to the edited XML document.

## XQuery XQJ Transformation

XQuery API for Java (XQJ) refers to the common Java API for the W3C XQuery 1.0 specification. The XQJ API enables you to execute XQuery against an XML data source.

**Important:** The XQJ connector is only capable of running XQuery 1.0 scripts, therefore XQuery 3.0 and 3.1 scripts are not supported.

Oxygen XML Developer supports any transformer that offers an XQJ API implementation and it be used for validating XQuery or transforming XML documents.

To configure the support for XQJ, do the following:

1. [Configure an XQJ Data Source](#).
2. [Configure an XQJ Connection](#).
3. To view your connection, go to the [Data Source Explorer view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu) or switch to the **Database perspective**.

### How to Configure an XQJ Data Source

Any transformer that offers an XQJ API implementation can be used when validating XQuery or transforming XML documents. An example of an XQuery engine that implements the XQJ API is [Zorba](#).

1. If your XQJ Implementation is native, make sure the directory containing the native libraries of the engine is added to your system environment variables: to **PATH** - on Windows, to **LD\_LIBRARY\_PATH** - on Linux, or to **DYLD\_LIBRARY\_PATH** - on OS X. Restart Oxygen XML Developer after configuring the environment variables.

2. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.

3. Click the **+ New** button in the **Data Sources** panel.

4. Enter a unique name for the data source.

5. Select **XQuery API for Java (XQJ)** in the **Type** combo box.

6. Press the **Add** button to add XQJ API-specific files.

You can manage the driver files using the **Add**, **Remove**, **Detect**, and **Stop** buttons.

Oxygen XML Developer detects any implementation of *javax.xml.xquery.XQDataSource* and presents it in **Driver class** field.

7. Select the most suited driver in the **Driver class** combo box.

8. Click the **OK** button to finish the data source configuration.

9. Continue on to [configure the XQJ connection](#).

### How to Configure an XQJ Connection

The steps for configuring an XQJ connection are the following:

1. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **Data Sources**.

2. Click the **+ New** button in the **Connections** panel.

3. Enter a unique name for the connection.

4. Select one of the previously configured [XQJ data sources](#) in the **Data Source** combo box.

5. Fill-in the connection details.

The properties presented in the connection details table are automatically detected depending on the selected data source.

6. Click the **OK** button to finish the connection configuration.

### XQuery Database Debugging

Oxygen XML Developer includes a debugging interface that helps you to detect and solve problems with XQuery transformations that are executed against MarkLogic and Berkeley DB XML databases.

For more information about the debugging support in Oxygen XML Developer, see [Debugging XSLT Stylesheets and XQuery Documents](#) on page 1022.

## Debugging with MarkLogic

Oxygen XML Developer includes support for debugging XQuery transformations that are executed against a MarkLogic database.

To use a debugging session against the MarkLogic engine, follow these steps:

1. Configure a [MarkLogic data source](#) and a [MarkLogic connection](#).
2. Make sure that the debugging support is enabled in the MarkLogic server that Oxygen XML Developer accesses. On the server side, debugging must be activated in the XDBC server and in the *Task Server* section of the server control console (the switch *debug allow*). If the debugging is not activated, the MarkLogic server reports a **DBG-TASKDEBUGALLOW** error.

**Note:** An XDBC application server must be running to connect to the MarkLogic server and this XDBC server will be used to process XQuery expressions against the server. You can change the XDBC application server that Oxygen XML Developer uses to process XQuery expressions by selecting the [Use it to execute queries](#) action from the contextual menu in the [Data Source Explorer](#) view.

3. Open the XQuery file and start the debugging process.
  - If you want to debug an XQuery file stored on the MarkLogic server, we recommend you to use the [Data Source Explorer](#) view and open the file from the application server that is involved in the debugging process. This improves the resolving of any imported modules.
  - The MarkLogic XQuery debugger integrates seamlessly into the [XQuery Debugger perspective](#). If you have a MarkLogic validation scenario configured for the XQuery file, you can choose to [debug the scenario](#) directly.
  - Otherwise, switch to the [XQuery Debugger perspective](#), open the XQuery file in the editor, and select the MarkLogic connection in the XQuery engine selector from the [debug control toolbar](#).

For general information about how a debugging session is started and controlled, see the [Working with the Debugger](#) section.

In a MarkLogic debugging session, you can use step actions and [breakpoints](#) to help identify problems. When you [add a breakpoint](#) on a line where the debugger never stops, Oxygen XML Developer displays a warning message. These warnings are displayed for [breakpoints](#) you add either in the main XQuery (which you can open locally or from the server) or for [breakpoints](#) you add in any XQuery that is opened from the connection that participates in the debugging session. For more information, see [Using Breakpoints for Debugging Queries that Import Modules with MarkLogic](#) on page 983.

## Remote Debugging with MarkLogic

Oxygen XML Developer allows you to debug remote applications that use XQuery (for example, web applications that trigger XQuery executions). Oxygen XML Developer connects to a MarkLogic server, shows you the running XQuery scripts and allows you to debug them. You can even pause the scripts so that you can start the debugging queries in the exact context of the application. You can also switch a server to debug mode to intercept all XQuery scripts.

Oxygen XML Developer also supports collaborative debugging. This feature allows multiple users to participate in the same debugging session. You can start a debugging session and at a certain point, another user can continue it.

**Important:** When using the remote debugging feature, the HTTP and the XDBC servers involved in the debugging session must have the same module configuration.

For more information about the XQuery debugger for MarkLogic, watch our video demonstration:

<https://www.youtube.com/embed/eQ4ThDZq1bk>

### Related Information:

[MarkLogic Development in Oxygen XML Developer](#) on page 981

[Configuring a MarkLogic Database Connection](#) on page 980

## Using Breakpoints for Debugging Queries that Import Modules with MarkLogic

When debugging queries that imports modules stored in the database, it is recommended to place *breakpoints* in the modules. When starting a new debugging session, make sure that the modules that you will debug are already opened in the editor. This is necessary so that the *breakpoints* in all the modules will be considered. Also, make sure that there are no other opened modules that are not involved in the current debugging session.

To place *breakpoints* in the modules, use the following procedure:

1. In the **Data Source Explorer** view, open all the modules from the  **Modules** container of the **XDBC** application server that performs the debugging.
2. Set *breakpoints* in the module as needed.
3. Continue debugging the query.

If you get a warning that the *breakpoints* failed to initialize, try the following solutions:

- Check the **Breakpoints** view and make sure there are no older *breakpoints* (set on resources that are not part of the current debugging context).
- Make sure you open the modules from the context of the application server that does the debugging and place *breakpoints* there.

### Related Information:

[MarkLogic Database Connections](#) on page 979

[MarkLogic Development in Oxygen XML Developer](#) on page 981

## Peculiarities and Limitations of the MarkLogic Debugger

MarkLogic debugger has the following peculiarities and limitations:

- Debugging support is only available for MarkLogic server versions 4.0 or newer.
- For MarkLogic server versions 4.0 or newer, there are three XQuery syntaxes that are supported: '0.9-ml' (inherited from MarkLogic 3.2), '1.0-ml', and '1.0'.
- All declared variables are presented as strings. The **Value** column of the **Variables** view contains the expression from the variable declaration. It can be evaluated by copying the expression with the **Copy value** action from the contextual menu of the **Variables** view and pasting it in the **XWatch** view.
- There is no support for **output to source mapping**.
- There is no support for **showing the trace**.
- You can only set *breakpoints* in imported modules in one of the following cases:
  - When you open the module from the context of the application server involved in the debugging, using the **Data Source Explorer** view.
  - When the debugger automatically opens the modules in the Editor.
- No *breakpoints* are set in modules from the same server that are not involved in the current debugging session.
- No support for **profiling** when an XQuery transformation is executed in the debugger.

### Debugging with Berkeley DB XML

The Berkeley DB XML database added a debugging interface starting with version 2.5. The current version is supported in the Oxygen XML Developer XQuery Debugger. [The same restrictions and peculiarities](#) apply for the Berkeley debugger as for the MarkLogic debugger.

## Integration with Microsoft SharePoint

Oxygen XML Developer provides support for browsing and managing SharePoint connections in the **Data Source Explorer** view. You can easily create new resources on the repository, copy and move them using contextual actions or the drag and drop support, or edit and transform the documents in the editor.

**Note:** You can access documents stored on SharePoint Online for Office 365 sites that use either **Cloud identity (default)** or **Federated identity (ADFS)** as the authentication method.

**Restriction:** The SharePoint connection is only available in the Enterprise edition of Oxygen XML Developer.

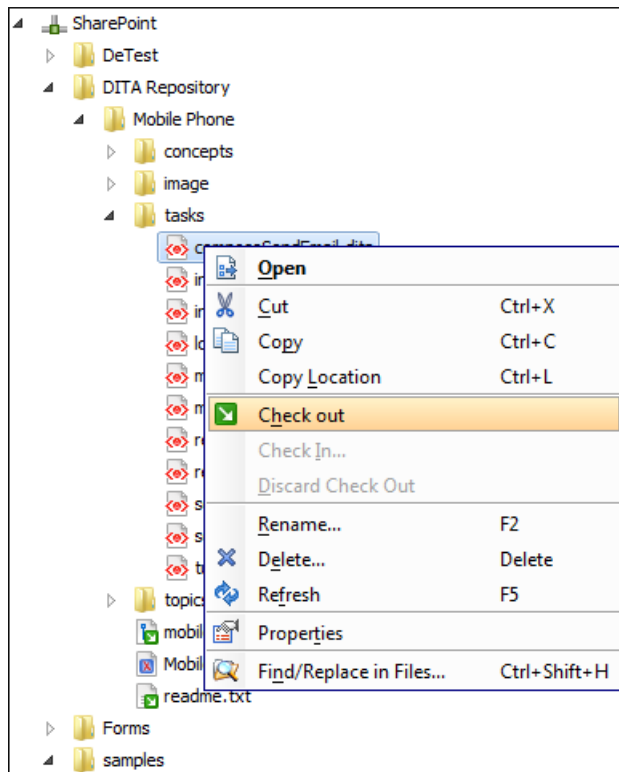


**Figure 473: SharePoint Connection**

#### Related Information:

[Working with Databases](#) on page 953

## How to Configure a SharePoint Connection

By default, Oxygen XML Developer contains built-in data source drivers for **SharePoint**. Use this data source to create a connection to a SharePoint server that will be available in the [Data Source Explorer view](#).

To configure a SharePoint connection, follow these steps:

1. Open the **Preferences** dialog box (**Options > Preferences**) and go to **Data Sources**.
2. In the **Connections** panel click the **+ New** button.
3. Enter a unique name for the connection.
4. Select **SharePoint** in the **Data Source** combo box.
5. Fill-in the connection details:
  - a) Set the URL to the SharePoint repository in the field **SharePoint URL**.
  - b) Set the server domain in the **Domain** field. If you are using a SharePoint 365 account, leave this field empty.
  - c) Set the user name to access the SharePoint repository in the **User** field.
  - d) Set the password to access the SharePoint repository in the **Password** field.
6. To view your connection, go to the [SharePoint Browser view](#) (if the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu).

For more information about connecting to repository located on a SharePoint server, watch our video demonstration:

<https://www.youtube.com/embed/1u2xBIQp1mQ>

## SharePoint Browser View

The **SharePoint Browser** view allows you to connect to a SharePoint repository and perform SharePoint-specific actions on the available resources. To display this view, go to **Window > Show View > SharePoint Browser**.

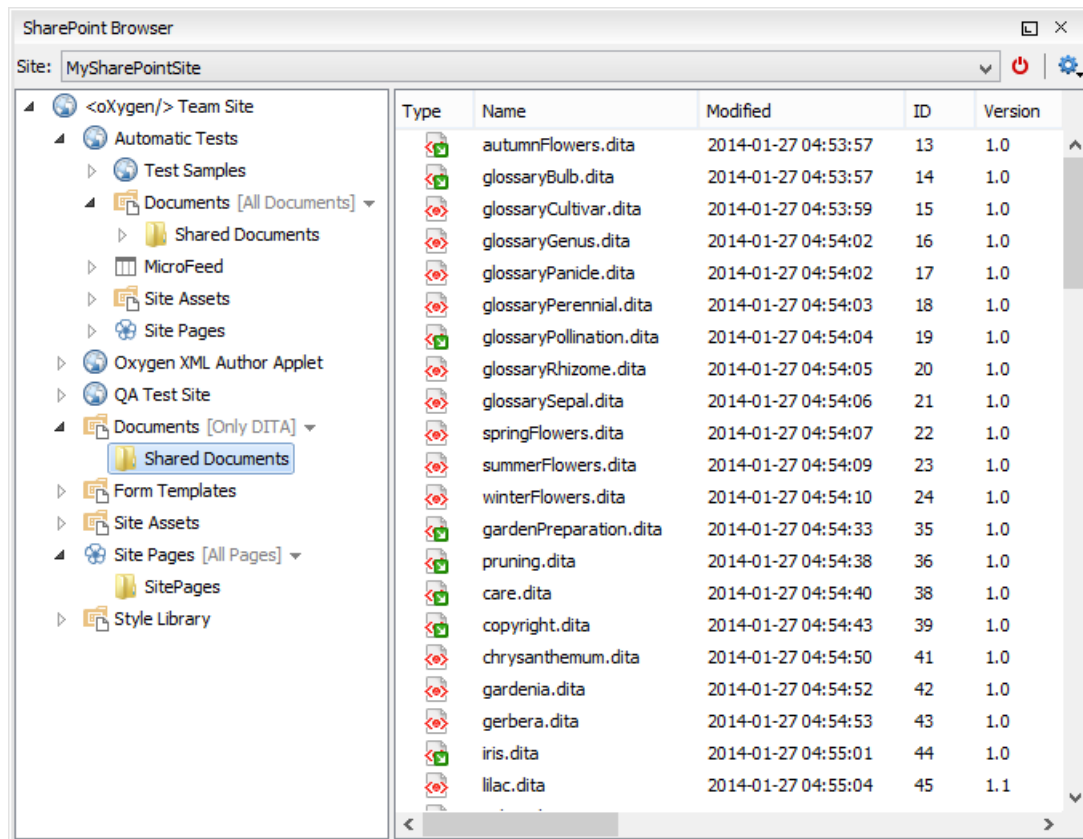


**Figure 474: SharePoint Browser View**

The view is split in several functional areas:

### Connection Area

The following controls are available:

- The **Site** combo box allows you to select and connect to an already [defined SharePoint connection](#).
- The **Disconnect** action terminates the current connection.
- The **Settings** drop-down menu contains actions that help you to quickly define a new connection or manage the existing ones from the **Data Source** options page: **New SharePoint Connection** and **Configure Database Sources**. Also, here you can choose one of the predefined view layouts.

### SharePoint Site Navigation Area

If there is no connection selected in the **Site** combo box, this area is left blank and promotes the actions that allow you to quickly add SharePoint connections. Otherwise, the navigation area presents the SharePoint site structure in a tree-like fashion with various node types (such as *sites*, *libraries*, and *folders*).

Depending on the type of node, a contextual menu offers customized actions that can be performed on that node. The contextual menu of a folder allows you to create new folders and documents, import folders and files, and to rename and delete the folder.

**Note:** The rename and delete actions are not available for library root folders (folders located at first level in a SharePoint library).

Each library node displays a drop-down menu next to its name where you can select what you want to display for the current library node. This functionality is also available on the contextual menu of the node.






**Figure 475: Drop-Down Menu to Select Which Items to Display**

### Folder Content Area

The content of a folder is displayed in a tabular form, where each row represents the properties of a folder or document. The list of columns and the way the documents and folders are organized depends on the currently selected view of the parent library.

**Table 63: Contextual Menu Actions for the Folder Area**

| Action                   | Description                                                                                                                                                    | Available for |           |
|--------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-----------|
|                          |                                                                                                                                                                | folders       | documents |
| <b>Open</b>              | Displays the content of the currently selected folder.<br>Opens the current document for editing.                                                              | ✓             | ✓         |
| <b>Rename</b>            | Renames the current node on server.                                                                                                                            | ✓             | ✓         |
| <b>Import</b>            | Import files or folders into the currently selected folder.                                                                                                    | ✓             | ✓         |
| <b>Delete</b>            | Deletes the current node from the server.                                                                                                                      | ✓             | ✓         |
| <b>Copy Location</b>     | Copies to clipboard the URL of the current node.                                                                                                               | ✓             | ✓         |
| <b>Check Out</b>         | Reserves the current document for your use so that other users cannot change it while you are editing it.                                                      |               | ✓         |
| <b>Check In</b>          | Commits on the server the changes you made to the document, so that other users can see them. It also makes the document available for editing to other users. |               | ✓         |
| <b>Discard Check Out</b> | Discards the previous checkout operation, making the file available for editing to other users.                                                                |               | ✓         |
| <b>Refresh</b>           | Queries the server to refresh the available properties of the current node.                                                                                    | ✓             | ✓         |
| <b>Drag and Drop</b>     | You can drag documents from the <b>SharePoint Browser</b> view and drop them in the main editor area to open them with ease.                                   |               | ✓         |

You can filter and sort the displayed items. To display the available filters of a column, click the filter widget located on the column header. You can apply multiple filters at the same time.

**Note:** A column can be filtered or sorted only if it was configured this way on the server side.

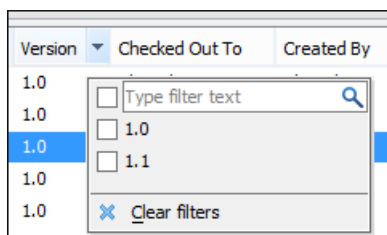


**Figure 476: Column Filter**



## Related Information:

[How to Configure a SharePoint Connection](#) on page 1007

## SharePoint Contextual Menu Actions

While browsing SharePoint connections in the [Data Source Explorer view](#), the various nodes include the following contextual menu actions:

### Connection Level Nodes

#### **Configure Database Sources**

Opens the [Data Sources preferences page](#) where you can configure both data sources and connections.

#### **Disconnect**

Stops the connection.

#### **New Folder**

Creates a new folder on the connection.

#### **Import Files**

Allows you to add a new file on the connection, in the current folder.

#### **Refresh**

Performs a refresh on the selected node.

#### **Find/Replace in Files**

Opens the [Find/Replace in Files dialog box](#) that allows you to find and replace text in multiple files from the connection.

### Folder Level Nodes

#### **New File**

Creates a new file on the connection, in the current folder.

#### **New Folder**

Creates a new folder on the connection.

#### **Import Folders**

Imports folders on the server.

#### **Import Files**

Allows you to add a new file on the connection, in the current folder.

#### **Export**

Allows you to export the folder on the remote connection to a local folder.

#### **Cut**

Removes the current selection and places it in the clipboard.

#### **Copy**

Copies the current selection into the clipboard.

#### **Paste**

Pastes the copied selection.

#### **Rename**

Renames the current resource

#### **Delete**

Deletes the current container.

#### **Refresh**

Performs a refresh on the selected node.

### **Find/Replace in Files**

Opens the **Find/Replace in Files** dialog box that allows you to find and replace text in multiple files from the connection.

### **Resource Level Nodes**

#### **Open**

Opens the selected resource in the editor.

#### **Open in System Application**

When you use this action, Oxygen XML Developer downloads the selected resource to a local temporary folder and opens the selected resource in the system application that is currently set as the default application associated with that type of resource. You can then edit the resource, save it, and when you switch the focus back to the **Data Source Explorer** view, Oxygen XML Developer will detect that there was a change and will ask if you want to upload the edited resource to the server.

### **Cut**

Removes the current selection and places it in the clipboard.

### **Copy**

Copies the current selection into the clipboard.

#### **Copy location**

Allows you to copy (to the clipboard) an application-specific URL for the resource that can then be used for various actions, such as opening or transforming the resources.

#### **Check Out**

Checks out the selected document on the server.

#### **Check In**

Checks in the selected document on the server. This action opens the **Check In** dialog box. In this dialog box, the following options are available:

- **Minor Version** - Increments the minor version of the file on the server.
- **Major Version** - Increments the major version of the file on the server.
- **Overwrite** - Overwrites the latest version of the file on the server.
- **Comment** - Allows you to comment on a file that you check in.

#### **Discard Check Out**

Discards the previous checkout operation, making the file available for editing to other users.

#### **Rename**

Renames the current resource

### **Delete**

Deletes the current container.

### **Refresh**

Performs a refresh on the selected node.

### **Properties**

Shows various properties of the current container.

### **Find/Replace in Files**

Opens the **Find/Replace in Files** dialog box that allows you to find and replace text in multiple files from the connection.

#### **Compare**

Compares two selected resources using the **Compare Files** tool.

## Importing Data

---

### Topics:

- [Import from Text Files](#)
- [Import from MS Excel Files](#)
- [Import Database Data as an XML Document](#)
- [Import from HTML Files](#)
- [Import Content Dynamically](#)

Computer systems and databases contain data in incompatible formats and exchanging data between these systems can be very time consuming. Converting the data to XML can greatly reduce the complexity and create data that can be read by various types of applications.

Oxygen XML Developer offers support for importing text files, MS Excel files, Database Data, and HTML files into XML documents. The XML documents can be further converted into other formats using the [Transform features](#).

### Import from Text Files

---

To import a text file into an XML file, follow these steps:

1. Go to **File > Import > Text File**.  
A **Select text file** dialog box is displayed.
2. Select the URL of the text file.
3. Select the encoding of the text file.
4. Click the **Next** button.  
The **Import Criteria** dialog box is displayed.

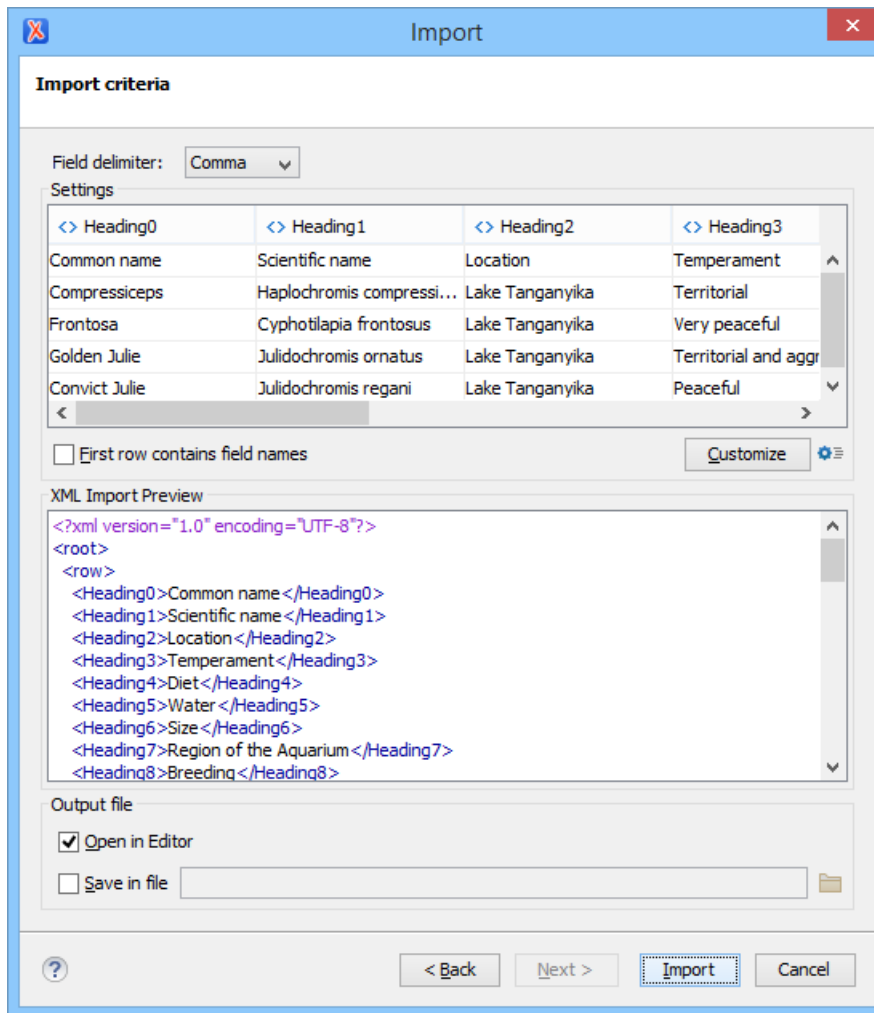


**Figure 477: Import Criteria Dialog Box**

5. Configure the settings for the conversion.
  - a) Select the **Field delimiter** for the import settings. You can choose between the following: Comma, Semicolon, Tab, Space, or Pipe.
  - b) The **Import settings** section presents the input data in a tabular form. By default, all data items are converted to element content (<> symbol), but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (x symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.
  - c) **First row contains field names** - If this option is selected, the default column headers are replaced (where such information is available) by the content of the first row. In other words, the first row is interpreted as containing the field names. The changes are also visible in the preview panel.
  - d) **Customize** - This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.
  - e) **Import Settings** - Clicking this button opens the [Import preferences page](#) that allows you to configure more import options.
  - f) The **XML Import Preview** panel contains an example of what the generated XML document looks like.
  - g) **Open in editor** - If selected, the new XML document created from the imported text file is opened in the editor.
  - h) **Save in file** - If selected, the new XML document is saved in the specified path.

6. Click **Import** to generate the XML document.

## Import from MS Excel Files

---

Oxygen XML Developer provides several methods for importing MS Excel files into an XML file. You can copy data from Excel and paste it into inserted cells in **Grid** mode. If you want to import an entire Excel file, Oxygen XML Developer also offers a configurable import wizard that works with any type of XML document.

### Grid Mode Method

The **Grid** mode in Oxygen XML Developer displays all content in an XML document as a structured grid of nested tables and you can work with the cells in those tables much like you would with any spreadsheet application. When importing Excel data into **Grid** mode, you first need to insert new cells in the particular nested table and then you can paste data from Excel the same as you would in any table or spreadsheet.

1. Copy the particular cells from your Excel spreadsheet that you want to import into an XML file.
2. Switch to **Grid** mode in Oxygen XML Developer.
3. Expand the particular nodes and locate the nested table where you want to insert the copied cells.
4. Right-click a particular row or column where you want to insert the data and select  **Insert row** or  **Insert column**, depending on the structure of the copied cells.
5. Paste the copied cells from the clipboard into the newly inserted cells in **Grid** mode.
6. You may need to make some manual adjustments. For example, if the selection of copied cells contained an empty cell, Oxygen XML Developer might ignore that cell.

### Import Wizard Method

By default, this method supports importing Excel 97/2000/XP/2003 formats out-of-the-box. To import spreadsheet data from Excel 2007 or newer, additional libraries are needed before using this procedure. See [Import Data from MS Excel 2007 or Newer](#) on page 1016 for instructions on adding more libraries.

To use the **Import** wizard to import an Excel file into an XML file, follow these steps:

1. Go to **File > Import > MS Excel file**.
2. Select the URL of the Excel file.  
The sheets of the document you are importing are presented in the **Available Sheets** section of this dialog box.
3. Click the **Next** button to proceed to the next stage of the wizard.

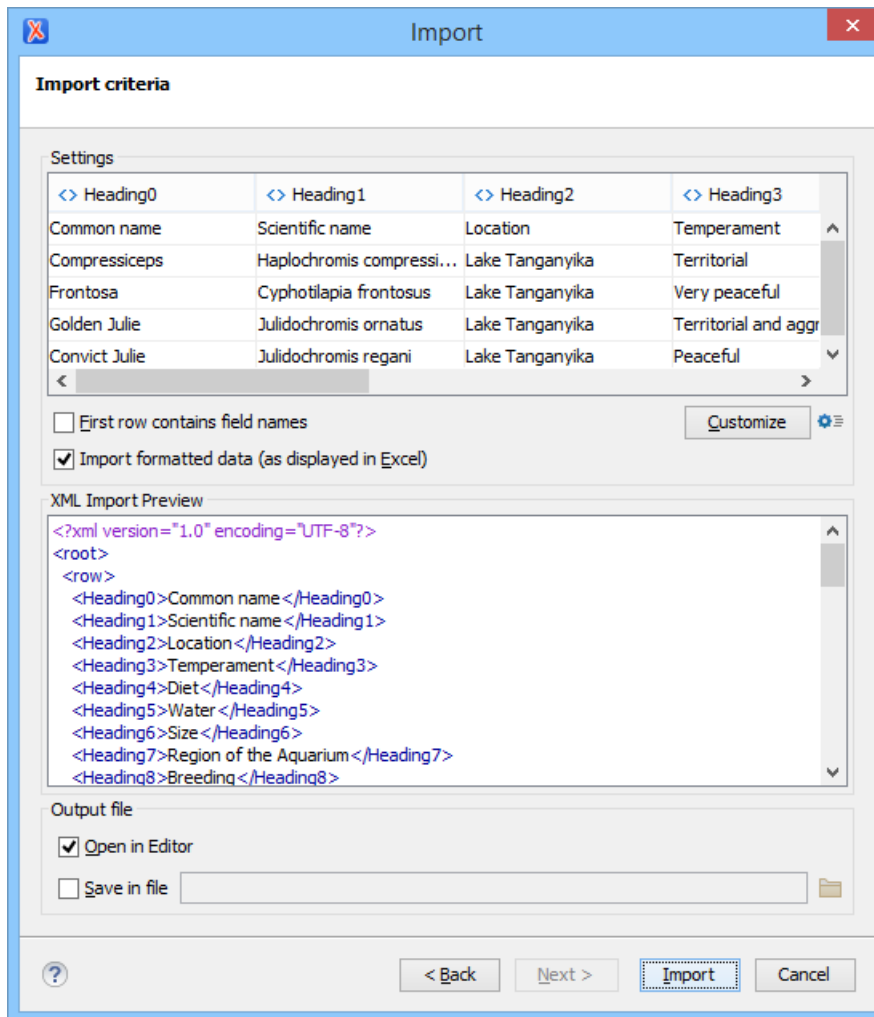


**Figure 478: Import Wizard**

- Configure the settings for the conversion. This stage of the wizard offers the following options:

#### **Import settings section**

Presents the input data in a tabular form. By default, all data items are converted to element content (<> symbol), but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (x symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.

#### **First row contains field names**

If this option is selected, the default column headers are replaced (where such information is available) by the content of the first row. In other words, the first row is interpreted as containing the field names. The changes are also visible in the preview panel.

#### **Customize**

This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.

#### **Import Settings**

Clicking this button opens the [Import preferences page](#) that allows you to configure more import options.

### Import formatted data (as displayed in Excel)

If this option is selected, the imported data retains the Excel data formatting (such as the representation of numeric values or dates). If deselected, the data formatting is not imported.

### XML Import Preview panel

Contains an example of what the generated XML document will look like.

### Open in editor

If selected, the new XML document created from the imported file is opened in the editor.

### Save in file

If selected, the new XML document is saved in the specified path.

5. Click **Import** to generate the XML document.

For more information about exchanging data between Oxygen XML Developer and spreadsheet applications, watch our video demonstration:

<https://www.youtube.com/embed/8VwsF58zLkU>

### Related Information:

[Exporting XML Content to Excel](#) on page 401

## Import Data from MS Excel 2007 or Newer

To import spreadsheet data from Excel 2007 or newer (.xlsx), Oxygen XML Developer needs additional libraries from the release 3.10 of the Apache POI project.

To add this support, follow this procedure:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml> in the **Show add-ons from** field or select it from the drop-down menu.
3. Select **Excel XLSX libraries** plugin and click **Next**.
4. Restart the application.

**Result:** You can now use the [Import wizard](#) to import data from Excel 2007 or newer.

### Alternate Method to Manually Add the Libraries

To manually add the libraries, follow these steps:

1. Download version 3.10 of the Apache POI project from <http://archive.apache.org/dist/poi/release/bin/>. The specific ZIP file that you need is: poi-bin-3.10-FINAL-20140208.zip.
2. Unpack poi-bin-3.10-FINAL-20140208.zip.
3. Copy the following .jar files in the lib directory of the installation folder of Oxygen XML Developer :
  - dom4j-1.6.1.jar
  - poi-ooxml-3.10-FINAL-20140208.jar
  - poi-ooxml-schemas-3.10-FINAL-20140208.jar
  - xmlbeans-2.3.0.jar

**Result:** You can now use the [Import wizard](#) to import data from Excel 2007 or newer.

### Related Information:

[Exporting XML Content to Excel](#) on page 401

## Import Database Data as an XML Document

---

To import the data from a relational database table as an XML document, follow these steps:

1. Go to **File > Import > Database Data** to start the **Import** wizard.

This opens a **Select database table** dialog box that lists all the defined database connections:

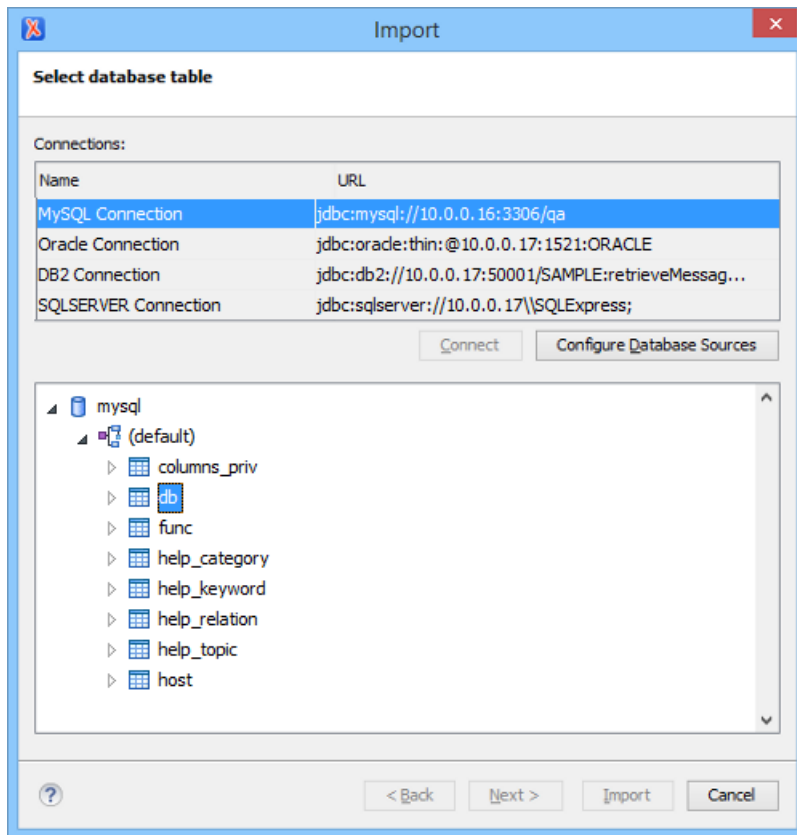


**Figure 479: Select Database Table Dialog Box**

2. Select the connection to the database that contains the appropriate data.  
Only connections configured in relational data sources can be used to import data.
3. If you want to edit, delete, or add a data source or connection, click the **Configure Database Sources** button.  
The **Preferences/Data Sources** option page is opened.
4. Click **Connect**.
5. In the list of sources, expand a schema and choose the required table.
6. Click the **Next** button.

The **Import Criteria** dialog box is opened with a default query string in the **SQL Query** pane.



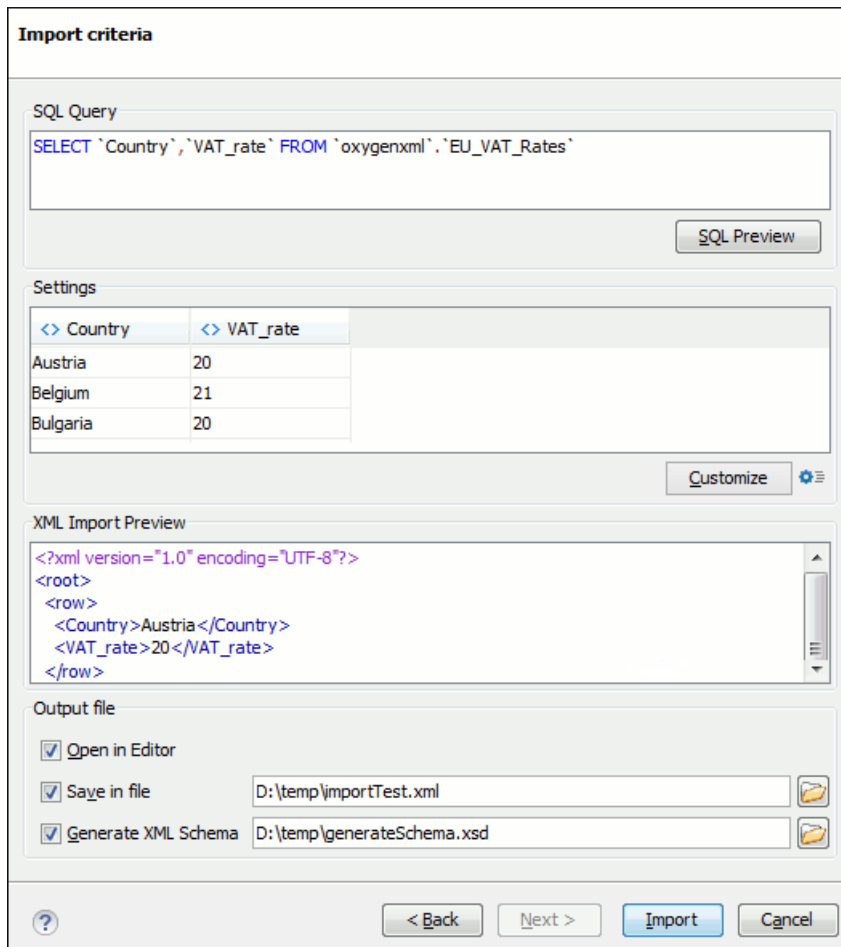


**Figure 480: Import from Database Criteria Dialog Box**

7. Configure the settings for the conversion.
  - a) **SQL Preview** - If this button is pressed, the **Settings** pane displays the labels that are used in the XML document and the first five lines from the database. By default, all data items are converted to element content (<> symbol), but this can be overridden by clicking the individual column headers. Clicking a column header once causes the data from this column to be converted to attribute values (= symbol). Clicking a second time causes the column data to be ignored (x symbol) when generating the XML file. You can cycle through these three options by continuing to click the column header.
  - b) **Customize** - This button opens a **Presentation Names** dialog box that allows you to edit the name, XML name, and conversion criterion for the root and row elements. The XML names can be edited by double-clicking the desired item and entering the label. The conversion criteria can also be modified by selecting one of the following option in the drop-down menu: ELEMENT, ATTRIBUTE, or SKIPPED.
  - c) **Import Settings** - Clicking this button opens the [Import preferences page](#) that allows you to configure more import options.
  - d) The **XML Import Preview** panel contains an example of what the generated XML document looks like.
  - e) **Open in editor** - If selected, the new XML document created from the imported file is opened in the editor.
  - f) **Save in file** - If selected, the new XML document is saved in the specified path.
  - g) **Generate XML Schema** - Allows you to specify the path of the generated XML Schema file.
8. Click **Import** to generate the XML document.

## Import from HTML Files

Oxygen XML Developer offers support for importing HTML files into an XML document.

## Import Wizard Method

To use the **Import** wizard to import from HTML files, follow these steps:

1. Go to **File > Import > HTML File**. The **Import HTML** wizard is displayed.
2. Enter the URL of the HTML document.
3. Select the type of the resulting XHTML document:
  - XHTML5
  - XHTML 1.0 Transitional
  - XHTML 1.0 Strict
4. Click the **OK** button.

**Result:** The resulting document is an XHTML file containing a DOCTYPE declaration that references the XHTML DTD definition on the Web. The parsed content of the imported file is transformed to XHTML5, XHTML Transitional, or XHTML Strict depending on the option you chose.

## Import Content Dynamically

Along with the built-in support for various useful URL protocols (such as HTTP or FTP), Oxygen XML Developer also provides special support for a *convert* protocol that can be used to chain predefined processors to dynamically import content from various sources.

A *dynamic conversion URL* chains various processors that can be applied, in sequence, on a target resource and has the following general syntax:

```
convert:/processor=xslt;ss=urn:processors:excel2d.xsl/processor=excel!/urn:files:my.xls
```

The previous example first applies a processor (excel) on a target identified by the identifier (urn:files:sample.xls) and converts the Excel™ resource to XML. The second applied processor (xslt) applies an XSLT stylesheet identified using the identifier (urn:processors:excel2d.xsl) over the resulting content from the first applied processor. These identifiers are all mapped to real resources on disk via an *XML catalog* that is configured in the application, as in the following example:

```
<catalog xmlns="urn:oasis:names:tc:entity:xmlns:xml:catalog">
 <rewriteURI uriStartString="urn:files:" rewritePrefix="./resources/" />
 <rewriteURI uriStartString="urn:processors:" rewritePrefix="./processors/" />
</catalog>
```

The target resource part of the conversion URL must always follow the `! /` pattern. It can be any of the following:

- An absolute URL that points to a resource.
- An identifier that will be resolved to an actual resource via the *XML Catalog* support in the application. In the example above, the `urn:files:sample.xls` target resource is resolved via the *XML catalog*.
- A relative location. This location can only be resolved to an actual resource URL when the application has enough information about the location where the URL is referenced.

For example, for a *DITA map* with a `topicref` such as:

```
<topicref href="convert:/.../processor=excel!/resources/sample.xls" />
```

the `resources/sample.xls` path will be resolved relative to the *DITA map* location.

This type of URL can be opened in the application by using the **Open URL** action from the **File** menu. It can also be referenced from existing XML resources via `xi:include` or as a topic reference from a *DITA map*.

A *GitHub* project that contains various dynamic conversion samples for producing DITA content from various sources (and then publishing it) can be found here: <https://github.com/oxygenxml/dita-glass>.

## Conversion Processors

A set of predefined conversion processors is provided in Oxygen XML Developer. Each processor has its own parameters that can be set to control the behavior of the conversion process. All parameters that are resolved to resources are passed through the *XML catalog* mapping.

The following predefined conversion processors are included:

- **xslt Processor** - Converts an XML input using the Saxon EE XSLT processor. The `ss` parameter indicates the stylesheet resource to be loaded. All other specified parameters will be set as parameters to the XSLT transformation.

```
convert:/processor=xslt;ss=urn:processors:convert.xslt;p1=v1!/urn:files:sample.xml
```

- **xquery Processor** - Converts an XML input using the Saxon EE XQuery processor. The `ss` parameter indicates the XQuery script to be loaded. All other specified parameters will be set as parameters to the XSLT transformation.

```
convert:/processor=xquery;ss=urn:processors:convert.xquery;p1=v1!/urn:files:sample.xml
```

- **excel Processor** - Converts an Excel™ input to an XML format that can later be converted by other piped processors. It has a single parameter `sn`, which indicates the name of the sheet that needs to be converted. If this parameter is missing, the XML will contain the combined content of all sheets included in the Excel™ document.

```
convert:/processor=excel;sn=test!/urn:files:sample.xls
```

- **java Processor** - Converts an input to another format by applying a specific Java method. The `jars` parameter is a comma-separated list of [JAR](#) libraries, or folders that libraries will be loaded from. The `ccn` parameter is the fully qualified name of the conversion class that will be instantiated. The conversion class needs to have a method with the following signature:

```
public void convert(String systemID, String originalSourceSystemID,
 InputStream is, OutputStream os, LinkedHashMap<String, String> properties)
 throws IOException
```

```
convert:/processor=java;jars=libs;ccn=test.JavaToXML!/
urn:files:java/WSEditorBase.java
```

- **js Processor** - Converts an input to another format by applying a JavaScript method. The `js` parameter indicates the script that will be used. The `fn` parameter is the name of the method that will be called from the script. The method must take a string as an argument and return a string. If any of the parameters are missing, an error is thrown and the conversion stops.

```
convert:/processor=js;js=urn:processors:md.js;fn=convertExternal!/urn:files:sample.md
```

- **json Processor** - Converts a JSON input to XML. It has no parameters.

```
convert:/processor=json!/urn:files:personal.json
```

- **xhtml Processor** - Converts HTML content to well-formed XHTML. It has no parameters.

```
convert:/processor=xhtml!/urn:files:test.html
```

- **wrap Processor** - Wraps content in a tag name making it well-formed XML. The `rn` parameter indicates the name of the root tag to use. By default, it is `wrapper`. The encoding parameter specifies the encoding that should be used to read the content. By default, it is UTF8. As an example, this processor can be used if you want to process a comma-separated values file with an XSLT stylesheet to produce XML content. The CSV file is first wrapped as well-formed XML, which is then processed with an `xslt` processor.

```
convert:/processor=wrap!/urn:files:test.csv
```

- **cache Processor** - Caches the converted content obtained from the original document to a temporary file. The cache will be used on subsequent uses of the same URL, thus increasing the speed for the application returning the converted content. If the original URL points to the local disk, the cache will be automatically invalidated when the original file content gets modified. Otherwise, if the original URL points to a remote resource, the cache will need to be invalidated by reloading (**File >  Reload (F5)**) the URL content that is opened in the editor.

```
convert:/processor=cache/processor=xslt;...!/urn:files:test.csv
```

## Reverse Conversion Processors

All processors defined above can also be used for saving content back to the target resource if they are defined in the URL as reverse processors. Reverse processors are evaluated right to left. These reverse processors allow *round-tripping* content to and from the target resource.

As an example, the following URL converts HTML to DITA when the URL is opened using the `h2d.xsl` stylesheet and converts DITA to HTML when the content is saved in the application using the `d2h.xsl` stylesheet.

```
convert:/processor=xslt;ss=h2d.xsl/rprocessor=xslt;ss=d2h.xsl!/urn:files:sample.html
```

**Important:** If you are publishing a *DITA map* that has such conversion URL references inside, you need to edit the transformation scenario and set the value of the parameter `fix.external.refs.com.oxygenxml` to **true**. This will instruct Oxygen XML Developer to resolve such references during a special pre-processing stage. Depending on the conversion, you may also require additional libraries to be added using the **Libaries** button in the **Advanced** tab of the transformation scenario.

### Related Information:

## Topics:

- [Debugger Layout](#)
- [Steps in a Typical Debugging Process](#)
- [Identify the XSLT / XQuery Expression that Generated Particular Output](#)
- [Using Breakpoints](#)
- [Performance Profiling of XSLT Stylesheets and XQuery Documents](#)
- [Debugging XSLT that Call Java Extensions](#)
- [Supported Processors for XSLT / XQuery Debugging](#)

Oxygen XML Developer includes a powerful debugging interface that helps you to detect and solve problems with XSLT and XQuery transformations.

## XSLT Debugger Perspective

The **XSLT Debugger** *perspective* allows you to detect problems in an XSLT transformation by executing the process step by step. To switch the focus to this *perspective*, select the  **XSLT Debugger** button in the top-right corner of the interface or **Window > Open perspective > XSLT Debugger**.

## XQuery Debugger Perspective

The **XQuery Debugger** *perspective* allows you to detect problems in an XQuery transformation process by executing the process step by step in a controlled environment and inspecting the information provided in the special views. To switch the focus to this *perspective*, select the  **XQuery Debugger** button in the top-right corner of the interface or **Window > Open perspective > XQuery Debugger**.

## XSLT/XQuery Debugging Overview

The **XSLT Debugger** and **XQuery Debugger** *perspectives* allows you to test and debug XSLT 1.0 / 2.0 / 3.0 stylesheets and XQuery 1.0 / 3.0 documents including complex XPath 2.0 / 3.0 expressions. The interface presents simultaneous views of the source XML document, the XSLT/XQuery document and the result document. As you go step by step through the XSLT/XQuery document the corresponding output is generated step by step, and the corresponding position in the XML file is highlighted. At the same time, special views provide various types of debugging information and events useful to understand the transformation process.

The following set of features allow you to test and solve XSLT/XQuery problems:

- Support for XSLT 1.0 stylesheets (using Saxon 6.5.5 and Xalan XSLT engines), XSLT 2.0 / 3.0 stylesheets and XPath 2.0 / 3.0 expressions that are included in the stylesheets (using Saxon 9.8.0.8 XSLT engine) and XQuery 1.0 / 3.0 (using Saxon 9.8.0.8 XQuery engine).
- Stepping capabilities: step in, step over, step out, run, run to cursor, run to end, pause, stop.
- Output to source mapping between every line of output and the instruction element / source context that generated it.
- [Breakpoints](#) on both source and XSLT/XQuery documents.
- Call stack on both source and XSLT/XQuery documents.
- Trace history on both source and XSLT/XQuery documents.
- Support for XPath expression evaluation during debugging.
- Step into imported/included stylesheets as well as included source entities.
- Available templates and hits count.

- Variables view.
- Dynamic output generation.

For even more information, watch our video demonstration:

<https://www.youtube.com/embed/m9d8c4V-LJw>

## Debugger Layout

The XML and XSL files are displayed in **Text mode**. The **Grid mode** is available only in the *Editor perspective*.

The **XSLT/XQuery Debugger perspective** contains the following components:

- **Source Document View (XML)** - Displays and allows the editing of XML files (documents).
- **XSLT/XQuery Document View (XSLT/XQuery)** - Displays and allows the editing of XSL files (stylesheets) or XQuery documents.
- **Output View** - Displays the output that results from inputting a document (XML) and a stylesheet (XSL) or XQuery document in the transformer. The transformation result is written dynamically while the transformation is processed (using the [Run button on the Control toolbar](#)). Several actions are available in the contextual menu for this view, including **Find/Replace**, **Copy**, and **Format and Indent**. There are two types of output views: a **Text** view (with XML syntax highlights) and **XHTML** view. For large outputs, the XHTML view can be disabled (see [Debugger Settings](#)).
- **Control Toolbar** - Contains a variety of actions to help you configure and control the debugging process.
- **Information Views** - The information views at the bottom of the editor display various types of information to help you understand the transformation process.

**Tip:** The **Output** view and the various other information views are **dockable** so that you can configure the workspace according to your preferences.

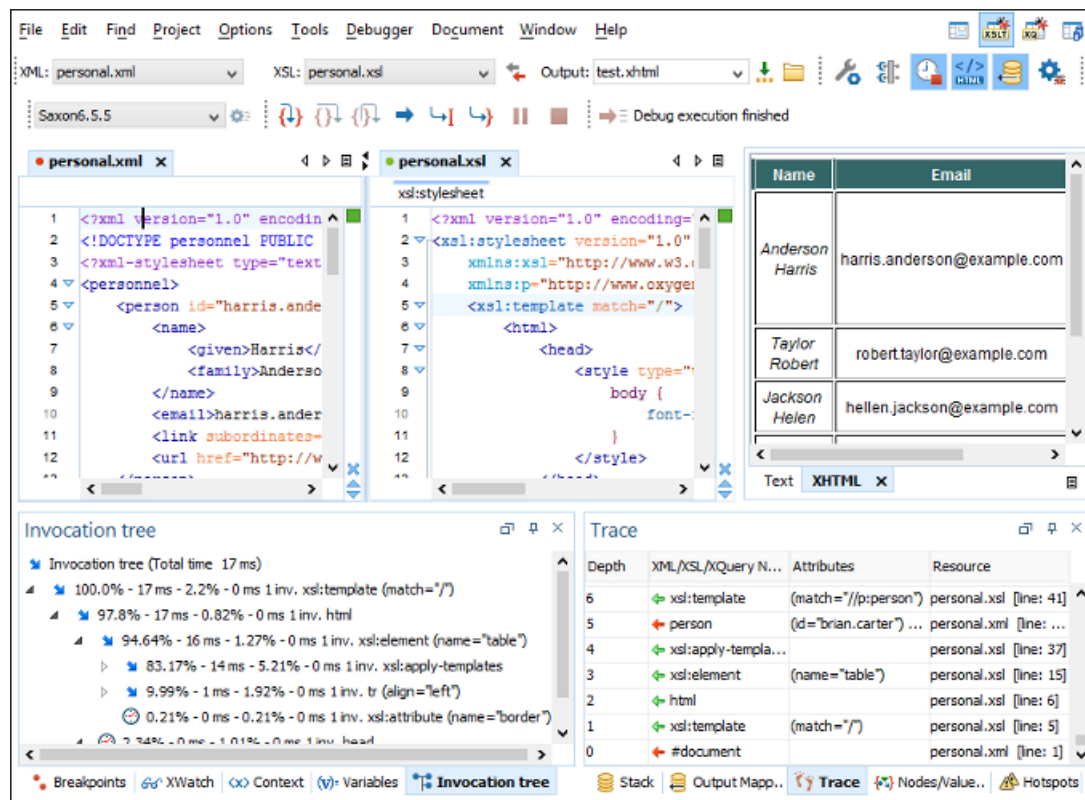


**Figure 481: Debugger Interface**

XML documents and XSL stylesheets or XQuery documents that were opened in the *Editor perspective* are automatically sorted into the first two panes. When multiple files of each type are opened, the individual

documents and stylesheets are separated using the familiar tab management system that you are used to in the **Editor perspective**. Selecting a tab brings the document or stylesheet into focus and enables editing without the need to go back to the **Editor perspective**.

In Debugger mode, the normal editor toolbar is not available. However, functions are still accessible from the **Document** menu and the contextual menus.

[Bookmarks](#) are replaced in the **Debugger perspective** by [breakpoints](#).

During debugging, the current execution node is highlighted in both document (XML) and XSLT/XQuery views.

#### Related Information:

[Steps in a Typical Debugging Process](#) on page 1036

[Identify the XSLT / XQuery Expression that Generated Particular Output](#) on page 1036

[Supported Processors for XSLT / XQuery Debugging](#) on page 1043

[Performance Profiling of XSLT Stylesheets and XQuery Documents](#) on page 1039

## Control Toolbar

The **Control** toolbar contains all the actions that you need to configure and control the debugging process. The following actions are described as they appear in the toolbar from left to right.



**Figure 482: Control Toolbar**

### XML source selector

The current selection represents the source document used as input by the transformation engine. The selection list contains all opened files (XML files being emphasized). This option allows you to use other file types also as source documents. In an XQuery debugging session this selection field can be set to the default value NONE, because usually XQuery documents do not require an input source.

### XSL / XQuery selector

The current selection represents the stylesheet or XQuery document to be used by the transformation engine. The selection list contains all opened files (XSLT / XQuery files being emphasized).

#### Link with editor

When selected, the XML and XSLT/XQuery selectors display the names of the files opened in the central editor panels. This button is toggled off by default.

### Output selector

The selection represents the output file specified in the associated transformation scenario. You can specify the path by using the text field, the  [Insert Editor Variables](#) button, or the  **Browse** button.

#### Configure parameters

Opens a dialog box that allows you to configure the XSLT / XQuery parameters to be used by the transformation.

#### Edit extensions

Allows you to add and remove the Java classes and [JARS](#) used as XSLT extensions.

#### Turn on/off profiling

Enables / Disables current transformation profiling.

#### Enable XHTML output

Enables the rendering of the output in the [XHTML output view](#) during the transformation process. For performance issues, disable XHTML output when working with very large files. Note that only XHTML conformant documents can be rendered by this view. To view the output result of other formats, such as HTML, save the **Text output** area to a file and use an external browser for viewing.



When starting a debug session from the **Editor perspective** by using the **Debug Scenario** action, the state of this toolbar button reflects the state of the **Show as XHTML** output option from the scenario.

### Turn on/off output to source mapping

Enables or disables the output to source mapping between every line of output and the instruction element / source context that generated it.

### Debugger preferences

Quick link to [Debugger preferences page](#).

### XSLT / XQuery engine selector

Lists the [processors available for debugging XSLT and XQuery transformations](#).

### XSLT / XQuery engine advanced options

Advanced options available for Saxon 9.8.0.8.

### Step into

Starts the debugging process and runs until the next instruction is encountered.

### Step over

Run until the current instruction and its sub-instructions are over. Usually this will advance to the next sibling instruction.



Figure 483: Step over

### Step out

Run until the parent of the current instruction is over. Usually this will advance to the next sibling of the parent instruction.



Figure 484: Step out

### Run Shift + F5

Starts the debugging process. The execution of the process is paused when a [breakpoint](#) is encountered or the transformation ends.

### Run to cursor

Starts the debugging process and runs until one of the following conditions occur: the line of cursor is reached, a valid [breakpoint](#) is reached or the execution ends.



### **Run to end**

Runs the transformation until the end, without taking into account enabled [breakpoints](#), if any.

### **Pause**

Request to pause the current transformation as soon as possible.

### **Stop**

Request to stop the current transformation without completing its execution.

### **Show current execution nodes**

Reveals the current debugger context showing both the current instruction and the current node in the XML source. Possible displayed states:

- Entering () or leaving () an XML execution node.
- Entering () or leaving () an XSL execution node.
- Entering () or leaving () an XPath execution node.

**Note:** When you set a MarkLogic server as a processor, the **Show current execution nodes** button is named **Refresh current session context from server**. Click this button to refresh the information in all the views.

**Note:** For some of the XSLT processors (Saxon-HE/PE/EE) the debugger could be configured to step into the XPath expressions affecting the behavior of the following debugger actions: **Step into**, **Step over** or **Step Out**.

### **Related Information:**

[Advanced Saxon HE/PE/EE XQuery Transformation Options](#) on page 760

## **Debugging Information Views**

The information views at the bottom of the editor is comprised of two panes that are used to display various types of information used to understand the transformation process. For each information type there is a corresponding tab. While running a transformation, relevant events are displayed in the various information views. This enables the developer to obtain a clear view of the transformation progress. By using the debug controls, developers can easily isolate parts of stylesheet. Therefore, they may be more easily understood and modified.

The information types include the following:

Left side information views

- [Breakpoints view](#)
- [XWatch view](#)
- [Context view](#)
- [Messages view](#) (XSLT only)
- [Variables view](#)
- [Invocation Tree view](#)

Right side information views


- [Stack view](#)
- [Output Mapping Stack view](#)
- [Trace view](#)
- [Templates view](#) (XSLT only)
- [Nodes/Values Set view](#)
- [Hotspots view](#)

**Tip:** The information views are [dockable](#) so that you can configure the workspace according to your preferences.

## Breakpoints View

The **Breakpoints** view lists all *breakpoints* that are set on opened documents. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu. *Breakpoints can be inserted* in the XML source document or the XSLT/XQuery document in debugging sessions.

Once you insert a *breakpoint*, it is automatically added to the list in the **Breakpoints** view and you can edit its associated *condition*. A *breakpoint* can have an associated break condition that represents an XPath expression evaluated in the current debugger context. In order to be processed, their evaluation result should be a boolean value. A *breakpoint* with an associated condition only stops the execution of the Debugger if the *breakpoint condition* is evaluated as **true**.

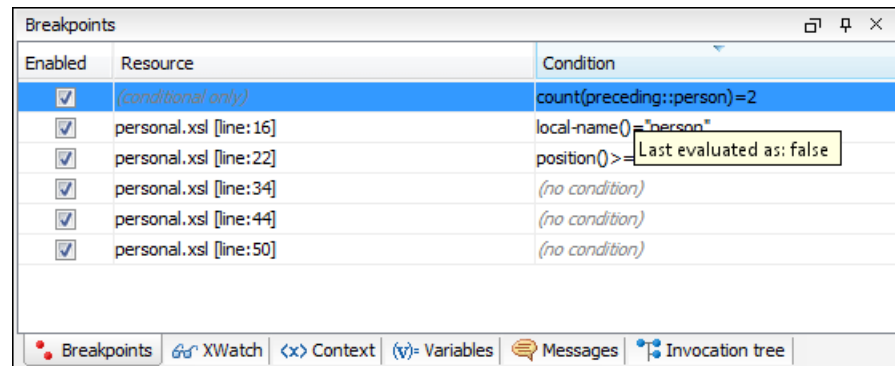

| Enabled                             | Resource               | Condition                  |
|-------------------------------------|------------------------|----------------------------|
| <input checked="" type="checkbox"/> | (conditional only)     | count(preceding::person)=2 |
| <input checked="" type="checkbox"/> | personal.xml [line:16] | local-name()='person'      |
| <input checked="" type="checkbox"/> | personal.xml [line:22] | position() >= 2            |
| <input checked="" type="checkbox"/> | personal.xml [line:34] | (no condition)             |
| <input checked="" type="checkbox"/> | personal.xml [line:44] | (no condition)             |
| <input checked="" type="checkbox"/> | personal.xml [line:50] | (no condition)             |

Figure 485: Breakpoints View

The **Breakpoints** view contains the following columns:

- **Enabled** - If selected, the current condition is evaluated and taken into account.
- **Resource** - Resource file and number of the line where the *breakpoint* is set. The Entire path of resource file is available as tooltip.
- **Condition** - XSLT/XQuery expression to be evaluated during debugging. The expression will be evaluated at every debug step.

Clicking a record highlights the *breakpoint* line in the document.

**Note:** The *breakpoints* list is not deleted at the end of a transformation (it is preserved between debugging sessions).

The following actions are available in the contextual menu of the table:

### Go to

Moves the cursor to the source of the *breakpoint*.

### Run to Breakpoint

Runs the debugger up to the point of this particular *breakpoint* and ignores the others (regardless of whether they were previously enabled or disabled).

### Enable

Enables the *breakpoint*.

### Disable

Disables the *breakpoint*. A disabled *breakpoint* will not be evaluated by the Debugger.

### Add

Allows you to add a new *breakpoint* and *breakpoint condition*.

### Edit

Allows you to edit an existing *breakpoint*.

### Remove

Deletes the selected *breakpoint*.

### Enable all

Enables all *breakpoints*.

## Disable all

Disables all *breakpoints*.

## Remove all

Removes all *breakpoints*.

## Related Information:

[Using Breakpoints](#) on page 1038

## Context View

The context node is valid only for XSLT debugging sessions and is a source node corresponding to the XSL expression that is evaluated. It is also called the context of execution. The context node implicitly changes as the processor hits various steps (at the point where XPath expressions are evaluated). This node has the same value as evaluating '.' (dot) XPath expression in [XWatch view](#). The value of the context node is presented as a tree in the **Context** view. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

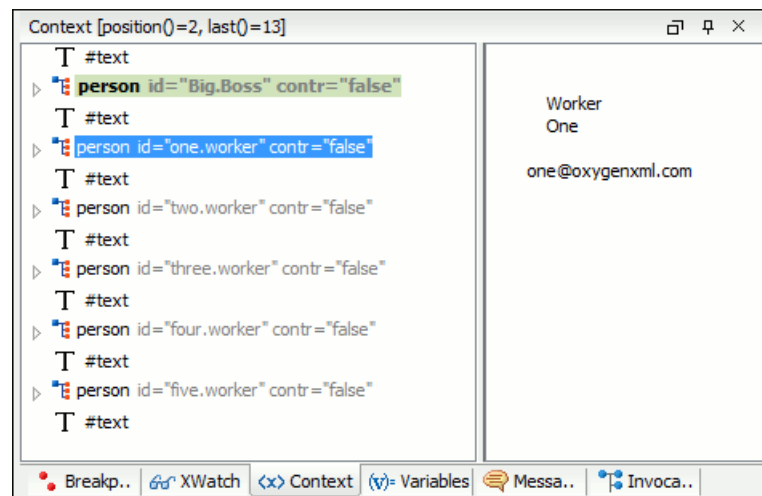


**Figure 486: Context node view**

The context nodes are presented in a tree-like fashion. Nodes from a defined namespace bound to a prefix are displayed using the qualified name. If the namespace is not bound to a prefix, the namespace URI is presented before the node name. The value of the selected attribute or node is displayed in the right side panel. The **Context** view also presents the current mode of the XSLT processor if this mode differs from the default one.

The title bar displays the current element index and the number of elements that compose the current context (this information is not available if you choose Xalan or Saxon 6 as processing engine).

## XPath Watch (XWatch) View

The **XWatch** view shows XPath expressions evaluated during the debugging process. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Expressions are evaluated dynamically as the processor changes its source context. When you type an XPath expression in the **Expression** column, Oxygen XML Developer supports you with syntax highlight and [content completion assistance](#).

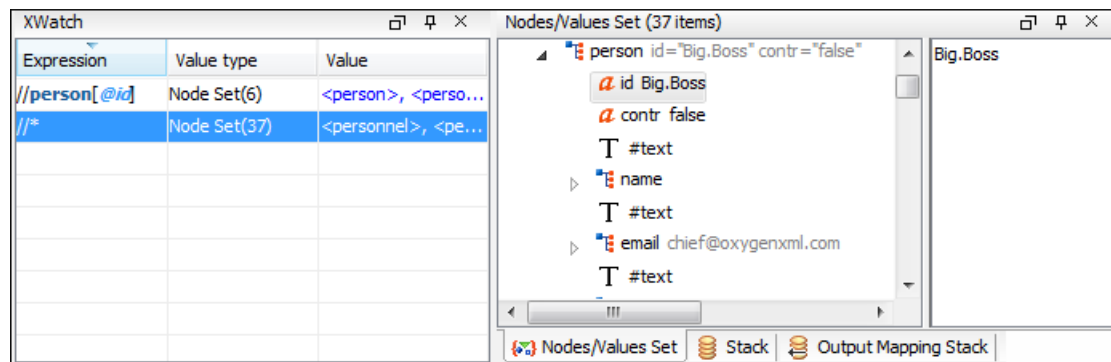


Figure 487: XPath Watch View

Table 64: XWatch columns

| Column     | Description                                                                                                                                                                                                                                        |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Expression | XPath expression to be evaluated (XPath 1.0 or 2.0 / 3.0 compliant).                                                                                                                                                                               |
| Value      | Result of XPath expression evaluation. Value has a type (see <a href="#">the possible values</a> in the section <a href="#">Variables View</a> on page 1034). For <i>Node Set</i> results, the number of nodes in the set is shown in parenthesis. |

**Important:** Notes about working with the **XWatch** view:

- Expressions that reference variable names are not evaluated.
- The expression list is not deleted at the end of the transformation (it is preserved between debugging sessions).
- To insert a new expression, click the first empty line of the **Expression** column and start typing. As an alternative, right-click and select the **Add** action. Press **(Enter)** on the cell to add and evaluate.
- To delete an expression, click its **Expression** column and delete its content. As an alternative, right-click and select the **Remove** action. Press **(Enter)** on the cell to commit changes.
- If the expression result type is a *Node Set*, click it (**Value** column) and its value is displayed in the [Nodes/Values Set view](#).
- The **Copy**, **Add**, **Remove** and **Remove All** actions are available in every row's contextual menu.

## Messages View

Using **xsl:message** instructions is one way to signal special situations encountered during transformation as well as a raw way of doing the debugging. The **Messages** view is available only for XSLT debugging sessions and shows all **xsl:message** calls executed by the XSLT processor during transformation. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

| Message   | Terminate | Resource                |
|-----------|-----------|-------------------------|
| Message 1 | no        | personal.xsl [line: 8]  |
| Message 2 | no        | personal.xsl [line: 12] |
| Message 3 | no        | personal.xsl [line: 29] |

Figure 488: Messages View

**Table 65: Messages columns**

| Column    | Description                                                                                                                                           |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| Message   | Message content.                                                                                                                                      |
| Terminate | Signals if processor terminates the transformation or not once it encounters the message (yes/no respectively).                                       |
| Resource  | Resource file where <i>xsl:message</i> instruction is defined and the message line number. The complete path of the resource is available as tooltip. |

The following actions are available in the contextual menu:

**Go to**

Highlight the XSL fragment that generated the message.

**Copy**

Copies to clipboard message details (system ID, severity info, description, start location, terminate state).

**\*Clear all**

Removes all messages from the view.

**Important:**

- Clicking a record from the table highlights the `xsl:message` declaration line.
- Message table values can be sorted by clicking the corresponding column header. Clicking the column header switches the sorting order between: ascending, descending, no sort.

**Stack View**

The **Stack** view shows the current execution stack of both source and XSLT/XQuery nodes. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

During the transformation, two stacks are managed. One for source nodes being processed and the other for XSLT/XQuery nodes being processed. Oxygen XML Developer shows both node types in one common stack. The source (XML) nodes are preceded by a red color icon while XSLT/XQuery nodes are preceded by a green color icon. The advantage of this approach is that you can always see the source scope on which an XSLT/XQuery instruction is executed (the last red color node on the stack). The stack is oriented upside down.

| # | XML/XSL/XQuery Node | Attributes     | Resource     |
|---|---------------------|----------------|--------------|
| 4 | xsl:message         |                | personal.xsl |
| 3 | xsl:element         | (name="table") | personal.xsl |
| 2 | html                |                | personal.xsl |
| 1 | xsl:template        | (match="/")    | personal.xsl |
| 0 | #document           |                | personal.xml |

Stack Trace Templates Nodes/Val.. Hotspots Results

**Figure 489: Stack View**

The contextual menu contains one action: **Go to**, which moves the selection in the editor panel to the line containing the XSLT element that is displayed on the selected line from the view.

**Table 66: Stack Columns**

| Column | Description                                                           |
|--------|-----------------------------------------------------------------------|
| #      | Order number, represents the depth of the node (0 is the stack base). |

| Column               | Description                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------|
| XML/XSLT/XQuery Node | Node from source or stylesheet document currently being processed. One particular stack node is the document root, noted as <b>#document</b> . |
| Attributes           | Attributes of the node (a list of <i>id="value"</i> pairs).                                                                                    |
| Resource             | Resource file where the node is located. The entire path is available as tooltip.                                                              |

**Important:** Remarks:

- Clicking a record from the stack highlights that node's location inside resource.
- Using Saxon, the stylesheet elements are qualified with XSL proxy, while using Xalan you only see their names. (example: `xsl:template` using Saxon and `template` using Xalan).
- Only the Saxon processor shows element attributes.
- The Xalan processor shows also the built-in rules.

### Output Mapping Stack View

The **Output Mapping Stack** view displays [context data](#) and presents the XSLT templates/XQuery elements that generated specific areas of the output. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

| # | XML/XSL/XQuery Node | Attributes                                  | Resource     |
|---|---------------------|---------------------------------------------|--------------|
| 8 | xsl:value-of        | (select=\",./link/@manager\")               | personal.xml |
| 7 | font                | (color="black") (name="verdana") (size="3") | personal.xml |
| 6 | xsl:element         | (name="td")                                 | personal.xml |
| 5 | xsl:element         | (name="tr")                                 | personal.xml |
| 4 | xsl:template        | (match="//person")                          | personal.xml |
| 3 | xsl:apply-templates |                                             | personal.xml |
| 2 | xsl:element         | (name="table")                              | personal.xml |
| 1 | html                |                                             | personal.xml |
| 0 | xsl:template        | (match="/")                                 | personal.xml |

**Figure 490: Output Mapping Stack view**

The **Go to** action of the contextual menu takes you to the line that contains the XSLT element displayed in the **Output Mapping Stack** view.

**Table 67: Output Mapping Stack Columns**

| Column          | Description                                                                                                                                                                                                          |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| #               | The order number in the stack of XSLT templates/XQuery elements. Number 0 corresponds to the bottom of the stack in the status of the XSLT/XQuery processor. The highest number corresponds to the top of the stack. |
| XSL/XQuery Node | The name of an XSLT template/XQuery element that participated in the generation of the selected output area.                                                                                                         |
| Attributes      | The attributes of the XSLT template/XQuery node.                                                                                                                                                                     |
| Resource        | The name of the file containing the XSLT template/XQuery element.                                                                                                                                                    |

**Important:** Remarks:

- Clicking a record highlights that XSLT template definition/XQuery element inside the resource (XSLT stylesheet file/XQuery file).
- Saxon only shows the applied XSLT templates having at least one hit from the processor. Xalan shows all defined XSLT templates, with or without hits.

- The table can be sorted by clicking the corresponding column header. When clicking a column header the sorting order switches between: ascending, descending, no sort.
- Xalan shows also the built-in XSLT rules.

#### Related Information:

[Identify the XSLT / XQuery Expression that Generated Particular Output](#) on page 1036

[Stack View](#) on page 1030

[Trace View](#) on page 1032

[Templates View](#) on page 1033


#### Trace View

Usually, the XSLT/XQuery processors signal the following events during transformation:

- ➔ - Entering a source (XML) node.
- ⬅ - Leaving a source (XML) node.
- ➔ - Entering an XSLT/XQuery node.
- ⬅ - Leaving an XSLT/XQuery node.

The **Trace** view catches all of these events, so you can see how the process evolved. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The red icon lines denote source nodes while the green icon lines denote XSLT/XQuery nodes. It is possible to save the element trace in a structured XML document (using the **Export to XML** action in the contextual menu). Thus, you have the possibility of comparing the trace results from multiple debug sessions.

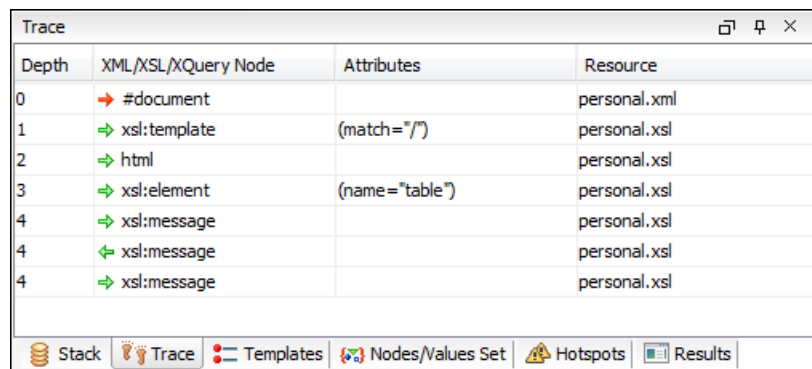

| Depth | XML/XSL/XQuery Node | Attributes     | Resource     |
|-------|---------------------|----------------|--------------|
| 0     | ➔ #document         |                | personal.xml |
| 1     | ➔ xsl:template      | (match="/")    | personal.xsl |
| 2     | ➔ html              |                | personal.xsl |
| 3     | ➔ xsl:element       | (name="table") | personal.xsl |
| 4     | ➔ xsl:message       |                | personal.xsl |
| 4     | ⬅ xsl:message       |                | personal.xsl |
| 4     | ➔ xsl:message       |                | personal.xsl |

Stack Trace Templates Nodes/Values Set Hotspots Results

**Figure 491: Trace History View**

The contextual menu contains the following actions:

#### Go to

Moves the selection in the editor panel to the line containing the XSLT element or XML element that is displayed on the selected line from the view;

#### Export to XML

Saves the entire trace list in XML format.

**Table 68: Trace History Columns**

| Column               | Description                                                                                                                                                                                                                                                    |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Depth                | Shows you how deep the node is nested in the XML or stylesheet structure. The bigger the number, the more nested the node is. A depth 0 node is the document root.                                                                                             |
| XML/XSLT/XQuery Node | Represents the node from the processed source or stylesheet document. One particular node is the document root, noted as <i>#document</i> . Every node is preceded by an arrow that represents what action was performed on it (entering or leaving the node). |

| Column     | Description                                                                                             |
|------------|---------------------------------------------------------------------------------------------------------|
| Attributes | Attributes of the node (a list of <i>id</i> ="value" pairs).                                            |
| Resource   | Resource file where the node is located. The complete path of the resource file is provided as tooltip. |

**Important:** Remarks:

- Clicking a record highlights that node's location inside the resource.
- Only the Saxon processor shows the element attributes.
- The Xalan processor shows also the built-in rules.

## Templates View

The **xsl:template** is the basic element for stylesheets transformation. The **Templates** view is only available during XSLT debugging sessions and shows all *xsl:template* instructions used by the transformation. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Being able to see the number of *hits* for each of the templates allows you to get an idea of the stylesheet coverage by template rules with respect to the input source.

| Match    | Hits | Priority | Mode | Name | Resource     |
|----------|------|----------|------|------|--------------|
| //person | 6    |          |      |      | personal.xml |
| /        | 1    |          |      |      | personal.xml |

**Figure 492: Templates view**

The contextual menu contains one action: **Go to**, which moves the selection in the editor panel to the line that contains the XSLT template displayed on the selected line from the view.

**Table 69: Templates columns**

| Column          | Description                                                                                                             |
|-----------------|-------------------------------------------------------------------------------------------------------------------------|
| <b>Match</b>    | The <i>match</i> attribute of the <i>xsl:template</i> .                                                                 |
| <b>Hits</b>     | The number of hits for the <i>xsl:template</i> . Shows how many times the XSLT processor used this particular template. |
| <b>Priority</b> | The template priority as established by XSLT processor.                                                                 |
| <b>Mode</b>     | The <i>mode</i> attribute of the <i>xsl:template</i> .                                                                  |
| <b>Name</b>     | The <i>name</i> attribute of the <i>xsl:template</i> .                                                                  |
| <b>Resource</b> | The resource file where the template is located. The complete path of the resource file is available as tooltip.        |

**Important:** Remarks:

- Clicking a record highlights that template definition inside the resource.
- Saxon only shows the applied templates having at least one hit from the processor. Xalan shows all defined templates, with or without hits.
- Template table values can be sorted by clicking the corresponding column header. When clicking a column header the sorting order switches between: ascending, descending, no sort.
- Xalan shows also the built-in rules.



## Nodes/Values Set View

The **Nodes/Values Set** view is always used in relation with the **Variables** view and **XWatch** view. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu. It shows an XSLT node set value in a tree form. This view is updated as a response to the following events:

- You click a variable that has a node set value in the **Variables** or **XWatch** view.
- You click a tree fragment in the **Variables** or **XWatch** view.
- You click an XPath expression evaluated to a node set in the **Variables** or **XWatch** view.

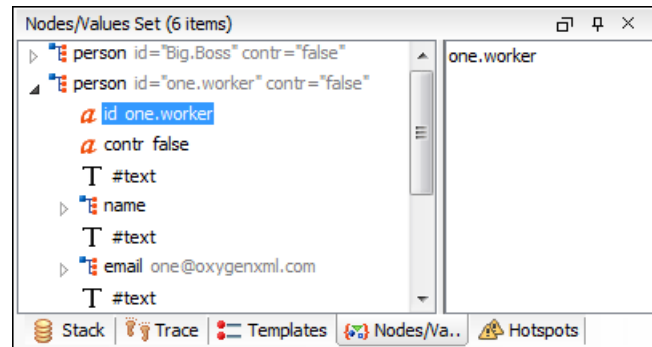


**Figure 493: Node Set view**

The nodes / values set is presented in a tree-like fashion. The total number of items is presented in the title bar. Nodes from a defined namespace bound to a prefix are displayed using the qualified name. If the namespace is not bound to a prefix, the namespace URI is presented before the node name. The value of the selected attribute or node is displayed in the right side panel.

### **Important:** Remarks:

- For longer values in the right side panel, the interface displays it with an ellipsis (...) at the end. A more detailed value is available as a tooltip when hovering over it.
- Clicking a record highlights the location of that node in the source or stylesheet view.

## Variables View

The **Variables** view displays variables and parameters (local and global), along with their values. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Variables and parameters play an important role during an XSLT/XQuery transformation. Oxygen XML Developer uses the following icons to differentiate variables and parameters:

- **V** - Global variable.
- **{V}** - Local variable.
- **P** - Global parameter.
- **{P}** - Local parameter.

The following value types are available:

- **Boolean**
- **String**
- **Date** - XSLT 2.0 / 3.0 only.
- **Number**
- **Set**
- **Object**
- **Fragment** - Tree fragment.
- **Any**
- **Undefined** - The value was not yet set, or it is not accessible.

**Note:**

When Saxon 6.5 is used, if the value is unavailable, then the following message is displayed in the **Value** field:  
"The variable value is unavailable".

When Saxon 9 is used:

- If the variable is not used, the **Value** field displays "The variable is declared but never used".
- If the variable value cannot be evaluated, the **Value** field displays "The variable value is unavailable".

- **Document**
- **Element**
- **Attribute**
- **ProcessingInstruction**
- **Comment**
- **Text**
- **Namespace**
- **Evaluating** - Value under evaluation.
- **Not Known** - Unknown types.

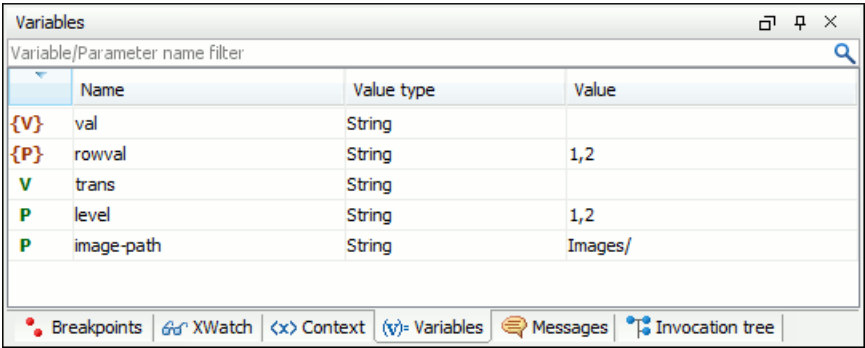


Figure 494: Variables View

Table 70: Variables Columns

| Column     | Description                            |
|------------|----------------------------------------|
| Name       | Name of variable / parameter.          |
| Value Type | Type of variable/parameter.            |
| Value      | Current value of variable / parameter. |

The value of a variable (the **Value** column) can be copied to the clipboard for pasting it to other editor areas with the **Copy value** action from the contextual menu. This is useful if you have long and complex values that cannot be easily remembered just by looking at them once.

**Important:** Remarks:

- Local variables and parameters are the first entries presented in the table.
- Clicking a record highlights the variable definition line.
- Variable values could differ depending on the transformation engine used or stylesheet version set.
- If the value of the variable is a node set or a tree fragment, clicking it causes the **Node Set view** to be shown with the corresponding set of values.
- Variable table values can be sorted by clicking the corresponding column header. Clicking the column header switches between the orders: ascending, descending, no sort.

### Multiple Output Documents in XSLT 2.0 and XSLT 3.0

For XSLT 2.0 and XSLT 3.0 stylesheets that store the output in multiple files by using the `xs1:result-document` instruction, the content of the file created in this way is displayed dynamically while the

transformation is running in an output view. There is one view for each `xsl:result-document` instruction so that the output is not mixed while still being presented in multiple views.

## Steps in a Typical Debugging Process

---

Depending on your situation and needs, the debugging process might be more complex, but the following procedure is an example of a typical debugging process:

1. [Open the source XML document](#) and [the XSLT/XQuery document](#).
2. If you are in the **Editor perspective**, switch to the **XSLT Debugger** or **XQuery Debugger perspective** with one of the following actions:
  - Select **Window > Open perspective > XSLT Debugger/XQuery Debugger** or the  **XSLT Debugger/XQuery Debugger** button in the top-right corner of the interface.
  - Select **Document > XML Document > Debug scenario** or use the  **Debug scenario** action on the toolbar.. This action initializes the Debugger *perspective* with the parameters of the transformation scenario. Any modification applied to the scenario parameters (the transformer engine, XSLT parameters, transformer extensions, etc.) will be saved back in the scenario when exiting from the Debugger *perspective*.
3. Select the source XML document in the [XML source selector of the Control toolbar](#). In the case of XQuery debugging, if your XQuery document has no implicit source, set the source selector value to **NONE**.
4. Select the XSLT/XQuery document in the [XSL/XQuery selector of the Control toolbar](#).
5. Set XSLT/XQuery parameters using the [Configure parameters button on the Control toolbar](#).
6. [Set one or more breakpoints](#).
7. Step through the stylesheet using the [following buttons available on the Control toolbar](#):
  -  **Step into**
  -  **Step over**
  -  **Step out**
  -  **Run**
  -  **Run to cursor**
  -  **Run to end**
  -  **Pause**
  -  **Stop**
8. Examine the data in the information views to find the bug in the transformation process.  
For more information about fixing bugs in the transformation, see: [Identify the XSLT / XQuery Expression that Generated Particular Output](#) on page 1036.

### Related Information:

[Identify the XSLT / XQuery Expression that Generated Particular Output](#) on page 1036

## Identify the XSLT / XQuery Expression that Generated Particular Output

---

To quickly spot the XSLT templates or XQuery expressions with problems, it is important to know what XSLT template in the XSLT stylesheet (or XQuery expression in the XQuery document) and what element in the source XML document generated a specified area in the output.


Some of the debugging capabilities (for example, **Step in**) can be used for this purpose. Using **Step in**, you can see how output is generated and link it with the XSLT/XQuery element being executed in the current source context. However, this can become difficult on complex XSLT stylesheets or XQuery documents that generate a large output.

You can click particular text in the **Output** view or **XHTML** output view and the editor will select the XML source context and the XSLT template/XQuery element that generated that text. Also, inspecting the whole stack of

XSLT templates/XQuery elements that determined the state of the XSLT/XQuery processor at the moment of generating the specified output area speeds up the debugging process.

This is an example of a typical procedure for identifying an expression that generated particular output:

1. Switch to the **XSLT Debugger** or **XQuery Debugger perspective** with one of the following actions:
  - Select **Window > Open perspective > XSLT Debugger/XQuery Debugger** or the  **XSLT Debugger**/ **XQuery Debugger** button in the top-right corner of the interface.
  - Select **Document > XML Document > Debug scenario** or use the  **Debug scenario** action on the toolbar. This action initializes the Debugger *perspective* with the parameters of the transformation scenario. Any modification applied to the scenario parameters (the transformer engine, XSLT parameters, transformer extensions, etc.) will be saved back in the scenario when exiting from the Debugger *perspective*.
2. Select the source XML document in the **XML source selector of the Control toolbar**. In the case of XQuery debugging, if your XQuery document has no implicit source, set the source selector value to **NONE**.
3. Select the XSLT/XQuery document in the **XSL/XQuery selector of the Control toolbar**.
4. Select the appropriate engine in the **XSLT/XQuery engine selector of the Control toolbar**.
5. Set XSLT/XQuery parameters using the **Configure parameters** button on the Control toolbar.
6. Apply the XSLT stylesheet or XQuery transformation using the  **Run to end** button that is available on the **Control toolbar**.
7. Inspect the mapping by clicking a section of the output in either the **Text** tab or **XHTML** tab of the **Output view**.

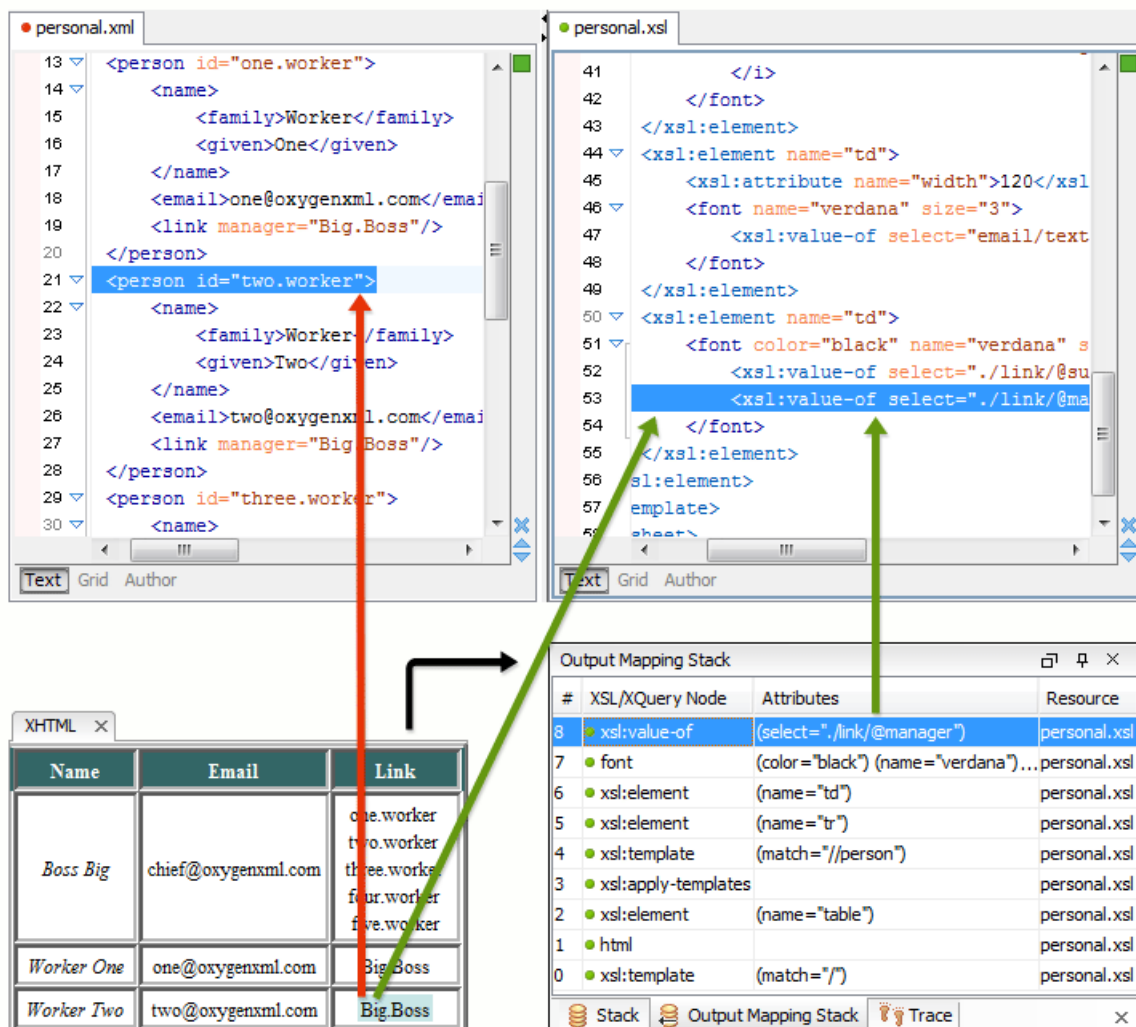

The screenshot displays the XSLT Debugger interface with three main components:

- Source XML (personal.xml):** Contains three `<person>` elements. The second person, `two.worker`, is highlighted. Its `<link manager="Big Boss"/>` element is the source of the output.
- XSLT/XQuery Document (personal.xsl):** Shows the transformation logic. The `<xsl:value-of select="email/text">` and `<xsl:value-of select="link/@manager">` expressions are visible.
- Output Mapping Stack:** A table showing the mapping of XSL/XQuery nodes to the output. The stack is as follows:

| # | XSL/XQuery Node     | Attributes                          | Resource     |
|---|---------------------|-------------------------------------|--------------|
| 8 | xsl:value-of        | (select="link/@manager")            | personal.xml |
| 7 | font                | (color="black") (name="verdana")... | personal.xml |
| 6 | xsl:element         | (name="td")                         | personal.xml |
| 5 | xsl:element         | (name="tr")                         | personal.xml |
| 4 | xsl:template        | (match="//person")                  | personal.xml |
| 3 | xsl:apply-templates |                                     | personal.xml |
| 2 | xsl:element         | (name="table")                      | personal.xml |
| 1 | html                |                                     | personal.xml |
| 0 | xsl:template        | (match="/")                         | personal.xml |

The **XHTML** output view shows a table with columns **Name**, **Email**, and **Link**. The **Link** column contains the output of the transformation, including `one.worker`, `two.worker`, `three.worker`, `four.worker`, `five.worker`, `Big Boss`, and `Big Boss`. A red arrow points from the `two.worker` entry in the **Link** column to the `<xsl:value-of select="link/@manager">` node in the **Output Mapping Stack**.

Figure 495: XHTML Output to Source Mapping

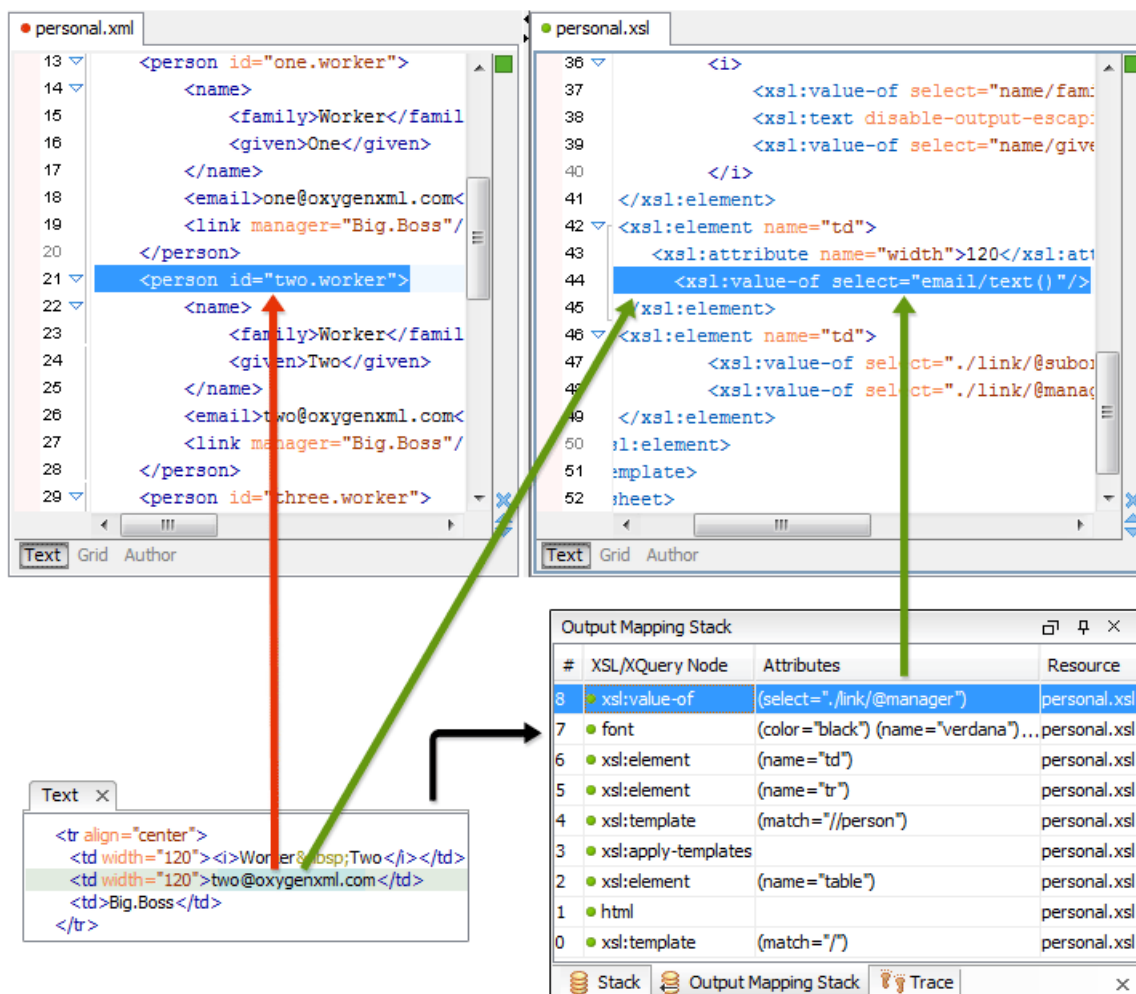


**Figure 496: Text Output to Source Mapping**

This action will highlight the XSLT / XQuery element and the XML source context. This XSLT template/XQuery element that is highlighted in the XSLT/XQuery editor represents only the top of the stack of XSLT templates/XQuery elements that determined the state of the XSLT/XQuery processor at the moment of generating the clicked output section. In the case of complex transformations, inspecting the whole stack of XSLT templates/XQuery elements speeds up the debugging process. This stack is available in the **Output Mapping Stack view**.

#### Related Information:

- [Output Mapping Stack View](#) on page 1031
- [Trace View](#) on page 1032
- [Templates View](#) on page 1033

## Using Breakpoints

The Oxygen XML Developer XSLT/XQuery Debugger allows you to interrupt XSLT/XQuery processing to gather information about variables and processor execution at particular points. To ensure *breakpoints* are persistent between work sessions, they are saved at project level. You can set a maximum of 100 *breakpoints* per project.

#### Inserting Breakpoints

To insert a *breakpoint*, follow these steps:

1. Click the line where you want to insert the *breakpoint* in the XML source document or the XSLT/XQuery document. *Breakpoints* are automatically created on the ending line of a start tag, even if you click a different line.
2. Click the vertical stripe on the left side of the editor panel or use **Shift+F7**.

#### Result:

Once you insert a *breakpoint*, it is automatically added to the list in the **Breakpoints** view and you can edit its associated *condition*. A *breakpoint* can have an associated break condition that represents an XPath expression evaluated in the current debugger context. In order to be processed, their evaluation result should be a boolean value. A *breakpoint* with an associated condition only stops the execution of the Debugger if the *breakpoint condition* is evaluated as **true**.

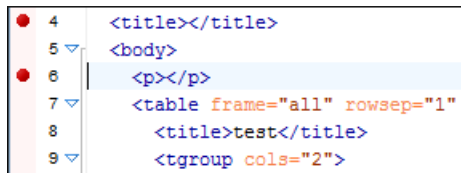


Figure 497: **Example: Breakpoints**

#### Removing Breakpoints

To remove a *breakpoint*, click its icon (●) in the vertical stripe on the left side of the editor panel or right-click the *breakpoint* and select **Remove** or **Remove all**.

#### Related Information:

[Breakpoints View](#) on page 1027

## Performance Profiling of XSLT Stylesheets and XQuery Documents

Whether you are trying to identify a performance issue that is causing your production XSLT/XQuery transformation to not meet customer expectations or you are trying to proactively identify issues prior to deploying your XSLT/XQuery transformation, using the XSLT/XQuery profiler feature is essential to helping you save time and ultimately ensure a better performing, more scalable XSLT/XQuery transformation.

The XSLT/XQuery profiling feature can use any available XSLT/XQuery processor that can be used for debugging and it is available from the debugging [perspective](#).

#### Enabling the Profiler

Enabling and disabling the profiler is controlled by the  **Profiler** button from the debugger Control toolbar. The XSLT/XQuery profiler is off by default. This option is not available during a debugger session so you need to set it before starting the transformation. For information about a common debugging procedure, see [Steps in a Typical Debugging Process](#) on page 1036.

#### Profiling Information Views

Immediately after enabling the profiler, two new information views are added to the current debugger [information views](#):

- [Invocation tree view](#) on left side
- [Hotspots view](#) on right side

Profiling data is available only after the transformation ends successfully.

On the left side ([Invocation tree view](#)), you can examine how style instructions are processed. This result view is also named call-tree, as it represents the order of style processing. The profiling result shows the duration time for each of the style-instruction including the time needed for its called children.

On the right side (**Hotspots view**), you can immediately spot the time the processor spent in each instruction. As an instruction usually calls other instructions, the used time of the called instruction is extracted from the duration time of the caller (the hotspot only presents the inherent time of the instruction).

## Source Backmapping

In either the **Invocation tree** or **Hotspots view**, you can use the backmapping feature to find the XSLT stylesheet or XQuery expression definition. Clicking the selected item causes Oxygen XML Developer to highlight the XSLT stylesheet or XQuery expression source line where the instruction is defined.

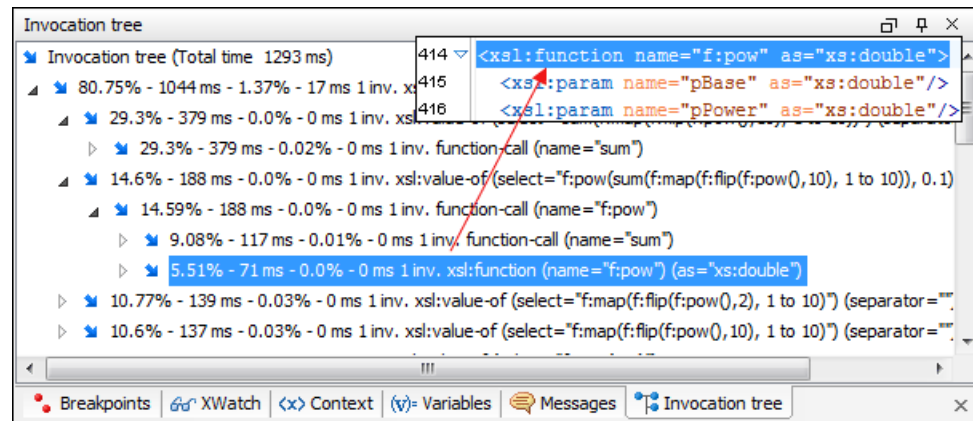


Figure 498: Source Backmapping

## Saving and Customizing Profiling Data

The profiling data can be saved (exported) into XML and HTML format. In either the **Invocation tree** or **Hotspots view**, right-click anywhere in the view and select **Export to XML** or **Export to HTML**. The HTML report can be customized based upon the profiling raw data. When you select **Export to HTML**, Oxygen XML Developer will save it as XML and apply an XSLT stylesheet to render the report as HTML. You can customize these stylesheets to suit your needs. They are located in: `[OXYGEN_INSTALL_DIR]/frameworks/profiler/`.

## Other Profiling Notes

- If you want to change the [XSLT/XQuery profiler settings](#), use the contextual menu and choose the corresponding **View settings** entry.
- Profiling exhaustive transformations may run into an **OutOfMemory** error due to the large amount of information being collected. If this is the case, you can close unused projects when running the profiling or use high values for Java VM options `-Xms` and `-Xmx`. If this does not help you can shorten your source XML file and try again.
- For more information about the XSLT/XQuery Profiler, watch our video demonstration:

<https://www.youtube.com/embed/4ftHschjLqA>

## Invocation Tree View

The **Invocation Tree** view shows a top-down call tree that represents how XSLT instructions or XQuery expressions are processed. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.



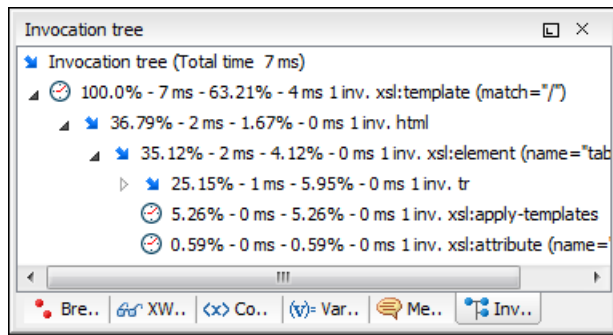


**Figure 499: Invocation Tree View**

The entries in the invocation tree include a few possible icons that indicate the following:

-  - Points to a call whose inherent time is insignificant compared to its total time.
-  - Points to a call whose inherent time is significant compared to its total time (greater than 1/3rd of its total time).

Every entry in the invocation tree includes textual information that depends on the [XSLT/XQuery profiler settings](#):

- A percentage number of the total time that is calculated with respect to either the root of the tree or the calling instruction.
- A total time measurement in milliseconds or microseconds. This is the total execution time that includes calls into other instructions.
- A percentage number of the inherent time that is calculated with respect to either the root of the tree or the calling instruction.
- An inherent time measurement in milliseconds or microseconds. This is the inherent execution time of the instruction.
- An invocation count that shows how often the instruction has been invoked on this call-path.
- An instruction name that contains also the attributes description.

The **Invocation Tree** view also includes the following contextual menu actions:

#### **Export to HTML**

Selecting this option will save the profiling data as XML and then apply an XSLT stylesheet to render the report as HTML. These stylesheets are included in the subfolder: `[OXYGEN_INSTALL_DIR]/frameworks/profiler/`. You can use them to customize your own report based on the profiling raw data.

#### **Export to XML**

Use this option to save the profiling data as an XML file in a specified location.

#### **View settings**

Opens the [XSLT/XQuery Profiler preferences page](#) that allows you to configure various profiling settings.

## **Hotspots View**

The **Hotspots** view displays a list of all instruction calls that lie above the threshold defined in the [XSLT/XQuery profiler settings](#). If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.



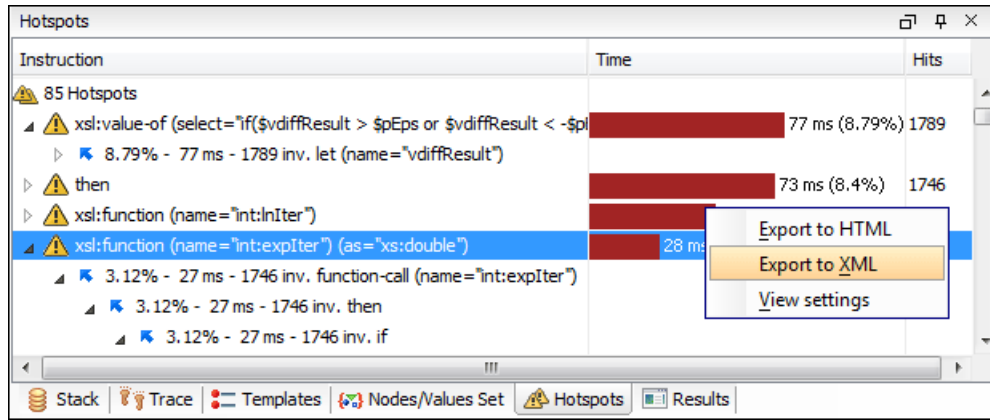


**Figure 500: Hotspots View**

By opening a hotspot instruction entry, the tree of back-traces leading to that instruction call are calculated and shown.

Every hotspot is described by the values from the following columns:

- **Instruction** - The name of the instruction.
- **Time** - The inherent time in milliseconds or microseconds of how much time has been spent in the hotspot, along with a bar whose length is proportional to this value. All calls into this instruction are summed up regardless of the particular call sequence.
- **Hits** - The invocation count of the hotspot entry.

If you click the handle on the left side of a hotspot, a tree of back-traces will be shown.

Every entry in the backtrace tree has textual information attached to it that depends on the [XSLT/XQuery profiler settings](#):

- A percentage number that is calculated with respect to either the total time or the called instruction.
- A time measured in milliseconds or microseconds of how much time has been contributed to the parent hotspot on this call-path.
- An invocation count that shows how often the hotspot has been invoked on this call-path.

**Note:** This is not the number of invocations of this instruction.

- An instruction name that also contains its attributes.

The **Hotspots** view also includes the following contextual menu actions:

#### Export to HTML

Selecting this option will save the profiling data as XML and then apply an XSLT stylesheet to render the report as HTML. These stylesheets are included in the subfolder: `[OXYGEN_INSTALL_DIR]/frameworks/profiler/`. You can use them to customize your own report based on the profiling raw data.

#### Export to XML

Use this option to save the profiling data as an XML file in a specified location.

#### View settings

Opens the [XSLT/XQuery Profiler preferences page](#) that allows you to configure various profiling settings.

## Debugging XSLT that Call Java Extensions

It is possible to debug XSLT that call Java extensions. This is achieved through a transformation scenario in which the Java extensions are specified, and the debugging can be done based upon the same scenario.

To debug XSLT with Java extensions, follow this procedure:

1. Create an [XSLT transformation scenario](#) for your XSLT document (select **Configure Transformation Scenario(s)** action from the toolbar, then click **New**, and select **XSLT transformation**).

2. In the **New scenario** dialog box, click the **Extensions** button (in the **XSLT** tab), specify the Java extensions (JAR libraries) that are needed, and click **OK**.
3. Once you are finished configuring the transformation scenario, click **OK**, then select **Save and close**.
4. Use the  **Debug scenario** action on the toolbar and the debugging will be based upon the same transformation scenario you just configured and saved.

**Tip:** You could achieve this during a [typical debugging process](#) by specifying the Java extensions using the  **Edit extensions** button on the debugger control toolbar.

**Related Information:**

[Validating XSLT Stylesheets that Call Java Extensions](#) on page 464

## Debugging Java Extensions

The XSLT/XQuery debugger does not step into Java classes that are configured as XSLT/XQuery extensions of the transformation. To step into Java classes, inspect variable values, and set [breakpoints](#) in Java methods, you can set up a Java debug configuration in an IDE (such as the Eclipse SDK) as described in the following steps:

1. Create a debug configuration.
  - a) Set at least 256 MB as heap memory for the Java virtual machine (recommended 512 MB) by setting the -Xmx parameter in the debug configuration (for example, "-Xmx512m").
  - b) Make sure the `[OXYGEN_INSTALL_DIR]/lib/oxygen.jar` file and your Java extension classes are on the Java classpath.

The Java extension classes should be the same classes that were [set as an extension](#) of the XSLT/XQuery transformation in the debugging [perspective](#).
  - c) Set the class `ro.sync.exml.Oxygen` as the main Java class of the configuration.

The main Java class `ro.sync.exml.Oxygen` is located in the `oxygen.jar` file.

2. Start the debug configuration.

Now you can set [breakpoints](#) and inspect Java variables as in any Java debugging process executed in the selected IDE (Eclipse SDK, and so on.).

## Supported Processors for XSLT / XQuery Debugging

The following built-in XSLT processors are integrated in the debugger and can be selected in the [Control Toolbar](#):

- **Saxon 9.8.0.8 HE (Home Edition)** - a limited version of the Saxon 9 processor, capable of running XSLT 1.0, XSLT 2.0 / 3.0 basic and XQuery 1.0 transformations, available in both the XSLT debugger and the XQuery one,
- **Saxon 9.8.0.8 PE (Professional Edition)** - capable of running XSLT 1.0 transformations, XSLT 2.0 basic ones and XQuery 1.0 ones, available in both the XSLT debugger and the XQuery one,
- **Saxon 9.8.0.8 EE (Enterprise Edition)** - a schema aware processor, capable of running XSLT 1.0 transformations, XSLT 2.0 / 3.0 basic ones, XSLT 2.0 / 3.0 schema aware ones and XQuery 1.0 / 3.0 ones, available in both the XSLT debugger and the XQuery debugger,
- **Saxon 6.5.5** - capable of running only XSLT 1.0 transformations, available only in the XSLT debugger,
- **Xalan 2.7.2** - capable of running only XSLT 1.0 transformations, available only in the XSLT debugger.

**Topics:**

- [Extending Oxygen XML Developer with Plugins](#)
- [API Frequently Asked Questions \(API FAQ\)](#)

Oxygen XML Developer has an SDK that can be used as a base to develop [frameworks](#) and [plugins](#). The SDK is a Java library available under the [Oxygen XML SDK licensing terms](#) and is delivered with a set of examples that demonstrate how to extend Oxygen XML functionality through API calls. The SDK is available on our website at [https://www.oxygenxml.com/oxygen\\_sdk.html](https://www.oxygenxml.com/oxygen_sdk.html).

## Extending Oxygen XML Developer with Plugins

---

A [plugin](#) is a software component that adds extra functionality to the standalone version of the application using a series of application-provided extension points.

This chapter explains how to write and install a *plugin* for the standalone version of Oxygen XML Developer. The [Plugins Development Kit](#) contains sample *plugins* (source and compiled Java code) and the Javadoc API necessary for developing custom *plugins*.

If you want to customize the Oxygen XML Developer Eclipse plugin you can look at the [Eclipse IDE Integration Sample Project](#) to see how an Eclipse plugin can interact with the Oxygen XML Developer APIs.

### General Configuration of an Oxygen XML Developer Plugin

The Oxygen XML Developer functionality can be extended with [plugins](#) that implement a clearly specified API. On the Oxygen XML Developer website, there is an [SDK](#) with sample *plugins* (source and compiled Java code) and the Javadoc API necessary for developing custom *plugins*.

The minimal implementation of a *plugin* must provide:

- A Java class that extends the `ro.sync.xml.plugin.Plugin` class.
- A Java class that implements the `ro.sync.xml.plugin.PluginExtension` interface.
- A *plugin* descriptor file called `plugin.xml`.

A `ro.sync.xml.plugin.PluginDescriptor` object is passed to the constructor of the subclass of the `ro.sync.xml.plugin.Plugin` class. It contains the following data items about the *plugin*:

- **basedir** (*File* object) - The base directory of the *plugin*.
- **description** (*String* object) - The description of the *plugin*.
- **name** (*String* object) - The name of the *plugin*.
- **vendor** (*String* object) - The vendor name of the *plugin*.
- **version** (*String* object) - The *plugin* version.
- **id** (*String* object) - A unique identifier.
- **classLoaderType** - You can choose between `preferOxygenResources` (default value) and `preferReferencedResources`. When choosing `preferOxygenResources`, the libraries that are referenced in the Oxygen XML Developer `lib` directory will have precedence over those referenced in the `plugin.xml` configuration file, if they have the same package names. When choosing `preferReferencedResources`, the libraries that are referenced in the `plugin.xml` configuration file will have precedence over those found in the Oxygen XML Developer `lib` directory, if they have the same package names.

The *plugin* descriptor is an XML file that defines how the *plugin* is integrated in Oxygen XML Developer and what libraries are loaded. The structure of the *plugin* descriptor file is fully described in a DTD grammar located in `[OXYGEN_INSTALL_DIR]/plugins/plugin.dtd`. Here is a sample *plugin* descriptor used by the *Capitalize Lines* sample *plugin*:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
 name="Capitalize Lines"
 description="Capitalize the first character on each line"
 version="1.0.0"
 vendor="SyncRO"
 class="ro.sync.sample.plugin.caplines.CapLinesPlugin">
 <runtime>
 <library name="lib/caplines.jar"/>
 </runtime>
 <extension type="selectionProcessor"
 class="ro.sync.sample.plugin.caplines.CapLinesPluginExtension"
 keyboardShortcut="ctrl shift EQUALS"/>
</plugin>
```

If your *plugin* is of the **Selection**, **Document** or **General** types, and thus contributes an action either to the contextual menu or to the main menu of the **Text** editing mode, then you can assign a keyboard shortcut for it. You can use the `keyboardShortcut` attribute for each extension element to specify the desired shortcut.

**Tip:** To compose string representations of the desired shortcut keys you can go to the Oxygen XML Developer **Menu Shortcut Keys** preferences page, press **Edit** on any action, press the desired key sequence and use the representation that appears in the **Edit** dialog box.

## Referencing Libraries

To reference libraries, use either of the following elements:

- `<library name="path/libraryName" scope="global"/>` - To point to specific libraries. Notice that the value of `library name` includes the path (relative or absolute) to the library.  
**Note:** You can use the `${oxygenInstallDir}` editor variable as part of the value of the `name` attribute. You can also use a system variable (`${system(var.name)}`) or environment variable (`${env(VAR_NAME)}`).
- `<librariesFolder name="path/libraryFolderPath" scope="global"/>` - To point to multiple libraries located in the specified folder. Notice that the value of `libraryFolder name` includes the path (relative or absolute) to the library folder.

Both elements support the `scope` attribute that defines the loading priority. It can have one of the following three values:

- **local** - The library is loaded in the *plugin's* own class loader. This is the default behavior.
- **global** - The library is loaded in the main application class loader as the last library in the list (as if it would be present in the application `lib` directory).
- **globalHighPriority** - The library is loaded in the main application class loader as the first library in the list (useful to patch certain resources located in other *JARs* of the application).

## Installing an Oxygen XML Developer Plugin

Choose one of the following methods to install a *plugin* in Oxygen XML Developer:

### Manual Method

To manually install a *plugin* in Oxygen XML Developer, follow these steps:

1. Go to the Oxygen XML Developer installation directory and locate the `plugins` directory.  
**Note:** The `plugins` directory contains all the *plugins* available to Oxygen XML Developer.
2. In the `plugins` directory, create a subfolder to store the *plugin* files (for example, `[OXYGEN_INSTALL_DIR]/plugins/myPlugin`).
3. In the new folder, place the *plugin* descriptor file (`plugin.xml`), the Java classes of the *plugin*, and the other files that are referenced in the descriptor file.
4. Restart Oxygen XML Developer.

## Automatic Method

To install an add-on that is hosted on a remote update site, follow these steps:

1. Go to **Help > Install new add-ons**.
2. In the displayed dialog box, enter or paste the update site that hosts the add-on in the **Show add-ons from** field (or select it from the drop-down menu, if applicable). The default add-ons are hosted on <http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml>. If you want to see a list of all the default and sample add-ons that are available on the *Oxygen* remote update sites, choose **ALL AVAILABLE SITES** from the drop-down menu. The add-ons list contains the name, status, update version, Oxygen XML Developer version, and the type of the add-on (either **framework**, or **plugin**). A short description of each add-on is presented under the add-ons list.

**Note:** To see all the versions of the add-ons, deselect **Show only compatible add-ons** and **Show only the latest version of the add-ons**. Incompatible add-ons are shown only to acknowledge their presence on the remote update site, but you cannot install an incompatible add-on.

3. Choose the add-ons you want to install, press the **Next** button, then follow the on-screen instructions.

**Note:** Accepting the license agreement of the add-on is a mandatory step in the installation process.

**Note:** All add-ons are installed in the extensions directory inside the Oxygen XML Developer [preferences directory](#).

## Types of Plugin Extensions Available with the SDK

A [plugin](#) can have one or more defined *plugin extensions* that provide functionality to the application. This section presents the *plugin extensions* that are available.

### Additional Framework Plugin Extension

This type of [plugin](#) allows you to add a new framework straight from the *plugin*.

To specify additional frameworks, edit the *plugin* descriptor and add extension elements that point to them, as in the following example:

```
<extension type="AdditionalFrameworks" path="framework_directory"/>
```

The path attribute should be a sub-directory of the plugin. If the *plugin* is [installed as an add-on](#), the new framework will be set as read-only and editing it will only be possible if you [duplicate it](#). If the *plugin* is installed in the `[OXYGEN_INSTALL_DIR]/plugins` directory, the new frameworks will be editable.

### Additional XProc Engine Plugin Extension

This type of [plugin](#) contributes a folder that contains an external XProc engine.

The name of the *plugin* extension is **AdditionalXprocEngine** and it makes it easier to [integrate an external XProc engine](#). After the plugin is installed, when you run an XProc transformation scenario, your external XProc engine can be selected from the **Processor** drop-down menu in the **XProc** tab.

An example of the `plugin.xml` file looks like this:

```
<plugin
 id="morgana.xproc.addon"
 name="Contribute Morgana XProc"
 description="Contribute Morgana XProc"
 version="1.0"
 vendor="SyncroSoft"
 class="ro.sync.xml.plugin.Plugin"
 classLoaderType="preferReferencedResources">
 <extension type="AdditionalXProcEngine" path="MorganaXProcEngine"/></extension>
</plugin>
```

The path attribute points to the XProc engine folder that contains the `engine.xml` and all the libraries necessary to run it.

### Components Validation Plugin Extension

This type of [plugin](#) allows you to customize the menus, toolbars, and other components by enabling or filtering them from the user interface.

This *plugin* provides the following API:

- **ComponentsValidatorPluginExtension interface** - There is one method that must be implemented:
  - `getComponentsValidator()` - Returns a [ro.sync.exml.ComponentsValidator](#) implementation class used for validating the menus, toolbars, and their actions.
- **ComponentsValidator interface** - Provides methods to filter various features from being added to the GUI of Oxygen XML Developer:
  - `validateMenuOrTaggedAction(String[] menuOrActionPath)` - Checks if a menu or a tag action from a menu is allowed and returns a boolean value. A tag is used to uniquely identifying an action. The `String[]` argument is the tag of the menu / action and the tags of its parent menus if any.
  - `validateToolbarTaggedAction(String[] toolbarOrAction)` - Checks if an action from a toolbar is allowed and returns a boolean value. The `String[]` argument is the tag of the action from a toolbar and the tag of its parent toolbar if any.
  - `validateComponent(String key)` - Checks if the given component is allowed and returns a boolean value. The `String` argument is the tag identifying the component. You can remove toolbars entirely using this callback.
  - `validateAccelAction(String category, String tag)` - Checks if the given accelerator action is allowed to appear in the GUI and returns a boolean value. An accelerator action can be uniquely identified so it will be removed both from toolbars or menus. The first argument represents the action category, the second is the tag of the action.
  - `validateContentType(String contentType)` - Checks if the given content type is allowed and returns a boolean value. The `String` argument represents the content type. You can instruct Oxygen XML Developer to ignore content types such as `text / xsl` or `text / xquery`.
  - `validateOptionPane(String optionPaneKey)` - Checks if the given options page can be added in the preferences option tree and returns a boolean value. The `String` argument is the option pane key.
  - `validateOption(String optionKey)` - Checks if the given option can be added in the option page and returns a boolean value. The `String` argument is the option key. This method is mostly used for internal use and it is not called for each option in a preferences page.
  - `validateLibrary(String library)` - Checks if the given library is allowed to appear listed in the **About** dialog box and returns a boolean value. The `String` argument is the library. This method is mostly for internal use.
  - `validateNewEditorTemplate(EditorTemplate editorTemplate)` - Checks if the given template for a new editor is allowed and returns a boolean value. The `EditorTemplate` argument is the editor template. An `EditorTemplate` is used to create an editor for a given extension. You can thus filter what appears in the list of the **New** dialog box.
  - `isDebuggerperspectiveAllowed()` - Checks if the debugger [perspective](#) is allowed and returns a boolean value.
  - `validateSHMarker(String marker)` - Checks if the given marker is allowed and returns a boolean value. The `String` argument represents the syntax highlight marker to be checked. If you decide to filter certain content types, you can also filter the syntax highlight options so that the content type is no longer present in the Preferences options tree.
  - `validateToolbarComposite(String toolbarCompositeTag)` - Checks if the toolbar composite is available. A toolbar composite is a toolbar component such as a drop-down menu.

**Tip:** The best way to decide what to filter is to observe the values that Oxygen XML Developer passes when these callbacks are called. You have to create an implementation for this interface that lists in the console all values received by each function. Then you can decide on the values to filter and act accordingly.

### Contribute Additional Languages Plugin Extension

This type of [plugin](#) allows you to contribute new translation languages to the Oxygen XML Developer UI.

The **AdditionalUITranslation** plugin extension provides the ability to contribute new translation languages to the interface in Oxygen XML Developer.

A sample `plugin.xml` file looks like this:

```
<plugin
 id="romanian.i18n.provider"
 name="Add Romanian as an user interface language"
 description="Add Romanian as an user interface language"
 version="1.0"
 vendor="Syncro Soft"
 class="ro.sync.exml.plugin.Plugin">
 <extension type="AdditionalUITranslation" href="translation.xml" />
```



```
</plugin>
```

where the `translation.xml` has a structure like this:

```
<translation>
 <languageList>
 <language description="Romanian" lang="ro_RO" localeDescription="Romana" />
 </languageList>
 <key value="Error">
 <val lang="ro_RO">Eroare</val>
 </key>

</translation>
```

If all error keys are not translated in the custom `translation.xml` contributed by the plugin, the fallback is the default English translation. Once this plugin is installed, the [Languages drop-down menu in the Options > Preferences > Global](#) will be updated to include the newly added languages. The end user will still need to select that language in the drop-down menu to use it.

### Contribute External DITA-OT Distribution Plugin Extension

This type of [plugin](#) allows you to contribute an external DITA-OT distribution to Oxygen XML Developer.

Oxygen XML Developer comes bundled with DITA-OT version 2.5.4. If you want to use a different DITA-OT version, the **AdditionalDITAOT** plugin extension provides the ability to contribute an external distribution of the *DITA Open Toolkit* to Oxygen XML Developer.

### Example

For instance, if you wanted to use a DITA-OT version 1.8, your `plugin.xml` file might look like this:

```
<plugin
 id="dita-ot-18"
 name="Contribute DITA OT 1.8"
 description="Contributes DITA OT 1.8"
 version="1.0"
 vendor="Syncro Soft"
 class="ro.sync.xml.plugin.Plugin">
 <extension type="AdditionalDITAOT" path="DITA-OT1.8.5" description="DITA OT 1.8"/>
</plugin>
```

The `path` attribute points to a folder located relative to the `plugin.xml` file and this folder is where the additional distribution of DITA-OT would be located.

When Oxygen XML Developer is started with this plugin enabled, that additional DITA-OT version can now be selected in the [DITA Open Toolkit option in the DITA preferences page](#).

### Custom Protocol Plugin Extension

This type of [plugin](#) allows you to work with a custom designed protocol for retrieving and storing files.

It provides the following API:

- **URLStreamHandlerPluginExtension interface** - There is one method that must be implemented:
  - `getURLStreamHandler(String protocol)` - It takes as an argument the name of the protocol and returns a `URLStreamHandler` object, or null if there is no URL handler for the specified protocol.

This type of *plugin* extension can be usually combined with a [Workspace Access plugin extension](#) that can add a custom toolbar with custom actions for opening documents from a certain source.

As an alternative, two older *plugin* extensions can also be used to add a toolbar action for showing a custom URL chooser:

- **URLChooserPluginExtension2 interface** - Makes it possible to create your own dialog box that works with the custom protocol. This interface provides two methods:
  - `chooseURLs(StandalonePluginWorkspace workspaceAccess)` - Returns a `URL [ ]` object that contains the URLs the user decided to open with the custom protocol. You can invoke your own URL chooser dialog box here and then return the chosen URLs having your own custom protocol. You have access to the workspace of Oxygen XML Developer.
  - `getMenuName()` - Returns a `String` object that is the name of the entry added in the **File** menu.

- **URLChooserToolBarExtension interface** - Makes it possible to provide a toolbar entry that is used for launching the custom URLs chooser from the *URLChooserPluginExtension* implementation. This interface provides two methods:
  - *getToolBarIcon()* - Returns the `javax.swing.Icon` image used on the toolbar.
  - *getToolBarTooltip()* - Returns a `String` that is the tooltip used on the toolbar button.

### Lock Handler Plugin Extension

This type of *plugin extension* is used for locking resources from a specific protocol.

It provides the following API:

- **LockHandlerFactoryPluginExtension interface:**

You need to implement the following two methods:

- *LockHandler getLockHandler()*  
Gets the lock handler for the current handled protocol. Might be `null` if not supported.
- *boolean isLockingSupported(String protocol)*  
Checks if a lock handler can be provided for a specific protocol.

To use this type of extension in your *plugin*, create an extension of *LockHandlerFactory* type in your `plugin.xml` file and specify the class implementing *LockHandlerFactoryPluginExtension*:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomLockHandler">
 <runtime>

 </runtime>

 <extension type="LockHandlerFactory"
 class="LockHandlerFactoryPluginExtensionImpl" />

</plugin>
```

### Open Redirect Plugin Extension

This type of *plugin* is useful for opening multiple files with only one open action.

For example, when a zip archive or an ODF file or an OOXML file is open in the **Archive Browser view** a *plugin* of this type can decide to open a file also from the archive in an XML editor panel. This file can be the document.xml main file from an OOXML file archive or a specific XML file from a zip archive.

The *plugin* must implement the interface *OpenRedirectExtension*. It only has one callback: *redirect(URL)* that receives the URL of the file opened by the Oxygen XML Developer user. If the *plugin* decides to open also other files it must return an array of information objects (*OpenRedirectInformation[]*) that correspond to these files. Such an information object must contain the URL that is opened in a new editor panel and the content type (for example, `text/xml`). The content type is used for determining the type of editor panel. A `null` content type allows auto-detection of the file type.

### Option Page Plugin Extension

This type of *plugin extension* allows you to add custom **Preferences** pages.

The extension must implement the *ro.sync.xml.plugin.option.OptionPagePluginExtension* interface. The provided callbacks allow you to create a custom *Swing* component that will be added to the page and to react to various calls to persistently save the page settings using the *OptionsStorage* API.

All preferences pages that are contributed by a *plugin* are listed in the **Preferences** dialog box in the **Plugins** category. As long as the added preferences page has the same name as its *plugin*, it will be promoted to the first level of the hierarchy within the **Plugins** category.

The `plugin.xml` configuration file can specify one or more such extensions using constructs like this:

```
<extension type="OptionPage" class="my.pack.CustomOptionPagePluginExtension" />
```



## Resource Locking Custom Protocol Plugin Extension

This type of *plugin* allows you to work with a custom designed protocol for retrieving and storing files and it can lock a resource when opening it in Oxygen XML Developer.

This type of *plugin* extends the custom protocol *plugin* type with resource locking support and provides the following API:

- ***URLStreamHandlerWithLockPluginExtension* interface** - The *plugin* receives callbacks following the simple protocol for resource locking and unlocking imposed by Oxygen XML Developer.

There are two additional methods that must be implemented:

- ***getLockHandler()*** - Returns a *LockHandler* implementation class with the implementation of the lock specific methods from the *plugin*.
- ***isLockingSupported(String protocol)*** - Returns a boolean that is true if the *plugin* accepts to manage locking for a certain URL protocol scheme (such as ftp, http, https, or customName).

## Targeted URL Stream Handler Plugin Extension

This type of *plugin* can be used when it is necessary to impose custom URL stream handlers for specific URLs.

This *plugin* extension can handle the following protocols: http, https, ftp or sftp, for which Oxygen XML Developer usually provides specific fixed URL stream handlers. If it is set to handle connections for a specific protocol, this extension will be asked to provide the URL stream handler for each opened connection of a URL having that protocol.

To use this type of *plugin*, you have to implement the *ro.sync.xml.plugin.urlstreamhandler.TargetedURLStreamHandlerPluginExtension* interface, that provides the following methods:

- ***boolean canHandleProtocol(String protocol)*** - This method checks if the *plugin* can handle a specific protocol. If this method returns true for a specific protocol, the *getURLStreamHandler(URL)* method will be called for each opened connection of a URL having this protocol.
- ***URLStreamHandler getURLStreamHandler(URL url)*** - This method provides the URL handler for the specified URL and it is called for each opened connection of a URL with a protocol for which the *canHandleProtocol(String)* method returns true.

If this method returns null, the default Oxygen XML Developer *URLStreamHandler* is used.

To use this type of extension in your *plugin*, create an extension of *TargetedURLHandler* type in your *plugin.xml* file and specify the class that implements *TargetedURLStreamHandlerPluginExtension*:

```
<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomTargetedURLStreamHandlerPlugin">
 <runtime>

 </runtime>

 <extension type="TargetedURLHandler"
 class="CustomTargetedURLStreamHandlerPluginExtension"/>

</plugin>
```

This extension can be useful in situations when connections opened from a specific host must be handled in a particular way. For example, the Oxygen XML Developer *HTTP URLStreamHandler* may not be compatible for sending and receiving SOAP using the SUN Web Services implementation. In this case, you can override the stream handler (set by Oxygen XML Developer) to use the default SUN *URLStreamHandler*, since it is more compatible with sending and receiving SOAP requests.

```
public class CustomTargetedURLStreamHandlerPluginExtension
 implements TargetedURLStreamHandlerPluginExtension {

 @Override
 public boolean canHandleProtocol(String protocol) {
 boolean handleProtocol = false;
 if ("http".equals(protocol) || "https".equals(protocol)) {
 // This extension handles both HTTP and HTTPS protocols
 handleProtocol = true;
 }
 return handleProtocol;
 }
}
```

```

@Override
public URLStreamHandler getURLStreamHandler(URL url) {
 // This method is called only for the URLs with a protocol
 // where canHandleProtocol(String) method returns true (HTTP and HTTPS)

 URLStreamHandler handler = null;

 String host = url.getHost();
 String protocol = url.getProtocol();
 if ("some_host".equals(host)) {
 // When there are connections opened from some_host, the SUN HTTP(S)
 // handlers are used
 if ("http".equals(protocol)) {
 handler = new sun.net.www.protocol.http.Handler();
 } else {
 handler = new sun.net.www.protocol.https.Handler();
 }
 }
 return handler;
}
}

```

## Workspace Access Plugin Extension

This type of *plugin* allows you to contribute actions to the main menu and toolbars, create custom views, interact with the application workspace, make modifications to opened documents, and add listeners for various events.

Many complex integrations (such as integrations with Content Management Systems) usually requires access to some workspace resources such as toolbars, menus, views, and editors. This type of *plugin* is also useful because it allows you to make modifications to the XML content of an opened editor.

The *plugin* must implement the [ro.sync.xml.plugin.workspace.WorkspaceAccessPluginExtension](#) interface. The callback method *applicationStarted* of this interface allows access to a parameter of the [ro.sync.xml.workspace.api.standalone.StandalonePluginWorkspace](#) type (allows for API access to the application workspace).

The *StandalonePluginWorkspace* interface has three methods that can be called to customize toolbars, menus, and views:

- **addToolbarComponentsCustomizer** - Contributes to or modifies existing toolbars. You can specify additional toolbar IDs in the associated `plugin.xml` descriptor file using the following construct:

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomWorkspaceAccess">
 <runtime>

 </runtime>

 <extension type="WorkspaceAccess"/>

 <toolbar id="SampleID" initialSide="NORTH" initialRow="1"/>
</plugin>

```

The toolbar element adds a toolbar in the Oxygen XML Developer interface and allows you to contribute your own *plugin*-specific actions. The following attributes are supported:

- `id` - Unique identifier for the toolbar.
- `initialSide` - Specifies the place where the toolbar is initially displayed. The allowed values are NORTH and SOUTH.
- `initialRow` - Specifies the initial row on the specified side where the toolbar is displayed. For example, the first toolbar has an initial row of 0 and the next toolbar has an initial row of 1.

The [ro.sync.xml.workspace.api.standalone.ToolbarInfo](#) toolbar component information with the specified ID will be provided to you by the customizer interface. Therefore, you will be able to provide Swing components that will appear on the toolbar when the application starts.

- **addViewComponentCustomizer** - Contributes to or modifies existing views, or contributes to the reserved custom view. You can specify additional view IDs in the associated `plugin.xml` descriptor using the following construct:

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin name="CustomWorkspaceAccess">
 <runtime>

 </runtime>

```

```

<extension type="WorkspaceAccess"/>
.....
<view id="SampleID" initialSide="WEST" initialRow="0"/>
</plugin>

```

The view element adds a view in the Oxygen XML Developer interface and allows you to contribute your own *plugin*-specific UI components. The following attributes are supported:

- **id** - Unique identifier of the view component.
- **initialSide** - Specifies the place where the view is initially displayed. The allowed values are: NORTH, SOUTH, EAST, and WEST.
- **initialRow** - Specifies the initial row on the specified side where the view is displayed. For example, in Oxygen XML Developer, the **Project view** has an initial row of 0 and the **Outline view** has an initial row of 1. Both views are in the WEST part of the workbench.
- **initialState** - Specifies the initial state of the view. The allowed values are: hidden, docked, autohide, and floating. By default, the view is visible and docked.

The *ro.sync.exml.workspace.api.standalone.ViewInfo* view component information with the specified ID will be provided to you by the customizer interface. Therefore, you will be able to provide Swing components that will appear on the view when the application starts.

- **addMenuBarCustomizer** - Contributes to or modifies existing menu components.

Access to the opened editors can be done by first getting access to all URLs opened in the workspace using the *StandalonePluginWorkspace.getAllEditorLocations(int editingArea)* API method. Using the URL of an opened resource, you can gain access to it using the *StandalonePluginWorkspace.getEditorAccess(URL location, int editingArea)* API method. A *ro.sync.exml.workspace.api.editor.WSEditor* then allows access to the current editing page.

A special editing API is supported for the **Text** mode (*ro.sync.exml.workspace.api.editor.page.text.WSTextEditorPage*).

To be notified when editors are opened, selected, and closed, you can use the *StandalonePluginWorkspace.addEditorChangeListener* API method to add a listener.

#### Examples:

- A simple Maven-based sample of a workspace access plugin is available here: <https://github.com/oxygenxml/sample-plugin-workspace-access>
- A more complex sample of a workspace access plugin mimicking a CMS integration is available in the Author SDK: [https://www.oxygenxml.com/oxygen\\_sdk.html](https://www.oxygenxml.com/oxygen_sdk.html)

#### Adding a Custom View in Oxygen XML Developer

To add a custom view in Oxygen XML Developer, follow this procedure:

1. Locate the *plugin.xml* descriptor file for your plugin (should be located inside the **plugins** folder, for example, *[OXYGEN\_INSTALL\_DIR]/plugins/myPlugin*). Define the ID of the view you want to add and specify the location where it will be placed:

```

<view id="SampleWorkspaceAccessID" initialSide="WEST" initialRow="0"/>

```

2. In your **Workspace Access Plugin Extension** on page 1051 implementation, where the *applicationStarted* callback is received, add a view component customizer like this:

```

pluginWorkspaceAccess.addViewComponentCustomizer(new ViewComponentCustomizer() {
 public void customizeView(ViewInfo viewInfo) {
 if(
 //The view ID defined in the "plugin.xml"
 "SampleWorkspaceAccessID".equals(viewInfo.getViewID())) {
 cmsMessagesArea = new JTextArea("CMS Session History:");
 viewInfo.setComponent(new JScrollPane(cmsMessagesArea));
 viewInfo.setTitle("CMS Messages");
 viewInfo.setIcon(Icons.getIcon(Icons.CMS_MESSAGES_CUSTOM_VIEW_STRING));
 }
 }
});

```

3. Define the *cmsMessagesArea* as a *static* field (if you can access the messages area from anywhere in your code).

## Related Information:

### Workspace Access Plugin Extension (JavaScript-Based)

This is a JavaScript-based [plugin](#) extension that allows you to contribute actions to the main menu and toolbars, create custom views, interact with the application workspace, make modifications to opened documents, and add listeners for various events.

This extension can use the same API as the [Workspace Access plugin extension](#), but the implementation is JavaScript-based and uses the bundled [Rhino](#) library to create and work with Java API from the JavaScript code.

First, you need to create a custom plugin folder inside the **plugins** folder (for example, `[OXYGEN_INSTALL_DIR]/plugins/myPlugin`). This folder will contain your custom *plugin* descriptor file (`plugin.xml`) and all other resources for the plugin.

The *plugin* descriptor file (named `plugin.xml`) needs to reference a JavaScript file, as in the following example:

```
<!DOCTYPE plugin PUBLIC "-//Oxygen Plugin" "../plugin.dtd">
<plugin
 id="unique.id.value"
 name="Add Action To DITA Maps Manager popup-menu"
 description="Plugin adds action to DITA Maps Manager contextual menu."
 version="1.0"
 vendor="Syncro Soft"
 class="ro.sync.exml.plugin.Plugin"
 classLoaderType="preferReferencedResources">
 <extension type="WorkspaceAccessJS" href="wsAccess.js"/>
</plugin>
```

In the example above, the JavaScript file `wsAccess.js` (located in [your custom plugin folder](#)) will be called. This JavaScript file needs to have two JavaScript methods defined inside. Methods that will be called when the application starts and when it ends:

```
function applicationStarted(pluginWorkspaceAccess) {

}

function applicationClosing(pluginWorkspaceAccess) {

}
```

In regards to the `applicationStarted` callback, besides using the [ro.sync.exml.workspace.api.standalone.StandalonePluginWorkspace](#) API with the `pluginWorkspaceAccess.pluginWorkspaceAccess` parameter, you can also use a globally defined field called `jsDirURL` that points to the folder where the JavaScript file is located.

Below is a much larger example with a JavaScript Workspace Access *plugin* extension implementation that adds a new action in the contextual menu. The action starts the `notepad.exe` application and passes the reference to the currently selected `topicref` to it.

```
function applicationStarted(pluginWorkspaceAccess) {
 Packages.java.lang.System.err.println("Application started "
 + pluginWorkspaceAccess);
 edChangedListener = {
 /*Called when a DITA Map is opened*/
 editorOpened: function (editorLocation) {
 Packages.java.lang.System.err.println("\nrunning " + editorLocation);
 /*Get the opened DITA Map*/
 editor = pluginWorkspaceAccess.getEditorAccess(editorLocation,
 Packages.ro.sync.exml.workspace.api.PluginWorkspace.DITA_MAPS_EDITING_AREA);
 ditaMapPage = editor.getCurrentPage();
 /*Add listener called when right-click is done in the DITA Maps manager*/
 customizerObj = {
 customizePopUpMenu: function (popUp, ditaMapDocumentController) {
 Packages.java.lang.System.err.println("RIGHT CLICK" + popUp);
 tree = ditaMapPage.getDITAMapTreeComponent();
 /*Selected tree path*/
 sel = tree.getSelectionPath();
 if (sel != null) {
 selectedElement = sel.getLastPathComponent();
 /*Reference attribute*/
 href = selectedElement.getAttribute("href");
 if (href != null) {
 try {
 /*Create absolute reference*/
 absoluteRef = new Packages.java.net.URL(selectedElement.getXMLBaseURL(),
 href.getValue());
 Packages.java.lang.System.err.println("Computed absolute reference "
 + absoluteRef);
 mi = new Packages.java.awt.swing.JMenuItem("Run notepad");
 popUp.add(mi);
 }
 }
 }
 }
 };
 };
}
```

```

 actionPerfObj = {
 actionPerformed: function (e) {
 try {
 Packages.java.lang.Runtime.getRuntime().exec("notepad.exe "
 + pluginWorkspaceAccess.getUtilAccess().locateFile(absoluteRef));
 }
 catch (e1) {
 e1.printStackTrace();
 }
 }
 };
 mi.addActionListener(new JavaAdapter(Packages.java.awt.event.ActionListener,
 actionPerfObj));
 }
 catch (e1) {
 Packages.java.lang.System.err.println(e1);
 }
}
}
}

ditaMapPage.setPopupMenuCustomizer(new Packages.ro.sync.exml.workspace.api.
editor.page.ditamap.DITAMapPopupMenuCustomizer(customizerObj));
}
}
edChangeListener = new JavaAdapter(Packages.ro.sync.exml.workspace.api.
listeners.WSEditorChangeListener, edChangeListener);
pluginWorkspaceAccess.addEditorChangeListener(
 edChangeListener,
 Packages.ro.sync.exml.workspace.api.PluginWorkspace.DITA_MAPS_EDITING_AREA);
}

function applicationClosing(pluginWorkspaceAccess) {
 Packages.java.lang.System.err.println("Application closing "
 + pluginWorkspaceAccess);
}
}

```

For more information and some samples, see [GitHub Project with Multiple Workspace Access JavaScript-Based Plugin Samples](#).

### XML Refactoring Operations Plugin Extension

This type of *plugin* allows you to specify one or more directories where the XML Refactoring operation resources are loaded.

The `RefactoringOperationsProvider` extension can be used to specify the location where custom XML Refactoring operation resources (XQuery Update script or XSLT stylesheet and Operation Descriptor files) are stored. Oxygen XML Developer will scan the specified locations to load the custom operations when the XML Refactoring tool is opened, and allows you to share your custom refactoring operations.

#### Example: XML Refactoring Operations Plugin Extension

```

<?xml version="1.0" encoding="UTF-8"?>
<!DOCTYPE plugin PUBLIC "-//Oxygen Plugin" "../plugin.dtd">

<plugin
 id="refactoring.operations"
 name="Refactoring operations plugin"
 description="Contains operation descriptors and related scripts"
 version="1.0">
 <extension type="RefactoringOperationsProvider">
 <folder path="customDir"/>
 <folder path="customDir2"/>
 </extension>
</plugin>

```

### Plugin Extensions Designed to Work only in the Text Editing Mode

These *plugin* extensions operate only when editing documents in the **Text** mode. They are mounted automatically by the application on the contextual menu in the **Plugins** submenu.

#### General Plugin Extension

This type of *plugin* allows you to invoke custom code to interact with the workspace in **Text** mode.

This *plugin* is the most general *plugin* type and provides a limited API:

- **GeneralPluginExtension interface** - Intended for general-purpose *plugins*, kind of external tools but triggered from the **Plugins** menu. The implementing classes must provide the method `process(GenericPluginContext)`, which must provide the *plugin* processing. This method takes as a parameter a `GenericPluginContext` object.

- **GeneralPluginContext class** - Represents the context in which the general *plugin* extension does its processing. The `getPluginWorkspace()` method allows you access to the workspace of Oxygen XML Developer.

### Selection Plugin Extension

This type of *plugin* allows you to manage selections of text.

A **selection plugin** can be applied to both XML and non-XML documents. The *plugin* is started by making a selection in the editor, then selecting the corresponding menu item from the **Plugins** submenu in the contextual menu of **Text** mode.

This *plugin* type provides the following API:

- **SelectionPluginExtension interface** - The context containing the selected text is passed to the extension and the processed result is going to replace the initial selection. The `process(GenericPluginContext)` method must return a `SelectionPluginResult` object that contains the result of the processing. The `String` value returned by the `SelectionPluginResult` object can include [editor variables](#) such as `${caret}` and `${selection}`.
- **SelectionPluginContext object** - Represents the context and provides four methods:
  - **getSelection()** - Returns a `String` that is the current selection of text.
  - **getFrame()** - Returns a `Frame` that is the editing frame.
  - **getPluginWorkspace()** - Returns access to the workspace of Oxygen XML Developer.
  - **getDocumentURL()** - Returns the URL of the current edited document.

### Related Information:

[Editor Variables](#) on page 151

#### Example - Uppercase Plugin

The following *plugin* is called **UppercasePlugin** and is an example of a [Selection plugin](#). It is used in Oxygen XML Developer for capitalizing the characters in the current selection. This example consists of two Java classes and the *plugin* descriptor file (`plugin.xml`):

- **UppercasePlugin.java:**

```
package ro.sync.sample.plugin.uppercase;

import ro.sync.xml.plugin.Plugin;
import ro.sync.xml.plugin.PluginDescriptor;

public class UppercasePlugin extends Plugin {
 /**
 * Plugin instance.
 */
 private static UppercasePlugin instance = null;

 /**
 * UppercasePlugin constructor.
 *
 * @param descriptor Plugin descriptor object.
 */
 public UppercasePlugin(PluginDescriptor descriptor) {
 super(descriptor);

 if (instance != null) {
 throw new IllegalStateException("Already instantiated !");
 }
 instance = this;
 }

 /**
 * Get the plugin instance.
 *
 * @return the shared plugin instance.
 */
 public static UppercasePlugin getInstance() {
 return instance;
 }
}
```

- **UppercasePluginExtension.java:**

```
package ro.sync.sample.plugin.uppercase;

import ro.sync.xml.plugin.selection.SelectionPluginContext;
import ro.sync.xml.plugin.selection.SelectionPluginExtension;
import ro.sync.xml.plugin.selection.SelectionPluginResult;
import ro.sync.xml.plugin.selection.SelectionPluginResultImpl;
```



```

public class UppercasePluginExtension implements SelectionPluginExtension {
 /**
 * Convert the text to uppercase.
 */
 @param context Selection context.
 @return Uppercase plugin result.
 /**
 public SelectionPluginResult process(SelectionPluginContext context) {
 return new SelectionPluginResultImpl(
 context.getSelection().toUpperCase());
 }
}

```

- **plugin.xml:**

```

<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
 name="UpperCase"
 description="Convert the selection to uppercase"
 version="1.0.0"
 vendor="SyncRO"
 class="ro.sync.sample.plugin.uppercase.UppercasePlugin">
 <runtime>
 <library name="lib/uppercase.jar" />
 </runtime>
 <extension type="selectionProcessor"
 class="ro.sync.sample.plugin.uppercase.UppercasePluginExtension"/>
</plugin>

```

## Document Plugin Extension

This type of [plugin](#) allows you to manage the current document.

The **document plugin** type can only be applied to an XML document. It can modify the current document that is received as a callback parameter.

The *plugin* is started by selecting the corresponding menu item from the **Plugins** submenu in the contextual menu of **Text** mode. It provides the following API:

- **DocumentPluginExtension interface** - Receives the context object containing the current document. The *process(GeneralPluginContext)* method can return a *DocumentPluginResult* object containing a new document.
- **DocumentPluginContext object** - Represents the context and provides three methods:
  - **getDocument()** - Returns a `javax.swing.text.Document` object that represents the current document.
  - **getFrame()** - Returns a `java.awt.Frame` object that represents the editing frame.
  - **getPluginWorkspace()** - Returns access to the workspace of Oxygen XML Developer.

## Oxygen XML Developer Plugin How to...

This section includes information about how to implement complex [plugins](#).

### How to Write a CMS Integration Plugin

To have a complete integration between Oxygen XML Developer and a CMS, you usually have to write a [plugin](#) that combines the following two available *plugin* extensions:

- [Workspace Access](#)
- [Custom protocol](#)

The usual set of requirements for an integration between Oxygen XML Developer and the CMS are as follows:

- Contribute to the Oxygen XML Developer toolbars and main menu with your custom **Check Out** and **Check In** actions:
  - **Check Out** triggers your custom dialog boxes that allow you to browse the remote CMS and choose the resources you want to open.
  - **Check In** allows you to send the modified content back to the server.

You can use the **Workspace Access plugin extension** (and provided sample Java code) for all these operations.

- When **Check Out** is called, use the Oxygen XML Developer API to open your custom URLs (URLs created using your custom protocol). It is important to implement and use a **Custom Protocol** extension to be notified when the files are opened and saved and to be able to provide the content for the relative references the files may

contain to Oxygen XML Developer . Your custom `java.net.URLStreamHandler` implementation checks out the resource content from the server, stores it locally and provides its content. Sample **Check Out** implementation:

```
/**
 * Sample implementation for the "Check Out" method.
 *
 * @param pluginWorkspaceAccess (Workspace Access plugin).
 * @throws MalformedURLException
 */
private void checkOut(StandalonePluginWorkspace pluginWorkspaceAccess)
throws MalformedURLException {
 //TODO Show the user a custom dialog box for browsing the CMS
 //TODO after user selected the resource create a URL with a custom protocol
 //which will uniquely map to the resource on the CMS using the URLHandler
 //something like:
 URL customURL = new URL("mycms://host/path/to/file.xml");
 //Ask Oxygen to open the URL
 pluginWorkspaceAccess.open(customURL);
 //Oxygen will then your custom protocol handler to provide the contents for
 //the resource "mycms://host/path/to/file.xml"
 //Your custom protocol handler will check out the file in a temporary
 //directory, for example, and provide the content from it.
 //Oxygen will also pass through your URLHandler if you have any relative
 //references which need to be opened/obtained.
}
```

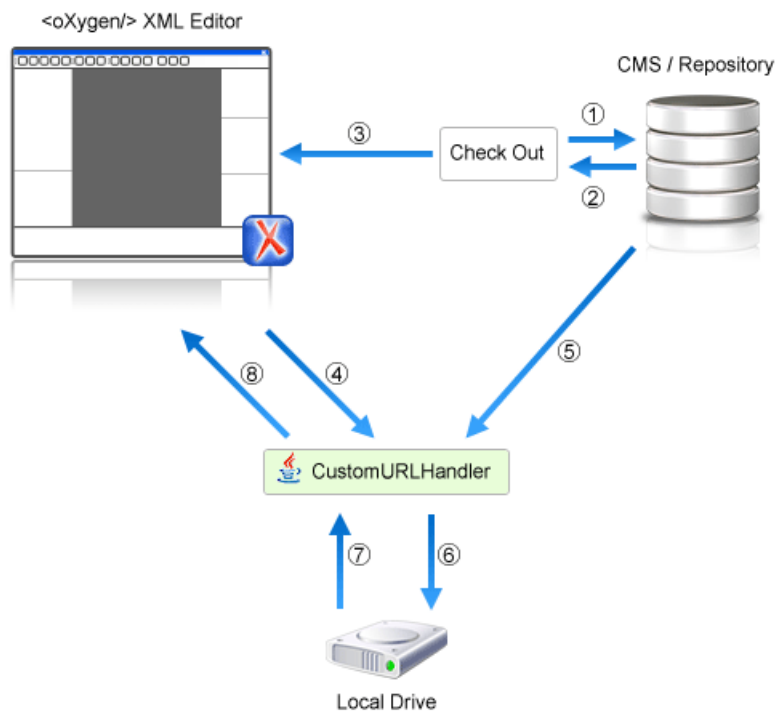


**Figure 501: Check Out Process Diagram**

Each phase is described below:

1. Browse CMS repository
  2. User chooses a resource
  3. Use API to open custom URL: `mycms://path/to/file.xml`
  4. Get content of URL: `mycms://path/to/file.xml`
  5. Get content of resource
  6. Store on disk for faster access
  7. Retrieve content from disk if already checked out
  8. Retrieved content
- Contribute a special **Browse CMS** action to every dialog box in Oxygen XML Developer where a URL can be chosen to perform a special action (such as the **Reuse Content** or **Insert Image** action). Sample code:

```
//Add an additional browse action to all dialog boxes/places
//where Oxygen allows selecting a URL.
pluginWorkspaceAccess.addInputURLChooserCustomizer
(new InputURLChooserCustomizer() {
```



```

 public void customizeBrowseActions
(List<Action> existingBrowseActions, final InputURLChooser chooser) {
 //IMPORTANT, you also need to set a custom icon on the action
 //for situations when its text is not used for display.
 Action browseCMS = new AbstractAction("CMS") {
 public void actionPerformed(ActionEvent e) {
 URL chosenResource = browseCMSAndChooseResource();
 if (chosenResource != null) {
 try {
 //Set the chosen resource in the combo box chooser.
 chooser.urlChosen(chosenResource);
 } catch (MalformedURLException e1) {
 }
 }
 }
 };
 existingBrowseActions.add(browseCMS);
}
};

```

When inserting references to other resources using the actions already implemented in Oxygen XML Developer, the reference to the resource is made by default relative to the absolute location of the edited XML file. You can gain control over the way in which the reference is made relative for a specific protocol like this:

```

//Add a custom relative reference resolver for your custom protocol.
//Usually when inserting references from one URL to another Oxygen
//makes the inserted path relative.
//If your custom protocol needs special relativization techniques then
//it should set up a custom relative
//references resolver to be notified when resolving needs to be done.
pluginWorkspaceAccess.addRelativeReferencesResolver(
 //Your custom URL protocol for which you already have a
 //custom URLStreamHandlerPluginExtension set up.
 "mycms",
 //The relative references resolver
 new RelativeReferenceResolver() {
 public String makeRelative(URL baseURL, URL childURL) {
 //Return the referenced path as absolute for example.
 //return childURL.toString();
 //Or return null for the default behavior.
 return null;
 }
 }
);

```

- Write the `plugin.xml` descriptor file. Your *plugin* combines the two extensions using a single set of libraries. The descriptor would look like this:

```

<!DOCTYPE plugin SYSTEM "../plugin.dtd">
<plugin
 name="CustomCMSAccess"
 description="Test"
 version="1.0.0"
 vendor="ACME"
 class="custom.cms.CMSAccessPlugin">
 <runtime>
 <library name="lib/cmsaccess.jar"/>
 </runtime>
 <!--Access to add actions to the main menu and toolbars or to add custom views.-->
 <!--See the "CustomWorkspaceAccessPluginExtension" Java sample for more details-->
 <extension type="WorkspaceAccess"
 class="custom.cms.CustomWorkspaceAccessPluginExtension"/>
 <!--The custom URL handler that will communicate with the CMS implementation-->
 <!--See the "CustomProtocolURLHandlerExtension" Java sample for more details-->
 <extension type="URLHandler"
 class="custom.cms.CustomProtocolURLHandlerExtension"/>
</plugin>

```

- Create a `cmsaccess.jar` [JAR](#) archive containing your implementation classes.
- Copy your new *plugin* directory in the `plugins` subfolder of the Oxygen XML Developer install folder (for example, `[OXYGEN_INSTALL_DIR]/plugins/myPlugin`) and start Oxygen XML Developer.

### Class Loading Issues

It is possible that the Java libraries you have specified in the *plugin* libraries list conflict with the ones already loaded by Oxygen XML Developer. To instruct the *plugin* to prefer its libraries over the ones used by Oxygen XML Developer, you can add the following attribute on the `<plugin>` root element: `classLoaderType="preferReferencedResources"` from the `plugin.xml` descriptor file.

**A Late Delegation Class Loader** (the main class loader in Oxygen XML Developer) is a `java.net.URLClassLoader` extension that prefers to search classes in its own libraries list and only if a class is not found there to delegate to the parent class loader.

The main Oxygen XML Developer Class Loader uses as libraries all JARS specified in the `[OXYGEN_INSTALL_DIR]\lib` directory. Its parent class loader is the default JVM Class loader. For each *plugin* instance, a separate class loader is created having as parent the Oxygen XML Developer Class Loader.

The *plugin* class loader can be either a standard `java.net.URLClassLoader` or a `LateDelegationClassLoader` (depending on the attribute `classLoaderType` in the `plugin.xml`). Its parent class loader is always the Oxygen XML Developer `LateDelegationClassLoader`.

If you experience additional problems, such as:

```
java.lang.LinkageError: ClassCastException:
attempting to cast
jar:file:/C:/jdk1.6.0_06/jre/lib/rt.jar!/
javax.xml.ws.spi.Provider.class
tojar:file:/D:/Program
Files/Oxygen XML Editor
12/plugins/wspcaccess/../../xdocs/lib/jaxws/
jaxws-api.jar!/javax.xml.ws.spi.Provider.class
at javax.xml.ws.spi.Provider.provider(
Provider.java:94) at
javax.xml.ws.Service.<init>(Service.java:56)
.....
```

The cause could be the fact that some classes are instantiated using the context class loader of the current thread. The most straightforward fix is to write your code in a *try/finally* statement:

```
ClassLoader oldClassLoader =
 Thread.currentThread().getContextClassLoader();
try {
 //This is the implementation of the
 //WorkspaceAccessPluginExtension plugin interface.
 Thread.currentThread().setContextClassLoader(
 CustomWorkspaceAccessPluginExtension.
 this.getClass().getClassLoader());
 //WRITE YOUR CODE HERE
} finally {
 Thread.currentThread().
 setContextClassLoader(oldClassLoader);
}
```

## How to Write A Custom Protocol Plugin

To create a custom protocol *plugin*, follow these steps:

1. Write the handler class for your protocol that implements the `java.net.URLStreamHandler` interface. Be careful to provide ways to encode and decode the URLs of your files.
2. Write the *plugin* class by extending `ro.sync.exml.plugin.Plugin`.
3. Write the *plugin* extension class that implements the `ro.sync.exml.plugin.urlstreamhandler.URLStreamHandlerPluginExtension` interface.

It is necessary that the *plugin* extension for the custom protocol implements the `URLStreamHandlerPluginExtension` interface. Without it, you cannot use your *plugin*, because Oxygen XML Developer is not able to find the protocol handler.

You can choose also to implement the `URLChooserPluginExtension` interface. It allows you to write and display your own customized dialog box for selecting resources that are loaded with the custom protocol.

An implementation of the extension `URLHandlerReadOnlyCheckerExtension` allows you to:

- Mark a resource as read-only when it is opened.
- Switch between marking the resource as read-only and read-write while it is edited.

It is useful when opening and editing CMS resources.

4. Write the `plugin.xml` descriptor file. Remember to set the name of the *plugin* class to the one from the second step and the *plugin* extension class name with the one you have chosen at step 3.
5. Create a *JAR* archive with all these files.
6. Create a custom plugin folder inside the **plugins** folder (for example, `[OXYGEN_INSTALL_DIR]/plugins/myPlugin`) that contains your new *plugin*.

## Packing and Deploying Plugins or Frameworks as Add-ons

### Packing a Plugin or Framework as an Add-on

This procedure is suitable for developers who want a better control over the [add-on](#) package or those who want to automate some of the steps:

1. Pack the [plugin](#) or [framework](#) as a ZIP file or a [Java Archive](#). Note that you should pack the entire root directory not just its contents.
2. Digitally sign the package. Note that you can perform this step only if you have created a *Java Archive* at the previous step. You will need a certificate signed by a trusted authority. To sign the *JAR* you can either use the *jarsigner* command line tool inside Oracle's Java Development Kit. ([JDK\_DIR]/bin/jarsigner.exe) or, if you are working with [Apache Ant](#), you can use the *signjar* task (a front for the *jarsigner* command line tool).

**Note:** The benefit of having a signed add-on is that you can verify the integrity of the add-on issuer. If you do not have such a certificate you can generate one yourself using the *keytool* command line tool. This approach is mostly recommended for tests since anyone can create a self signed certificate.

3. Create a descriptor file. You can use a template that Oxygen XML Developer provides. To use this template, go to **File > New** and select the **Oxygen add-ons update site** template. Once deployed, this descriptor file is referenced as *update site*.

Alternatively, you can use the **Add-ons Packager** plugin by following this procedure:

1. Install the **Add-ons Packager** plugin from <https://www.oxygenxml.com/InstData/Addons/optional/updateSite.xml> as described in the [Installing Add-ons procedure](#).
2. Restart Oxygen XML Developer. If the add-on is correctly installed, the **Add-ons packager** toolbar action is available.
3. Invoke the **Add-ons packager** toolbar action and input the required information in the displayed dialog box.
4. Press **OK** to complete the packaging process.

### Deploying an Add-on

To deploy an add-on, copy the ZIP or [Java Archive](#) file and the descriptor file to an HTTP server. The URL to this location serves as the *Update Site URL*.

### How to Share a Class Loader Between a Framework and Plugin

In some cases you may need to extend the functionality of Oxygen XML Developer both through a [framework](#) and through a [plugin](#). Normally, a *framework* and a *plugin* both run in their own private classloader. If the *framework* and the *plugin* use the same JAVA extensions/classes, it is recommended that they share the same classloader. This way, the common classes are loaded by only one *Class Loader* and they will both use the same static objects and have the ability to cast objects between one another.

To do this, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Document Type Association**, select the document type, go to the **Classpath** tab, and in the **Use parent classloader from plugin with ID** fields introduce the ID of the *plugin*. This ID is declared in the [configuration file of the plugin](#).

**Important:** The shared classes must be specified only in the configuration files of the *plugin*, and not in the configuration file and the document type class path at the same time.

## Creating and Running Automated Tests

If you have developed complex custom [plugin](#) or [framework](#) (document types), the best way to test your implementation and ensure that further changes will not interfere with the current behavior is to make automated tests for your customization.

An Oxygen XML Developer standalone installation includes a main `oxygen.jar` library located in the `[OXYGEN_INSTALL_DIR]`. That *JAR* library contains a base class for testing developer customizations named: `ro.sync.exml.workspace.api.PluginWorkspaceTCBase`.

To develop *JUnit* tests for your customizations using the **Eclipse** workbench, follow these steps:

1. Create a new Eclipse Java project and copy to it the entire contents of the `[OXYGEN_INSTALL_DIR]`.

2. Add all JAR libraries present in the `[OXYGEN_DIR]/lib` directory to the **Java Build Path->Libraries** tab. Make sure that the main JAR library `oxygen.jar` or `oxygenAuthor.jar` is the first one in the Java classpath by moving it up in the **Order and Export** tab.
3. Click **Add Library** and add the *JUnit* and *JFCUnit* libraries.
4. Create a new Java class that extends `ro.sync.xml.workspace.api.PluginWorkspaceTCBase`.
5. Pass the following parameters on to the constructor of the super class:
  - File `installationFolder` - The file path to the main application installation directory. If not specified, it defaults to the folder where the test is started.
  - File `frameworksFolder` - The file path to the frameworks directory. It can point to a custom *framework* directory where it resides.
  - File `pluginsFolder` - The file path to the plugins directory. It can point to a custom *plugin* directory where it resides.
  - File `optionsFolder` - The folder that contains the application options. If not specified, the application will auto-detect the location based on the started product ID.
  - String `licenseKey` - The license key used to license the test class.
  - int `productID` - The ID of the product and should be one of the following: `PluginWorkspaceTCBase.XML_AUTHOR_PRODUCT`, `PluginWorkspaceTCBase.XML_EDITOR_PRODUCT`, or `PluginWorkspaceTCBase.XML_DEVELOPER_PRODUCT`.
6. Create test methods that use the API in the base class to open XML files and perform various actions on them. Your test class could look something like this:

```

" <steps>\n" +
" <step>\n" +
" <cmd>Task step.</cmd>\n" +
" </step>\n" +
" </steps>\n" +
" </taskbody>\n" +
" </task>\n" +
" ", getCurrentEditorXMLContent());
}
}

```

## Debugging a Plugin Using the Eclipse Workbench

To debug problems in the code of a *plugin* without having to re-bundle the *plugin*'s Java classes in a *JAR* library, follow these steps:

1. [Download](#) and install Oxygen XML Developer.
2. Set up the Oxygen SDK following [this set of instructions](#).
3. Create an Eclipse Java Project (for example, MyPluginProject) from one of the sample *plugins* (the Workspace Access plugin, for example).
4. In the MyPluginProject folder, create a folder called myPlugin. In this new folder copy the plugin.xml file from the sample *plugin*. Modify the added plugin.xml to add a library reference to the directory where Eclipse copies the compiled output. To find out where this directory is located, invoke the contextual menu of the project (in the [Project view](#)), and go to **Build Path > Configure Build Path**. Then inspect the value of the **Default output folder** text box.

**Example:** If the compiled output folder is classes, then the you need to add in the plugin.xml the following library reference:

```
<library name="../../classes"/>
```

5. Copy the plugin.dtd from the [OXYGEN\_INSTALL\_DIR]/plugins folder in the root MyPluginProject folder.
6. In the MyPluginProject build path add external JAR references to all the JAR libraries in the [OXYGEN\_INSTALL\_DIR]/lib folder. Now your MyPluginProject should compile successfully.
7. In the Eclipse IDE, create a new *Java Application* configuration for debugging. Set the **Main class** box to ro.sync.exml.Oxygen. Click the **Arguments** tab and add the following code snippet in the **VM arguments** input box, making sure that the path to the plugins directory is the correct one:

```
-Dcom.oxygenxml.app.descriptor=ro.sync.exml.EditorFrameDescriptor -Xmx1024m
-XX:MaxPermSize=384m -Dcom.oxygenxml.editor.plugins.dir=D:\projects\MyPluginProject
```

**Note:** If you need to configure the *plugin* for Oxygen XML Developer, set the com.oxygenxml.app.descriptor to ro.sync.exml.DeveloperFrameDescriptor.

8. [Add a breakpoint](#) in the source of one of your Java classes.
9. Debug the created configuration. When the code reaches your *breakpoint*, the Eclipse IDE debugging perspective should take over.

## Debugging an Oxygen SDK Extension Using the Eclipse Workbench

To debug problems in an *extension* code without having to bundle its Java classes in a *JAR* library, perform the following steps:

1. [Download](#) and install Oxygen XML Developer.
2. Create an Eclipse Java Project (for example, MySDKProject) with the corresponding Java sources (for example, a custom implementation of the ro.sync.ecss.extensions.api.StylesFilter interface).
3. In the Project build path add external JAR references to all the JAR libraries in the [OXYGEN\_INSTALL\_DIR]/lib folder. Now your Project should compile successfully.
4. Start the standalone version of Oxygen XML Developer from the [OXYGEN\_INSTALL\_DIR] and in the [Document Type Association preferences page](#), edit the document type (for example, **DITA**) to open the [Document Type configuration dialog box](#). In the **Classpath** tab, add a reference to your Project's classes directory and in the **Extensions** tab, select your custom StylesFilter extension as a value for the **CSS styles filter** property. Close the application to save your changes.

5. Create a new Java Application configuration for debugging. The Main Class should be `ro.sync.exml.Oxygen`. The given VM Arguments should be:  
`-Dcom.oxygenxml.app.descriptor=ro.sync.exml.EditorFrameDescriptor -Xmx1024m -XX:MaxPermSize=384m`
6. [Add a breakpoint](#) in one of the source Java classes.
7. Debug the created configuration. When the code reaches your [breakpoint](#), the Eclipse IDE debugging *perspective* should take over.

## Disabling a Plugin

To disable a [plugin](#), use one of the following two methods:

- [Open the Preferences dialog box \(Options > Preferences\)](#), go to **Plugins**, and deselect the *plugin* that you want to disable.
- Create an empty file called `plugin.disable` next to the *plugin* configuration file (`plugin.xml`). The *plugin* will be disabled and will no longer be loaded by the application on startup.

**Note:** This is useful if you want to temporarily stop work on a *plugin* and use the application without it.

## API Frequently Asked Questions (API FAQ)

---

This section contains answers to common questions regarding the Oxygen XML Developer customizations using the [Oxygen SDK](#), or [Plugins](#).

For additional questions, [contact us](#). The preferred approach is via email because API questions must be analyzed thoroughly. We also provide code snippets, if they are required.

To stay up-to-date with the latest API changes, discuss issues and ask for solutions from other developers working with the *Oxygen SDK*, register on the [Oxygen-SDK mailing list](#).

### Add Custom Actions to the Contextual Menu?

#### Question

How do I add my own custom actions to the contextual menu using an API?

#### Answer

The `WSTextEditorPage.addPopupMenuCustomizer` API method allows you to customize the contextual menu shown in **Text** mode.

### Auto-Generate an ID When a Document is Opened or Created

#### Question

Is it possible to configure how the application generates ids? For project compliance we need ids having a certain format for each created topic.

#### Answer

This could be done implementing a [plugin](#) for Oxygen XML Developer using the [Plugins SDK](#):

There is a type of *plugin* called "Workspace Access" that can be used to add a listener to be notified when an editor is opened.

The implemented *plugin* would intercept the opened editor and editor page change events (which occur when a new editor is created) and generate a new ID attribute value on the root element.

The Java code would look like this:

```
pluginWorkspaceAccess.addEditorChangeListener(new WSEditorChangeListener() {
/**
```



```

* @see WSEditorChangeListener#editorOpened(java.net.URL)
*/
@Override
public void editorOpened(URL editorLocation) {
 WSEditor ed = pluginWorkspaceAccess.getEditorAccess
(editorLocation, PluginWorkspace.MAIN_EDITING_AREA);
 generateID(ed);
}
/**
* @see WSEditorChangeListener#editorPageChanged(java.net.URL)
*/
@Override
public void editorPageChanged(URL editorLocation) {
 WSEditor ed = pluginWorkspaceAccess.getEditorAccess
(editorLocation, PluginWorkspace.MAIN_EDITING_AREA);
 generateID(ed);
}

private void generateID(WSEditor ed) {
 if(ed.getCurrentPage() instanceof WSAuthorEditorPage) {
 WSAuthorEditorPage authorEditPage = (WSAuthorEditorPage) ed.getCurrentPage();
 AuthorDocumentController ctrl = authorEditPage.getDocumentController();
 AuthorElement root = ctrl.getAuthorDocumentNode().getRootElement();
 if(root.getAttribute("id") == null ||
!root.getAttribute("id").getValue().startsWith("generated_")) {
 ctrl.setAttribute("id", new AttrValue("generated_" + Math.random()), root);
 }
 }
}

}, PluginWorkspace.MAIN_EDITING_AREA);

```

## Customize the Default Icons for Toolbars/Menus

### Question

How can we change the default icons used for the application built-in actions?

### Answer

If you look inside the main *JAR* library `[OXYGEN_INSTALL_DIR]\lib\oxygen.jar` or `[OXYGEN_INSTALL_DIR]\lib\author.jar`, it contains an `images` folder that contains all the images that we use for our buttons, menus, and toolbars.

To overwrite them with your own creations, follow these steps:

1. In the `[OXYGEN_INSTALL_DIR]\lib` directory create a folder called `endorsed`.
2. In the `endorsed` folder create another folder called `images`.
3. Add your own images in the `images` folder.

You can use this mechanism to overwrite any kind of resource located in the main *Oxygen JAR library*. The folder structure in the `endorsed` directory and in the main *Oxygen JAR* must be identical.

## Customize the Outline View in Text Mode?

### Question

How do I customize the **Outline view** in **Text** mode?

### Answer

Suppose that you have the following XML document:

```

<doc startnumber="15">
 <sec counter="no">
 <info/>
 <title>Introduction</title>
 </sec>
 <sec>
 <title>Section title</title>
 <para>Content</para>
 <sec>
 <title>Section title</title>
 <para>Content</para>
 </sec>
 </sec>
</doc>
</sec>

```

```

 <title>Section title</title>
 <para>Content</para>
 </sec>
</doc>

```

and you want to display the XML content in a simplified Outline view like this:

```

doc "15"
sec Introduction
sec 15 Section title
sec 15.1 Section title
sec 16 Section title

```

Usually an Outline should have the following characteristics:

1. Double clicking in the Outline the corresponding XML content would get selected.
2. When the cursor moves in the opened XML document the Outline would select the proper entry.
3. When modifications occur in the document, the Outline would refresh.

A simple implementation using a Workspace Access plugin type could be something like this:

```

/**
 * Simple Outline for Text mode based on executing XPath's over the text content.
 */
public class CustomWorkspaceAccessPluginExtension implements
WorkspaceAccessPluginExtension {
 /**
 * The custom outline list.
 */
 private JList customOutlineList;

 /**
 * Maps outline nodes to ranges in document
 */
 private WSXMLTextNodeRange[] currentOutlineRanges;

 /**
 * The current text page
 */
 private WSXMLTextEditorPage currentTextPage;

 /**
 * Disable CaretListener when we select from the CaretListener.
 */
 private boolean enableCaretListener = true;

 /**
 * @see WorkspaceAccessPluginExtension#applicationStarted
 * (ro.sync.exml.workspace.api.standalone.StandalonePluginWorkspace)
 */
 @Override
 public void applicationStarted
 (final StandalonePluginWorkspace pluginWorkspaceAccess) {
 pluginWorkspaceAccess.addViewComponentCustomizer
 (new ViewComponentCustomizer() {
 /**
 * @see ViewComponentCustomizer#customizeView
 * (ro.sync.exml.workspace.api.standalone.ViewInfo)
 */
 @Override
 public void customizeView(ViewInfo viewInfo) {
 if(
 //The view ID defined in the "plugin.xml"
 "SampleWorkspaceAccessID".equals(viewInfo.getViewID()) {
 customOutlineList = new JList();
 //Render the content in the Outline.
 customOutlineList.setCellRenderer(new DefaultListCellRenderer() {
 /**
 * @see javax.swing.DefaultListCellRenderer#getListCellRendererComponent
 * (javax.swing.JList, java.lang.Object, int, boolean, boolean)
 */
 @Override
 public Component getListCellRendererComponent
 (JList<?> list, Object value, int index,
 boolean isSelected, boolean cellHasFocus) {
 JLabel label = (JLabel) super.getListCellRendererComponent
 (list, value, index, isSelected, cellHasFocus);
 String val = null;
 if(value instanceof Element) {
 Element element = ((Element)value);
 val = element.getNodeName();
 if(!"".equals(element.getAttribute("startnumber"))) {
 val += " " + "" + element.getAttribute("startnumber") + " ";
 }
 NodeList titles = element.getElementsByTagName("title");
 if(titles.getLength() > 0) {
 val += " \\" + titles.item(0).getTextContent() + " \\";
 }
 }
 return label;
 }
 });
 }
 }
 });
 }
}

```





```

 if(editorAccess != null) {
 WSEditorPage currentPage = editorAccess.getCurrentPage();
 if(currentPage instanceof WSXMLTextEditorPage) {
 //User editing in Text mode an opened XML document.
 WSXMLTextEditorPage xmlTP = (WSXMLTextEditorPage) currentPage;
 reconfigureOutline(xmlTP);
 }
 }
 }, StandalonePluginWorkspace.MAIN_EDITING_AREA);
}

/**
 * Reconfigure the outline
 *
 * @param xmlTP The XML Text page.
 */
protected void reconfigureOutline(final WSXMLTextEditorPage xmlTP) {
 try {
 //These are DOM nodes.
 Object[] evaluateXPath = xmlTP.evaluateXPath("//doc | //sec");
 //These are the ranges each node takes in the document.
 currentOutlineRanges = xmlTP.findElementsByXPath("//doc | //sec");
 currentTextPage = xmlTP;
 DefaultListModel listModel = new DefaultListModel();
 if(evaluateXPath != null) {
 for (int i = 0; i < evaluateXPath.length; i++) {
 listModel.addElement(evaluateXPath[i]);
 }
 }
 customOutlineList.setModel(listModel);
 } catch (XPathException ex) {
 ex.printStackTrace();
 }
}

/**
 * @see WorkspaceAccessPluginExtension#applicationClosing()
 */
@Override
public boolean applicationClosing() {
 return true;
}
}

```

## Dynamically Open File in Oxygen XML Developer Distributed via JavaWebStart

### Question

How can we dynamically open a file in an Oxygen XML Developer distributed via JWS?

### Answer

The JWS packager Ant build file that is included with Oxygen XML Developer signs by default the JNLP file (this means that a copy of it is included in the main JAR library) in this step:

```

<copy file="${outputDir}/${packageName}/${productName}.jnlp"
 tofile="${home}/JNLP-INF/APPLICATION.JNLP" />

```

Signing the JNLP file is required by newer Java versions and means that it is impossible to automatically generate a JNLP file containing some dynamic arguments. The solution is to use the signed JNLP template feature of Java 7, bundle inside the JAR library a signed APPLICATION\_TEMPLATE.JNLP instead of an APPLICATION.JNLP with a wildcard command line argument:

```

<application-desc main-class="ro.sync.jws.JwsDeployer">
 <argument>*</argument>
</application-desc>

```

Then you can replace the wildcard in the external placed JNLP to the actual, dynamic command line arguments value.

A different, more complicated approach would be to have the JNLP file signed and always referenced as a URL argument a location like this:

```

http://path/to/server/redirectEditedURL.php

```

When the URL gets clicked on the client side you would also call a PHP script on the server side that would update the redirect location for `redirectEditedURL.php` to point to the clicked XML resource. Then the opened Oxygen XML Developer would try to connect to the redirect PHP and be redirected to open the XML.

## Run XSLT or XQuery Transformations

### Question

Can I run XSL 2.0 / 3.0 transformation with Saxon EE using the *Oxygen SDK*?

### Answer

The API class `ro.sync.exml.workspace.api.util.XMLUtilAccess` allows you to create an XSLT Transformer that implements the JAXP interface `javax.xml.transform.Transformer`. Then this type of transformer can be used to transform XML. Here's just an example of transforming when you have an *AuthorAccess* API available:

```
InputSource is = new org.xml.sax.InputSource
(URLUtil.correct(new File("test/personal.xml")).toString());
xslSrc = new SAXSource(is);
javax.xml.transform.Transformer transformer =
authorAccess.getXMLUtilAccess().createXSLTTransformer
(xslSrc, null, AuthorXMLUtilAccess.TRANSFORMER_SAXON_ENTERPRISE_EDITION);
transformer.transform(new StreamSource(new File("test/personal.xml")),
new StreamResult(new File("test/personal.html"));
```

If you want to create the transformer from the *plugin* side, you can use this method instead:  
`ro.sync.exml.workspace.api.PluginWorkspace.getXMLUtilAccess()`.

## Save a New Document with a Predefined File Name Pattern

### Question

Is it possible to get Oxygen XML Developer to automatically generate a file name comprising a UUID plus file extension using the SDK?

### Answer

This could be done implementing a *plugin* for Oxygen XML Developer using the *Plugins SDK*.

There is a type of *plugin* called *Workspace Access* that can be used to add a listener to be notified before an opened editor is saved. The implemented *plugin* would intercept the save events when a newly created document is untitled and display an alternative chooser dialog box, then save the topic with the proper name.

The Java code would look like this:

```
private static class CustomEdListener extends WSEditorListener{
 private final WSEditor editor;
 private final StandalonePluginWorkspace
 pluginWorkspaceAccess;
 private boolean saving = false;
 public CustomEdListener
 (StandalonePluginWorkspace pluginWorkspaceAccess, WSEditor editor) {
 this.pluginWorkspaceAccess = pluginWorkspaceAccess;
 this.editor = editor;
 }
 @Override
 public boolean editorAboutToBeSavedVeto(int operationType) {
 if(! saving &&
 editor.getEditorLocation().toString().contains("Untitled")) {
 File chosenDir = pluginWorkspaceAccess.chooseDirectory();
 if(chosenDir != null) {
 final File chosenFile =
new File(chosenDir, UUID.randomUUID().toString() + ".dita");
 SwingUtilities.invokeLater(new Runnable() {
 @Override
 public void run() {
 try {
 saving = true;
 editor.saveAs(new URL(chosenFile.toURI().toASCIIString()));
 } catch (MalformedURLException e) {
 e.printStackTrace();
 } finally {
 saving = false;
 }
 }
 });
 }
 }
 }
}
```

```

 });
 }

 //Reject the original save request.
 return false;
}
return true;
}
}

@Override
public void applicationStarted
(final StandalonePluginWorkspace pluginWorkspaceAccess) {
 pluginWorkspaceAccess.addEditorChangeListener(new WSEditorChangeListener() {
 @Override
 public void editorOpened(URL editorLocation) {
 final WSEditor editor = pluginWorkspaceAccess.getEditorAccess
 (editorLocation, PluginWorkspace.MAIN_EDITING_AREA);
 if(editor !=
 null && editor.getEditorLocation().toString().contains("Untitled")) {

 //Untitled editor
 editor.addEditorListener(new CustomEdListener(pluginWorkspaceAccess, editor));
 }
 }
 },
 PluginWorkspace.MAIN_EDITING_AREA);

}

```

## Topics:

- [Batch Converter Add-on](#)
- [DITA Prolog Updater Add-on](#)
- [Excel XLSX Libraries Add-on](#)
- [ICU4J Library Add-on](#)
- [Saxon XSLT and XQuery Transformer Add-on](#)
- [Translation Package Builder Add-on](#)
- [XSpec Helper View Add-on](#)

Oxygen XML Developer offers various default [add-ons](#) that can be installed to provide additional functionality to Oxygen XML Developer. This chapter contains information about the default add-ons that are available to install directly from Oxygen XML Developer.

To install one of the default add-ons, follow this procedure:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml> in the **Show add-ons from** field or select it from the drop-down menu.
3. Select the add-on you want to install and click **Next**.
4. Restart the application.

## Batch Converter Add-on

Oxygen XML Developer offers an add-on that contributes actions in the **Tools** menu and contextual menu to enable batch conversion between various formats. You can convert between the following formats:

- HTML to XHTML
- HTML to DITA
- Markdown to XHTML
- Markdown to DITA
- XML to JSON
- JSON to XML
- HTML to DocBook4
- HTML to DocBook5
- Markdown to DocBook4
- Markdown to DocBook5

To install the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <https://raw.githubusercontent.com/oxygenxml/oxygen-resources-converter/master/build/addon.xml> in the **Show add-ons from** field.
3. Select the **Batch Converter** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** A **Batch Converter** submenu will now be available in the **Tools** menu and in the contextual menu of the **Project** view. This submenu will contain a list of the various types of available conversions. Selecting one of the types of conversions will open a dialog box where you can configure options for the conversion.

For more information, see the [details for this Batch Converter add-on in GitHub](#).

## DITA Prolog Updater Add-on

---

Oxygen XML Developer offers an add-on that contributes a preferences page (**Options > Preferences > Plugins > DITA Prolog Updater**) that includes various options for updating the *prolog* section of a DITA topic or map. The preferences page includes the following options that can be set for DITA topics or maps (or both):

- **Author** - Specifies the name of the author. By default, it is the system user name.
- **Enable automatic prolog update on save** - When this option is selected, the prolog is updated anytime the document is saved.
- **Set creator name** - When this option is selected, the author is set as the document's *creator* in the prolog when the document is saved. This option is only applicable for new documents.
- **Set created date** - When this option is selected, a *created date* is added to the prolog when the document is saved. This option is only applicable for new documents.
- **Update contributor names** - When this option is selected, the author is set as a *contributor* in the prolog when the document is saved. This option is only applicable for already existing documents.
- **Update revised dates** - When this option is selected, a *revised date* is added to the prolog when the document is saved. This option is only applicable for already existing documents.

To install the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <https://raw.githubusercontent.com/oxygenxml/dita-prolog-updater/master/build/addon.xml> in the **Show add-ons from** field.
3. Select the **DITA Prolog Updater** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** The **DITA Prolog Updater** preferences page will now be available in **Options > Preferences > Plugins**.

For more information, see the [details for this DITA Prolog Updater add-on in GitHub](#).

## Excel XLSX Libraries Add-on

---

To import spreadsheet data from Excel 2007 or newer (.xlsx), Oxygen XML Developer needs additional libraries from the Apache POI project. Oxygen XML Developer offers an add-on that provides this support.

To add this support, follow this procedure:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml> in the **Show add-ons from** field or select it from the drop-down menu.
3. Select **Excel XLSX libraries** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** You can now use the [Import wizard](#) to import data from Excel 2007 or newer.

### Related Information:

[Exporting XML Content to Excel](#) on page 401

## ICU4J Library Add-on

---

Oxygen XML Developer offers an add-on that provides the entire **ICU4J** JAR library used for sorting and collations with XSLT processors. The Saxon 9 XSLT processor has an `xs1:sort` element that can be used to sort elements based on their text content. If the XML elements contain text in exotic languages, Saxon needs a more powerful sort algorithm and this JAR library adds this capability.

To install it the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <https://raw.githubusercontent.com/oxygenxml/oxygenxml.icu4j.i18n/master/addon.xml> in the **Show add-ons from** field.
3. Select the **Contribute ICU4J Library** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** The ICU4J library is now contributed to the **Oxygen** installation directory.

For more information, see the [details for this Contribute ICU4J Library add-on in GitHub](#).

## Saxon XSLT and XQuery Transformer Add-on

---

Oxygen XML Developer offers an add-on that installs an external Saxon XSLT and XQuery processor and allows you to validate and transform XSLT and XQuery documents with that external processor. The default add-on update site includes both a Saxon 9.7 and 9.8 version of the add-on.

To install it the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml> in the **Show add-ons from** field or select it from the drop-down menu.
3. Select either the **Saxon 9.7 XSLT and XQuery Transformer** or **Saxon 9.8 XSLT and XQuery Transformer** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** When you configure the validation or transformation scenario, you will now have the option to choose the particular Saxon transformer.

**Restriction:** Debugging XSLT/XQuery transformations based on this engine is **NOT** supported.

## Translation Package Builder Add-on

---

Oxygen XML Developer offers an add-on that contributes contextual menu actions that help you build a translation package for DITA files that can be sent to translators. You can also extract the changed files back into your project once you receive the package back from the translators.

To install it the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Enter or paste <https://raw.githubusercontent.com/oxygenxml/Translation-Package-Builder/master/build/addon.xml> in the **Show add-ons from** field.
3. Select the **Translation Package Builder** add-on and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** A **Translation Package Builder** submenu will now be available in the contextual menu of the **DITA Maps Manager**. This submenu includes actions to generate a package of modified files that can be sent to translators, as well as an action to extract translated files back into your DITA project.

For more information, see the [details for this Translation Package Builder add-on in GitHub](#).

## XSpec Helper View Add-on

---

Oxygen XML Developer offers an add-on that contributes an **XSpec Test Results** view, that provides the ability to run XSpec test scenarios and view the results directly in the application.

To install the add-on, follow these instructions:

1. Go to **Help > Install new add-ons** to open the add-on selection dialog box.
2. Paste <https://www.oxygenxml.com/InstData/Addons/community/updateSite.xml> in the **Show add-ons from** field (or select it from the drop-down menu).
3. Select the **XSpec Helper View** plugin and the XSpec Framework (which the plugin needs) and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

The add-on contributes a  **Run XSpec test scenarios** button on the main toolbar. Click that button to execute an XSpec file and open its results in the **XSpec Test Results** view. At this point you can do the following:

- Switch to the XSLT and use the **Run** buttons in this view to execute a particular scenario.
- For each test, there is also a **Show** button that selects the corresponding test in the main editing area.
- For failed tests, you can click a particular test to open a diff comparison between the expected and actual results.

For more information, see the [details for this Oxygen XSpec Helper View add-on in GitHub](#).



## Topics:

- [Refactoring XML Documents](#)
- [Generating Sample XML Files](#)
- [Converting Schema to Another Schema Language](#)
- [Converting Database to XML Schema](#)
- [Flatten an XML Schema](#)
- [JSON to XML Converter](#)
- [XML to JSON Converter](#)
- [Compiling an XSL Stylesheet for Saxon](#)
- [Format and Indent \(Pretty-Print\) Multiple Files](#)
- [Generate Documentation](#)
- [Canonicalizing Files](#)
- [Signing Files](#)
- [Verifying Signature](#)
- [WSDL SOAP Analyzer](#)
- [XML Schema Regular Expressions Builder](#)
- [Large File Viewer](#)
- [Hex Viewer](#)
- [Standalone SVG Viewer](#)
- [Tree Editor](#)
- [Compare Files](#)
- [Compare Directories](#)
- [Compare Directories Against a Base \(3-Way\)](#)
- [Syncro SVN Client](#)
- [External Tools](#)

Oxygen XML Developer includes a variety of helpful tools to help you accomplish XML-related tasks. This section presents many of those tools. These tools are available in the **Tools** menu and some of them can be launched through keyboard shortcuts or command-line scripts.

## Refactoring XML Documents

In the life cycle of XML documents there are instances when the XML structure needs to be changed to accommodate various needs. For example, when an associated schema is updated, an attribute may have been removed, or a new element added to the structure.

These types of situations cannot be resolved with a traditional *Find/Replace* tool, even if the tool accepts regular expressions. The problem becomes even more complicated if an XML document is computed or referenced from multiple modules, since multiple resources need to be changed.

To assist you with these types of refactoring tasks, Oxygen XML Developer includes a specialized **XML Refactoring** tool that helps you manage the structure of your XML documents.

## XML Refactoring Tool

The **XML Refactoring** tool is presented in the form of an easy to use wizard that is designed to reduce the time and effort required to perform various structure management tasks. For example, you can insert, delete, or rename an attribute in all instances of a particular element that is found in all documents within your project.

To access the tool, select the  **XML Refactoring** action from one of the following locations:

- The **Tools** menu.
- The **Refactoring** submenu from the contextual menu in the **Project view**.

**Note:** The predefined refactoring operations are also available from the **Refactoring** submenu in the contextual menu of **Text** mode. This is useful because by selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to skip directly to the wizard page of the appropriate operation and to help you by preconfiguring some of the parameter values. For your convenience, the last 5 operations that were **finished** or **previewed** also appear in the **Refactoring** submenu of the contextual menu in the **Project view**.

## XML Refactoring Wizard

The XML Refactoring tool includes the following wizard pages:

### Refactoring operations

The first wizard page presents the available operations, grouped by category. To search for an operation, you can use the filter text box at the top of the page.

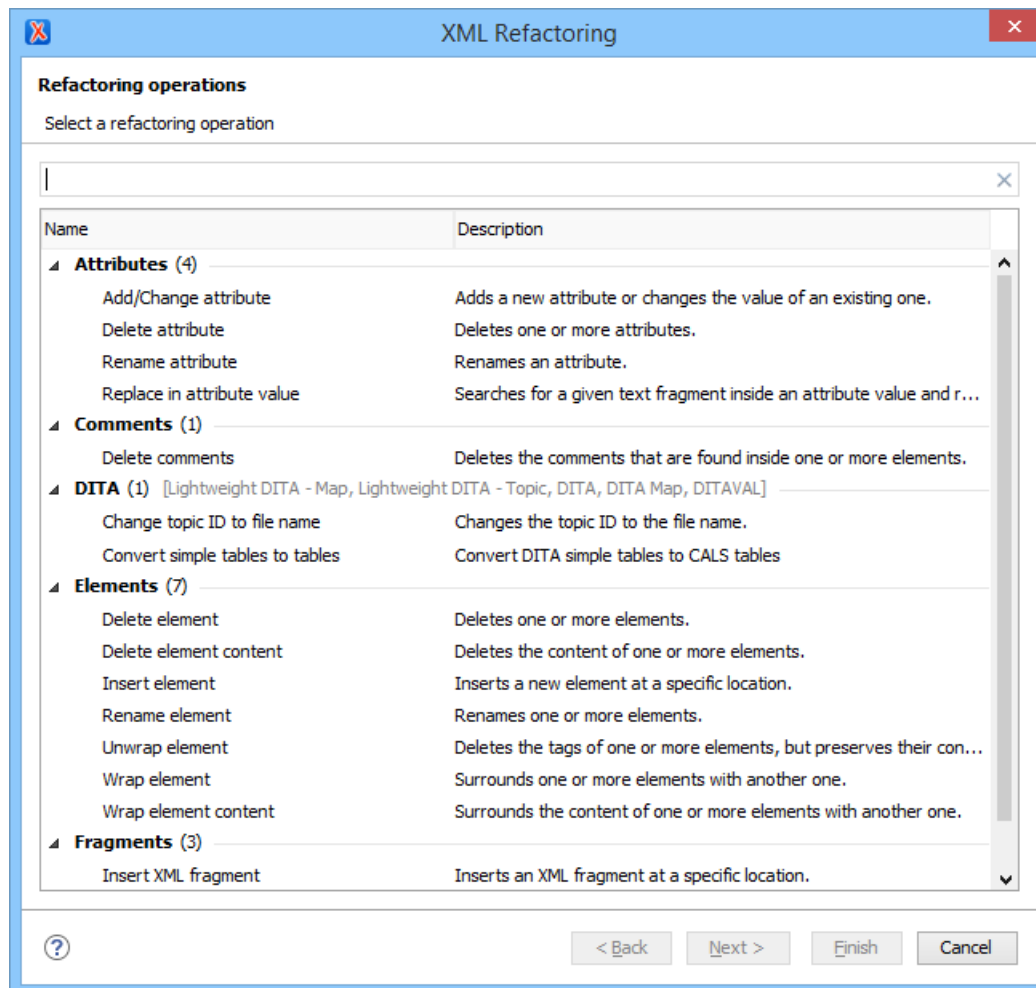


Figure 502: XML Refactoring Wizard

## Configure Operation Parameters

The next wizard page allows you to specify the parameters for the refactoring operation. The parameters are specific to the type of refactoring operation that is being performed. For example, to delete an attribute you need to specify the parent element and the qualified name of the attribute to be removed.

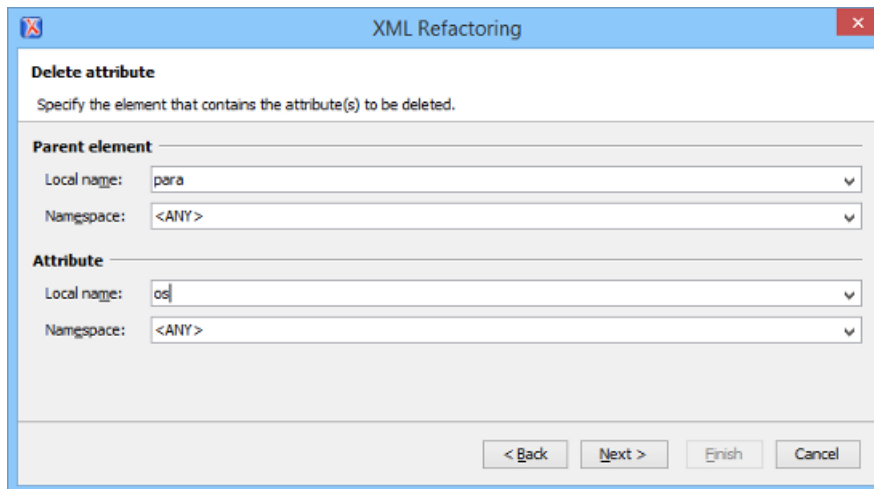


Figure 503: XML Refactoring 2nd Wizard Page (Delete Attribute Operation)

## Scope and Filters

The last wizard page allows you to select the set of files that represent the input of the operation.

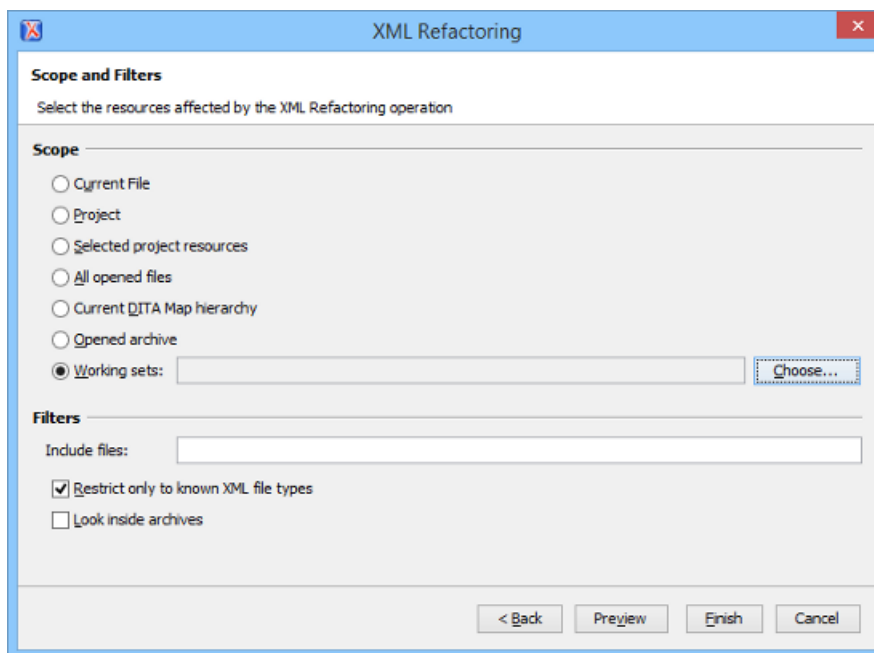


Figure 504: XML Refactoring - Scope and Filters Wizard Page

## Scope section

In the **Scope** section, you can select from predefined resource sets (such as the current file, your whole project, the current *DITA map* hierarchy for DITA projects, etc.) or you can define your own set of resources by creating a *working set*.

## Filters

The **Filters** section includes the following options:

- **Include files** - Allows you to filter the selected resources by using a file pattern. For example, to restrict the operation to only analyze build files you could use `build*.xml` for the file pattern.

- **Restrict only to known XML file types** - When selected, only resources with a known XML file type will be affected by the operation.
- **Look inside archives** - When selected, the resources inside archives will also be affected.

### Preview

You can use the **Preview** button to open a comparison panel where you can review all the changes that will be made by the refactoring operation before applying the changes.

### Finish

After clicking the **Finish** button, the operation will be processed and Oxygen XML Developer provides no automatic means for reverting the operations. Any **Undo** action will only revert changes on the current document.



**Trouble:** If an operation fails, a notification will be displayed in the **Results** panel with some information about the error. For example, if the operation was invoked on a read-only resource, the error will indicate that a read-only file cannot be converted.

**Tip:** If an operation takes longer than expected you can use the  **Stop** button in the progress bar to cancel the operation.

## Predefined Refactoring Operations

The XML Refactoring tool includes a variety of predefined operations that can be used for common refactoring tasks. They are grouped by category in the **Refactoring operations** wizard page. You can also access the operations from the **Refactoring** submenu in the contextual menu of **Text** mode. The operations are also grouped by category in this submenu. When selecting the operations from the contextual menu, Oxygen XML Developer considers the editing context to get the names and namespaces of the current element or attribute, and uses this information to preconfigure some of the parameter values for the selected refactoring operation.

**Tip:** Each operation includes a link in the lower part of the wizard that opens the **XML / XSLT-FO-XQuery / XPath** preferences page where you can configure XPath options and declare namespace prefixes.

The following predefined operations are available:

### Refactoring Operations for *Attributes*

#### Add/Change attribute

Use this operation to change the value of an attribute or insert a new one. This operation allows you to specify the following parameters:

- **Parent element** section
  - **Element** - The parent element of the attribute to be changed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** section
  - **Local name** - The local name of the affected attribute.
  - **Namespace** - The namespace of the affected attribute.
  - **Value** - The value for the affected attribute.
- **Options** section
  - You can choose between one of the following options for the **Operation mode**:
    - **Add the attribute in the parent elements where it is missing**
    - **Change the value in the parent elements where the attribute already exists**
    - **Both**

#### Convert attribute to element

Use this operation to convert a specified attribute to an element. This operation allows you to specify the following parameters:

- **Parent element** section

- **Element** - The parent element of the attribute to be converted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** section
  - **Local name** - The local name of the affected attribute.
  - **Namespace** - The namespace of the affected attribute.
- **New element** section
  - **Local name** - The local name of the new element.
  - **Namespace** - The namespace of the new element.

#### Delete attribute

Use this operation to remove one or more attributes. This operation requires you to specify the following parameters:

- **Element** - The parent element of the attribute to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** - The name of the attribute to be deleted.

#### Rename attribute

Use this operation to rename an attribute. This operation requires you to specify the following parameters:

- **Element** - The parent element of the attribute to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
- **Attribute** - The name of the attribute to be renamed.
- **New local name** - The new local name of the attribute.

#### Replace in attribute value

Use this operation to search for a text fragment inside an attribute value and change the fragment to a new value. This operation allows you to specify the following parameters:

- **Target attribute** section
  - **Element** - The parent element of the attribute to be modified, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.
  - **Attribute** - The name of the attribute to be modified.
- **Find / Replace** section
  - **Find** - The text fragments to find. You can use Perl-like regular expressions.
  - **Replace with** - The text fragment to replace the target with. This parameter can bind regular expression capturing groups (\$1, \$2, etc.) from the find pattern.

### Refactoring Operations for *Comments*

#### Delete comments

Use this operation to delete comments from one or more elements. This operation requires you specify the following parameter:

- **Element** - The target element (or elements) for which comments will be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

**Note:** Comments that are outside the root element will not be deleted because the *serializer* preserves the content before and after the root.

### Refactoring Operations for *DITA*

#### Change topic ID to file name

Use this operation to change the ID of a topic to be the same as its file name.

#### Convert CALS tables to simple tables

Use this operation to convert DITA CALS tables to simple tables.

### Convert conrefs to conkeyrefs

Use this operation to convert `conref` attributes to `conkeyref` attributes.

### Convert simple tables to CALS tables

Use this operation to convert DITA simple tables to CALS tables.

### Convert to Concept

Use this operation to convert a DITA topic (of any type) to a DITA Concept topic type (for example, Topic to Concept).

### Convert to General Task

Use this operation to convert a DITA topic (of any type) to a DITA General Task topic type (for example, Task to General Task).

### Convert to Reference

Use this operation to convert a DITA topic (of any type) to a DITA Reference topic type (for example, Topic to Reference).

### Convert to Task

Use this operation to convert a DITA topic (of any type) to a DITA Task topic type (for example, Topic to Task).

### Convert to Topic

Use this operation to convert a DITA topic (of any type) to a DITA Topic (for example, Task to Topic).

### Convert to Troubleshooting

Use this operation to convert a DITA topic (of any type) to a DITA Troubleshooting topic type (for example, Topic to Troubleshooting).

### Rename Key

Use this operation to rename a key. It also updates all references to it. Note that it does not work on DITA 1.3 key scopes.

All of these DITA refactoring actions allow you to choose a scope for the operation and some filters:

- **Scope** - Select from a variety of options to define the scope for which resources will be affected by the operation. For example, you can choose to affect all resources in the **Project**, **All opened files**, **Current DITA map hierarchy**, or just the **Current file**.
- **Filters** section
  - **Include files** - Specifies files to be excluded from the operation. You can specify multiple files by separating them with commas and the patterns can include wildcards (such as `*` or `?`).
  - **Restrict to known XML file types only** - Excludes non-XML file types from the operation.
  - **Look inside archives** - If this option is selected, the scope of the operation will include files inside archives.

## Refactoring Operations for *Elements*

### Delete element

Use this operation to delete elements. This operation requires you to specify the following parameter:

- **Element** - The target element to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

### Delete element content

Use this operation to delete the content of elements. This operation requires you to specify the following parameter:

- **Element** - The target element whose content is to be deleted, in the form of a local name from any namespace, a local name with a namespace prefix, or an XPath expression.

### Insert element

Use this operation to insert new elements. This operation allows you to specify the following parameters:

- **Element** section
  - **Local name** - The local name of the element to be inserted.

- **Namespace** - The namespace of the element to be inserted.
- **Location** section
  - **XPath** - An XPath expression that identifies an existing element to which the new element is relative, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
  - **Position** - The position where the new element will be inserted, in relation to the specified existing element. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.

### Rename element

Use this operation to rename elements. This operation requires you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be renamed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **New local name** - The new local name of the element.

### Unwrap element

Use this operation to remove the surrounding tags of elements, while keeping the content unchanged. This operation requires you to specify the following parameter:

- **Target elements (XPath)** - The target elements whose surrounding tags will be removed, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.

### Wrap element

Use this operation to surround elements with element tags. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be surrounded with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **Wrapper element** section
  - **Local name** - The local name of the *Wrapper element*.
  - **Namespace** - The namespace of the *Wrapper element*.

### Wrap element content

Use this operation to surround the content of elements with element tags. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements whose content will be surrounded with tags, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **Wrapper element** section
  - **Local name** - The local name of the *Wrapper element* that will surround the content of the target.
  - **Namespace** - The namespace of the *Wrapper element* that will surround the content of the target.

## Refactoring Operations for *Fragments*

### Insert XML fragment

Use this operation to insert an XML fragment. This operation allows you to specify the following:

- **XML Fragment** - The XML fragment to be inserted.
- **Location** section
  - **XPath** - An XPath expression that identifies an existing element to which the inserted fragment is relative, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
  - **Position** - The position where the fragment will be inserted, in relation to the specified existing element. The possible selections in the drop-down menu are: **After**, **Before**, **First child**, or **Last child**.

### Replace element content with XML fragment

Use this operation to replace the content of elements with an XML fragment. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements whose content will be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **XML Fragment** - The XML fragment with which to replace the content of the target element.

### Replace element with XML fragment

Use this operation to replace elements with an XML fragment. This operation allows you to specify the following parameters:

- **Target elements (XPath)** - The target elements to be replaced, in the form of a local name from any namespace, a local name with a namespace prefix, or other XPath expressions.
- **XML Fragment** - The XML fragment with which to replace the target element.

### Refactoring Operations for JATSKit

#### Add BITS DOCTYPE - NLM/NCBI Book Interchange 2.0

Use this operation to add an NLM 'BITS' 2.0 DOCTYPE declaration.

#### Add Blue DOCTYPE - NISO JATS Publishing 1.1

Use this operation to add a JATS 'Blue' 1.1 DOCTYPE declaration.

### Normalize IDs

Use this operation to normalize assigned IDs and assigned IDs to elements that are missing them.

All of these JATSKit refactoring actions allow you to choose a scope for the operation and some filters:

- **Scope** - Select from a variety of options to define the scope for which resources will be affected by the operation. For example, you can choose to affect all resources in the **Project**, **All opened files**, or just the **Current file**.
- **Filters** section
  - **Include files** - Specifies files to be excluded from the operation. You can specify multiple files by separating them with commas and the patterns can include wildcards (such as \* or ?).
  - **Restrict to known XML file types only** - Excludes non-XML file types from the operation.
  - **Look inside archives** - If this option is selected, the scope of the operation will include files inside archives.

### Additional Notes

**Note:** There are some operations that allow <ANY> for the **local name** and **namespace** parameters. This value can be used to select an element or attribute regardless of its local name or namespace. Also, the <NO\_NAMESPACE> value can be used to select nodes that do not belong to a namespace.

**Note:** Some operations have parameters that accept XPath expressions to match elements or attributes. In these XPath expressions you can only use the prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) page. This preferences page can be easily opened by clicking the link in the note (**Each prefix used in an XPath expression must be declared in the Default prefix-namespace mappings section**) at the bottom of the **Configure Operation Parameters** wizard page.

## Custom Refactoring Operations

While Oxygen XML Developer includes a variety of predefined XML refactoring operations to help you accomplish particular tasks, you can also create custom operations according to your specific needs. For example, you could create a custom refactoring operation to convert an attribute to an element and insert the element as the first child of the parent element.

An XML Refactoring operation is defined as a pair of resources:

- An *XQuery Update script* or *XSLT stylesheet* that Oxygen XML Developer will run to refactor the XML files.
- An *XML Operation Descriptor* file that contains information about the operation (such as the name, description, and parameters).



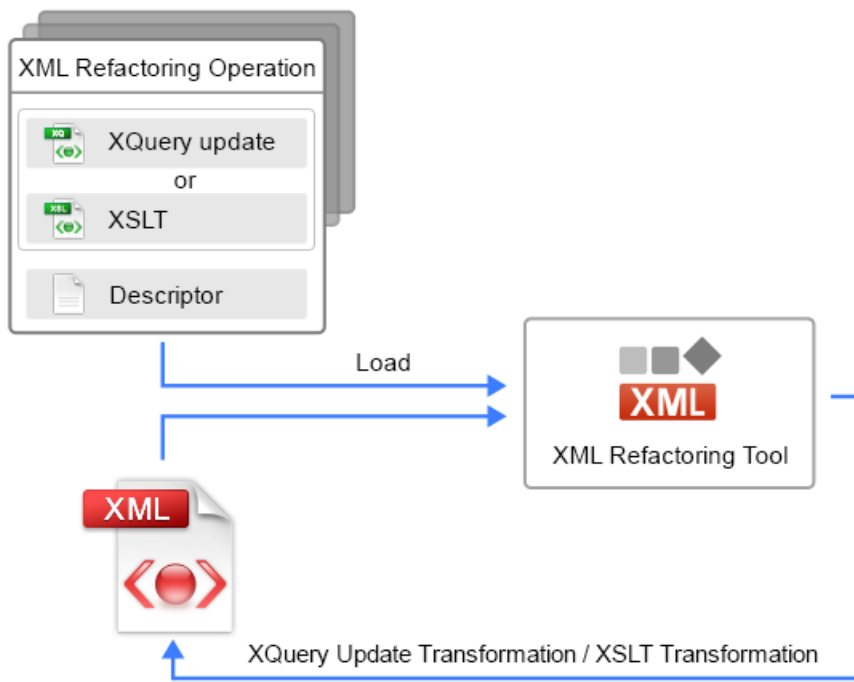


**Figure 505: Diagram of an XML Refactoring Operation**

All the defined custom operations are loaded by the **XML Refactoring Tool** and presented in the [Refactoring Operations wizard page](#), along with the predefined built-in operations.

After the user chooses an operation and specifies its parameters, Oxygen XML Developer processes an XQuery Update or XSLT transformation over the input file. This transformation is executed in a **safe mode**, which implies the following:

- When loading the document:
  - The **XInclude** mechanism is disabled. This means that the resources included by using XInclude will not be visible in the transformation.
  - The DTD entities will be processed without being expanded.
  - The associated DTD will be not loaded, so the default attributes declared in the DTD will not be visible in the transformation.
- When saving the updated XML document:
  - The DOCTYPE will be preserved.

**Note:** This can be changed using [Saxon extension functions in XSLT](#).

  - The DTD entities will be preserved as they are in the original document when the document is saved.
  - The attribute values will be kept in their original form without being normalized.
  - The spaces between attributes are preserved. Basically, the spaces are lost by a regular XML serialization since they are not considered important.

The result of this transformation overrides the initial input file.

**Note:** To achieve some of the previous goals, the XML Refactoring mechanism adds several attributes that are interpreted internally. The attributes belong to the `http://www.oxygenxml.com/ns/xmlRefactoring/additional_attributes` namespace. These attributes should not be taken into account when processing the input XML document since they are discarded when the transformed document is serialized.

**Restriction:** *Comments or processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation. In other words, XML Refactoring operations can only be applied on the root element and the nodes inside it. However, as a work around to this limitation, you can use [Saxon extension functions and the XSLT stylesheet method](#) to implement the new custom XML refactoring operation.

## Creating a Custom Refactoring Operation

To create a custom refactoring operation, follow these steps:

1. Create an [XQuery Update script](#) or [XSLT stylesheet file](#).
2. Create an **XML Refactoring Operation Descriptor** file contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#).
3. Store both files in [one of the locations that Oxygen XML Developer](#) scans when loading the custom operations.

**Result:** Once you run the **XML Refactoring** tool again, the custom operation appears in [the Refactoring Operations wizard page](#).

### Related Information:

[Storing and Sharing Refactoring Operations](#) on page 455

## Custom Refactoring Script

The first step in creating a custom refactoring operation is to create an [XQuery Update script](#) or [XSLT stylesheet](#) that is needed to process the refactoring operations. The easiest way to create this script file is to use the **New** document wizard to create a new **XQuery** or **XSLT** file and you can use our [XQuery method example](#) or [XSLT method example](#) to help you with the content.

There are cases when it is necessary to add parameters in the [XQuery script](#) or [XSLT stylesheet](#). For instance, if you want to rename an element, you may want to declare an external parameter associated with the name of the element to be renamed. To allow you to specify the value for these parameters, they need to be declared in the *refactoring operation descriptor file* that is associated with this operation.

**Note:** The XQuery Update processing is disabled by default in Oxygen XML Developer. Thus, if you want to create or edit an XQuery Update script you have to enable this mechanism by creating an [XQuery transformation scenario](#) and choose **Saxon EE** as the transformation engine. Also, you need to make sure the [Enable XQuery update](#) option is selected in the [Saxon processor advanced options](#).

**Note:** If you are using an XSLT file, XPath expressions that are passed as parameters will automatically be rewritten to conform with the mapping of the namespace prefixes declared in the [XML /XSLT-FO-XQuery / XPath preferences page](#).

The next step in creating a custom refactoring operation is to create an **XML Refactoring Operation Descriptor** file contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#).

### Related Information:

[XQuery Update Script for Creating a Custom Operation](#) on page 449

[XSLT Stylesheet for Creating a Custom Operation](#) on page 451

## Custom Refactoring Operation Descriptor File

The second step in creating a custom refactoring operation is to create an operation descriptor file. The easiest way to do this is to use the **New** document wizard and choose the **XML Refactoring Operation Descriptor** template.

### Introduction to the Descriptor File

This file contains information (such as name, description, and id) that is necessarily when loading an XML Refactoring operation . It also contains the path to the [XQuery Update script](#) or [XSLT stylesheet](#) that is associated with the particular operation through the `script` element.

You can specify a category for your custom operations to logically group certain operations. The category element is optional and if it is not included in the descriptor file, the default name of the category for the custom operations is *Other operations*.

The descriptor file is edited and validated against the following schema: `frameworks/xml_refactoring/operation_descriptor.xsd`.

## Declaring Parameters in the Descriptor File

If the XQuery Update script or XSLT stylesheet includes parameters, they should be declared in the **parameters** section of the descriptor file. All the parameters specified in this section of the descriptor file will be displayed in the **XML Refactoring** tool within [the Configure Operation Parameters wizard page](#) for that particular operation.

The value of the first description element in the **parameters** section will be displayed at the top of [the Configure Operation Parameters wizard page](#).

To declare a parameter, specify the following information:

- **label** - This value is displayed in the user interface for the parameter.
- **name** - The parameter name used in the XQuery Update script or XSLT stylesheet and it should be the same as the one declared in the script.
- **type** - Defines the type of the parameter and how it will be rendered. There are several types available:
  - TEXT - Generic type used to specify a simple text fragment.
  - XPATH - Type of parameter whose value is an XPath expression. For this type of parameter, Oxygen XML Developer will use a text input with corresponding content completion and syntax highlighting.

**Note:** The value of this parameter is transferred as plain text to the XQuery Update or XSLT transformation without being evaluated. You should evaluate the XPath expression inside the XQuery Update script or XSLT stylesheet. For example, you could use the `saxon:evaluate` Saxon extension function.

**Note:** A relative XPath expression is converted to an absolute XPath expression by adding `//` before it (`//XPathExp`). This conversion is done before transferring the XPath expression to the XML refactoring engine.

**Note:** When writing XPath expressions, you can only use prefixes declared in the [Options > Preferences > XML > XSLT-FO-XQUERY > XPath](#) options page.

- NAMESPACE - Used for editing namespace values.
- REG\_EXP\_FIND - Used when you want to match a certain text by using Perl-like regular expressions.
- REG\_EXP\_REPLACE - Used along with REG\_EXP\_FIND to specify the replacement string.
- XML\_FRAGMENT - This type is used when you want to specify an XML fragment. For this type, Oxygen XML Developer will display a text area specialized for inserting XML documents.
- NC\_NAME - The parameter for NC\_NAME values. It is useful when you want to specify the local part of a [QName](#) for an element or attribute.
- BOOLEAN - Used to edit boolean parameters.
- TEXT\_CHOICE - It is useful for parameters whose value should be from a list of possible values. Oxygen XML Developer renders each possible value as a radio button option.
- **description** - The description of the parameter. It is used by the application to display a tooltip when you hover over the parameter.
- **possibleValues** - Contains the list with possible values for the parameter and you can specify the default value, as in the following example:

```
<possibleValues onlyPossibleValuesAllowed="true">
 <value name="before">Before</value>
 <value name="after" default="true">After</value>
 <value name="firstChild">First child</value>
 <value name="lastChild">Last child</value>
</possibleValues>
```

## Specialized Parameters to Match Elements or Attributes

If you want to match elements or attributes, you can use some specialized parameters, in which case Oxygen XML Developer will propose all declared elements or attributes based on the schema associated with the currently edited file. The following specialized parameters are supported:

### elementLocation

This parameter is used to match elements. For this type of parameter, the application displays a text field where you can enter the element name or an XPath expression. The text from the `label` attribute is displayed in the application as the label of the text field. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If the value of the `useCurrentContext`

attribute is set to **true**, the element name from the cursor position is used as proposed values for this parameter.

Example of an `elementLocation`:

```
<elementLocation name="elem_loc" useCurrentContext="false">
 <element label="Element location">
 <description>Element location description.</description>
 </element>
</ ElementLocation>
```

### **attributeLocation**

This parameter is used to match attributes. For this type of parameter, the application displays two text fields where you can enter the parent element name and the attribute name (both text fields accept XPath expressions for a finer match). The text from the `label` attributes is displayed in the application as the label of the associated text fields. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. The value of this parameter is an XPath expression that is computed by using the values of the expression from the `element` and `attribute` text fields. For example, if `section` is entered for the element and `title` is entered for the attribute, the XPath expression would be computed as `//section/@title`. If the value of the `useCurrentContext` attribute is set to `true`, the element and attribute name from the cursor position is used as proposed values for the operation parameters.

Example of an `attributeLocation`:

```
<attributeLocation name="attr_xpath" useCurrentContext="true">
 <element label="Element path">
 <description>Element path description.</description>
 </element>
 <attribute label="Attribute" >
 <description>Attribute path description.</description>
 </attribute>
</ AttributeLocation>
```

### **elementParameter**

This parameter is used to specify elements by local name and namespace. For this type of parameter, the application displays two combo boxes with elements and namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as label of the associated combo. The `name` attribute is used to specify the name of the parameter from the XQuery Update script or XSLT stylesheet. If you specify the `allowsAny` attribute, the application will propose `<ANY>` as a possible value for the **Name** and **Namespace** combo boxes. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the element name and namespace from the cursor position is used as proposed values for the operation parameters.

Example of an `elementParameter`:

```
<elementParameter id="elemID" useCurrentContext="true">
 <localName label="Name" name="element_localName" allowsAny="true">
 <description>Local name of the parent element.</description>
 </localName>
 <namespace label="Namespace" name="element_namespace" allowsAny="true">
 <description>Local name of the parent element</description>
 </namespace>
</elementParameter>
```

### **attributeParameter**

This parameter is used to specify attributes by local name and namespace. For this type of parameter, the application displays two combo boxes with attributes and their namespaces collected from the associated schema of the currently edited file. The text from the `label` attribute is displayed in the application as the label of the associated combo box. You can also use the `useCurrentContext` attribute and if its value is set to `true`, the attribute name and namespace from the cursor position is used as proposed values for the operation parameters.

**Note:** An `attributeParameter` is dependant upon an `elementParameter`. The list of attributes and namespaces are computed based on the selection in the `elementParameter` combo boxes.

Example of an `attributeParameter`:

```
<attributeParameter dependsOn="elemID" useCurrentContext="true">
```

```

<localName label="Name" name="attribute_localName">
 <description>The name of the attribute to be converted.</description>
</localName>
<namespace label="Namespace" name="attribute_namespace" allowsAny="true">
 <description>Namespace of the attribute to be converted.</description>
</namespace>
</attributeParameter>

```

**Note:** All predefined operations are loaded from the `[OXYGEN_INSTALL_DIR]/refactoring` folder.

#### Related Information:

[Example of an Operation Descriptor File with an XSLT Stylesheet](#) on page 453

[Example of an Operation Descriptor File with an XQuery Update script](#) on page 450

### XSLT Stylesheet for Creating a Custom Operation

To demonstrate creating a custom operation, consider that we have a task where we need to convert an attribute into an element and insert it inside another element. A specific example would be if you have a project with a variety of image elements where a deprecated `alt` attribute was used for the description and you want to convert all instances of that attribute into an element with the same name and insert it as the first child of the image element.

Thus, our task is to convert this attribute into an element with the same name and insert it as the first child of the image element.

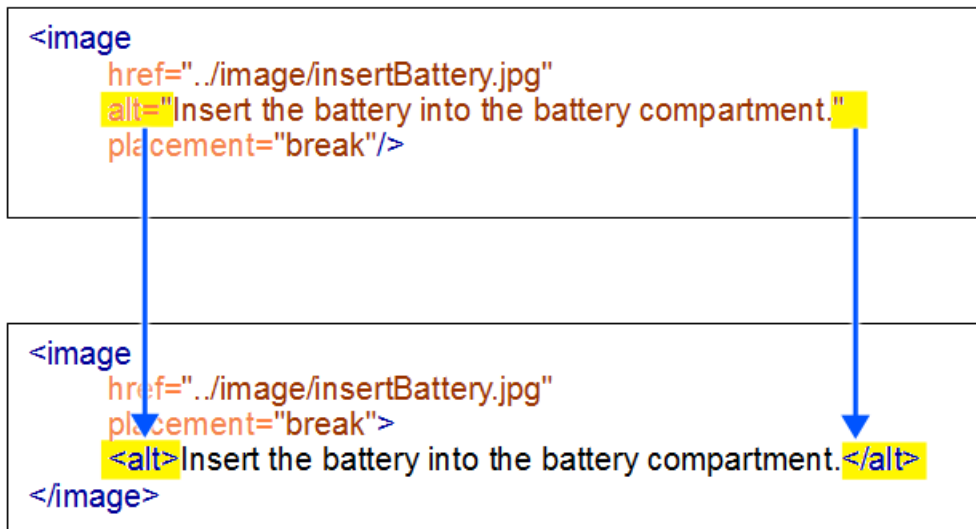


**Figure 506: Example: Custom XML Refactoring Operation**

We can use an XSLT stylesheet to implement the new custom XML refactoring operation. The second requirement is an [XML Refactoring operation descriptor file](#) that contains the path to the XSLT stylesheet.

#### Example of an XSLT Script for Creating a Custom Operation to *Convert an Attribute to an Element*

The XSLT stylesheet does the following:

- Iterates over all elements from the document that have the specified local name and namespace.
- Finds the attribute that will be converted to an element.
- Adds the new element as the first child of the parent element.

```

<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:xs="http://www.w3.org/2001/XMLSchema"
 exclude-result-prefixes="xs"
 xmlns:xr="http://www.oxygenxml.com/ns/xmlRefactoring"
 version="2.0">
 <xsl:import
 href="http://www.oxygenxml.com/ns/xmlRefactoring/resources/commons.xsl"/>

```

```

<xsl:param name="element_localName" as="xs:string" required="yes"/>
<xsl:param name="element_namespace" as="xs:string" required="yes"/>
<xsl:param name="attribute_localName" as="xs:string" required="yes"/>
<xsl:param name="attribute_namespace" as="xs:string" required="yes"/>
<xsl:param name="new_element_localName" as="xs:string" required="yes"/>
<xsl:param name="new_element_namespace" as="xs:string" required="yes"/>

<xsl:template match="node() | @*">
 <xsl:copy>
 <xsl:apply-templates select="node() | @*" />
 </xsl:copy>
</xsl:template>
<xsl:template match="//*[xr:check-local-name($element_localName, ., true())
and
xr:check-namespace-uri($element_namespace, .)]">

 <xsl:variable name="attributeToConvert"
select="*[xr:check-local-name($attribute_localName, ., true())
and
xr:check-namespace-uri($attribute_namespace, .)]"/>

 <xsl:choose>
 <xsl:when test="empty($attributeToConvert)">
 <xsl:copy>
 <xsl:apply-templates select="node() | @*" />
 </xsl:copy>
 </xsl:when>
 <xsl:otherwise>
 <xsl:copy>
 <xsl:for-each select="*[empty(. intersect $attributeToConvert)]">
 <xsl:copy-of select="."/>
 </xsl:for-each>
 <!-- The new element namespace -->
 <xsl:variable name="nsURI" as="xs:string">
 <xsl:choose>
 <xsl:when test="$new_element_namespace eq $xr:NO-NAMESPACE">
 <xsl:value-of select="''"/>
 </xsl:when>
 <xsl:otherwise>
 <xsl:value-of select="$new_element_namespace"/>
 </xsl:otherwise>
 </xsl:choose>
 </xsl:variable>
 <xsl:element name="{ $new_element_localName }" namespace="{ $nsURI }">
 <xsl:value-of select="$attributeToConvert"/>
 </xsl:element>
 <xsl:apply-templates select="node()" />
 </xsl:copy>
 </xsl:otherwise>
 </xsl:choose>
</xsl:template>
</xsl:stylesheet>

```

**Note:** The XSLT stylesheet imports a module library that contains utility functions and variables. The location of this module is resolved via an [XML Catalog](#) set in the XML Refactoring [framework](#).

### Example of an Operation Descriptor File That References the XSLT Stylesheet for Creating a Custom Operation to Convert an Attribute to an Element

After you have developed the XSLT stylesheet, you have to create an XML Refactoring operation descriptor. This descriptor is used by the application to load the operation details such as name, description, or parameters.

```

<?xml version="1.0" encoding="UTF-8"?>

<refactoringOperationDescriptor
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
xmlns="http://www.oxygenxml.com/ns/xmlRefactoring"
id="convert-attribute-to-element"
name="Convert attribute to element">
 <description>Converts the specified attribute to an element.
 The new element will be inserted as first child of the attribute's
 parent element.</description>
 <!-- For the XSLT stylesheet option uncomment the following line and comment
 the line referring the XQuery Update script -->
 <!-- <script type="XSLT" href="convert-attribute-to-element.xsl"/> -->
 <script type="XQUERY_UPDATE" href="convert-attribute-to-element.xq"/>
 <parameters>
 <description>Specify the attribute to be converted to element.</description>
 <section label="Parent element">
 <elementParameter id="elemID">
 <localName label="Name" name="element_localName" allowsAny="true">
 <description>Local name of the parent element.</description>
 </localName>
 <namespace label="Namespace" name="element_namespace" allowsAny="true">
 <description>Local name of the parent element</description>
 </namespace>
 </elementParameter>
 </section>
 <section label="Attribute">

```

```

<attributeParameter dependsOn="elemID">
 <localName label="Name" name="attribute_localName">
 <description>Name of the attribute to be converted.</description>
 </localName>
 <namespace label="Namespace" name="attribute_namespace" allowsAny="true">
 <description>Namespace of the attribute to be converted.</description>
 </namespace>
</attributeParameter>
</section>
<section label="New element">
 <elementParameter>
 <localName label="Name" name="new_element_localName">
 <description>The name of the new element.</description>
 </localName>
 <namespace label="Namespace" name="new_element_namespace">
 <description>The namespace of the new element.</description>
 </namespace>
 </elementParameter>
</section>
</parameters>
</refactoringOperationDescriptor>

```

**Note:** If you are using an XSLT file, the line with the script element would look like this:

```
<script type="XSLT" href="convert-attribute-to-element.xsl"/>
```

## Results

After you have created these files, copy them into a folder scanned by Oxygen XML Developer when it loads the custom operation. When the XML Refactoring tool is started again, you will see the created operation.

Since various parameters can be specified, this custom operation can also be used for other similar tasks. The following image shows the parameters that can be specified in our example of the custom operation to convert an attribute to an element:

Figure 507: Example: XML Refactoring Wizard for a Custom Operation

## Using Saxon Extension Functions to Allow Custom Refactoring Operations to Read and Modify Content Outside the Root Node

One advantage to using an XSLT stylesheet is that there is limitation when using an [XQuery Update script](#) in that refactoring operations can only be performed on *comments* or *processing instructions* that are inside the root element. Thus, using the XQuery method, *comments* or *processing instructions* that are in any node before or after the root element cannot be modified by an XML Refactoring operation.

The XSLT stylesheet method offers a work around to this limitation through the use of some Saxon extension functions.

To illustrate the use of these functions, consider the following sample XML file:

```

<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->

```



```
<?pi before root ?>
<root>
 <child></child>
</root>
<!-- comment after root -->
<?pi after root ?>
```

The following Saxon extension functions can be used to read and modify content outside the root node:

**Note:** They belong to the `http://www.oxygenxml.com/ns/xmlRefactoring/functions` namespace.

- **get-content-after-root()** - Returns the content after root as `xs:string`.

For the XML above, the call of this function will return the following string value:

```
<!-- comment after root -->
<?pi after root ?>
```

- **set-content-after-root(xs:string)** - Updates the content that will be serialized in the refactored document after the root node.

The function call `set-content-after-root('&lt;!-- Inserted comment -->')` will result in replacing the nodes after the root element with the comment passed as string argument. The XML document will be modified as follows:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->
<?pi before root ?>
<root>
 <child></child>
</root><!-- Inserted comment -->
```

- **get-content-before-root()** - Returns the content before root as `xs:string`.

For the XML above, the call of this function will return the following string value:

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- comment before root -->
<?pi before root ?>
```

- **set-content-before-root(xs:string)** - Updates the content that will be serialized in the refactored document after the root node.

The function call `set-content-before-root('&lt;!-- Inserted comment -->')` will result in replacing the nodes before the root element with the comment passed as string argument. The XML document will be modified as follows:

```
<!-- Inserted comment --><root>
 <child></child>
</root>
<!-- comment after root -->
<?pi after root ?>
```

## **XSLT Example:**

To process content after the root node, the XSLT would look like this:

```
<?xml version="1.0" encoding="UTF-8"?>
<xsl:stylesheet xmlns:xsl="http://www.w3.org/1999/XSL/Transform"
 xmlns:xs="http://www.w3.org/2001/XMLSchema" exclude-result-prefixes="xs"
 xmlns:xrf="http://www.oxygenxml.com/ns/xmlRefactoring/functions" version="3.0">
 <xsl:template match="/">
 <!-- The comment content that will be inserted after the root element -->
 <xsl:variable name="commentAsText"><!-- COMMENT ADDED FROM XR OPERATION--></-->
 </xsl:variable>
 <!-- Retrieve the content after the root element as is -->
 <xsl:variable name="after-root-content" as="xs:string"
 select="xrf:get-content-after-root()" />
 <xsl:variable name="processedContent"
 select="concat($after-root-content, $commentAsText)" />
 <!-- Update the content after the root element -->
 <xsl:value-of select="xrf:set-content-after-root($processedContent)" />
 <xsl:apply-templates/>
 </xsl:template>
 <xsl:template match="node() | @*">
 <xsl:copy>
```



```

 <xsl:apply-templates select="node() | @" />
 </xsl:copy>
</xsl:template>
</xsl:stylesheet>

```

**Note:** The above XSLT retrieves the nodes after the root element as string, appends a new comment, and then sets back the updated content into the XML document.

## Storing and Sharing Refactoring Operations

Oxygen XML Developer scans the following locations when looking for XML Refactoring operations to provide flexibility:

- A refactoring folder, created inside a directory that is associated to a *framework* you are customizing. To associate the parent directory to the *framework*, you need to add it in the [Classpath tab of the Document type configuration dialog box](#).
- A folder that you specify in the [Load additional refactoring operations from text box](#) in the [XML Refactoring preferences page](#).

**Note:** If you share a project with your team, you can also share the custom operation by doing the following:

1. Save the custom operation in a folder that is part of your project.
  2. Switch the **XML Refactoring** option page to [project level](#):
    - a. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **XML > XML Refactoring**.
    - b. Select **Project Options** at the bottom of the dialog box.
  3. In the [Load additional refactoring operations from text box](#), use the `${pd}` editor variable so that the folder path is declared relative to the project.
- A folder specified by the [XML Refactoring Operations Plugin Extension](#).
  - The refactoring folder from the Oxygen XML Developer installation directory (`[OXYGEN_INSTALL_DIR] / refactoring/`).

### Sharing Custom Refactoring Operations

The purpose of Oxygen XML Developer scanning multiple locations for the XML Refactoring operations is to provide more flexibility for developers who want to share the refactoring operations with the other team members. Depending on your particular use case, you can attach the custom refactoring operations to other resources, such as *framework* or projects.

After storing custom operations, you can share them with other users by sharing the resources.

## Localizing XML Refactoring Operations

Oxygen XML Developer includes localization support for the XML refactoring operations.

The translation keys for the built-in refactoring operations are located in `[OXYGEN_INSTALL_DIR] / refactoring/i18n/translation.xml`.

The localization support is also available for custom refactoring operations. The following information can be translated:

- The operation name, description, and category.
- The description of the parameters element.
- The label, description, and possibleValues for each parameter.

Translated refactoring information uses the following form:

```

${i18n(translation_key)}

```

Oxygen XML Developer scans the following locations to find the `translation.xml` files that are used to load the translation keys:

- A `refactoring/i18n` folder, created inside a directory that is associated to a customized *framework*.
- A `i18n` folder, created inside a directory that is associated to a customized *framework*.

- An i18n folder inside any specified folder. In this case, you need to [open the Preferences dialog box \(Options > Preferences\)](#), go to **XML > XML Refactoring**, and specify the folder in the **Load additional refactoring operations from** text box.
- An i18n folder located in directories specified through the [XML Refactoring Operations Plugin Extension](#).
- The refactoring/i18n folder from the Oxygen XML Developer installation directory (`[OXYGEN_INSTALL_DIR]/refactoring/i18n`).

#### Example: Refactoring Operation Descriptor File with *i18n* Support

```
<?xml version="1.0" encoding="UTF-8"?>
<refactoringOperationDescriptor
 xmlns="http://www.oxygenxml.com/ns/xmlRefactoring" id="remove_text_content"
 name="{i18n(Remove_text_content)}">
 <description>{i18n(Remove_text_content_description)}</description>
 <script type="XQUERY_UPDATE" href="remove_text_content.xq"/>
 <parameters>
 <description>{i18n(parameters_description)}</description>
 <parameter label="{i18n(Element_name)}" name="element_localName"
 type="NC_NAME">
 <description>{i18n(Element_name_descriptor)}</description>
 <possibleValues>
 <value default="true" name="value1">{i18n(value_1)}</value>
 <value name="value2">{i18n(value_2)}</value>
 </possibleValues>
 </parameter>
 </parameters>
</refactoringOperationDescriptor>
```

## Generating Sample XML Files

Oxygen XML Developer offers support to generate sample XML files both from XML schema 1.0 and XML schema 1.1, depending on the XML schema version set in [XML Schema preferences page](#).

To generate sample XML files from an XML Schema, use the  **Generate Sample XML Files** action from the **Tools** menu. This action is also available in the contextual menu of the schema [Design mode](#). The action opens the **Generate Sample XML Files** dialog box that allows you to configure a variety of options for generating the files.

The **Generate Sample XML Files** dialog box contains three tabs with various configurable options. Default values for these options can be set in the [Sample XML Files Generator preferences page](#). You can also run the tool from the command line using exported options.

### Schema Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The first set of options are found in the **Schema** tab.

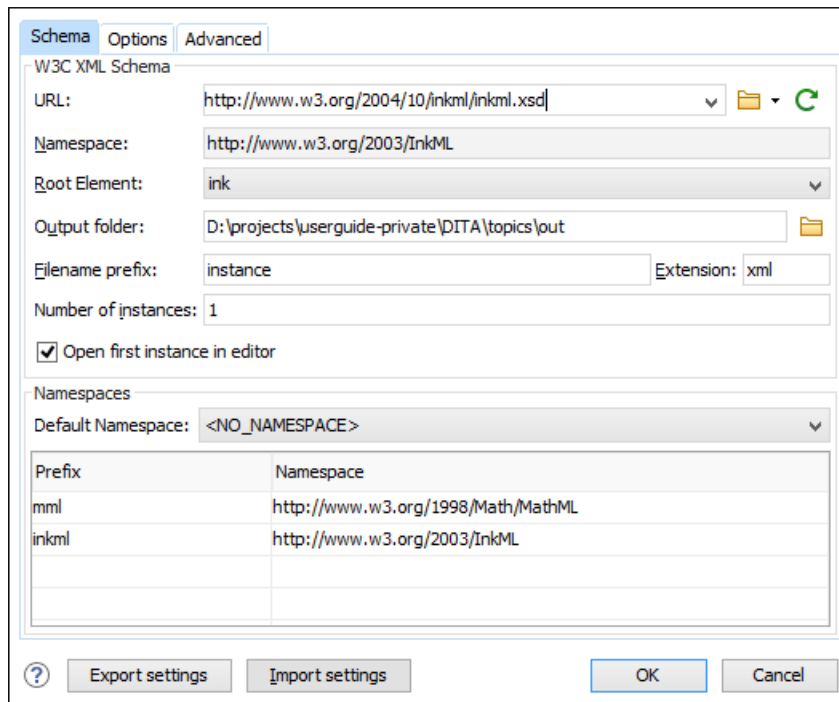


**Figure 508: Generate Sample XML Files Dialog Box (Schema Tab)**

This tab includes the following options:

#### URL

Specifies the URL of the Schema location. You can specify the path by using the text field, the history drop-down menu, or the browsing tools in the **Browse** drop-down list.

#### Namespace

Displays the namespace of the selected schema.

#### Root Element

After the schema is selected, this drop-down menu is populated with all root candidates gathered from the schema. Choose the root of the output XML documents.

#### Output folder

Path to the folder where the generated XML instances will be saved.

#### Filename prefix and Extension

You can specify the prefix and extension for the file name that will be generated. Generated file names have the following format: `prefixN.extension`, where N represents an incremental number from 0 up to the specified [Number of instances](#).

#### Number of instances

The number of XML files to be generated.

#### Open first instance in editor

When selected, the first generated XML file is opened in the editor.

#### Namespaces section

You can specify the **Default Namespace**, as well as the prefixes for the namespaces.

#### Export settings

Use this button to save the current settings for future use.


#### Import settings

Use this button to load previously exported settings.

You can click **OK** at any point to generate the sample XML files.

## Options Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The **Options** tab allows you to set specific options for namespaces and elements.

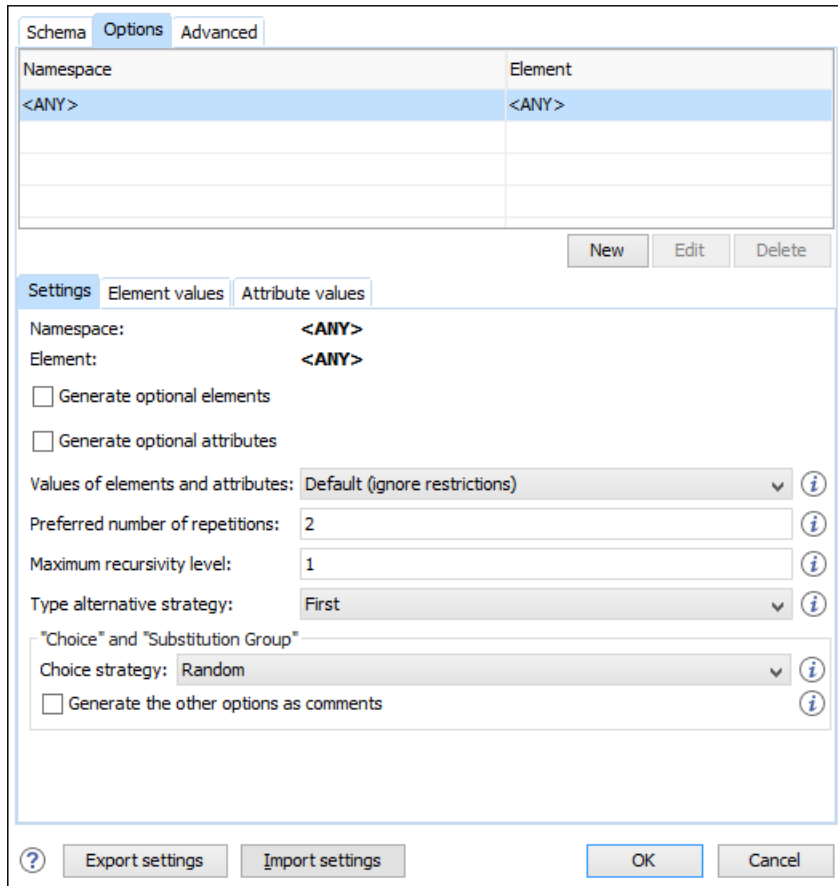

The screenshot shows the 'Options' tab of the 'Generate Sample XML Files' dialog box. It features a table for 'Namespace' and 'Element' settings, and a 'Settings' subtab with various configuration options.

| Namespace | Element |
|-----------|---------|
| <ANY>     | <ANY>   |
|           |         |
|           |         |
|           |         |

Buttons: New, Edit, Delete

**Settings** | Element values | Attribute values

Namespace: <ANY>  
Element: <ANY>

☐ Generate optional elements  
☐ Generate optional attributes

Values of elements and attributes: Default (ignore restrictions) ⓘ

Preferred number of repetitions: 2 ⓘ

Maximum recursivity level: 1 ⓘ

Type alternative strategy: First ⓘ

"Choice" and "Substitution Group"

Choice strategy: Random ⓘ

☐ Generate the other options as comments ⓘ

Buttons: ? Export settings Import settings OK Cancel

**Figure 509: Generate Sample XML Files Dialog Box (Options Tab)**

This tab includes the following options:

### Namespace / Element table

Allows you to set a namespace for each element name that appears in an XML document instance. The following prefix-to-namespace associations are available:

- All elements from all namespaces (<ANY> - <ANY>). This is the default setting.
- All elements from a specific namespace.
- A specific element from a specific namespace.

### Settings subtab

#### Namespace

Displays the namespace specified in the table at the top of the dialog box.

#### Element

Displays the element specified in the table at the top of the dialog box.

#### Generate optional elements

When selected, all elements are generated, including the optional ones (having the minOccurs attribute set to 0 in the schema).

#### Generate optional attributes

When selected, all attributes are generated, including the optional ones (having the use attribute set to optional in the schema).

## Values of elements and attributes

Controls the content of generated attribute and element values. The following choices are available:

- **None** - No content is inserted.
- **Default** - Inserts a default value depending of data type descriptor of the particular element or attribute. The default value can be either the data type name or an incremental name of the attribute or element (according to the global option from the **Sample XML Files Generator** preferences page). Note that type restrictions are ignored when this option is selected. For example, if an element is of a type that restricts an **xs:string** with the **xs:maxLength** facet to allow strings with a maximum length of 3, the XML instance generator tool may generate string element values longer than 3 characters.
- **Random** - Inserts a random value depending of data type descriptor of the particular element or attribute.

**Important:** If all of the following are true, the **Generate Sample XML Files** tool outputs invalid values:

- At least one of the restrictions is a regexp.
- The value generated after applying the regexp does not match the restrictions imposed by one of the facets.

## Preferred number of repetitions

Allows you to set the preferred number of repeating elements related to `minOccurs` and `maxOccurs` facets defined in the XML Schema.

- If the value set here is between `minOccurs` and `maxOccurs`, then that value is used.
- If the value set here is less than `minOccurs`, then the `minOccurs` value is used.
- If the value set here is greater than `maxOccurs`, then `maxOccurs` is used.

## Maximum recursion level

If a recursion is found, this option controls the maximum allowed depth of the same element.

## Type alternative strategy

Used for the `xs:alternative` element from XML Schema 1.1. The possible strategies are:

- **First** - The first valid alternative type is always used.
- **Random** - A random alternative type is used.

## Choice strategy

Used for `xs:choice` or `substitutionGroup` elements. The possible strategies are:

- **First** - The first branch of `xs:choice` or the head element of `substitutionGroup` is always used.
- **Random** - A random branch of `xs:choice` or a substitute element or the head element of a `substitutionGroup` is used.

## Generate the other options as comments

If selected, generates the other possible choices or substitutions (for `xs:choice` and `substitutionGroup`). These alternatives are generated inside comments groups so you can uncomment and use them later. Use this option with care (for example, on a restricted namespace and element) as it may generate large result files.

## Element values subtab

Allows you to add values that are used to generate the content of elements. If there are multiple values, then the values are used in a random order.

## Attribute values subtab

Allows you to add values that are used to generate the content of attributes. If there are multiple values, then the values are used in a random order.

## Export settings

Use this button to save the current settings for future use.

## Import settings

Use this button to load previously exported settings.

You can click **OK** at any point to generate the sample XML files.

## Advanced Tab (Generate Sample XML Files Tool)

The  **Generate Sample XML Files** tool includes a dialog box that allows you to configure a variety of options for generating the XML files. The **Advanced** tab allows you to set some options in regards to output values and performance.

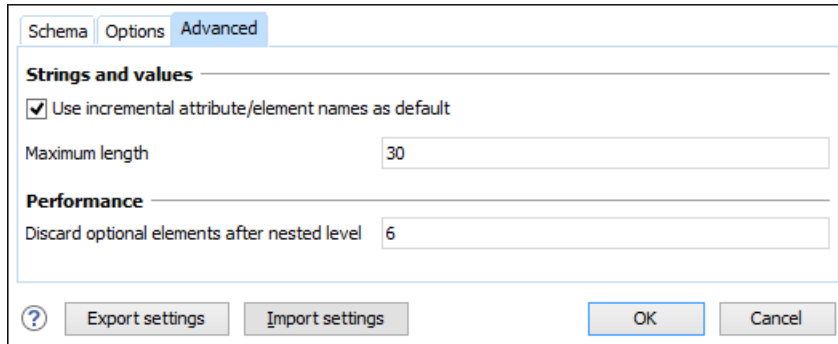


Figure 510: Generate Sample XML Files Dialog Box (Advanced Tab)

This tab includes the following options:

### Use incremental attribute / element names as default

If selected, the value of an element or attribute starts with the name of that element or attribute. For example, for an `a` element the generated values are: `a1`, `a2`, `a3`, and so on. If not selected, the value is the name of the type of that element / attribute (for example: `string`, `decimal`, etc.)

### Maximum length

The maximum length of string values generated for elements and attributes.

### Discard optional elements after nested level

The optional elements that exceed the specified nested level are discarded. This option is useful for limiting deeply nested element definitions that can quickly result in very large XML documents.

### Export settings

Use this button to save the current settings for future use.

### Import settings

Use this button to load previously exported settings.

## Running the Generate Sample XML Files Tool from the Command Line

The **Generate Sample XML Files** tool can be also used from command line by running the script called `xmlGenerator.bat` (on Windows) / `xmlGenerator.sh` (on Mac OS X / Unix / Linux) located in the Oxygen XML Developer installation folder. The parameters can be set in the dialog box, exported to an XML file on disk with the **Export settings** button, and then reused from command line. With the exported settings file, you can generate the same XML instances from the command line as from the dialog box. For example:

```
xmlGenerator.bat path_of_CFG_file
```

The script can be integrated in an external batch process launched from the command line. The command line parameter of the script is the relative path to the exported XML settings file. The files specified with relative paths in the exported XML settings will be made absolute relative to the folder where the script is run.

The following example shows such an XML configuration file:

```
<settings>
 <schemaSystemId>http://www.w3.org/2001/XMLSchema.xsd</schemaSystemId>
 <documentRoot>schema</documentRoot>
 <outputFolder>D:\projects\output</outputFolder>
 <filenamePrefix>instance</filenamePrefix>
 <filenameExtension>xml</filenameExtension>
 <noOfInstances>1</noOfInstances>
 <openFirstInstance>true</openFirstInstance>
 <defaultNamespace><NO_NAMESPACE></defaultNamespace>
 <element namespace="<ANY>" name="<ANY>">
 <generateOptionalElements>false</generateOptionalElements>
 <generateOptionalAttributes>false</generateOptionalAttributes>
 <valuesForContentType>DEFAULT</valuesForContentType>
 </element>
</settings>
```

```

<preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
<maximumRecursivityLevel>1</maximumRecursivityLevel>
<choicesAndSubstitutions strategy="RANDOM"
 generateOthersAsComments="false" />
<attribute namespace="<ANY>"
 name="<ANY>">
 <attributeValue>attrValue1</attributeValue>
 <attributeValue>attrValue2</attributeValue>
</attribute>
</element>
<element namespace="<NO_NAMESPACE>"
 name="<ANY>">
 <generateOptionalElements>true</generateOptionalElements>
 <generateOptionalAttributes>true</generateOptionalAttributes>
 <valuesForContentType>DEFAULT</valuesForContentType>
 <preferredNumberOfRepetitions>2</preferredNumberOfRepetitions>
 <maximumRecursivityLevel>1</maximumRecursivityLevel>
 <choicesAndSubstitutions strategy="RANDOM"
 generateOthersAsComments="true" />
 <elementValue>value1</elementValue>
 <elementValue>value2</elementValue>
 <attribute namespace="<ANY>"
 name="<ANY>">
 <attributeValue>attrValue1</attributeValue>
 <attributeValue>attrValue2</attributeValue>
 </attribute>
</element>
</settings>

```

## Converting Schema to Another Schema Language

The  **Generate/Convert Schema** tool allows you to convert a DTD or Relax NG (full or compact syntax) schema or a set of XML files to an equivalent XML Schema, DTD or Relax NG (full or compact syntax) schema. Where perfect equivalence is not possible due to limitations of the target language, Oxygen XML Developer generates an approximation of the source schema. Oxygen XML Developer uses [Trang multiple format converter](#) to perform the actual schema conversions.

To use this tool, select the  **Generate/Convert Schema (Alt + Shift + C (Command + Alt + C on OS X))** action from the **Tools** menu or from the **Open with** submenu when invoking the contextual menu in the **Project view**. This action opens the **Generate/Convert Schema** dialog box that allows you to configure various options for conversion.

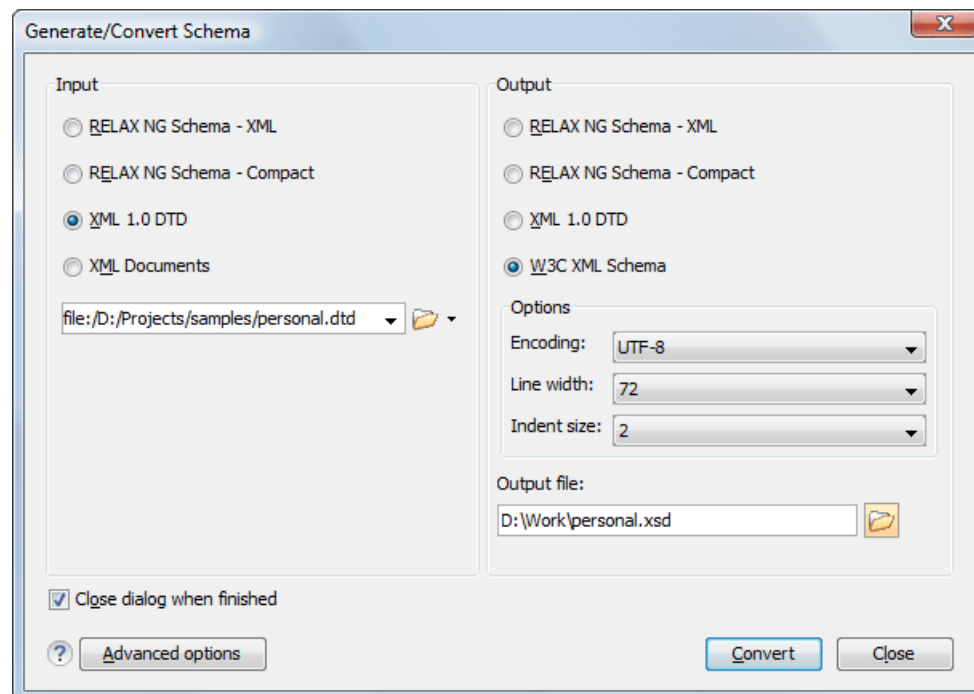


**Figure 511: Generate/Convert Schema Dialog Box**

The **Generate/Convert Schema** dialog box includes the following options:

### Input section

Allows you to select the language of the source schema. If the conversion is based on a set of XML files, rather than just a single XML file, select the **XML Documents** option and use the file selector to add the XML files involved in the conversion.

### Output section

Allows you to select the language of the target schema.

#### Options

You can choose the **Encoding**, the maximum **Line width**, and the **Indent size** (in number of spaces) for one level of indentation.

#### Output file

Specifies the path for the output file that will be generated.

### Close dialog when finished

If you deselect this option, the dialog box will remain opened after the conversion so that you can easily continue to convert more files.

### Advanced options

If you select **XML 1.0 DTD** for the input, you can click this button to access more advance options to further fine-tune the conversion. The following advanced options are available:

#### XML 1.0 DTD Input section

These options apply to the source DTD:

- **xmlns** - Specifies the default namespace, that is the namespace used for unqualified element names.
- **attlist-define** - Specifies how to construct the name of the definition representing an attribute list declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **colon-replacement** - Replaces colons in element names with the specified chars when constructing the names of definitions used to represent the element declarations and attribute list declarations in the DTD.
- **any-name** - Specifies the name of the definition generated for the content of elements declared in the DTD as having a content model of ANY.
- **element-define** - Specifies how to construct the name of the definition representing an element declaration from the name of the element. The specified value must contain exactly one percent character. This percent character is replaced by the name of element (after colon replacement) and the result is used as the name of the definition.
- **annotation-prefix** - Default values are represented using an annotation attribute `prefix:defaultValue` where prefix is the specified value and is bound to `http://relaxng.org/ns/compatibility/annotations/1.0` as defined by the RELAX NG DTD Compatibility Committee Specification. By default, the conversion engine will use a for prefix unless that conflicts with a prefix used in the DTD.
- **inline-attlist** - Instructs the application not to generate definitions for attribute list declarations, but instead move attributes declared in attribute list declarations into the definitions generated for element declarations. This is the default behavior when the output language is XSD.
- **strict-any** - Preserves the exact semantics of ANY content models by using an explicit choice of references to all declared elements. By default, the conversion engine uses a wildcard that allows any element
- **generate-start** - Specifies whether or not the conversion engine should generate a start element. DTD's do not indicate what elements are allowed as document elements. The conversion engine assumes that all elements that are defined but never referenced are allowed as document elements.
- **xmlns mappings** table - Each row specifies the prefix used for a namespace in the input schema.

#### W3C XML Schema Output section

This section is available if you select **W3C XML Schema** for the output.



- **disable-abstract-elements** - Disables the use of abstract elements and substitution groups in the generated XML Schema. This can also be controlled using an annotation attribute.
- **any-process-contents** - One of the values: strict, lax, skip. Specifies the value for the processContents attribute of any elements. The default is skip (corresponding to RELAX NG semantics) unless the input format is DTD, in which case the default is strict (corresponding to DTD semantics).
- **any-attribute-process-contents** - Specifies the value for the processContents attribute of anyAttribute elements. The default is skip (corresponding to RELAX NG semantics).

## Converting Database to XML Schema

---

Oxygen XML Developer includes a tool that allows you to create an XML Schema from the structure of a database.

To convert a database structure to an XML Schema, use the following procedure:

1. Select the **Convert DB Structure to XML Schema** action from the **Tools** menu.

**Result:** The **Convert DB Structure to XML Schema** dialog box is opened and your current database connections are displayed in the **Connections** section.

2. If the database source is not listed, click the **Configure Database Sources** button to open the [Data Sources preferences page](#) where you can configure data sources and connections.

3. In the **Format for generated schema** section, select one of the following formats:

- **Flat schema** - A flat structure that resembles a tree-like view of the database without references to elements.
- **Hierarchical schema** - Display the table dependencies visually, in a type of tree view where dependent tables are shown as indented child elements in the content model. Select this option if you want to configure the database columns of the tables to be converted.

4. Click **Connect**.

**Result:** The database structure is listed in the **Select database tables** section according to the format you chose.

5. Select the database tables that you want to be included in the XML Schema.

6. If you selected **Hierarchical schema** for the format, you can configure the database columns.

- a. Select the database column you want to configure.
- b. In the **Criterion** section you can choose to convert the selected database column as an **Element**, **Attribute**, or to be **Skipped** in the resulting XML Schema.
- c. You can also change the name of the selected database column by changing it in the **Name** text field.

7. Click **Generate XML Schema**.

**Result:** The database structure is converted to an XML Schema and it is opened for viewing and editing.

## Flatten an XML Schema

---

You can organize an XML schema linked by `xs:include` and `xs:import` statements on several levels. In some cases, working on such a schema as if it were a single file is more convenient than working on multiple files separately. The **Flatten Schema** operation allows you to flatten an entire hierarchy of XML schemas. Starting with the main XML schema, Oxygen XML Developer calculates its hierarchy by processing the `xs:include` and `xs:import` statements.

The **Flatten Schema** action is available from the **Tools** menu or the contextual menu in **Text** mode. The action opens the **Flatten Schema** dialog box that allows you to configure the operation.

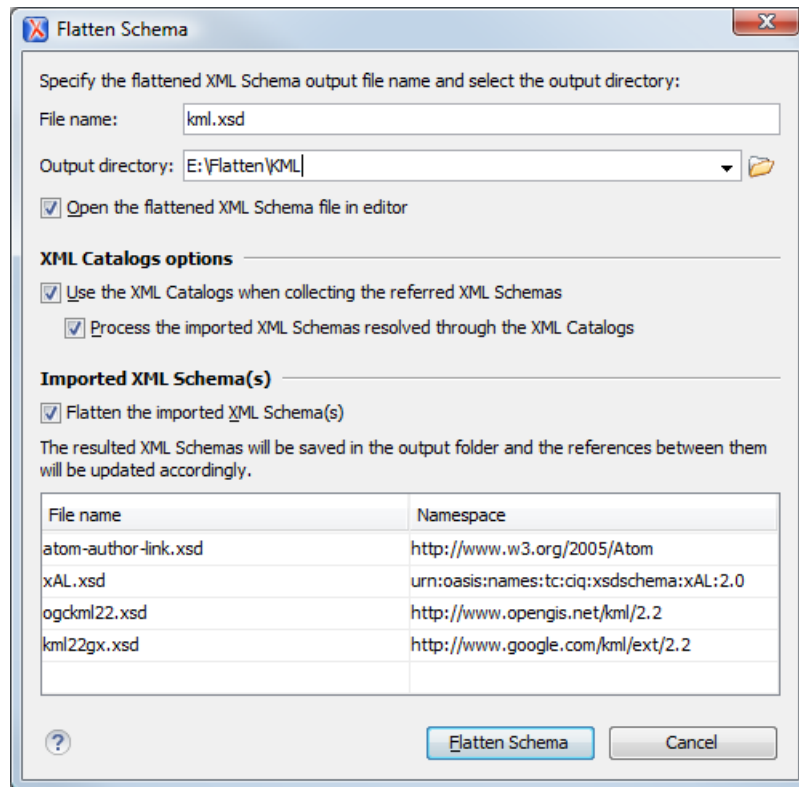


**Figure 512: Flatten Schema Dialog Box**

For the main schema file and for each imported schema, a new flattened schema is generated in the specified output folder. These schemas have the same name as the original ones.

**Note:** If necessary, the operation renames the resulted schemas to avoid duplicated file names.

A flattened XML schema is obtained by recursively adding the components of the included schemas into the main one. This means Oxygen XML Developer replaces the `xs:include`, `xs:redefine`, and `xs:override` elements with the ones coming from the included files.

### Options in the Flatten Schema Dialog Box

The following options are available in the **Flatten Schema** dialog box:

#### File name

The name of the output file.

#### Output directory

The path of the output directory where the flattened schema file will be saved.

#### Open the flattened XML Schema file in editor

Opens the main flattened schema in the editing area after the operation completes.

#### Use the XML Catalogs when collecting the referenced XML Schemas

Enables the imported and included schemas to be resolved through the available [XML Catalogs](#).

**Note:** Changing this option triggers the recalculation of the dependencies graph for the main schema.

#### Process the imported XML Schemas resolved through the XML Catalogs

Specifies whether or not the imported schemas that were resolved through an [XML Catalog](#) are also processed.

#### Flatten the imported XML Schema(s)

Specifies whether or not the imported schemas are flattened.

**Note:** For the schemas skipped by the flatten operation, no files are created in the output folder and the corresponding import statements remain unchanged.

## Flatten Schema from the Command Line

The **Flatten Schema** tool can be also ran from command line by using the following command:

- `flattenSchema.bat` on Windows
- `sh flattenSchema.sh` on OS X and Linux

The command line accepts the following parameters:

- `-in:inputSchemaURL` - The input schema URL.
- `-outDir:outputDirectory` - The directory where the flattened schemas should be saved.
- `-flattenImports:<boolean_value>` - Controls whether or not the imported XML Schemas should be flattened. The default value `true`.
- `-useCatalogs:<boolean_value>` - Controls if the references to other XML Schemas should be resolved through the available [XML Catalogs](#). The default value `false`.
- `-flattenCatalogResolvedImports:<boolean_value>` - Controls whether or not the imported schemas that were resolved through the [XML Catalogs](#) should be flattened. The default value is `true`.

**Note:** This option is used only when `-useCatalogs` is set to `true`.

- `-verbose` - Provides information about the current flatten XML Schema operation.
- `--help | -help | --h | -h` - Prints the available parameters for the operation.

### Example: Command Line Example for Windows

```
flattenSchema.bat -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```

### Example: Command Line Example for OS X

```
sh flattenSchema.sh -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```

### Example: Command Line Example for Unix/Linux

```
sh flattenSchema.sh -in:http://www.w3.org/MarkUp/SCHEMA/xhtml11.xsd
-outDir:mySchemas/flattened/xhtml1 -flattenImports:true -useCatalogs:true
-flattenCatalogResolvedImports:true -verbose
```

## JSON to XML Converter

Oxygen XML Developer includes a useful and simple tool for converting JSON files to XML. It can be found in the **Tools** menu.

To convert a JSON document to XML, follow these steps:

1. Select the **JSON to XML** action from the **Tools** menu.

The **JSON to XML** dialog box is displayed:

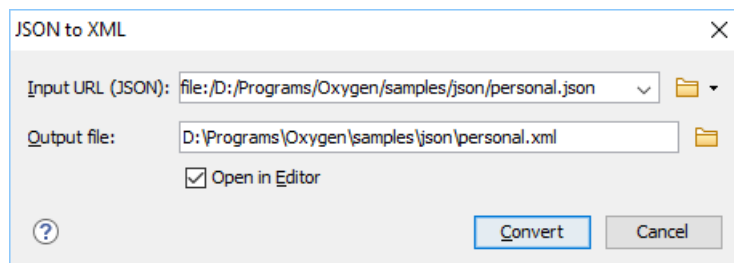


**Figure 513: JSON to XML Dialog Box**

2. Choose or enter the **Input URL** of the JSON document.
3. Choose the path of the **Output file** that will contain the resulting XML document.
4. Select the **Open in Editor** option to open the resulting XML document in the main editing pane.
5. Click the **Convert** button.

The original JSON document is now converted to an XML document.

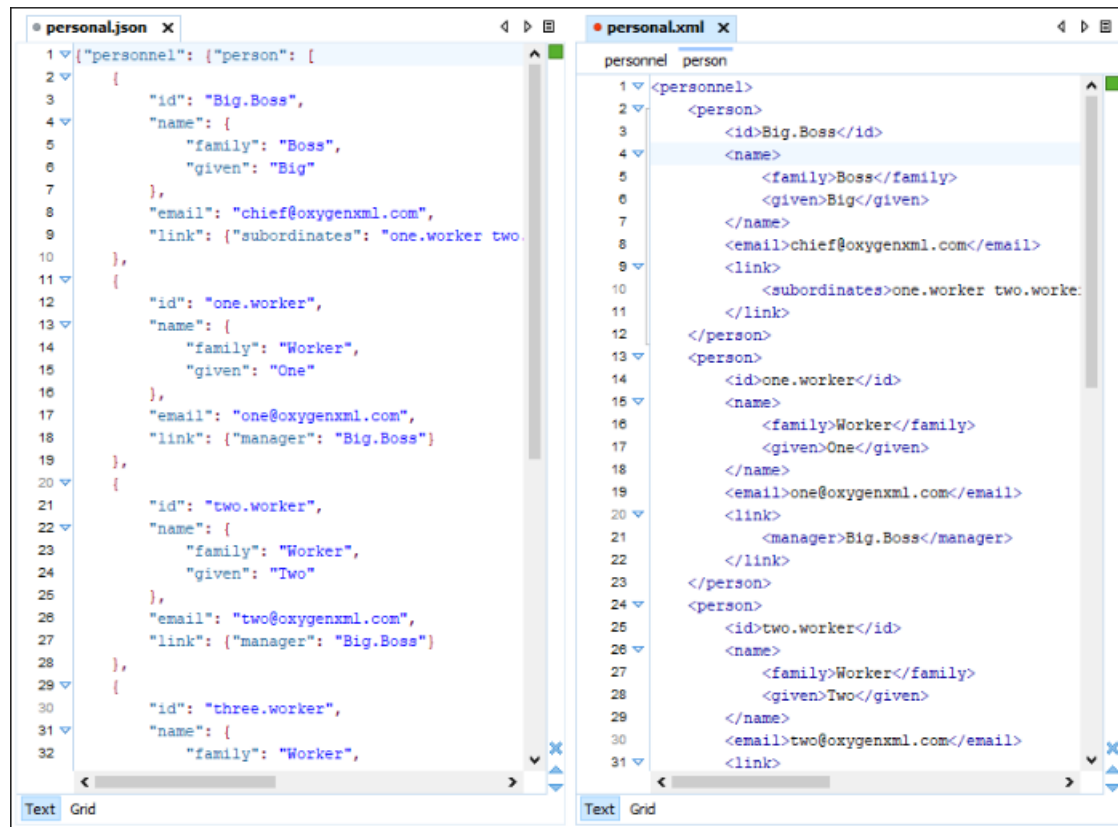


Figure 514: Example: XML to JSON Operation Result

## XML to JSON Converter

Oxygen XML Developer includes a useful and simple tool for converting XML files to JSON. It can be found in the **Tools** menu.

To convert an XML document to JSON, follow these steps:

1. Select the **XML to JSON** action from the **Tools** menu.

The **XML to JSON** dialog box is displayed:

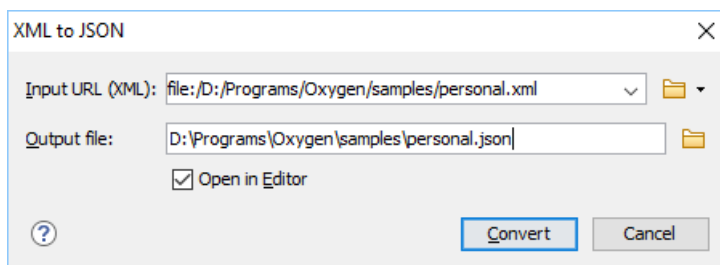


Figure 515: XML to JSON Dialog Box

2. Choose or enter the **Input URL** of the XML document.
3. Choose the path of the **Output file** that will contain the resulting JSON document.
4. Select the **Open in Editor** option to open the resulting JSON document in the main editing pane.
5. Click the **Convert** button.

The original XML document is now converted to a JSON document.

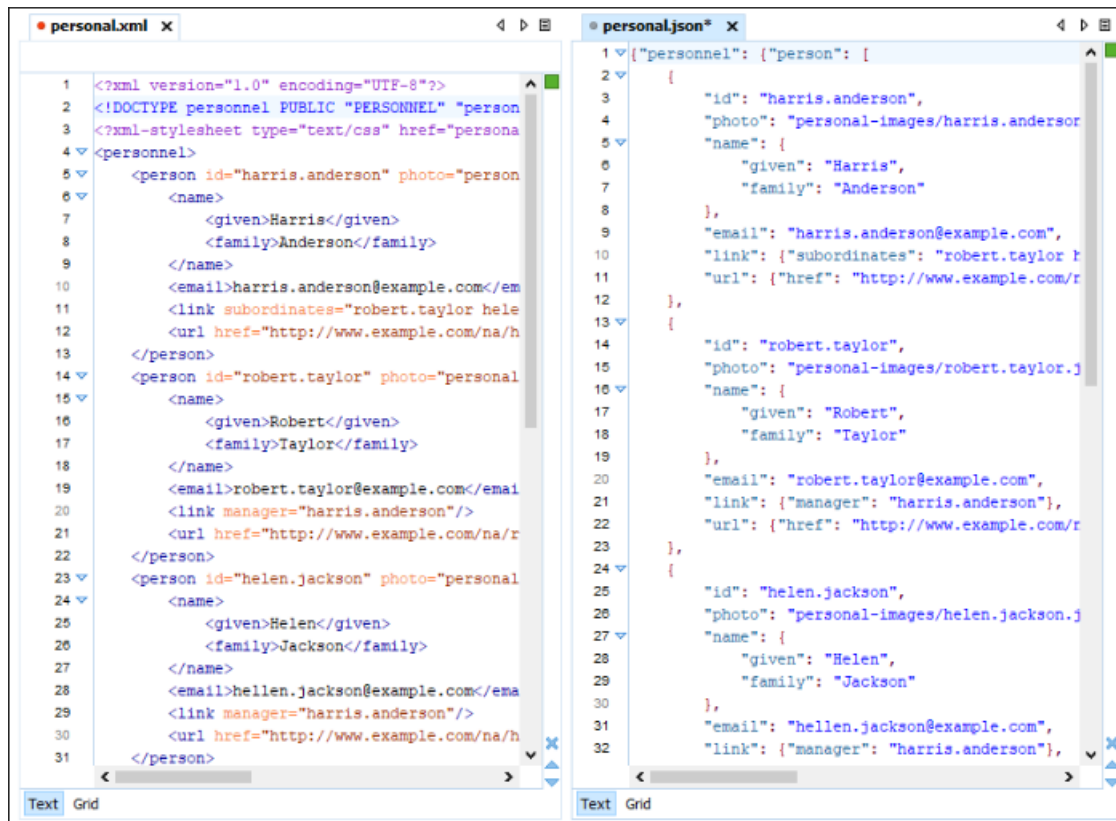


Figure 516: Example: XML to JSON Operation Result

## Compiling an XSL Stylesheet for Saxon

As of Saxon 9.7, it is possible to export a compiled form of a stylesheet as an XML file (called a *stylesheet export file* or SEF). Oxygen XML Developer includes a simple tool called **Compile XSL Stylesheet for Saxon** (found in the **Tools** menu) that does this for you.

### Use-Cases for a Stylesheet Export File (SEF)

- **Use Saxon-JS to run transformations in a browser** - A *stylesheet export file* (SEF) is needed if you want to use the [Saxon-JS product](#) to run transformations in a browser, as in the following example:

```
<script type="text/javascript" src="SaxonJS/SaxonJS.min.js"></script>
<script>
 window.onload = function() {
 SaxonJS.transform({
 stylesheetLocation: "books.sef",
 sourceLocation: "books.xml"
 });
 }
</script>
```

- **Use SEF to run transformations in Oxygen XML Developer** - You can also use a *stylesheet export file* (SEF) in Oxygen XML Developer to apply an XSLT transformation over an XML file. This requires **Saxon-EE** or **Saxon-PE** versions of the Saxon product and you must select one of those two versions for the [Target when you configure the SEF file](#). When configuring the XSLT transformation, you will specify the SEF file in the [XSL URL field](#).

### Compiling an SEF File

The **Compile XSL Stylesheet for Saxon** tool can be found in the **Tools** menu and it compiles a specified stylesheet as an XML file (*stylesheet export file* with a file extension of `.sef`).

Selecting this tool opens the **Compile XSL Stylesheet for Saxon** dialog box that allows you to configure some options for conversion.

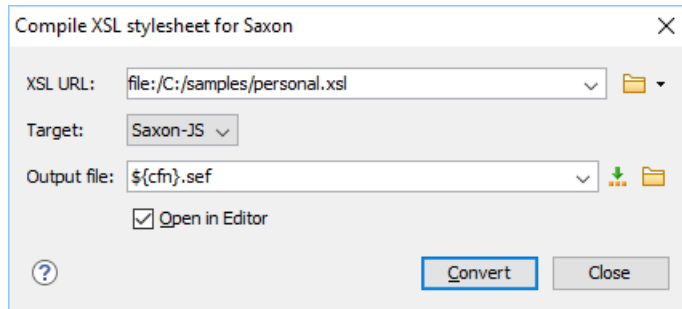


**Figure 517: Compile XSL Stylesheet for Saxon Dialog Box**

This dialog box includes the following options:

#### **XSL URL**

Allows you to select URL of the source XSL stylesheet. You can specify the URL by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down list.

#### **Target**

Allows you to select the type of Saxon product that the export file will be used with. You can choose **Saxon-JS**, **Saxon-EE**, **Saxon-PE**, or **Saxon-HE**.

#### **Output file**

You can specify the path where the output file will be saved by entering it in the text field, using the **Insert Editor Variables** button, or using the browsing tool button ().

#### **Open in Editor**

Select this option to open the resulting *stylesheet export file* in the main Oxygen XML Developer editing pane.

#### **Convert**

Use this button to generate the *stylesheet export file* according the options selected in this dialog box.

## **Format and Indent (Pretty-Print) Multiple Files**

---

Oxygen XML Developer provides support for formatting and indenting (*pretty-print*) multiple files at once. This action is available for any document in XML format, as well as for XQuery, CSS, JavaScript, and JSON documents.

To format and indent multiple files, use the **Format and Indent Files** action that is available in the contextual menu of the **Project view** or from the **Tools** menu. This opens the **Format and Indent Files** dialog box that allows you to configure options for the action.

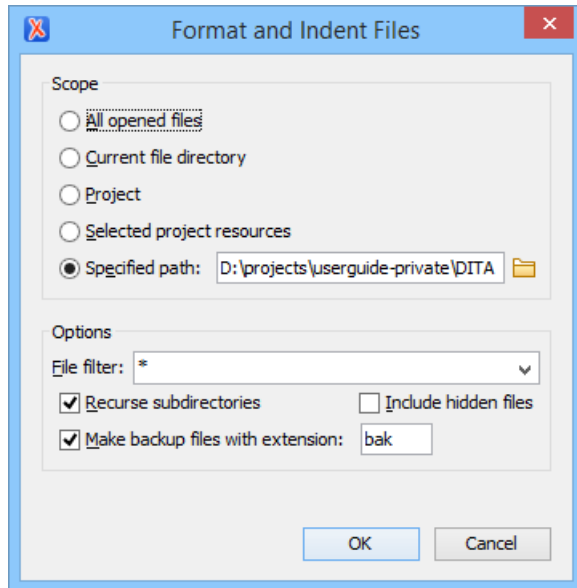


**Figure 518: Format and Indent Files Dialog Box**

The **Scope** section allows you choose from the following scopes:

- **All opened files** - The *pretty-print* is performed in all opened files.
- **Directory of the current file** - All the files in the folder of the current edited file.
- **Project files** - All files from the current project.
- **Selected project files** - The selected files from the current project.
- **Specified path** - the *pretty-print* is performed in the files located at a specified path.

The **Options** section includes the following options:

- **File filter** - Allow you to filter the files from the selected scope.
- **Recurse subdirectories** - When selected, the *pretty-print* is performed recursively for the specified scope. The one exception is that this option is ignored if the scope is set to **All opened files**.
- **Include hidden files** - When selected, the *pretty-print* is also performed in the hidden files.
- **Make backup files with extension** - When selected, Oxygen XML Developer makes backup files of the modified files. The default extension is .bak, but you can change the extension as you prefer.

## Generate Documentation

Oxygen XML Developer includes a tool for generating documentation for XSLT, XML Schema, XQuery, and WSDL documents.

### Generating Documentation for an XML Schema

Oxygen XML Developer can generate detailed documentation for the components of an XML Schema in HTML, PDF, DocBook, or other custom formats. You can select the components and the level of detail. The components are hyperlinked in both HTML and DocBook documents.

**Note:** You can generate documentation for both XML Schema version 1.0 and 1.1.

To generate documentation for an XML Schema document, select **XML Schema Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

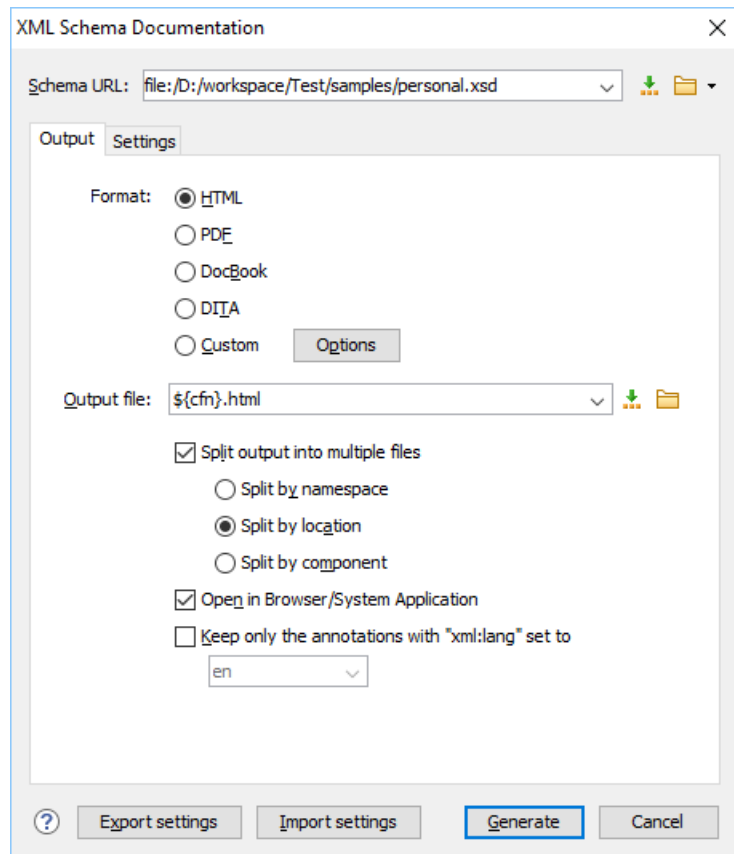


**Figure 519: XML Schema Documentation Dialog Box**

The **Schema URL** field of the dialog box must contain the full path to the XML Schema (XSD) file for which you want to generate documentation. The schema may be a local or a remote file. You can specify the path to the schema by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.

## Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
  - **HTML** - The documentation is generated in [HTML output format](#).
  - **PDF** - The documentation is generated in [PDF output format](#).
  - **DocBook** - The documentation is generated in [DocBook output format](#).
  - **DITA** - The documentation is generated in [DITA output format](#).
  - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type. For DITA and DocBook documents, this option appears as **Open in Editor** and the result will be opened in Oxygen XML Developer (in the current editor).



**Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

## Settings Tab

When you generate documentation for an XML schema you can choose what components to include in the output and the details to be included in the documentation.

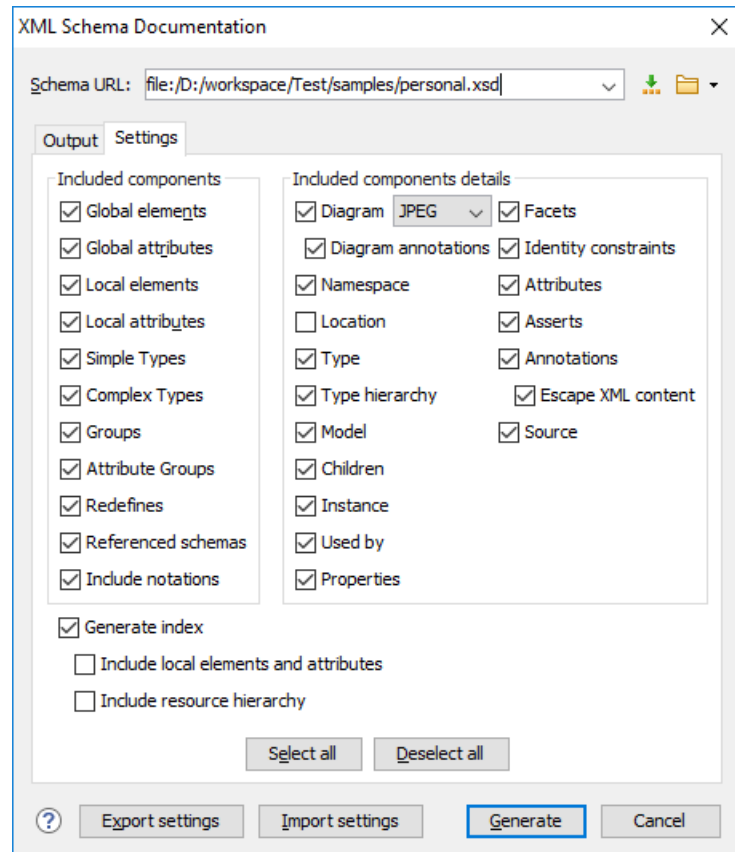


**Figure 520: Settings Tab of the XML Schema Documentation Dialog Box**

The **Settings** tab allows you to choose whether or not to include the following components: **Global elements**, **Global attributes**, **Local elements**, **Local attributes**, **Simple Types**, **Complex Types**, **Groups**, **Attribute Groups**, **Redefines**, **Referenced schemas**, **Include notations**.

You can choose whether or not to include the following other details:

- **Diagram** - Displays the diagram for each component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section. The generated diagrams are dependent on the options from the [Schema Design Properties](#) page.
  - **Diagram annotations** - This option controls whether or not the annotations of the components presented in the diagram sections are included.
- **Namespace** - Displays the namespace for each component.
- **Location** - Displays the schema location for each component.
- **Type** - Displays the component type if it is not an anonymous one.
- **Type hierarchy** - Displays the types hierarchy.
- **Model** - Displays the model (sequence, choice, all) presented in BNF form. The separator characters that are used depend upon the information item used:

- **xs:all** - Its children will be separated by space characters.
- **xs:sequence** - Its children will be separated by comma characters.
- **xs:choice** - Its children will be separated by / characters.
- **Children** - Displays the list of component's children.
- **Instance** - Displays an XML instance generated based on each schema element.
- **Used by** - Displays the list of all the components that reference the current one. The list is sorted by component type and name.
- **Properties** - Displays some of the component's properties.
- **Facets** - Displays the facets for each simple type
- **Identity constraints** - Displays the identity constraints for each element. For each constraint there are presented the name, type (unique, key, keyref), reference attribute, selector and field(s).
- **Attributes** - Displays the attributes for the component. For each attribute there are presented the name, type, fixed or default value, usage and annotation.
- **Asserts** - Displays the **assert** elements defined in a complex type. The test, XPath default namespace, and annotation are presented for each assert.
- **Annotations** - Displays the annotations for the component. If you choose **Escape XML Content**, the XML tags are present in the annotations.
- **Source** - Displays the text schema source for each component.
- **Generate index** - Displays an index with the components included in the documentation.
  - **Include local elements and attributes** - If selected, local elements and attributes are included in the documentation index.
  - **Include resource hierarchy** - Specifies whether or not the resource hierarchy for an XML Schema documentation is generated. It is deselected by default.

**Export settings** - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command line interface](#).)

**Import settings** - Reloads the settings from the exported file.

**Generate** - Use this button to generate the XML Schema documentation.

#### Related Information:

[Customizing PDF or DocBook Output of Generated XML Schema Documentation](#) on page 562

## Generating Documentation for an XSLT Stylesheet

You can use Oxygen XML Developer to generate detailed documentation in HTML format for the elements (top-level elements whose names are in the XSLT namespace) of an XSLT stylesheet. You can select what XSLT elements to include in the generated documentation and also the level of details to present for each of them. The elements are hyperlinked. To generate documentation in a [custom output format](#), you can edit the XSLT stylesheet used to generate the documentation, or create your own stylesheet.

To open the **XSLT Stylesheet Documentation** dialog box, select **XSLT Stylesheet Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

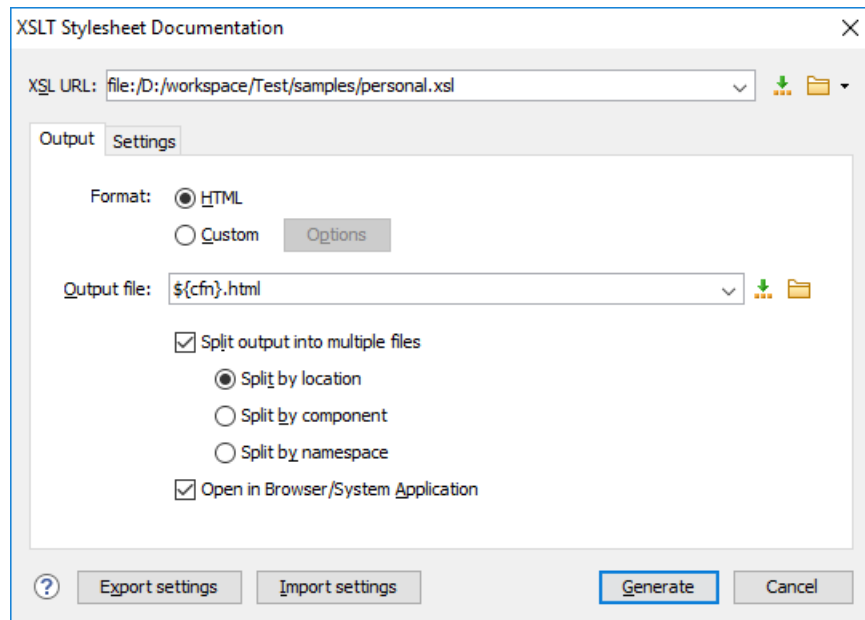


**Figure 521: XSLT Stylesheet Documentation Dialog Box**

The **XSL URL** field of the dialog box must contain the full path to the XSL Stylesheet file you want to generate documentation for. The stylesheet may be a local or a remote file. You can specify the path to the stylesheet by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.

### Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
  - **HTML** - The documentation is generated in [HTML output format](#).
  - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a [Custom format options dialog box](#) where you can specify a custom stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.
- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the **Insert Editor Variables** button or the options in the **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. For large XSLT stylesheets, choosing another split criterion may generate smaller output files, providing faster documentation browsing. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.

**Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

### Settings Tab

When you generate documentation for an XSLT stylesheet you can choose what XSLT elements to include in the output (templates, functions, global parameters, global variables, attribute sets, character maps, keys, decimal formats, output formats, XSLT elements from referenced stylesheets) and the details to include in the documentation.

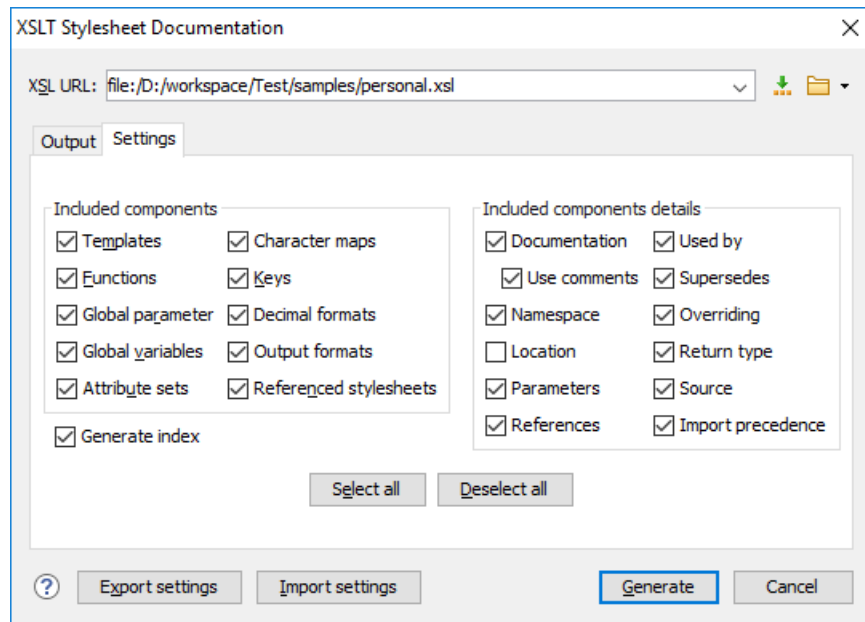


**Figure 522: Settings Tab of the XSLT Stylesheet Documentation Dialog Box**

The **Settings** tab allows you to choose whether or not to include the following components: **Templates**, **Functions**, **Global parameters**, **Global variables**, **Attribute sets**, **Character maps**, **Keys**, **Decimal formats**, **Output formats**, **Referenced stylesheets**.

You can choose whether or not to include the following other details:

- **Documentation** - Shows the documentation for each XSLT element. For HTML format, the user-defined data elements that are recognized and transformed in documentation blocks of the XSLT elements they precede, are the ones from the following schemas:
  - Oxygen XML Developer built-in XSLT documentation schema.
  - A subset of DocBook 5 elements. The recognized elements are: *section*, *sect1* to *sect5*, *emphasis*, *title*, *ulink*, *programlisting*, *para*, *orderedlist*, *itemizedlist*.
  - A subset of DITA elements. The recognized elements are: *concept*, *topic*, *task*, *codeblock*, *p*, *b*, *i*, *ul*, *ol*, *pre*, *sl*, *sli*, *step*, *steps*, *li*, *title*, *xref*.
  - Full XHTML 1.0 support.
  - XSLStyle documentation environment. XSLStyle uses DocBook or DITA languages inside its own user-defined data elements. The supported DocBook and DITA elements are the ones mentioned above.
  - DOXSL documentation [framework](#). Supported elements are : *codefrag*, *description*, *para*, *docContent*, *documentation*, *parameter*, *function*, *docSchema*, *link*, *list*, *listitem*, *module*, *parameter*, *template*, *attribute-set*;

Other XSLT documentation blocks that are not recognized will just be serialized inside an HTML *pre* element. You can change this behavior by using a [custom format](#) instead of the built-in [HTML format](#) and providing your own XSLT stylesheets.
- **Use comments** - Controls whether or not the comments that precede an XSLT element is treated as documentation for the element they precede. Comments that precede or succeed the *xsl:stylesheet* element, are treated as documentation for the whole stylesheet. Note that comments that precede an import or include directive are not collected as documentation for the imported/included module. Also, comments from within the body of the XSLT elements are not collected at all.
- **Namespace** - Shows the namespace for named XSLT elements.
- **Location** - Shows the stylesheet location for each XSLT element.
- **Parameters** - Shows parameters of templates and functions.
- **References** - Shows the named XSLT elements that are referenced from within an element.
- **Used by** - Shows the list of all the XSLT elements that reference the current named element.
- **Supersedes** - Shows the list of all the XSLT elements that are superseded the current element.

- **Overriding** - Shows the list of all the XSLT elements that override the current element.
- **Return type** - Shows the return type of the function.
- **Source** - Shows the text stylesheet source for each XSLT element.
- **Import precedence** - Shows the computed import precedence as declared in the XSL transformation specifications.
- **Generate index** - Creates an index with all the XSLT elements included in the documentation.

**Export settings** - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

**Import settings** - Reloads the settings from the exported file.

**Generate** - Use this button to generate the XSLT documentation.

#### Related Information:

[XSLT Stylesheet Component Documentation Support](#) on page 482

## Generating HTML Documentation for an XQuery Document

To generate HTML documentation for an XQuery document, use the **XQuery Documentation** dialog box. It is opened with the **XQuery Documentation** action that is available from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

The dialog box allows you to configure a set of parameters for the process of generating the HTML documentation.

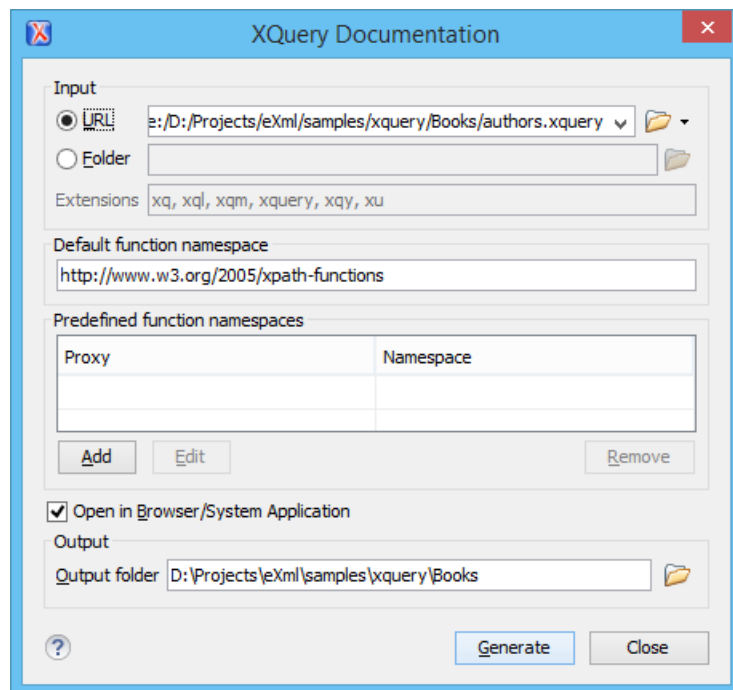


**Figure 523: XQuery Documentation Dialog Box**

The following options are available:

- **Input** - The full path to the XQuery file must be specified in one of the two fields in this section:
  - **URLFile** - The URL of the file in which you want to generate the documentation.
  - **Folder** - The directory that contains the files for which you want to generate the documentation. You can also specify the XQuery file extensions to be searched for in the specified directory.
- **Default function namespace** - Optional URI for the default namespace for the submitted XQuery.
- **Predefined function namespaces** - Optional, engine-dependent, predefined namespaces that the submitted XQuery refers to. They allow the conversion to generate annotation information to support the presentation

component hypertext linking (only if the predefined modules have been loaded into the local xqDoc XML repository).

- **Open in Browser/System Application** - Select this option if you want the result to be opened in the system application associated with that file type.

**Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

- **Output** - Allows you to specify where the generated documentation is saved on disk.

## Generating Documentation for WSDL Documents

You can use Oxygen XML Developer to generate detailed documentation for the components of a WSDL document in HTML format. You can select the WSDL components to include in your output and the level of details to present for each of them. Also, the components are hyperlinked. You can also generate the documentation in a [custom output format](#) by using a custom stylesheet.

**Note:** The WSDL documentation includes the XML Schema components that belong to the internal or imported XML schemas.

To generate documentation for a WSDL document, select **WSDL Documentation** from the **Tools > Generate Documentation** menu or from the **Generate Documentation** submenu in the contextual menu of the [Project view](#).

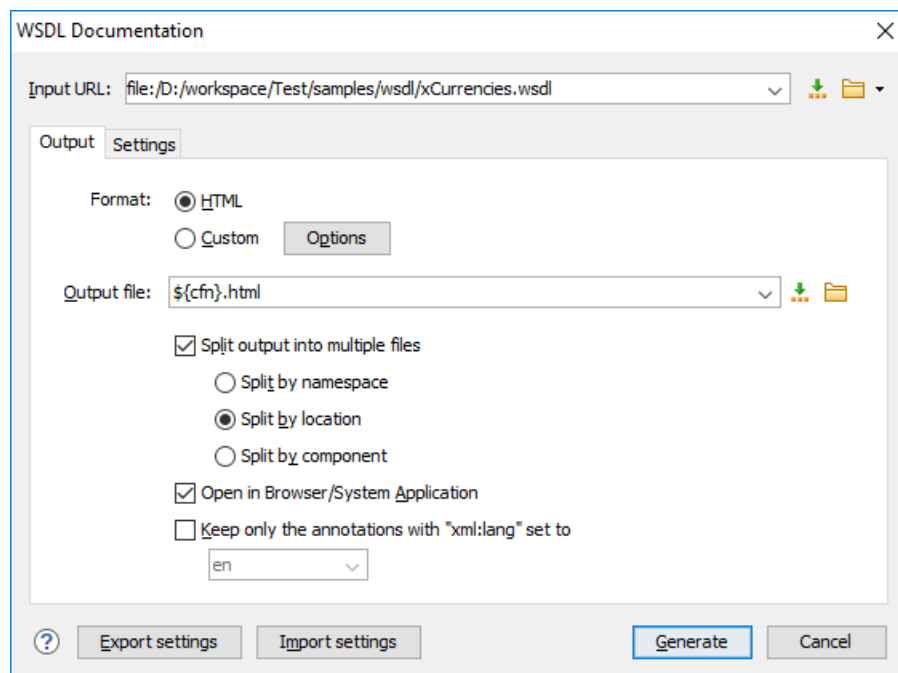


**Figure 524: WSDL Documentation Dialog Box**

The **Input URL** field of the dialog box must contain the full path to the WSDL document that you want to generate documentation for. The WSDL document may be a local or a remote file. You can specify the path to the WSDL file by entering it in the text field, or by using the [Insert Editor Variables](#) button or the options in the [Browse](#) drop-down menu.

### Output Tab

The following options are available in the **Output** tab:

- **Format** - Allows you to choose between the following formats:
  - **HTML** - The documentation is generated in [HTML output format](#).
  - **Custom** - The documentation is generated in a [custom output format](#), allowing you to control the output. Click the **Options** button to open a **Custom format options** dialog box where you can specify a custom

stylesheet for creating the output. There is also an option to **Copy additional resources to the output folder** and you can select the path to the additional **Resources** that you want to copy. You can also choose to keep the intermediate XML files created during the documentation process by deselecting the **Delete intermediate XML file** option.

- **Output file** - You can specify the path of the output file by entering it in the text field, or by using the  **Insert Editor Variables** button or the options in the  **Browse** drop-down menu.
- **Split output into multiple files** - Instructs the application to split the output into multiple files. For large WSDL documents, choosing a different split criterion may generate smaller output files providing a faster documentation browsing. You can choose to split them by namespace, location, or component name.
- **Open in Browser/System Application** - Opens the result in the system application associated with the output file type.

**Note:** To set the browser or system application that will be used, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Global**, and set it in the **Default Internet browser** field. This will take precedence over the default system application settings.

- **Keep only the annotations with xml:lang set to** - The generated output will contain only the annotations with the `xml:lang` attribute set to the selected language. If you choose a primary language code (for example, **en** for English), this includes all its possible variations (**en-us**, **en-uk**, etc.).

## Setting Tab

When you generate documentation for a WSDL document, you can choose what components to include in the output and the details to be included in the documentation.

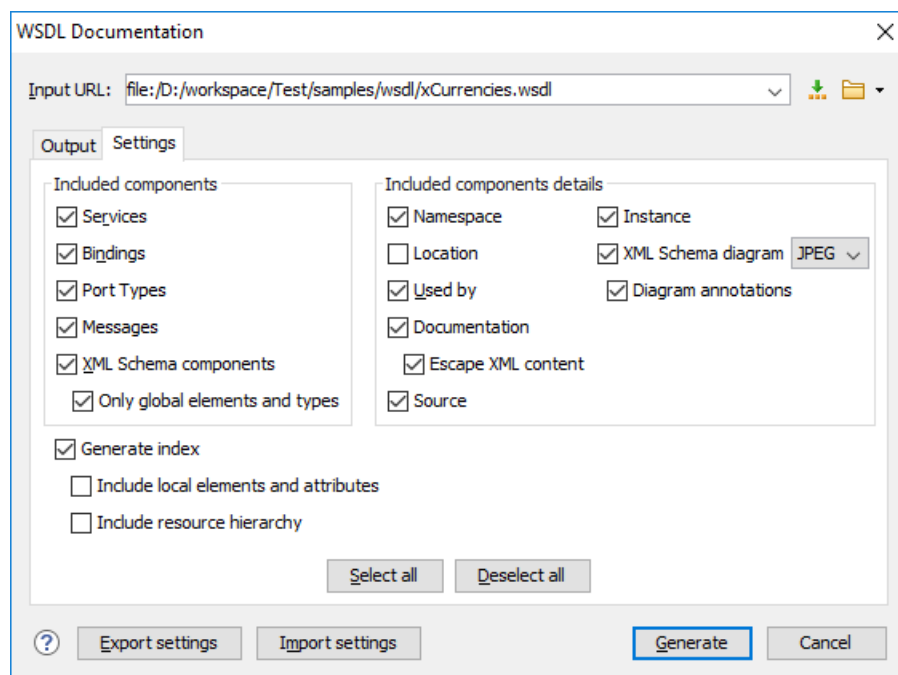


**Figure 525: Settings Tab of the WSDL Documentation Dialog Box**

The **Settings** tab allows you to choose whether or not to include the following:

- **Components**
  - **Services** - Specifies whether or not the generated documentation includes the WSDL services.
  - **Bindings** - Specifies whether or not the generated documentation includes the WSDL bindings.
  - **Port Types** - Specifies whether or not the generated documentation includes the WSDL port types.
  - **Messages** - Specifies whether or not the generated documentation includes the WSDL messages.
  - **XML Schema Components** - Specifies whether or not the generated documentation includes the XML Schema components.



- **Only global elements and types** - Specifies whether or not the generated documentation includes only global elements and types.
- **Component Details**
  - **Namespace** - Presents the namespace information for WSDL or XML Schema components.
  - **Location** - Presents the location information for each WSDL or XML Schema component.
  - **Used by** - Presents the list of components that reference the current one.
  - **Documentation** - Presents the component documentation. If you choose **Escape XML Content**, the XML tags are presented in the documentation.
  - **Source** - Presents the XML fragment that defines the current component.
  - **Instance** - Generates a sample XML instance for the current component.

**Note:** This option applies to the XML Schema components only.

  - **XML Schema Diagram** - Displays the diagram for each XML Schema component. You can choose the image format (JPEG, PNG, GIF, SVG) to use for the diagram section.
    - **Diagram annotations** - Specifies whether or not the annotations of the components presented in the diagram sections are included.
- **Generate index** - Displays an index with the components included in the documentation.
  - **Include local elements and attributes** - If selected, local elements and attributes are included in the documentation index.
  - **Include resource hierarchy** - Specifies whether or not the resource hierarchy for an XML Schema documentation is generated. It is deselected by default.

**Export settings** - Save the current settings in a settings file for further use (for example, with the exported settings file you can generate the same [documentation from the command-line interface](#).)

**Import settings** - Reloads the settings from the exported file.

**Generate** - Use this button to generate the WSDL documentation.

## Canonicalizing Files

---

You can select the [canonicalization](#) algorithm to be used for a document from the dialog box that is displayed by using the **Canonicalize** action that is available from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.



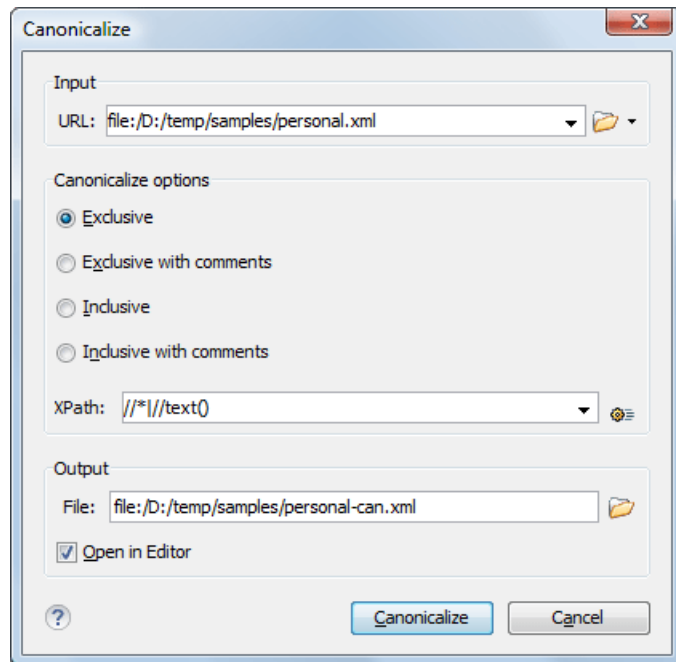


**Figure 526: Canonicalization Settings Dialog Box**

The **Canonicalize** dialog box allows you to set the following options:

- **Input URL** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the location of the input file.
- **Exclusive** - If selected, the exclusive (uncommented) [canonicalization](#) method is used.

**Note:** *Exclusive Canonicalization* just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within various XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments [canonicalization](#) method is used.
- **Inclusive** - If selected, the inclusive (uncommented) [canonicalization](#) method is used.

**Note:** *Inclusive Canonicalization* copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. *Inclusive Canonicalization* is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security standpoint because it requires no knowledge of the data that are to be secured to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the *Inclusive Canonicalization* will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments [canonicalization](#) method is used.
- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **Output** - Available if the **Canonicalize** action was selected from the **Tools** menu. It allows you to specify the output file path where the signed XML document will be saved.
- **Open in editor** - If selected, the output file will be opened in the editor.

#### Related Information:

[Digital Signatures Overview](#) on page 457

## Signing Files

You can select the type of signature to be used for documents from a signature settings dialog box. To open this dialog box, select the **Sign** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu.

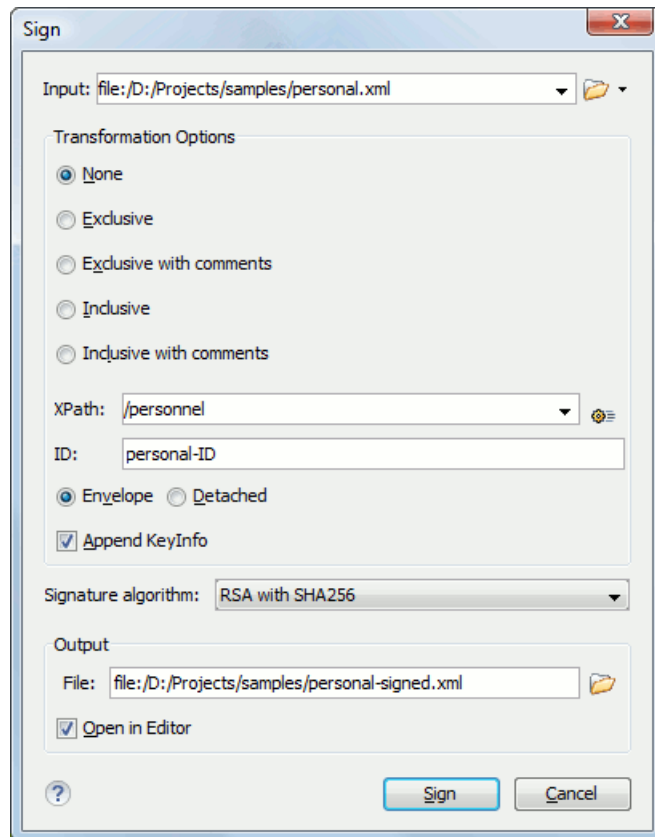


**Figure 527: Signature Settings Dialog Box**

The following options are available:

**Note:** If Oxygen XML Developer could not find a valid certificate, a link is provided at the top of the dialog box that opens the [XML Signing Certificates preferences page](#) where you can configure a valid certificate.

❗ Could not obtain a valid certificate. [You must configure a valid certificate.](#)

- **Input** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the location of the input URL.
- **Transformation Options** - See the [Digital Signature Overview](#) section for more information about these options.

- **None** - If selected, no [canonicalization](#) algorithm is used.
- **Exclusive** - If selected, the exclusive (uncommented) [canonicalization](#) method is used.

**Note:** *Exclusive Canonicalization* just copies the namespaces you are actually using (the ones that are a part of the XML syntax). It does not look into attribute values or element content, so the namespace declarations required to process these are not copied. This is useful if you have a signed XML document that you want to insert into other XML documents (or you need self-signed structures that support placement within various XML contexts), as it will ensure the signature is verified correctly each time.

- **Exclusive with comments** - If selected, the exclusive with comments [canonicalization](#) method is used.
- **Inclusive** - If selected, the inclusive (uncommented) [canonicalization](#) method is used.

**Note:** *Inclusive Canonicalization* copies all the declarations, even if they are defined outside of the scope of the signature, and all the declarations you might use will be unambiguously specified. Inclusive *Canonicalization* is useful when it is less likely that the signed data will be inserted in other XML document and it is the safer method from the security standpoint because it requires no knowledge of the data that are to be secured to safely sign them. A problem may occur if the signed document is moved into another XML document that has other declarations because the Inclusive *Canonicalization* will copy them and the signature will be invalid.

- **Inclusive with comments** - If selected, the inclusive with comments [canonicalization](#) method is used.

- **XPath** - The XPath expression provides the fragments of the XML document to be signed.
- **ID** - Provides ID of the XML element to be signed.
- **Envelope** - If selected, the *enveloped* signature is used. See the [Digital Signature Overview](#) for more information.
- **Detached** - If selected, the *detached* signature is used. See the [Digital Signature Overview](#) for more information.
- **Append KeyInfo** - If this option is selected, the `ds:KeyInfo` element will be added in the signed document.
- **Signature algorithm** - The algorithm used for signing the document. The following options are available: **RSA with SHA1**, **RSA with SHA256**, **RSA with SHA384**, and **RSA with SHA512**.
- **Output** - Available if the **Sign** action was selected from the **Tools** menu. Specifies the path of the output file where the signed XML document will be saved.
- **Open in editor** - If selected, the output file will be opened in Oxygen XML Developer.

**Related Information:**

[Digital Signatures Overview](#) on page 457

[Verifying Signature](#) on page 461

[Example of How to Digitally Sign XML Files or Content](#) on page 461

## Verifying Signature

---

You can verify the signature of a file by selecting the **Verify Signature** action from the **Source** submenu when invoking the contextual menu in **Text** mode or from the **Tools** menu. The **Verify Signature** dialog box then allows you to specify the location of the file whose signature is verified.

If the signature is valid, a dialog box displays the name of the signer. Otherwise, an error shows details about the problem.

**Related Information:**

[Digital Signatures Overview](#) on page 457

[Signing Files](#) on page 460

[Example of How to Digitally Sign XML Files or Content](#) on page 461

## WSDL SOAP Analyzer

---

**WSDL SOAP Analyzer** is a tool that helps you test if the messages defined in a Web Service Descriptor (WSDL) are accepted by a Web Services server.

After you edit and validate your Web service descriptor against a mix of the XML Schemas for WSDL and SOAP, it is easy to check if the defined SOAP messages are accepted by the remote Web Services server by using the integrated **WSDL SOAP Analyzer** tool (available from the toolbar or **Tools** menu).

Oxygen XML Developer provides two ways of testing, one for the currently edited WSDL document and another for the remote WSDL documents that are published on a web server. To open the **WSDL SOAP Analyzer** tool for the currently edited WSDL document do one of the following:

- Click the  **WSDL SOAP Analyzer** toolbar button.
- Use the  **WSDL SOAP Analyzer** action from the **Tools** menu.
- Go to **Open with >**  **WSDL SOAP Analyzer** in the contextual menu of the **Project** view.

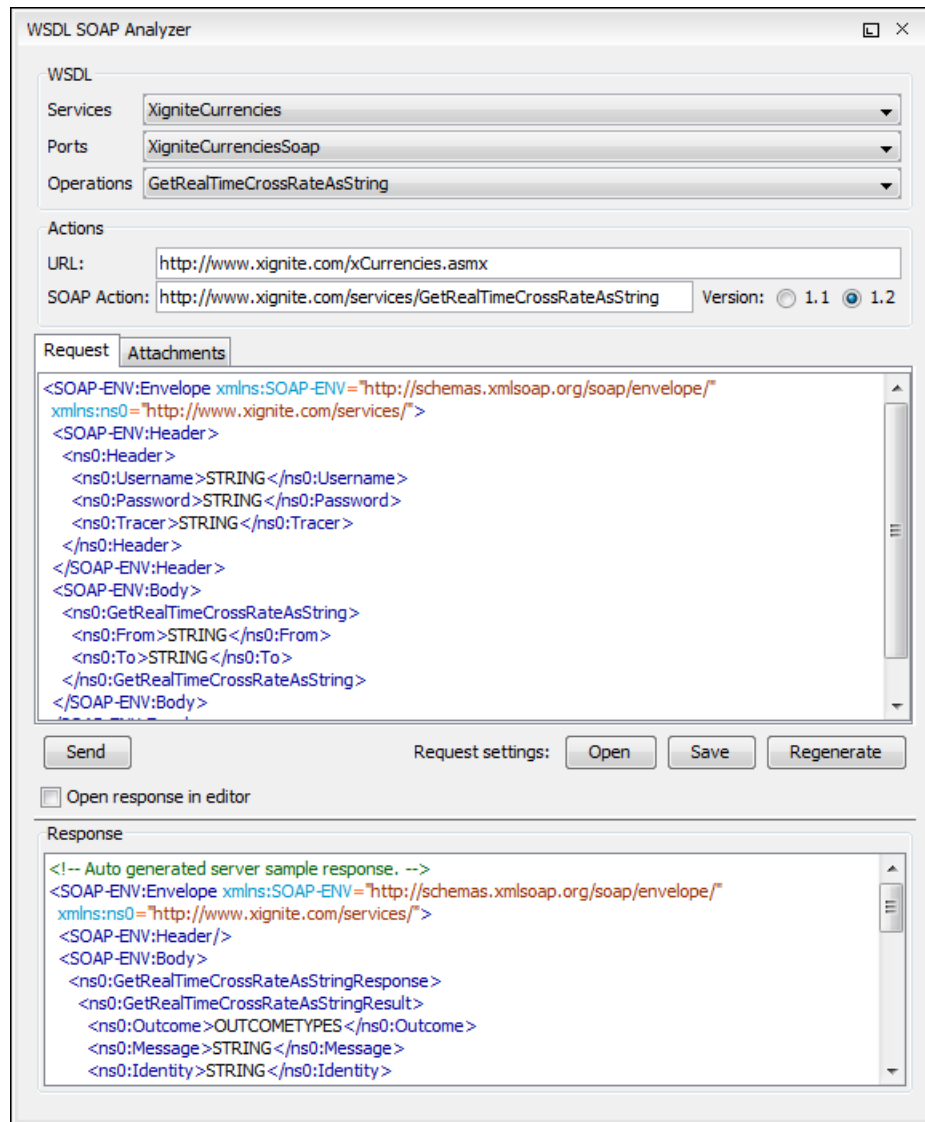


**Figure 528: WSDL SOAP Analyzer Dialog Box**

This tool contains a SOAP analyzer and sender for Web Services Description Language file types. The analyzer fields are as follows:

- **Services** - The list of services defined by the WSDL file.
- **Ports** - The ports for the selected service.
- **Operations** - The list of available operations for the selected service.
- **Action URL** - The script that serves the operation.
- **SOAP Action** - Identifies the action performed by the script.
- **Version** - Choose between 1.1 and 1.2. The SOAP version is selected automatically depending on the selected port.
- **Request Editor** - It allows you to compose the web service request. When an action is selected, Oxygen XML Developer tries to generate as much content as possible for the SOAP request. The envelope of the SOAP request has the correct namespace for the selected SOAP version, that is `http://schemas.xmlsoap.org/soap/envelope/` for SOAP 1.1 or `http://www.w3.org/2003/05/soap-envelope` for SOAP 1.2. Usually you just have to change a few values for the request to be valid. The [Content Completion Assistant](#) is available for this editor and is driven by the schema that defines the type of the current message. While selecting various operations, Oxygen XML Developer remembers the modified request for each one. You can press the **Regenerate** button to overwrite your modifications for the current request with the initial generated content.
- **Attachments List** - You can define a list of file URLs to be attached to the request.

- **Response Area** - Initially it displays an auto generated server sample response so you can have an idea about how the response looks like. After pressing the **Send** button, it presents the message received from the server in response to the Web Service request. It may show also error messages. If the response message contains attachments, Oxygen XML Developer prompts you to save them, then tries to open them with the associated system application.
- **Errors List** - There may be situations where the WSDL file is respecting the WSDL XML Schema, but it fails to be valid (for example, in the case of a message that is defined by means of an element that is not found in the types section of the WSDL). In such a case, the errors are listed here. This list is presented only when there are errors.
- **Send Button** - Executes the request. A status dialog box is displayed when Oxygen XML Developer is connecting to the server.

The testing of a WSDL file is straight-forward: click the WSDL analysis button, then select the service, the port, and the operation. The editor generates the skeleton for the SOAP request. You can edit the request, eventually attach files to it and send it to the server. Watch the server response in the response area. You can find more details in the [Testing Remote WSDL Files](#) section.

**Note:** SOAP requests and responses are automatically validated in the **WSDL SOAP Analyzer** using the XML Schemas specified in the WSDL file.

Once defined, a request derived from a Web Service descriptor can be saved with the **Save** button to a Web Service SOAP Call (WSSC) file for later reuse. In this way, you save time in configuring the URLs and parameters.

You can open the result of a Web Service call in an editor panel using the **Open** button.

## Testing Remote WSDL Files

To open and test a remote WSDL file the steps are the following:

1. Go to **Tools >  WSDL SOAP Analyzer**.
2. On the **WSDL File** tab enter the URL of the remote WSDL file.

You enter the URL:

- by typing
  - by browsing the local file system
  - by browsing a remote file system
  - by browsing [a UDDI Registry](#)
3. Press the **OK** button.  
This will open the [WSDL SOAP Analyzer tool](#). In the **Saved SOAP Request** tab you can open directly a previously saved Web Service SOAP Call (WSSC) file, thus skipping the analysis phase.

## UDDI Registry Browser

Pressing the  button in the **WSDL File Opener** dialog box (menu **Tools > WSDL SOAP Analyzer**) opens the **UDDI Registry Browser** dialog box.

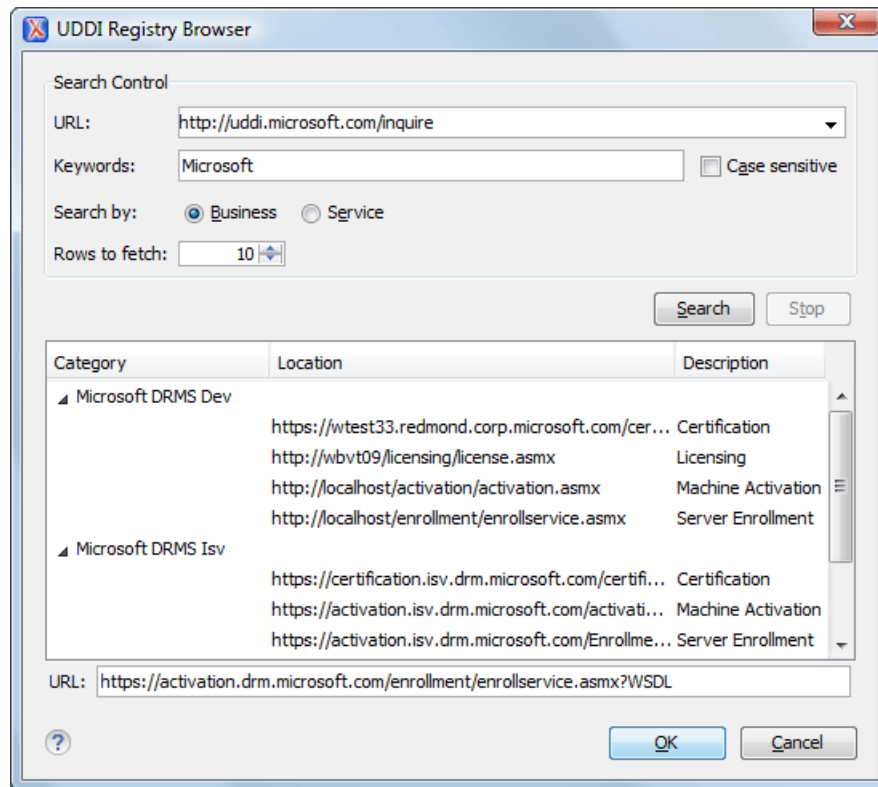


**Figure 529: UDDI Registry Browser Dialog Box**

The fields of the dialog box are as follows:

- **URL** - Type the URL of an UDDI registry or choose one from the default list.
- **Keywords** - Enter the string you want to be used when searching the selected UDDI registry for available Web services.
- **Rows to fetch** - The maximum number of rows to be displayed in the result list.
- **Search by** - You can choose to search either by company or by provided service.
- **Case sensitive** - When selected, the search takes into account the keyword case.
- **Search** - The WSDL files that matched the search criteria are added in the result list.

When you select a WSDL from the list and click the **OK** button, the **UDDI Registry Browser** dialog box is closed and you are returned to the **WSDL File Opener** dialog box.

## XML Schema Regular Expressions Builder

The XML Schema regular expressions builder allows you to test regular expressions on a fragment of text as they are applied to an XML instance document. Start the tool by selecting **XML Schema Regular Expressions Builder** from the **Tools** menu.

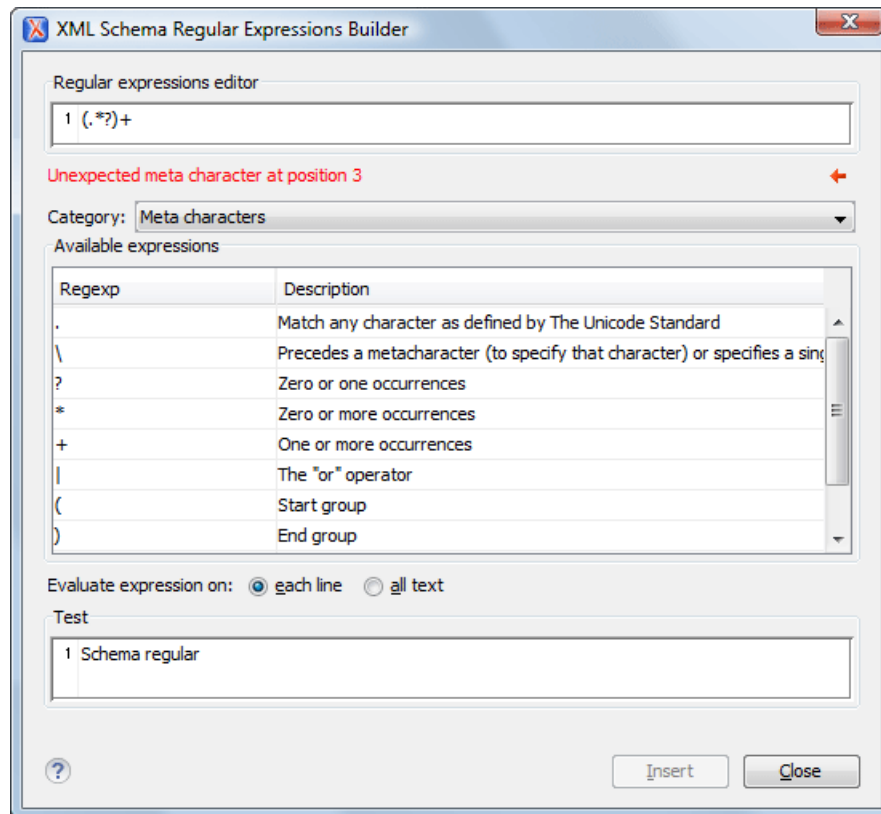


**Figure 530: XML Schema Regular Expressions Builder Dialog Box**

The dialog box contains the following:

#### **Regular expressions editor**

Allows you to edit the regular expression to be tested and used. Content completion is available and presents a list with all the predefined expressions. It is triggered by pressing **Ctrl + Space (Command + Space on OS X)**.

#### **Error display area**

If the edited regular expression is incorrect, an error message will be displayed here. The message contains the description and the exact location of the error. Also, clicking the quick navigation button (➔) highlights the error inside the regular expression.

#### **Category**

You can choose from several categories of predefined expressions. The selected category influences the displayed expressions in the **Available expressions** table.

#### **Available expressions**

This table includes the available regular expressions and a short description for each of them. The set of expressions depends on the category selected in the previous **Category** combo box. You can add an expression in the **Regular expressions editor** by double-clicking the expression row in the table. You will notice that in the case of **Character categories** and **Block names**, the expressions are also listed in complementary format.

#### **Evaluate expression on**

You can choose between two options:

- **Evaluate expression on each line** - The edited expression will be applied on each line in the **Test** area.
- **Evaluate expression on all text** - The edited expression will be applied on the whole text.

#### **Test**

A text editor that allows you to enter a text sample for which the regular expression will be applied. All matches of the edited regular expression will be highlighted.

After editing and testing your regular expression you can insert it in the current editor. The **Insert** button will become active when an editor is opened in the background and there is an expression in the **Regular expressions editor**.

The regular expression builder cannot be used to insert regular expressions in the **Grid mode** or **schema Design mode**. Accordingly, the **Insert** button will be not available if the current document is edited in these modes.

**Note:** Some regular expressions may indefinitely block the Java Regular Expressions engine. If the execution of the regular expression does not end in about five seconds, the application displays a dialog box that allows you to interrupt the operation.

## Large File Viewer

---

XML files tend to become larger and larger mostly because they are frequently used as a format for database export or for porting between multiple database formats. Traditional XML text editors simply cannot handle opening these huge export files, some having sizes exceeding one gigabyte, because all the file content must be loaded in memory before the user can actually view it.

The best performance of the viewer is obtained for encodings that use a fixed number of bytes per character (such as UTF-16 or ASCII). The performance for UTF-8 is very good for documents that use mostly characters of the European languages. For the same encoding, the rendering performance is higher for files consisting of long lines (up to few thousands characters) and may degrade for short lines. In fact, the maximum size of a file that can be rendered in the Large File Viewer decreases when the total number of the text lines of the file increases. Trying to open a very large file (for example, a file of 4 GB) with a very high number of short lines (100 or 200 characters per line) may produce an *out of memory* error (**OutOfMemoryError**) that would require either increasing the Java heap memory with the **-Xmx** startup parameter or decreasing the total number of lines in the file.

The powerful **Large File Viewer** is available from the **Tools** menu or as a standalone application. You can also right-click a file in your project and choose to open it with the viewer. It uses an efficient structure for indexing the opened document. No information from the file is stored in the main memory, just a list of indexes in the file. In this way the viewer can open very large files, up to 10 gigabytes. If the opened file is XML, the encoding used to display the text is detected from the XML prolog of the file. For other file types, the encoding is taken from the Oxygen XML Developer options. See [Encoding for non XML files](#).



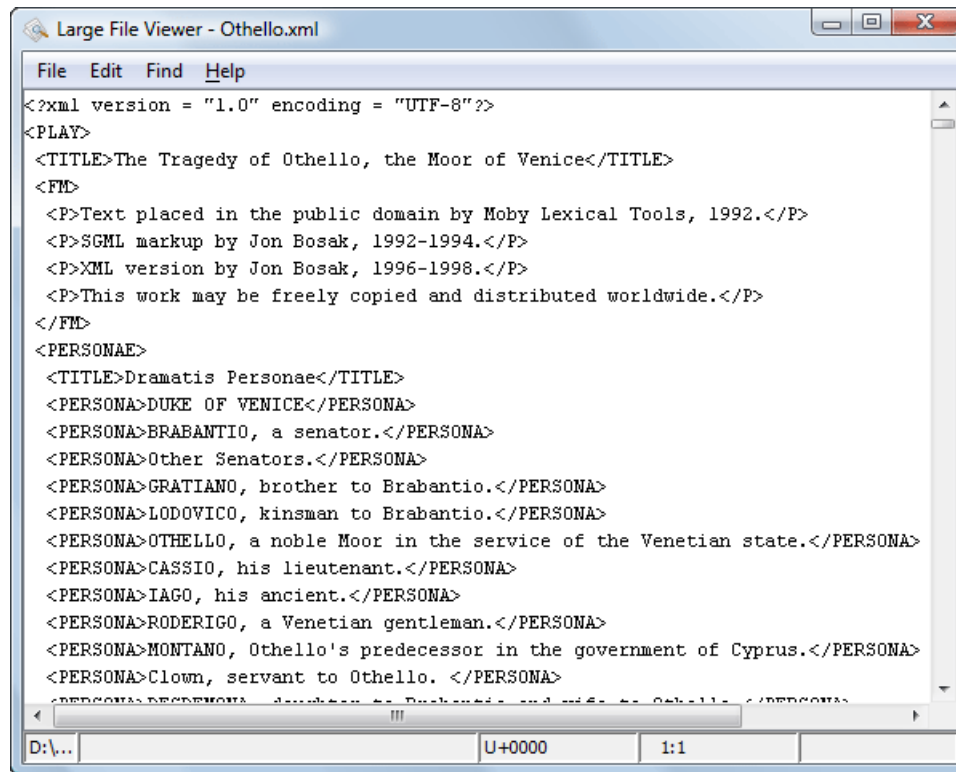


**Figure 531: Large File Viewer**

**Large File Viewer** components:

- The menu bar provides menu driven access to all the features and functions that are available in **Large File Viewer**:
  - File > Open**  
Opens files in the viewer (also available in the contextual menu).
  - File > Exit**  
Closes the viewer.
  - Edit > Copy**  
Copies the selected text to clipboard (also available in the contextual menu).
  - Find > Find**  
Opens a reduced **Find** dialog box that provides some basic search options, such as:
    - **Case sensitive** - When selected, operations are case-sensitive.
    - **Regular Expression** - When selected, allows you to use any regular expression in [Perl-like syntax](#).
    - **Wrap around** - Continues the find operation from the start/end of the document after reaching the end/, depending on whether the search is in forward or backward direction.
  - Help > Help**  
Provides access to the User Manual.
- The status bar provides information about the current opened file path, the Unicode representation of the character at cursor position and the line and column in the opened document where the cursor is located.



**Attention:** For faster computation the **Large File Viewer** uses a fixed font (plain, monospace font of size 12) to display characters. The font is *not* configurable from the [Preferences](#) page.

**Tip:** The best performance of the viewer is accomplished for encodings that use a fixed number of bytes per character (such as UTF-16 or ASCII). The performance for UTF-8 is very good for documents that use mostly characters of the European languages. For the same encoding the rendering performance is high for files consisting of short lines (up to a few thousand characters) and may degrade for long lines.

## Hex Viewer

When the Unicode characters that are visible in a text viewer or editor are not enough and you need to see the byte values of each character of a document, you can start the **Hex Viewer** that is available on the **Tools** menu. It has two panels: the characters are rendered in the right panel and the bytes of each character are displayed in the left panel. There is a 1:1 correspondence between the characters and their byte representation: the byte representation of a character is displayed in the same matrix position of the left panel as the character in the matrix of the right panel.

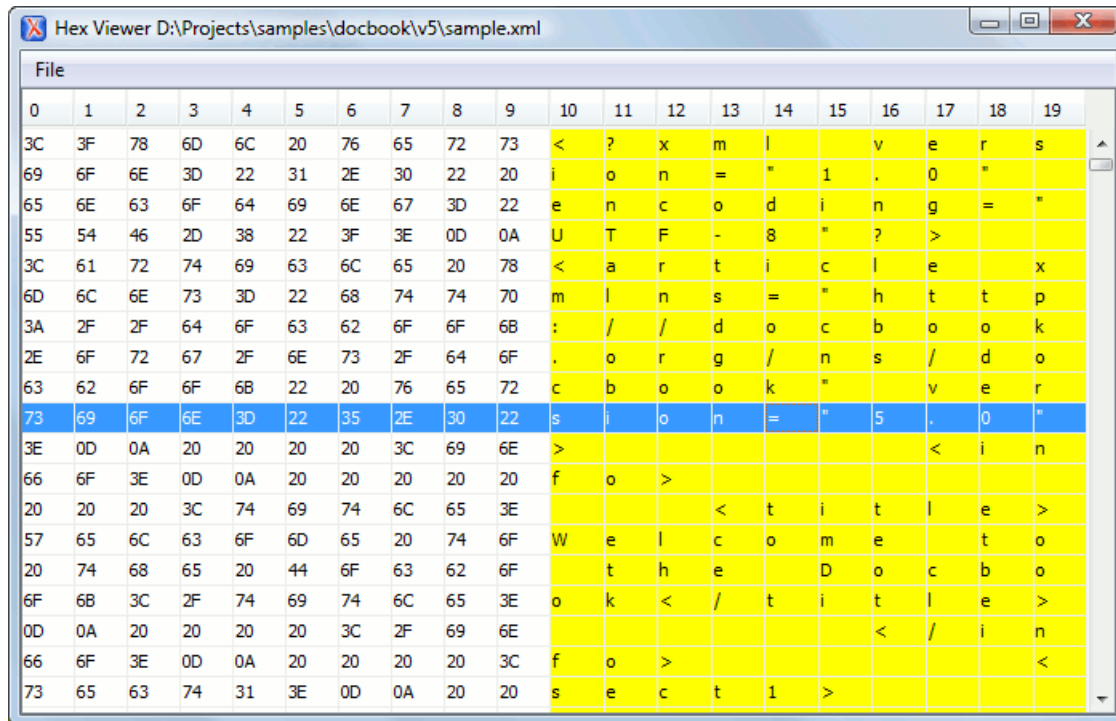


Figure 532: Hex Viewer

To open a file in **Hex Viewer** use the **File > Open** action. Alternatively, you can drag a file and drop it in the **Hex Viewer** panel.

## Standalone SVG Viewer

Oxygen XML Developer includes a simple **SVG Viewer** that allows you to work with SVG images.

To open the viewer, select **SVG Viewer** from the **Tools** menu.

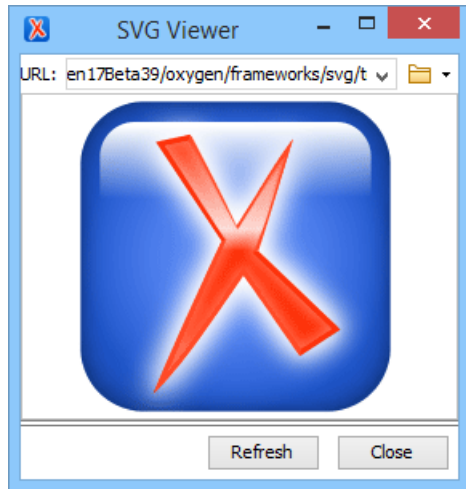


**Figure 533: SVG Viewer**

You can browse for and open any SVG file that has the .svg or .svgz extension.

If the file is included in the current project, you can open it in the viewer by right-clicking the image file in the **Project view** and selecting **Open with > SVG Viewer**.

### **Actions Available in the SVG Viewer**

The following actions are available in the **SVG Viewer**:

#### **Zoom in**

To zoom in on an image, use any of the following methods:

- Scroll **forward** with the mouse wheel.
- Select **Zoom in** from the contextual menu.
- Use the **Ctrl + I (Command + I on OS X)** keyboard shortcut.

#### **Zoom out**

To zoom in on an image, use any of the following methods:

- Scroll **backward** with the mouse wheel.
- Use the **Ctrl + O (Command + O on OS X)** keyboard shortcut.
- Select **Zoom out** from the contextual menu.

#### **Rotate**

To rotate an image, use either of the following methods:

- Use the **Ctrl + Right-Click + Drag (Command + Right-Click + Drag on OS X)** shortcut.
- Select **Rotate** from the contextual menu. This rotates the image exactly 90 degrees clockwise.

#### **Refresh**

To refresh (or reset) an image, use either of the following methods:

- Use the **Ctrl + T (Command + T on OS X)** keyboard shortcut.
- Select **Refresh** from the contextual menu.

#### **Move**

To move an image, use either of the following methods:

- Use the **Arrow Keys** on your keyboard.
- Use the **Shift + Left-Click + Drag** shortcut.

#### **Pan**

To pan an image, **click and drag** the image with your mouse.

## Related Information:

[Editing SVG Files](#) on page 660

## Tree Editor

The **Tree Editor** (**Tools > Tree Editor**) is used for editing the content of a document displayed as an XML tree. The workspace offers the following functional areas:

- **Main menu** - Provides access to all the features and functions available in Oxygen XML Developer **Tree Editor**.
- **Toolbar** - Provides easy access to common and frequently used functions. Each icon is a button that acts as a shortcut to a related function.
- **Editor panel** - Easy editing of structured mark-up documents. Each token has an associated icon for easier visual identification.
- **Message panel** - Displays messages returned from user operations.
- **Model view** - Shows the detailed information about the attribute or element that you are working on.
- **All Elements panel** - Presents a list of all defined elements that can be inserted within your document.

The tree editor does not offer entity support. Entities are not presented with a special type of node in the tree and new entity nodes cannot be inserted in the document.

## Compare Files

The **Compare Files** tool can be used to compare files or XML file fragments. The tool provides a mechanism for comparing two files or fragments, as well as the mechanism for a three-way comparison. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (diffFiles.exe).

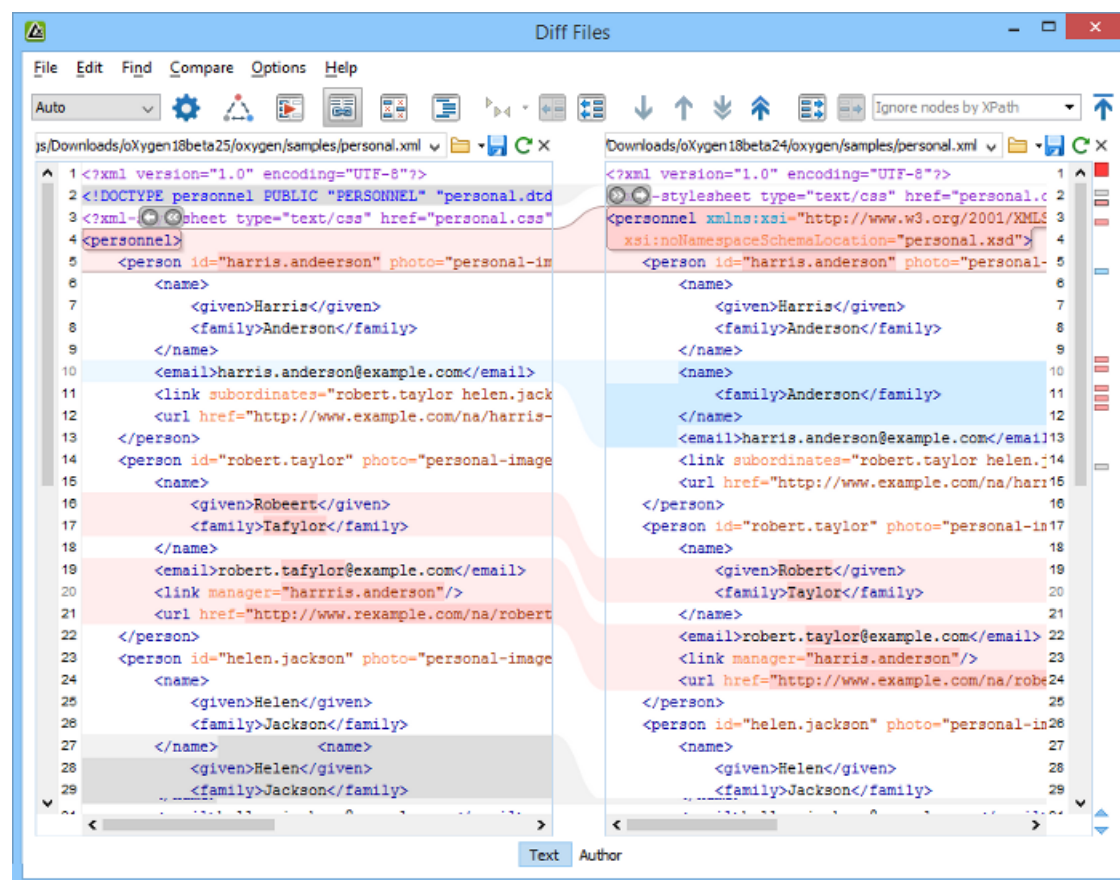


Figure 534: Compare Files Tool

## Two-Way Comparisons

The **Compare Files** tool can be used to compare the differences between two files or XML fragments.

### Compare Files

To perform a two-way comparison, follow these steps:

1. Open a file in the left panel and the file you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the browsing tools in the  **Browse** drop-down menu.

**Step Result:** The selected files are opened in the two side-by-side editors. A text editing mode is used to offer a better view of the differences.

2. To highlight the differences between the two files, click the  **Perform File Differencing** button from the toolbar.
3. You can use the drop-down menu on the left side of the toolbar to change the [algorithm](#) for the operation.
4. You can also use the  **Diff Options** button to access the **Files Comparison** preferences page where you can choose to ignore certain types of markup and configure various options.
5. If you are comparing XML documents using the **XML Fast** or **XML Accurate** algorithms, you can enter an XPath 2.0 expression in the **Ignore nodes by XPath** text field to ignore certain nodes from the comparison.

The resulting comparison will show you differences between the two files. The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes. This layout allows you to easily identify and focus on a group of related changes.




Figure 535: Two-Way Differences

### Highlighting Colors

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies modifications on either side.
- **Gray** - Identifies an addition of a node in the left side (your outgoing changes).
- **Blue** - Identifies an addition of a node in the right side (incoming changes).
- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.
- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

### Comparing Fragments (Copy/Paste)

To compare XML file fragments, you need to copy and paste the fragments you want to compare into each side, without selecting a file. If a file is already selected, you need to close it using the  **Close (Ctrl + W (Command + W on OS X))** button, before pasting the fragments. Other notes for pasting fragments:

- As long as the fragment is more than 10 characters, the application will attempt to automatically detect the content type. It can detect the following types: XML, DTD, CSS, JSON, and Markdown (if it starts with #). If one of those content types is detected, the fragments will be displayed with syntax highlights.
- If you save modified fragments, a dialog box opens that allows you to save the changes as a new document.

### Navigate Differences

To navigate through differences, do one of the following:

- Use the navigation buttons on the toolbar (or in the **Compare** menu).

- Select a block of differences by clicking its small colored marker in the overview ruler located in the right-most part of the window. At the top of the overview ruler there is a success indicator that turns green where there are no differences, or red if differences are found.
- Click a colored area in between the two text editors.

### Editing Actions

You can edit the files directly in either editing pane. The two editors are constantly synchronized and the differences are refreshed when you save the modified document or when you click the  **Perform File Differencing** button.

A variety of actions are available on the [toolbar](#) and in the [various menus](#) (these same actions are also available in the contextual menu in both editing panes). The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

#### **Append left change to right and Append right change to left**

Copies the content of the selected change from one side and appends it on the other, according to the content of the corresponding change. As a result, the side where the arrow points to will contain the changes from both sides.

#### **Copy change from left to right and Copy change from right to left**

Replaces the content of a change from one side with the content of the corresponding change from the other side.

#### **Remove change**

Rejects the change on the particular side and preserves the particular content on the other side.

### Two-Way Diff Algorithms

Oxygen XML Developer offers the following two-way diff algorithms to compare files or fragments:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level, meaning that it compares two files or fragments looking for identical characters.
- **Words** - Computes the differences at word level, meaning that it compares two files or fragments looking for identical words.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **Syntax Aware** - Computes differences for known file types or fragments. This algorithm splits the files or fragments into sequences of *tokens* and computes the differences between them. The meaning of a *token* depends on the type of compared files or fragments.

Known file types include those listed in the **New** dialog box, such as XML file types (XSLT files, XSL-FO files, XSD files, RNG files, NVDL files, etc.), XQuery file types (.xquery, .xq, .xqy, .xqm extensions), DTD file types (.dtd, .ent, .mod extensions), TEXT file type (.txt extension), or PHP file type (.php extension).

For example:

- When comparing XML files or fragments, a token can be one of the following:
  - The name of an XML tag
  - The < character
  - The /> sequence of characters
  - The name of an attribute inside an XML tag
  - The = sign
  - The " character
  - An attribute value
  - The text string between the start tag and the end tag (a text node that is a child of the XML element corresponding to the XML tag that encloses the text string)

- When comparing plain text, a token can be any continuous sequence of characters or any continuous sequence of whitespaces, including a new line character.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

### Three-Way Comparisons

Oxygen XML Developer also includes a three-way comparison feature to help you solve conflicts and merge changes between multiple modifications. It is especially helpful for teams who have multiple authors editing and committing the same documents. It provides a comparison between a local change, another change, and the original base revision. Some additional advantages include:

- Visualize and merge content that was modified by you and another member of your team.
- Marks differences correctly even when the document structure is rearranged.
- Allows you to merge XML-relevant modifications.

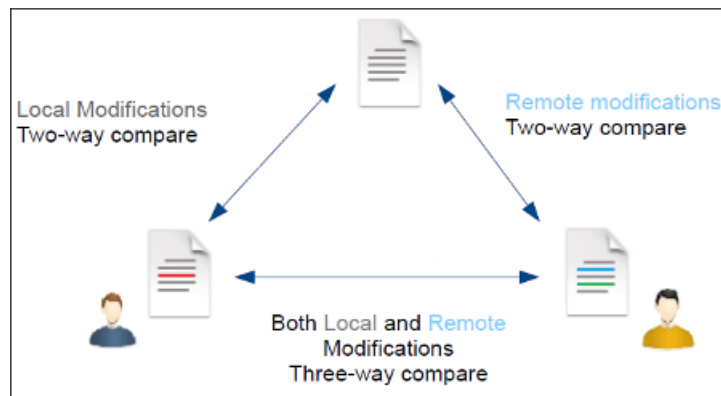


Figure 536: Three-Way Comparison

### Compare Files

To perform a three-way comparison, follow these steps:

1. Open a file in the left panel and the file you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down menu.

**Step Result:** The selected files are opened in the two side-by-side editors. A text editing mode is used to offer a better view of the differences.

2. Click the **Three-Way Comparison** button on the toolbar and select the base file in the **Base** field. You can specify the path by using the text field, the history drop-down, or the browsing tools in the **Browse** drop-down menu.
3. To highlight the differences, click the **Perform File Differencing** button on the toolbar.
4. You can use the drop-down menu on the left side of the toolbar to change the **algorithm** for the operation.
5. You can also use the **Diff Options** button to access the **Files Comparison** preferences page where you can choose to ignore certain types of markup and configure various options.

The resulting comparison will show you differences between the two files, as well as differences between either of them and the base (ancestor) file. The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes.

|    |                              |  |                              |    |
|----|------------------------------|--|------------------------------|----|
| 7  | <given>Robert</given>        |  | <given>Helen</given>         | 8  |
| 8  | <family>Taylor</family>      |  | <family>Jackson</family>     | 9  |
| 9  | </name>                      |  | </name>                      | 10 |
| 10 | <email>robert.taylor@example |  | <email>helen.jackson@example | 11 |

Figure 537: Three-Way Differences



## Highlighting Colors

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies blocks of changes that include conflicts.
- **Gray** - Identifies your outgoing changes that do not include conflicts.
- **Blue** - Identifies incoming changes that do not include conflicts.
- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.
- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

## Navigate Differences

To navigate through differences, do one of the following:

- Use the navigation buttons on the toolbar (or in the **Compare** menu).
- Select a block of differences by clicking its small colored marker in the overview ruler located in the right-most part of the window. At the top of the overview ruler there is a success indicator that turns green where there are no differences, or red if differences are found.
- Click a colored area in between the two text editors.

## Editing Actions

You can edit the files directly in either editing pane. The two editors are constantly synchronized and the differences are refreshed when you save the modified document or when you click the  **Perform File Differencing** button.

A variety of actions are available on the [toolbar](#) and in the [various menus](#) (these same actions are also available in the contextual menu in both editing panes). The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

### **Append left change to right and Append right change to left**

Copies the content of the selected change from one side and appends it on the other, according to the content of the corresponding change. As a result, the side where the arrow points to will contain the changes from both sides.

### **Copy change from left to right and Copy change from right to left**

Replaces the content of a change from one side with the content of the corresponding change from the other side.

### **Remove change**

Rejects the change on the particular side and preserves the particular content on the other side.

## Three-Way Diff Algorithms

Oxygen XML Developer offers the following three-way diff algorithms to compare files:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

## Second Level Comparisons

For both two-way and three-way comparisons, Oxygen XML Developer automatically performs a second level comparison for the **Lines**, **XML Fast**, and **XML Accurate** algorithms. After the first comparison is finished, the second level comparisons for the **Lines** algorithm is processed on text nodes using a word level comparison, meaning that it looks for identical words. For the **XML Fast** and **XML Accurate** algorithms, the second level



comparison is processed using a [syntax-aware comparison](#), meaning that it looks for identical *tokens*. This second level comparison makes it easier to spot precise differences and you can merge or reject the precise modifications.

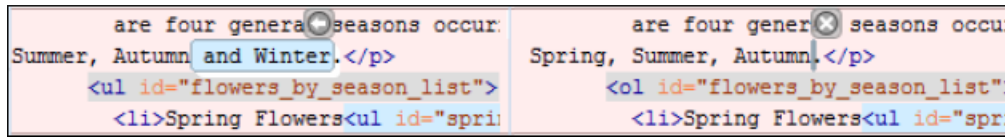


**Figure 538: Second Level Diff Comparison**

**Note:** If a modified text fragment contains XML markup (such as processing instructions, XML comments, CDATA, or elements), the second level comparison will not automatically be performed. In this case you can manually select a second level comparison by doing a word level or character level comparison.

To do a word level comparison, select **Show word level details** from the contextual menu or **Compare** menu.

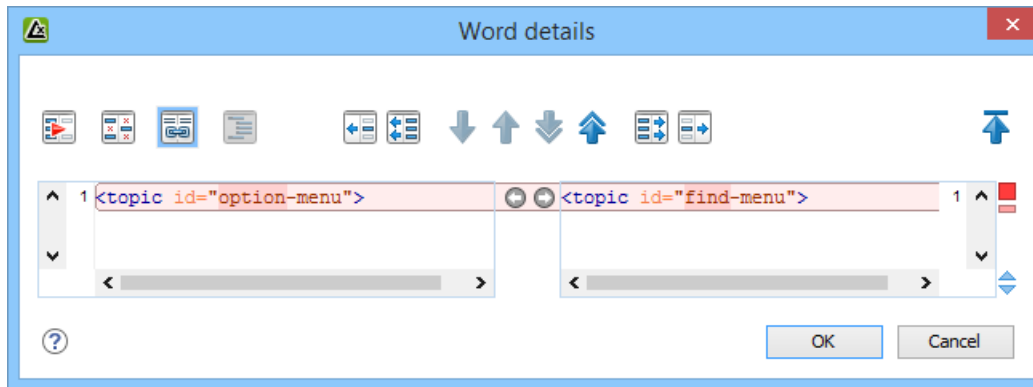


**Figure 539: Word Level Comparison**

To do a character level comparison, select **Show Character Level details** from the contextual menu or **Compare** menu.

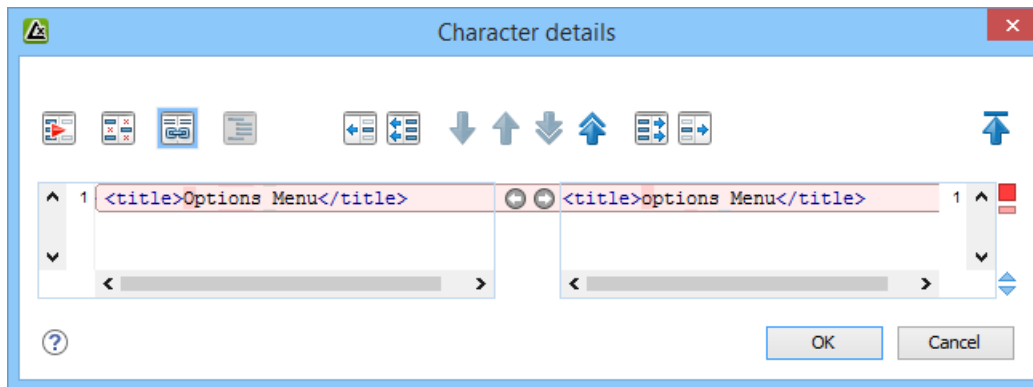


**Figure 540: Character Level Comparison**

#### Related Information:

[Files Comparison Preferences Page](#) on page 127

[Compare Directories](#) on page 347

## Starting File Comparison Tool from a Command Line

The file comparison tool can be started by using command-line arguments. In the installation folder there is an executable shell (`diffFiles.bat` on Windows, `diffFiles.sh` on OS X and Linux). To specify the files to compare, you can pass command-line arguments using the following construct: `diffFiles.bat / diffFiles.sh [path to left file] [path to right file] [path to 3-way base file]`.

If three files are specified, the tool will start in the [3-way comparison mode](#). If only two files are specified, the tool will start in the [2-way comparison mode](#). The first specified file will be added to the left panel in the comparison tool, the second file to the right panel, and the optional third file will be the base (ancestor) file used for a 3-way comparison. If you pass only one argument, you are prompted to manually choose another file.

If you want to launch the file comparison tool from an external application with specified files and you want the file browsing tools at the top of both panels to be hidden, you should use the `-ext` argument as the first command. There are some additional arguments that are allowed and to see all the details for the command line construct, type `diffFiles.bat --help` in the command line.

#### **Example:**

To do a 3-way comparison, the command line might look like this:

#### **Windows**

```
diffFiles.bat "c:\docs\file 1" "c:\docs\file 2" c:\docs\basefile
```

**Tip:** If there are spaces in the path names, surround the paths with quotes.

#### **Linux**

```
diffFiles.sh home/file1 home/file2 home/basefile
```

#### **Mac OS X**

```
diffFiles.sh documents/file1 documents/file2 documents/basefile
```

## **How to Integrate the File Comparison Tool with Git**

The file comparison tool can be integrated with Git clients. It requires that you configure your `.gitconfig` file and then you can simply start the tool from the command line.

To integrate the **Compare Files** tool with your Git client, follow this procedure:

1. Use one of the following methods to instruct your Git client to use the *Oxygen Compare Files* tool:

- **Manual Configuration** - Locate your Git user-specific configuration file (`.gitconfig`) and edit it with a text editor (for example, in Windows, the `.gitconfig` file is most likely located in your user home directory). Add (or replace) the following lines:

```
[diff]
 tool = oxygendiff
[merge]
 tool = oxygendiff
[diffTool "oxygendiff"]
 cmd = '[pathToOxygenInstallDir]/diffFiles.exe' -ext $REMOTE $LOCAL $LOCAL
[mergeTool "oxygendiff"]
 cmd = '[pathToOxygenInstallDir]/diffFiles.exe' -ext $LOCAL $REMOTE $BASE $MERGED
 trustExitCode = true
[diffTool]
 prompt = false
```

**Note:** For Mac OS X, the `cmd` lines would start with something like: `sh "/Applications/Oxygen XML Editor/diffFiles.sh"`. For Linux, the `cmd` lines would start with something like: `sh "/Oxygen XML Editor/diffFiles.sh"`.

- **Command Line Configuration** - To automatically configure the `.gitconfig` file, you can run the following commands from a command line:

```
git config --global diff.tool oxygendiff
git config --global diffTool.oxygendiff.cmd '[Oxygen install dir]/diffFiles.exe -ext $REMOTE $LOCAL $LOCAL'
git config --global merge.tool oxygendiff
git config --global mergeTool.oxygendiff.cmd '[Oxygen install dir]/diffFiles.exe -ext $LOCAL $REMOTE $BASE $MERGED'
git config --global mergeTool.oxygendiff.trustExitCode true
```

**Note:** For Mac OS X, the *Oxygen* file comparison tool would be specified in the second and fourth commands with something like: `sh "/Applications/Oxygen XML Editor/diffFiles.sh"`. For Linux, it would be something like: `sh "/Oxygen XML Editor/diffFiles.sh"`.

2. To start the **Compare Files** tool and see a comparison of changes for a particular file, run the following command from a command line:

```
git difftool [PathToFile]
```

**Tip:** If the file you want to compare has conflicts, you can start the **Compare Files** tool as a *merge conflict resolution* tool by running the following command:

```
git mergetool [PathToFile]
```

For more information about the Git *difftool* syntax, see <https://git-scm.com/docs/git-difftool>.

For more information about the Git *mergetool* syntax, see <https://git-scm.com/docs/git-mergetool>.

## How to Integrate the File Comparison Tool with SourceTree

The file comparison tool can be integrated with SourceTree so that you can use it to compare changes. The advantages of doing this include:

- The *Oxygen Compare Files* tool presents the files side-by-side and makes it much easier to determine real changes.
- The *Oxygen Compare Files* tool includes XML comparison algorithms.
- The *Oxygen Compare Files* tool includes various options for configuring the comparison.
- The *Oxygen Compare Files* tool allows you to navigate through changes.

To integrate the **Compare Files** tool with SourceTree, follow this procedure, depending on your operating system:

### Windows

1. In SourceTree, go to **Tools > Options**.
2. Go to the **Diff** tab.
3. In the **External Diff/Merge** section, configure the settings as follows:
  - **External Diff Tool** - Select **Custom**.
  - **Diff Command** - Enter the path of the *Oxygen diffFile.exe* file (for example: c:\Programs\Oxygen XML Editor 19\diffFiles.exe).
  - **Arguments** - Enter **-ext \$REMOTE \$LOCAL \$LOCAL**.
  - **Merge Tool** - Select **Custom**.
  - **Diff Command** - Enter the path of the *Oxygen diffFile.exe* file (for example: c:\Programs\Oxygen XML Editor 19\diffFiles.exe).
  - **Arguments** - Enter **-ext \$LOCAL \$REMOTE \$BASE \$MERGED**.
4. Click **OK**.

**Result:** In SourceTree, you can now compare file changes with the *Oxygen Compare Files* tool by simply selecting **External Diff** from the contextual menu, **Actions** menu, or **Ctrl+D**.


### Mac OS X

1. In SourceTree, go to **SourceTree > Preferences**.
2. Go to the **Diff** tab.
3. In the **External Diff/Merge** section, configure the settings as follows:
  - **External Diff Tool** - Select **Custom**.
  - **Diff Command** - Enter a command line argument to launch the *Oxygen diffFiles.sh* file (for example: **sh "/Applications/Oxygen XML Editor/diffFiles.sh"**).
  - **Arguments** - Enter **-ext \$REMOTE \$LOCAL \$LOCAL**.
  - **Merge Tool** - Select **Custom**.
  - **Diff Command** - Enter a command line argument to launch the *Oxygen diffFiles.sh* file (for example: **sh "/Applications/Oxygen XML Editor/diffFiles.sh"**).
  - **Arguments** - Enter **-ext \$LOCAL \$REMOTE \$BASE \$MERGED**.
4. Close the preferences dialog box.

**Result:** In SourceTree, you can now compare file changes with the *Oxygen Compare Files* tool by simply selecting **External Diff** from the contextual menu or **Actions** menu.

## Toolbar and Contextual Menu Actions of the Compare Files Tool

The toolbar of the **Compare Files** tool contains operations that can be performed on the source and target files or XML fragments. Many of the actions are also available in the contextual menu.

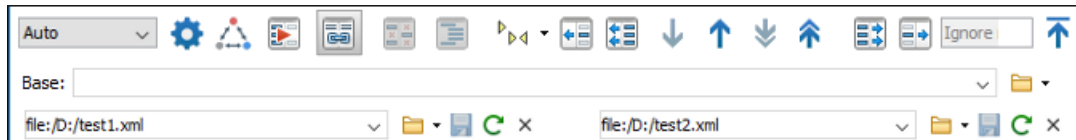

### Figure 541: Compare Toolbar

The following actions are available:

## Algorithm

This drop-down menu allows you to select one of the following diff algorithms (depending on whether it is a two-way or three-way comparison):

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Characters** - Computes the differences at character level, meaning that it compares two files or fragments looking for identical characters.
- **Words** - Computes the differences at word level, meaning that it compares two files or fragments looking for identical words.
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **Syntax Aware** - Computes differences for the file types or fragments known by Oxygen XML Developer, taking the syntax (the specific types of tokens) into consideration.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

## Diff Options

Opens the [Files Comparison preferences page](#) where you can configure various options.



### Three-Way Comparison

Toggle action that allows you to perform a three-way comparison between the two files displayed in the two editing panes and a base (ancestor) file.

## Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.

 **Synchronized scrolling**

Toggles synchronized scrolling on or off so that a selected difference can be seen on both sides of the application window. This option is on by default.

 **Ignore Whitespaces**

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.

 **Format and Indent Both Files (Ctrl + Shift + P (Command + Shift + P on OS X))**

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Note:** When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.



#### **Copy Change from Right to Left**

Copies the selected difference from the file in the right panel to the file in the left panel.



#### **Copy All Changes from Right to Left**

Copies all changes from the file in the right panel to the file in the left panel.



#### **Next Block of Changes (Ctrl + Period (Command + Period on OS X))**

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.



#### **Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))**

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.



#### **Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.



#### **Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.



#### **Copy All Changes from Left to Right**

Copies all changes from the file in the left panel to the file in the right panel.



#### **Copy Change from Left to Right**

Copies the selected difference from the file in the left panel to the file in the right panel.

### **Ignore Nodes by XPath**

You can use this text field to enter an [XPath expression](#) to ignore certain nodes from the comparison. It will be processed as XPath version 2.0. You can also enter the name of the node to ignore all nodes with the specified name (for example, if you want to ignore all ID attributes from the document, you could simply enter @id). This field is only available when comparing XML documents using the **XML Fast** or **XML Accurate** algorithms.

**Note:** If an XPath expression is specified in the [Ignore nodes by XPath option](#) in the **Diff / File Comparison** preferences page, that one is used as a default when the application is started. If you then enter an expression in this field on the toolbar, this one will be used instead of the default. If you delete the expression from this field, neither will be used.



#### **First Change (Ctrl + B (Command + B on OS X))**

Jumps to the first change.

### **Base**

Available for [three-way comparisons](#). It is the base file that will be compared with the files opened in the left and right editors. You can specify the path to the file by using the text field, its history drop-down, or the browsing tools in the **Browse** drop-down menu.

### **Left-Side (Source) File**

You can specify the path to the file to be compared on the left side (source) by using the text field, its history drop-down, or the browsing tools in the **Browse** drop-down menu.



#### **Save**

Saves the changes made in the source (left-side) file.

**Reload**

Reloads the source (left-side) file.

**Close**

Closes the source (left-side) file.

**Right-Side (Target) File**

You can specify the path to the file to be compared on the right side (target) by using the text field, its history drop-down, or the browsing tools in the  **Browse** drop-down menu.

**Save**

Saves the target (right-side) file.

**Reload**

Reloads the target (right-side) file.

**Close**

Closes the target (right-side) file.

**Compare Files Tool Menus**

The menus in the **Compare Files** tool contain some of the same actions that are on the toolbar, as well as some common actions that are identical to the same actions in the Oxygen XML Developer menus. The menu actions include:

**File Menu****Source >  Open**

Browses for a file that will be displayed in the left panel.

**Source >  Open URL**

Browses for a remote file that will be displayed in the left panel.

**Source >  Open File from Archive**

Browses an archive for a file that will be displayed in the left panel.

**Source >  Reload**

Reloads the file in the left panel.

**Source >  Save**

Saves the changes made to the file in the left panel.

**Source > Save As**

Allows you to choose a destination to save the file in the left panel.

**Source >  Close**

Closes the file in the left panel.

**Target >  Open**

Browses for a file that will be displayed in the right panel.

**Target >  Open URL**

Browses for a remote file that will be displayed in the right panel.

**Target >  Open File from Archive**

Browses an archive for a file that will be displayed in the right panel.

**Target >  Reload**

Reloads the file in the right panel.

### Target > Save

Saves the changes made to the file in the right panel.

### Target > Save As

Allows you to choose a destination to save the file in the right panel.

### Target > Close

Closes the file in the right panel.

### Base > Open

Browses for a file that will be compared with both files in a [three-way comparison](#).

### Base > Open URL

Browses for a remote file that will be compared with both files in a [three-way comparison](#).

### Base > Open File from Archive

Browses an archive for a file that will be compared with both files in a [three-way comparison](#).

### Close (Ctrl + W (Command + W on OS X))

Closes the application.

## Edit Menu

### Cut

Cut the selection from the currently focused editor panel to the clipboard.

### Copy

Copy the selection from the currently focused editor panel to the clipboard.

### Paste

Paste content from the clipboard into the currently focused editor panel.

### Select all

Selects all content in the currently focused editor panel.

### Undo

Undo changes in the currently focused editor panel.

### Redo

Redo changes in the currently focused editor panel.

## Find Menu

### Find/Replace

Perform *find/replace* operations in the currently focused editor panel.

### Find Next

Go to the next match using the same options as the last *find* operation. This action runs in both editor panels.

### Find Previous

Go to the previous match using the same options as the last *find* operation. This action runs in both editor panels.

## Compare Menu

### Three-Way Comparison

Toggle action that allows you to perform a three-way comparison between the two files displayed in the two editing panes and a base (ancestor) file.



## Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.

### ↓ Next Block of Changes (Ctrl + Period (Command + Period on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.

### ↑ Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

### ↗ Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

### ↖ Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

### ↓ Last Change (Ctrl + E (Command + E on OS X))

Jumps to the last change.

### ↑ First Change (Ctrl + B (Command + B on OS X))

Jumps to the first change.

### ↔ Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

### ↔ Copy All Changes from Left to Right

Copies all changes from the file in the left panel to the file in the right panel.

### ↔ Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.

### ↔ Copy Change from Left to Right

Copies the selected difference from the file in the left panel to the file in the right panel.

### 🔍 Show Word Level Details

Provides a word-level comparison of the selected change.

### 🔍 Show Character Level Details

Provides a character-level comparison of the selected change.

### ≡ Format and Indent Both Files (Ctrl + Shift + P (Command + Shift + P on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Note:** When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.

## Options Menu

### Preferences

Opens the preferences dialog box that includes numerous pages of options that can be configured.

### Menu Shortcut Keys

Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.



### **Reset Global Options**

Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.

### **Import Global Options**

Allows you to import an options set that you have previously exported.

### **Export Global Options**

Allows you to export the current options set to a file.

### **Help Menu**

#### **Help (F1)**

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

#### **Use Online Help**

If this option is selected, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is not selected or an internet connection fails, the help documentation is opened in offline mode.

#### **Report problem**

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

#### **Support Center**

Opens the Oxygen XML Developer Support Center web page in a browser.

## **Compare Directories**

---

The **Compare Directories** tool can be used to compare and manage changes to files and folders within the structure of your directories. The utility is available from the **Tools** menu or can be opened as a stand-alone application from the Oxygen XML Developer installation folder (`diffDirs.exe`).

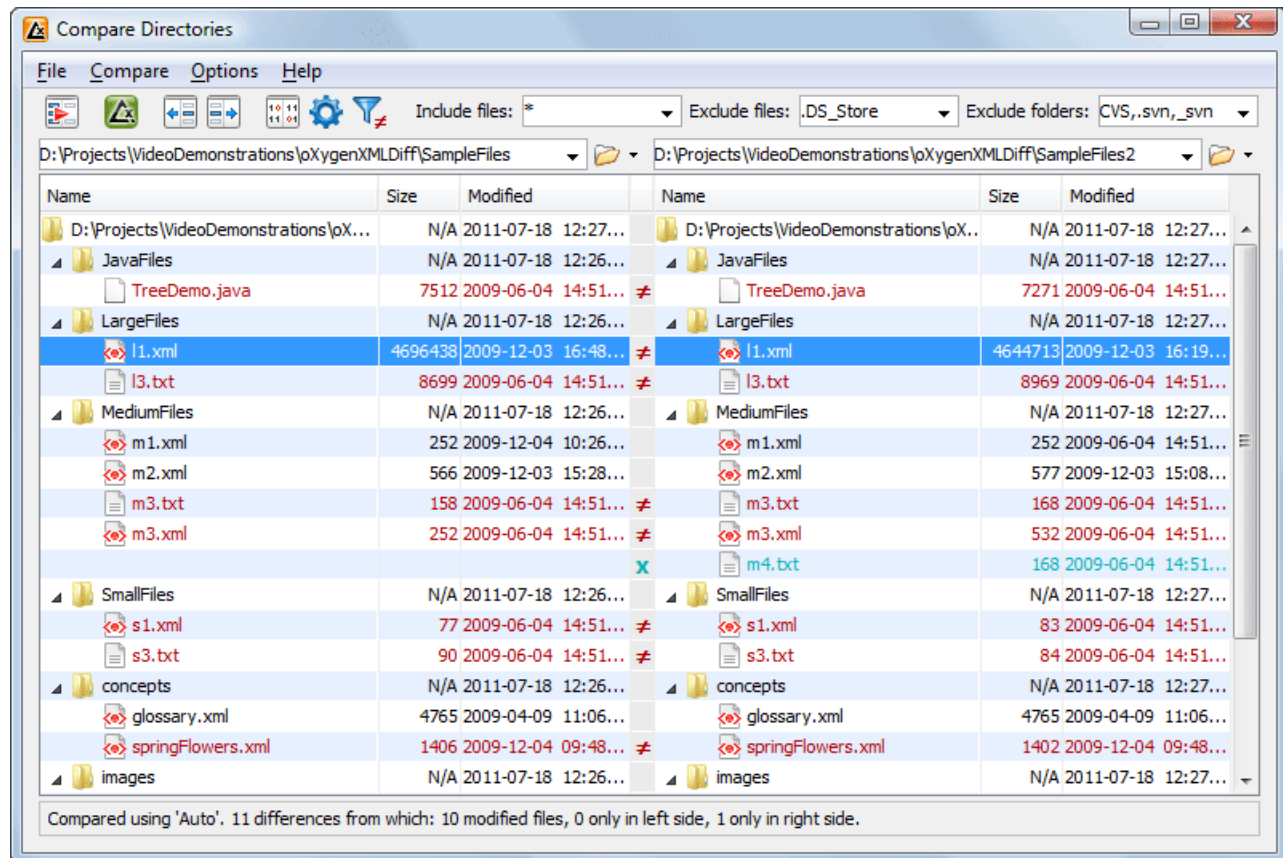


**Figure 542: Compare Directories Tool**

### Starting the Tool from a Command Line

The directory comparison tool can also be started by using command-line arguments. In the installation folder there is an executable shell (`diffDirs.bat` on Windows, `diffDirs.sh` on OS X and Linux). To specify the directories to compare, you can pass command-line arguments using the following construct: `diffDirs.bat / diffDirs.sh [directory path 1] [directory path 2]`.

If you pass only one argument, you are prompted to manually choose the second directory or archive.

#### Example:

To do a comparison between two directories, the command line would look like this:

#### Windows

```
diffDirs.bat "c:\documents new" "c:\documents old"
```

**Tip:** If there are spaces in the path names, surround the paths with quotes.

#### Linux

```
diffDirs.sh home/documents1 home/documents2
```

#### Mac OS X

```
diffDirs.sh documents1 documents2
```

### Directory Comparisons

To perform a directory comparison, follow these steps:

1. Select a folder in the left panel and the folder you want to compare it to in the right panel. You can specify the path by using the text field, the history drop-down, or the **Browse for local directory** action in the **Browse** drop-down menu.

**Step Result:** The selected directory structures are opened in the two side-by-side panels.

2. To highlight the differences between the two folders, click the  **Perform Directories Differencing** button from the toolbar.
3. You can also use the  **Diff Options** button to access the [Directories Comparison preferences page](#) where you can configure various options.

To compare the content of two archives, follow these steps:

1. Use the **Browse for archive file** action in the  **Browse** drop-down menu to select the archives in the left and right panels.
2. By default, the supported archives are not treated as directories and the comparison is not performed on the files inside them. To make Oxygen XML Developer treat supported archives as directories, select the [Look in archives option](#) in the **Directories Comparison** preferences page.
3. To highlight the differences, click the  **Perform Directories Differencing** button from the toolbar.

The directory comparison results are presented using two tree-like structures showing the files and folders, including their name, size, and modification date. A column that contains graphic symbols separates the two tree-like structures. The graphic symbols can be one of the following:

- An **X** symbol, when a file or a folder exists in only one of the compared directories.
- A **≠** symbol, when a file exists in both directories but the content differs. The same sign appears when a collapsed folder contains differing files.

The color used for the symbol and the directory or file name can be customized in the [Directories Comparison / Appearance preferences page](#). You can double-click lines marked with the **≠** symbol to open a **Compare Files** window, which shows the differences between the two files.

The directories that contain files that differ are expanded automatically so that you can focus directly on the differences. You can merge the contents of the directories by using the copy actions. If you double-click (or press **Enter**) on a line with a pair of files, Oxygen XML Developer starts a [file comparison](#) between the two files, using the **Compare Files** tool.

#### Related Information:

[Compare Files](#) on page 1125

## Toolbar and Contextual Menu Actions of the Compare Directories Tool

The toolbar of the **Compare Directories** tool contains operations that can be performed on the compared directory structure. Some of the toolbar actions are also available in the contextual menu.




Figure 543: Compare toolbar

### Toolbar Actions



#### **Perform Directories Differencing**

Looks for differences between the two directories displayed in the left and right side of the application window.



#### **Perform Files Differencing**

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



#### **Copy Change from Right to Left**

Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).



### Copy Change from Left to Right

Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).



### Binary Compare

Performs a byte-level comparison on the selected files.



### Diff Options

Opens the [Directory Comparison preferences page](#) where you can configure various options.



### Show Only Modifications

Displays a more uncluttered file structure by hiding all identical files.

## File and folder filters

Differences can be filtered using three combo boxes: **Include files**, **Exclude files**, and **Exclude folders**. They come with predefined values and are editable to allow custom values. All of them accept multiple comma-separated values and the \* and ? wildcards. For example, to filter out all JPEG and GIF image files, edit the **Exclude files** filter box to read \*.jpeg, \*.png. Each filter includes a drop-down menu with the latest 15 filters applied.

## Contextual Menu Actions



### Perform Files Differencing

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



### Binary Compare

Performs a byte-level comparison on the selected files.



### Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.



### Copy Change from Left to Right

Copies the selected difference from the file in the left panel to the file in the right panel.

## Open

If the action is invoked on a file, the selected file is opened in Oxygen XML Developer. If the action is invoked on a directory, the selected directory is opened in the default file browser for your particular operating system.

## Open in System Application

Opens the selected file in the system application that is associated with that type of file. The action is available when launching the **Compare Directories** tool from the **Tools** menu in Oxygen XML Developer.

## Show in Explorer

Opens the default file browser for your particular operating system with the selected file highlighted.

## Compare Directories Tool Menus

The menus in the **Compare Directories** tool contain some of the same actions that are on the toolbar, as well as some common actions that are identical to the same actions in the Oxygen XML Developer menus. The menu actions include:

### File Menu

#### Close (Ctrl + W (Command + W on OS X))

Closes the application.

## Compare Menu



### Perform Directories Differencing

Looks for differences between the two directories displayed in the left and right side of the application window.



### Perform Files Differencing

Opens the [Compare Files tool](#) that allows you to compare the currently selected files.



### Copy Change from Right to Left

Copies the selected change from the right side to the left side (if there is no file/folder in the right side, the left file/folder is deleted).



### Copy Change from Left to Right

Copies the selected change from the left side to the right side (if there is no file/folder in the left side, the right file/folder is deleted).

## Options Menu

### Preferences

Opens the preferences dialog box that includes numerous pages of options that can be configured.

### Menu Shortcut Keys

Opens the **Menu Shortcut Keys** option page where you can configure keyboard shortcuts available for menu items.

### Reset Global Options

Resets options to their default values. Note that this option appears only when the tool is executed as a stand-alone application.

### Import Global Options

Allows you to import an options set that you have previously exported.

### Export Global Options

Allows you to export the current options set to a file.

## Help Menu

### Help (F1)

Opens a **Help** dialog box that displays the User Manual at a section that is appropriate for the context of the current cursor position.

### Use Online Help

If this option is selected, when you select Help or press F1 while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is not selected or an internet connection fails, the help documentation is opened in offline mode.

### Report problem

Opens a dialog box that allows the user to write the description of a problem that was encountered while using the application. You can change the URL where the reported problem is sent by using the `com.oxygenxml.report.problems.url` system property. The report is sent in XML format through the `report` parameter of the POST HTTP method.

### Support Center

Opens the Oxygen XML Developer Support Center web page in a browser.

## Compare Images

You can use the **Compare Directories** tool to compare images. If you double-click a line that contains two different images, the **Compare images** window is displayed. This dialog box presents the images in the left and right sides, scaled to fit the available view area. You can use the contextual menu actions to scale the images to their original size or scale them down to fit in the view area.

The supported image types are: *GIF, JPG, JPEG, PNG, and BMP*.

## Compare Directories Against a Base (3-Way)

The **Compare Directories Against a Base (3-way)** tool allows you to perform three-way comparisons on directories to help you identify and merge changes between multiple modifications of the same directory structure. It is especially helpful for teams that have multiple authors contributing documents to the same directory system. It offers information about conflicts and changes, and includes actions to easily merge, accept, overwrite, or ignore changes to the directory system.

### How to Perform 3-Way Directory Comparisons

To perform a 3-way directories comparison, follow these steps:

1. Select **3 Compare Directories Against a Base (3-way)** from the **Tools** menu.

**Step Result:** This opens a dialog box that allows you to select the 3 file sets that will be used for the comparison.

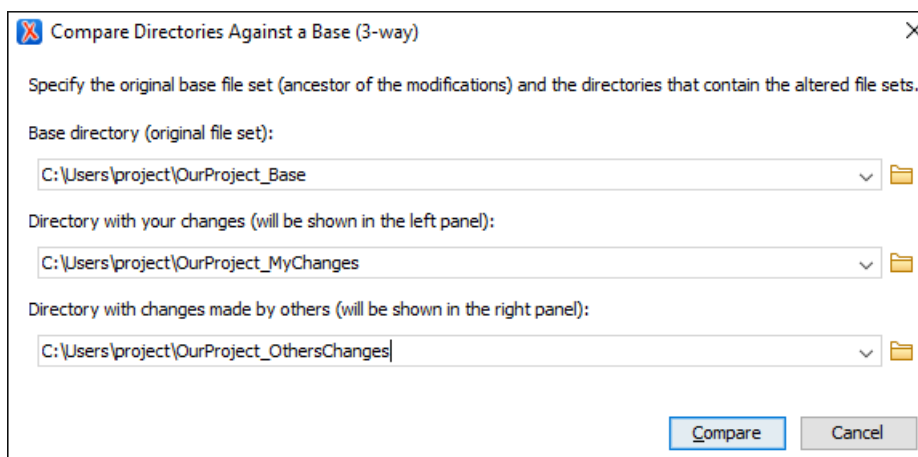


**Figure 544: Compare Directories Against a Base File Set Chooser**

2. Select the file sets to be compared:
  - **Base directory** - This is the original (base) file set before any modifications were made by your or others.
  - **Directory with your changes** - This is the file set with changes that you have made. This file set will be displayed in the left panel in the comparison tool.
  - **Directory with changes made by others** - This is the file set with changes made by others that you want to merge with your changes. This file set will be displayed in the right panel in the comparison tool.
3. Click the **Compare** button to compare the file sets and open the comparison and merge tool.
4. Use the features and actions described in the next section to identify and merge the changes.

## 3-Way Directory Comparison and Merge Tool

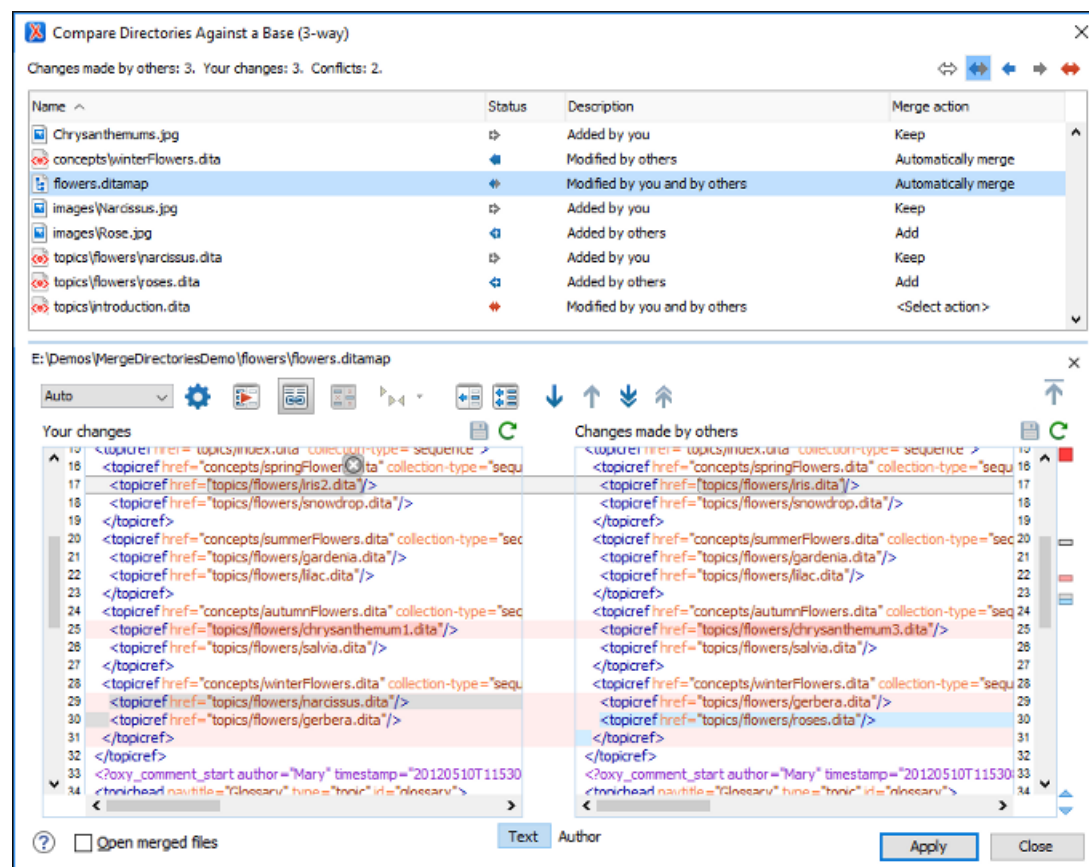


Figure 545: Comparison and Merge Tool

The 3-way directory comparison and merge tool includes the following information, features, and actions:

### Number of Changes and Conflicts

The first thing you see in top-left corner of the tool is grand total of all the changes made by others, changes made by you, and the number of conflicts.

### Filter Buttons

In the top-right corner you can use the toggle buttons to filter the list of modifications:

#### Show all files

Use this button to show all modified and unmodified files, as well as conflicts.

#### Show only files modified by you and others

Filters the list to show all files that have been modified, including conflicts.

#### Show only files modified by others

Filters the list to only show the files that were modified by others.

#### Show only files modified by you

Filters the list to only show the files that were modified by you.

#### Show only conflicting files

Filters the list to only show files that contain conflicts.

### List of Files Panel

This panel shows the list of files in the compared file sets based upon the filter button that is selected. This panel includes the following sortable columns:

- **Name** - The file names.

- **Status** - An icon that represents the file status. Red icons indicate some sort of conflict. Gray icons indicate modifications made by you. Blue icons indicate modifications made by others.
- **Description** - A description of the file status.
- **Merge Action** - This column provides a drop-down menu for each file that allows you to choose some merge actions depending upon its status. A default action is always set to automatically merge the changes made by others with your changes. If there is a conflict, the default is **<Select action>** and you are required to make a selection. Click this column to access the drop-down menu where you can make a selection. The same actions are available in the contextual menu.

You can click a file to open it in the file comparison panel (the file from your file set is shown in the left panel while the file from the file set with changes made by others is shown in the right panel). For image files, the comparison panel shows a preview of the image. For other binary files, a preview is not available and you will just see its status.

## File Comparison Panels

If you click a file in the top panel, the file is opened in this file comparison section. The file from your file set is shown in the left panel and the file from the other file set is shown in the right panel.

**Note:** If Oxygen XML Developer does not recognize the file type, a dialog box will be displayed that allows you to select the type of editor you want it to be associated with for this comparison (if you want Oxygen XML Developer to remember this association, you can select the **Associate file type with editor** option at the bottom of the dialog box).

This panel includes the following information and toolbar actions:

### File Path

The first thing you see in this panel is the file path where merge actions will be applied if you make changes.

### ✕ Close

Closes the file comparison panel.

### Algorithm Drop-Down Menu

This drop-down menu allows you to select one of the following diff algorithms to be used for file comparisons:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.

### Diff Options

Opens the [Files Comparison preferences page](#) where you can configure various options.



### Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.



### Synchronized scrolling

Toggles synchronized scrolling. When toggled on, a selected difference can be seen in both panels.



### Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



### Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.





### Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

### Next Block of Changes (Ctrl + Period (Command + Period on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.

### Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

### Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

### Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

### First Change (Ctrl + B (Command + B on OS X))

Jumps to the first change.

### Left-Side File (Your changes)

Above the panel you can see the file path and the following two buttons:



**Save**

Saves changes made to the file.



**Reload**

Reloads the file.

### Right-Side File (Changes made by others)

Above the panel you can see the file path and the following two buttons:



**Reload**

Reloads the file.

## Displaying Changes in the File Comparison Panels

The line numbers on each side and colored marks on the right-side vertical stripe help you to quickly identify the locations of the differences. Adjacent changes are grouped into blocks of changes.




**Figure 546: File Comparison Panels**

The differences are also highlighted in several colors, depending on the type of change, and dynamic lines connect the compared fragments in the middle section between the two panes. The highlighting colors can be customized in the [Files Comparison / Appearance preferences page](#), but the default colors and their shades mean the following:

- **Pink** - Identifies modifications on either side.
- **Gray** - Identifies an addition of a node in the left side (your outgoing changes).
- **Blue** - Identifies an addition of a node in the right side (incoming changes).
- **Lighter Shade** - Identifies blocks of changes that can be merged in their entirety.

- **Darker Shade** - Identifies specific changes within the blocks that can be merged more precisely.

### **Direct Editing Actions in the File Comparison Panels**

In addition to selecting merge actions from the drop-down menus in the **Merge Action** column in the top panel, you can also edit the files directly in the left pane (your local changes). The two editors are constantly synchronized and the differences are refreshed when you save the modified document ( **Save** button or **Ctrl+S**) or when you click the  **Perform File Differencing** button.

A variety of actions are available in the contextual menu in both editing panes. The tool also includes some inline actions to help you merge, copy, or remove changes. When you select a change, the following inline action widgets are available, depending on the type of change:

#### **Append right change to left**

Copies the content of the selected change from the right side and appends it on the left side.

#### **Copy change from right to left**

Replaces the content of a change in the left side with the content of the change in the right side.

#### **Remove change**

Removes the change from the left side.

Any time you save manual changes ( **Save** button or **Ctrl+S**), the selection in the **Merge Action** column in the top panel automatically changes to **Use merged** and a copy of the original file is kept so that you can revert to the original file if necessary. To discard your manual changes and revert to your original changes, select a different action in the **Merge Action** drop-down menu.

### **Open Merged Files**

If you select this option, all the files that will be modified by the merge operation will be opened in the editor after the operation is finished.

### **Applying Changes**

When you click the **Apply** button, all the merge actions you have selected and the changes you have made will be processed.

If there are unresolved conflicts (conflicts where no merge action is selected in the **Merge Action** drop-down menu), a dialog box will be displayed that allows you to choose how to solve the conflicts. You can choose between the following:

- **Keep your changes** - If you select this option and then click **Apply**, your local changes will be preserved for the unresolved conflicts.
- **Overwrite your changes** - If you select this option and then click **Apply**, your local changes will be overwritten with the changes made by others, for the unresolved conflicts.
- **Cancel** - You can click the **Cancel** button to go back to the merge tool to resolve the conflicts individually.

### **Cancelling Changes**

If you click the **Cancel** button at the bottom of the merge tool, all the changes you made in the tool will be lost.

### **Related Information:**

[Compare Directories](#) on page 347

[Compare Files](#) on page 1125

## **Syncro SVN Client**

The Syncro SVN Client is a client application for the Apache Subversion™ version control system, compatible with Subversion 1.6, 1.7, and 1.8 servers. It manages files and directories that change over time and are stored in a central repository. The version control repository is much like an ordinary file server, except that it remembers every change ever made to your files and directories. This allows you to access older versions of your files and examine the history of how and when your data changed.

To start Syncro SVN Client, go to **Tools > SVN Client**.

## Main Window

This section explains the main window of Syncro SVN Client.

### Views

The main window consists of the following views:

- **Repositories view** - Allows you to define and manage Apache Subversion™ repository locations.
- **Working Copy view** - Allows you to manage with ease the content of the working copy.
- **History view** - Displays information (author name, revision number, commit message) about the changes made to a resource during a specified period of time.
- **Editor view** - Allows you to edit various types of text files, with full syntax-highlight.
- **Annotations view** - Displays a list with information regarding the structure of a document (author and revision for each line of text).
- **Compare view** - Displays the differences between two revisions of a text file from the working copy.
- **Image Preview panel** - Allows you to preview standard image files supported by Syncro SVN Client: JPG, GIF and PNG.
- **Compare Images view** - Displays two images side by side.
- **Properties view** - Displays the SVN properties of a resource under version control.
- **Console view** - Displays information about the currently running operation, similar with the output of the Subversion command line client.
- **Dynamic Help view** - Shows information about the currently selected view.

The main window's status bar presents in the left side the operation in progress or the final result of the last performed action. In the right side there is a progress bar for the running operation and a stop button to cancel the operation.

### SVN Main Menu

The main menu of the Syncro SVN Client is composed of the following menus:

#### File Menu

##### New submenu:

##### New File

This operation creates a new file as a child of the selected folder from the **Repositories view** tree or the **Working Copy view** tree, depending on the view that was last used. Note that for the **Working Copy view**, the file is added to *version control* only if the selected folder is under *version control*.

##### New Folder (Ctrl (Command on OS X) + Shift + F)

This operation creates a new folder as a child of the selected folder from the **Repositories view** tree or the **Working Copy view** tree, depending on the view that was last used. Note that for the **Working Copy view**, the file is added to *version control* only if the selected folder is under *version control*.

##### New External Folder (Ctrl (Command on OS X) + Shift + W)

This operation allows you to add a new external definition on the selected folder. An external definition is a mapping of a local directory to a **URL of a versioned directory**, and ideally a particular revision, stored in the `svn:externals` property of the selected folder.

**Tip:** You can specify a particular revision of the external item by using a **peg revision** at the end of the URL (for example, `URL@rev1234`). You can also use peg revisions to access external items that were deleted, moved, or replaced.

The URL used in the external definition format can be relative. You can specify the repository URL that the external folder points to by using one of the following relative formats:

- `../` - Relative to the URL of the directory that the `svn:externals` property is set.
- `^/` - Relative to the root of the repository in which the `svn:externals` property is versioned.
- `//` - Relative to the scheme of the URL of the directory that the `svn:externals` property is set.
- `/` - Relative to the root URL of the server in which the `svn:externals` property is versioned.

**Important:** To change the target URL of an external definition, or to delete an external item, do the following:

1. Modify or delete the item definition found in the `svn:externals` property that is set on the parent folder.
2. For the change to take effect, use the **Update** operation on the parent folder of the external item.

**Note:** Syncro SVN Client does not support definitions of local relative external items.

#### **Open (Ctrl (Command on OS X) + O)**

This action opens the selected file in an editor where you can modify it. The action is active only when a single item is selected. The action opens a file with the internal editor or the external application associated with that file type. This action works on any file selection from the **Repositories view**, **Working Copy view**, **History view**, or **Directory Change Set view**, depending on the view that was last used to invoke it. In the case of a folder, the action opens the selected folder with the system application for folders (for example, Windows Explorer on Windows or Finder on OS X, etc). Note that opening folders is available only for folders selected in the **Working Copy view**.

#### **Open with (Ctrl (Command on OS X) + Shift + O)**

Displays the **Open with** dialog box for specifying the editor in which the selected file is opened. If multiple files are selected only external applications can be used to open the files. This action works on any file selection from **Repositories view**, **Working Copy view**, **History view**, or **Directory Change Set view**, depending on the view that was last used to invoke it.

#### **Show in Explorer/Show in Finder**

Opens the parent directory of the selected working copy file and selects the file.

#### **Save (Ctrl (Command on OS X) + S)**

Saves the local file currently opened in the editor or the **Compare** view.

#### **Save as**

Saves any file selected in the **Repositories**, **History**, or **Directory Change Set** view.

#### **Copy URL Location (Ctrl (Command on OS X) + Alt + U)**

Copies the URL location of the resource currently selected in the **Repositories** view to clipboard.

#### **Copy to**

Copies the currently selected resource, either in **Repositories** or **Working copy** view, to a specified location.

**Note:** This action can also be used from **History** and **Directory Change Set** views to recover older versions of a repository item.

#### **Move to (Ctrl (Command on OS X) + M)**

Moves the currently selected resource, either in **Repositories** or **Working copy** view, to a specified location.

#### **Rename (F2)**

Renames the resource currently selected, either in **Repositories** or **Working copy** view.

#### **Delete (Delete)**

Deletes the resource currently selected either, in **Repositories** or **Working copy** view.

#### **Locking:**

- **Scan for locks (Ctrl (Command on OS X) + L)** - Contacts the repository and recursively obtains the list of locks for the selected resources. A dialog box containing the locked files and the lock description will be displayed. This is only active for resources under *version control*. For more details see [Scanning for locks](#).
-  **Lock (Ctrl (Command on OS X) + K)** - Allows you to lock certain files that need exclusive access. You can write a comment describing the reason for the lock and you can also force (*steal*) the lock. This action is active only on files under *version control*. For more details on the use of this action see [Locking a file](#).
-  **Unlock (Ctrl (Command on OS X) + Alt + K)** - Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

 **Show SVN Properties (Ctrl (Command on OS X) + P)**

Opens the **Properties view** and displays the SVN properties for a selected resource from **Repositories view** or **Working Copy view**, depending on the view that was last used to invoke it.

 **Show SVN Information (Ctrl (Command on OS X) + I)**

Provides additional information for a selected resource. For more details, go to [Obtain information for a resource](#).

**Exit (Ctrl (Command on OS X) + Q)**

Closes the application.

## Edit Menu

 **Undo (Ctrl (Command on OS X) + Z)**

Undo edit changes in the local file that is currently opened in the editor or the **Compare** view.

 **Redo (Ctrl (Command on OS X) + Y)**

Redo edit changes in the local file that is currently opened in the editor or the **Compare** view.

 **Cut (Ctrl (Command on OS X) + X)**

Cut selection from the local file that is currently opened in the editor view or the **Compare** view to clipboard.

 **Copy (Ctrl (Command on OS X) + C)**

Copy selection from the local file that is currently opened in the editor or the **Compare** view to clipboard.

 **Paste (Ctrl (Command on OS X) + V)**

Paste selection from clipboard into the local file that is currently opened in editor or the **Compare** view.

 **Find/Replace (Ctrl (Command on OS X) + F)**

Perform find and replace operations in the local file that is currently opened in the editor or the **Compare** view.

 **Find Next (F3)**

Go to the next match using the same find options of the last find operation. This action runs in the editor panel and in any non-editable text area (for example, the **Console** view).

 **Find Previous (Shift + F3)**

Go to the previous match using the same find options of the last find operation. This action runs in the editor panel and in any non-editable text area (for example, the **Console** view).

## Repository Menu

 **New Repository Location (Ctrl + Alt + N (Command + Alt + N on OS X))**

Displays the **Add SVN Repository** dialog box. This dialog box allows you to define a new repository location.

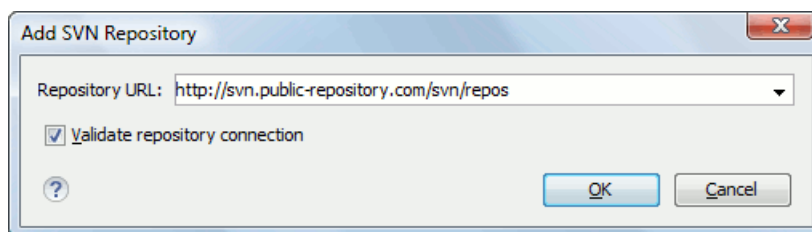


**Figure 547: Add SVN Repository Dialog Box**

If the **Validate repository connection** option is selected, the URL connection is validated before being added to the **Repositories** view.

### **Edit Repository Location (Ctrl + Alt + E (Command + Alt + E on OS X))**

Context-dependent action that allows you to edit the selected repository location using the **Edit SVN Repository** dialog box. It is active only when a repository location root is selected.

### **Change the Revision to Browse (Ctrl + Alt + B (Command + Alt + B on OS X))**

Context-dependent action that allows you to change the selected repository revision using the **Change the Revision to Browse** dialog box. It is active only when a repository location root is selected.

### **Remove Repository Location (Ctrl + Alt + R (Command + Alt + R on OS X))**

Allows you to remove the selected repository location from the view. It shows you a confirmation dialog box before removal. It is active only when a repository location root is selected.

### **Refresh (F5)**

Refreshes the resource selected in the **Repositories** view.

### **Check out (Ctrl + Alt + O (Command + Alt + O on OS X))**

Allows you to create a working copy from a repository directory, on your local file system. To read more about this operation, see the section [Check out a working copy](#).

### **Export**

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

### **Import:**

#### **Import folder (Ctrl + Shift + L (Command + Shift + L on OS X))**

Allows you to import the contents of a specified folder from the file system into the selected folder in a repository. To read more about this operation, see the section [Importing resources into a repository](#).

**Note:** The difference between the **Import folder** and **Share project** actions is that the latter also converts the selected directory into a working copy.

#### **Import Files (Ctrl + Shift + I (Command + Shift + I on OS X))**

Imports the files selected from the files system into the selected folder in the repository.

## **Working Copy Menu**

### **Working Copies Manager (📁 on OS X)**

Opens a dialog box with a list of working copies that the Apache Subversion™ client is aware of. In this dialog box you can add existing working copies or remove those that are no longer needed.

### **Switch to**

Selects one of the following view modes:  **All Files**,  **Modified**,  **Incoming**,  **Outgoing**, or  **Conflicts**.

### **Refresh (F5)**

Refreshes the state of the selected resources or of the entire working copy (if there is no selection).

### **Synchronize (Ctrl (Command on OS X) + Shift + S)**

Connects to the repository and determines the working copy and repository changes made to the selected resources. The application switches to **Modified** view mode if the [Always switch to 'Modified' mode](#) option is selected.

### **Update (Ctrl (Command on OS X) + U)**

Updates all the selected resources that have incoming changes to the HEAD revision. If one of the selected resources is a directory then the update for that resource will be recursive.

### **Update to revision/depth**

Allows you to update the selected resources from the working copy to an earlier revision from the repository. You can also select the update *depth* for the current folder. You can find out more about the *depth* term in the [sparse checkouts](#) section.



## Commit

Collects the outgoing changes from the selected resources in the working copy and allows you to choose exactly what resources to commit. A directory will always be committed recursively. Unversioned resources will be deselected by default. In the **Commit** dialog box you can also enter a comment before sending your changes to the repository.

### **Update all (Ctrl (Command on OS X) + Shift + U)**

Updates all resources from the working copy that have incoming changes. It performs a recursive update on the synchronized resources.

### **Commit all**

Commits all the resources with outgoing changes. It is disabled when **Incoming** mode is selected or the synchronization result does not contain resources with outgoing changes. It performs a recursive commit on the synchronized resources.

### **Revert (Ctrl (Command on OS X) + Shift + V)**

Undoes all local changes for the selected resources. It does not contact the repository and the files are obtained from Apache Subversion™ pristine copy. It is available only for modified resources. See [Revert your changes](#) for more information.

### **Edit conflict (Ctrl (Command on OS X) + E)**

Opens the **Compare** editor, allowing you to modify the content of the currently conflicting resources. For more information about editing conflicts, see [Edit conflicts](#).

### **Mark Resolved (Ctrl (Command on OS X) + Shift + R)**

Instructs the Subversion system that you resolved a conflicting resource. For more information, see [Merge conflicts](#).

### **Mark as Merged (Ctrl (Command on OS X) + Shift + M)**

Instructs the Subversion system that you resolved the pseudo-conflict by merging the changes and you want to commit the resource. Read the [Merge conflicts](#) section for more information about how you can solve the pseudo-conflicts.

## Override and Update

Drops any outgoing change and replaces the local resource with the HEAD revision. This action is available on resources with outgoing changes, including conflicting ones. See the [Revert your changes](#) section.

## Override and Commit

Drops any incoming changes and sends your local version of the resource to the repository. This action is available on conflicting resources. For more information see [Drop incoming modifications](#).

## Mark as copied

You can use this action to mark an item from the working copy as a copy of an other item under *version control*, when the copy operation was performed outside of an SVN client. The **Mark as copied** action is available when you select two items (both the new item and source item), and it depends on the state of the source item.

## Mark as moved

You can use this action to mark an item from the working copy as being moved from another location of the working copy, when the move operation was performed outside of an SVN client. The **Mark as moved** action is available when you select two items from different locations (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

## Mark as renamed

You can use this action to mark an item from the working copy as being renamed outside of an SVN client. The **Mark as renamed** action is available when you select two items from the same directory (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

### **Add to "svn:ignore" (Ctrl (Command on OS X) + Alt + I)**

Allows you to add files that should not participate in the *version control* operations inside your working copy. This action can only be performed on resources not under *version control*. It actually modifies the

value of the `svn:ignore` property in the parent directory of the resource. Read more about this in the [Ignore Resources Not Under Version Control](#) section.

 **Add to version control (Ctrl (Command on OS X) + Alt + V)**

Allows you to add resources that are not under *version control*. For further details, see [Add Resources to Version Control](#) section.

**Remove from version control**

Schedules selected items for deletion from repository upon the next commit. The items are not removed from the file system after committing.

 **Clean up (Ctrl (Command on OS X) + Shift + C)**

Performs a maintenance cleanup operation on the selected resources from the working copy. This operation removes the Subversion maintenance locks that were left behind. This is useful when you already know where the problem originated and want to fix it as quickly as possible. It is only active for resources under *version control*.

 **Expand All (Ctrl (Command on OS X) + Alt + X)**

Displays all descendants of the selected folder. The same behavior is obtained by double-clicking a collapsed folder.

 **Collapse all (Ctrl (Command on OS X) + Alt + Z)**

Collapses all descendants of the selected folder. The same behavior is obtained by double-clicking a expanded folder.

**Compare Menu**

 **Perform Files Differencing**

Looks for differences between the two files displayed in the left and right side panels.

 **Next Block of Changes (Ctrl + Period (Command + Period on OS X))**

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.

 **Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))**

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

 **Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

 **Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

 **Last Change (Ctrl + E (Command + E on OS X))**

Jumps to the last change.

 **First Change (Ctrl + B (Command + B on OS X))**

Jumps to the first change.

 **Copy All Changes from Right to Left**

Copies all changes from the file in the right panel to the file in the left panel.

 **Copy Change from Right to Left**

Copies the selected difference from the file in the right panel to the file in the left panel.



### **Show Word Level Details**

Provides a word-level comparison of the selected change.

### **Show Character Level Details**

Provides a character-level comparison of the selected change.

### **Format and Indent Both Files (Ctrl + Shift + P (Command + Shift + P on OS X))**

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Note:** When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.

### **Ignore Whitespaces**

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.

## History Menu

### **Show History (Ctrl (Command on OS X) + H)**

Displays the history for a SVN resource at a given revision. The resource can be one selected from the **Repositories** view, **Working Copy** view, or from the **Affected Paths** table from the **History** view, depending on which view was last focused when this action was invoked.

### **Show Annotation (Ctrl + Shift + A (Command + Shift + A on OS X))**

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.

## Repositories

This operation is available for any resource selected from view, **Working Copy** view, **History** view or **Directory Change Sets** view, depending on which view was last focused when this action was invoked.

### **Revision Graph (Ctrl (Command on OS X) + G)**

This action allows you to see the graphical representation of a resource's history. For more details about a resource's revision graph see the section [Revision Graph](#). This operation is available for any resource selected in the **Repositories** view or **Working Copy** view.

## Tools Menu

### **Share project**

Allows you to [share a new project](#) using an SVN repository. The local project is automatically converted into an SVN working copy.

### **Branch / Tag**

Allows you to copy the selected resource from the **Repositories** view or **Working Copy** view to a branch or tag into the repository. To read more about this operation, see the section [Creating a Branch / Tag](#).

### **Merge (Ctrl (Command on OS X) + J)**

Allows you to merge the changes made on one branch back into the trunk, or vice versa, using the selected resource from the working copy. To read more about this operation, see the section [Merging](#).

### **Switch (Ctrl (Command on OS X) + Alt + W)**

Allows you to change the repository location of a working copy, or only of a versioned item of the working copy, within the same repository. It is available when the selected item of the working copy is a versioned resource, except for *external* items. To read more about this action, see the [Switching the Repository Location](#) section.

### **Relocate**

Allows you to change the base URL of the root folder of the working copy to a new URL when the base URL of the repository changed. For example, if the repository itself was moved to a different server. This operation is only available for the root item of the working copy. To read more about this operation, see the [Relocate a Working Copy](#) section.

### **Create patch (Ctrl (Command on OS X) + Alt + P)**

Allows you to create a file containing all the differences between two resources, based on the `svn diff` command. To read more about creating patches, see [the section about patches](#).

### **Working copy format**

This submenu contains the following two operations:

#### **Upgrade**

Upgrades the format of the currently loaded working copy to the newest one known by Syncro SVN Client. This allows you to benefit of all the new features of the client.

#### **Downgrade**

Downgrades the format of the currently loaded working copy to SVN 1.7 format. This is useful if you want to use older SVN clients with the current working copy, or, by mistake, you have upgraded the format of an older working copy to SVN 1.8.

**Note:** SVN 1.7 working copies cannot be downgraded to older formats.

See the section [Working Copy Format](#) to read more about this subject.

## **Options Menu**

### **Preferences**

Opens the **Preferences** dialog box.

### **Menu Shortcut Keys**

Opens the [Menu Shortcut Keys preferences page](#), where users can configure in one place the keyboard shortcuts available for menu items available in Syncro SVN Client.

### **Global Run-Time Configuration**

Allows you to configure SVN general options, that should be used by all the SVN clients you may use:

- **Edit 'config' file** - In this file you can configure various SVN client-side behaviors.
- **Edit 'servers' file** - In this file you can configure various server-specific protocol parameters, including HTTP proxy information and HTTP timeout settings.

### **Export Options**

Allows you to export the current options to an XML file.

### **Import Options**

Allows you to import options you have previously exported.

### **Reset Options**

Resets all your options to the default ones.

### **Reset Authentication**

Resets the Subversion authentication information.

## **Window Menu**

### **Show View**

Allows you to select the view you want to bring to front.

### **Show Toolbar**

Allows you to select the toolbar you want to be visible.

### **Enable flexible layout**

Toggles between a fixed and a flexible layout. When the flexible layout is enabled, you can move and dock the internal views to adapt the application to various viewing conditions and personal requirements.

### **Reset Layout**

Resets all the views to their default position.

## Help Menu

### Help (F1)

Opens the **Help** dialog box.

### Use online help (selected by default)

If this option is selected, when you select **Help** or press **F1** while hovering over any part of the interface, Oxygen XML Developer attempts to open the help documentation in online mode. If this option is not selected or an internet connection fails, the help documentation is opened in offline mode.

### Show Dynamic Help view

Displays the **Dynamic Help** view.

### Report Problem

Opens a dialog box that allows you to write the description of a problem that was encountered while using the application.

### Support Center

Opens the Support Center web page in a browser.

### About

Opens the **About** dialog box.

## SVN Main Toolbar

The toolbar of the Syncro SVN Client SVN Repositories window contains the following actions:



### Check out

Checks out a working copy from a repository. The repository URL and the working copy format must be specified.



### Synchronize

Synchronizes the current working copy with the repository.



### Update All

Updates all resources of the working copy that have an older revision than repository.



### Commit All

Commits all resources of working copy that have a newer version compared to that of the repository.



### Refresh

Refreshes the whole content of the current working copy from disk starting from the root folder. At the end of the operation, the modified files and folders that were not committed to repository yet, are displayed in the **Working Copy** view.



### Compare

The selected resource is compared with:

- The *BASE* revision, when the selected resource is:
  - Locally modified and the **All Files** view mode is currently selected (no matter if there are incoming changes).
  - Locally modified and there are no incoming changes when any other view mode is selected.
- The remote version of the same resource, when remote information is available after a **Synchronize** operation (only when one of **Modified**, **Incoming**, **Outgoing** and **Conflicts** view modes is selected).
- The working copy revision, when the selected resource is from the **History** view.



### Show History

Displays the history of the selected resource (from the **Working Copy** or **Repository** views) in the **History** view.



### Show Annotation

Displays the annotations of the selected resource. The selected resource can be in the **Working Copy** or the **History** views.



### Revision Graph

Displays the revision graph of the selected resource. The selected resource can be in the **Working Copy** or the **Repositories** views.



### Enable/Disable flexible layout

Toggles between a fixed and a flexible layout. When the flexible layout is enabled, you can move and dock the internal views to adapt the application to various viewing conditions and personal requirements.

## Status Bar

The status bar of the Syncro SVN Client window displays important details of the current status of the application. This information is available only in the **Working Copy** view.




**Figure 548: Status bar**

The status bar is composed of the following areas:

- The path of the currently processed file from the current working copy (during an operation such as **Check out** or **Synchronize**) or the result of the last operation.
- The current status of the following working copy options:
  - Show ignored files (📁).
  - Show deleted files (🗑️).
  - Process svn:externals definitions (🔗).

The options for ignored and deleted files are switched on and off from [the Settings menu](#) of the **Working Copy** panel:

- The format of the currently loaded working copy.
- The current numbers of incoming changes (➡️), outgoing changes (➡️) and conflicting changes (⚡️).
- A progress bar for the currently running SVN operation and a button (🛑) that allows you to stop it.

## Getting Started

This section explains the basic operations that can be done in Syncro SVN Client.

### SVN Repository Location

This section explains how to add and edit the repository locations in Syncro SVN Client.

#### Add / Edit / Remove Repository Locations

Usually, team members do all of their work separately, in their own working copy, and then must share their work by committing their changes. This is done using an Apache Subversion™ repository. Oxygen XML Developer supports versions 1.4, 1.5, 1.6, 1.7, and 1.8 of the SVN repository format.

Before you can begin working with a Subversion repository, you must define a repository location in the [Repositories view](#).

To create a repository location, use the  **New Repository Location** action that is available in the **Repository** menu, the **Repositories** view toolbar, and in the contextual menu. This action opens the **New Repository Location** dialog box, which prompts you for the [URL of the repository](#) you want to connect to. You can also [use peg revisions at the end of the URLs](#) (for example, URL@rev1234) to browse only that specific revision. No authentication information is requested at the time the location is defined. It is left to the Subversion client to request the user and password information when it is needed. The main benefit of allowing Subversion to manage your password is that it prompts you for a new password only when your password changes.

Once you enter the repository URL, Oxygen XML Developer tries to contact the server to get the content of the repository for displaying it in the [Repositories view](#). If the server does not respond in the timeout interval set in the preferences, an error is displayed. If you do not want to wait until the timeout expires, you can use the  **Stop** button from the toolbar of the view.

To edit a repository location, use the  **Edit Repository Location** action that is available in the **Repository** menu and in the contextual menu. This action opens the **Edit Repository Location** dialog box, which prompts you for the [URL of the repository](#) you want to connect to. You can also [use peg revisions at the end of the URLs](#) (for example, URL@rev1234) to browse only that specific revision.

To remove a repository location, use the  **Remove Repository Location** action that is available in the **Repository** menu and in the contextual menu. A confirmation dialog box is displayed to make sure that you do not accidentally remove the wrong locations.

The order of the repositories can be changed in the **Repositories** view at any time with the  **Up** arrow and  **Down** arrow buttons on the toolbar of the view. For example, pressing the up arrow once moves the selected repository in the list up one position.

To set the reference revision number of an SVN repository use the **Change the Revision to Browse** action that is available in the **Repository** menu and in the contextual menu. The revision number of the repository is used for displaying the contents of the repository when it is viewed in the [Repositories view](#). Only the files and folders that were present in the repository at the moment when this revision number was generated in the repository are displayed as contents of the repository tree. Also, this revision number is used for all the operations executed directly from the [Repositories view](#).

### Authentication

Five protocols are supported: *HTTP*, *HTTPS*, *SVN*, *SVN + SSH* and *FILE*. If the repository that you are trying to access is password protected, the **Enter authentication data** dialog box requests a user name and a password. If the **Store authentication data** checkbox is selected, the credentials are stored in Apache Subversion™ default directory:

- Windows - %HOME%\Application Data\Subversion\auth. Example: C:\Documents and Settings\John\Application Data\Subversion\auth
- Linux and OS X - \$HOME/.subversion/auth. Example: /home/John/.subversion/auth

There is one file for each server that you access. If you want to make Subversion forget your credentials, you can use the **Reset authentication** command from the **Options** menu. This causes Subversion to forget all your credentials. When you reset the authentication data, restart Oxygen XML Developer for the change to take effect.

**Tip:** The *FILE* protocol is recommended if the SVN repository and Oxygen XML Developer are located on the same computer as it ensures faster access to the SVN repository compared with other protocols.

For HTTPS connections where client authentication is required by your SSL server, you must choose the certificate file and enter the corresponding certificate password that is used to protect your certificate.

When using a secure HTTP (HTTPS) protocol for accessing a repository, a **Certificate Information** dialog box is displayed and asks you whether you want to accept the certificate permanently, temporarily, or simply deny it.

If the repository has SVN+SSH protocol, the SSH authentication can also be made with a private key and a pass phrase.

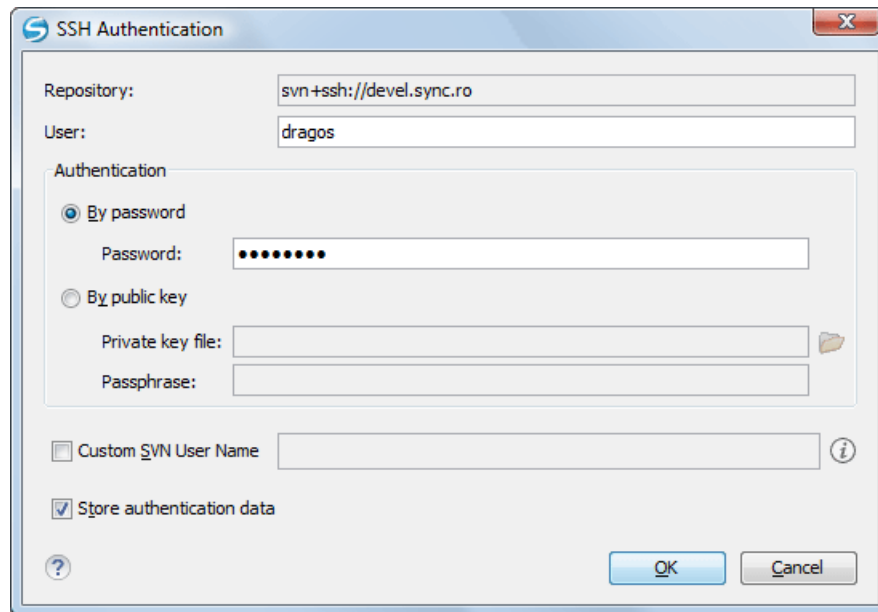


**Figure 549: SSH Authentication Dialog Box**

After the SSH authentication dialog box, another dialog box appears for entering the SVN user name that accesses the SVN repository. The SVN user name is recorded as the *committer* in SVN operations.

When connecting for the first time to a Subversion repository through SVN+SSH protocol, you will be asked to confirm if you trust the SSH host. The same dialog box is also displayed when the server changed the SSH key or when the key was deleted from the local Subversion cache folder.

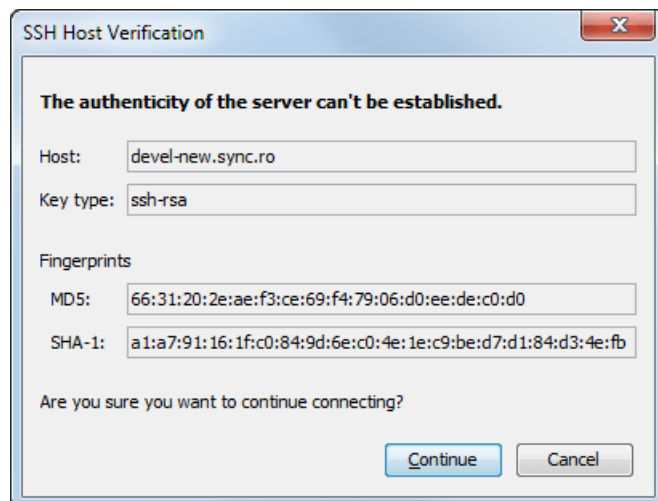


**Figure 550: SSH server name and key fingerprint**

## Share a Project

Even if you start developing a new project, or you want to migrate an existing one to Subversion, the Syncro SVN Client allows you to easily share it with the rest of your team. The shared project directory is automatically converted to a working copy and added under Syncro SVN Client management. The **Share project** action is available in the **Tools** menu and the contextual menu of the **Repositories** view.

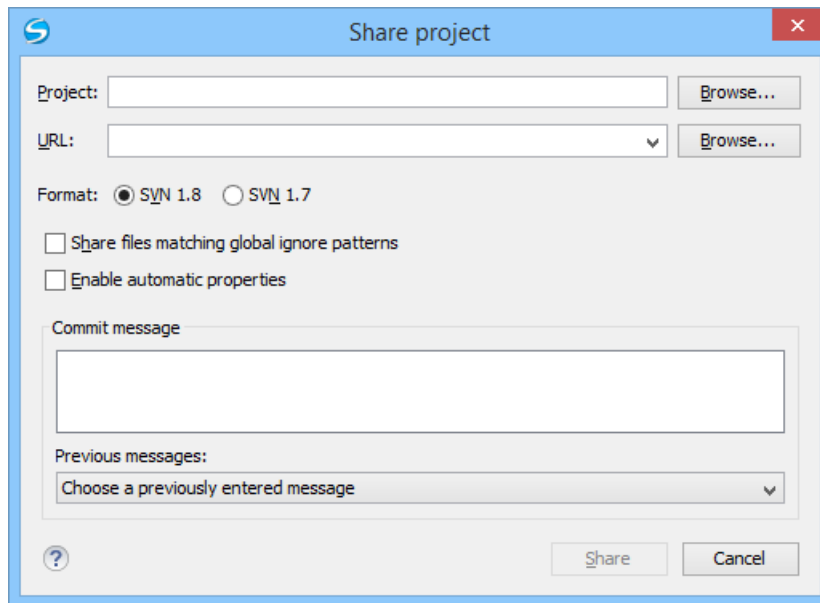


**Figure 551: Share Project Dialog Box**

The following options can be configured in the **Share project** dialog box:

#### **Project**

The location of the project folder on the local disk by using the text box or the **Browse** button. This folder should not be empty or already under version control.

**Important:** By default, the SVN system only imports the content of the specified folder, and not the root folder itself. Therefore, it is recommended to use the **Browse** button to select the project folder so that the client will automatically append the name of it to the specified URL.

#### **URL**

The new location of the project (inside the repository) that will be used to access it.

**Note:** *Peg revisions* have no effect for this operation since it is used to send information to the repository.



**Attention:** If the new location already exists, make sure that it is an empty directory to avoid mixing your project content with other files (if items exist with the same name, an error will occur and the operation will not proceed). Otherwise, if the address does not exist, it is created automatically.

#### **Format**

The SVN format of the working copy. You can choose between **SVN 1.8** or **SVN 1.7**.

#### **Share files matching global ignore patterns**

When selected, the file names that match the patterns defined in either of the following locations are also imported into the repository:

- The `global-ignores` property in the [SVN configuration file](#).
- The **File name ignore patterns** option in the [SVN > Working Copy preferences page](#).

#### **Enable automatic properties/Disable automatic properties**

Enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in the [SVN configuration file](#).

**Note:** This option is available only when there are defined properties to be applied automatically for newly added items under version control. You can define these properties in the SVN config file (in the `auto-props` section). Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

#### **Defining a Working Copy**

An Apache Subversion™ working copy is an ordinary directory tree on your local system, containing a collection of files. You can edit these files however you want, your working copy being your private work area. To make your



own changes available to others or incorporate changes made by others, you must explicitly tell Subversion to do so. You can even have multiple working copies of the same project.

| svnkit                                                 |  |   |              |          |        |  |  |   |       |                |
|--------------------------------------------------------|--|---|--------------|----------|--------|--|--|---|-------|----------------|
| All Files   Modified   Incoming   Outgoing   Conflicts |  |   |              |          |        |  |  |   |       |                |
| Name                                                   |  |   | Date         | Revision | Author |  |  |   | Size  | Type           |
| E:\svnkit                                              |  | ● | May 15, 2011 | 7636     | alex   |  |  |   |       | File Folder    |
| gradle                                                 |  |   | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| wrapper                                                |  |   | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| gradle-wrapper.jar                                     |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 12 KB | Executable ... |
| gradle-wrapper.properties                              |  | ● | May 4, 2011  | 7623     | alex   |  |  | 🔒 | 1 KB  | PROPERTIE...   |
| svnkit                                                 |  | ● | May 15, 2011 | 7636     | alex   |  |  |   |       | File Folder    |
| svnkit-cli                                             |  | ● | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| .settings                                              |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| src                                                    |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| main                                                   |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| conf                                                   |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| java                                                   |  |   | May 4, 2011  | 7622     | alex   |  |  |   |       | File Folder    |
| resources                                              |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| scripts                                                |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| jsvn                                                   |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 2 KB  | File           |
| jsvn.bat                                               |  | ● | May 10, 2011 | 7630     | alex   |  |  | 🔒 | 2 KB  | Windows B...   |
| jsvnsetup.openvms                                      |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 1 KB  | OPENVMS File   |
| build.gradle                                           |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 2 KB  | GRADLE File    |
| svnkit-dav                                             |  | ● | May 4, 2011  | 7620     | alex   |  |  | 🔒 |       | File Folder    |
| svnkit-distribution                                    |  | ● | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| svnkit-javahl16                                        |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| svnkit-osi                                             |  | ● | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| svnkit-test                                            |  | ● | May 12, 2011 | 7635     | alex   |  |  |   |       | File Folder    |
| .settings                                              |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| configurations                                         |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |

**Figure 552: Working Copy View**

A Subversion working copy also contains some extra files, created and maintained by Subversion, to help it keep track of your files. In particular, each directory in your working copy contains a subdirectory named `.svn`, also known as the working copy *administrative directory*. This administrative directory contains an unaltered copy of the last updated files from the repository. This copy is usually referred to as the *pristine copy* or the *BASE revision* of the working copy. These files help Subversion recognize which files contain unpublished changes, and which files are out-of-date with respect to others' work.

A typical Subversion repository often holds the files (or source code) for several projects. Usually each project is a subdirectory in the repository's file system tree. In this arrangement, a user's working copy usually corresponds to a particular sub-tree of the repository.

### Check Out a Working Copy

*Check out* means to make a copy of a project from a repository to your local file system. This copy is called a *working copy*. An Apache Subversion™ working copy is a specially formatted directory structure that contains additional `.svn` directories that store Subversion information, as well as a pristine copy of each item that is checked out.

To check out a working copy, locate and select the desired directory in the **Repositories** view and select the **Check out** action from the contextual menu, the toolbar, or the **Repository** menu.



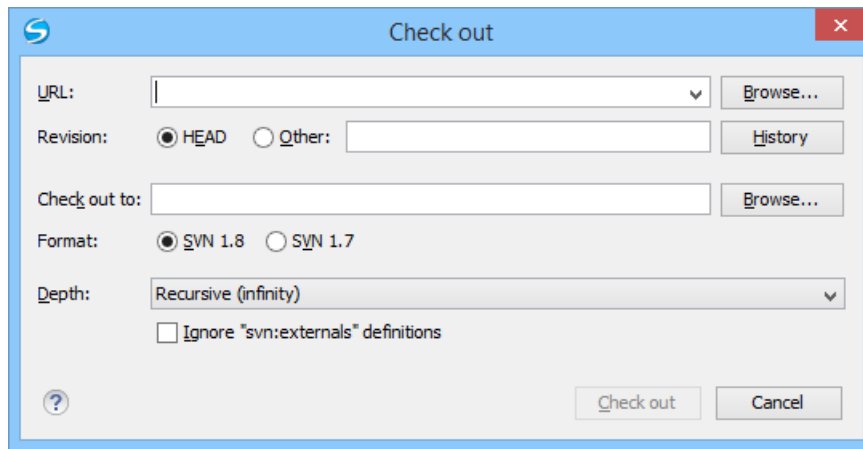


**Figure 553: Check Out Dialog Box**

The following options can be configured in the **Check out** dialog box:

### URL

The location of the repository directory to be *checked out*.

**Note:** To check out an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

### Revision

You can choose between the **HEAD** or **Other** revision. If you need to *check out* a specific revision, specify it in the **Other** text box or use the **History** button and choose a revision from [the History dialog box](#).

### Check out to

Specify [the location where you want to check out](#) the new working copy by typing the local path in the text box or by using the **Browse** button. If the specified local path does not point to an existing directory, it will automatically be created.

**Important:** By default, the SVN system only checks out the content of the directory specified by the URL, and not the directory itself. Therefore, it is recommended to use the **Browse** button to select the *check out* location so that the client will automatically append the name of the remote directory to the path of the selected directory.



**Warning:** The destination directory should be empty. If files exist, they are skipped (left unchanged) by the *check out* operation and [displayed as modified](#) after the operation has finished. Also, the destination directory must not already be under version control.

### Format

The SVN format of the working copy. You can choose between **SVN 1.8** or **SVN 1.7**.

### Depth

The depth is useful if you want to *check out* only a part of the selected repository directory and bring the rest of the files and subdirectories in a future update. You can find out more about the checkout depth in the [sparse checkouts](#) section. You can choose between the following depths:

- **Recursive (infinity)** - Checks out all the files and folders contained in the selected folder.
- **Immediate children (immediates)** - Checks out only the child files and folders without recursing subfolders.
- **File children only (files)** - Checks out only the child files.
- **This folder only (empty)** - Checks out only the selected folder (no child file or folder is included).

### Ignore "svn:externals" definitions

When selected, external items are ignored in the *check out* operation. This option is only available if you choose the **Recursive (infinity)** depth.

After a check out, the new working copy is added to the list in the [Working Copy view](#) and loaded automatically.

## History Dialog Box

The **History** dialog box presents a list of revisions for a resource. It is opened from the dialog boxes that require setting an SVN revision number, such as the **Check Out** dialog box or the **Branch / Tag** dialog box. It presents information about revision, commit date, author, and commit comment.

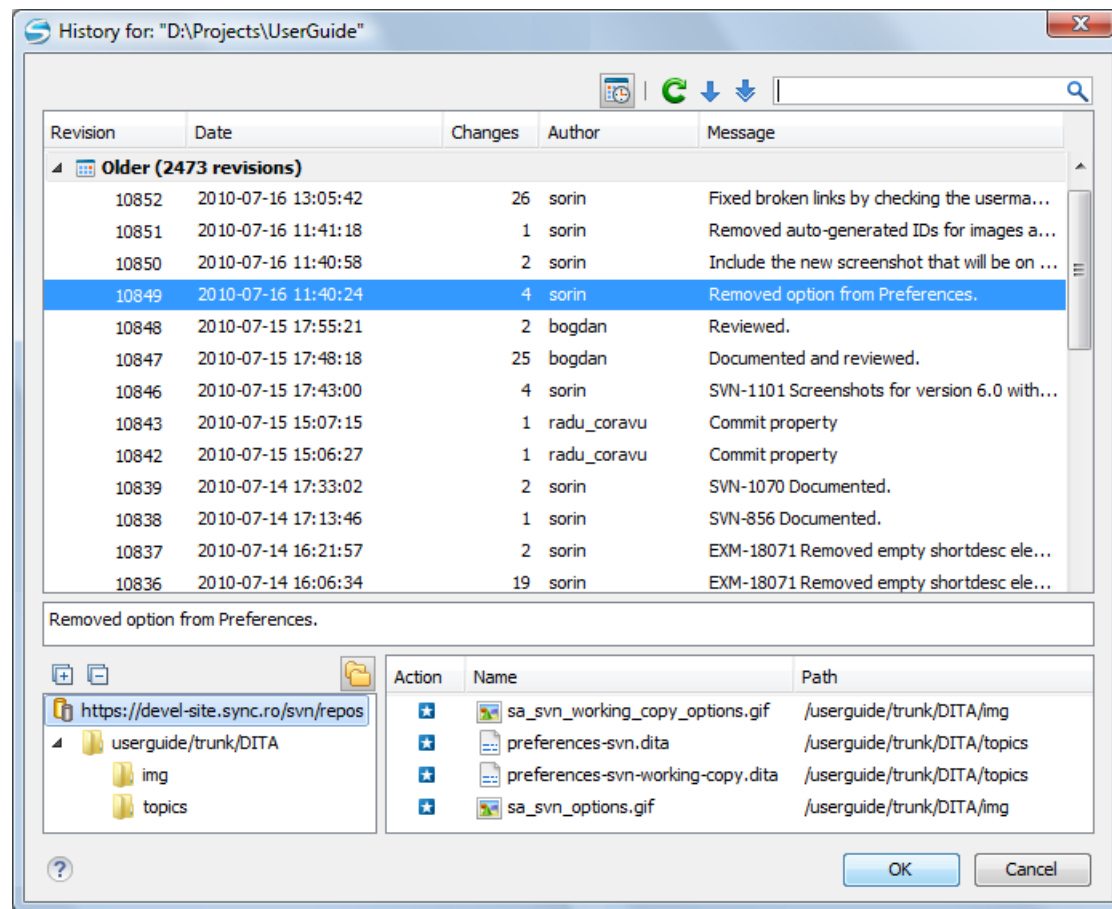


Figure 554: History Dialog Box

The initial number of entries in the list is 50. Additional revisions can be added to the list using the **Get next 50** and **Get all** buttons. The list of revisions can be refreshed at any time with the **Refresh** button. You can group revisions in predefined time frames (today, yesterday, this week, this month), by pressing the **Group by date** button from the toolbar.

The **Affected Paths** area displays all paths affected by the commit of the revision selected in history. You can see the changes between the selected revision and the file's previous state using the **Compare with previous version** action, available in the contextual menu.

### Use an Existing Working Copy

Using an existing working copy is the process of taking a working copy that exists on your file system and connecting it to Apache Subversion™ repository. If you have a brand new project that you want to import into your repository, then see the section **Import resources into the repository**. The following procedure assumes that you have an existing valid working copy on your file system.

1. Click the **Working Copies Manager** toolbar button  (on Mac OS X) in the **Working Copy** view.  
This action opens the **Working copies list** dialog box.
2. Press the **Add** button.
3. Select the working folder copy from the file system. The name is useful to differentiate between working copies located in folders with the same name. The default name is the name of the root folder of the working copy.

**Note:** For SVN 1.7 and newer working copies, all the internal information is kept only in the root directory. Thus, Syncro SVN Client needs to load the whole working copy.

4. Press the **OK** button.

The selected working copy is loaded and presented in the **Working Copy view**.

**Notice:** You can add working copies older than SVN 1.7. However, to load any of them, Syncro SVN Client will require to upgrade the working copy to SVN 1.8 format.

## Manage Working Copy Resources

This section explains how to work with the resources that are displayed in the **Working Copy view**.

### Edit Files

You can edit files from the **Working Copy view** by double clicking them or by right clicking them and choosing **Open** from the contextual menu.

Note that only one file can be edited at a time. If you try to open another file, it is opened in the same editor window. The editor has syntax highlighting for known file types, meaning that a different color is used for each type of recognized token in the file. If the selected file is an image, then it is previewed in the editor, with no access to modifying it.

After modifying and saving a file from a working copy, a modified marker - an asterisk (\*) - will be added to the file's icon in the **Working Copy view**. The asterisk marks the files that have local modifications that were not committed to the repository.

### Add Resources to Version Control

To share new files and folders (created in your working copy), add them to version control using the **Add to version control** option from the **Working Copy view**.

You can easily spot resources not under version control by the *unversioned* (🔍) icon displayed in the 📁 **Local file status** column. Resources scheduled for addition are displayed with this *added* (➕) icon in the **Working Copy view** and are added in the repository after you commit them.

**Note:** Do not make a confusion between 🟢 and ➕ icons. The former icon stands for resources that are actually copies of resources already committed in the repository, meaning they are *scheduled for addition with history*.

When you use the **Add to version control** option on a directory, its entire structure is scanned and all the resources that can be added under version control are presented.

Although it is not mandatory to add resources under version control explicitly, it is recommended. If you forgot to add a resource, when you **commit your changes**, the resource is presented in the commit dialog box, but not selected. When you commit and *unversioned* resource, it is automatically added under version control before starting the commit operation.

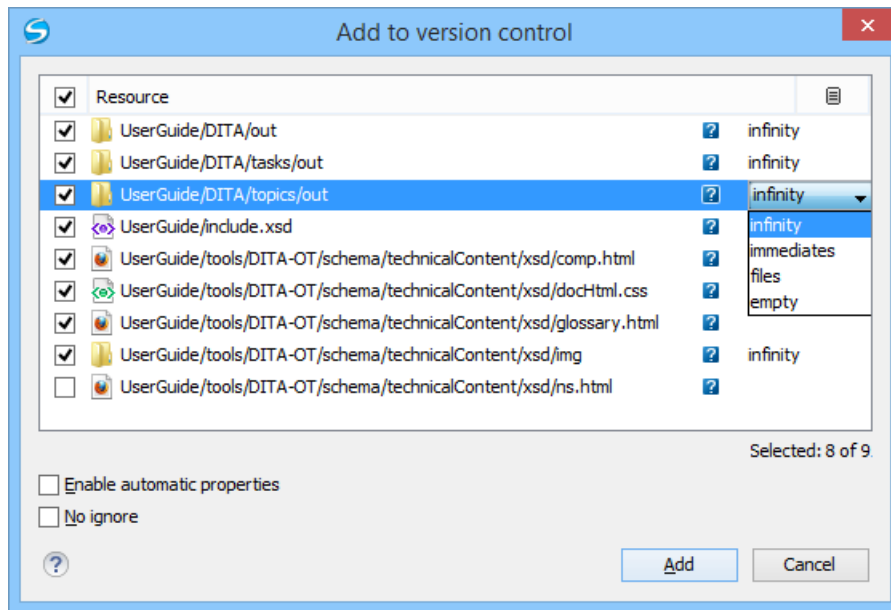


**Figure 555: Add to Version Control Dialog Box**

**Note:** *Ignored* (I) items can also be added under version control.

The **Depth** column is displayed only when directories are also presented in the dialog box. For any directory, you can use one of the available values to instruct Subversion to limit the scope of the operation to a particular tree depth.

**Note:** The initial value of the **Depth** field can have the following values, depending on the [listing mode of the items in the working copy view](#):

- *infinity* - When the working copy items are presented as a tree.
- *files* - When the working copy items are presented compressed.
- *empty* - When the working copy items are presented flat.

When you add unversioned or ignored directories, the initial value of the **Depth** field also depends on the state of the **Show unversioned directories content** and **Show ignored directories content** options. If these options are selected, the value is based on the listing mode of the items in the working copy view. When they are not selected, the value is *empty*.

The following options are available in this dialog box:

- **Enable automatic properties** or **Disable automatic properties** - enables or disables automatic property assignment (per runtime configuration rules), overriding the enable-auto-props runtime configuration directive, defined in the config file of the Subversion configuration directory.

**Note:** This option is available only when there are defined properties to be applied automatically for resources newly added under version control. You can define these properties in the config file of the Subversion configuration directory, in the auto-props section. Based on the value of the enable-auto-props runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

- **No ignore** - when you select this option, file-name patterns defined to ignore *unversioned* resources do not apply. Resources that are located inside an *unversioned* directory selected for addition, and match these patterns, are also scheduled for addition in the repository.

**Note:** This option is available only when directories are also presented in the dialog box.

You can define file-name patterns to ignore *unversioned* resources in one of the following locations:

- In the config file of the Subversion configuration directory (the global-ignores option from the miscellany section).
- In the Oxygen XML Developer options ([open the Preferences dialog box \(Options > Preferences\)](#) and go to **SVN > Working copy > Application global ignores**).

Each of the above two options is activated only when you select an item for which the option can be applied.

### Ignore Resources Not Under Version Control

Some resources inside your working copy do not need to be subject to version control. These resources can be files created by the compiler, \*.obj, \*.class, \*.lst, or output folders used to store temporary files. Whenever you [commit changes](#), Apache Subversion™ shows your modified files in the commit dialog box, but the unversioned files are also listed. Since the unversioned files are committed unless otherwise specified, it is difficult to see exactly what you are committing.

The best way to avoid these problems is to add the derived files to the Subversion ignore list. That way they are never displayed in the commit dialog box and only genuine unversioned files that must be committed are displayed.

You can choose to ignore a resource by using the **Add to svn:ignore** action in the contextual menu of the [Working Copy view](#).

In the **Add to svn:ignore** dialog box, you can specify the resource to be ignored by name or by a custom pattern. The custom pattern can contain the following wildcard characters:

- \* - Matches any string of characters of any size, including the empty string.
- ? - Matches any single character.

For example, you can choose to ignore all text documents by using the pattern: \*.txt.

The action **Add to svn:ignore** adds a predefined Subversion property called svn:ignore to the parent directory of the specified resource. In this property, there are specified all the child resources of that directory that must be ignored. The result is visible in the **Working Copy** view. The ignored resources are represented with gray icons.

### Delete Resources

The  **Delete** action is available in the contextual menu of the [Working Copy view](#). When you delete an item from the working copy, it is marked as *deleted* (scheduled for deletion from repository upon the next commit) and removed from the file system. Depending on the state of each item, you are prompted to confirm the operation.

If a resource is deleted from the file system without Subversion's knowledge, the resource is marked as *missing* () in your working copy. You can decide what you want to do with a *missing* item:

- In the case of a commit, any *missing* item is first automatically deleted and then committed.  
**Note:** Not any *missing* item can be committed as *deleted*, and removed from the repository. For example, you cannot commit an item that no longer exists on the disk and that was scheduled for addition () previously, since this item does not exist in the repository, but you can use the **Delete** action instead.
- If you want to recover *missing* items, either [update](#) the items themselves or one of their parent directories. This fetches their latest version from the repository.

You can also delete conflicting items (file content conflicts, property conflicts, tree-conflicts) and Syncro SVN Client automatically marks them as resolved.

**Note:** It is recommended that you resolve conflicts manually to avoid losing any important remote modifications.

Finally, you can change your mind and [revert](#) the deleted items to their initial, pristine, state.

### Copy Resources

You can copy resources from various locations of the working copy. You select them in the [Working Copy view](#) and then use **Copy to** from the contextual menu. This is not a simple file system copy, but an Apache Subversion™ command. It will copy the resource and the copy will also have the original history. This is one of the important features of Subversion, as you can keep track of where the copied resources originated.

Based on the selected items, the **Copy to** action is available only if it can be performed. Even if the operation would not normally be possible in SVN (due to some invalid local file states against copy), Oxygen XML Developer performs the copy operation as a simple file system operation. This means no SVN versioning meta-data is affected.

**Note:**

- If you copy an item to a directory that is [not under version control](#) (*unversioned* or *ignored*), the history of the item is not preserved. For example, when copying directories, all items inside them will also be copied without history.
- If you copy a directory that contains [external](#) items, these are not copied. This is specific for SVN 1.7 working copies only. To fetch the *external* items, use the **Update** operation on the copied directory.

In the **Copy to** dialog box, you can navigate through the working copy directories to choose a target directory, to copy inside it. If you try to copy a single resource you are also able to change that resource's name. For *versioned* items, you can select **Ignore resource history** to copy them without their history (similar to a simple file system copy).

**Note:** The **Copy to** dialog box only presents all the local directories that are a valid destination against the copy operation, based on their local file status. Also, the [working copy settings](#) are taken into account.

In the **Commit** dialog box, only the directory in question will appear without its children.

## Move Resources

As in the case of the copy command, you can move several resources at once. Select the resources in the [Working Copy view](#) and choose the **Move to** action from the contextual menu. The move command actually behaves as if a copy followed by a delete command were issued. You will find the moved resources at the desired destination and also at their original location, but marked as *deleted*.

**Note:** *External* items cannot be moved using the **Move to** action, because they cannot be deleted. Instead, you should edit the `svn:externals` property defining the *external* item and use the **Update** operation on the item's parent folder for the change to take effect.



**Attention:** For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination. Otherwise, the commit operation will fail.

## Rename Resources

The **Rename** action is available in the contextual menu of the [Working Copy view](#) and can be performed on a single resource. This action acts as a move command with the destination directory being the same as the original location of the resource. A copy of the original item is created with the new name, also keeping its history. The original item is marked as *deleted*.

**Note:** *External* items cannot be renamed using the **Rename** action because they cannot be deleted. Instead, you should edit the `svn:externals` property defining the *external* item, then use the **Update** operation on the item's parent folder for the change to take effect.



**Attention:** For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination. Otherwise, the commit operation will fail.

## Lock / Unlock Resources

The idea of version control is based on the *copy-modify-merge* model of file sharing. This model states that each user contacts the repository and creates a local working copy (check out). Users can then work independently and modify their working copies according to their needs. When their goal has been accomplished, it is time for the users to share their work with the others, to send them to the repository (commit). When a user has modified a file that has been also modified on the repository, the two files will have to be merged. The version control system assists the user with the merging as much as it can, but in the end the user is the one that must make sure it is done correctly.

The copy-modify-merge model only works when files are contextually mergeable: this is usually the case of line-based text files (such as source code). However this is not always possible with binary formats, such as images or sounds. In these situations, the users must each have exclusive access to the file, ending up with a *lock-modify-unlock* model. Without this, one or more users could end up wasting time on changes that cannot be merged.

An SVN lock is a piece of metadata that grants exclusive access to a user. This user is called the lock owner. A lock is uniquely identified by a lock token (a string of characters). If someone else attempts to commit the file (or delete a parent of the file), the repository demands two pieces of information:

- User authentication - the user performing the commit must be the lock owner



- Software authorization - the user's working copy must have the same lock token as the one from the repository, proving that it is the same working copy where the lock originated from.

### Scanning for Locks

When starting to work on a file that is not contextually mergeable (usually a binary file), it is better to verify if someone else is not already working on that file. You can do this in the [Working Copy view](#) by selecting one or more resources, then right-clicking them and choosing the **Scan for Locks** action from the contextual menu.

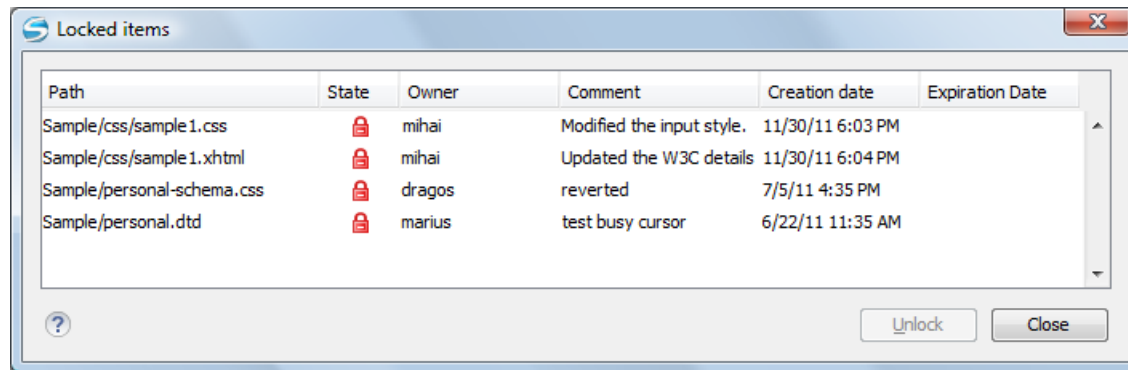


**Figure 556: Locked Items Dialog Box**

The **Locked items** dialog box contains a table with all the resources that were found locked on the repository. For each resource there are specified: resource path, state of the lock, owner of the lock, lock comment, creation and expiration date for the lock (if any).

The state of the lock can be one of the following:

- - Appears when one of the following conditions apply:
  - Another user has locked the file in the repository.
  - The file was locked by the same user from another working copy.
  - The file was locked from the **Repositories** view.
- - Displayed after you have locked a file from the current working copy.
- - A file already locked from your working copy is no longer locked in the repository (it was unlocked by another user).
- - A file already locked from your working copy is being locked by another user. Now the owner of the file lock is the user who stole the lock from you.

You can unlock a resource by selecting it and pressing the **Unlock** button.

### Related Information:

[Working Copy Locks](#) on page 1215

[Repository Locks](#) on page 1208

### Locking a File

By locking a file, you have exclusive write access to it in the repository.

You can lock a file from your working copy or directly from the **Repositories** view.

**Note:** You can only lock files (not directories). This is a restriction imposed by Apache Subversion™.

The **Lock** dialog box allows you to write a comment when you set a lock or when you *steal* an existing one. Note that you should *steal* a lock only after you made sure that the previous owner no longer needs it. Otherwise, you may cause an unsolvable conflict, which could be the reason the lock was put there in the first place. The Subversion server can have a policy concerning lock stealing, as it may not allow you to do this if certain conditions are not met.

The lock stays in place until you unlock the file or until someone breaks it. There is also the possibility that the lock expires after a period of time specified in the Subversion server policy.

### Unlocking a File

A file can be unlocked from the contextual menu of the **Working Copy view**. A dialog box will prompt you to confirm the unlocking and it will also allow you to break the lock (unlock it by force).

### Synchronize with Repository

In the work cycle you will need to incorporate other people's changes (update) and to make your own work available to others (commit). This is what the **Incoming** and **Outgoing** modes of **the Working Copy view** was designed for, to help you send and receive modifications from the repository.

The **Incoming** and **Outgoing** modes of this view focus on incoming and outgoing changes. The incoming changes are the changes that other users have committed in the repository since you last updated your working copy. The outgoing changes are the modifications you made to your working copy as a result of editing, removing or adding resources.

The view presents the status of the working copy resources against the BASE revision after a **Refresh** operation. You can view the state of the resources versus a repository HEAD revision by using the **Synchronize** action from **the Working Copy view**.

### View Differences

One of the most common requirements in project development is to see what changes have been made to the files from your Working Copy or to the files from the repository. You can examine these changes after a synchronize operation with the repository, by using the **Open in compare editor** action from the contextual menu.

The text files are compared using a built-in **Compare view** that uses a line differencing algorithm or a specified external diff application (if such an application is set in the **SVN Diff preferences page**). When a file with outgoing status is involved, the compare is performed between the file from the working copy and the BASE revision of the file. When a file with incoming or conflict status is involved, the differences are computed using a three-way algorithm that means that the local file and the repository file are each compared with the BASE revision of the file. The results are displayed in the same view. The differences obtained from the local file comparison are considered outgoing changes and the ones obtained from the repository file comparison are considered incoming changes. If any of the incoming changes overlap outgoing changes then they are in conflict.

A special case of difference is a *diff pseudo-conflict*. This is the case when the left and the right sections are identical but the BASE revision does not contain the changes in that section. By default, this type of changes are ignored. If you want to change this, you can go to the **SVN** preferences page and select the **Allow unversioned obstructions** option.

The right editor of the internal compare view presents either the BASE revision or a revision from the repository of the file so its content cannot be modified. By default, when opening a synchronized file in the **Compare** view, a compare is automatically performed. After modifying and saving the content of the local file presented in the left editor, another compare is performed. You will also see the new refreshed status in the **Working Copy view**.



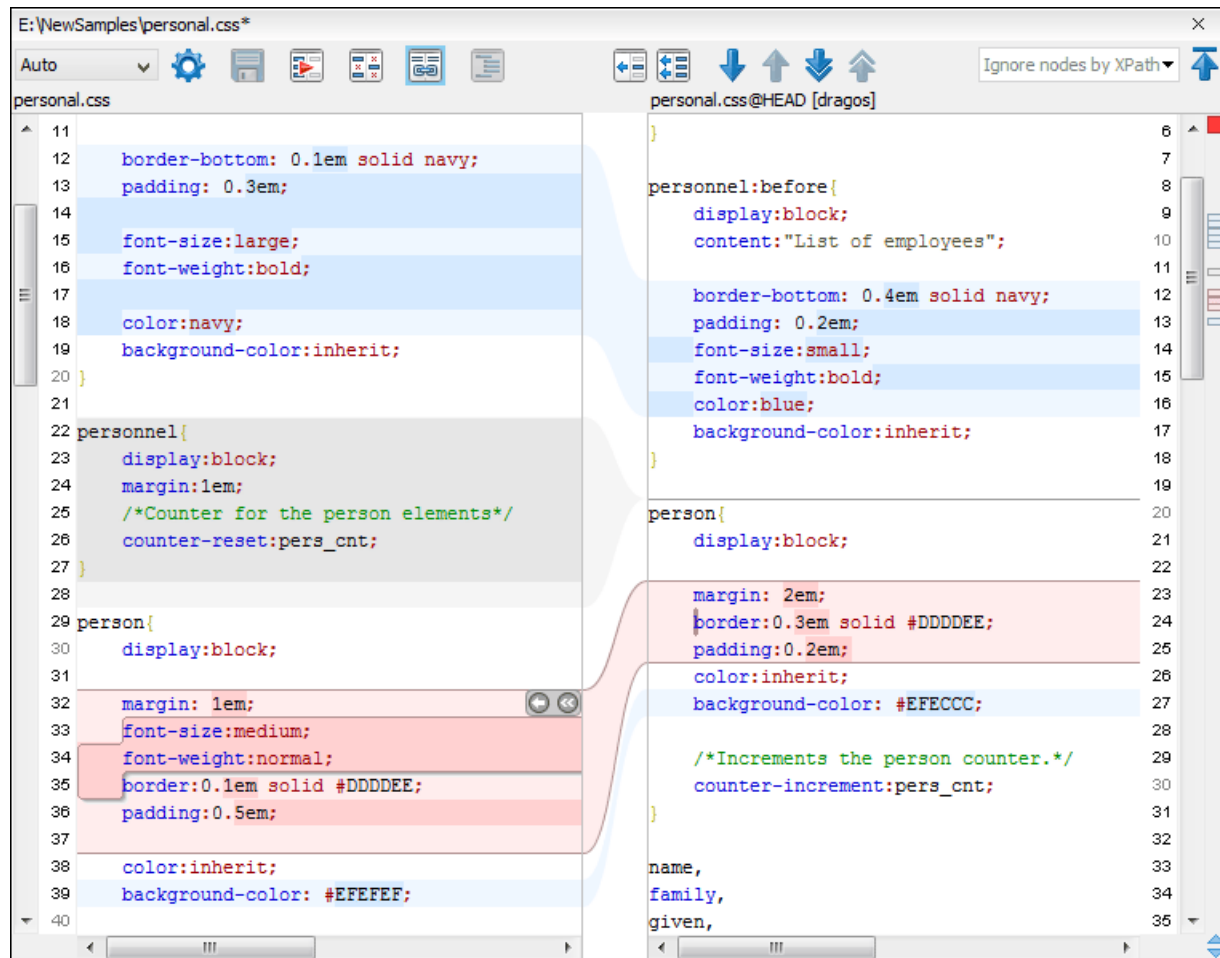


**Figure 557: Compare View**

At the top of each of the two editors, there are presented the name of the opened file, the corresponding SVN revision number (for remote resources) and the author who committed the associated revision.

There are three types of differences:

- Incoming changes - Changes committed by other users and not present yet in your working copy file. They are marked with a blue highlight and on the middle divider the arrows point from right to left.
- Outgoing changes - Changes you have done in the content of the working copy file. They are marked with a gray highlight and the arrows on the divider are pointing from left to right.
- Conflicting changes - This is the case when the same section of text that you already modified in the local file has been modified and committed by some other person. They are marked with a red highlight and red diamonds on the divider.

There are numerous actions and options available in the **Compare View toolbar** or in the **Compare** menu from the main menu. You can decide that some changes need adjusting or that new ones must be made. After you perform the adjustments, you may want to perform a new compare between the files. For this case there is an action called **Perform files differencing**. After each files differencing operation the first found change will be selected. You can navigate from one change to another by using the actions **Go to first**, **Go to previous**, **Go to next** and **Go to last modification**. If you decide that some incoming change needs to be present in your working file you can use the action **Copy change from right to left**. This is useful also when you want to override the outgoing modifications contained in a conflicting section. The **Copy all non-conflicting changes from right to left** action copies all incoming changes that are not contained inside a conflicting section in your local file.

Suppose that only a few words or letters are changed. Considering that the differences are performed taking whole lines of text into account, the change will contain all the lines involved. To find exactly what words or letters have changed, the **Word Details** and **Character Details** dialog boxes are available. They present a more detailed comparison result when you double-click the middle divider of a difference.

When you want to examine only the changes in the real text content of the files, while disregarding the changes in the number of white spaces between words or lines, there is an option available in the [SVN Preferences](#) that allows you to enable or disable the white space ignoring feature of the compare algorithm.

## Conflicts

A file conflict occurs when two or more developers have changed the same few lines of a file or the properties of the same file. As Subversion knows nothing of your project, it leaves resolving the conflicts to the developers. Whenever a conflict is reported, you should open the file in question, and try to analyze and resolve the conflicting situation.

### Real Conflicts vs Mergeable Conflicts

There are two types of conflicts:

- *real conflict* ( icon in *Name* column) - Syncro SVN Client considers the following resource states to be real conflicts:
  - *conflicted* state - A file reported by SVN as being in this state is obtained after it was updated/merged while having incoming and outgoing content or property changes at the same time, changes that could not be merged. A content conflict ( icon in *Local file status* column) is reported when the modified file has binary content or it is a text file and both local and remote changes were found on the same line. A properties conflict ( icon in *Local properties status* column) is reported when a property's value was modified both locally and remotely.
  - *tree conflicted* state ( icon in *Local file status* column) - Obtained after an update or merge operation, while having changes at the directory structure level (for example, file is locally modified and remotely deleted or locally scheduled for deletion and remotely modified).
  - *obstructed* state ( icon in *Local file status* column) - Obtained after a resource was versioned as one kind of object (file, directory, symbolic link), but has been replaced outside Syncro SVN Client by a different kind of object.
- *pseudo-conflict* ( icon in *Name* column) - A file is considered to be in *pseudo-conflict* when it contains both incoming and outgoing changes. When incoming and outgoing changes do not intersect, an update operation may automatically merge the incoming file content into the existing locally one. In this case, the *pseudo-conflict* marker is removed. This marker is used only as a warning that should prevent you to run into a real conflict.

### Note:

- A conflicting resource cannot be committed to repository. You have to resolve it first, by using **Mark Resolved** action (after manually editing/merging file contents) or by using **Mark as Merged** action (for pseudo-conflicts).
-  and  icons are presented only when one of the following view modes is selected: **Modified, Incoming, Outgoing, Conflicts**.
- The  icon is used also for folders to signal that they contain a file in real conflict or pseudo-conflict state.

### Content Conflicts vs Property Conflicts

A *Content conflict* appears in the content of a file. A merge occurs for every inbound change to a file that is also modified in the working copy. In some cases, if the local change and the incoming change intersect each other, Apache Subversion™ cannot merge these changes without intervention. So if the conflict is real when updating the file in question the conflicting area is marked like this:

```
<<<<<< filename
your changes
=====
code merged from repository
>>>>>> revision
```

Also, for every conflicted file Subversion places three additional temporary files in your directory:

- `filename.ext.mine` - This is your file as it existed in your working copy before you updated your working copy, that is without conflict markers. This file has your latest changes in it and nothing else.
- `filename.ext.rOLDREV` - This is the file that was the BASE revision before you updated your working copy, that is the file revision that you updated before you made your latest edits.
- `filename.ext.rNEWREV` - This is the file that Subversion client just received from the server when you updated your working copy. This file corresponds to the HEAD revision of the repository.

OLDREV and NEWREV are revision numbers. If you have conflicts with binary files, Subversion does not attempt to merge the files by itself. The local file remains unchanged (exactly as you last changed it) and you will get `filename.ext.r*` files also.

A *Property conflict* is obtained when two people modify the same property of the same file or folder. When updating such a resource a file named `filename.ext.prej` is created in your working copy containing the nature of the conflict. Your local file property that is in conflict will not be changed. After resolving the conflict, you should use the **Mark resolved** action to commit the file. Note that the **Mark resolved** action does not really resolve the conflict. It just removes the conflicted flag of the file and deletes the temporary files.

### Edit Real Content Conflicts

The conflicts of a file in the conflicted state (a file with the red double arrow icon) can be edited visually with the **Compare** view (the built-in file comparison tool) or with an [external diff application](#). Resolving the conflict means deciding for each conflict if the local version of the change will remain or the remote one instead of the special conflict markers inserted in the file by the SVN server.

The **Compare** view (or the external diff application [set in Preferences](#)) is opened with the **Edit Conflict** action, which is available on the contextual menus of [the Working Copy view](#) for files in the conflicted state (an update operation was executed but the differences could not be merged without conflicts). The external diff application is called with 3 parameters because it is a 3-way diff operation between the local version of the file from the working copy and the HEAD version from the SVN repository with the BASE version from the working copy as common ancestor.

If the [Show warning dialog when edit conflicts option](#) is selected, you will be warned at the beginning of the operation that the operation will overwrite the conflict version of the file received from the SVN server (the version that contains the conflict markers <<<<<<, =====, >>>>>>) with the original local version of the file that preceded the update operation. If you press the OK button the visual conflict editing will proceed and a backup file of the conflict version received from the SVN server is created in the same working copy folder as the file with the edited conflicts. The name of the backup file is obtained by appending the extension `.sync.bak` to the file as stored on the SVN server. If you press the **Cancel** button the visual editing will be aborted.

The usual actions on the differences between two versions of a file are available on the toolbar of this view:



#### Save

Saves the modifications of the local version of the file displayed in the left side of the view.



#### Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.



#### Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



#### Synchronized scrolling

Toggles synchronized scrolling. When toggled on, a selected difference can be seen in both panels.



#### Format and Indent Both Files (Ctrl + Shift + P (Command + Shift + P on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Note:** When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.



### Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.



### Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.

### ↓ Next Block of Changes (Ctrl + Period (Command + Period on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.

### ↑ Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

### ⚡ Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

### ⚡ Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

### ⚡ First Change (Ctrl + B (Command + B on OS X))

Jumps to the first change.

The operation begins by overwriting the conflict version of the file received from the SVN server (the version that contains the conflict markers <<<<<<, =====, >>>>>>) with the original local version of the file before running the update action that created the conflict. After that the differences between this original local version and the repository version are displayed in the **Compare** view.

If you want to edit the conflict version of the file directly in a text editor instead of the visual editing offered by the **Compare** view you should work on the local working copy file after the update operation without running the action **Edit Conflict**. If you decide that you want to edit the conflict version directly after running the action **Edit Conflict** you have to work on the .sync.bak file.

If you did not finish editing the conflicts in a file at the first run of the action **Edit Conflict** you can run the action again and you will be prompted to choose between resuming the editing where the previous run left it and starting again from the conflict file received from the SVN server.

After the conflicts are edited and saved in the local version of the file you should run one of the following:

- The **Mark Resolved** action on the file so that the result of the conflict editing process can be committed to the SVN repository.
- The **Revert** action so that the repository version overwrites all the local modifications.

Both actions remove the backup file and other temporary files created with the conflict version of the local file.

### *Revert Your Changes*

If you want to undo changes made in your working copy, since the last update, select the items you are interested in, right-click to display the contextual menu and select **Revert**. A dialog box will open that shows you the files and folders that you have changed and can be reverted. Select those you want to revert and click the **OK** button. Revert will undo only your local changes. It does not undo any changes that have already been committed. If you choose to revert a conflicting item to its pristine copy, then the eventual conflict is solved by losing your outgoing modifications. If you try to revert a resource not under version control, the resource will be deleted from the file system.

**Note:** By default, a directory will be recursively reverted (including any other modified item it contains). However, if the directory has only property changes, you need to explicitly choose if the operation will include any modified items found inside it.

If you want some of your outgoing changes to be overridden you must first open the file in [Compare view](#) and choose the sections to be replaced with ones from the repository file. This can be achieved either by editing directly the file or by using the action **Copy change from right to left** from the [Compare view toolbar](#). After editing the conflicting file you have to run the action **Mark as merged** before committing it.

If you want to drop all local changes and bring all incoming changes into your working copy resource, you can use the **Override and update** action. It discards the changes in the local file and updates it from the repository. A dialog box will display the files that will be affected.

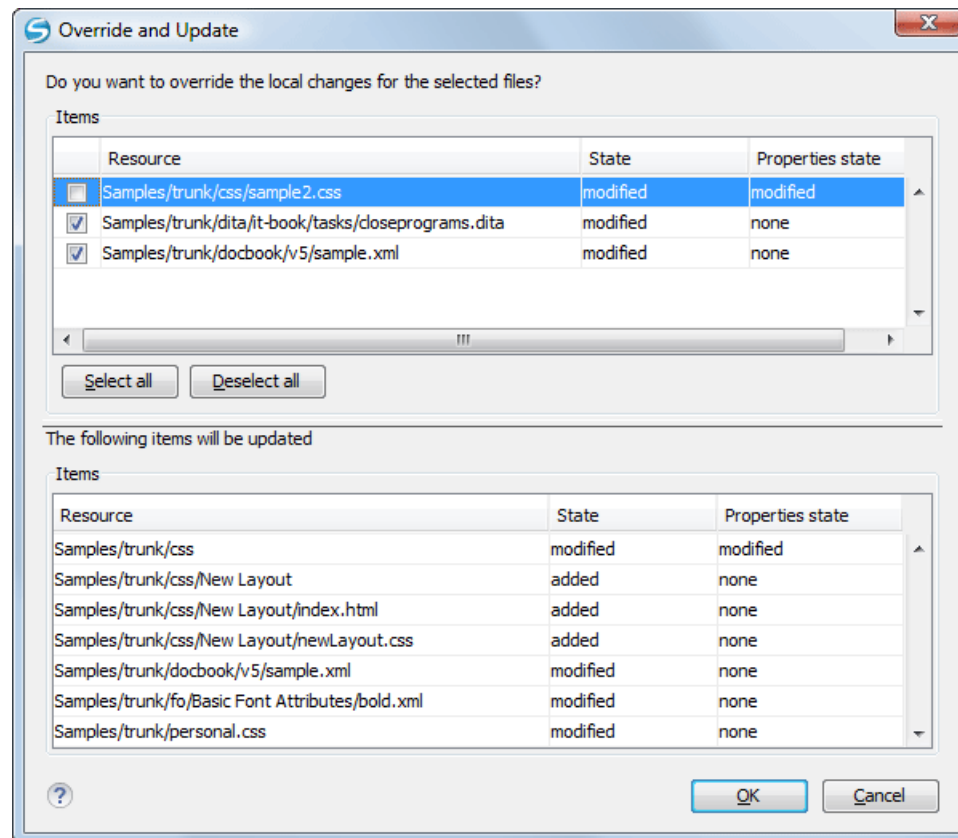


**Figure 558: Override and Update Dialog Box**

In the first table of the dialog box you will be able to see the resources that will be overridden. In the second table you will find the list of resources that will be updated. Only resources that have an incoming status are updated.

**Tip:** If you want to roll-back out of your working copy changes that have already been committed to the repository, see [Merge Revisions](#).

#### *Merge Conflicted Resources*

Before you can safely commit your changes to the repository you must first resolve all conflicts. In the case of pseudo-conflicts they can be resolved in most cases with an update operation that will merge the incoming modifications into your working copy resource. In the case of real conflicts, conflicts that persist after an update operation, it is necessary to resolve the conflict using the built-in compare view and editor or, in the case of properties conflict, the [Properties view](#). Before you can commit you must *mark as resolved* the affected files.

Both pseudo and real conflicts can be resolved without an update. You should open the file in the compare editor and decide which incoming changes need to be copied locally and which outgoing changes must be overridden or modified. After saving your local file you have to use the *Mark as merged* action from the contextual menu before committing.

## Drop Incoming Modifications

In the situation when your file is in conflict but you decide that your working copy file and its content is the correct one, you can decide to drop some or all of the incoming changes and commit afterwards. The action **Mark as merged** proves to be useful in this case too. After opening the conflicting files with **Compare view**, **Editor** or editing their properties in the **Properties** view and deciding that your file can be committed in the repository replacing the existing one, you should use the **Mark as merged** action. When you want to override completely the remote file with the local file you should run the **Override and commit** action, which drops any remote changes and commits your file.

In general it is much safer to analyze all incoming and outgoing changes using the **Compare** view and only after to update and commit.

## Tree Conflicts

A *tree conflict* is a conflict at the directory tree structure level and occurs when the user runs an update action on a resource that has the following conditions:

- It is locally modified and the same resource was deleted from the repository (or deleted as a result of being renamed or moved).
- It was locally deleted (or deleted as a result of being renamed or moved) and the same resource is incoming as modified from the repository.

The same conflict situation can occur after a merge or a switch action. The action ends with an error and the folder containing the file that is now in the tree conflict state is also marked with a conflict icon.

Such a conflict can be resolved in one of the following ways that are available when the user double clicks on the conflicting resource or when running the **Edit conflict** action:

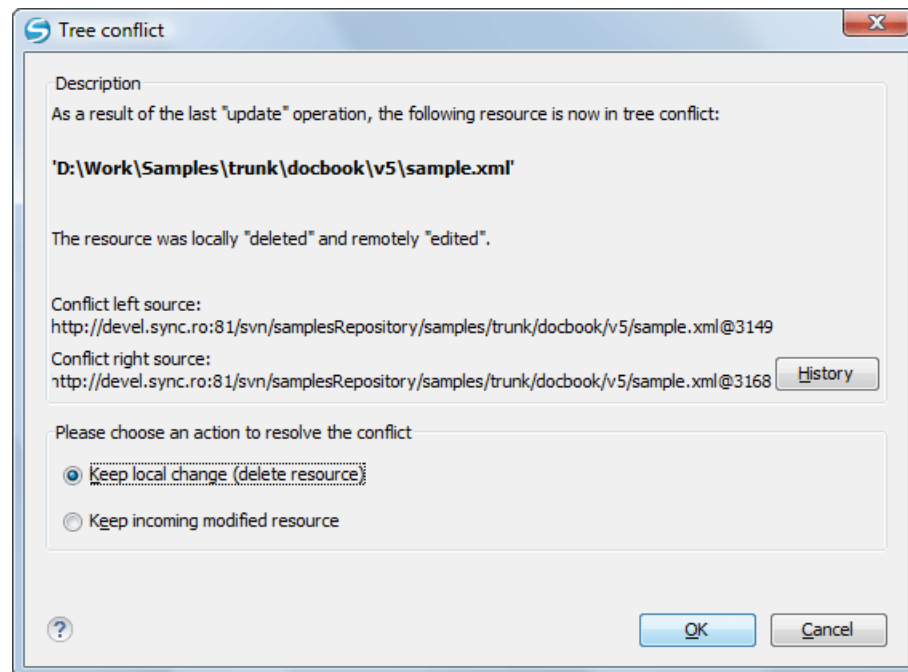


**Figure 559: Resolve a tree conflict**

- **Keep local change (delete resource)** - Keeps the incoming change that comes from the repository.
- **Keep incoming modified resource** - If there is a renamed version of the file committed by other user that will be added to the working copy too.

## Update the Working Copy

While you are working on a project, other members of your team may be committing changes to the project repository. To get these changes, you have to *update* your working copy. Updating may be done on single files, a set of selected files, or recursively on entire directory hierarchies. The update operation can be performed from **Working Copy view**. It updates the selected resources to the last synchronized revision (if remote information is available) or to the *HEAD* revision of the repository.



There are three different kinds of incoming changes:

- *Non-conflicting* - A non-conflicting change occurs when a file has been changed remotely but has not been modified locally.
- *Conflicting, but auto-mergeable* - An auto-mergeable conflicting change occurs when a text file has been changed both remotely and locally (for example, has non-committed local changes) but the changes are on different lines of text. Not applicable to binary resources (for example, multimedia files, PDFs, executable program files)
- *Conflicting* - A conflicting change occurs when one or more of the same lines of a text file have been changed both remotely and locally.

If the resource contains only incoming changes or the outgoing changes do not intersect with incoming ones then the update will end normally and the Subversion system will merge incoming changes into the local file. In the case of a conflicting situation the update will have as result a file with conflict status.

The Oxygen XML Developer allows you to update your working copy files to a specific revision, not only the most recent one. This can be done by using the **Update to revision/depth** action from the **Working Copy** view (**All Files** view mode) or the **Update to revision** action from the **History view** contextual menu.

If you select multiple files and folders and then you perform an **Update** operation, all of those files and folders are updated one by one. The Subversion client makes sure that all files and folders belonging to the same repository are updated to the exact same revision, even if between those updates another commit occurred.

When the update fails with a message saying that there is already a local file with the same name Subversion tried to check out a newly versioned file, and found that an unversioned file with the same name already exists in your working folder. Subversion will never overwrite an unversioned file unless you specifically do this with an **Override and update** action. If you get this error message, the solution is simply to rename the local unversioned file. After completing the update, you can check to see if the renamed file is still needed.

### Send Your Changes to the Repository

Sending the changes you made to your working copy is known as *committing* the changes. If your working copy is up-to-date and there are no conflicts, you are ready to commit your changes.

The **Commit** action sends the changes from your local working copy to the repository. The **Commit** dialog box presents all the items that you can commit.

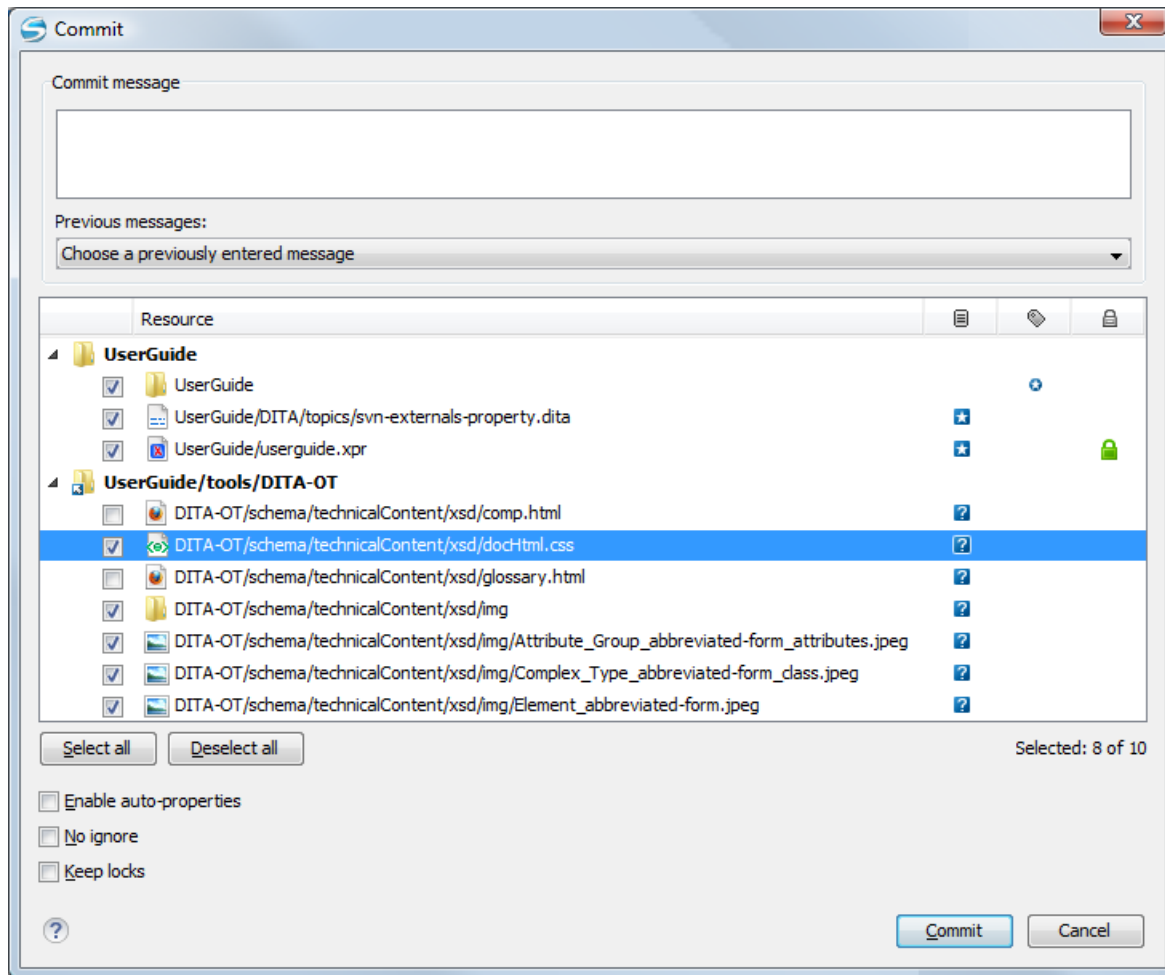


**Figure 560: Commit dialog box**

Enter a message to associate with the commit, or choose a previous message from the **Previous messages** list (the last 10 commit messages will be remembered even after restarting the SVN client application).

An item that can be committed has one of the following states: *added*, *modified* (content or properties), *replaced*, and *deleted*. All items that have one of these states are selected in the dialog box by default. If you do not want to commit one of the items, deselect it.



**Attention:** For SVN 1.8 working copies: when committing items that were moved and/or renamed, make sure you select both the source and the destination. Otherwise, the commit operation will fail.

Besides the items that have one of the mentioned states, Syncro SVN Client also includes the files being *unversioned* or *missing* and these items are handled automatically:

- *Unversioned* items are added under version control.
- *Missing* items are deleted.

**Note:** If the **Show unversioned directories content** option is not selected, the **Commit** dialog box does not display the items inside an *unversioned* directory.

*Unversioned* or *missing* items are not selected by default in the **Commit** dialog box, unless you have selected them explicitly when issuing the commit command.

**Note:** In some cases, items that have one of the above states are not presented in the **Commit** dialog box.

For example:

- Items that have been *added* or *replaced* previously, but now are presented as *missing* after being removed from the file system, outside of an SVN client. Such items do not exist in the repository and you should use the **Delete** action to remove them from your working copy.



- Items that have incoming changes from the repository, after a synchronization. You need to have your working copy up-to-date before committing your changes.
- Files that, after a synchronization, appear as locked by other users or from other locations than the current working copy.

**Note:** Due to dependencies between items, when you select or clear an *unversioned* (  ) or *added* (  ) item in the **Commit** dialog box, other items with one of these states can be selected or cleared automatically.

The modifications that will be committed for each file can be reviewed in the compare editor window by double clicking a file in the **Commit** dialog box, or by right clicking and selecting the **Show Modifications** action from the contextual menu. This option is available to review only file content changes, not property changes.

The  **Local file status** column indicates the actual state of the items and the  **Local properties status** column indicates whether or not the properties of an item are modified.

The  **Lock information** column is displayed if at least one of the files in the **Commit** dialog box has lock information associated with it, valid against the commit operation.

The following options are available in this dialog box:

- **Enable automatic properties** or **Disable automatic properties** - enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in the `config` file of the Subversion configuration directory.

**Note:** This option is available only when there are defined properties to be applied automatically for resources newly added under version control. You can define these properties in the `config` file of the Subversion configuration directory, in the `auto-props` section. Based on the value of the `enable-auto-props` runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

- **Keep locks** - selecting the **Keep locks** option preserves any locks you set on various files.

**Note:** This option is available only when files that you locked are presented in the dialog box.

Each of the above options is activated only when you select an item for which the option can be applied.

Your working copy must be up-to-date with respect to the resources you commit. This is ensured by using the **Update** action prior to committing, resolving conflicts and re-testing as needed. If your working copy resources you are trying to commit are out of date you will get an appropriate error message.

### *Committing to Multiple Locations*

Although Subversion does not support committing to multiple locations at once, Syncro SVN Client offers this functionality regarding *external* items.

If items to be committed belong to different *external* definitions than those found in the working copy, they are grouped under the corresponding item that indicates their repository origin. Each parent item is rendered bold and its corresponding repository location is presented when hovering it. Parent items are decorated with a small arrow (  ) if they are *external* definitions. The working copy root directory is never decorated and is not presented if there are no *external* items listed (all items belong to the main working copy). Each child item is presented relative to the parent item.

**Note:** When an *external* directory has modifications of its own, it is presented both as a parent item and as an item that you can select and commit. This is always the case for *external* files.

The sets of items belonging to *external* definitions from the same repository are committed together, resulting a single revision. So, the number of revisions can be smaller than the number of *externals*. External definitions are considered from the same repository if they have the same protocol, server address, port, and repository address within the server.

**Note:** *External* files are always from the same repository as the parent directory that defines them, so they are always committed together with the changes from their parent directory.

### **Integration with Bug Tracking Tools**

Users of bug tracking systems can associate the changes they make in the repository resources with a specific ID in their bug tracking system. The only requirement is that the user includes the bug ID in the commit message

that they enter in the **Commit** dialog box. The format and the location of the ID in the commit message are configured with SVN properties.

To make the integration possible Syncro SVN Client needs some data about the bug tracking tool used in the project. You can configure this using the following [SVN properties](#) that must be set on the folder that contains resources associated with the bug tracking system (usually they are set recursively on the root folder of the working copy):

- **bugtraq:message** - A string property. If it is set the [Commit dialog box](#) will display a text field for entering the bug ID. It must contain the string `%BUGID%`, which is replaced with the bug number on commit.
- **bugtraq:label** - A string property that sets the label for the text field configured with the **bugtraq:message** property.
- **bugtraq:url** - A string property that is the URL pointing to the bug tracking tool. The URL string should contain the substring `%BUGID%` which Syncro SVN Client replaces with the issue number. That way the resulting URL will point directly to the correct issue.
- **bugtraq:warnifnoissue** - A boolean property with the values *true/yes* or *false/no*. If set to *true*, the Syncro SVN Client will warn you if the bug ID text field is left empty. The warning will not block the commit, only give you a chance to enter an issue number.
- **bugtraq:number** - A boolean property with the value *true* or *false*. If this property is set to *false*, then any character can be entered in the bug ID text field. If the property is set to *true* or is missing then only numbers are allowed as the bug ID.
- **bugtraq:append** - A boolean property. If set to *false*, then the bug ID is inserted at the beginning of the commit message. If yes or not set, then it's appended to the commit message.
- **bugtraq:logregex** - This property contains one or two regular expressions, separated by a newline. If only one expression is set, then the bug ID's must be matched in the groups of the regular expression string (for example, `[Ii]ssue #?(\d+)`). If two expressions are set, then the first expression is used to find a string which relates to a bug ID but may contain more than just the bug ID (for example, `Issue #123` or `resolves issue 123`). The second expression is then used to extract the bug ID from the string extracted with the first expression. An example: if you want to catch every pattern `issue #XXX` and `issue #890`, `#789` inside a log message you could use the following strings:
  - `[Ii]ssue #?(\d+)(, ? ?#?(\d+))+`
  - `(\d+)`

The data configured with these SVN properties is stored on the repository when a revision is committed. A bug tracking system or a statistics tools can retrieve the revisions that affected a bug from the SVN server and present the commits related to that bug to the user of the bug tracking system.

If the **bugtraq:url** property was filled in with the URL of the bug tracking system and this URL includes the `%BUGID%` substring as specified above in the description of the **bugtraq:url** property then the [History view](#) presents the bug ID as a hyperlink in the commit message. Clicking such a hyperlink in the commit message of a revision opens a Web browser at the page corresponding to the bug affected by that commit.

## Obtain Information for a Resource

This section explains how to obtain information for a SVN resource:

### Request Status Information for a Resource

While you are working with the SVN Client you often need to know which files you have changed, added, removed, or renamed, or even which files got changed and committed by others. This is where the **Synchronize** action from the [Working Copy view](#) comes in handy. The **Working Copy** view shows you every file that has changed your working copy, as well as any unversioned files you may have.

If you want more detailed information about a given resource, you can use the  **Show SVN Information** action. This action is available from the **File** menu or the contextual menu of the **Working Copy**, **Repositories**, **History**, or **Directory Change Set** views, or from the **Revision Graph** dialog box. The **SVN Information** dialog box will be displayed, showing information about the selected resource. The information displayed depends on the location of the item (local or remote) and may include the following:

- Local path and repository location
- Revision number

- Last change author, revision and date
- Information about locks
- Local file status
- Local properties status
- Local directory depth
- Repository location and revision number for copied files or directories
- Path information about locally moved items
- Path information about conflict generated files
- Remote file status
- Remote properties status
- File size and other information

The value of a property of the resource displayed in the dialog box can be copied by right-clicking the property and selecting the **Copy** action.

### Request History for a Resource

In Apache Subversion™, both files and directories are versioned and have a history. If you want to examine the history for a selected resource and find out what happened at a certain revision you can use the **History view** that can be accessed from [Repositories view](#), [Working Copy view](#), [Revision Graph](#), or [Directory Change Set view](#). From the **Working copy view** you can display the history of local versioned resources. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

### Related Information:

[History View](#) on page 1221

### Management of SVN Properties

In the [Properties view](#) you can read and set the Apache Subversion™ properties of a file or folder. There is a set of predefined properties with special meaning to Subversion. For more information about properties in Subversion see the SVN Subversion specification. Subversion properties are revision dependent. After you change, add or delete a property for a resource, you have to commit your changes to the repository.

If you want to change the properties of a given resource you need to select that resource from the [Working Copy view](#) and run the **Show properties** action from the contextual menu. The [Properties view](#) will show the local properties for the resource in the working copy. Once the [Properties view](#) is visible, it will always present the properties of the currently selected resource. There are actions available in the **Properties view toolbar** that allow you to add, change, and delete the properties.

If you choose the **Add a new property** action, a new dialog box will appear that contains the following:

- **Name** - Combo box that allows you to enter the name of the property. The drop-down menu of the combo box presents the predefined Subversion properties (such as **svn:ignore**, **svn:externals**, **svn:needs-lock**, etc.)
- **Current value** - Text area that allows you to enter the value of the new property.

If the selected item is a directory, you can also set the property recursively on its children by selecting the **Set property recursively** checkbox.

If you want to change the value for a previously set property, you can use the **Edit property** action, which will display a dialog box with the following information:

- **Name** - Property name (cannot be changed).
- **Current value** - The current value (can be changed).
- **Base value** - The value of the property, if any, from the resource in the pristine copy (cannot be changed).

If you want to completely remove a property previously set you can choose the **Remove property** action. It will display a confirmation dialog box in which you can also choose if the property will be removed recursively.

There is a **Refresh** action in the [Properties view](#) that can be used when the properties have been changed from outside the view. This can happen, for example, when the view was already presenting the properties of a resource and they have been changed after an **Update** operation.

## Branches and Tags

One of the fundamental features of version control systems is the ability to create a new line of development from the main one. This new line of development will always share a common history with the main line if you look far enough back in time. This line is known as a *branch*. Branches are mostly used to try out features or fixes. When the feature or fix is finished, the branch can be merged back into the main branch (*trunk*).

Another feature of version control systems is the ability to take a snapshot of a particular revision, so you can at any time recreate a certain build or environment. This is known as *tagging*. Tagging is especially useful when making release versions.

In Apache Subversion™, there is no difference between a *tag* and a *branch*. On the repository, both are ordinary directories that are created by copying. The trick is that they are cheap copies instead of physical copies. Cheap copies are similar to hard links in Unix, which means that they merely link to a specific tree and revision without making a physical copy. As a result, branches and tags occupy little space on the repository and are created very quickly.

Provided that nobody ever commits to the directory in question, it remains a tag. If people start committing to it, it becomes a branch.

### Create a Branch / Tag

To create a branch or tag by copying a directory, use the **Branch/Tag** action that is available in the **Tools** menu when an item is selected in the **Working Copy view** or **Repositories view**, or from the contextual menu of the **Repositories** view.

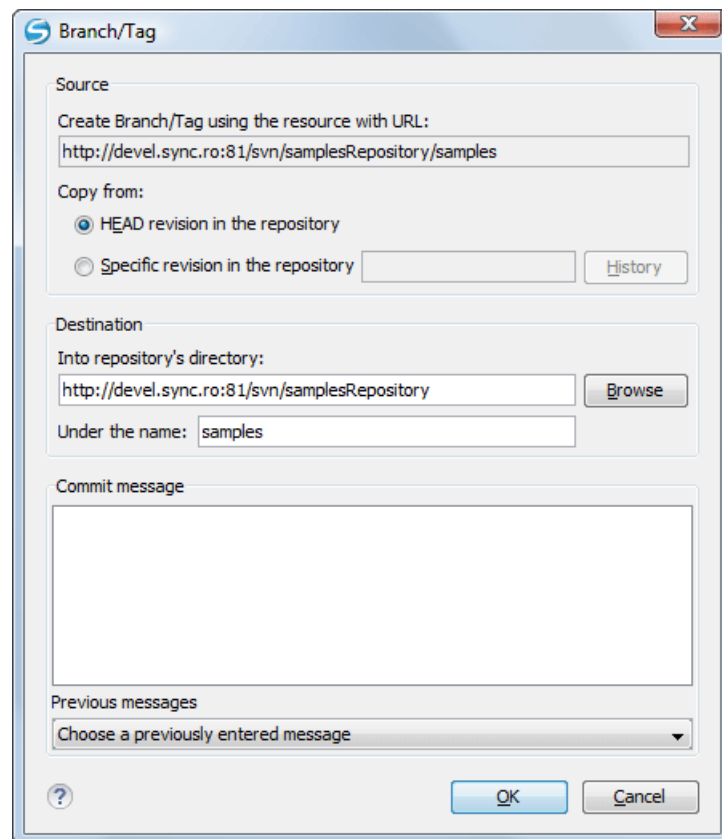


**Figure 561: Branch/Tag Dialog Box**

You can configure the following options in this dialog box:

You can specify the source revision of the copy in the **Copy from** section. You can choose between the following options:

- **HEAD revision in the repository** - The new branch or tag will be copied in the repository from the HEAD revision. The branch will be created very quickly, as the repository will make a *cheap* copy.

- **Specific revision in the repository** - The new branch will be copied into the repository, but you can specify the exact desired revision. For example, this is useful if you forgot to make a branch or tag when you released your application. If you click the **History** button you can select the revision number from [the History dialog box](#). This type of branch will also be created very quickly.
- **Working copy** - (Available only if the item is selected from the **Working copy** view). The new branch will be a copy of your local working copy. If you have updated some files to an older revision in your working copy, or if you have made local changes, that is exactly what goes into the copy. This involves transferring some data from your working copy back to the repository, or more specifically, the locally modified files.

You can specify the location of the new branch or tag in the **Destination** section:

- **Into repository's directory** - [The URL of the parent directory](#) of the new branch or tag.  
**Note:** *Peg revisions* have no effect for this operation since it is used to send information to the repository.
- **Under the name** - You can specify another branch or tag name other than the name of the resource selected in the **Repositories** or **Working copy** view.

The new branch or tag will be created as a child of the specified URL of the repository directory and will have the new name.

## Merging

At some stage during the development process, you will want to merge the changes made on a *branch* back into the *trunk*, or vice-versa. The *merge* is accomplished by comparing two points (branches or revisions) in the repository and applying the obtained differences to your working copy. This process is closely related to the *diff* concept.

**Note:** A *branch* is a line of development that exists independently of another line, yet still shares a common history if you look far enough back in time. A *branch* always begins life as a *copy of something* (such as a trunk, another branch, or tag), and moves on from there, generating its own history.

The  **Merge** action is available in the **Tools** menu. The working copy item selected when you issued the command will be the one receiving the generated changes. If there is no item selected, the *merge* operation will be performed on the entire working copy.

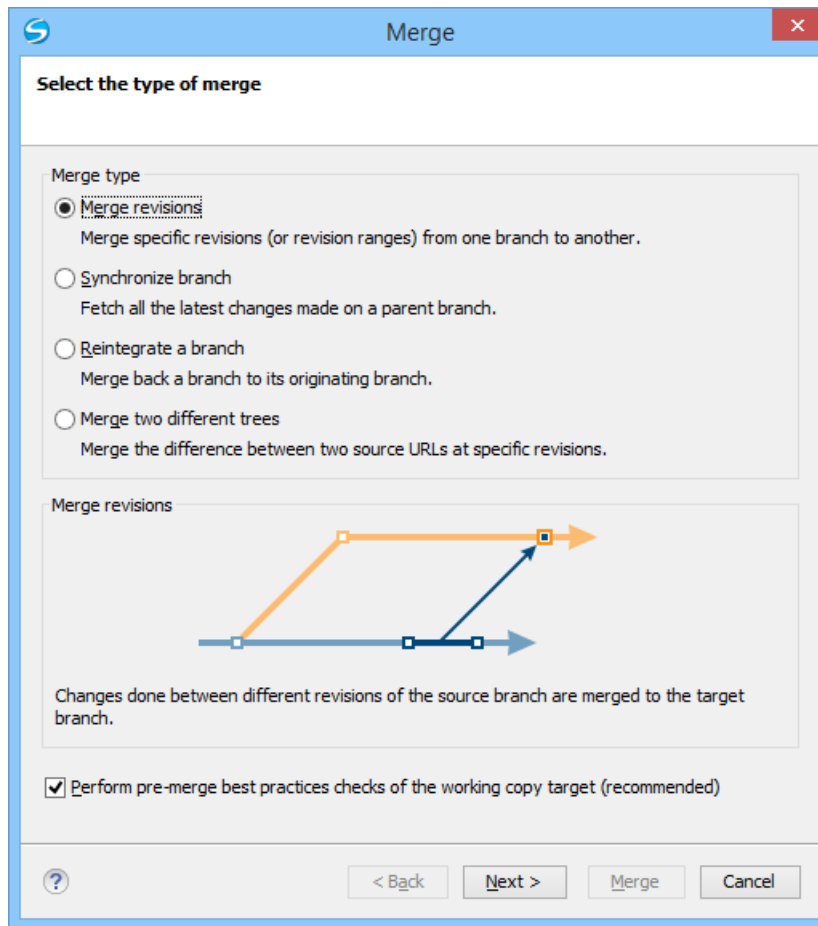


**Figure 562: Merge Wizard**

The four types of merging are as follows:

- **Merge revisions** - Port changes from one branch to another. Note that the *trunk* can also be considered a branch, in this context.
- **Synchronize branch** - Fetch all the changes made on a parent branch (or the *trunk*) to a child branch.
- **Reintegrate a branch** - Merge a branch back to its parent branch (can also be the *trunk*).
- **Merge two different trees** - Integrate the changes done on a branch to a different branch.

It is recommended that you enable the following pre-merge check:

- **Perform pre-merge best practices checks of the working copy target** - When selected, the SVN Client checks if the working copy target item is ready for the merge operation and displays the **pre-merge checks** wizard page.

**Remember:** It is a good idea to perform a merge into an unmodified working copy. If you have made changes to your working copy, commit them first. If the *merge* does not go as you expect, you may want to revert the changes and revert cannot recover your uncommitted modifications.

**Important:** The above recommendation becomes mandatory when *reintegrating a branch*.

#### Pre-Merge Checks

Before performing a merge, it is recommended to make sure that the working copy target item is ready for the merge operation. The SVN Client includes a best practices step that checks various conditions of the working copy target item to ensure that the merge operation will succeed. By selecting the **Perform pre-merge best practices checks of the working copy target** option in the first page of the **Merge** wizard, the **Pre-merge checks** wizard page is displayed to give you a summary of the verified conditions.

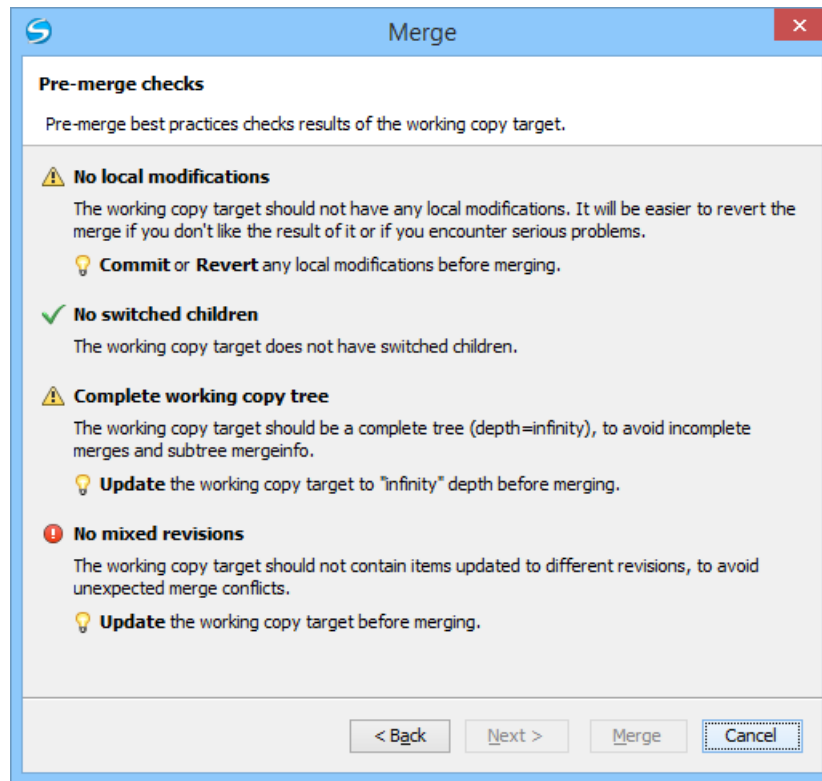


**Figure 563: Pre-Merge Checks Wizard Page**

The following conditions are checked in this operation:

#### **No local modifications**

The working copy item (or any of its children) receiving the merge should not contain uncommitted changes, to make it easier to revert merge-generated changes if you encounter unexpected results.

**Tip:** If this condition fails, you should *commit* or *revert* the local modifications before merging.

#### **No switched children**

None of the children of the working copy item receiving the merge should be switched, to avoid incomplete merges and *subtree mergeinfo*.

**Tip:** If this condition fails, you should switch back all the children before merging.

#### **Complete working copy tree**

The working copy item receiving the merge should be a complete directory tree structure with an infinite depth, to avoid incomplete merges and *subtree mergeinfo*.

**Tip:** If this condition fails, you should change the *sticky* depth of the working copy item receiving the merge to *infinity* value.

#### **No mixed revisions**

To avoid unexpected merge conflicts, the working copy item that is receiving the merge should not contain items that were updated to other revisions.

**Tip:** If this condition fails, you should *update* the working copy before merging.

Each condition is marked with an icon that represents the state of the condition. The possible states are as follows:

- **✓ (Successful)** - The condition is fulfilled successfully.
- **⚠ (Warning)** - The condition is not fulfilled, but it is not mandatory.
- **❗ (Error)** - The condition is not fulfilled and is mandatory (therefore, the operation cannot proceed until you solve the error).



**Tip:** For each condition state, a message is displayed that gives you additional information about the results and, for warning or errors, a hint that explains how you can solve them.

**Important:** After solving any of the warnings or errors, it is recommended that you perform the *pre-merge checks* again to make sure your new changes are valid.

### Merge Revisions

This case is when you have made one or more changes to a branch and you want to duplicate them in another branch. For example, we know that a problem has been fixed by committing revisions 17, 20, and 25 on branch B1. These changes are also needed in branch B2. Thus, to merge them, we need a working copy of the B2 branch.

To merge revisions from a different branch, follow these steps:

1. Go to menu **Tools > Merge**.  
The **Merge** wizard is opened.
2. Select the **Merge revisions** option.
3. It is recommended that you select the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
  - a) Press the **Next** button.  
If the **Perform pre-merge best practices checks of the working copy target** option is selected, the **Pre-Merge Checks wizard page** is displayed.

**Note:** If errors are found you need to solve them before proceeding.

4. Press the **Next** button.  
The **Merge revisions** wizard page is displayed.
5. In the **Merge from (URL)** text box, enter the [URL of the branch or tag](#) that contain the changes that you want to duplicate in your working copy. In our example, it is the URL of the B1 branch.

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.

**Note:** If the URL belongs to a different repository than the working copy, the **Ignore ancestry / Disable merge tracking** option (in the [Merge Options wizard page](#)) will be selected automatically (and you cannot change this). This is because the [Subversion client cannot track changes between different repositories](#).

**Tip:** You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). The peg revision does not affect the merge range you select. By default, the HEAD revision is assumed.

6. In the **Revisions to merge** section, choose between the **all revisions** and **specific revision(s)** options.
  - **all revisions** - The operation will include *all eligible revisions* that were not yet merged.
  - **specific revision(s)** - You can specify one or more individual revisions and/or revision ranges. Also, you can mix *forward* ranges (for example, 1-5), *backward* ranges (for example, 20-15), and subtract specific revisions from a range (for example, 1-5, -3).

**Note:** If using the Subversion command-line client, a revision range of the form 1-5 means all changes starting from revision 2 up to revision 5 (the changes necessary to reach revision 5, committed after revision 1). Unlike the Subversion command-line client, in Syncro SVN Client the revision ranges are inclusive, meaning that it will process all revisions, starting with revision 1, up to and including revision 5.



**Attention:** The HEAD revision is the only non-numerical revision allowed, and it can only be used when specifying revision ranges as one of the ends of the range (for example, 10-HEAD). Be careful when using it, as it might not refer to the desired revision, if it has recently been committed by another user.

**Tip:** If you want to perform a *reverse merge* and roll-back your working copy changes that have already been committed to the repository, use the *negative revisions* notation (for example, -7) or *backward revision ranges* (for example, 20-10).

- a) If you press the **History** button, the **History dialog box** is displayed, which allows you to select one or more revisions to be merged.
7. Optionally, if you want to [configure the options](#) for your merge, press the **Next** button.  
The **Merge Options wizard page** is displayed that allows you to configure options for the operation.





**Warning:** If the **Ignore ancestry / Disable merge tracking** option is selected and you chose **all revisions** in the **Revisions to merge** section, revisions that were previously merged will also be included, which may result in conflicts.

8. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.

**Note:** The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

### *Synchronize a Branch*

While working on your own branch, other people on your team might continue to make important changes in the parent branch (which can be the *trunk* itself or any other branch). It is recommended to periodically duplicate those changes in your branch to make sure your changes are compatible with them. This is done by performing a *synchronize merge*, which will bring your branch up-to-date with any changes made to its ancestral parent branch since your branch was last created or synchronized. Subversion is aware of the history of your branch and can detect when it split away from the parent branch.

Frequently keeping your branch in sync with the parent branch helps you to prevent unexpected conflicts when the time comes for you to duplicate your changes back into the parent branch. The synchronization uses *merge tracking* to skip all those revisions that have already been merged, thus a sync merge can be repeated periodically to fetch all the latest changes of the parent branch to keep up-to-date with it.

**Important:** It is recommended to synchronize the whole working copy that was created from the child branch (the root of the working copy), rather than just a part of it.

After running the *synchronize merge*, your working copy from the child branch now contains new local modifications, and these edits are duplications of all of the changes that have happened on the *trunk* since you first created your branch. At this point, your private branch is now synchronized with the trunk.

To synchronize your branch with its parent branch, follow these steps:

1. Go to **Tools > Merge**.

The **Merge** wizard is opened.

2. Select the **Synchronize branch** option.

3. It is recommended that you select the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.

a) Press the **Next** button.

If the **Perform pre-merge best practices checks of the working copy target** option is selected, [the Pre-Merge Checks wizard page](#) is displayed.

**Note:** If errors are found you need to solve them before proceeding.

4. Press the **Next** button.

The **Synchronize branch** wizard page is displayed.

5. In the **Parent branch (URL)** text box, enter [the URL of the branch from which you created your branch](#). This means that the URL must belong to the same repository as your working copy that was created from the child branch.

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.

**Tip:** You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). The peg revision specifies both the peg revision of the URL and the latest revision that will be considered for merging. By default, the HEAD revision is assumed.

6. Optionally, if you want to [configure the options](#) for your merge, press the **Next** button.

The [Merge Options wizard page](#) is displayed that allows you to configure options for the operation.

**Note:** The **Ignore ancestry / Disable merge tracking** option is not available for this merge type, since a synchronization merge should always be recorded in the destination branch.

7. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.

**Note:** The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

### *Reintegrate a Branch*

There are some conditions that apply to reintegrate a branch:

- The server must support merge tracking.
- The source branch (to be reintegrated) must be coherently synchronized with its parent branch. This means that all revisions between the branching point and the last revision merged from the parent branch to the child branch must be merged to the latter one (there must be no missing revisions in-between).
- The working copy **must not** contain the following:
  - Local modifications.
  - A mixture of revisions (all items must point to the same revision).
  - Sparse directories (all directories must be of **infinity** depth).
  - Switched items.
- The revision of the working copy must be greater than or equal to the last revision of the parent branch with which the child branch was synchronized.

**Tip:** You can use [the pre-merge checks option](#) to make sure these conditions are fulfilled.

This method is useful when you have a feature branch on which the development has concluded and it should be merged back into its parent branch. Since you have kept the feature branch synchronized with its parent, the latest versions of them will be absolutely identical except for your feature branch changes. These changes can be reintegrated into the parent branch by using a working copy of it and the **Reintegrate a branch** option.

This method uses the *merge-tracking* features of Apache Subversion™ to automatically calculate the correct revision ranges and to perform additional checks that will ensure that the branch to be reintegrated has been fully updated with its parent changes. This ensures that you do not accidentally undo work that others have committed to the parent branch since the last time you synchronized the child branch with it. After the merge, all branch development will be completely merged back into the parent branch, and the child branch will be redundant and can be deleted from the repository.

**Tip:** Before reintegrating the child branch it is recommended to synchronize it with its parent branch one more time, to help avoid any possible conflicts.

To reintegrate a child branch into its parent branch, follow these steps:

1. Go to menu **Tools > Merge**.  
The **Merge** wizard is opened.

2. Select the **Reintegrate a branch** option.

**Note:** This option is not available if the selected working copy item (or if it is a directory, any of the items inside of it) has any type of modification. This is because it is mandatory for the target item to have no modifications.

3. It is recommended that you select the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
  - a) Press the **Next** button.

If the **Perform pre-merge best practices checks of the working copy target** option is selected, the [Pre-Merge Checks wizard page](#) is displayed.

**Note:** If errors are found you need to solve them before proceeding.

4. Press the **Next** button.  
The **Reintegrate a branch** wizard page is displayed.
5. In the **Child branch (URL)** text box, enter [the URL of the child branch to be reintegrated](#). This means that the URL must belong to the same repository as your working copy that was created from the parent branch.  
You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.

**Tip:** You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). The peg revision specifies both the peg revision of the URL and the latest revision that will be considered for merging. By default, the HEAD revision is assumed.

The [Merge Options wizard page](#) is displayed that allows you to configure options for the operation.

**Note:** Since a *reintegrate merge* is so specialized, most of the merge options are not available, except for those in the **File Comparison** category.

6. Press the **Merge** button.  
The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.

**Note:** The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

#### *Merge Two Different Trees*

This merge type is useful when you need to duplicate changes from one child branch (for example, CB1) to another child branch (CB2) from the same parent branch. The SVN client will calculate the changes necessary to get from the HEAD revision of the parent branch (or the *trunk*) to the HEAD revision of one of its child branches (CB1), and apply those changes to your working copy of the other branch (CB2). The result is that the latter child branch (CB2) will also include the changes made on the original child branch (CB1), although that branch was not reintegrated into the parent branch.

This merge type could also be used to reintegrate a child branch back into its parent when the repository does not support *merge tracking*.

**Note:** If the server does not support *merge-tracking*, then this is the only way to merge a branch back to its parent.

1. Go to menu **Tools > Merge**.  
The **Merge** wizard is opened.
2. Select the option **Merge two different trees**.
3. It is recommended that you select the **Perform pre-merge best practices checks of the working copy target** option to make sure that the working copy target item is ready for the merge operation.
  - a) Press the **Next** button.  
If the **Perform pre-merge best practices checks of the working copy target** option is selected, the [Pre-Merge Checks wizard page](#) is displayed.

**Note:** If errors are found you need to solve them before proceeding.

4. Press the **Next** button.  
The **Merge two different trees** wizard page is displayed.
5. In the **From (starting URL and revision)** section enter [the URL of the first branch](#).

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.

**Tip:** If you are using this method to merge a feature branch back to its parent branch, you need to start the merge wizard from within a working copy of the parent. In this field enter the full URL of the parent branch. This may sound wrong, but remember that the parent is the starting point to which you want to add the branch changes.

**Note:** If the URL belongs to a different repository than the working copy, the **Ignore ancestry / Disable merge tracking** option (in the [Merge Options wizard page](#)) will be selected automatically (and you cannot change this). This is because the [Subversion client cannot track changes between different repositories](#).

**Tip:** You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). By default, the HEAD revision is assumed.

6. Enter the last revision number at which the two trees were synchronized by choosing between **HEAD revision** and **other revision**.

- **HEAD revision** - Use this option if you are sure that no one else has committed changes since the last synchronization.
- **other revision** - Use this option to input a specific revision number and avoid losing recent commits. You can use the **History** button to see a list of all revisions.

7. In the **To (ending URL and revision)** section enter [the URL of the second branch](#).

You may also click the **Browse** button to browse the repository and find the desired branch. If you have previously merged from this branch, then you can simply use the drop down menu, which displays a history of previously used URLs.

**Tip:** If you are using this method to merge a feature branch back to its parent branch, enter the URL of the feature branch. This way, only the changes unique to this branch will be merged, since the branch should have been periodically synchronized with its parent.



**Attention:** The URL must point to the same repository as the one in the **From (starting URL and revision)** field. Otherwise, the operation will not be allowed, since Subversion cannot compute changes between items from different repositories.

**Tip:** You can also specify a [peg revision](#) at the end of the URL (for example, URL@rev1234). By default, the HEAD revision is assumed.

8. Select a revision to compute all changes committed up to that point by choosing between **HEAD revision** and **other revision**.

- **HEAD revision** - This is the default selected revision.
- **other revision** - Use this option if you want to enter a previous revision. You can use the **History** button to see a list of all revisions.

9. Optionally, if you want to [configure the options](#) for your merge, press the **Next** button. The [Merge Options wizard page](#) is displayed that allows you to configure options for the operation.



**Warning:** If the **Ignore ancestry / Disable merge tracking** option is selected and you chose **all revisions** in the **Revisions to merge** section, revisions that were previously merged will also be included, which may result in conflicts.

10. Press the **Merge** button.

The merge operation is performed.

If the merge is completed successfully, all the changes corresponding to the selected revisions should be merged in your working copy.

It is recommended to look at the results of the merge, in the working copy, to review the changes and see if it meets your expectations. Since merging can sometimes be complicated, [you may need to resolve conflicts](#) after making major changes.

**Note:** The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

## Merge Options

Here is the list of options that can be used when merging:

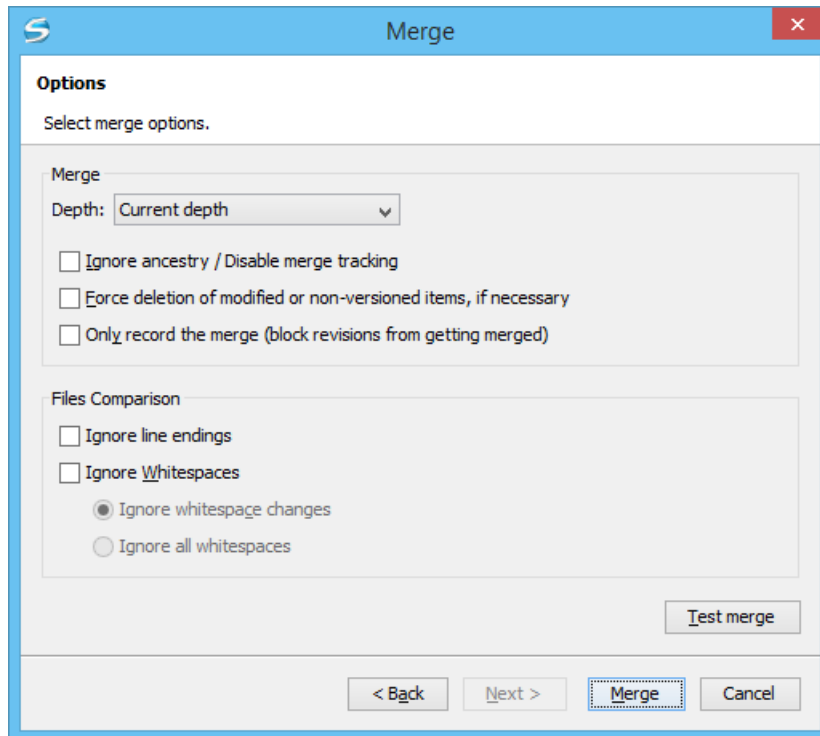


Figure 564: Merge Wizard - Advanced Options

- **Depth** (This option is applicable only for directories) - sets the depth of the merge operation. You can specify how far down into your working copy the merge should go by selecting one of the following values:
  - **Current depth** - Obeys the depths registered for the directories in the working copy that are to be switched.
  - **Recursive (infinity)** - Merges all the files and folders contained in the selected folder. This is the recommended depth for most users, to avoid incomplete merges and *subtree mergeinfo*.
  - **Immediate children (immediates)** - Merges only the child files and folders without recursing subfolders.
  - **File children only (files)** - Merges only the child files.
  - **This folder only (empty)** - Merges only the selected folder (no child files or folders are included).

**Note:** The *depth* term is described in the [Sparse checkouts](#) section. The default depth is the current depth of the working copy item receiving the merge.

- **Ignore ancestry / Disable merge tracking** - Changes the way two items are merged if they do not share a common ancestry. Most merges involve comparing items that are ancestrally related to one another. However, occasionally you may want to merge unrelated items. If this option is not selected, the first item will be replaced with the second item. In these situations, you would want the merge to do a path-based comparison only, ignoring any relations between the items. For example, if two different files have the same name and are in the same relative location, deselecting the option replaces one of the files with the other one, and selecting it merges their contents.

**Note:** If the URL of the merge source belongs to a different repository than the URL of the target working copy item (the one receiving the changes), this option is selected automatically (and you cannot change this). This is because the [Subversion client cannot track changes between different repositories](#).

- **Force deletion of modified or non-versioned items, if necessary** - If not selected, when the merge operation involves deleting locally modified or non-versioned items, it will fail. This is done to prevent data loss. This option is only available if there are uncommitted changes in the working copy.
- **Only record the merge (block revisions from getting merged)** - Available when the [Ignore ancestry / Disable merge tracking option](#) is not selected. It enables a special mode of the merge operation that just records it in the local merge tracking information, without actually performing it (does not modify any file contents or the structure of your working copy). You might want to select this option for two possible reasons:

- You made (or will make) the merge manually, and therefore need to mark the revisions as being merged to make the merge tracking system aware of them. This will exclude them from future merges.
- You want to prevent one or more particular changes from being fetched in subsequent merges.
- **Ignore line endings** - Allows you to specify how the line ending changes should be handled. By default, all such changes are treated as real content changes, but you can ignore them if you select this option.
- **Ignore whitespaces** - Allows you to specify how the whitespace changes should be handled. By default, all such changes are treated as real content changes, but you can ignore them if you select this option.
- **Ignore whitespace changes** - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).
 

**Note:** Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.
- **Ignore all whitespaces** - Ignores all types of whitespace changes.
- **Test merge** - Performs a dry run of the merge operation, allowing you to *preview* it without actually performing the merge. In the **Console** view you will see a list of the working copy items that will be affected and how they will be affected. This is helpful in detecting whether or not a merge will be successful, and where conflicts may occur.

### Resolving Merge Conflicts

After the merge operation is finished, it is possible to have some items in conflict. This means that some incoming modifications for an item could not be merged with the current working copy version. If there are such conflicts, the **Merge conflicts** dialog box will appear, presenting the items that are in conflict. This dialog box offers you choices for resolving the conflicts.

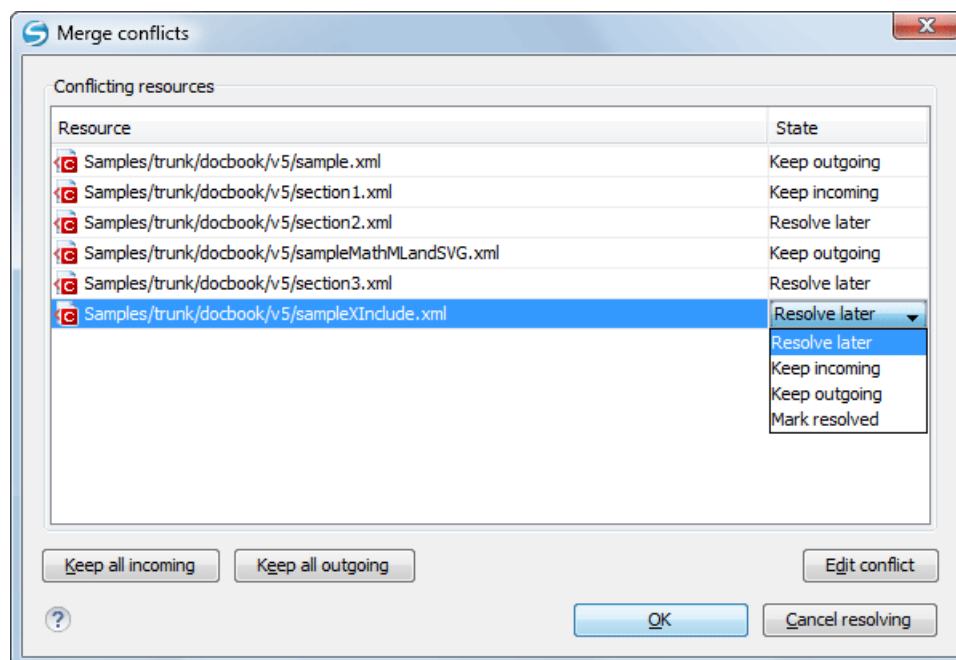


**Figure 565: Merge Conflicts Dialog Box**

The options to resolve a conflict are as follows:

- **Resolve later** - Used for leaving the conflict as it is, to manually resolve it later.
- **Keep incoming** - This option keeps all the incoming modifications and discards all current ones from your working copy.
- **Keep outgoing** - This option keeps all current modifications from your working copy and discards all incoming ones.
- **Mark resolved** - You should choose this option after you have manually solved the conflict, to instruct the Subversion that it was resolved. To do this, use the **Edit conflict** button, which displays a dialog box that presents the contents of the conflicting items (the content of the working copy version versus the incoming version).



### Sub-tree Merges

It is recommended to perform a merge on the whole working copy (select its root directory when triggering the operation) to avoid *sub-tree mergeinfo*. *Sub-tree mergeinfo* is the *mergeinfo* recorded to describe a *sub-tree merge*. That is, a merge done directly to a child of a branch root that might be needed in certain situations. There is nothing special about *sub-tree merges* or *sub-tree mergeinfo* except that the complete record of merges to a branch may not be contained solely in the *mergeinfo* on the branch root and you may have to look to any *sub-tree mergeinfo* to get a full accounting. Fortunately, Subversion does this for you and rarely will you need to look for it.

### Merging from Foreign Repositories

Subversion supports merging from foreign repositories. While all merge source URLs must point to the same repository, the merge target (from the working copy) may come from a different repository than the source. However, copies made in the merge source will be transformed into plain additions in the merge target. Also, *merge-tracking* is not supported for merges from foreign repositories.

**Note:** When performing merges from repositories other than the one corresponding to the target item (from the working copy), the [Ignore ancestry / Disable merge tracking option](#) in the [Merge Options wizard page](#) will be selected automatically (and you cannot change this).

### General Merge Recommendations

As a recommendation, you should only merge into clean working copies that **do not** contain any of the following:

- Modifications.
- Sparse directories (all directories must be of depth *infinity*).
- Switched items.

**Important:** This recommendation becomes mandatory when performing a [reintegrate merge](#) operation. Also, trying to merge to mixed-revision working copies will fail in all types of merge operations.

**Remember:** The merge result is only in your local working copy and needs to be committed to the repository for it to be available to others.

### Switch the Repository Location

The **Switch** action is useful when the repository location of a working copy, or an already committed item in the working copy, must be changed within the same repository. The action is available on the **Tools** menu when a versioned resource is selected in the current working copy that is displayed in the [Working Copy view](#).

**Note:** *External* items cannot be switched using this action. Instead, change the value of the `svn:externals` property set on the parent directory of the external item and update the parent directory.

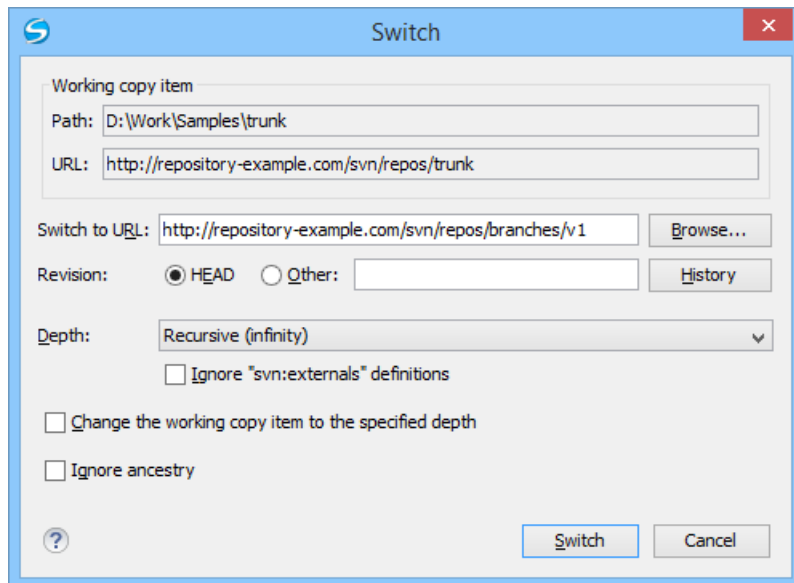


**Figure 566: Switch Dialog Box**

The following options can be configured in the **Switch** dialog box:

#### Switch to URL

The new location in the same repository you are switching to.

**Tip:** You can switch to items that were deleted, moved, or replaced, by specifying the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

**Note:** For items that are already [switched](#) that you want to switch back, the proposed URL is the original location of the item.

#### Revision

The specific version of the location that you are switching to.

#### Depth - (This option is applicable only for directories)

##### Current depth

Obeys the depths registered for the directories in the working copy that are to be switched.

##### Recursive (infinity)

Switches the location of the selected folder and all of its files and folders.

##### Immediate children (immediates)

Switches the location of the selected folder and its child files and folders without recursing subfolders.

##### File children only (files)

Switches the location of the selected folder and its child files.

##### This folder only (empty)

Switches the location of the selected folder (no child files or folders are included).

#### Ignore "svn:externals" definitions

When selected, external items are ignored in the switch operation. This option is only available if you choose the **Current depth** or **Recursive (infinity)** depth.

#### Change the working copy item to the specified depth

Changes the *sticky* depth on the directory in the working copy.

#### Ignore ancestry

When not selected, the SVN system does not allow you to switch to a location that does not share a common ancestry with the current location. If selected, the SVN does not check for a common ancestry.



## Relocate a Working Copy

Sometimes the base URL of the repository is changed after a working copy is checked out from that URL. For example, if the repository itself is moved to a different server. In such cases, you do not have to check out a working copy from the new repository location. It is easier to change the base URL of the root folder of the working copy to [the new URL of the repository](#).

**Note:** *Peg revisions* have no effect for this operation.

This **Relocate** action is available in the **Tools** menu when selecting the root item of the working copy.

**Note:** *External* items that are defined using absolute URLs and that point to the same repository as the working copy are not affected by the **Relocate** action (the URL is not updated). To relocate these items, change the value of the `svn:externals` property for each external item (set on their parent directories). For example, if an external item is defined as `externalDir http://host/path/to/repo/to/dir` and the repository was moved to another server (host2) and its protocol changed to `https`, then the value of the property needs to be updated to `externalDir https://host2/path/to/repo/to/dir`.

**Tip:** If you edit external items using the method described in the previous note, on the next update the system will try to fetch the external items again. To avoid this, you can invoke the **Relocate** action on each of these external items.

## Patches

This section explains how to work with patches in Syncro SVN Client.

### What is a Patch

Suppose you are working with a set of XML files that you want to tag the project and distribute releases to other team members. While working on the project and correcting problems, you may need to distribute the corrections to other team members. In this case, you can distribute a patch (a collection of differences) that would correct the problems when applied over the last distribution. By default, the Syncro SVN Client generates patches in [the Unified Diff format](#), but it can also use [the Git format](#).

Creating a patch in Apache Subversion™ implies the access to either two revisions of a versioned item, or two different versioned items from the repository:

- *Two revisions of a version item* - the item can be local or remote and you can select two versions of it. This also applies when you need to generate a patch that only contains the changes in the working copy that were not yet committed.
- *Two different versioned items from the repository* - the items are remote and you need to specify a revision for both.



**Warning:** The resulting patch file may contain content that was written using a mix of encodings, based upon the encodings of the files that were compared. If you open the generated patch file in a text editor, it may result in unrecognizable content.

### Generating a Patch - Local Items

Based on a versioned item (already committed or scheduled for addition) in the working copy, you can generate patches that contain the local changes, the differences between a specific revision of that item and the item itself, or differences between the pristine item and another item from the repository. There are four options for generating a patch based upon local items.

To open the **Create patch** wizard, use the  **Create patch** action from the **Tools** menu or from the contextual menu in the **Modified**, **Incoming**, **Outgoing**, or **Conflicts** modes.

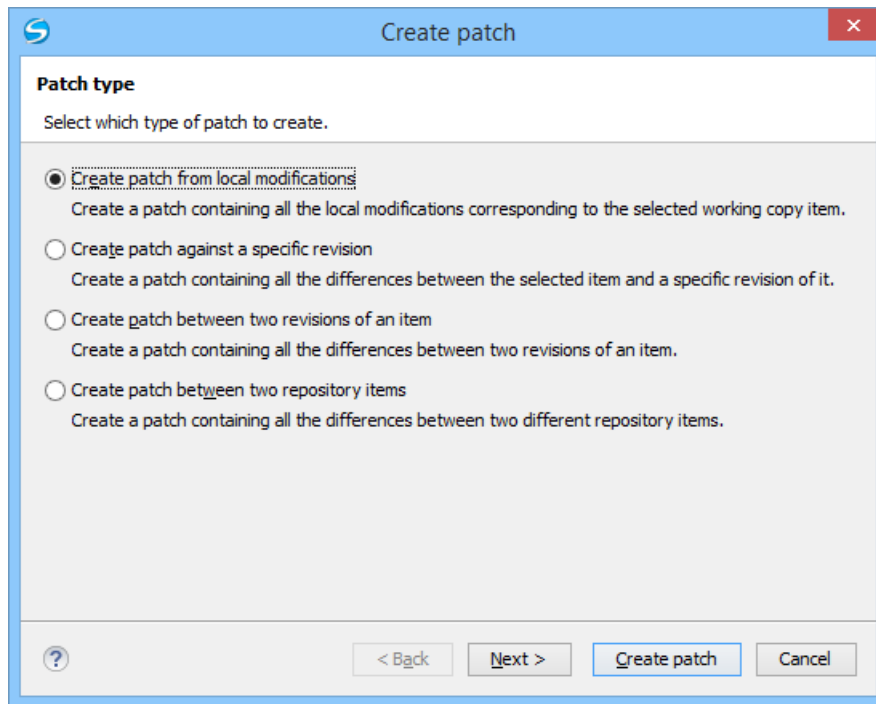


**Figure 567: Create Patch Wizard - Local Items**

#### Create Patch from Local Modifications

This is the most commonly used type of patch and contains only the local changes for the selected item.

This option is useful if you want to share changes with other team members and you are not yet ready to commit them. This option is only available for local items that contain modifications. It is not available for items in which the local file status is *unversioned or ignored, and in some cases missing or obstructed*.

The steps are as follows:

1. Go to menu **Tools > Create patch**.  
This opens the **Create patch** wizard.
2. Select the **Create patch from local modifications** option in the dialog box.
3. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.  
This options page does not remember your selections when creating future patches. It will revert to the default values.  
The **Options** wizard page is displayed.
4. Press the **Create patch** button.  
If the patch is applied on a folder of the working copy and that folder contains *unversioned files*, this step of the wizard offers the option of selecting the ones that will be included in the patch.

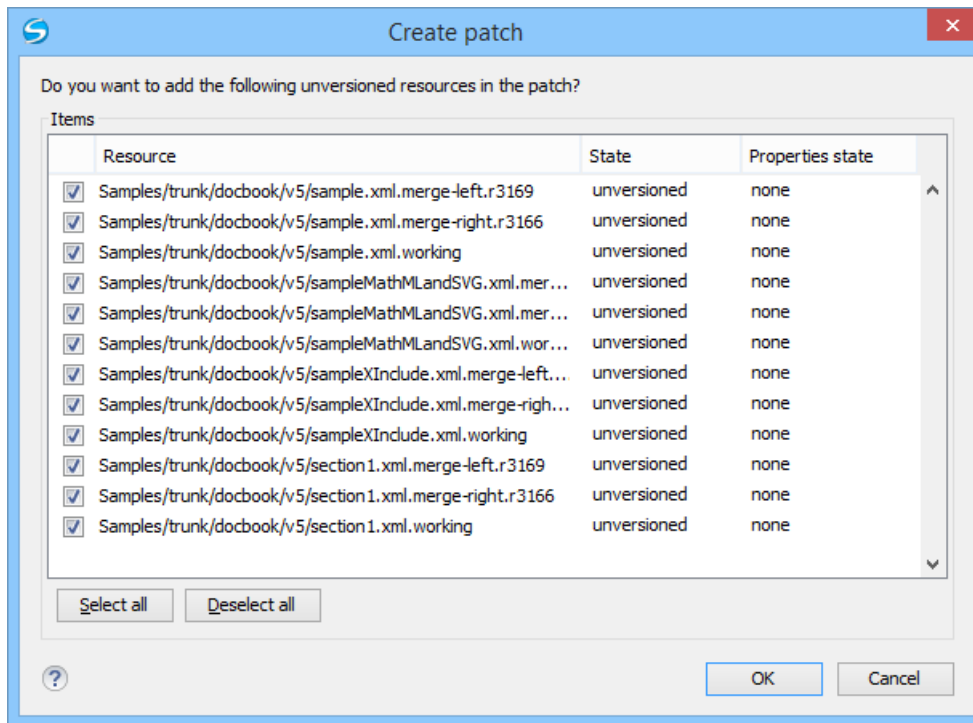


**Figure 568: Create Patch Dialog Box - Add Unversioned Resources**

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

#### Create Patch Against a Specific Revision

This type of patch contains changes between an old revision and the current content from the selected item within the working copy.

This option is useful if you want to obtain differences between an older revision and the current state of the working copy (for instance, to test how current changes apply to an older version).

The steps are as follows:

1. Go to menu **Tools > Create patch**.  
This opens the **Create patch** wizard.
2. Select the **Create patch against a specific revision** option in the dialog box.
3. Press the **Next** button.  
The second step of the wizard is opened:

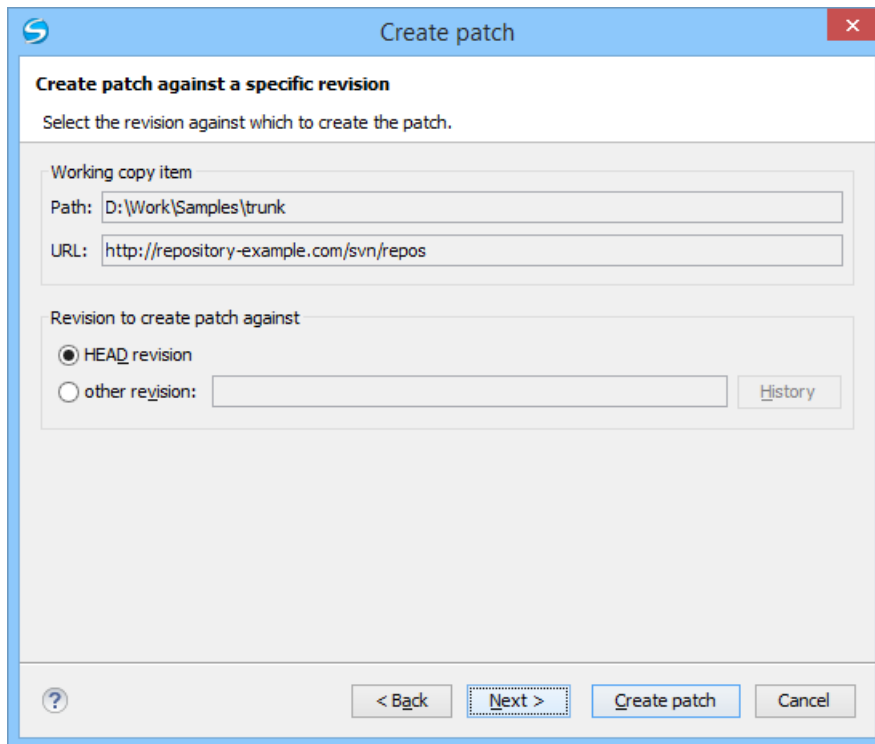


**Figure 569: Create Patch Wizard - Step 2**

**4. Select the revision to create patch against.**

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.

**Note:** If the **revision to create patch against** is older than the revision for which the working copy item was updated, the patch will include changes that were made **after** the selected revision.

**5. Optionally, if you want to configure the options for your patch, press the Next button.**

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

**6. Press the Create patch button.**

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

### Create Patch Between Two Revisions of an Item

This type of patch contains historical changes between two revisions of a selected item.

This option is useful if you want to share changes between two revisions with other team members.

**Tip:** If you need to generate a patch between two revisions of a previously *deleted*, *moved*, or *replaced* item, you should use [the Create patch between two repository items option](#) instead.

The steps are as follows:

**1. Go to menu Tools > Create patch.**

This opens the **Create patch** wizard.

**2. Select the Create patch between two revisions of an item option in the dialog box.**

**3. Press the Next button.**

The second step of the wizard is opened:

**Figure 570: Create Patch Wizard - Step 2**

4. Select the starting and ending revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.

**Note:** The patch will only include changes between the two specified revisions, starting with the changes that were made **after** the older revision.

**Tip:** If you want to reverse changes done between two revisions by using a patch file, you can specify the newer revision in the **From** section and the older version in the **To** section.

5. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in [the Output section of the Options page](#) or in the default location.

#### Create Patch Between Two Repository Items

This type of patch contains changes between one version of an item and a specific version of another item.

This option is useful for generating a patch that contains changes between existing, or even previously deleted, moved, or replaced items from different branches. This is the default option when you do not have a working copy loaded, when no repository items are selected, or when exactly two repository items of the same kind are selected.

**Tip:** To access an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

The steps are as follows:

1. Go to menu **Tools > Create patch**.  
This opens the **Create patch** wizard.
2. Select the **Create patch between two repository items** option in the dialog box.
3. Press the **Next** button.  
The second step of the wizard is opened:

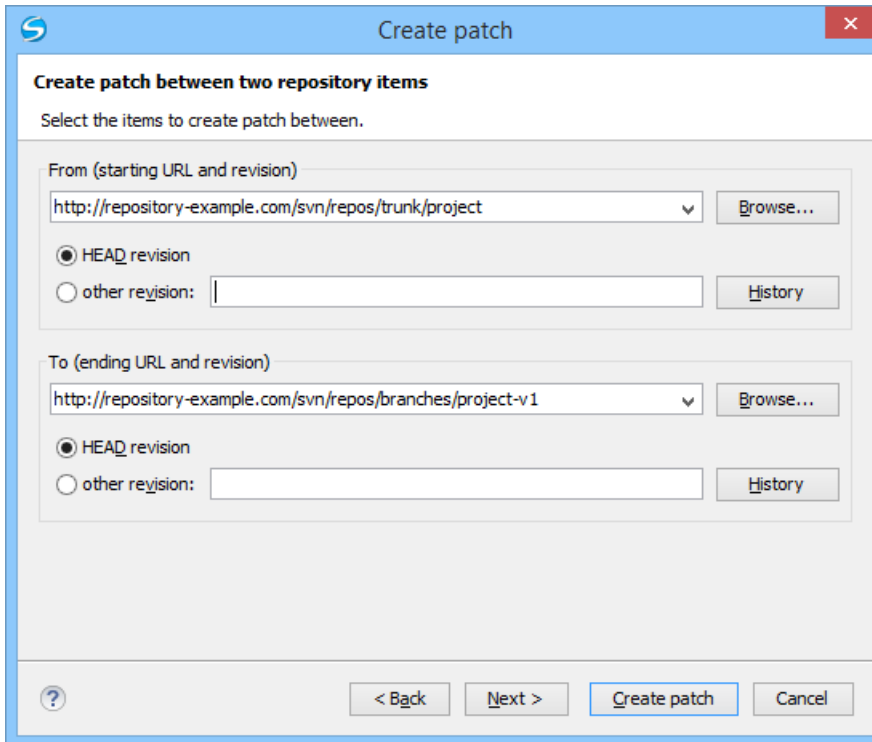


**Figure 571: Create Patch Wizard - Step 2**

4. Select the starting and ending URLs and revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press the **History** button to display a list of the item revisions.

**Important:** Both URLs must point to items from the same repository.

**Note:** If you use a *peg* revision in the URL field, anything specified in the **other revision** field is ignored.

5. Optionally, if you want to configure the options for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in the **Output** section of the **Options** page or in the default location.

#### *Generating a Patch - Remote Items*

Based on a repository item, you can generate patches that contain the differences between two specific revisions of that item, or between a revision of that same item and another revision of another item from the repository. There are two options for generating a patch based upon remote items.

To open the **Create patch** wizard, use the  **Create patch** action from the **Tools** menu.

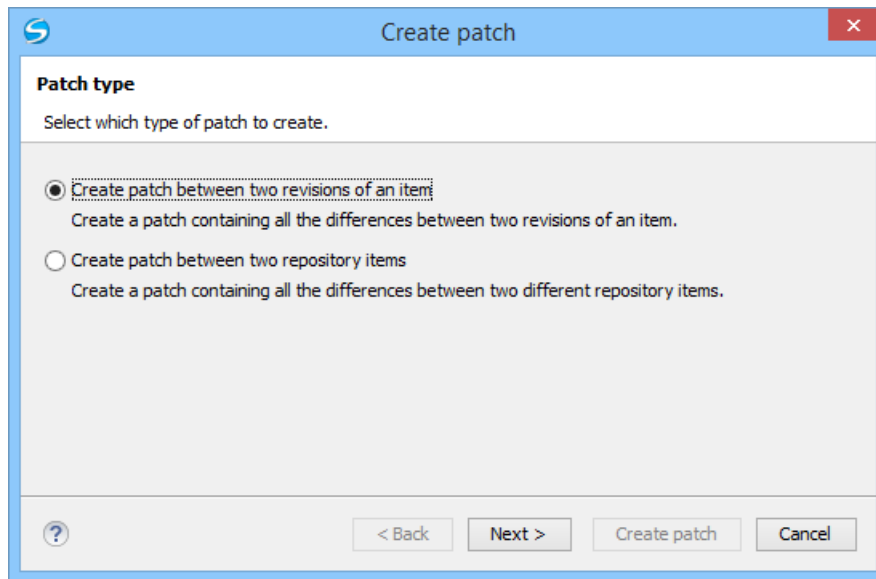


**Figure 572: Create Patch Wizard - Remote Items**

#### Create Patch Between Two Revisions of an Item

This type of patch contains historical changes between two revisions of a selected item.

This option is useful if you want to share changes between two revisions with other team members.

**Tip:** If you need to generate a patch between two revisions of a previously *deleted*, *moved*, or *replaced* item, you should use [the Create patch between two repository items option](#) instead.

The steps are as follows:

1. Go to menu **Tools > Create patch**.  
This opens the **Create patch** wizard.
2. Select the **Create patch between two revisions of an item** option in the dialog box.
3. Press the **Next** button.  
The second step of the wizard is opened:

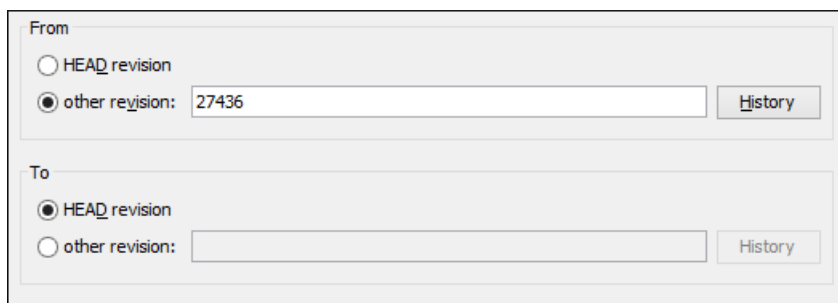


**Figure 573: Create Patch Wizard - Step 2**

4. Select the starting and ending revisions in the **From** and **To** sections.  
You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press [the History button](#) to display a list of the item revisions.  
**Note:** The patch will only include changes between the two specified revisions, starting with the changes that were made **after** the older revision.  
**Tip:** If you want to reverse changes done between two revisions by using a patch file, you can specify the newer revision in the **From** section and the older version in the **To** section.
5. Optionally, if you want [to configure the options](#) for your patch, press the **Next** button.  
This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.

6. Press the **Create patch** button.

The patch is created and stored in the path specified in the **Output** section of the **Options** page or in the default location.

#### Create Patch Between Two Repository Items

This type of patch contains changes between one version of an item and a specific version of another item.

This option is useful for generating a patch that contains changes between existing, or even previously deleted, moved, or replaced items from different branches. This is the default option when you do not have a working copy loaded, when no repository items are selected, or when exactly two repository items of the same kind are selected.

**Tip:** To access an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

The steps are as follows:

1. Go to menu **Tools > Create patch**.  
This opens the **Create patch** wizard.
2. Select the **Create patch between two repository items** option in the dialog box.
3. Press the **Next** button.  
The second step of the wizard is opened:

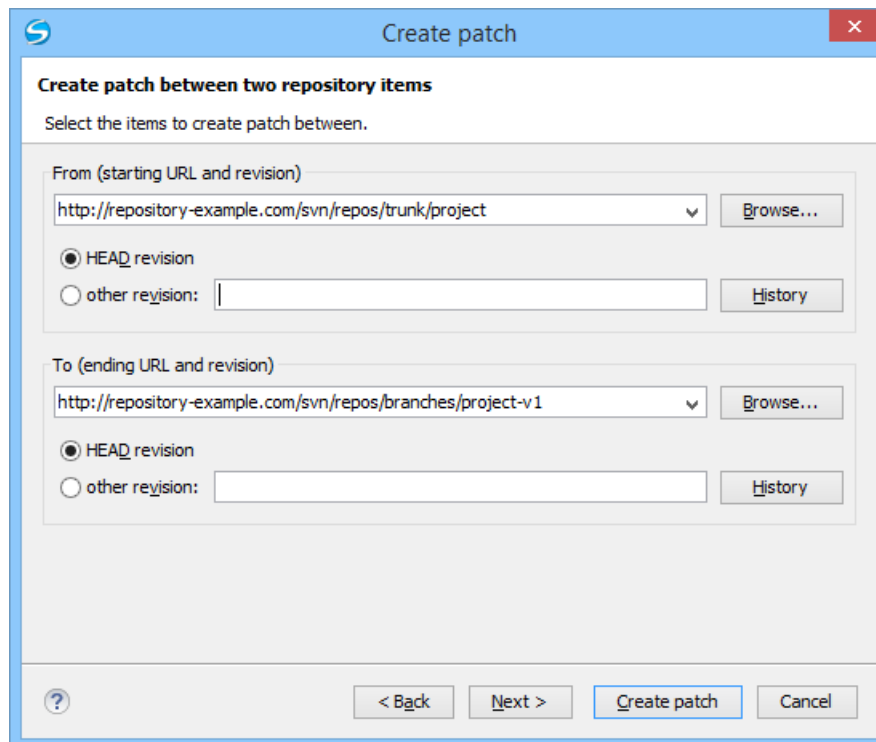


**Figure 574: Create Patch Wizard - Step 2**

4. Select the starting and ending URLs and revisions in the **From** and **To** sections.

You can select between the **HEAD revision** and a specific revision number. For the **other revision** option, you can press the **History** button to display a list of the item revisions.

**Important:** Both URLs must point to items from the same repository.

**Note:** If you use a *peg* revision in the URL field, anything specified in the **other revision** field is ignored.

5. Optionally, if you want to [configure the options](#) for your patch, press the **Next** button.

This options page does not remember your selections when creating future patches. It will revert to the default values.

The **Options** wizard page is displayed.



6. Press the **Create patch** button.

The patch is created and stored in the path specified in the **Output** section of the **Options** page or in the default location.

*Patch Options*

**Figure 575: Create Patch Wizard - Options**

**Patch Section**

**Depth - (This option is applicable only for directories)**

**Current depth**

The depth of recursing the folder for creating the patch is the same as the depth of that same folder in the working copy (available only when generating patches that contain changes from the working copy).

**Recursive (infinity)**

The patch is created on all the files and folders contained in the selected folder.

**Immediate children (immediates)**

The patch is created only on the child files and folders without recursing subfolders.

**File children only (files)**

The patch is created only on the child files.

**This folder only (empty)**

The patch is created only on the selected folder (no child file or folder is included in the patch).

**Ignore content of added files**

When selected, the patch file does not include the content of the *added* items. This option corresponds to the `--no-diff-added` option of the `svn diff` command.

### Ignore content of delete files

When selected, the patch file does not include the content of the *deleted* items. This option corresponds to the `--no-diff-deleted` option of the `svn diff` command.

### Treat copied files as newly added

When selected, copied items are treated as new, rather than comparing the items with their sources. This option corresponds to the `--show-copies-as-adds` option of the `svn diff` command.

### Include files having a binary MIME type

When selected, the application is forced to compare items that are considered binary file types. This option corresponds to the `--force` option of the `svn diff` command.

### Ignore properties

When selected, differences in the properties of items are ignored. This option corresponds to the `--ignore-properties` option of the `svn diff` command.

### Properties only

When selected, only differences in the properties of the items are included in the patch file (file content is ignored). This option corresponds to the `--properties-only` option of the `svn diff` command.

**Note:** The **Ignore properties** and **Properties only** options are mutually exclusive.

### Notice ancestry

If selected, the SVN common ancestry is taken into consideration when calculating the differences. This option corresponds to the `--notice-ancestry` option of the `svn diff` command.

## Files Comparison Section

### Ignore line endings

If selected, the differences in line endings are ignored when the patch is generated. This option corresponds to the `--ignore-eol-style` option of the `svn diff` command.

### Ignore whitespaces

If selected, it allows you to specify how the whitespace changes should be handled. When selected, you can then choose between two options:

- **Ignore whitespace changes** (`--ignore-space-change`) - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).

**Note:** Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.

- **Ignore all whitespaces** (`--ignore-all-space`) - Ignores all types of whitespace changes.

## Output Section

### Save as

The patch will be created and saved in the specified file.

### Use Git extended diff format

When selected, the patch is generated using the *Git* format. This option corresponds to the `--git` option of the `svn diff` command.

## Working with Repositories

This section explains how to locate and browse SVN repositories in Syncro SVN Client.

### Importing Resources Into a Repository

Importing resources into a repository is the process of copying local files and directories into a repository so that they can be managed by an Apache Subversion™ server. If you have already been using Subversion and you have an existing working copy you want to use, then you will likely want to follow the procedure for [using an existing working copy](#).

The **Import folder** and **Import Files** actions are available from the **Import** submenu of the **Repository** menu or of the contextual menu in the **Repositories** view. These actions open a dialog box that allow you to select the directories or files that will be imported into the selected repository location.

The **Import folder** action opens the **Import folder** dialog box.

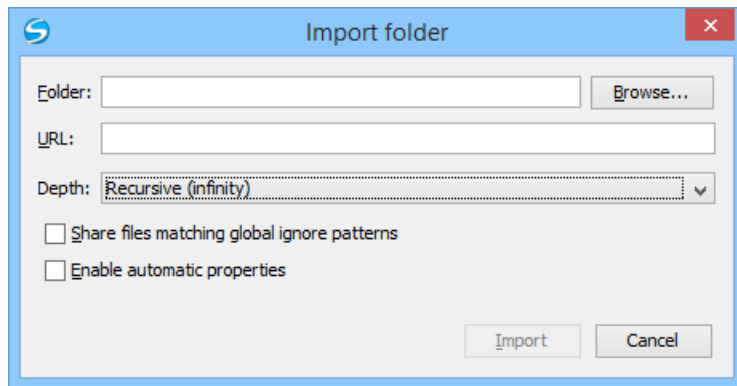


**Figure 576: Import Folder Dialog Box**

You can configure the following options:

#### Folder

Specify [the local folder](#) by using the text box or the **Browse** button. This folder should not be empty or already under version control.

**Important:** By default, the SVN system only imports the content of the specified folder, and not the folder itself. Therefore, it is recommended to use the **Browse** button to select the local folder so that the client will automatically append the name of it to the specified URL.

#### URL

Specify [the repository location](#) that will be used to access the folder to be imported.

**Note:** *Peg revisions* have no effect for this operation since it is used to send information to the repository.



**Attention:** If the new location already exists, make sure that it is an empty directory to avoid mixing your project content with other files (if items exist with the same name, an error will occur and the operation will not proceed). Otherwise, if the address does not exist, it is created automatically.

#### Depth

##### Recursive (infinity)

Imports all the files and folders contained in the selected folder.

##### Immediate children (immediates)

Imports only the child files and folders without recursing subfolders.

##### File children only (files)

Imports only the child files.

##### This folder only (empty)

Imports only the selected folder (no child file or folder is included).

#### Share files matching global ignore patterns

When selected, the file names that match the patterns defined in either of the following locations are also imported into the repository:

- The `global-ignores` property in [the SVN configuration file](#).
- The **File name ignore patterns** option in the **SVN > Working Copy** preferences page.

#### Enable automatic properties/Disable automatic properties

Enables or disables automatic property assignment (per runtime configuration rules), overriding the `enable-auto-props` runtime configuration directive, defined in [the SVN configuration file](#).

**Note:** This option is available only when there are defined properties to be applied automatically for newly added items under version control. You can define these properties in the SVN config file (in the auto-props section). Based on the value of the enable-auto-props runtime configuration directive, the presented option is either **Enable automatic properties**, or **Disable automatic properties**.

### Exporting Resources From a Repository

This is the process of taking a resource from the repository and saving it locally in a clean form, with no version control information. This is very useful when you need a clean build for an installation kit.

The **Export** dialog box is similar to the **Check out** dialog box:

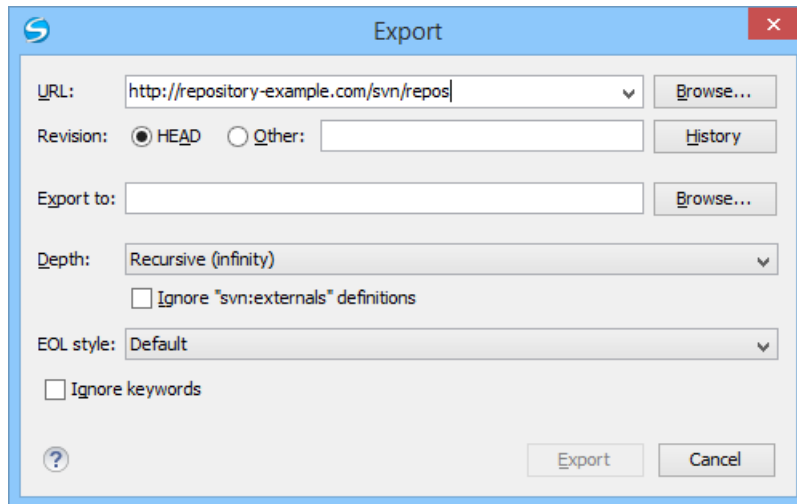


**Figure 577: Export from Repository Dialog Box**

You can configure the following options:

#### URL

Specify [the source directory from the repository](#) by using the text box or the **Browse** button.

**Tip:** To export an item that was deleted, moved, or replaced, you need to specify the original URL (before the item was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

**Note:** The content of the selected directory from the repository and not the directory itself will be exported to the file system.

#### Revision

You can choose between the **HEAD** or **Other** revision. If you need to export a specific revision, specify it in the **Other** text box or use the **History** button and choose a revision from the **History** dialog box.

#### Export to

Specify [the location where you want to export](#) the repository directory by typing the local path in the text box or by using the **Browse** button. If the specified local path does not point to an existing directory, it will automatically be created.

**Important:** By default, the SVN system only exports the content of the directory specified by the URL, and not the directory itself. Therefore, it is recommended to use the **Browse** button to select the *export* location so that the client will automatically append the name of the remote directory to the path of the selected directory.



**Warning:** The destination directory should be empty. If files exist, they will be overwritten by exported files with matching names.

#### Depth

##### Recursive (infinity)

Exports all the files and folders contained in the selected folder.

### Immediate children (immediates)

Exports only the child files and folders without recursing subfolders.

### File children only (files)

Exports only the child files.

### This folder only (empty)

Exports only the selected folder (no child file or folder is included).

### Ignore "svn:externals" definitions

When selected, external items are ignored in the export operation. This option is only available if you choose the **Recursive (infinity)** depth.

### EOL style

Defines the *end-of-line (EOL)* marker that should be used when exporting files that have the value or the `svn:eol-style` property set to `native`. You can choose between the following styles:

- **Default** - It uses the system-specific *end-of-line* marker.
- **CRLF** - The Windows-specific *end-of-line* marker (*carriage return - line feed*).
- **LF** - The Unix / OS X-specific *end-of-line* marker (*line feed*).
- **CR** - The Mac OS 9 (or older)-specific *end-of-line* marker (*carriage return*).

### Ignore keywords

When selected, the export operation does not expand the *SVN keywords* found inside the files.

### Copy / Move / Delete Resources From a Repository

Once you have a location defined in the [Repositories view](#), you can run commands (such as copy, move, and delete) directly on the repository. The commands correspond to the following actions in the contextual menu:

The **Copy to** and **Move to** action allows you to copy and move individual or multiple resources to a specific directory from the *HEAD* revision of the repository.

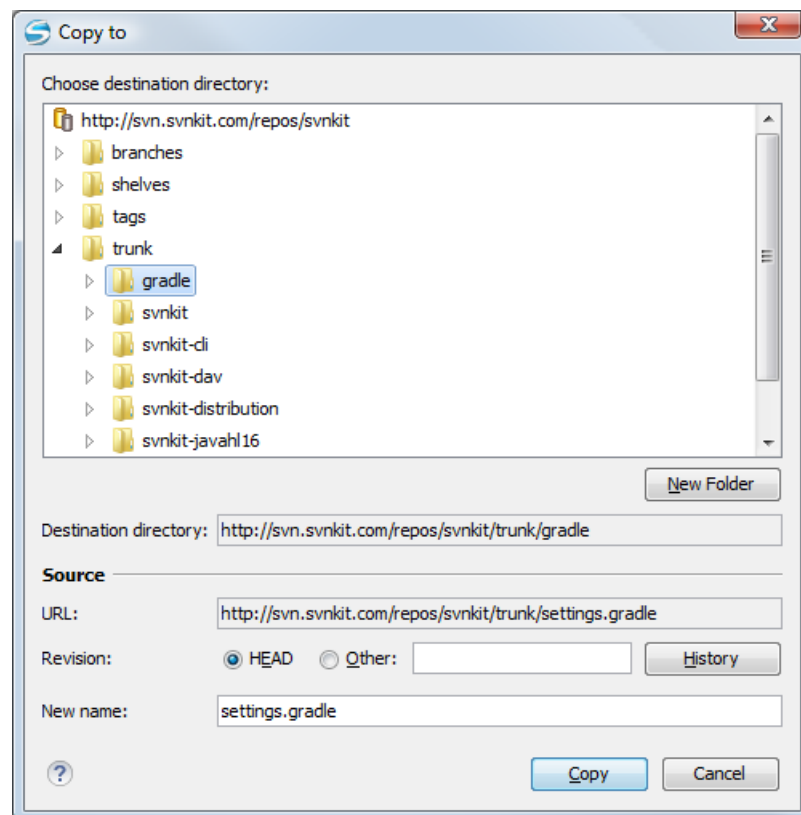


Figure 578: Copy/Move Items in Repository

The dialog box used to copy or move items allows you to browse the *HEAD* revision of the repository and select the destination of the items, presenting its repository URL below the tree view.

The **Source** section presents relevant options regarding the item(s) that you move or copy:

- **URL** - This field is displayed only if you copy/move a single item.
- **Revision** - Presents the revision from which you copy one or more items, allowing you to also choose another revision.

**Note:** Since only items from the HEAD revision can be moved, the **Revision** options are not presented for the **Move to** action.

**Note:** When you copy a single item while browsing a revision other than *HEAD*, the **Revision** options present this revision but does not allow you to change it. The same applies if copying multiple items.

- **New name** - This option is presented when you copy or move a single item, allowing you to also rename it.

Another useful action is **Delete**, allowing you to erase resources directly from the repository.

All three actions are commit operations and you will be prompted with the **Commit message** dialog box.

### Sparse Checkout

Sometimes you only need to check out certain parts of a directory tree. In this case, you can check out the top directory (using the [Check out action from the Repositories view](#)) and then recursively update only the needed directories (using the [Update action from the Working Copy view](#)). Each directory then has a depth set to it, with four possible values:

- **Recursive (infinity)** - Updates all descendant directories and files recursively.
- **Immediate children (immediates)** - Updates the directory, including direct child directories and files, but does not populate the child directories.
- **File children only (files)** - Updates the directory, including only child files without the child directories.
- **This folder only (empty)** - Updates only the selected directory, without updating any children.

For some operations, you can use as depth the current depth registered on the directories from the working copy (the value **Current depth**). This is the depth value defined in a previous check out or update operation.

The sparse checked out directories are presented in the [Working Copy view](#) with a marker corresponding to each depth value, in the top left corner, as follows:

-  **Recursive (infinity)** - This is the default value and it has no mark. The directory has no limiting depth.
-  **Immediate children (immediates)** - The directory is limited to direct child directories (without contents) and files.
-  **File children only (files)** - The directory is limited to direct child files only.
-  **This folder only (empty)** - The directory has *empty* depth set.

A depth set on a directory means that some operations process only items within the specified depth range. For example, **Synchronize** on a working copy directory reports the repository modified items within the depth set on the directory and those existing in the working copy outside of this depth.

The depth information is also presented in the **SVN Information** dialog box and in the tool tip displayed when hovering a directory in the **Working Copy** view.

## Syncro SVN Client Views

The main working area occupies the center of the application window, which contains the most important views:

- [Repositories View](#)
- [Working Copy View](#)
- [History View](#)
- [Console View](#)


The other views that support the main working area are also presented in this section.

## Repositories View

The **Repositories** view allows you to define and manage Apache Subversion™ repository locations and browse repositories. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

If no connections to your repository are available, you can [add a new repository location](#). Repository files and folders are presented in a tree view with the repository locations at the first level, where each location represents a connection to a specific repository. More information about each resource is displayed in a tabular form:

- **Date** - Date when the resource was last modified.
- **Revision** - The revision number at the time the resource was last modified.
- **Author** - Name of the person who made the last modification on the resource.
- **Size** - Resource size on disk.
-  **Lock information** - Information about the lock status of a file. When a repository file is locked by a user the  icon is displayed in this column. If no icon is displayed the file is not locked. The tooltip of this column displays the details about the lock:
  - **Owner** - The name of the user who created the lock.
  - **Date** - The date when the user locked the file.
  - **Expires on** - Date when the lock expires. Lock expiry policy is set in the repository options, on the server side.
  - **Comment** - The message attached when the file was locked.
- **Type** - Contains the resource type or file extension.

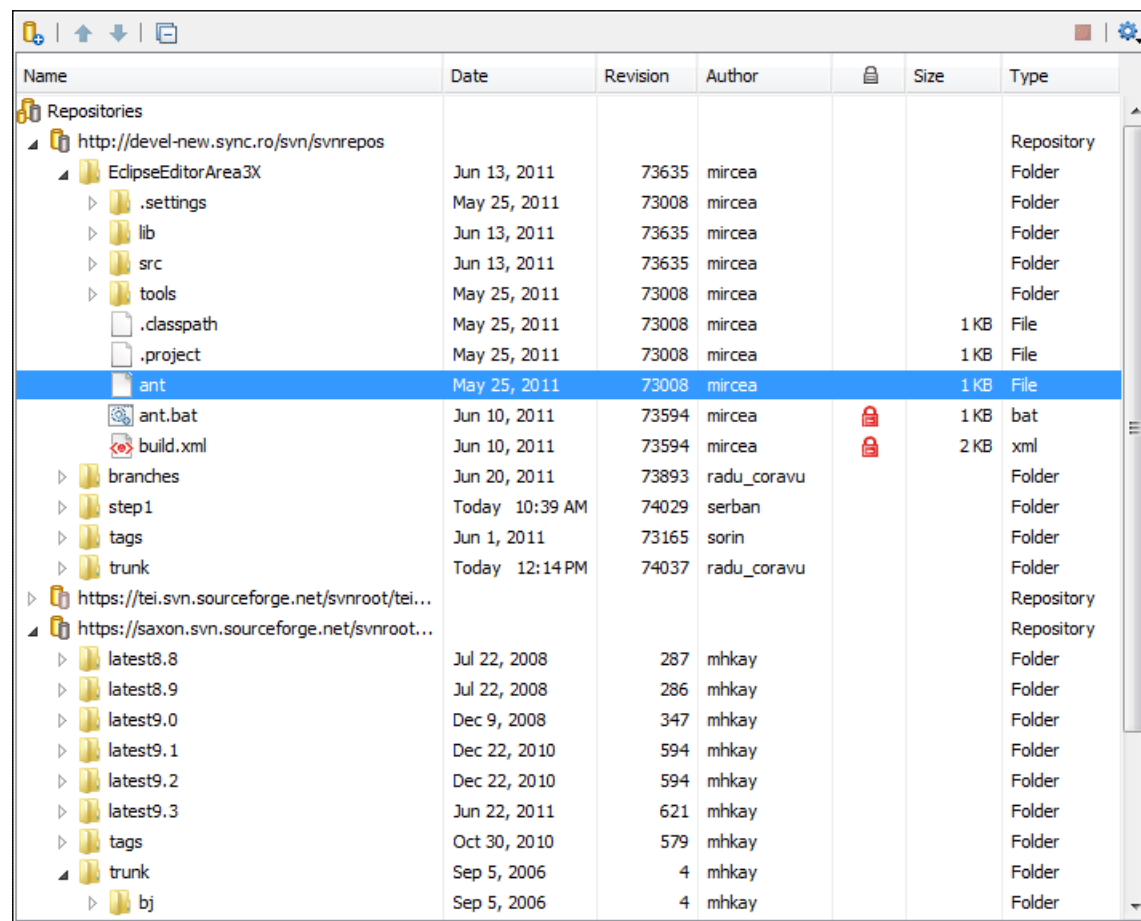

| Name                                           | Date           | Revision | Author      |     | Size | Type       |
|------------------------------------------------|----------------|----------|-------------|---------------------------------------------------------------------------------------|------|------------|
| Repositories                                   |                |          |             |                                                                                       |      |            |
| http://devel-new.sync.ro/svn/svnrepos          |                |          |             |                                                                                       |      | Repository |
| EclipseEditorArea3X                            | Jun 13, 2011   | 73635    | mircea      |                                                                                       |      | Folder     |
| .settings                                      | May 25, 2011   | 73008    | mircea      |                                                                                       |      | Folder     |
| lib                                            | Jun 13, 2011   | 73635    | mircea      |                                                                                       |      | Folder     |
| src                                            | Jun 13, 2011   | 73635    | mircea      |                                                                                       |      | Folder     |
| tools                                          | May 25, 2011   | 73008    | mircea      |                                                                                       |      | Folder     |
| .classpath                                     | May 25, 2011   | 73008    | mircea      |                                                                                       | 1 KB | File       |
| .project                                       | May 25, 2011   | 73008    | mircea      |                                                                                       | 1 KB | File       |
| ant                                            | May 25, 2011   | 73008    | mircea      |                                                                                       | 1 KB | File       |
| ant.bat                                        | Jun 10, 2011   | 73594    | mircea      |  | 1 KB | bat        |
| build.xml                                      | Jun 10, 2011   | 73594    | mircea      |  | 2 KB | xml        |
| branches                                       | Jun 20, 2011   | 73893    | radu_coravu |                                                                                       |      | Folder     |
| step1                                          | Today 10:39 AM | 74029    | serban      |                                                                                       |      | Folder     |
| tags                                           | Jun 1, 2011    | 73165    | sorin       |                                                                                       |      | Folder     |
| trunk                                          | Today 12:14 PM | 74037    | radu_coravu |                                                                                       |      | Folder     |
| https://tei.svn.sourceforge.net/svnroot/tei... |                |          |             |                                                                                       |      | Repository |
| https://saxon.svn.sourceforge.net/svnroot...   |                |          |             |                                                                                       |      | Repository |
| latest8.8                                      | Jul 22, 2008   | 287      | mhkay       |                                                                                       |      | Folder     |
| latest8.9                                      | Jul 22, 2008   | 286      | mhkay       |                                                                                       |      | Folder     |
| latest9.0                                      | Dec 9, 2008    | 347      | mhkay       |                                                                                       |      | Folder     |
| latest9.1                                      | Dec 22, 2010   | 594      | mhkay       |                                                                                       |      | Folder     |
| latest9.2                                      | Dec 22, 2010   | 594      | mhkay       |                                                                                       |      | Folder     |
| latest9.3                                      | Jun 22, 2011   | 621      | mhkay       |                                                                                       |      | Folder     |
| tags                                           | Oct 30, 2010   | 579      | mhkay       |                                                                                       |      | Folder     |
| trunk                                          | Sep 5, 2006    | 4        | mhkay       |                                                                                       |      | Folder     |
| bj                                             | Sep 5, 2006    | 4        | mhkay       |                                                                                       |      | Folder     |

Figure 579: Repositories View

### Toolbar

The **Repositories** view's toolbar contains the following buttons:

-  **New Repository Location** - Allows you to enter a new repository location by means of the **Add SVN Repository** dialog box.
-  **Move Up** - Move the selected repository up one position in the list of repositories in the **Repositories** view.
-  **Move Down** - Move the selected repository down one position in the list of repositories in the **Repositories** view.
-  **Collapse all** - Collapses all repository trees.
-  **Stop** - Stops the current repository browsing operation executed when a repository node is expanded. This is useful when the operation takes too long or the server is not responding.
-  **Settings** - Allows you to configure the resource table appearance.

### Repositories View Contextual Menu Actions

The **Repositories** view contextual menu contains various actions, depending on the selected item. If a repository location is selected, the following management actions are available:

#### **New Repository Location (Ctrl + Alt + N (Command + Alt + N on OS X))**

Displays the **Add SVN Repository** dialog box. This dialog box allows you to define a new repository location.

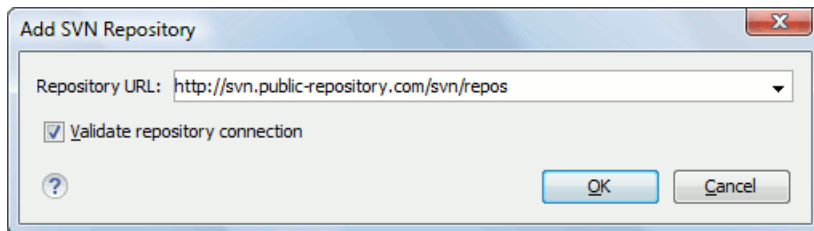


**Figure 580: Add SVN Repository Dialog Box**

If the **Validate repository connection** option is selected, the URL connection is validated before being added to the **Repositories** view.

#### **Edit Repository Location (Ctrl + Alt + E (Command + Alt + E on OS X))**

Context-dependent action that allows you to edit the selected repository location using the **Edit SVN Repository** dialog box. It is active only when a repository location root is selected.

#### **Change the Revision to Browse (Ctrl + Alt + B (Command + Alt + B on OS X))**

Context-dependent action that allows you to change the selected repository revision using the **Change the Revision to Browse** dialog box. It is active only when a repository location root is selected.

#### **Remove Repository Location (Ctrl + Alt + R (Command + Alt + R on OS X))**

Allows you to remove the selected repository location from the view. It shows you a confirmation dialog box before removal. It is active only when a repository location root is selected.

The following actions are common to all repository resources:

#### **Open**

Opens the selected file in the Editor view in read-only mode.

#### **Open with**

Displays the **Open with** dialog box to specify the editor in which the selected file is opened. If multiple files are selected, only external applications can be used to open the files.

#### **Save as**

Saves the selected files locally, as they are in the browsed revision.

#### **Refresh (F5)**

Refreshes the resource selected in the **Repositories** view.

#### **Check out (Ctrl + Alt + O (Command + Alt + O on OS X))**

Allows you to create a working copy from a repository directory, on your local file system. To read more about this operation, see the section [Check out a working copy](#).



## Branch/Tag

Allows you to create a branch or a tag from the selected folder in the repository. To read more about how to create a branch/tag, see the [Creation and management of Branches/Tags](#) section.

## Share project

Allows you to [share a new project](#) using an SVN repository. The local project is automatically converted into an SVN working copy.

## Import:

### Import folder (Ctrl + Shift + L (Command + Shift + L on OS X))

Allows you to import the contents of a specified folder from the file system into the selected folder in a repository. To read more about this operation, see the section [Importing resources into a repository](#).

**Note:** The difference between the **Import folder** and **Share project** actions is that the latter also converts the selected directory into a working copy.

### Import Files (Ctrl + Shift + I (Command + Shift + I on OS X))

Imports the files selected from the files system into the selected folder in the repository.

## Export

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.



### Show History (Ctrl + H (Command + T on OS X))

Displays the history of the selected resource. At the start of the operation, you can set filtering options.



### Show Annotation (Ctrl + Shift + A (Command + Shift + A on OS X))

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.



### Revision Graph (Ctrl + G (Command + G on OS X))

This action allows you to see the graphical representation of a resource history. For more details about a resource revision graph see [Revision Graph](#). This operation is available for any resource selected in the **Repositories** view or **Working Copy** view.

### Copy URL Location (Ctrl + Alt + U (Command + Alt + U on OS X))

Copies to clipboard the URL location of the selected resource.



### Copy to

Copies to a specified location the currently selected resource(s). This action is also available when you browse other revisions than the latest one (*HEAD*), to allow restoring previous versions of an item.

### Move to (Ctrl + M (Command + M on OS X))

Moves to a specified location the currently selected resource(s).

### Rename ((F2))

Renames the selected resource.

### ✗ Delete ((Delete))

Deletes selected items from the repository via an immediate commit.

### New Folder (Ctrl + Shift + F (Command + Shift + F on OS X))

Allows you to create a folder in the selected repository path (available only for folders).

## Locking

The following options are available only for files:



### Lock (Ctrl + K (Command + K on OS X))

Allows you to lock certain files for which you need exclusive access. For more details on the use of this action, see [Locking a file](#).

### **Unlock (Ctrl + Shift + K (Command + Shift + K on OS X))**

Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

### **Show SVN Properties (Ctrl + Shift + P (Command + Shift + P on OS X))**

Brings up the [Properties view](#) displaying the SVN properties for the selected resource. This view does not allow adding, editing, or removing SVN properties of a repository resource. These operations are allowed only for working copy resources.

### **Show SVN Information (Ctrl + I (Command + I on OS X))**

Provides additional information for the selected resource. For more details, go to [Obtain information for a resource](#).

## **Assistant Actions**

When there is no repository configured, the **Repositories** view mode lists the following two actions:

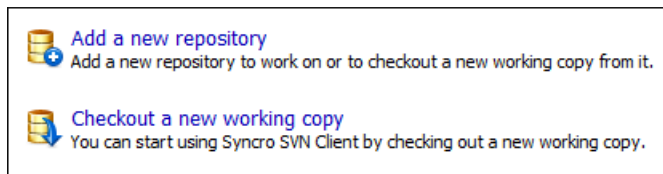


**Figure 581: Repositories View Actions**

## **Drag and Drop Operations**

The structure of the files tree can be changed with drag and drop operations inside the **Repositories** view. These operations behave in the same way with the **Copy to/Move to** operations.

## **Working Copy View**

The **Working Copy** view allows you to manage the content of an SVN working copy. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The toolbar contains the following:

- The list of defined working copies.
- A set of view modes that allow you to filter the content of the working copy based on the resource status (such as incoming or outgoing changes).
- **Settings** menu.

If you click any of the view modes (**All Files**, **Modified**, **Incoming**, **Outgoing**, **Conflicts**), the information displayed changes as follows:

-  **All Files** - Resources (files and folders) are presented in a hierarchical structure with the root of the tree representing the location of the working copy on the file system. Each resource has an icon representation that describes the type of resource and also depicts the state of that resource with a small overlay icon.

| svnkit                                         |  |   |              |          |        |  |  |   |       |                |
|------------------------------------------------|--|---|--------------|----------|--------|--|--|---|-------|----------------|
| All Files Modified Incoming Outgoing Conflicts |  |   |              |          |        |  |  |   |       |                |
| Name                                           |  |   | Date         | Revision | Author |  |  |   | Size  | Type           |
| E:\svnkit                                      |  | ● | May 15, 2011 | 7636     | alex   |  |  |   |       | File Folder    |
| gradle                                         |  |   | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| wrapper                                        |  |   | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| gradle-wrapper.jar                             |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 12 KB | Executable ... |
| gradle-wrapper.properties                      |  | ● | May 4, 2011  | 7623     | alex   |  |  | 🔒 | 1 KB  | PROPERTIE...   |
| svnkit                                         |  | ● | May 15, 2011 | 7636     | alex   |  |  |   |       | File Folder    |
| svnkit-ci                                      |  | ● | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| .settings                                      |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| src                                            |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| main                                           |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| conf                                           |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| java                                           |  |   | May 4, 2011  | 7622     | alex   |  |  |   |       | File Folder    |
| resources                                      |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| scripts                                        |  |   | May 10, 2011 | 7630     | alex   |  |  |   |       | File Folder    |
| jsvn                                           |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 2 KB  | File           |
| jsvn.bat                                       |  | ● | May 10, 2011 | 7630     | alex   |  |  | 🔒 | 2 KB  | Windows B...   |
| jsvnsetup.openvms                              |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 1 KB  | OPENVMS File   |
| build.gradle                                   |  | ● | May 4, 2011  | 7618     | alex   |  |  | 🔒 | 2 KB  | GRADLE File    |
| svnkit-dav                                     |  | ● | May 4, 2011  | 7620     | alex   |  |  | 🔒 |       | File Folder    |
| svnkit-distribution                            |  | ● | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| svnkit-javahl16                                |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| svnkit-osgi                                    |  | ● | May 4, 2011  | 7623     | alex   |  |  |   |       | File Folder    |
| svnkit-test                                    |  | ● | May 12, 2011 | 7635     | alex   |  |  |   |       | File Folder    |
| .settings                                      |  | ● | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |
| configurations                                 |  |   | May 4, 2011  | 7618     | alex   |  |  |   |       | File Folder    |

**Figure 582: Working Copy View - All Files View Mode**

-  **Modified** - The resource tree presents resources modified locally (including those with conflicting content) and remotely. Decorator icons are used to differentiate between various resource states:
  - Incoming modification from repository:
    -  - File content or properties modified remotely.
    -  - New file added remotely.
    -  - File deleted remotely.
  - Outgoing modification to repository:
    -  - File content or properties modified locally.
    -  - New file added locally.
    -  - File deleted locally.
-  **Pseudo-conflict state** - A resource being locally and remotely modified at the same time, or a parent directory of such a resource.
-  **Real conflict state** - A resource that had both incoming and outgoing changes and not all the differences could be merged automatically through the update operation (manually editing the local file is necessary for resolving the conflict).

| UserGuide                                      |  |  |  |  |                |                 |               |        |         |
|------------------------------------------------|--|--|--|--|----------------|-----------------|---------------|--------|---------|
| All Files Modified Incoming Outgoing Conflicts |  |  |  |  |                |                 |               |        |         |
| Name                                           |  |  |  |  | Remote date    | Remote revision | Remote author | Size   | Type    |
| UserGuide                                      |  |  |  |  | Today 11:44 AM | 12368           | sorin         |        | Folder  |
| DITA                                           |  |  |  |  |                |                 |               |        | Folder  |
| img                                            |  |  |  |  |                |                 |               |        | Folder  |
| references                                     |  |  |  |  |                |                 |               |        | Folder  |
| tasks                                          |  |  |  |  |                |                 |               |        | Folder  |
| topics                                         |  |  |  |  |                |                 |               |        | Folder  |
| ignore-resources-working-copy.dita             |  |  |  |  |                |                 |               | 2 KB   | dita    |
| oxygenEntitiesDictionary.dita                  |  |  |  |  | Today 11:44 AM | 12368           | sorin         | 2 KB   | dita    |
| preferences-svn-working-copy.dita              |  |  |  |  |                |                 |               | 4 KB   | dita    |
| properties-view.dita                           |  |  |  |  |                |                 |               | 2 KB   | dita    |
| revert-changes.dita                            |  |  |  |  |                |                 |               | 3 KB   | dita    |
| show-history.dita                              |  |  |  |  |                |                 |               | 1 KB   | dita    |
| svn-main-menu.dita                             |  |  |  |  |                |                 |               | 26 KB  | dita    |
| svn-main-toolbar.dita                          |  |  |  |  |                |                 |               | 3 KB   | dita    |
| svn-toolbar.dita                               |  |  |  |  |                |                 |               | 2 KB   | dita    |
| tree-conflict.dita                             |  |  |  |  |                |                 |               | 1 KB   | dita    |
| update-working-copy.dita                       |  |  |  |  |                |                 |               | 4 KB   | dita    |
| views.dita                                     |  |  |  |  |                |                 |               | 3 KB   | dita    |
| working-copy-menu.dita                         |  |  |  |  |                |                 |               | 20 KB  | dita    |
| working-copy-settings.dita                     |  |  |  |  | Today 11:28 AM | 12366           | sorin         | 2 KB   | dita    |
| working-copy-view.dita                         |  |  |  |  |                |                 |               | 15 KB  | dita    |
| EditorUserManual.ditamap                       |  |  |  |  |                |                 |               | 102 KB | ditamap |
| .project                                       |  |  |  |  |                | 12368           |               | 1 KB   | File    |
| build.xml                                      |  |  |  |  | Nov 17, 2010   | 12337           | sorin         | 14 KB  | xml     |
| build_part.xml                                 |  |  |  |  | Nov 16, 2010   | 12323           | sorin         | 18 KB  | xml     |
| userguide.xpr                                  |  |  |  |  |                |                 |               | 2 MB   | xpr     |

**Figure 583: Working Copy View - Modified View Mode**

-  **Incoming** - The resource tree presents only incoming changes.
-  **Outgoing** - The resource tree presents only outgoing changes.
-  **Conflicts** - The resource tree presents only conflicting changes (real conflicts and pseudo-conflicts).

The following columns provide information about the resources:

- **Name** - Resource name. Resource icons can have the following decorator icons:
  - Additional status information:
    -  **Propagated modification marker** - A folder marked with this icon indicates that the folder itself presents some changes (such as modified properties) or a child resource has been modified.
    -  **External** - This indicates a mapping of a local directory to the URL of a versioned resource. It is declared with a `svn:externals` property in the parent folder and it indicates a working copy not directly related with the parent working copy that defines it.
    -  **Switched** - This indicates a resource that has been switched from the initial repository location to a new location within the same repository. The resource goes to this state as a result of [the Switch action](#) executed from the contextual menu of the Working Copy view.
    -  **Grayed** - A resource with a grayed-out icon, but no overlaid icon, is an ignored resource. It is obtained with the **Add to svn:ignore** action.
  - Current SVN depth of a folder:
    -  **Immediate children (immediates)** (a variant of [sparse checkout](#)) - The directory contains only direct file and folder children. Child folders ignore their content.
    -  **File children only (files)** (a variant of [sparse checkout](#)) - The directory contains only direct file children, disregarding any child folders.

-  **This folder only (empty)** (a variant of [sparse checkout](#)) - The directory discards any child resource.

**Note:**

- Any folder not marked with one of the depth icons, has recursive depth (*infinity*) set by default (presents all levels of child resources).
- Although folders not under version control can have no depth set, Oxygen XML Developer presents *unversioned* and *ignored* folders with *empty* depth when **Show unversioned directories content** or **Show ignored directories content** options are not selected.
-  **Local file status** - Shows the changes of working copy resources that were not committed to the repository yet. The following icons are used to mark resource status:
  -  - Resource is *not under version control* (*unversioned*).
  -  - Resource is being *ignored* because it is not under version control and its name matches a file name pattern defined in one of the following places:
    - *global-ignores* section in the SVN client-side [config file](#).
  -  **Attention:** If you do not explicitly set the *global-ignores* runtime configuration option (either to your preferred set of patterns or to an empty string), Subversion uses the default value.
  - [Application global ignores option](#) of Oxygen XML Developer.
  - The value of a [svn:ignore property](#) set on the parent folder of the resource being ignored.
  -  - Marks a newly created resource, *scheduled for addition* to the version control system.
  -  - Marks a resource *scheduled for addition*, created by copying a resource already under version control and inheriting all its SVN history.
  -  - The content of the resource has been *modified*.
  -  - Resource has been *replaced* in your working copy (the file was scheduled for deletion, and then a new file with the same name was scheduled for addition in its place).
  -  - Resource is *deleted* (scheduled for deletion from **Repository** upon the next commit).
  -  - The resource is *incomplete* (as a result of an interrupted *check out* or *update* operation).
  -  - The resource is *missing* because it was moved or deleted without using an SVN-aware application.
  -  - The contents of the resource is in [real conflict state](#).
  -  - Resource is in a *name conflict* state.
  -  - Resource is in *tree conflict* state after an update operation because:
    - Resource was locally modified and incoming deleted from repository.
    - Resource was locally scheduled for deletion and incoming modified.
  -  - Resource is *obstructed* (versioned as one kind of object: file, directory, or symbolic link, but has been replaced outside Syncro SVN Client by a different kind of object).
-  **Local properties status** - Marks the resources that have SVN properties, with the following possible states:
  -  - The resource has SVN properties set.
  -  - The resource properties have been modified.
  -  - Properties for this resource are in [real conflict](#) with property updates received from the repository.
- **Revision** - The current revision number of the resource.
- **Date** - Date when the resource was last time modified on the disk.
- **BASE Revision** - The revision number of the pristine version of the resource.
- **BASE Date** - Date when the pristine version of the resource was last time committed in the repository.
- **Author** - Name of the person who made the last modification on the pristine version of the resource.
-  **Remote file status** - Shows changes of resources recently modified in the repository. The following icons are used to mark incoming resource status:
  -  - Resource is newly added in repository.
  -  - The content of the resource has been modified in repository.
  -  - Resource was replaced in repository.

-  - Resource was deleted from repository.
-  **Remote properties status** - Resources marked with the  icon have incoming modified properties from the repository.
- **Remote revision** - Revision number of the resource latest committed modification.
- **Remote date** - Date of the resource latest modification committed on the repository.
- **Remote author** - Name of the author who committed the latest modification on the repository.
-  **Lock information** - Shows the lock state of a resource. The lock mechanism is a convention intended to help you signal other users that you are working with a particular set of files. It minimizes the time and effort wasted in solving possible conflicts generated by clashing commits. A lock gives you exclusive rights over a file, only if other users follow this convention and they do not try to bypass the lock state of a file.

A folder can be locked only by the SVN client application, completely transparent to the user, if an operation in progress was interrupted unexpectedly. As a result, folders affected by the operation are marked with the  symbol. To clear the locked state of a folder, use the **Clean up** action.

**Note:** Users can lock only files.

The following lock states are displayed:

- *no lock* - the file is not locked. This is the default state of a file in the SVN repository.
- *remotely locked* (  ) - shown when:
  - Another user has locked the file in the repository.
  - The file was locked by the same user from another working copy.
  - The file was locked from the **Repositories** view.

If you try to commit a new revision of the file to the repository, the server does not allow you to bypass the file lock.

**Note:** To commit a new revision, you need to wait for the file to be unlocked. Ultimately, you might try to *break* or *steal* the lock, but this is not what other users expect. Use these actions carefully, especially when you are not the file lock owner.

- *locked* (  ) - displayed after you have locked a file from the current working copy. Now you have exclusive rights over the corresponding file, being the only one who can commit changes to the file in the repository.

**Note:** Working copies keep track of their locked files, so the locks are presented between different sessions of the application. Synchronize your working copy with the repository to make sure that the locks are still valid (not *stolen* or *broken*).

- *stolen* (  ) - a file already locked from your working copy is being locked by another user. Now the owner of the file lock is the user who stole the lock from you.
- *broken* (  ) - a file already locked from your working copy is no longer locked in the repository (it was unlocked by another user).

**Note:** To remove the *stolen* or *broken* states from your working copy files, you have to **Update** them.

If one of your working copy files is locked, hover the mouse pointer over the lock icon to see more information:

- Lock type - current file lock state
- Owner - the name of the user who created the lock
- Date - the date when the user locked the file
- Expires on - date when the lock expires. Lock expiry policy is set in the repository options, on the server side
- Comment - the message attached when the file was locked
- **Size** - Resource size on disk
- **Type** - Contains the resource type or file extension

**Note:** The working copy table allows you to show or hide any of its columns and also to sort its contents by any of the displayed columns. The table header provides a contextual menu that allows you to customize the displayed information.

The toolbar contains the following options for switching to a different working copy:

- **List of Defined Working Copies** - A drop-down menu that contains all the working copies Oxygen XML Developer is aware of. When you select a different working copy from the list, the newly selected working copy content is scanned and displayed in the **Working Copy** view.
-  **Working Copies Manager** ( on Mac OS X) - Opens a dialog box that displays the working copies Oxygen XML Developer is aware of. In this dialog box, you can add existing working copies or remove those you no longer need. If you try to add a folder that is not a valid Subversion working copy, Oxygen XML Developer warns you that the selected directory is not under version control.

**Note:** Removing a working copy from this dialog box does NOT remove it from your file system; you will have to do that manually.

## Working Copy Settings

The **Settings** button from the toolbar of the **Working Copy** view provides the following options:

- **Show unversioned directories content** - Displays the content of unversioned directories.

**Note:** If this option is not selected, it will be ignored for items that, after a synchronize, are reported as incoming from the repository. This applies for all working copy modes, except **All Files**.

- **Show ignored items** - Displays the ignored resource when **All Files** mode is selected.
- **Show ignored directories content** - Displays the content of ignored directories when **All Files** mode is selected.

**Note:** Although *ignored* items are not presented in the **Modified**, **Incoming**, and **Conflicts** modes, they will be if, after a synchronize, they are reported as incoming from the repository.

- **Show deleted items** - Displays the deleted resource when **All Files** mode is selected. All other modes always display deleted resources, disregarding this option.
-  **Tree** /  **Compressed** /  **Flat** - Affect the way information is displayed inside the **Modified**, **Incoming**, **Outgoing**, and **Conflicts** view modes.
- **Configure columns** - Allows you to customize the structure of the **Working Copy** view data. This action opens the following dialog box:

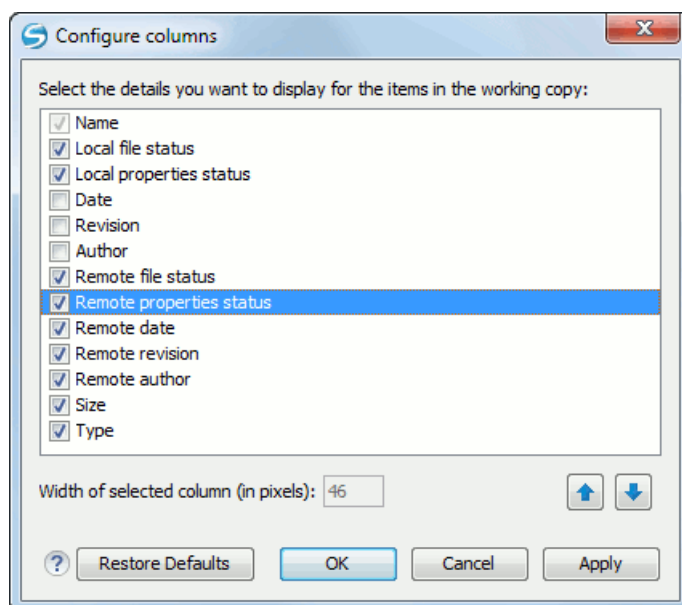


**Figure 584: Configure Columns of Working Copy View**

The order of the columns can be changed with the two arrow buttons. The column size can be edited in the **Width of selected column** field. The **Restore Defaults** button reverts all columns to the default order, width, and enabled/disabled state from the installation of the application.

## Working Copy Format

When an SVN working copy is loaded, Syncro SVN Client first checks the format of the working copy:



- If the format is older than SVN 1.7, you are prompted to upgrade it to SVN 1.8 to load it.
- If the format is 1.7, Syncro SVN Client takes into account the state of the [When loading an old format working copy option](#).

To change how working copy formats are handled, [open the Preferences dialog box \(Options > Preferences\)](#), go to **SVN > Working copy**, and configure the options in the [Administrative area](#) section.

**Note:**

- The format of the working copy can be downgraded or upgraded at any time with the **Upgrade** and **Downgrade** actions available in the **Tools** menu. These actions allow switching between SVN 1.7 and SVN 1.8 working copy formats.
- SVN 1.7 working copies cannot be downgraded to older formats.

### Refresh a Working Copy

A refresh is a frequent operation triggered automatically when you switch between two working copies using the toolbar selector of the **Working Copy** view and when you switch between Oxygen XML Developer and other applications.

The **Working Copy** view features a fast refresh mechanism: the content is cached locally when loading the working copy for the first time. Later on, when the same working copy is displayed again, the application uses this cache to detect the changes between the cached content and the current content found on disk. The refresh operation is run on these changes only, thus improving the response time. Improvement is noticeable especially when working with large working copies.

### Working Copy View Contextual Menu Actions

The contextual menu in the **Working Copy** view contains the following actions:

#### **Edit conflict (Ctrl (Command on OS X) + E)**

Opens the **Compare** editor, allowing you to modify the content of the currently conflicting resources. For more information about editing conflicts, see [Edit conflicts](#).

#### **Open in Compare Editor (Ctrl (Command on OS X) + Alt + C)**

Displays changes made in the currently selected file.

#### **Open (Ctrl (Command on OS X) + O)**

Opens the selected resource from the working copy. Files are opened with an internal editor or an external application associated with that file type, while folders are opened with the default file system browsing application (Windows Explorer on Windows, Finder on OS X, etc).

#### **Open with...**

Submenu that allows you to open the selected resource either with Oxygen XML Developer or with another application.

#### **Show in Explorer/Show in Finder**

Opens the parent directory of the selected working copy file and selects the file.

#### **Expand All (Ctrl (Command on OS X) + Alt + X)**

Displays all descendants of the selected folder. The same behavior is obtained by double-clicking a collapsed folder.

#### **Refresh (F5)**

Re-scans the selected resources recursively and refreshes their status in the working copy view.

#### **Synchronize (Ctrl (Command on OS X) + Shift + S)**

Connects to the repository and determines the working copy and repository changes made to the selected resources. The application switches to **Modified** view mode if the [Always switch to 'Modified' mode option](#) is selected.

#### **Update (Ctrl (Command on OS X) + U)**

Updates the selected resources to the **HEAD** revision (latest modifications) from the repository. If the selection contains a directory, it will be updated depending on its depth.



## Update to revision/depth

Allows you to update the selected resources from the working copy to an earlier revision from the repository. You can also select the update *depth* for the current folder. You can find out more about the *depth* term in the [sparse checkouts](#) section.

## Commit

Collects the outgoing changes from the selected resources in the working copy and allows you to choose exactly what resources to commit. A directory will always be committed recursively. Unversioned resources will be deselected by default. In the **Commit** dialog box you can also enter a comment before sending your changes to the repository.

## Revert (Ctrl (Command on OS X) + Shift + V)

Undoes all local changes for the selected resources. It does not contact the repository and the files are obtained from Apache Subversion™ pristine copy. It is available only for modified resources. See [Revert your changes](#) for more information.

## Override and Update

Drops any outgoing change and replaces the local resource with the HEAD revision. This action is available on resources with outgoing changes, including conflicting ones. See the [Revert your changes](#) section.

## Override and Commit

Drops any incoming changes and sends your local version of the resource to the repository. This action is available on conflicting resources. For more information see [Drop incoming modifications](#).

## ✓ Mark Resolved (Ctrl (Command on OS X) + Shift + R)

Instructs the Subversion system that you resolved a conflicting resource. For more information, see [Merge conflicts](#).

## ✓ Mark as Merged (Ctrl (Command on OS X) + Shift + M)

Instructs the Subversion system that you resolved the pseudo-conflict by merging the changes and you want to commit the resource. Read the [Merge conflicts](#) section for more information about how you can solve the pseudo-conflicts.

## Create patch (Ctrl (Command on OS X) + Alt + P)

Allows you to create a file containing all the differences between two resources, based on the `svn diff` command. To read more about creating patches, see [the section about patches](#).

## Compare with:

- **Latest from HEAD (Ctrl (Command on OS X) + Alt + H)** - Performs a 3-way diff operation between the selected file and the *HEAD* revision from the repository and displays the result in the **Compare view**. The common ancestor of the 3-way diff operation is the *BASE* version of the file from the local working copy.
- **BASE revision (Ctrl (Command on OS X) + Alt + C)** - Compares the working copy file with the *BASE* revision file (the so-called *pristine copy*).
- **Revision (Ctrl (Command on OS X) + Alt + R)** - Displays the **History view** that contains the log history of that resource.
- **Branch/Tag** - Opens the **Compare with Branch/Tag** dialog box that allows you to specify [another file from the repository](#) (**To URL** field) to compare with the working copy file. You can specify the revision of the repository file by choosing between **HEAD revision** or specific **Other revision**.

**Tip:** To compare with a file that was deleted, moved, or replaced, you need to specify the original URL (before the file was removed) and use a [peg revision](#) at the end (for example, URL@rev1234).

- **Each other** - Compares two selected files with each other.

These *compare* actions are available only if the selected resource is a file.

## Replace with:

- **Latest from HEAD** - Replaces the selected resources with their versions from the *HEAD* revision of the repository.
- **BASE revision** - Replace the selected resources with their versions from the pristine copy (the *BASE* revision).

**Note:** In some cases it is impossible to replace the currently selected resources with their versions from the *BASE/HEAD* revision:

- For the **Replace with BASE revision** action, the resources being unversioned or added have no *BASE* revision, and thus cannot be replaced. However, they will be deleted if the action is invoked on a parent folder. The action will never work for missing folders or for obstructing files (folders being obstructed by a file), since you cannot recover a tree of folders
- For the **Replace with latest from HEAD** action, you must be aware that there are cases when resources will be completely deleted or reverted to the *BASE* revision and then updated to a *HEAD* revision to avoid conflicts. These cases are:
  - The resource is *unversioned*, *added*, *obstructed*, or *modified*.
  - The resource is affected by a `svn:ignore` or `svn:externals` property that is locally added on the parent folder and not yet committed to the repository.

### **Show History (Ctrl (Command on OS X) + H)**

Displays the **History view** where the log history for the selected resource will be presented. For more details about resource history, see the sections about [the resource history view](#) and [requesting the history for a resource](#).

### **Show Annotation (Ctrl + Shift + A (Command + Shift + A on OS X))**

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.

### **Revision Graph (Ctrl (Command on OS X) + G)**

This action allows you to see the graphical representation history of a resource. For more details about the revision graph of resources, see [Revision Graph](#).

### **Copy URL Location (Ctrl (Command on OS X) + Alt + U)**

Copies the encoded URL of the selected resource from the Working Copy to the clipboard.

### **Mark as copied**

You can use this action to mark an item from the working copy as a copy of an other item under *version control*, when the copy operation was performed outside of an SVN client. The **Mark as copied** action is available when you select two items (both the new item and source item), and it depends on the state of the source item.

### **Mark as moved**

You can use this action to mark an item from the working copy as being moved from another location of the working copy, when the move operation was performed outside of an SVN client. The **Mark as moved** action is available when you select two items from different locations (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

### **Mark as renamed**

You can use this action to mark an item from the working copy as being renamed outside of an SVN client. The **Mark as renamed** action is available when you select two items from the same directory (both the new item and the source item that is usually reported as *missing*), and it depends on the state of the source item.

### **Copy to**

Copies the currently selected resource to a specified location.

### **Move to Ctrl + M (Command + M on OS X)**

Moves the currently selected resource to a specified location.

### **Rename (F2)**

As with the move command, a copy of the original resource will be made with the new name and the original will be marked as deleted. Note that you can only rename one resource at a time.

### **Delete (Delete)**

Schedules selected items for deletion upon the next commit and removes them from the disk. Depending on the state of each item, you are prompted to confirm the operation.

## New:

-  **New File** - Creates a new file inside the selected folder. The newly created file will be added under version control only if the parent folder is already versioned.
- **New Folder (Ctrl (Command on OS X)+ Shift + F)** - Creates a child folder inside the selected folder. The newly created folder will be added under version control only if its parent is already versioned.
- **New External Folder (Ctrl (Command on OS X) + Shift + W)** - This operation allows you to add a new external definition on the selected folder. An external definition is a mapping of a local directory to a [URL of a versioned directory](#), and ideally a particular revision, stored in the `svn:externals` property of the selected folder.

**Tip:** You can specify a particular revision of the external item by using a [peg revision](#) at the end of the URL (for example, `URL@rev1234`). You can also use peg revisions to access external items that were deleted, moved, or replaced.

The URL used in the external definition format can be relative. You can specify the repository URL that the external folder points to by using one of the following relative formats:

- `../` - Relative to the URL of the directory that the `svn:externals` property is set.
- `^/` - Relative to the root of the repository in which the `svn:externals` property is versioned.
- `//` - Relative to the scheme of the URL of the directory that the `svn:externals` property is set.
- `/` - Relative to the root URL of the server in which the `svn:externals` property is versioned.

**Important:** To change the target URL of an external definition, or to delete an external item, do the following:

1. Modify or delete the item definition found in the `svn:externals` property that is set on the parent folder.
2. For the change to take effect, use the **Update** operation on the parent folder of the external item.

**Note:** Syncro SVN Client does not support definitions of local relative external items.

## Add to "svn:ignore" (Ctrl (Command on OS X) + Alt + I)

Allows you to add files that should not participate in the *version control* operations inside your working copy. This action can only be performed on resources not under *version control*. It actually modifies the value of the `svn:ignore` property in the parent directory of the resource. Read more about this in the [Ignore Resources Not Under Version Control](#) section.

## Add to version control (Ctrl (Command on OS X) + Alt + V)

Allows you to add resources that are not under *version control*. For further details, see [Add Resources to Version Control](#) section.

## Remove from version control

Schedules selected items for deletion from repository upon the next commit. The items are not removed from the file system after committing.

## Clean up (Ctrl (Command on OS X) + Shift + C)

Performs a maintenance cleanup operation on the selected resources from the working copy. This operation removes the Subversion maintenance locks that were left behind. This is useful when you already know where the problem originated and want to fix it as quickly as possible. It is only active for resources under *version control*.

## Locking:

- **Scan for locks (Ctrl (Command on OS X) + L)** - Contacts the repository and recursively obtains the list of locks for the selected resources. A dialog box containing the locked files and the lock description will be displayed. This is only active for resources under *version control*. For more details see [Scanning for locks](#).
-  **Lock (Ctrl (Command on OS X) + K)** - Allows you to lock certain files that need exclusive access. You can write a comment describing the reason for the lock and you can also force (*steal*) the lock. This action is active only on files under *version control*. For more details on the use of this action see [Locking a file](#).

-  **Unlock (Ctrl (Command on OS X) + Alt + K)** - Releases the exclusive access to a file from the repository. You can also choose to unlock it by force (*break the lock*).

#### **Show SVN Properties (Ctrl + P (Command + P on OS X))**

Brings up the [Properties view](#) and displays the SVN properties for the selected resource.

#### **Show SVN Information (Ctrl + I (Command + I on OS X))**

Provides additional information for the selected resource from the working copy. For more details, go to [Obtain information for a resource](#).

### Drag and Drop Operations

The structure of the files tree can be changed with drag and drop operations inside the **Working Copy** view. These operations behave in the same way with the **Copy to/Move to** operations.

Also, files and folders can be added to the file tree of the view as *unversioned* resources by drag and drop operations from other applications (for example, from Windows Explorer or Mac OS X Finder). In this case, the items from the file system are only copied, without removing them from their original location.

-  **Attention:** When you drag items from the working copy to a different application, the performed operation is controlled by that application. This means that the moved items are left as *missing* in the working copy (items are moved in the file system only, but no SVN versioning meta-data is changed).

### Assistant Actions

To ensure a continuous and productive work flow, when a view mode has no files to present, it offers a set of guiding actions with some possible paths to follow.

Initially, when there is no working copy configured the **All Files** view mode lists the following two actions:

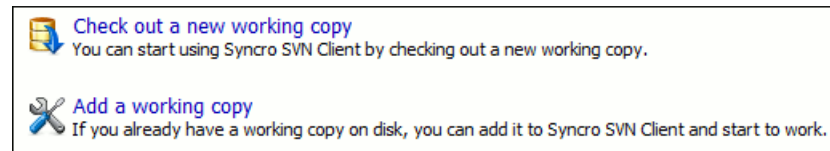


**Figure 585: All Files Panel**

For **Modified**, **Incoming**, **Outgoing**, **Conflicts** view modes, the following actions may be available, depending on the current working copy state in various contexts:

-  **Synchronize with Repository** - Available only when there is nothing to present in the **Modified** and **Incoming** view modes.
-  **Switch to Incoming** - Selects the **Incoming** view mode.
-  **Switch to Outgoing** - Selects the **Outgoing** view mode.
-  **Switch to Conflicts** - Selects the **Conflicts** view mode.
-  **Show all changes/incoming/outgoing/conflicts** - Depending on the currently selected view mode, this action presents the corresponding resources after a synchronize operation was executed only on a part of the working copy resources.
-  **(Information message)** - Informs you why there are no resources presented in the currently selected view mode.

### History View

In Apache Subversion™, both files and directories are versioned and have a history. If you want to examine the history for a selected resource and find out what happened at a certain revision you can use the **History view** that can be accessed from [Repositories view](#), [Working Copy view](#), [Revision Graph](#), or [Directory Change Set view](#). From

the **Working copy view** you can display the history of local versioned resources. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

The view consists of four distinct areas:

- The table showing details about each revision, such as revision number, commit date and time, number of changes (more details available in the tooltip), author's name, and a fragment of the commit message.

Some revisions may be highlighted to emphasize:

- The current revision of the resource for which the history is displayed - a bold font revision.
- The last revision in which the content or properties of the resource were modified - blue font revision.

**Note:** Both font highlights may be applied for the same revision.

- The complete commit message for the selected revision.
- A tree structure showing the folders where the modified resources are located. You can compress this structure to a more compact form that focuses on the folders that contain the actual modifications.
- The list of resources modified in the selected revision. For each resource, the type of action done against it is marked with one of the following symbols:
  - - A newly created resource.
  - - A newly created resource, copied from another repository location.
  - - The content/properties of the resource were *modified*.
  - - Resource was *replaced* in the repository.
  - - Resource was deleted from the repository.

| Revision                         | Date                       | Changes  | Author       | Message                                     |
|----------------------------------|----------------------------|----------|--------------|---------------------------------------------|
| <b>Today (1 revision)</b>        |                            |          |              |                                             |
| 16572                            | 2011-11-30 16:15:29        | 1        | mihai        | oXygen-users meetup                         |
| <b>Last week (1 revision)</b>    |                            |          |              |                                             |
| 16476                            | 2011-11-22 09:22:33        | 1        | mihai        | oXygen-user-meetup                          |
| <b>Last month (35 revisions)</b> |                            |          |              |                                             |
| <b>16309</b>                     | <b>2011-10-26 16:01:09</b> | <b>1</b> | <b>sorin</b> | <b>Fixed DocumentationTest.</b>             |
| 16246                            | 2011-10-25 10:32:58        | 1        | bogdan       | Reviewed.                                   |
| 16245                            | 2011-10-24 17:39:51        | 1        | mihaela      | Small corrections                           |
| 16244                            | 2011-10-24 17:32:24        | 1        | george       | More updates on new features.               |
| 16243                            | 2011-10-24 17:21:46        | 1        | george       | More updates on new features.               |
| 16242                            | 2011-10-24 17:08:52        | 1        | george       | Update Saxon, move components section last. |
| 16241                            | 2011-10-24 17:02:52        | 1        | george       | Just formatting.                            |
| 16240                            | 2011-10-24 17:01:39        | 1        | george       | More changes on the new features.           |
| 16239                            | 2011-10-24 16:45:35        | 1        | sorin        | Fixed broken links.                         |

| Action | Name     | Path                         | Copied from |
|--------|----------|------------------------------|-------------|
|        | site.xml | /www.oxygenxml.com/trunk/xml |             |

**Figure 586: History View**

You can group revisions in predefined time frames (today, yesterday, this week, this month), by pressing the **Group by date** button from the toolbar.

### History Filter Dialog Box

The **History view** does not always show all the changes ever made to a resource because there may be thousands of changes and retrieving the entire list can take a long time. Normally you are interested in the more

recent ones. That is why you can specify the criteria for the revisions displayed in the **History view** by selecting one of several options presented in the **History** dialog box that is displayed when you invoke the **Show History** action.

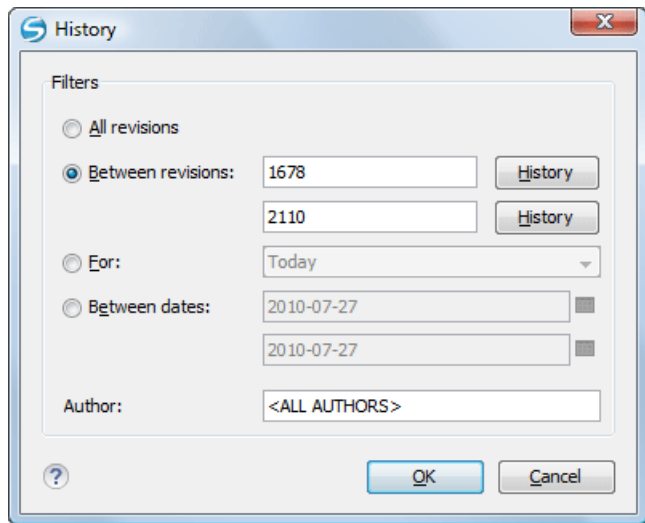


**Figure 587: History Filters Dialog Box**

Options for the set of revisions presented in the History view are:

- All revisions of the selected resource.
- Only revisions between a start revision number and an end revision number.
- Only revisions added in a period of time (such as today, last week, last month, etc.)
- Only revisions between a start and an end date.
- Only revisions committed by a specified SVN user.

The toolbar of the **History view** has two buttons for extending the set of revisions presented in the view: **Get next 50** and **Get all**.

### History Filter Field

When only the history entries that contain a specified substring need to be displayed in the **History view**, the filter field displayed at the top of this view is a useful tool. Just enter the search string in the field next to the **Find** label. Only the items (with an author name, commit message, revision number, or date) that match the search string are kept in the **History view**. When you press the  **Search** button, the filter action is executed and the content of the table is updated.

### History View Contextual Menu Actions

The **History view** contains the following contextual menu actions:

#### Compare with working copy

Compares the selected revision with your working copy file. It is available only when you select a file.

#### Open

Opens the selected revision of the file into the Editor. This is available only for files.

#### Open with

Displays the **Open with** dialog box to specify the editor in which the selected file will be opened.

#### Get Contents

Replaces the current version from the working copy with the contents of the selected revision from the history of the file. The *BASE* version of the file is not changed in the working copy so that after this action the file will appear as modified in a synchronization operation, that is newer than the *BASE* version, even if the contents is from an older version from history.



### Save as

Allows you to save the contents of a file as it was committed at a certain revision. This option is available only when you access the history of a file.

### Copy to

Copies to the repository the item whose history is displayed, using the selected revision. This option is active only when presenting the history for a repository item (URL).

**Note:** This action can be used to resurrect deleted items also.

### Revert changes from this revision

Reverts changes that were made in the selected revisions. The changes are reverted only in your working copy and does not affect the repository items. It does not replace your working copy items with those from the selected revisions. This action is available when the resource history was launched for a local working copy resource.

**Note:** For items displayed in the **Affected Paths** section that were *added*, *deleted*, or *replaced*, this action has no effect because such changes are considered to be changes to the parent directory. To revert these type of changes, follow these steps:

1. Request the history for the parent directory.
2. Identify the revision that contains the changes you want to revert.
3. Invoke the action on that revision.



**Warning:** There are instances where the SVN Client is not able to identify the corresponding working copy item for the selected item in the **Affected Paths** section. In this case, the action does not proceed and an error message is displayed. For example, the selected item in the **Affected Paths** section is from a different repository location than the working copy item for which the history is displayed.

### Update to revision

Updates your working copy resource to the selected revision. This is useful if you want your working copy to reflect a time in the past. It is best to update a whole directory in your working copy, not just one file. Otherwise, your working copy is inconsistent and you are unable to commit your changes.

### Check out

Checks out a new working copy of the directory for which the history is presented, from the selected revision.

### Export

Opens the [Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

### Show Annotation (Ctrl + Shift + A (Command + Shift + A on OS X))

Opens the **Show Annotation** dialog box that computes [the annotations for a file and displays them in the Annotations view](#), along with the history of the file in the **History** view.

### Change

Allows you to change commit data for a file:

- *Author* - Changes the name of the SVN user that committed the selected revision.
- *Message* - Changes the commit message of the selected revision.

When two resources are selected in the **History** view, the contextual menu contains the following actions:

### Compare revisions

When the resource is a file, the action compares the two selected revisions using the **Compare** view. When the resource is a folder, the action displays the set of all resources from that folder that were changed between the two revision numbers.

### Revert changes from these revisions

Similar to the `svn merge` command, it merges two selected revisions into the working copy resource. This action is only available when the resource history was requested for a working copy item.

For more information about the **History view** and its features, see the [Request history for a resource](#) and [Using the resource history view](#) sections.

## Directory Change Set View

The result of comparing two reference revisions from the history of a folder resource is a set with all the resources changed between the two revision numbers. The changed resources can be contained in the folder or in a subfolder of that folder. These resources are presented in a tree format. For each changed resource all the revisions committed between the two reference revision numbers are presented.

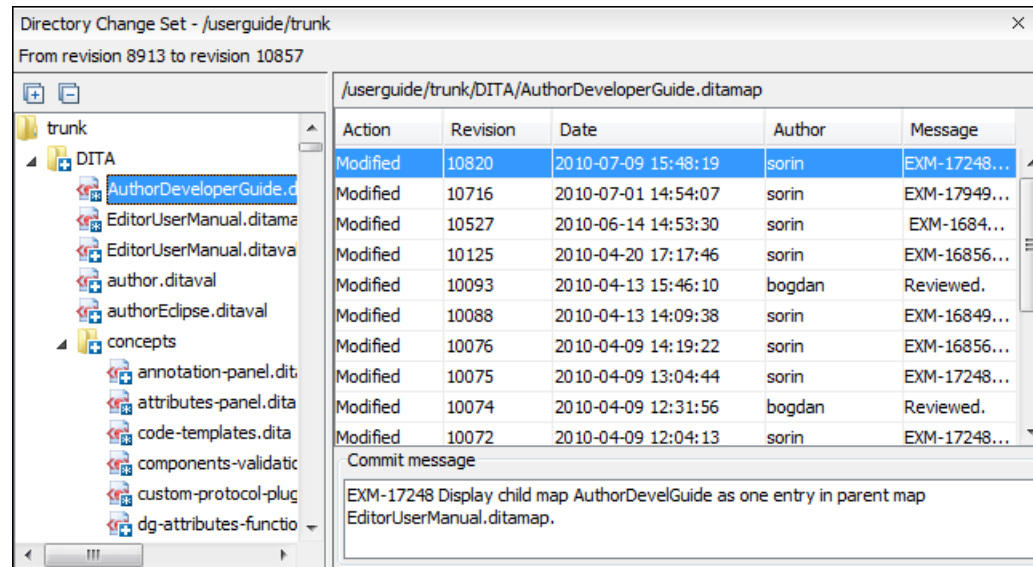


**Figure 588: Directory Change Set View**

The set of changed resources displayed in the tree is obtained by running the action **Compare revisions** available on the contextual menu of the **History view** when two revisions of a folder resource are selected in the **History view**.

The left side panel of the view contains the tree hierarchy with the names of all the changed resources between the two reference revision numbers. The right side panel presents the list with all the revisions of the resource selected in the left side tree. These revisions were committed between the two reference revision numbers. Selecting one revision in the list displays the commit message of that revision in the bottom area of the right side panel.

Double-clicking a file listed in the left-side tree performs a diff operation between the two revisions of the file corresponding to the two reference revisions. Double-clicking one of the revisions displayed in the right side list of the view performs a diff operation between that revision and the previous one of the same file.

The contextual menu of the right side list contains the following actions:

### Compare with previous version

Performs a diff operation between the selected revision in the list and the previous one.

### Open

Opens the selected revision in the associated editor type.

### Open with

Displays a dialog box with the available editor types and allows you to select the editor type for opening the selected revision.

### Save as

Saves the selected file as it was in the selected revision.

### Copy to

Copies to the repository the item whose history is displayed, using the selected revision.

**Note:** This action can be used to resurrect deleted items also.



## Check out

Checks out a new working copy of the selected directory, from the selected revision.

## Export

Opens the **Export** dialog box that allows you to configure options for exporting a folder from the repository to the local file system.

## Show Annotation (Ctrl + Shift + A (Command + Shift + A on OS X))

Opens the **Show Annotation** dialog box that computes the annotations for a file and displays them in the **Annotations** view, along with the history of the file in the **History** view.

## Show SVN Information (Ctrl (Command on OS X) + I)

Provides additional information for a selected resource. For more details, go to [Obtain information for a resource](#).

## Editor Panel of SVN Client

You can open a file for editing in an internal built-in editor. There are default associations between frequently used file types and the internal editors in [the File Types preferences panel](#).

The internal editor can be accessed either from the [Working copy view](#) or from the [History view](#). No actions that modify the content are allowed when the editor is opened with a revision from history.

Only one file at a time can be edited in an internal editor. If you try to open another file it will be opened in the same editor window. The editor provides syntax highlighting for known file types. This means that a different color will be used for each recognized token type found in the file. If the file's content type is unknown you will be prompted to choose the proper way the file should be opened.

After editing the content of the file in an internal editor you can save it to disk by using the **Save** action from the **File** menu or the **Ctrl + S (Command + S on OS X)** key shortcut. After saving your file you can see the file changed status in [the Working Copy view](#).

If the internal editor associated with a file type is not the XML Editor, then the encoding set in [the preferences for Encoding for non XML files](#) is used for opening and saving a file of that type. This is necessary because in the case of XML files, the encoding is usually declared at the beginning of the XML file in a special declaration or it assumes the default value UTF-8, but in the case of non-XML files, there is no standard mechanism for declaring the encoding for the file.

## Annotations View

Sometimes you need to know not only what was changed in a file, but also who made those changes. The **Annotations** view displays the revision and the author that changed every line in a file. The annotations of a file are computed and this view is opened with the  **Show Annotation** action, which is available in the **History** menu, and from the contextual menu of the following views: [the Repositories view](#), [Working copy view](#), [History view](#), and [Directory Change Set view](#)..

This action opens a dialog box that allows you to configure some options for showing the annotations.

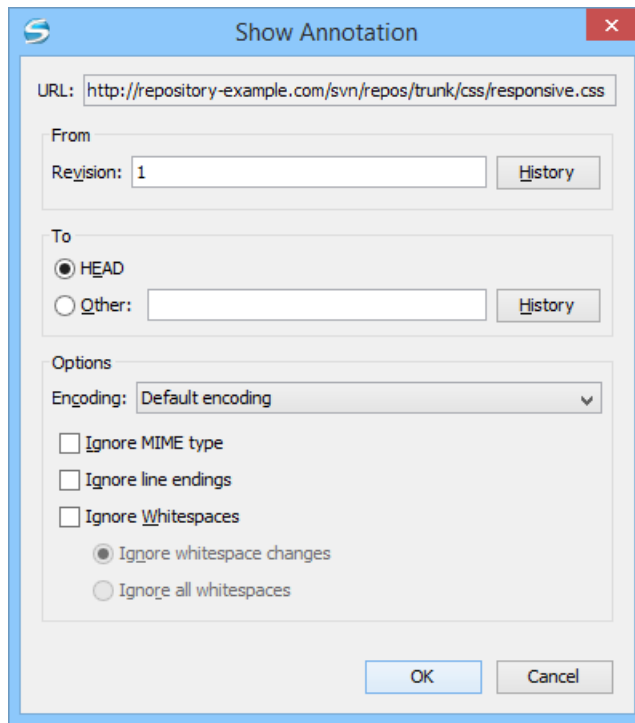


**Figure 589: Show Annotation Options Dialog Box**

Once you have configured the options and click **OK**, the **Annotations** view is displayed (by default, on the right side of the application). You can click a line in the editor panel where the file is opened to see the revision in which the line was last modified. The same revision is highlighted in the **History view** and you can also see all the lines that were changed in the same revision highlighted in the editor panel. Also, the entries of the **Annotations view** corresponding to that revision are highlighted. Therefore, the **Annotations view**, **History view**, and annotations editor panel are all synchronized. Clicking a line in one of them highlights the corresponding lines in the other two.

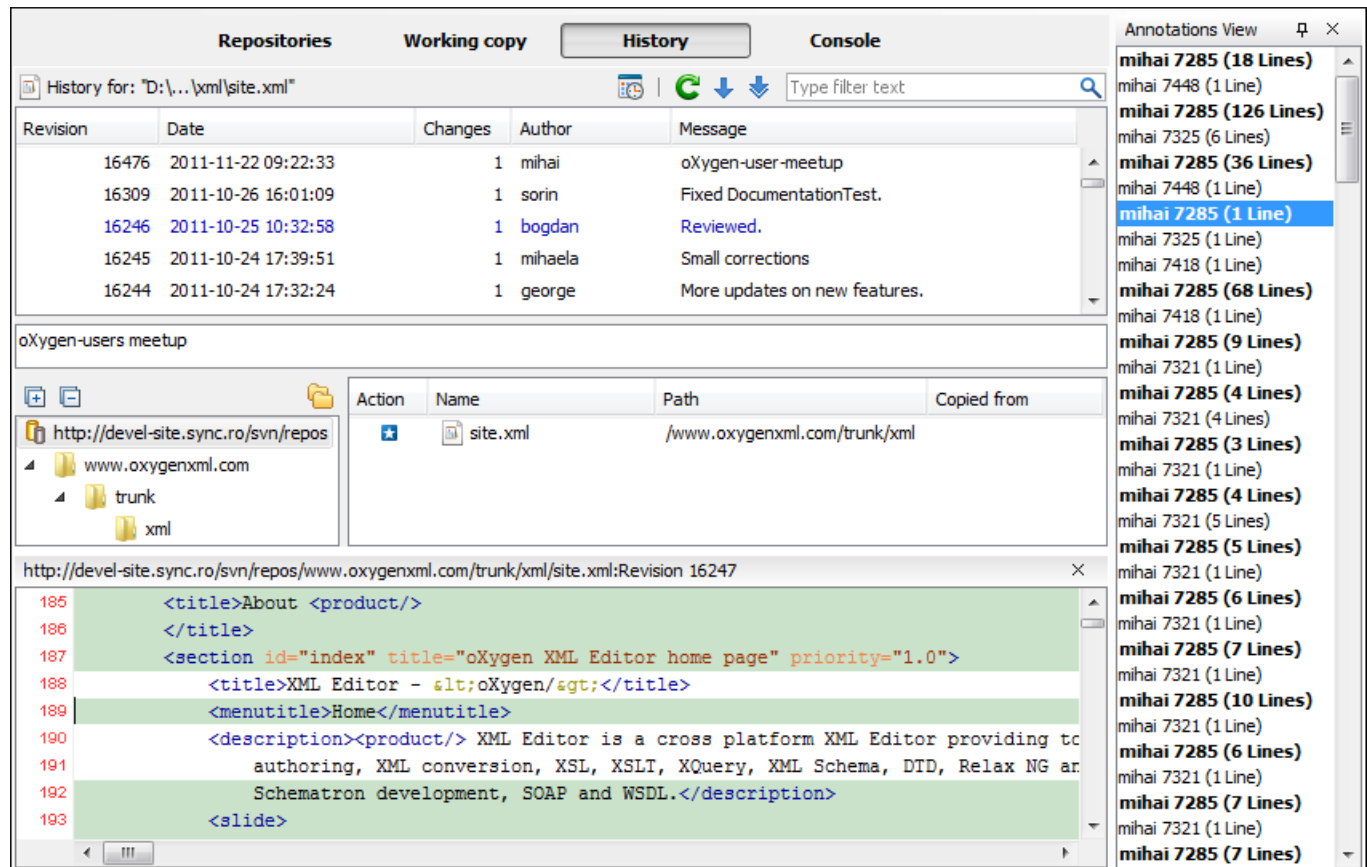


**Figure 590: Annotations View**

The following options can be configured in the **Show Annotation** dialog box:

#### From Revision Section

Select the revision from which to start computing the annotation. If you press the **History** button, the **History dialog box** is displayed, which allows you to select a revision.

#### To Revision Section

Select the ending revision by choosing between the **HEAD** revision or specify it in the **Other** text box. If you press the **History** button, the **History dialog box** is displayed, which allows you to select a revision.

#### Encoding

Select the encoding to be used when the annotation is computed. For each line of text, the SVN Client looks through the history of the file to be annotated see when it was last modified, and by whom. It is required that it is in the form of a text file. Therefore, encoding is needed to properly decode and read the file content. By default, the encoding of the operating system is used.

#### Ignore MIME type

If selected, the file is treated as a text file and ignores what the SVN system infers from the `svn:mime-type` property.

#### Ignore line endings

If selected, the differences in line endings are ignored when the annotation is computed.

#### Ignore whitespaces

If selected, it allows you to specify how the whitespace changes should be handled. When selected, you can then choose between two options:

- **Ignore whitespace changes** - Ignores changes in the amount of whitespaces or to their type (for example, when changing the indentation or changing tabs to spaces).

**Note:** Whitespaces that were added where there were none before, or that were removed, are still considered to be changes.

- **Ignore all whitespaces** - Ignores all types of whitespace changes.

**Tip:** Selecting any of these *ignore* options can help you better determine the last time a meaningful change was made to a given line of text.

After you configure the options and press **OK**, the annotations will be computed and the **Annotations** view is displayed, where all the users that modified the selected resource will be presented, along with the specific lines and revision numbers modified by each user.

**Note:** If the file has a very long history, the computation of the annotation data can take a long time to process.

## Compare View

In the Oxygen XML Developer, there are three types of files that can be checked for differences: text files, image files and binary files. For the text files and image files you can use the built-in **Compare** view. This view is automatically opened if you select two files and use the **Compare with > Each Other** action in the contextual menu.

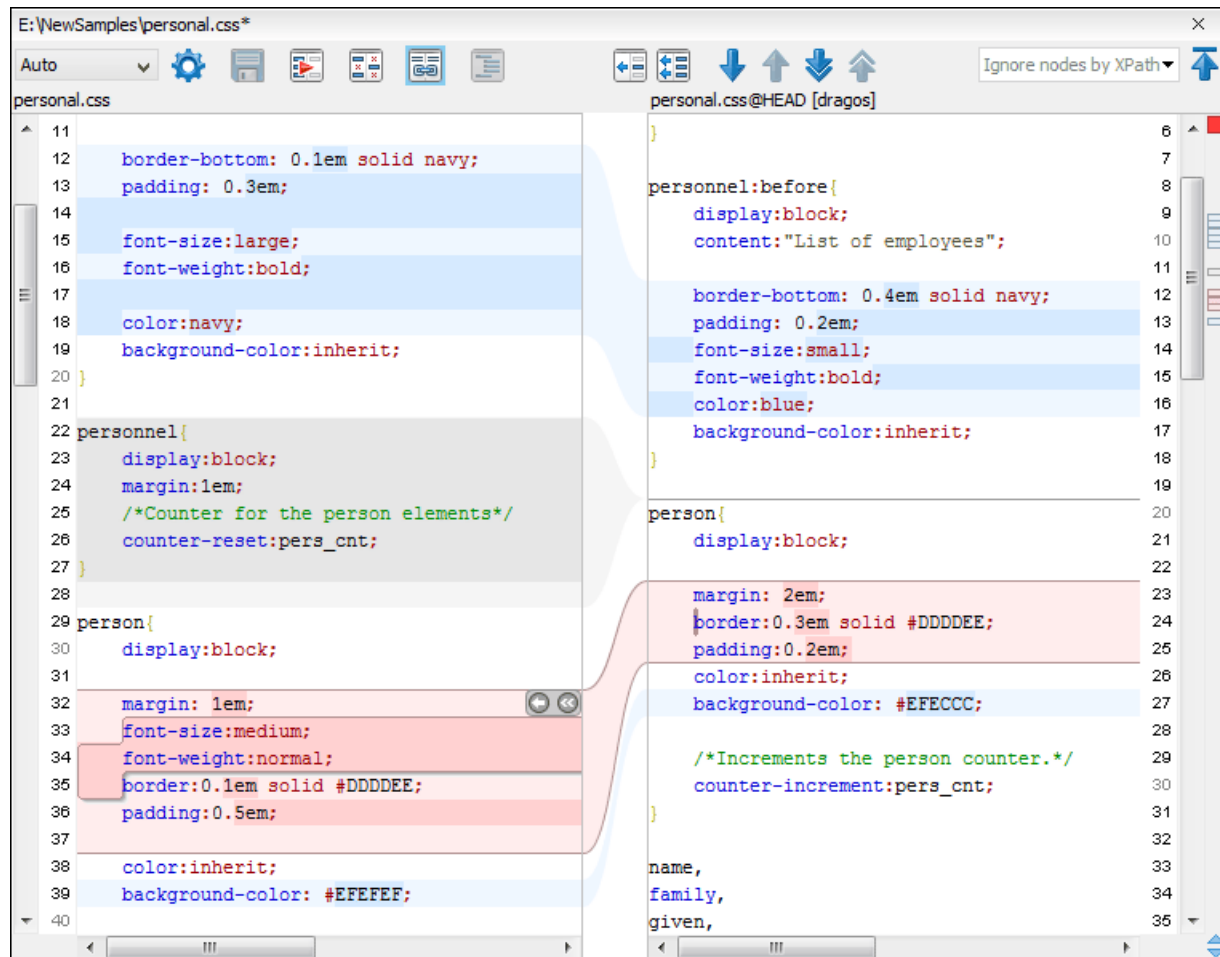


**Figure 591: Compare View**

At the top of each of the two editors, there are presented the name of the opened file, the corresponding SVN revision number (for remote resources) and the author who committed the associated revision.

When comparing text, the differences are computed using a *line differencing algorithm*. The view can be used to show the differences between two files in the following cases:

- After obtaining the outgoing status of a file with a **Refresh** operation, the view can be used to show the differences between your working file and the pristine copy. In this way you can find out what changes you will be committing.
- After obtaining the incoming and outgoing status of the file with the **Synchronize** operation, you can examine the exact differences between your local file and the *HEAD* revision file.

- You can use the **Compare view** from the **History view** to compare the local file and a selected revision or compare two revisions of the same file.

The Compare view contains two editors. Edits are allowed only in the left editor and only when it contains the working copy file. To learn more about how the view can be used, see [View Differences](#).

### Compare View Toolbar

The toolbar of the **Compare** view contains the operations that can be performed on the source and target files.



**Figure 592: Compare View Toolbar**

The following actions are available:

#### Algorithm

The algorithm to be used for performing a comparison. The following options are available:

- **Auto** - Selects the most appropriate algorithm, based on the compared content and its size (selected by default).
- **Lines** - Computes the differences at line level, meaning that it compares two files or fragments looking for identical lines of text.
- **XML Fast** - Comparison that works well on large files or fragments, but it is less precise than **XML Accurate**.
- **XML Accurate** - Comparison that is more precise than **XML Fast**, at the expense of speed. It compares two XML files or fragments looking for identical XML nodes.



#### Save action

Saves the content of the left editor when it can be edited.



#### Perform Files Differencing

Looks for differences between the two files displayed in the left and right side panels.



#### Ignore Whitespaces

Enables or disables the whitespace ignoring feature. Ignoring whitespace means that before performing the comparison, the application normalizes the content and trims its leading and trailing whitespaces.



#### Synchronized scrolling

Toggles synchronized scrolling. When toggled on, a selected difference can be seen in both panels.



#### Format and Indent Both Files (**Ctrl + Shift + P** (**Command + Shift + P** on OS X))

Formats and indents both files before comparing them. Use this option for comparisons that contain long lines that make it difficult to spot differences.

**Note:** When comparing two JSON files, the **Format and Indent Both Files** action will automatically sort the keys in both files the same to make it easier to compare.



#### Copy Change from Right to Left

Copies the selected difference from the file in the right panel to the file in the left panel.



#### Copy All Changes from Right to Left

Copies all changes from the file in the right panel to the file in the left panel.



#### Next Block of Changes (**Ctrl + Period** (**Command + Period** on OS X))

Jumps to the next block of changes. This action is not available when the cursor is positioned on the last change block or when there are no changes.

**Note:** A change block groups one or more consecutive lines that contain at least one change.

#### ⬆️ **Previous Block of Changes (Ctrl + Comma (Command + Comma on OS X))**

Jumps to the previous block of changes. This action is not available when the cursor is positioned on the first change block or when there are no changes.

#### ⬇️ **Next Change (Ctrl + Shift + Period (Command + Shift + Period on OS X))**

Jumps to the next change from the current block of changes. When the last change from the current block of changes is reached, it highlights the next block of changes. This action is not available when the cursor is positioned on the last change or when there are no changes.

#### ⬆️ **Previous Change (Ctrl + Shift + Comma (Command + Shift + M on OS X))**

Jumps to the previous change from the current block of changes. When the first change from the current block of changes is reached, it highlights the previous block of changes. This action is not available when the cursor is positioned on the first change or when there are no changes.

### **Ignore Nodes by XPath**

You can use this text field to enter an [XPath expression](#) to ignore certain nodes from the comparison. It will be processed as XPath version 2.0. You can also enter the name of the node to ignore all nodes with the specified name (for example, if you want to ignore all ID attributes from the document, you could simply enter @id). This field is only available when comparing XML documents using the **XML Fast** or **XML Accurate** algorithms.

**Note:** If an XPath expression is specified in the [ignore nodes by XPath option](#) in the **Diff / File Comparison** preferences page, that one is used as a default when the application is started. If you then enter an expression in this field on the toolbar, this one will be used instead of the default. If you delete the expression from this field, neither will be used.

#### ⬆️ **First Change (Ctrl + B (Command + B on OS X))**

Jumps to the first change.

Most of these actions are also available from the [Compare](#) menu.

### **Image Preview**

You can view your local files by using the built-in **Image Preview** component. The view can be accessed from the [Working copy view](#) or from the [Repository view](#). It can also be used from the [History view](#) to view a selected revision of a image file.

Only one image file can be opened at a time. If an image file is opened in the *Image preview* and you try to open another one it will be opened in the same window. Supported image types are *GIF, JPEG/JPG, PNG, BMP*. Once the image is displayed in the **Image Preview** panel using the actions from the contextual menu, you can scale the image at its original size (**1:1** action) or scale it down to fit in the view's available area (**Scale to fit** action).

### **Compare Images View**

The images are compared using the **Compare Images** view. This view is automatically opened if you select two image files and use the **Compare with > Each Other** action in the contextual menu. The images are presented in the left and right part of the view, scaled to fit the available area. You can use the contextual menu actions to scale the images at their original size or scale them down to fit the view's available area.

The supported image types are: *GIF, JPG / JPEG, PNG, BMP*.

### **Properties View**

The properties view presents Apache Subversion™ properties for the currently selected resource from either the **Working Copy** view or the **Repositories** view. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

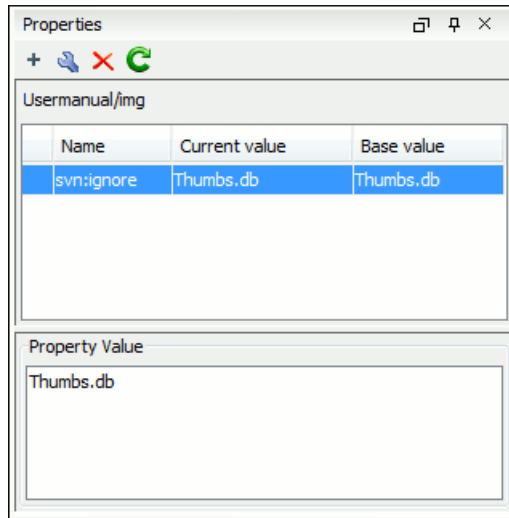


**Figure 593: Properties View**

The table includes four columns:

- **State** - Can be one of the following:
  - (empty) - Normal unmodified property (same current and base values)
  - \* (asterisk) - Modified property (current and base values are different)
  - + (plus sign) - New property
  - - (minus sign) - Removed property
- **Name** - The property name.
- **Current value** - The current value of the property.
- **Base value** - The base (original) value of the property.

#### **svn:externals Property**

The `svn:externals` property can be set on a folder or a file. In the first case it stores [the URL of a folder from other repository](#).

In the second case it stores the URL of a file from other repository. The external file will be added into the working copy as a versioned item. There are a few differences between directory and file externals:

- The path to the file external must be in a working copy that is already checked out. While directory externals can place the external directory at any depth and it will create any intermediate directories, file externals must be placed into a working copy that is already checked out.
- The external file URL must be in the same repository as the URL that the file external will be inserted into; inter-repository file externals are not supported.
- While commits do not descend into a directory external, a commit in a directory containing a file external will commit any modifications to the file external.

The differences between a normal versioned file and a file external:

- File externals cannot be moved or deleted; the `svn:externals` property must be modified instead; however, file externals can be copied.

A file external is displayed as a X in the switched status column.

#### **Toolbar / Contextual Menu**

The properties view toolbar and contextual menu contain the following actions:

- **+ Add a new property** - This button invokes the *Add property* dialog box in which you can specify the property name and value.
- **Edit property** - This button invokes the *Edit property* dialog box in which you can change the property value and also see its original(base) value.



-  **Remove property** - This button will prompt a dialog box to confirm the property deletion. You can also specify if you want to remove the property recursively.
-  **Refresh** - This action will refresh the properties for the current resource.

### Console View

The **Console View** shows the traces of all the actions performed by the application. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

Part of the displayed messages mirror the communication between the application and the Apache Subversion™ server. The output is expressed as subcommands to the Subversion server and simulates the Subversion command-line notation. For a detailed description of the Subversion console output read the **SVN User Manual**.

The view has a simple layout, with most of its space occupied by a message area. On its right side, there is a toolbar holding the following buttons:

#### **Clear**

Erases all the displayed messages.

#### **Lock scroll**

Disables the automatic scrolling when new messages are appended in the view.

The maximum number of lines displayed in the console (length of the buffer) can be modified in the [Preferences](#) page. By default, this value is set to 100.

### Dynamic Help View

**Dynamic Help view** is a help window that changes its content to display the help section that is specific to the currently selected view. As you change the focused view, you can read a short description of it and its functionality. If the view is not displayed, it can be opened by selecting it from the **Window > Show View** menu.

## Revision Graph of a SVN Resource

The history of a SVN resource can be watched on a graphical representation of all the revisions of that resource together with the tags in which the resource was included. The graphical representation is identical to a tree structure and very easy to follow.

The graphical representation of a resource history is invoked with the  **Revision graph** action available on the right-click menu of a SVN resource in [the Working Copy view](#) and [the Repository view](#).

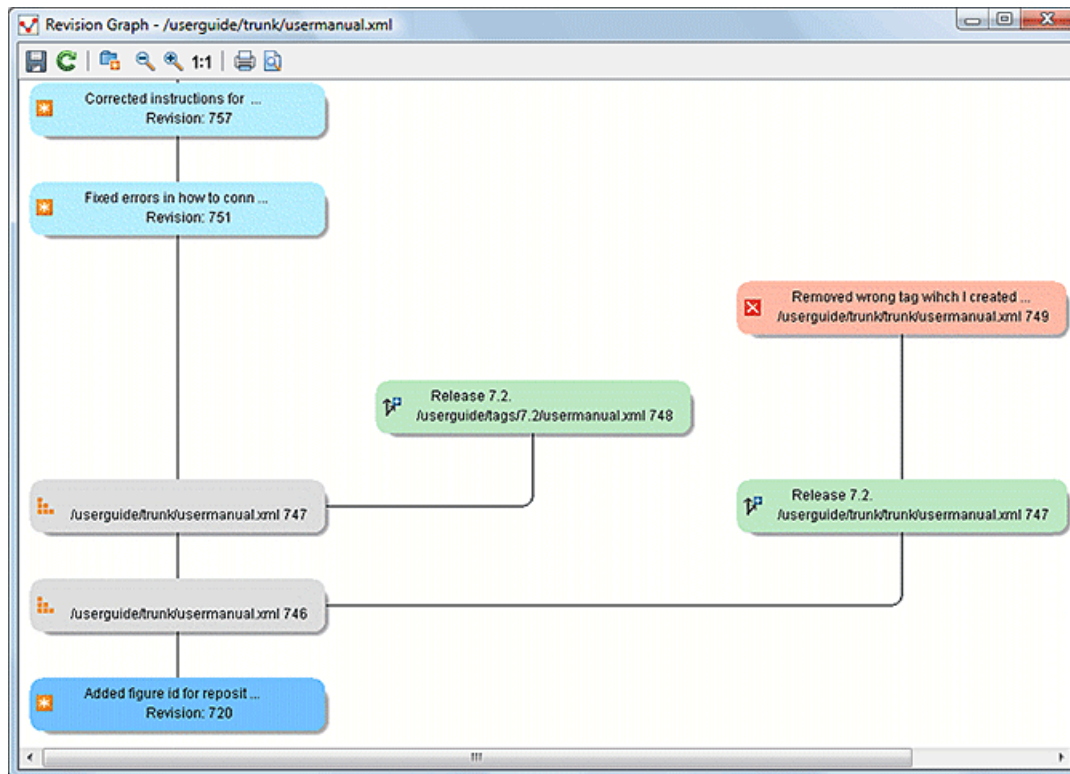


**Figure 594: Revision Graph of a File Resource**

In every node of the revision graph an icon and the background color represent the type of operation that created the revision represented in that node. The commit message associated with that revision, the repository path, and the revision number are also contained in the node. The tooltip displayed when the mouse pointer hovers over a node specifies the URL of the resource, the SVN user who created the revision of that node, the revision number, the date of creation, the commit message, the modification type and [the affected paths](#).

The types of nodes used in the graph are:

#### Added resource

The  icon for a new resource added to the repository and a green background.

#### Copied resource

The  icon for a resource copied to other location (for example, when a SVN tag is created and a green background).

#### Modified resource

The  icon for a modified resource and a blue background.

#### Deleted resource

The  icon for a resource deleted from the repository and a red background.

#### Replaced resource

The  icon for a resource removed and replaced with another one on the repository and a orange background.

#### Indirect resource

The  icon for a revision from where the resource was copied or an indirectly modified resource, that is a directory in which a resource was modified and a gray background. The *Modification type* field of the tooltip specifies how that revision was obtained in the history of the resource.

A directory resource is represented with two types of graphs:

#### Simplified graph

Lists only the changes applied directly to the directory;

## Complete graph

Lists also the indirect changes of the directory resource, that is the changes applied to the resources contained in the directory.

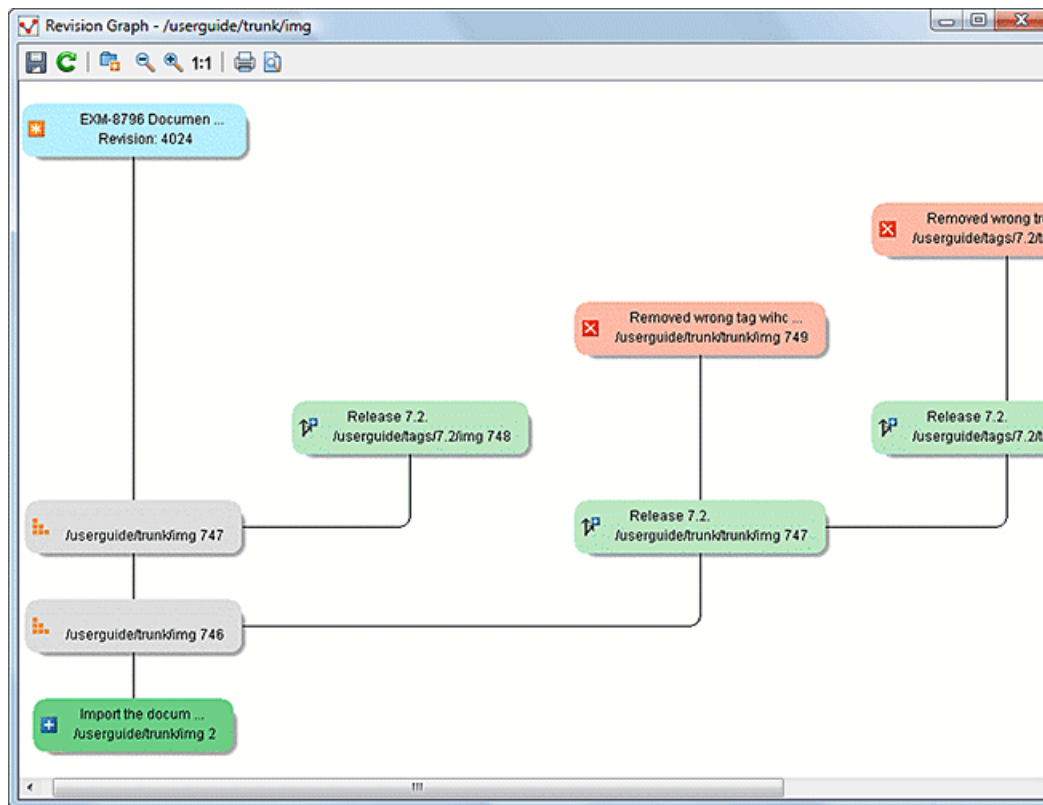


Figure 595: Revision Graph of a Directory (Direct Changes)

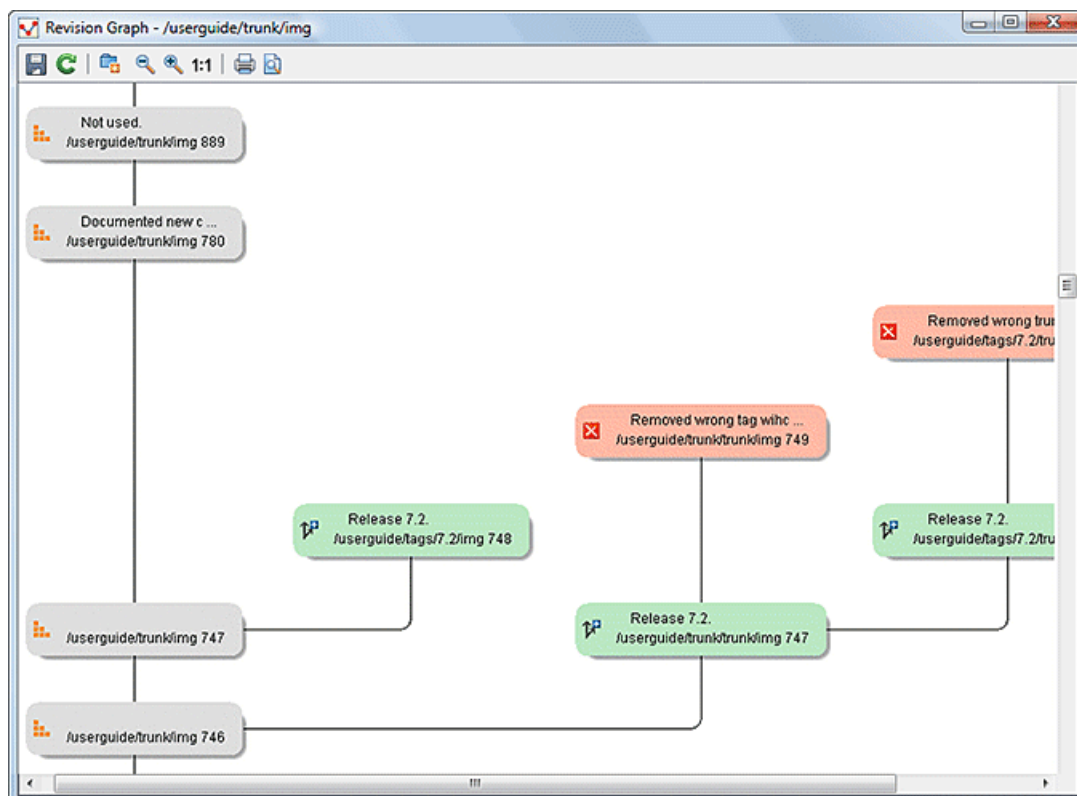


Figure 596: Revision Graph of a Directory (Including Indirect Changes)

The **Revision graph** toolbar contains the following actions:

 **Save as image**

Saves the graphical representation as image. For a large revision graph you have to [set more memory in the startup script](#). The default memory size is not enough when there are more than 100 revisions that are included in the graph.

 **Show/Hide indirect modifications**

Switches between simplified and complete graph.

 **Zoom In**

Zooms in the graph.

 **Zoom Out**

Zooms out the graph. When the font reaches its minimum size, the graph nodes will display only the icons, leading to a very compact representation of the graph.

 **Reset scale**

Resets the graphical scale to a default setting.

 **Print**

Prints the graph.

 **Print preview**

Offers a preview of the graph to allow you to check the information to be printed.

The contextual menu of any of the graph nodes contains the following actions:

**Open**

Opens the selected revision in the editor panel. Available only for files.

**Open with**

Opens the selected revision in the editor panel. Available only for files.

**Save as**

Saves the file for which the revision graph was generated, based on the selected node revision.

**Copy to**

Copies to the repository the item whose revision graph is displayed, using the selected revision.

**Note:** This action can be used to resurrect deleted items also.

**Compare with HEAD**

Compares the selected revision with the HEAD revision and displays the result in the diff panel. Available only for files.

 **Show History**

Displays the history of the resource in [the History view](#). Available for both files and directories.

 **Check out**

[Checks out](#) the selected revision of the directory. Available only for directories.

**Export**

Opens [the Export dialog box](#) that allows you to configure options for exporting a folder from the repository to the local file system.

When two nodes are selected in the revision graph of a file the right-click menu of this selection contains only the **Compare** for comparing the two revisions corresponding to the selected nodes. If the resource for which the revision graph was built is a folder then the right-click menu displayed for a two nodes selection also contains the **Compare** action but it computes the differences between the two selected revisions as a set of directory changes. The result is displayed in the [Directory Change Set](#) view.



**Attention:** Generating the revision graph of a resource with many revisions may be a slow operation. You should enable caching for revision graph actions so that future actions on the same repository will not request the same data again from the SVN server, which will finish the operation much faster.

## Oxygen XML Developer SVN Preferences

The options used in the SVN client are saved and loaded independently from the Oxygen XML Developer options. However, if Oxygen XML Developer cannot determine a set of SVN options to be loaded at startup, some of the preferences are imported from the XML Editor options (such as the License key and HTTP Proxy settings).

There is also an additional set of preferences applied to the SVN client that are set in global SVN files. There are two editing actions available in the **Global Runtime Configuration** submenu of the **Options** menu. These actions, **Edit 'config' file** and **Edit 'servers' file**, contain parameters that act as defaults applied to all the SVN client tools that are used by the same user on their login account.

## Entering Local Paths and URLs

The Oxygen XML Developer includes a variety of option configuration pages or wizards that contain text boxes where you specify paths to local resources or URLs of items inside remote repositories. The Oxygen XML Developer provides support in these text boxes to make it easier to specify these paths and URLs.

### Local Item Paths

The text boxes used for specifying local item paths support the following:

- *Absolute Paths* - In most cases, the Oxygen XML Developer expects absolute paths for local file system items.
- *Relative Paths* - The Oxygen XML Developer only accepts relative paths in the form `~/...`, where `~` is the user home directory.
- *Path Validation* - Oxygen XML Developer validates the path as you type and invalid text becomes red.
- *Drag and Drop* - You can drag files and folders from the file system or other applications and drop them into the text box.
- *Automatic Use of Clipboard Data* - If the text box is empty when its dialog box is opened, any data that is available in the system clipboard is used, provided that it is valid for that text box.

### Repository Item URLs

- *Local Repository Paths* - You can use local paths (absolute or relative) to access local repositories. When you use the **Browse** button, the Oxygen XML Developer will convert the file path to a `file://` form of URL, provided that the location is a real repository.
  - *Absolute Paths* - In most cases, the Oxygen XML Developer expects absolute paths for local file system items.
  - *Relative Paths* - The Oxygen XML Developer only accepts relative paths in the form `~/...`, where `~` is the user home directory.
- *Peg Revisions* - For URL text boxes found inside dialog boxes where you are pulling information from the repository, you can [use peg revisions at the end of the URLs](#) (for example, `URL@rev1234`).

**Note:** If you try to use a *peg revision* number in a dialog box where you are sending information to the repository then the peg revision number will become part of the name of the item rather than searching for the specified revision. For example, in the URL `http://host/path/inside/repo/item@100`, the item name is considered to be `item@100`.

**Tip:** You can even use *peg revisions* with local repository paths. For example, `C:\path\to\local\repo@100` will be converted to `file:///C:/path/to/local/repo@100` and the **Repository browser** will display the content of the local repository as it is at revision 100.

- *URL Validation* - Oxygen XML Developer validates the URLs as you type and invalid text becomes red. Even paths to local repositories are not accepted unless using the **Browse** button to convert them to valid URLs.
- *Drag and Drop* - You can drag URLs from other applications or text editors and drop them into the URL text box. You can also drag folders that point to local repositories, from the local file system or from other applications, and they are automatically converted to valid `file://` type URLs.
- *Automatic Use of Clipboard Data* - If the URL text box is empty when its dialog box is opened, any data that is available in the system clipboard is used, provided that it is valid for that text box. Even valid local paths will be automatically converted to `file://` type URLs.

**Note:** The text boxes that are in the form of a combo box also allow you to select previously used URLs, or URLs defined in the **Repositories** view.

## Technical Issues

This section contains special technical issues found during the use of Syncro SVN Client.

### Authentication Certificates Not Saved

If Syncro SVN Client prompts you to enter the authentication certificate, although you already provided it in a previous session, then you should make sure that your local machine user account has the necessary rights to store certificate files in the *Subversion* configuration folder (write access to *Subversion* folder and all its subfolders). Usually, it is located in the following locations:

- Windows: [HOME\_DIR]\AppData\Roaming\Subversion
- Mac OS X and Linux: [HOME\_DIR]/.subversion

### Updating Newly Added Resources

When you want to get a resource that is part of a newly created structure of folders from the repository, you need to also get its parent folders.

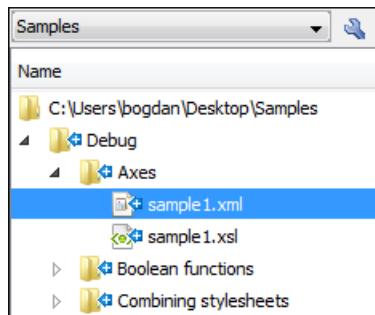


**Figure 597: Incoming Changes**

Syncro SVN Client allows you to choose how you want to deal with the entire structure from that moment onwards:

#### Update ancestor directories recursively

This option brings the entire newly added folders structure into your working copy. In this case, the update time depends on the total number of newly incoming resources, because of the full update operation (not updating only selected resource).

#### Update selected files only (leave ancestor directories empty)

This option brings a skeleton structure composed of the resource's parent folders only, and the selected resource at the end of the operation. All of the parent directories will have depth set to *empty* in your working copy, thus subsequent **Synchronize** operations will not report any remote modifications in those folders. If you need to update the folders to full-depth, you can use the [Update to revision/depth action](#) from the working copy view.

### Cannot Access a Repository through HTTPS

If you have issues when trying to access a repository through HTTPS protocol, one of the possible causes can be the encryption protocol currently used by the application. This is happening when:

- You are running Oxygen XML Developer with Java 1.6 or older.
- The repository is set to use only one of the SSLv3 or TLSv1 encryption protocols.

To solve this issue, set the [HTTPS encryption protocols](#) option to **SSLv3 only** or **TLSv1 only** (depending on the repository configuration).

### Accessing Old Items from a Repository

Usually, you point to an item from a repository using a URL. However, sometimes this might not be enough because the URL alone might point to a different item than the one you want and a *peg revision* is needed.



A Subversion repository tracks any change made to its items by using *revisions*, which contain information such as the name of the author who made the changes, the date when they were made, and a number that uniquely identifies each of them. Over time, an item from a specific location in a repository evolves as a result of committing changes to it. When an item is deleted, its entire life cycle (all changes made to it from the moment it was created) remains recorded in the history of the repository. If a new item is created, with the same name and in the same location of the repository as a previously existing one, then both items are identified by the same URL even though they are located in different time frames. This is when a *peg revision* comes in handy. A *peg revision* is nothing more than a normal revision, but the difference between them is made by their usage. Many of the Subversion commands accept also a peg revision as a way to precisely identify an item in time, beside an *operative revision* (the revision we are interested in, regarding the used command).

#### **Example:**

To illustrate an example, consider the following:

- We created a new repository file `config`, identified by the URL `http://host.com/myRepository/dir/config`.
- The file has been created at revision 10.
- Over time, the file was modified by committing revisions 12, 15, 17.

To access a specific version of the file identified by the `http://host.com/myRepository/dir/config` URL, we need to use a corresponding revision (the operative revision):

- If we use a revision number less than 10, an error is triggered, because the file has not been created yet.
- If we use a revision number between 10 and 19, we will obtain the specific version we are interested in.

**Note:** Although the file was modified in revisions 12, 15, 17, it existed in all revisions between 10 and 19. Starting with a revision at which the file is modified, it has the same content across all revisions generated in the repository until another revision in which it is modified again.

At this point, we delete the file, creating revision 20. Now, we cannot access any version of the file, because it does not exist anymore in the latest repository revision. This is due to the fact that Subversion automatically uses the HEAD revision as a peg revision (it assumes any item currently exists in the repository if not instructed otherwise). However, using any of the revision numbers from the 10–19 interval (when the file existed) as a peg revision (beside the operative revision), will help Subversion to properly identify the time frame when the file existed, and access the file version corresponding to the operative revision. If we use a revision number greater than 19, this will also trigger an error.

Continuing our example, suppose that at revision 30 we create a directory called `config` in the same repository location as our deleted file. This means that our new directory will be identified by the same repository address: `http://host.com/myRepository/dir/config`. If we use only this URL in any Subversion command, we will access the new directory. We will also access the same directory if we use any revision number equal with or greater than 30 as peg revision. However, if we are interested in accessing an old version of the previously existing file, then we must use one of the revisions that existed (10–19), as a peg revision, similar to the previous case.

#### **Checksum Mismatch Error**

A *Checksum Mismatch* error could happen if an operation that sends or retrieves information from the repository to the working copy is interrupted. This means that there is a problem with the synchronization between a local item and its corresponding remote item.

If you encounter this error, try the following:

1. Identify the parent directory of the file that caused the error (the file name should be displayed in the error message).

**Note:** If the parent directory is the root of the working copy or if it contains a large amount of items it is recommended that you check out the working copy again, rather than continuing with the rest of this procedure.

2. Identify the [current depth](#) of that directory.
3. Update the parent directory using the **Update to revision/depth** action that is available from the contextual menu or the **Working copy** menu.



- a. For the **Depth** option, select **This folder only (empty)**.



**Warning:** If you have files with changes in this directory, those changes could be lost. You should commit your changes or move the files to another directory outside the working copy prior to proceeding with this operation.

4. After clicking **OK** the contents of the directory will be erased and the directory is be marked as having **an empty depth**.
5. Once again, update the same directory using the **Update to revision/depth** action.
  - a. This time, for the **Depth** option, select the depth that was previously identified in step 2.
6. If you moved modified files to another directory outside the working copy, move them back to the original location inside the working copy.

If this procedure does not solve the error, you need to check out the working copy again and move possible changes from the old working copy to the new one.

## External Tools

A command-line tool can be started in the Oxygen XML Developer user interface as if from the command line of the operating system shell. Oxygen XML Developer offers you the option of integrating such a tool by specifying just the command line for starting the executable file and its working directory. To integrate such a tool, [open the Preferences dialog box \(Options > Preferences\)](#) and go to **External Tools** (or select **Configure** from the **Tools > External Tools** menu).

The **External Tools preferences page** presents a list of the external tools that have been configured. Once [a tool has been configured](#), you can open it by selecting it from the **Tools > External Tools** menu or from the  **External Tools** drop-down menu on the toolbar (the **Tools** toolbar needs to be selected in the [Configure Toolbars dialog box](#)). You can also [assign a keyboard shortcut](#) to be used to launch the tool.

If the external tool is applied on one of the files opened in Oxygen XML Developer, the [Save all files before calling external tools option](#) (in the **Open/Save** preference page) should be selected so that all edited files are automatically saved when an external tool is applied.

When an external tool is launched, the icon on the toolbar changes to a stop icon () and you can use this button to stop the tool. When the tool has finished running (or you close it), the icon changes back to the original icon ()

**Note:** Even though you can stop the external tool by invoking the stop action while it is running, that does not necessarily mean it will also stop the processes spawned by that external tool. For instance, if you stop an external tool that runs a batch file, the batch may be stopped but without actually stopping the processes that the batch was running at that time.

### Example: Integrating the Ant Tool

This is an example procedure for integrating [the Ant build tool](#) into Oxygen XML Developer:

1. [Download](#) and [install Apache Ant](#) on your computer.
2. Test your *Ant* installation from the command-line interface in the directory where you want to use *Ant* from. For example, run the clean target of your build.xml file C:\projects\XMLproject\build.xml:

```
ant clean
```

3. [Open the Preferences dialog box \(Options > Preferences\)](#) and go to **External Tools** (or select **Configure** from the **Tools > External Tools** menu).
4. Click the **New** button to create a new external tool entry and enter the following information:
  - **Name** - For example, Ant tool.
  - **Working directory** - For example, C:\projects\XMLproject.
  - **Command line** - For example, "C:\projects\XMLproject\ant.bat" clean.
5. Click **OK** to add the new tool to the list of external tools.

6. Run the tool from **Tools > External Tools > Ant tool**. You can see the output in the system console:

```
Started: "C:\projects\XMLproject\ant.bat" clean
Buildfile: build.xml

clean:
[echo] Delete output files.
[delete] Deleting 5 files from C:\projects\XMLproject

BUILD SUCCESSFUL
Total time: 1 second
```

## Common Problems

---

### Topics:

- [Performance Problems and Solutions](#)
- [Misc Problems and Solutions](#)

This section provides a collection of common performance and other types of problems that might be encountered when using Oxygen XML Developer, along with their possible solutions.

## Performance Problems and Solutions

---

This section contains solutions for some common performance problems that may appear when running Oxygen XML Developer.

### Related Information:

[Documents with Long Lines](#) on page 332

[Loading Large Documents](#) on page 331

[External Tools](#) on page 1240

## Display Problems on Linux or Solaris

### Problem

I experience display problems (such as screen freezes) on Linux or Solaris.

### Cause

This is possibly a rendering problem with the off-screen pixmap support.

### Solution

Add the following startup parameter: `-Dsun.java2d.pmoftscreen=false`.

## Out of Memory on External Processes

### Problem

Oxygen XML Developer throws an *Out Of Memory* error when trying to generate PDF output with the built-in Apache FOP processor.

### Cause

The amount of allocated memory might be insufficient.

### Solutions

- Open the **Preferences** dialog box (**Options > Preferences**), go to **XML > XSLT-FO-XQuery > FO Processors**, and increase the value of the **Memory available to the built-in FOP option**.
- For external XSL-FO processors, XSLT processors, and external tools, the maximum value of the allocated memory is set in the command line of the tool using the **-Xmx** parameter set to the Java virtual machine.

#### Related Information:

[FO Processors Preferences](#) on page 111

[Custom Engines Preferences](#) on page 114

[External Tools Preferences](#) on page 131

[How to Enable Debugging for FO Processor Transformations](#) on page 940

## ***Too many nested apply-templates calls Error When Running a Transformation***

### **Problem**

I'm getting the error message **Too many nested apply-templates calls** when I try to transform my DocBook file to HTML using default Oxygen XML Developer DocBook to HTML transformation scenario.

### **Cause**

Most likely, this is the result of a masked stack overflow error.

### **Solution**

Try setting a new VM option with the value **-Xss4m**. You can also try to slowly increase this to larger values (e.g. **-Xss5m** or **-Xss6m**). Note that this consumes memory on a per thread basis (Oxygen XML Developer can have tens of threads), so using a very large value here can backfire and leave Oxygen XML Developer without memory.

#### Related Information:

[Setting a Java Virtual Machine Parameter when Launching Oxygen XML Developer](#) on page 160

## **Performance Issues with Large Documents**

### **Problem**

The performance of the application slows down considerably over time when working with large documents.

### **Cause**

A possible cause is that the application needs more memory to run properly.

### **Solutions**

- You can increase the maximum amount of memory available to Oxygen XML Developer by [setting the -Xmx parameter in a configuration file](#) that is specific to the platform that runs the application.



**Attention:** The maximum amount of memory should not be equal to the physical amount of memory available on the machine because in that case the operating system and other applications will have no memory available.

- When installed on a multiple user environment, each instance of Oxygen XML Developer will be allocated the amount stipulated in the memory value. To avoid degrading the general performance of the host system, ensure that the amount of memory available is optimally apportioned for each of the expected instances.

**Note:** When starting Oxygen XML Developer from the icon created on the Start menu or Desktop in Windows (or from the shortcut created on the Linux desktop), the default maximum memory available to the application is set to 40% of the amount of physical RAM, but not more than 700 MB.

When starting Oxygen XML Developer from a command-line script, the default maximum memory is 512 MB.

## **Performance Issues when Using Oxygen XML Developer with Remote Desktop**

### **Problem**

When trying to run Oxygen XML Developer in a Remote Desktop Protocol (RDP) environment, the performance is slow and choppy.

### Cause

Running a standalone version of Oxygen XML Developer over a slow RDP connection may result in performance issues.

### Solution

As a workaround, you try to run Oxygen XML Developer as an Eclipse plugin when working with a slow RDP connection.

## Misc Problems and Solutions

---

This chapter presents common problems that may appear when running the application along with solutions for these problems.

### 'Address Family Not Supported by Protocol Family; Connect' Error

#### Problem

I have experienced the following error: *"Address Family Not Supported by Protocol Family; Connect"*. How do I solve it?

#### Cause

This seems to be an IPv6 connectivity problem. By default, the Java runtime used by Oxygen XML Developer prefers to create connections via IPv6, if the support is available. However, even though it is available in appearance, IPv6 sometimes happens to be configured incorrectly on some systems.

#### Solution

A quick solution for this problem is to set the `java.net.preferIPv4Stack` Java property to `true` (`java.net.preferIPv4Stack=true`), by following this procedure:

1. Create a file named `custom_commons.vmoptions` and add on a single line - `Djava.net.preferIPv4Stack=true`. Then save the file and copy it to the Oxygen XML Developer installation folder (may need admin access).
2. Restart Oxygen XML Developer.
3. Make sure the procedure was successful by going to **Help > About > System properties** and check that the value of the `java.net.preferIPv4Stack` property is `true`.

### Alignment Issues of the Main Menu on Linux Systems Based on Gnome 3.x

#### Problem

On some Linux systems based on Gnome 3.x (Ubuntu 11.x, 12.x), the main menu of Oxygen XML Developer has alignment issues when you navigate it using your mouse.

#### Cause

This is a known problem caused by Java SE 6 1.6.0\_32 and earlier.

#### Solution

You can resolve this problem using the latest Java SE 6 JRE from Oracle. To download the latest version, go to <http://www.oracle.com/technetwork/java/javase/downloads/index.html>.

To bypass the JRE bundled with Oxygen XML Developer, go to the installation directory of Oxygen XML Developer and rename or move the `jre` folder. If Oxygen XML Developer does not seem to locate the system JRE, either set the `JAVA_HOME` environment variable to point to the location where you have installed the JRE, or you can simply

copy that folder with the JRE to the installation directory and rename it to `jre` to take the place of the bundled JRE.

## Archive Distribution Fails to Run on Mac OS 10.12 (Sierra)

### Problem

For versions prior to 18.1, the classic archive distributions of Oxygen XML Developer (`.zip` or `.tar.gz`) fail to run on Mac OS 10.12 (Sierra).

### Cause

This happens because the archives get quarantined and Mac OS 10.12 (Sierra) treats quarantined apps differently than older versions and isolates them from their parent folder at launch. If Oxygen XML Developer was already installed when you upgraded to Mac OS 10.12 (Sierra), there are no problems.

### Solution

If Oxygen XML Developer was not already installed, or you need to reinstall an older version (prior to version 18.1), the quarantine flag must be removed for the entire content of the Oxygen XML Developer installation directory or the individual applications. To resolve this issue, follow these steps:

1. Open a *Terminal* window and change the directory to the folder where Oxygen XML Developer is located.
2. Run the following command:

```
xattr -dr com.apple.quarantine oxygen/
```

where "oxygen" is the actual name of the Oxygen XML Developer directory.

If Oxygen XML Developer is in a location that requires administrator privileges for write access, you need to run the command from an administrator account and prefix the command with `sudo`. You will then be prompted to enter your password.

## Cannot Associate Oxygen XML Developer With a File Type on My Windows Computer

### Problem

I cannot associate the Oxygen XML Developer application with a file type on my Windows computer by right clicking a file in Windows Explorer, selecting **Open With > Choose Program** and browsing to the file `oxygenDeveloper20.0.exe`. When I select the file `oxygenDeveloper20.0.exe` in the Windows file browser dialog box, the Oxygen XML Developer application is not added to the list of applications in the **Open With** dialog box.

### Cause

The problem is usually due to old Windows registry entries remaining from previous versions of Oxygen XML Developer.

### Solution

Uninstall all your installed versions of Oxygen XML Developer and reinstall your current version of Oxygen XML Developer. If you only have the current version installed, you could try to reinstall it without uninstalling it first.

## Cannot Connect to SVN Repository from Repositories View

### Problem

I cannot connect to a SVN repository from the **Repositories** view of SVN Client. How can I find more details about the error?

## Solutions

First check that you entered the correct URL of the repository in the **Repositories** view. Also check that a SVN server is running on the server machine specified in the repository URL and is accepting connections from SVN clients. You can check that the SVN server accepts connections with the command line SVN client from CollabNet.

If you try to access the repository with a svn+ssh URL also check that a SSH server is running on port 22 on the server machine specified in the URL.

If the above conditions are verified and you cannot connect to the SVN repository please generate a logging file on your computer and send the logging file to support@oxygenxml.com. For generating a logging file you need to create a text file called log4j.properties in the install folder with the following content:

```
log4j.rootCategory= debug, R2
log4j.appender.R2=org.apache.log4j.RollingFileAppender
log4j.appender.R2.File=logging.log
log4j.appender.R2.MaxFileSize=12000KB
log4j.appender.R2.MaxBackupIndex=20
log4j.appender.R2.layout=org.apache.log4j.PatternLayout
log4j.appender.R2.layout.ConversionPattern=%r %p [%t] %c - %m%n
```

Restart the application, reproduce the error, close the application and send the file logging.log generated in the install directory to support@oxygenxml.com.

## Cannot Open XML Files in Internet Explorer

### Problem

Before installing Oxygen XML Developer I had no problems opening XML files in Internet Explorer. Now when I try to open an XML file in Internet Explorer, it opens the file in Oxygen XML Developer. How can I load XML files in Internet Explorer again?

### Cause

XML files are opened in Oxygen XML Developer because Internet Explorer uses the Windows system file associations for opening files and you associated XML files with Oxygen XML Developer in the installer panel called **File Associations**. Therefore, Internet Explorer opens XML files with the associated Windows application.

### Solution

To open XML files in Internet Explorer, you have to set Internet Explorer as the default system application for XML files. For example, you can do so by following this procedure:

1. Right-click the XML file in Windows Explorer and select **Open With > Choose Default Program**.
2. Expand the section with the down-arrow and select IE in the list of applications.
3. Select the **Always use the selected program** option.

If XML files are still not opened in Internet Explorer, create a file named revert.vbs with the following content:

```
function revert()
 Set objShell = CreateObject("WScript.Shell")
 objShell.RegWrite "HKCR\.xml\", "xmlfile", "REG_SZ"
 objShell.RegWrite "HKCR\.xml\Content Type", "text/xml", "REG_SZ"
end function

revert()
```

Then run the following command from a command line:

```
wscript revert.vbs
```



## Cannot Uninstall Oxygen XML Developer in Windows

### Problem

When I try to uninstall Oxygen XML Developer in Windows, I get an error that says it cannot find the *files.log* file.

### Cause

The *install4j* installer that is used by Oxygen XML Developer creates the *files.log* file during the installation process. If you cannot uninstall the product, then most likely something went wrong with this file during the installation process.

### Solution

To solve this, simply reinstall the software in the same directory as the current installation. This will automatically uninstall the old version or overwrite it with a clean install. You should then be able to uninstall this new installation.

## Compatibility Issue Between Java and Certain Graphics Card Drivers

### Problem

Under certain settings, a compatibility issues can appear between Java and some graphics card drivers, which results in the text from the editor (in **Author** or **Text** mode) being displayed garbled.

### Solution

If you encounter this problem, update your graphics card driver. Another possible workaround is, [open the Preferences dialog box \(Options > Preferences\)](#), go to **Appearance > Fonts**, and set the value of the **Text antialiasing option** to ON.

**Note:** If this workaround does not resolve the problem, set the **Text antialiasing option** to other values.

## Crash at Startup on Windows with an Error About the nvogl32.dll File

### Problem

I try to start Oxygen XML Developer on Windows but it crashed with an error message about "Fault Module Name: nvogl32.dll". What is the problem?

### Cause

It is most likely an OpenGL driver issue.

### Solution

This can be avoided by creating an empty file called `opengl32.dll` in the Oxygen XML Developer install folder (if you start Oxygen XML Developer with the shortcut created by the installer on the Start menu or on Desktop) or in the subfolder `bin` of the home folder of the Java virtual machine that runs Oxygen XML Developer (if you start Oxygen XML Developer with the `oxygen.bat` script). The home folder of the Java virtual machine that runs Oxygen XML Developer is the value of the `java.home` property that is available in the **System properties** tab of the **About** dialog box (opened from the **Help > About** menu).

## Damaged File Associations on OS X

### Problem

After upgrading OS X and Oxygen XML Developer, it is no longer associated to the appropriate file types (such as XML, XSL, XSD). How can I re-create the file associations?

## Cause

The upgrade damaged the file associations in the LaunchService Database on your OS X machine.

## Solution

You can rebuild the LaunchService Database with the following procedure. This will reset all file associations and rescan the entire file system searching for applications that declare file associations and collect them in a database used by Finder.

1. Find all the Oxygen XML Developer installations on your hard drive.
2. Delete them by dragging them to the Trash.
3. Clear the Trash.
4. Unpack the Oxygen XML Developer installation kit on your desktop.
5. Copy the contents of the archive into the folder / Applications / Oxygen.
6. Run the following command in a Terminal:

```
/System/Library/Frameworks/CoreServices.framework/Versions/A/Frameworks/
LaunchServices.framework/Versions/A/Support/lsregister -kill -r -domain local -
domain system -domain user
```

7. Restart Finder with the following command:

```
killall Finder
```

8. Create an XML or XSD file on your desktop. It should have the Oxygen XML Developer icon.
9. Double-click the file.
10. Accept the confirmation.

**Result:** When you start Oxygen XML Developer, the file associations should work correctly.

## Details to Submit in a Request for Technical Support Using the Online Form

### Problem

What details should I add to my request for technical support on the online form in the product website?

### Solution

When completing a request for Technical Support using the online form, include as many details as possible about your problem. For problems where a simple explanation may not be enough for the Technical Support team to reproduce or address the issue (such as server connection errors, unexpected delays while editing a document, an application crash, etc.), you should generate a log file and attach it to the problem report. In the case of a crash, you should also attach the crash report file generated by your operating system.

If the text content of an XML document you want to send to the support team contains sensitive or private information, you can use the [Randomize XML text content action](#) to create filler content. Before using this action, you need to copy the initial XML resources and save them in a separate folder. Otherwise, you might lose your original information.

To generate an Oxygen XML Developer log file, follow these steps:

1. Create a text file called log4j.properties in the application installation folder, with the following content:

```
log4j.rootCategory= debug, R2

log4j.appender.R2=org.apache.log4j.RollingFileAppender
log4j.appender.R2.File=${user.home}/Desktop/oxygenLog/oxygen.log
log4j.appender.R2.MaxFileSize=12000KB
log4j.appender.R2.MaxBackupIndex=20
log4j.appender.R2.layout=org.apache.log4j.PatternLayout
log4j.appender.R2.layout.ConversionPattern=%r %p [%t] %c - %m%n
```

2. Restart the application.
3. Reproduce the error.
4. Close the application.

5. Delete the `log4j.properties` file because it might cause performance issues if you leave it in the installation folder.

**Important:** The logging mode may severely decrease the performance of the application. Therefore, please do not forget to delete the `log4j.properties` file when you are done with the procedure.

**Result:** The resulting log file is named `oxygen#.log` (for example, `oxygen.log`, `oxygen.log.1`, `oxygen.log.2`, etc.) and is located in the `Desktop\oxygenLog` folder.

## DITA Map Transformation Fails (Cannot Connect to External Location)

### Problem

*DITA map* transformation fails because it cannot connect to an external location.

### Solution

The transformation is run as an external Ant process so you can continue using the application as the transformation unfolds. All output from the process appears in the **DITA Transformation** tab.

The HTTP proxy settings are used for the Ant transformation, so if the transformation fails because it cannot connect to an external location, you can check the [the Proxy preferences page](#)

## DITA Map WebHelp Transformation Fails (Duplicate Topic References Found)

### Problem

**DITA Map WebHelp** transformation fails with a message that indicates duplicate topic references were found.

### Cause

By default the WebHelp transformation uses the `force-unique` parameter set to **true** to force the transformation to create unique output files for each instance of a resource when a map contains multiple references to a single topic. However, there are cases when this feature does not work as expected and the duplicate topic references are not handled properly.

### Solution

To solve this issue, you should manually set a unique `copy-to` attribute on any duplicate topic reference that was not handled automatically by DITA-OT:

```
<map>
...
<topicref href="../../topics/MyTopic.dita"/>
...
<topicref href="../../topics/MyTopic.dita" copy-to="../../topics/MyTopic-2.dita"/>
</map>
```

## DITA PDF Transformation Fails

### Problem

The DITA to PDF transformation fails.

### Cause

To generate the PDF output, Oxygen XML Developer uses the DITA Open Toolkit. This process sometimes results in errors. For information about some of the most common errors, see [DITA PDF Processing Common Errors](#) on page 1250.

## Solution

You can analyze the **Results** tab of the DITA transformation and search for messages that contain text similar to [fop] [ERROR]. If you encounter this type of error message, edit the transformation scenario you are using and set the **clean.temp** parameter to **no** and the **retain.topic.fo** parameter to **yes**. Run the transformation, go to the temporary directory of the transformation, open the **topic.fo** file and go to the line indicated by the error. Depending on the XSL FO context try to find the DITA topic that contains the text that generates the error.

If none of the above methods helps you, go to **Help > About > Components > Frameworks** and check what version of the DITA Open Toolkit you are using. Copy the whole output from the DITA OT console output and either report the problem on the DITA User List or send it to support@oxygenxml.com.

## Related Information:

[How to Enable Debugging for FO Processor Transformations](#) on page 940

## DITA PDF Processing Common Errors

There are cases when the PDF processing fails when trying to publish DITA content to a PDF file. This topic lists some of the common problems and possible solutions.

### Problem: Cannot Save PDF

The FO processor cannot save the PDF at the specified target. The console output contains messages like this:

```
[fop] [ERROR] Anttask - Error rendering fo file:
C:\samples\dita\temp\pdf\oxygen_dita_temp\topic.fo
<Failed to open C:\samples\dita\out\pdf\test.pdf>
Failed to open samples\dita\out\pdf\test.pdf
.....
[fop] Caused by: java.io.FileNotFoundException:
C:\Users\default\Desktop\bev\out\pdf\test.pdf
(The process cannot access the file because it is being used by another process)
```

### Solution: Cannot Save PDF

Such an error message usually means that the PDF file is already opened in a PDF reader application. The solution is to close the open PDF before running the transformation.

### Problem: Table Contains More Cells Than Defined in Colspec

One of the DITA tables contains more cells in a table row than the defined number of colspec elements. The console output contains messages like this:

```
[fop] [ERROR] Anttask - Error rendering fo file:
D:\projects\exml\samples\dita\flowers\temp\pdf\oxygen_dita_temp\topic.fo
<net.sf.saxon.trans.XPathException: org.apache.fop.fo.ValidationException:
The column-number or number of cells in the row overflows the number of
fo:table-columns specified for the table.
(See position 179:-1)>net.sf.saxon.trans.XPathException:
org.apache.fop.fo.ValidationException: The column-number or number of cells
in the row overflows the number of fo:table-columns specified for the table.
(See position 179:-1)
[fop] at org.apache.fop.tools.anttasks.FOPTaskStarter.renderInputHandler
(Fop.java:657)
[fop] at net.sf.saxon.event.ContentHandlerProxy.startContent
(ContentHandlerProxy.java:375)
.....
[fop] D:\projects\samples\dita\flowers\temp\pdf\oxygen_dita_temp\topic.fo ->
D:\projects\samples\dita\flowers\out\pdf\flowers.pdf
```

### Solution: Table Contains More Cells Than Defined in Colspec

To resolve this issue, correct the colspec attribute on the table that caused the issue. To locate the table that caused the issue:

1. Edit the transformation scenario and set the parameter **clean.temp** to **no**.
2. Run the transformation, open the **topic.fo** file in Oxygen XML Developer, and look in it at the line specified in the error message (See position 179:-1).

## Related Information:

[How to Enable Debugging for FO Processor Transformations](#) on page 940

## DITA to CHM Transformation Fails - Cannot Open File

### Problem

The DITA to CHM transformation fails with the following error: [exec] HHC5010: Error: Cannot open "fileName.chm". Compilation stopped.

### Cause

This error occurs when the CHM output file is opened and the transformation scenario cannot rewrite its content.

### Solution

To solve this issue, close the CHM help file and run the transformation scenario again.

## DITA to CHM Transformation Fails - Compilation Failed

### Problem

The DITA to CHM transformation fails with the following error: [exec] HHC5003: Error: Compilation failed while compiling fileName.

### Cause 1

One possible cause for this error is that the processed file does not exist.

### Solution 1

To solve this issue, fix the file reference before executing the transformation scenario again.

### Cause 2

Another possible cause for this error is that the processed file has a name that contains space characters.

### Solution 2

To solve the issue, remove any spacing from the file name and run the transformation scenario again.

## Drag and Drop Without Initial Selection Does Not Work

### Problem

When I try to drag with the mouse an unselected file from the [Project view](#), the drag doesn't start, it only selects the resource. I need to drag the resource again after it becomes selected. Therefore, any drag and drop action without an initial selection becomes a two step operation. How can I fix this?

### Solution

This is a [bug](#) present in JVM versions prior to 1.5.0\_09. This issue is fixed in 1.5.0\_09 and newer versions. See the [installation instructions](#) for setting a specific JVM version for running the Oxygen XML Developer application.

## Gray Window on Linux With the Compiz / Beryl Window Manager

### Problem

I try to run Oxygen XML Developer on Linux with the Compiz / Beryl window manager but I only get a gray window that does not respond to user actions. Sometimes the Oxygen XML Developer window responds to user actions but after opening and closing an Oxygen XML Developer dialog, or after resizing the Oxygen XML Developer window or a view of the Oxygen XML Developer window, the content of this window becomes gray and it does not respond to user actions.

### Cause

Sun Microsystems' Java virtual machine [does not support the Compiz window manager and the Beryl one very well](#). It is expected that better support for Compiz / Beryl will be added in future versions of their Java virtual machine.

### Solution

Try turning off the special effects for the Compiz / Beryl window manager before starting the Oxygen XML Developer application or switch to another window manager.

## Handshake Failure Error When Accessing an HTTPS (SSL) Resource

### Problem

When attempting to access an HTTPS (SSL) resource, I receive a **handshake\_failure** error.

### Cause

The issue is most likely due to the limitation of Java cryptography capabilities.

### Solution

A solution might be to download and deploy [Java Cryptography Extension \(JCE\) Unlimited Strength Jurisdiction Policy Files 8 \(for Java 8\)](#).



**Warning:** It is possible that this may not be legal in your country. Please understand that you bare legal responsibility for activating unlimited strength Java cryptography capabilities, so you must have the legal right to use such cryptography (please consult your export/import control counsel or attorney to determine the exact requirements for your jurisdiction).

To deploy it in Oxygen XML Developer, unpack the downloaded zip archive and move the two jar files (**local\_policy.jar** and **US\_export\_policy.jar**) from **UnlimitedJCEPolicyJDK8** to the following directory, overwriting existing files:

- **Windows** - [OXYGEN\_INSTALL\_DIR]/jre/lib/security
- **Linux** - [OXYGEN\_INSTALL\_DIR]/jre/lib/security
- **Mac OS X** - [OXYGEN\_INSTALL\_DIR]/jre.bundle/Contents/Home/jre/lib/security

## Images Appear Stretched Out in the PDF Output

### Problem

When publishing XML content (DITA, DocBook, etc.), images are sometimes scaled up in the PDF outputs but are displayed perfectly in the HTML (or WebHelp) output.

### Solution

PDF output from XML content is obtained by first obtaining a intermediary XML format called XSL-FO and then applying an XSL-FO processor to it to obtain the PDF. This stretching problem is caused by the fact that all XSL-FO processors take into account the DPI (dots-per-inch) resolution when computing the size of the rendered image.

The PDF processor that comes out of the box with the application is the open-source Apache FOP processor. Here is what Apache FOP does when deciding the image size:


1. If the XSL-FO output contains width, height or a scale specified for the image `external-graphic` tag, then these dimensions are used. This means that if in the XML (DITA, DocBook, etc.) you set explicit dimensions to the image they will be used as such in the PDF output.
2. If there are no sizes (width, height or scale) specified on the image XML element, the processor looks at the image resolution information available in the image content. If the image has such a resolution saved in

it, the resolution will be used and combined with the image width and height to obtain the rendered image dimensions.

3. If the image does not contain resolution information inside, Apache FOP will look at the FOP configuration file for a default resolution. The FOP configuration file for XSLT transformations that output PDF is located in the `[OXYGEN_INSTALL_DIR]/lib/fop.xconf`. DITA publishing uses the DITA Open Toolkit that has the Apache FOP configuration file located in `[DITA-OT-DIR]/plugins/org.dita.pdf2/fop/conf/fop.xconf`. The configuration file contains two XML elements called `source-resolution` and `target-resolution`. The values set to those elements can be increased (usually a DPI value of 110 or 120 should render the image in PDF the same as in the HTML output).

The commercial **RenderX XEP** XSL-FO processor behaves similarly but as a fallback it uses 120 as the DPI value instead of using a configuration file.

**Tip:** It is best to save your images without any DPI resolution information. For example, when saving a PNG image in the open-source GIMP image editor, you do not want to save the resolution.

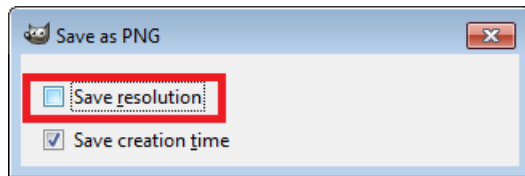

This allows you to control the image resolution from the configuration file for all referenced images.

## Increasing the Memory for the Ant Process

### Problem

The Ant build process runs out of memory.

### Solution

For details about setting custom JVM arguments to the Ant build process, see [JVM Arguments](#).

## Keyboard Shortcuts Do Not Work

### Problem

The keyboard shortcuts listed in the [Menu Shortcut Keys preferences](#) do not work.

### Cause

Usually this happens when a special keyboard layout is set (in the operating system) that generates non-standard characters. For example, an extended Greek layout will generate special characters that are not present in the default Greek layout. This causes the Java virtual machine that runs the application to receive unexpected key codes.

### Solution

Reset the keyboard layout to the standard layout for your particular language.

## Keyboard Language Resets to Default on Windows

### Problem

In Windows, I have set a specific language for my keyboard and while using Oxygen XML Developer, it keeps getting reset to the default language.



### Cause

When multiple languages are enabled in Windows, the default shortcut key combination for switching the input language is **Left Alt + Shift**. Trying to use various shortcuts in Oxygen XML Developer that involves combinations of those two keys is probably resetting your input language to the default setting if you press those two keys without a third combination.

### Solution

You can change the Windows shortcut keys that are assigned to the input language by going to the control panel and searching for the **Switch input languages** option. For example, in Windows 10, go to **Control Panel > Language > Advanced Setting**. In the **Switching input methods** section, click on **Change language bar hot keys**. Click the **Change Key Sequence** button. This opens a dialog box that allows you to switch the shortcut keys for the input language or keyboard layout.

## Machine Signature Mismatch Error

### Problem

During the floating license activation process, the license key becomes bound to a particular license server deployment. This means that a code that uniquely identifies your license server deployment (called *Machine Signature*) is sent to the Oxygen XML Developer servers, which in turn will sign the license key. The *Machine Signature* is computed from the list of network interfaces of the machine where you deployed the floating license.

### Causes

When starting the license server, if you receive an error stating that your server's Machine Signature does not match the one found in your license key, there are several possible causes:

1. You have moved your floating license key to a new machine that hosts your license server.
2. You have changed, added, or activated a new network interface in the machine that hosts your license server.

**Note:** A specific example of when this could happen, is if you activate/deactivate the Bluetooth module or the WiFi module.

### Solutions

- Revert back to your previous configuration.
- If this is not possible, contact our [support team](#).

## MSXML 4.0 Transformation Issues

### Problem

When running a transformation scenario that uses the MSXML 4.0 transformer, I receive an error that looks like this:

```
Could not create the 'MSXML2.DOMDocument.4.0' object.
Make sure that MSXML version 4.0 is correctly installed on the machine.
```

### Cause

It is likely that the latest MSXML 4.0 service pack is not installed on your computer.

### Solution

To fix this issue, go to the Microsoft website and get the latest MSXML 4.0 service pack.

## Navigation to a Web Page is Canceled when Viewing CHM on a Network Drive

### Problem

When viewing a CHM on a network drive, I only see the TOC and an empty page that displays the message: **Navigation to the web page was canceled.**

### Cause

This is actually normal behavior. The Microsoft viewer for CHM does not display the topics for a CHM opened on a network drive.

### Solution

As a workaround, copy the CHM file on your local system and view it there.

## Out Of Memory Error When Opening Large Documents

### Problem

I am trying to open a file larger than 100 MB in Oxygen XML Developer, but it runs out of memory (**OutOfMemoryError**).

### Solution

You should make sure that the value of the [Optimize loading in the Text edit mode for files over option](#) is less than the size of your document. This will enable the optimized support for large documents. If that fails and you still get an *Out Of Memory* error you should [increase the memory available to Oxygen XML Developer](#).

Other tips:

- Make sure that you close other files before opening the large file.
- You can set the default editing mode [in the Preferences dialog box](#). The **Text** editing mode uses less memory than other editing modes.
- If the file is too large for the editor to handle, you can [open it in for viewing in Large File Viewer](#).

## Java Virtual Machine (JVM) Crash on Mac OS X

### Problem

Oxygen XML Developer crashed the Apple Java virtual machine or it could not start up on my OS X computer due to a JVM crash.

### Cause

Usually it is an incompatibility between the Apple JVM and a native library of the host system. More details are available in the crash log file generated by OS X and reported in the crash error message.

### Solution

If this happens, it is best to send a copy of the logs via email to [support@oxygenxml.com](mailto:support@oxygenxml.com). Usually, the operating system will offer a prompt that allows you to see the logs. If not, you should be able to find the logs in the Console app (**Applications > Utilities**, under **~/Library/Logs/DiagnosticReports**). They are usually named *JavaApplicationStub\*.crash/.hang*.

## Oxygen XML Developer Takes Several Minutes to Start

### Problem

Oxygen XML Developer seems to take an abnormally long amount of time to start.

### Cause

Some anti-virus software can cause Java applications, such as Oxygen XML Developer, to start very slowly due to scanning compressed archives (such as the *JAR* libraries that all Java applications use).

### Solution

A possible solution is to add the Oxygen XML Developer folder to the list of exceptions in the anti-virus software settings.

## High Resolution Scaling Issues

### Problem

I encounter scaling detection issues in a high resolution display. For example, some GUI components are too small.

### Cause

This sometimes happens when using multiple displays with different resolutions because the application cannot detect the correct scaling setting.

### Solution

You can use the [com.oxygenxml.hidpi.scaling custom system property](#) to force a specific scaling setting. For example: `-Dcom.oxygenxml.hidpi.scaling=1.5` for 150% scaling.

## Saxon 9.7 Transformer Issues

### Problem

I have upgraded to Oxygen XML Developer version 19.0 (which comes bundled with Saxon 9.7) and I am experiencing issues when trying to use the Saxon 9.7 transformer. Is it possible to use the Saxon 9.6 transformer with Oxygen XML Developer version 19.0 or later?

### Solution

There is a plugin available that can be installed and it allows you to use Saxon 9.6. To install it, follow these instructions:

1. Go to **Help > Install new add-ons** to open an add-on selection dialog box.
2. Select the *default* update site from the drop-down menu (<http://www.oxygenxml.com/InstData/Addons/default/updateSite.xml>).
3. Select the **Saxon 9.6 XSLT and XQuery Transformer** plugin and click **Next**.
4. Select the **I accept all terms of the end user license agreement** option and click **Finish**.
5. Restart the application.

**Result:** When you configure the transformation scenario, you will now have the option to choose the Saxon 9.6 transformer.

## Scroll Function of my Notebook Trackpad is Not Working

### Problem

I got a new notebook (Lenovo Thinkpad™ with Windows) and noticed that the scroll function of my trackpad is not working in Oxygen XML Developer.

### Cause

It is most likely a problem with the Synaptics™ trackpads.

## Solution

Try adding the following lines to the C:\Program Files\Synaptics\SynTP\TP4table.dat file:

```
,,oxygen20.0.exe,*,*,*,WheelStd,1,9
,,oxygenAuthor20.0.exe,*,*,*,WheelStd,1,9
,,oxygenDeveloper20.0.exe,*,*,*,WheelStd,1,9
,,syncroSVNClient.exe,*,*,*,WheelStd,1,9
,,diffDirs.exe,*,*,*,WheelStd,1,9
,,diffFiles.exe,*,*,*,WheelStd,1,9
```

## Segmentation Fault Error on Mac OS X

### Problem

On Mac OS X, the application gives a *Segmentation fault* error when I double-click the application icon. Sometimes it gives no error but it does not start.

### Solution

Make sure you have the latest Java update from the Apple website installed. If this does not solve the problem, copy the JavaApplicationStub file from the /System/Frameworks/JavaVM.framework folder to the OxygenDeveloper.app/Contents/MacOS folder. To browse the .app folder, you have to use the **Command** key while clicking the Oxygen XML Developer icon and select **Show Package Contents**.

## Setting a Specific JVM Version on Mac OS X

### Problem

On Mac OS X, I need to configure Oxygen XML Developer to run with a specific version of the Apple Java virtual machine (JVM).

### Cause

Oxygen XML Developer uses the first JVM from the list of preferred JVM versions set on your Mac computer that has a version number 1.6.0 or higher.

### Solution

You can move your desired JVM version up in the preferred list by dragging it with the mouse to a higher position in the list of JVMs available in the **Java Preferences** panel that is opened from **Applications > Utilities > Java > Java Preferences**.

## Signature Verification Failed Error on a Resource from Documentum

### Problem

When I try to open or edit a resource from Documentum, I receive the following error:

```
signature verification failed: certificate for All-MB.jar.checksum not signed by a
certification authority.
```

### Cause

The problem is that the certificates from the Java Runtime Environment 1.6.0\_22 or later no longer validate the signatures of the UCF JARS.

### Solution

Set the -Drequire.signed.ucf.jars=false parameter, as explained in the [Setting a Parameter in the Launcher Configuration File / Startup Script](#) topic.

## Special Characters are Replaced with a Square

### Problem

My file was created with another application and it contains special characters (such as é, ©, ®, etc.) but Oxygen XML Developer displays a square for these characters.

### Solution

You must set a font that is able to render the special characters in the [Font preferences](#). If it is a text file, you must also set [the encoding used for non XML files](#). If you want to set a font that is installed on your computer but that font is not accessible in the **Font** preferences, this means the Java virtual machine is not able to load the system fonts (probably because it is not a True Type font). It is a problem of the Java virtual machine and a possible solution is to copy the font file in the [JVM\_DIR]/lib/fonts folder. [JVM\_DIR] is the value of the property *java.home* that is available in the **System properties** tab of the **About** dialog box that is opened from menu **Help > About**.

## TocJS Transformation Does not Generate All Files for a Tree-Like TOC

### Problem

The *TocJS* transformation of a [DITA map](#) does not generate all the files needed to display the tree-like table of contents.

### Solution

To get a complete set of output files, follow these steps:

1. Run the *XHTML* transformation on the same *DITA map*. Make sure the output gets generated in the same output folder as for the *TocJS* transformation.
2. Copy the content of the *DITA-OT-DIR/plugins/com.sophos.tocjs/basefiles* folder to the transformation output folder.
3. Copy the *DITA-OT-DIR/plugins/com.sophos.tocjs/sample/basefiles/frameset.html* file to the transformation output folder.
4. Edit *frameset.html* file.
5. Locate element `<frame name="contentwin" src="concepts/about.html">`.
6. Replace "concepts/about.html" with "index.html".

## References Outside the Main DITA Map Folder

### Problem

A reference to a DITA topic, *map*, or binary resource (for example, an image) that is located outside of the folder where the main [DITA map](#) is located leads to problems when publishing the content using the DITA Open Toolkit.

### Cause

DITA-OT often has trouble resolving references that are outside the directory where the published *DITA map* is found. By default, it does not even copy the referenced topics to the output directory.

### Solution

To solve this, try one of the following solutions:

- Create another *DITA map* that is located in a folder path above all referenced folders and reference the original *DITA map* from this new map. Then transform this *DITA map* instead.
- Edit the transformation scenario and in the **Parameters** tab, change the value of the **fix.external.refs.com.oxygenxml** parameter to `true`. This parameter is used to specify whether or not the application tries to fix such references in a temporary files folder before the DITA Open Toolkit is invoked on the fixed references. The fix has no impact on your edited DITA content.

**Important:** The `fix.external.refs.com.oxygenxml` parameter is only supported when the DITA OT transformation process is started from Oxygen XML Developer.

- For PDF output, you can edit the transformation scenario and in the **Parameters** tab set the value of the `generate.copy.outer` parameter to 3. This parameter specifies whether to generate output files for content that is not located in or beneath the directory containing the DITA map file. By setting the value of this parameter to 3, the transformation scenario shifts the output directory so that it contains all output for the publication.

**Important:** This method is recommended for transformation scenarios that use an external DITA-OT.

## Windows Service Reports Incorrect Function Error When Starting (TCP Server)

### Problem

My TCP floating license server reports an "Incorrect Function" error message when starting the Windows service.

### Cause

This usually appears because the Windows service launcher cannot locate a Java virtual machine on your system.

### Solution

Make sure that you have installed a 32-bit Java SE from Oracle (or Sun) on the system: <http://www.oracle.com/technetwork/java/javase/downloads/index.html>.

## Windows Service Reports Process Terminated Unexpectedly Error (TCP Server)

### Problem

My TCP floating license server reports a "Process Terminated Unexpectedly" error message for the Windows service.

### Cause

This error message appears if the Windows service launcher quits immediately after being started. This problem usually happens because the license key has not been correctly deployed (`license.txt` file in the license folder).

### Solution

Re-deploy your license key. For more information, see the [Setting up a Floating License Server section](#).

## Wrong Words are Highlighted when Searching in a User Manual

### Problem

When I do a keyword search in the User Manual that is included with the Oxygen XML Developer application, the search highlights the wrong word in the text. Sometimes the highlighted word is several words after the matched word.

### Cause

This does not happen when Oxygen XML Developer runs with a built-in Java virtual machine that was installed by Oxygen XML Developer in a subfolder of the installation folder (for example, on Windows and Linux when installing Oxygen XML Developer with the installation wizard specific for that platform). However, when Oxygen XML Developer runs from an All Platforms installation, it uses whatever JVM was found on the host system, which may be incompatible with the JavaHelp indexer used for creating the built-in User Manual. Such a JVM may offset the highlight of the matched word with several characters, usually to the right of the matched word.

### Solution

To see the highlight the exact matched word, it is recommended to install the application with the specific installation wizard for your platform (available only for Windows and Linux).

## XML Document Takes a Long Time to Open

### Problem

Oxygen XML Developer takes a long time to open an XML document.

### Cause

It takes longer to open an XML document if the whole content of your document is on a single line or if the document size is very large.

### Solution

If the content is on a single line, you can speed up loading by selecting the **Format and indent the document on open option** (in the **Format** preferences page).

If the document is very large (above 30 MB), make sure that the value of the **Optimize loading in the Text edit mode for files over option** (in the **Open/Save** preferences page) is greater than the size of your document.

If that fails and you get an Out Of Memory error (**OutOfMemoryError**) you can **increase the memory available to Oxygen XML Developer**.

## XSLT Debugger Is Very Slow

### Problem

When I run a transformation in the **XSLT Debugger perspective**, it is very slow.

### Solution

If the transformation produces HTML or XHTML output, you can **disable rendering of output in the XHTML output view** during the transformation process. To view the XHTML output result do one of the following:

- Run the transformation in the **Editor perspective** and make sure the **Open in Browser/System Application option** is selected.
- Run the transformation in the **XSLT Debugger perspective**, save the text output area to a file, and use a browser application for viewing it (for example, Firefox or Internet Explorer).

---

**Topics:**

- [Active Cell](#)
- [Anchor](#)
- [Apache Ant](#)
- [Block Element](#)
- [Bookmap](#)
- [Callout](#)
- [Canonicalize](#)
- [Content Completion Assistant](#)
- [Dockable](#)
- [Document Fragment](#)
- [Document Type Association](#)
- [DITA Map](#)
- [DITA Open Toolkit](#)
- [DITA-OT-DIR](#)
- [Foldable Element](#)
- [Framework](#)
- [Global Options](#)
- [IDML](#)
- [Inline Element](#)
- [Java Archive](#)
- [Key Space](#)
- [Keystore](#)
- [Master File](#)
- [Named User](#)
- [Perspective](#)
- [Plugin](#)
- [Pretty-Print](#)
- [Project Options](#)
- [QName](#)
- [Quick Assist](#)
- [Quick Fix](#)
- [Root Map](#)
- [Space-Preserved Element](#)
- [Subject Scheme Map](#)
- [WebHelp Output Directory](#)
- [Working Set](#)
- [XML Catalog](#)



## Active Cell

---

**Active cell** refers to the selected cell where data is entered when you begin typing. Only one cell is active at a time. The *active cell* is bounded by a heavy border.

## Anchor

---

An **Anchor** is used in various types of links to take the user to a specific location within the target document. It is designated in a URL or in the value of the href attribute with a # symbol followed by the anchor that is defined in a target ID (for example href="MyTopic.dita#anchor).

## Apache Ant

---

**Apache Ant** (Another Neat Tool) is a software tool for automating software build processes.

## Block Element

---

A **block element** is intended to be visually separated from its siblings, usually vertically. For instance, paragraphs and list items are *block elements*. It is distinct from a *inline element*, which has no such separation.

## Bookmap

---

A **bookmap** is a specialized *DITA map* used for creating books. A *bookmap* supports book divisions such as chapters and book lists such as indexes.

## Callout

---

A **callout** is a string of text inside a graphic and is connected to a specific location in a document by a line. Oxygen XML Developer uses callouts to present comments and other types of review modifications.

## Canonicalize

---

To **canonicalize** something means to convert it to a standard format that everyone generally uses. When using the term with regards to XML, it refers to the process of converting data that has more than one possible representations into a standardization that conforms to the specification of an XML document or document subset. It is helpful for applications that require the ability to test whether or not the content of an XML document or subset has been changed.

## Content Completion Assistant

---

The **Content Completion Assistant** refers to a very helpful mechanism in Oxygen XML Developer that offers a list of proposed items that could be inserted at the current location, depending on the current context, editing mode, and type of document. It also tries to determine the most logical choice in the current editing context and displays that proposal at the beginning of the list.

For more information about this feature and how to invoke it, depending on your editing context, see the following:

- [Content Completion Assistant in Text Mode](#) on page 370
- [Content Completion Assistant in Grid Mode](#) on page 401
- [Content Completion in XSLT Stylesheets](#) on page 466
- [Content Completion in Ant Build Files](#) on page 499

- [Content Completion in XML Schema](#) on page 538
- [Content Completion in XQuery](#) on page 573
- [Content Completion Assistance in WSDL Documents](#) on page 585
- [Content Completion in CSS Stylesheets](#) on page 604
- [Content Completion in LESS Stylesheets](#) on page 607
- [Content Completion in Relax NG Schemas](#) on page 612
- [Content Completion in NVDL Schemas](#) on page 624
- [Content Completion in JavaScript Documents](#) on page 636
- [Content Completion in Schematron Documents](#) on page 641
- [Content Completion in SQF](#) on page 657

## Dockable

---

A **Dockable** window is one that can be moved and resized, and either floated or pinned to a location, allowing you to configure the workspace according to your preferences.

## Document Fragment

---

A **document fragment** represents a portion of an XML document's tree of nodes or content.

## Document Type Association

---

In general terms, a **Document Type Association** is a set of rules that associate a document type with a [framework](#). In Oxygen XML Developer, **Document Type Association** also specifically refers to a [preferences page](#) where you can create new custom *frameworks* or edit existing ones. Note that predefined *frameworks* (document types) are read-only, but you can [Extend](#) or [Duplicate](#) them to configure them as custom *frameworks*.

## DITA Map

---

A **DITA map** is a component of the DITA [framework](#) that provides the means for a hierarchical collection of DITA topics that can be processed to form an output. Maps do not contain the content of topics, but only references to them. These are known as topic references. Usually the maps are saved on disk or in a CMS with the extension `.ditamap`.

Maps can also contain relationship tables that establish relationships between the topics contained within the map. Relationship tables are also used to generate links in your published document.

You can use your map or [bookmap](#) to generate a deliverable using an output type such as XHTML, PDF, HTML Help, or Eclipse Help.

## DITA Open Toolkit

---

**DITA Open Toolkit** is an open-source publishing engine for content authored in the Darwin Information Typing Architecture. It is a vendor-independent, open-source implementation of the DITA standard, released under the [Apache License, Version 2.0](#).

The toolkit supports all versions of the [OASIS DITA specification](#), including 1.0, 1.1, 1.2, and 1.3.

### DITA-OT

#### Related Information:

## DITA-OT-DIR

---

**DITA\_OT\_DIR** refers to the default directory that is specified for your DITA Open Toolkit distribution in the [Options > Preferences > DITA preferences page](#).

For example, if you are using DITA OT 2.5.4 with Oxygen XML Developer, the default directory is: `[OXYGEN_INSTALL_DIR]/frameworks/dita/DITA-OT2.x` (or if you are using DITA OT 1.8.5, the default directory is: `[OXYGEN_INSTALL_DIR]/frameworks/dita/DITA-OT`). You can also specify a custom directory.

## Foldable Element

---

A **foldable element** refers to elements that can be collapsed and expanded in Oxygen XML Developer. *Foldable elements* are marked with a small triangle ( ▾ / ▸ ) on the left side of the editor panel and you can use that triangle to quickly collapse or expand them. This feature is helpful when you are working with large documents and you want to temporarily hide blocks of content. You can right-click the triangle to access additional collapse and expand actions (**Collapse Other Folds**, **Collapse Child Folds**, **Expand Child Folds**, **Expand All**).

## Framework

---

A **framework** refers to a package that contains resources and configuration information to provide ready-to-use support for an XML vocabulary or document type. Oxygen XML Developer includes a [Document Type Configuration Dialog Box](#) that allows you to define a set of rules and customize various authoring mechanisms for new or existing *frameworks*.

## Global Options

---

**Global Options** refers to the [storage option](#) in the Oxygen XML Developer preference pages (**Options > Preferences**). If you select **Global Options**, the options in that particular preferences page are stored locally on your computer and are not accessible to other users (unless you [export them into an XML options file](#) that can then be shared).

## IDML

---

**IDML** is an abbreviation for Adobe InDesign Markup files.

## Inline Element

---

An **inline element** is intended to be displayed in the same line of text as its siblings or the surrounding text. For instance, strong and emphasis in HTML are *inline elements*. It is distinct from a *block element*, which is visually separated from its siblings.

## Java Archive

---

**Java Archive (JAR)** is an archive file format. *JAR* files are built on the ZIP file format and have the `.jar` file extension. Computer users can create or extract *JAR* files using the `jar` command or an archive tool.

## Key Space

---

The concept of a **Key Space** in DITA refers to a set of all possible keys that can be used in a *DITA map* structure. A **Key Space** is established when a [root map](#) defines a set of effective key bindings.

## Keystore

---

A **Keystore** is an encrypted file that contains private keys and certificates. There are two types of *keystores* that are supported in Oxygen XML Developer:

- **Java Key Store (JKS)**
- **Public-Key Cryptography Standards version 12 (PKCS-12)**

## Master File

---

A **Master File** typically refers to the root of an imported or included tree of modules and this support helps you simplify the configuration and development of XML projects. For more information, see the [Master Files Support](#) on page 302 section.

## Named User

---

**Named User** is defined as an individual full or part-time employee who is authorized by *You* (the individual or entity who owns the rights to Oxygen XML Developer) to use the software regardless of whether or not the individual is actively using the software at any given time. To avoid any doubt, *Named User* licenses cannot be shared amongst multiple individuals and separate *Named User* licenses must be purchased for each individual user.

A *Named User* license may not be reassigned to another employee except in the following circumstances:

- (a) Upon termination of the *Named User's* employment with your company.
- (b) Permanent reassignment of a *Named User* to a position that does not involve the use of the Software.

For example, suppose Jane has been assigned an *Oxygen* license and she leaves your company. When she leaves, you can simply reassign her license to John, her replacement. In the event that you do reassign the *Named User* license in accordance with the restrictions above, you do not need to notify Syncro of such a reassignment.

**Note:** This definition is taken from the Oxygen XML Developer [End User License Agreement](#).

## Perspective

---

In Oxygen XML Developer, a **perspective** refers to an interface layout geared towards a specific editing environment. Each *perspective* includes a unique set of interface objects, toolbars, views, and features. You can change the *perspective* by selecting the respective icon (     ) in the top-right corner of Oxygen XML Developer or by selecting the *perspective* from the **Window > Open Perspective** menu.

The *perspectives* that are available in Oxygen XML Developer are:

-  **Editor** - The most commonly used *perspective* and it is used to edit XML documents.
-  **XSLT Debugger** - Used to detect problems in an XSLT transformation by executing the process step by step in a controlled environment.
-  **XQuery Debugger** - Used to detect problems in an XQuery transformation process by executing the process step by step in a controlled environment
-  **Database** - Used to browse and manage databases.

## Plugin

---

A **plugin** (also referred to as *add-on* or *extension*) is a component that adds specific features to an existing application. Oxygen XML Developer supports *plugins* to enable numerous customizations.

For more information, see the following topics:

- [Installing and Updating Add-ons](#) on page 41
- [Automatic and Manual Methods for Installing Plugins](#)
- [Packing and Deploying Plugins or Frameworks as Add-ons](#)
- [Add-ons Preferences](#) on page 51
- [Extending Oxygen XML Developer with Plugins](#) on page 1044
- [General Configuration of an Oxygen XML Developer Plugin](#) on page 1044

## Pretty-Print

---

**Pretty-print** refers to formatting and indenting the source code in **Text** mode to make the content easier to view and analyze. The formatting actions that are available in Oxygen XML Developer include:

-  **Format and Indent Element** - Available in the **Source** submenu of the contextual menu for the current element.
-  **Format and Indent** - Available on the toolbar for the entire currently opened document.
-  **Format and Indent Files** - Available in the contextual menu of the **Project view** for one or more selected files.

## Project Options

---

**Project Options** refers to the [storage option](#) in the Oxygen XML Developer preference pages (**Options > Preferences**). If you select **Project Options**, the options in that particular preferences page are stored at project level in the project file (.xpr), which can easily be [shared with other users](#).

## QName

---

**QName** stands for "qualified name" and defines a valid identifier for elements and attributes. *QNames* are used as URI references to reference particular elements or attributes within XML documents.

## Quick Assist

---

The **Quick Assist** feature gives you easy access to some of the most commonly used actions for the specific type of document you are editing. If one or more actions are available in the current context, they are accessible via a yellow bulb help (💡) placed at the current line in the stripe on the left side of the editor in **Text** mode. You can also invoke the quick assist menu by using the **Alt + 1 (Meta + Alt + 1 on Mac OS X)** keyboard shortcuts.

## Quick Fix

---

The **Quick Fix** support in Oxygen XML Developer helps you resolve errors that appear in an XML document by offering proposals to fix problems such as missing required attributes or invalid elements. *Quick Fixes* are available in **Text** mode and they can be presented and activated in several ways.

- When hovering over an area of text where a validation error or warning occurs, the *Quick Fix* proposals can be presented as links in a tooltip pop-up window.
- If you place the cursor in the highlighted area where a validation error or warning occurs, a *Quick Fix* icon (💡) is displayed in the stripe on the left side of the editor. Clicking that icon will allow you select from the available proposals.
- If you place the cursor in the highlighted area where a validation error or warning occurs, you can also access the *Quick Fix* menu by pressing **Alt + 1 (Command + Alt + 1 on OS X)** on your keyboard.

Oxygen XML Developer also provides support for [defining and customizing a library of Quick Fixes using the Schematron language](#).

## Root Map

---

A **Root Map** (or master map) specifies a [DITA map](#) that defines a hierarchical structure of submaps that are contained within the *root map*. Essentially, the *root map* defines a scope and provides the mechanism to allow your defined keys to be propagated throughout the entire map structure (this mechanism is also known as a [key space](#)).

## Space-Preserved Element

---

A **spaced-preserved element** refers to elements that require white spaces and line endings to be preserved (for example, DITA codeblock and pre elements).

## Subject Scheme Map

---

A **Subject Scheme Map** allows you to create custom controlled attribute values and to manage metadata. *Subject scheme maps* use a key definition to define a collection of controlled values rather than a collection of topics. The highest level of map that uses the set of controlled values must reference the *subject scheme map* in which those controlled values are defined.

A controlled value is a keyword that can be used as a value in a metadata attribute. For example, the @audience metadata attribute may take a value that identifies the user group associated with a particular content unit (for medical equipment, that might include *therapist*, *oncologist*, *surgeon*, *radiologist*, and so on).

## WebHelp Output Directory

---

**WebHelp\_OUTPUT\_DIR** refers to the output directory where WebHelp transformation files will be generated.

The output directory can be specified using the **Output Directory** text field in the **Output** tab of the transformation scenario dialog box.

When running the WebHelp transformation from a command line, the output directory can be specified using the -o or --output option.

## Working Set

---

A **Working Set** refers to a set of files that will be used for the scope of search and refactoring operations. Many of the search and refactoring wizards include a step where you can specify the scope for the operation and you can choose one or more *working sets* to restrict the scope to that specified set of files.

## XML Catalog

---

An **XML Catalog** maps a system ID or a URI reference for a resource (stored either remotely or locally) to a local copy of the same resource. Whenever XML processing relies on external resources (such as referenced schemas and stylesheets), the use of an *XML Catalog* becomes a necessity when Internet access is not available or the connection is slow.

Oxygen XML Developer includes default global catalogs as well as default catalogs for each of the built-in [frameworks](#), and you can also create your own. Oxygen XML Developer uses these *XML Catalogs* to resolve references for document validation and transformations. For more information, see [Working with XML Catalogs](#) on page 432.

# Index

## A

- Add fonts to built-in FO processor [937, 937](#)
- Add hyphenation libraries to built-in DITA-OT FO processor [940](#)
- Add hyphenation libraries to built-in FO processor [940](#)
- Add PDF image support to built-in DITA-OT FO processor [940](#)
- Add PDF image support to built-in FO processor [940](#)
- Add Schematron Quick Fix [651](#)
- Add-on preferences [51](#)
- Add-ons
  - Batch converter [1070](#)
  - Check for add-on updates [41](#)
  - DITA prolog updater [1071](#)
  - Excel XLSX libraries [1071](#)
  - ICU4J library [1072](#)
  - Install new add-ons [41](#)
  - Manage add-ons [41](#)
  - Saxon XSLT and XQuery transformer [1072](#)
  - Translation package builder [1072](#)
  - XSpec Helper View [1073](#)
- Adding custom views [1052](#)
- Additional Framework plugin extension [1046](#)
- Additional languages plugin extension [1047](#)
- Additional XProc engine plugin extension [1046](#)
- Addon [1265](#)
- Addons [1265](#)
- Annotation preferences [84](#)
- Ant build files
  - Component Dependencies view [503](#)
  - Content completion [499](#)
  - Editing in Master Files context [498](#)
  - Highlight occurrences [504](#)
  - Outline view [500](#)
  - Quick Assist feature [506](#)
  - Quick fix support [499](#)
  - Refactoring actions [505](#)
  - Resource Hierarchy/Dependencies view [502](#)
  - Search declarations [504](#)
  - Search references [504](#)
  - Syntax highlighting [500](#)
  - Transforming [498](#)
  - Validation [498](#)
- Ant preferences [116](#)
- Ant transformation scenario
  - Options tab [773](#)
  - Output tab [774](#)
  - Parameters tab [774](#)
- Antenna House Formatter processor [712](#)
- Appearance preferences [47](#)
- Archive preferences [130](#)
- Archives
  - Browse [948](#)
  - Edit files [952](#)
  - EPUB [950](#)
  - File browser [948](#)
  - Migrate OOXML to DITA [952](#)
  - Migrate OOXML to TEI [952](#)
  - Modify [948](#)
  - ODF [950](#)
  - OOXML [950](#)
- Associate schema directly in XML documents [424](#)

- Associate schema in a framework configuration [427](#)
- Associate schema in a validation scenario defined in framework [423](#)
- Associate schema through a validation scenario [420](#)
- Associate schema to an XML document [420](#)
- Attributes view in Design mode [235, 540](#)
- Attributes view in Text mode [185, 199, 376](#)
- Author Action dialog box [56](#)
- Author editing mode
  - Entities view [187, 202, 378](#)
  - Model view [183, 201, 374](#)
- Automated tests [1060](#)
- Automatic Spell Check [325](#)
- Automatic validation [403](#)
- Available memory [162](#)

## B

- BaseX database connection [994](#)
- BaseX database contextual menu actions [994](#)
- BaseX XQJ connection [996](#)
- Batch converter add-on [1070](#)
- Batch transformation [798](#)
- Berkeley DB XML database connection [970](#)
- Berkeley DB XML database contextual menu actions [972](#)
- Berkeley DB XML debugging [975, 1006](#)
- Bidirectional text in Grid mode [226, 330](#)
- Bidirectional text in Text mode [209, 330](#)

## C

- Canonicalize files tool [459, 1113](#)
- Certificates preferences [117](#)
- Change file permissions on remote FTP server [285](#)
- Change language for interface [159](#)
- Changing the font size in Text mode [171, 362](#)
- Character Map dialog box [327](#)
- Check for add-on updates [41](#)
- Check Spelling [319](#)
- Check Spelling in multiple Files [325](#)
- Check Well-Formedness action [402](#)
- Chemistry processor [712](#)
- CHM Error HHC5003: Compilation failed while compiling file [1251, 1251](#)
- CHM Error HHC5010: Cannot open file [1251, 1251](#)
- Class Loader [1060](#)
- Class Loader issues [1058](#)
- Close file [289](#)
- Code template preferences [89](#)
- Code templates [188, 379](#)
- Color preferences [48](#)
- Common problems and solutions [1244](#)
- Compare Directories Against a Base tool [351, 1143](#)
- Compare Directories tool
  - Compare images [351, 1142](#)
  - Menus [350, 1141](#)
  - Toolbar [349, 1140](#)
- Compare Files tool
  - Command line arguments [339, 1130](#)
  - Integrate with Git [340, 1131](#)



- Integrate with SourceTree [341, 1132](#)
- Menus [344, 1135](#)
- Toolbar [341, 1133](#)
- Comparing files and directories [333](#)
- Compile LESS to CSS [608](#)
- Compile XSL Stylesheet for Saxon tool [496, 1102](#)
- Components Validation plugin extension [1046](#)
- Configure transformation scenario [793](#)
- Configure Transformation Scenario dialog box [795](#)
- Configuring options [141](#)
- Configuring Oxygen [44](#)
- Configuring Toolbars [149, 272](#)
- Content Completion Assistant in Grid Mode [230, 401](#)
- Content completion helper views [183, 374](#)
- Content completion in Text Mode [179, 370](#)
- Content completion preferences [83](#)
- Contextual menu actions in Text Mode [216, 388](#)
- Contextual menu of current editor tab [289](#)
- Convert database to XML Schema [566, 1098](#)
- Convert JSON to XML [631, 1100](#)
- Convert schema to another schema language [564, 1096](#)
- Convert XML to JSON [632, 1101](#)
- Copy/Paste in Grid Mode [229, 399](#)
- Create DTD from learned document structure [427](#)
- Create new transformation scenario [749](#)
- Create new validation scenario [409](#)
- Create Schematron Quick Fix [651](#)
- Creating Markdown documents [665](#)
- Creating new documents [273](#)
- CSS stylesheets
  - Content completion [604](#)
  - Custom CSS properties [604](#)
  - Editing features [603](#)
  - Folding [606](#)
  - Format and indent (pretty print) [606](#)
  - Minifying [606](#)
  - Outline view [605](#)
  - Syntax highlighting [605](#)
  - Validation [604](#)
- CSS validation preferences [95](#)
- Custom editor variables [136](#)
- Custom Protocol plugin extension [1048](#)
- Custom system properties [156](#)
- Custom validation engine preferences [93](#)
- Custom XML refactoring operations [444, 1081](#)
- Custom XSLT/XQuery transformation engine preferences [114](#)
- Customize document templates [278](#)
- Customizing default options [142](#)

## D

- Data Source Explorer view [953](#)
- Data Sources preferences page [120](#)
- Database connection preferences [120](#)
- Database drivers [123](#)
- Database perspective [166](#)
- Databases
  - Connections
    - BaseX
      - Contextual menu actions [994](#)
      - XQJ [996](#)
    - Berkeley DB XML
      - Contextual menu actions [972](#)
      - Debugging [975, 1006](#)

- Documentum xDB
  - Contextual menu actions [986](#)
  - Parser configuration [989](#)
- eXist
  - Contextual menu actions [977](#)
- Generic JDBC [992](#)
- IBM DB2
  - Contextual menu actions [960](#)
- JDBC-ODBC [993](#)
- MarkLogic
  - Contextual menu actions [984](#)
  - Debugging [982, 1005](#)
  - MarkLogic development [981](#)
- Microsoft SQL Server
  - Contextual menu actions [963](#)
- MySQL [990](#)
- Oracle
  - Contextual menu actions [966](#)
- PostgreSQL
  - Contextual menu actions [970](#)
- SharePoint
  - Contextual menu actions [1010](#)
  - SharePoint Browser view [1007](#)
- WebDAV
  - Contextual menu actions [998](#)
- Data Source Explorer view [953](#)
- SQL support [999](#)
- Table Explorer view [954](#)
- XQuery
  - Debugging
    - Berkeley DB XML [975, 1006](#)
    - MarkLogic [982, 1005](#)
  - Drag and drop from Data Source Explorer [1002](#)
  - Transformations [1002](#)
  - Validation [1002](#)
- Debug PDF transformation [941](#)
- Debugger preferences [110](#)
- Debugging XQuery
  - Breakpoints [1038](#)
  - Debugging Java extensions [1043](#)
  - Identify expressions [1036](#)
- Information views
  - Breakpoints view [1027](#)
  - Context view [1028](#)
  - Messages view [1029](#)
  - Nodes/Values Set view [1034](#)
  - Output Mapping Stack view [1031](#)
  - Stack view [1030](#)
  - Templates view [1033](#)
  - Trace view [1032](#)
  - Variables view [1034](#)
  - XPath Watch view [1028](#)
- Layout [1023](#)
- Performance profiling [1039](#)
- Profiling
  - Hotspots view [1041](#)
  - Invocation Tree view [1040](#)
- Steps in a typical debugging process [1036](#)
- Toolbar [1024](#)
- Debugging XSLT
  - Breakpoints [1038](#)
  - Debugging Java extensions [1043](#)
  - Debugging XSLT that call Java extensions [1042](#)
  - Identify expressions [1036](#)



- Information views
  - Breakpoints view [1027](#)
  - Context view [1028](#)
  - Messages view [1029](#)
  - Nodes/Values Set view [1034](#)
  - Output Mapping Stack view [1031](#)
  - Stack view [1030](#)
  - Templates view [1033](#)
  - Trace view [1032](#)
  - Variables view [1034](#)
  - XPath Watch view [1028](#)
- Layout [1023](#)
- Performance profiling [1039](#)
- Profiling
  - Hotspots view [1041](#)
  - Invocation Tree view [1040](#)
- Steps in a typical debugging process [1036](#)
- Supported processors [1043](#)
- Toolbar [1024](#)
- Debugging XSLT that call Java extensions [1042](#)
- Design editing mode
  - Attributes view [235, 540](#)
  - Components
    - Grouping components [263, 533](#)
    - xs:all [258, 528](#)
    - xs:alternative [255, 525](#)
    - xs:any [259, 529](#)
    - xs:anyAttribute [259, 529](#)
    - xs:assert [262, 532](#)
    - xs:attribute [249, 519](#)
    - xs:attributeGroup [251, 521](#)
    - xs:choice [258, 528](#)
    - xs:complexType [251, 521](#)
    - xs:element [246, 516](#)
    - xs:field [262, 532](#)
    - xs:group [255, 525](#)
    - xs:import [256, 526](#)
    - xs:include [256, 526](#)
    - xs:key [260, 530](#)
    - xs:keyRef [261, 531](#)
    - xs:notation [257, 527](#)
    - xs:openContent [263, 533](#)
    - xs:override [257, 527](#)
    - xs:redefine [257, 527](#)
    - xs:schema [245, 515](#)
    - xs:selector [261, 531](#)
    - xs:sequence [258, 528](#)
    - xs:simpleType [253, 523](#)
    - xs:unique [260, 530](#)
  - Contextual menu actions [239, 509](#)
  - Editing actions [238, 508](#)
  - Facets view [237, 542](#)
  - Navigation [232, 508](#)
  - Outline view [233, 538](#)
  - Palette view [238, 542](#)
- Design mode preferences [74](#)
- Detect Master Files [303](#)
- Detect Master Files from Project [303](#)
- Diagram preferences [73](#)
- Diff Directories tool [347, 1138](#)
- Diff Files tool [334, 1125](#)
- Digital Signature
  - Canonicalize files [459, 1113](#)
  - Certificates [458](#)
  - Sign files [460, 1114](#)
  - Verify signature [461, 1116](#)
- Digital Signatures
  - Example of how to digitally sign XML content [461](#)
  - Overview [457](#)
- Directory comparison appearance preferences [130](#)
- Directory comparison preferences [129](#)
- DITA
  - Automate Output with Jenkins [819, 890](#)
  - Automate Output with Travis CI [820, 891](#)
  - Output
    - Add Edit link in PDF output to launch Oxygen XML Web Author [933](#)
    - PDF output customization
      - Add watermark [932](#)
      - Creating a customization directory [930](#)
      - Customize 'Note' images [934](#)
      - Customize header/footer [932](#)
      - Force page breaks [934](#)
      - Set font [935](#)
      - Show comments and tracked changes [934](#)
  - PDF output customization
    - Add Edit link to launch Oxygen XML Web Author [933](#)
    - Add watermark [932](#)
    - Creating a customization directory [930](#)
    - Customize 'Note' images [934](#)
    - Customize header/footer [932](#)
    - Force page breaks [934](#)
    - Set font [935](#)
    - Show comments and tracked changes [934](#)
- DITA and Markdown documents [670](#)
- DITA Logging preferences [119](#)
- DITA Map document type [690](#)
- DITA Map to CHM (Compiled Help) transformation [748](#)
- DITA Map to Kindle transformation [748](#)
- DITA Map to MS Office Word transformation [747](#)
- DITA Map to PDF transformation [711](#)
- DITA Map to PDF WYSIWYG transformation [712](#)
- DITA Map to PDF WYSIWYG Transformation
  - Accessibility [742, 742](#)
  - Back matter
    - Style topics [724](#)
  - Bookmarks
    - Limit section depth [734](#)
    - Remove numbering [734](#)
  - Cover page
    - Add empty pages [723](#)
    - Add text [722](#)
    - Background image [722](#)
    - Place cover on left side [723](#)
    - Place cover on right side [723](#)
    - Title styling [722](#)
  - Customization CSS [713](#)
  - Debugging [713](#)
  - Double sided pagination
    - Force even number of pages [731](#)
    - Force odd number of pages [731](#)
    - Start chapters on odd page [731](#)
    - Style blank pages [731](#)
    - Style first page [731](#)
  - Footer
    - Add copyright [737](#)
  - Front matter
    - Page breaks [724](#)
    - Style topics [724](#)

- Header
  - Add background image [737](#)
  - Change separators [738](#)
  - Only keep chapter title [737](#)
  - Styling [738](#)
- Hyphenation
  - Enable or disable for tables [742](#)
  - Entire map [742](#)
- i18n
  - Custom language [743](#)
- Images
  - Resolution [745](#)
  - Rotate [745](#)
  - Side by side with text [745](#), [745](#)
  - Size [744](#)
  - Wide [745](#)
- Index
  - Add a leader [740](#)
  - Change number format [740](#)
  - Change style and letters [739](#)
  - Style labels [739](#)
- Links [744](#)
- Localization
  - Custom language [743](#)
- Metadata
  - Cover page [719](#)
  - Custom [718](#)
  - Footer [720](#), [720](#)
  - Header [720](#), [720](#)
- Numbering
  - Deep numbering [727](#)
  - Deeper numbering for sections [730](#)
  - Remove prefix [730](#)
  - Reset page numbers [730](#)
  - Shallow numbering [726](#)
- Page breaks
  - Avoid in lists and tables [741](#)
  - Enforce number of lines [741](#)
  - Force before or after topic [741](#)
- Page size
  - Change setting for an element [716](#)
  - Changing [715](#)
  - Orientation [716](#)
- Styling [744](#)
- Table of contents
  - Change header [733](#)
  - Display topic before TOC [733](#)
  - Start on odd page [733](#)
  - Style [732](#)
- Tables
  - Automatic layout [747](#)
  - Rotate [746](#)
  - Text bleeding [746](#)
  - Wide [746](#)
- Translation
  - Custom language [743](#)
- DITA Map to WebHelp Classic transformation [708](#)
- DITA Map to WebHelp Responsive transformation [703](#)
- DITA Map transformations [703](#)
- DITA Maps
  - Transformation scenarios [703](#)
- DITA new topics preferences [118](#)
- DITA OT preferences [118](#)
- DITA OT transformation scenario
  - Advanced tab [769](#)
  - Filters tab [769](#)
  - FO Processor tab [767](#)
  - Output tab [771](#)
  - Parameters tab [768](#)
  - Skins tab [764](#)
  - Templates tab [765](#)
- DITA preferences [118](#)
- DITA prolog updater add-on [1071](#)
- DITA publishing preferences [119](#)
- DITA to Word [747](#)
- DITA Topic document type [689](#)
- DocBook
  - Output
    - PDF output customization
      - Show comments and tracked changes [936](#)
    - PDF output customization
      - Show comments and tracked changes [936](#)
- DocBook 4 document type [681](#)
- DocBook 5 document type [684](#)
- DocBook 5.1 Assembly [687](#)
- DocBook 5.1 document type [684](#)
- DocBook 5.1 Topic document type [688](#)
- DocBook olink [681](#), [684](#)
- DocBook Targetset document type [689](#)
- DocBook to DITA transformation [702](#)
- DocBook to EPUB transformation [702](#)
- DocBook to PDF output customization [935](#)
- DocBook to PDF transformation [702](#)
- DocBook to WebHelp transformation [700](#)
- DocBook transformations [699](#)
- Document checking preferences [77](#)
- Document plugin extension [1056](#)
- Document template preferences [93](#)
- Document templates
  - Creating [277](#)
  - Customizing [278](#)
- Document type association preferences [51](#)
- Document type configuration dialog box
  - Association rules tab [53](#)
- Author tab
  - Actions subtab [56](#)
  - Content Completion subtab [65](#)
  - Contextual Menu subtab [63](#)
  - CSS subtab [55](#)
  - Menu subtab [62](#)
  - Toolbar subtab [64](#)
- Catalogs tab [67](#)
- Classpath tab [55](#)
- Extensions tab [69](#)
- Schema tab [54](#)
- Templates tab [66](#)
- Transformation tab [67](#)
- Validation tab [68](#)
- Document Types [680](#)
- Documents with long lines [332](#)
- Documentum xDB database connection [985](#)
- Documentum xDB database contextual menu actions [986](#)
- Documentum xDB database parser configuration [989](#)
- Documentum xDB troubleshooting [989](#)
- Drag and Drop in Grid Mode [228](#), [398](#)
- Drag and Drop in Text Mode [177](#), [368](#)
- DTD Entities [434](#), [434](#)
- Duplicate transformation scenario [794](#)

## E

- Edit mode preferences [71](#)
- Edit validation scenario [413](#)
- Editing actions in Grid Mode [227](#), [397](#)
- Editing Modes
  - Design [231](#), [507](#)
  - Grid [224](#)
  - Text [168](#)
- Editing XML markup in Text Mode [172](#), [364](#)
- Editing XSLT
  - Compile XSL Stylesheet for Saxon tool [496](#), [1102](#)
- Editor perspective [163](#)
- Editor preferences [70](#)
- Editor variables
  - Custom editor variables [156](#)
- Elements view in Text mode [186](#), [202](#), [377](#)
- Encoding preferences [69](#)
- Entities view [187](#), [202](#), [378](#)
- EPUB document type [695](#)
- Error: 1248 WARN org.apache.fop.apps.FOUserAgent [1250](#)
- Error: Anttask - Error rendering fo file [1250](#)
- Error: Cannot find files.log file [1247](#)
- Error: Could not create MSXML object [1254](#)
- Error: Incorrect Function Windows service error [39](#), [1259](#)
- Error: java.io.FileNotFoundException [1250](#)
- Error: Navigation to the web page was canceled [1255](#)
- Error: OutOfMemory [1242](#), [1243](#)
- Error: OutofMemoryError [1255](#)
- Error: Process Terminated Unexpectedly [40](#), [1259](#)
- Error: Segmentation fault [1257](#)
- Error: stack overflow [1243](#)
- Error: Startup crash - Fault Module Name nvoglv32.dll [1247](#)
- Excel XLSX libraries add-on [1071](#)
- Executing SQF in Other Documents [656](#)
- eXist database connection [975](#)
- eXist database contextual menu actions [977](#)
- Export color themes [47](#)
- Export Global Options [145](#)
- Export Global Transformation Scenarios [151](#)
- Export Global Validation Scenarios [151](#)
- Export Layout [146](#), [268](#)
- Export to Excel [230](#), [401](#)
- Exporting Markdown documents [664](#)
- Extending Oxygen with plugins [1044](#)
- External DITA-OT plugin extension [1048](#)
- External tool configuration [131](#)
- External tool preferences [131](#)
- External Tools [1240](#)

## F

- Facets view in Design mode [237](#), [542](#)
- File comparison appearance preferences [128](#)
- File comparison preferences [127](#)
- File extension association [145](#)
- File properties [290](#)
- File related actions in Text Mode [209](#), [382](#)
- File type preferences [134](#)
- Find All Elements action [317](#)
- Find All Elements dialog box [317](#)
- Find/Replace action [313](#)
- Find/Replace dialog box [313](#)
- Find/Replace in Files action [314](#)
- Find/Replace in multiple files [314](#)

- Finding/Replacing text
  - Find All Elements dialog box [317](#)
  - Find/Replace dialog box [313](#)
  - Find/Replace in multiple files [314](#)
  - Navigating Find/Replace matches [318](#)
  - Quick Find toolbar [318](#)
- Flatten Schema tool [566](#), [1098](#)
- Floating license server [30](#)
- FO processor preferences [111](#)
- Folding in Text Mode [176](#), [368](#)
- Font preferences [50](#)
- Font size configuration in Text mode [171](#), [362](#)
- FOP Error [1249](#), [1250](#)
- Format and Indent Files tool [214](#), [386](#), [1103](#)
- Format and Indent in Text Mode [210](#), [383](#)
- Format/Indent multiple files [214](#), [386](#), [1103](#)
- Formatting preferences [78](#)
- Formatting Schematron Quick Fix Content [656](#)
- Framework customization
  - Deploying as Add-ons [1060](#)
- Framework directory locations [52](#)
- Frameworks [680](#)
- FTP connection settings [139](#)

## G

- General plugin extension [1054](#)
- Generate Documentation tools [1104](#)
- Generate Sample XML Files tool
  - Advanced tab [554](#), [1095](#)
  - From command line [554](#), [1095](#)
  - Options tab [552](#), [1093](#)
  - Schema tab [550](#), [1091](#)
- Generate WSDL Documentation tool [597](#), [1111](#)
- Generate XML Schema Documentation tool
  - Customize PDF output for DITA [562](#)
  - Customize PDF output for DocBook [562](#)
  - From command line [563](#)
  - Output formats [558](#)
- Generate XSLT Stylesheet Documentation tool
  - Custom format [494](#)
  - From command line [495](#)
  - HTML format [492](#)
- Generic JDBC database connection [992](#)
- Getting familiar with the interface [3](#), [267](#)
- Getting Started with Oxygen
  - Help [7](#)
  - Interface [3](#), [267](#)
  - Resources to help you with Oxygen [4](#)
  - Shortcut keys [10](#)
  - Supported document types [4](#)
- Global Options [143](#)
- Global preferences [46](#)
- Grid editing mode
  - Bidirectional text [226](#), [330](#)
  - Content Completion Assistant [230](#), [401](#)
  - Copy/Paste [229](#), [399](#)
  - Drag and Drop [228](#), [398](#)
  - Editing actions [227](#), [397](#)
  - Export to Excel [230](#), [401](#)
  - Special characters [226](#), [330](#)
- Grid editing modes
  - Layout [224](#)
  - Navigation [225](#)
- Grid mode preferences [73](#)

## H

- Help
  - Randomize XML text content [9](#)
  - Support related resources [7](#)
  - Using the Help menu [7](#)
- Hex Viewer tool [1123](#)
- Highlight ID occurrences in Text Mode [215, 388](#)
- Highlights [356](#)
- HTML fragment extensions [885](#)
- HTML page layout files [874](#)
- HTTP authentication schemes [287](#)
- HTTP connection settings [138](#)
- HTTP floating license server
  - Management and Statistics [33](#)
  - Replacing [35](#)
  - Upgrading [35](#)
- HTTPS troubleshooting [285](#)

## I

- IBM DB2 database connection [958](#)
- IBM DB2 database contextual menu actions [960](#)
- Import color themes [47](#)
- Import data dynamically [1019](#)
- Import Global Options [145](#)
- Import Global Transformation Scenarios [151](#)
- Import Global Validation Scenarios [151](#)
- Import preferences [116](#)
- Importing data [1012](#)
- Importing data from a database [1016](#)
- Importing data from Excel [1014](#)
- Importing data from HTML files [1018](#)
- Importing Data from text files [1012](#)
- Increase memory [162](#)
- Indenting Schematron Quick Fix Content [656](#)
- Information view [356](#)
- Information view preferences [140](#)
- Insert File in Text mode [209, 382](#)
- Install new add-ons [41](#)
- Installing Oxygen
  - Floating license servers
    - Machine Signature [39, 1254](#)
  - Group deployment [26](#)
  - Java Web Start Installer [24](#)
  - Licensing [26](#)
  - Linux Installation [19](#)
  - Linux/Unix Server Installation [23](#)
  - Mac OS X Installation [18](#)
  - TCP floating license server
    - All Platforms distribution
      - Replacing [38](#)
      - Upgrading [38](#)
    - Windows 32-bit
      - Incorrect Function error [39, 1259](#)
      - Process Terminated Unexpectedly error [40, 1259](#)
      - Replacing [37](#)
      - Upgrading [37](#)
  - Transfer license key [30](#)
  - Upgrading [40](#)
  - Windows Installation [16](#)
  - Windows Server Installation [22](#)
- Integrate Schematron Quick Fixes in a framework [660](#)
- Integrating external tools [1240](#)
- Introduction [1](#)

## J

- JATS document type [694](#)
- Java system properties [156](#)
- Java VM parameters [160](#)
- JavaScript documents
  - Content Completion [636](#)
  - Editing features [634](#)
  - Outline view [637](#)
  - Syntax highlighting [637](#)
  - Validation [636](#)
- JDBC-ODBC database connection [993](#)
- Jenkins integration [819, 890](#)
- JSON documents
  - Folding [630](#)
  - Grid mode editing features [629](#)
  - JSON to XML converter [631, 1100](#)
  - Outline view [630](#)
  - Syntax highlighting [630](#)
  - Text mode editing features [628](#)
  - Validation [630](#)
  - XML to JSON converter [632, 1101](#)
- JSON to XML tool [631, 1100](#)
- jTEI document type [693](#)

## K

- Kerberos [287](#)

## L

- Large documents [331](#)
- Large File Viewer tool [1121](#)
- Layout configuration [146, 268](#)
- Layout preferences [50](#)
- LESS stylesheets
  - Compile to CSS [608](#)
  - Content completion [607](#)
  - Editing features [606](#)
  - Syntax highlighting [607](#)
  - Validation [607](#)
- Licensing Oxygen
  - Floating license
    - Reserve floating license [30](#)
  - Floating licenses [28](#)
  - Named-user license [27](#)
  - Register a floating license for multiple users [36](#)
  - Release a floating license [29](#)
  - Request a floating license
    - HTTP license server [28](#)
    - TCP license server [29](#)
- Linux - Gnome / Ubuntu main menu alignment issues [1244](#)
- Load Layout [146, 268](#)
- Localizing frameworks [61](#)
- Localizing SQF messages [656](#)
- Localizing the user interface [159](#)
- Localizing XML refactoring operations [456, 1090](#)
- Lock Handler plugin extension [1049](#)
- Lock/Unlock XML tags in Text Mode [210, 383](#)
- Locking a floating license [30](#)

## M

- Manage add-ons [41](#)

- Manage highlighted content in Text Mode [214, 387](#)
- Manual validation actions [404](#)
- Markdown documents
  - Actions in Markdown Editor [665](#)
  - Creating Markdown documents [665](#)
  - DITA [670](#)
  - Markdown Editor [664](#)
  - Rules and specifications [671](#)
  - Syntax highlighting [670](#)
  - Validation [670](#)
- Markdown Editor [664](#)
- MarkLogic database connection [979](#)
- MarkLogic database contextual menu actions [984](#)
- MarkLogic debugging [982, 1005](#)
- MarkLogic for the developer [981](#)
- Markup transparency in Text Mode [209, 382](#)
- Master Files
  - Add files [304](#)
  - Contextual menu [304](#)
  - Detecting [303](#)
  - Enabling [303](#)
  - Overview [302](#)
  - Transformations [304](#)
  - Validation [304](#)
- Memory availability [162](#)
- Menu Shortcut Keys [132](#)
- Message preferences [140](#)
- Microsoft SQL Server database connection [961](#)
- Microsoft SQL Server database contextual menu actions [963](#)
- Model view [183, 201, 374](#)
- Modular XML files [429](#)
- Move file tabs [288](#)
- Move XML resources [432](#)
- MSXML 3.0 and 4.0 preferences [106](#)
- MSXML.NET preferences [106](#)
- MySQL database connection [990](#)

## N

- Navigating in Text Mode [168, 360](#)
- Network connection preferences [137](#)
- New document from templates [277](#)
- New Document Wizard [273](#)
- New from Templates Wizard [277](#)
- New project [6, 291](#)
- NISO Journal Article Tag Suite document type [694](#)
- Non-XML files [290](#)
- NTLM [287](#)
- NVDL schemas
  - Component Dependencies view [625](#)
  - Content completion [624](#)
  - Diagram Editor
    - Contextual menu actions [624](#)
    - Full Model view [622](#)
    - Introduction [622](#)
    - Logical Model view [623](#)
  - Outline view [625](#)
  - Refactoring actions [626](#)
  - Search actions [626](#)
  - Syntax highlighting [625](#)
  - Validation [624](#)

## O

- Olink element [681, 684](#)
- Open File at Cursor in Text mode [209, 382](#)
- Open file at specific location [281](#)
- Open file at start-up [280](#)
- Open file in system application [280](#)
- Open preferences [87](#)
- Open Redirect plugin extension [1049](#)
- Open remote document [282](#)
- Open URL dialog box [282](#)
- Open With dialog box in Windows Explorer [1245](#)
- Open/Find Resource
  - In content [310](#)
  - In file paths [312](#)
  - In reviews [312](#)
- Open/Find Resource dialog box [308](#)
- Open/Find resource preferences [135](#)
- Open/Find Resource view [194, 306](#)
- Opening file [280](#)
- Option Page plugin extension [1049](#)
- Options Menu
  - Preferences [44](#)
- Oracle database connection [964](#)
- Oracle database contextual menu actions [966](#)
- Out Of Memory error [111, 1121](#)
- Outline view in Design mode [233, 538](#)
- Outline view in Text mode [197, 379](#)
- Outline view preferences [140](#)
- oxy:allows-child-element function [58](#)
- oxy:allows-global-element function [60](#)
- oxy:current-selected-element function [61](#)
- oxy:is-required-element function [61, 61](#)
- Oxygen SDK
  - Automated tests [1060](#)
  - CMS integration [1056](#)
  - Configuration [1044](#)
  - Custom Protocol [1059](#)
  - Debugging a plugin [1062](#)
  - Debugging an SDK extension [1062](#)
  - Deploying plugins as add-ons [1060](#)
  - Disable a plugin [1063](#)
  - Installation [1045](#)
  - Types of Extensions [1046](#)

## P

- PAC [138](#)
- Palette view in Design mode [238, 542](#)
- PDF output [930, 930](#)
- PDF Output Customization
  - DocBook to PDF output [935](#)
- Performance preferences [87](#)
- Perspectives
  - Database [166](#)
  - Editor [163](#)
  - XQuery Debugger [165](#)
  - XSLT Debugger [164](#)
- Plugin extensions
  - Additional Framework [1046](#)
  - Additional XProc engine [1046](#)
  - Components Validation [1046](#)
  - Contribute additional languages [1047](#)
  - Contribute external DITA-OT [1048](#)
  - Custom Protocol [1048](#)

- Document [1056](#)
  - General [1054](#)
  - Lock Handler [1049](#)
  - Open Redirect [1049](#)
  - Option Page [1049](#)
  - Refactoring Operations [1054](#)
  - Resource Locking [1050](#)
  - Selection [1055](#)
  - URL Stream Handler [1050](#)
  - Workspace Access
    - Adding custom views [1052](#)
  - Workspace Access (JS-based) [1053](#)
- Plugin preferences [130](#)
- Plugins
  - Automated tests [1060](#)
  - CMS integration [1056](#)
  - Configuration [1044](#)
  - Custom Protocol [1059](#)
  - Debugging [1062](#)
  - Debugging an SDK extension [1062](#)
  - Deploying plugins as add-ons [1060](#)
  - Disable a plugin [1063](#)
  - Installation [1045](#)
  - Types of Extensions [1046](#)
- PostgreSQL database connection [968](#)
- PostgreSQL database contextual menu actions [970](#)
- Predefined frameworks
  - DITA Map [690](#)
  - DITA Topic [689](#)
  - DocBook 4 [681](#)
  - DocBook 5 [684](#)
  - DocBook 5.1 [684](#)
  - DocBook 5.1 Assembly [687](#)
  - DocBook 5.1 Topic [688](#)
  - DocBook Targetset [689](#)
  - EPUB [695](#)
  - JATS [694](#)
  - jTEI [693](#)
  - TEI ODD [693](#)
  - TEI P5 [692](#)
  - XHTML [691](#)
- Predefined XML refactoring operations [440](#), [1077](#)
- Preferences
  - Add-ons [51](#)
  - Ant [116](#)
  - Appearance [47](#)
  - Application Layout [50](#)
  - Archive [130](#)
  - Code Templates [89](#)
  - Colors [48](#)
  - Content Completion [83](#)
  - Content Completion annotations [84](#)
  - CSS formatting [82](#)
  - CSS Validator [95](#)
  - Custom Editor Variables [136](#)
  - Custom Engines [114](#)
  - Custom Validation Engines [93](#)
  - Data Sources [120](#)
  - Debugger [110](#)
  - Diagram [73](#)
  - Directories Comparison [129](#)
  - Directories Comparison Appearance [130](#)
  - DITA [118](#)
  - DITA Logging [119](#)
  - DITA New topics [118](#)
  - DITA publishing [119](#)
  - Document Checking [77](#)
  - Document Templates [93](#)
  - Document Type Association [51](#)
  - Document type configuration dialog box [53](#)
  - Document Type locations [52](#)
  - Edit Modes [71](#)
  - Editor [70](#)
  - Encoding [69](#)
  - External Tools [131](#)
  - File Types [134](#)
  - Files Comparison [127](#)
  - Files Comparison Appearance [128](#)
  - FO Processor [111](#)
  - Fonts [50](#)
  - Format [78](#)
  - FTP/SFTP [139](#)
  - Global [46](#)
  - Grid mode [73](#)
  - HTTP(S)/WebDAV [138](#)
  - Import [116](#)
  - JavaScript Content Completion [86](#)
  - JavaScript formatting [82](#)
  - Mark Occurrences [93](#)
  - Menu Shortcut Keys [132](#)
  - Messages [140](#)
  - MSXML XSLT [106](#)
  - MSXML.NET XSLT [106](#)
  - Network Connection Settings [137](#)
  - Open/Find Resource [135](#)
  - Open/Save [87](#)
  - Plugins [130](#)
  - Print [71](#)
  - Proxy [137](#)
  - Relax NG parser [98](#)
  - Sample XML Files Generator [99](#)
  - Save Hooks [89](#)
  - Saxon-HE/PE/EE XQuery [108](#)
  - Saxon-HE/PE/EE XQuery Advanced [109](#)
  - Saxon-HE/PE/EE XSLT [103](#)
  - Saxon-HE/PE/EE XSLT Advanced [105](#)
  - Saxon6 XSLT [102](#)
  - Schema Design mode [74](#)
  - Schematron parser [98](#)
  - Spell Check [75](#)
  - Spell Check Dictionaries [76](#)
  - SSH [139](#)
  - SVN [124](#)
  - SVN Diff [126](#)
  - SVN Messages [126](#)
  - SVN Working Copy [125](#)
  - Syntax Highlight [86](#)
  - Templates [89](#)
  - Text mode [72](#)
  - Trusted Hosts [139](#)
  - Views [140](#)
  - Whitespaces [81](#)
  - XML [95](#)
  - XML Catalog [95](#)
  - XML formatting [79](#)
  - XML Parser [97](#)
  - XML Refactoring [118](#)
  - XML Schema parser [97](#)
  - XML Signing Certificates [117](#)
  - XML Structure Outline [140](#)



- XPath [114](#)
- XPath Content Completion [85](#)
- XPath formatting [82](#)
- XProc [101](#)
- XQuery [107](#)
- XQuery formatting [82](#)
- XQuery Profiler [110](#)
- XSD Content Completion [86](#)
- XSLT [102](#)
- XSLT Content Completion [85](#)
- XSLT Profiler [110](#)
- XSLT-FO-XQuery [102](#)
- XSLTProc [105](#)
- Prince Print with CSS processor [712](#)
- Print documents [357](#)
- Print preferences [71](#)
- Print Preview dialog box [357](#)
- Printing [357](#)
- Problems and solutions [1244](#)
- Project Options [143](#)
- Project view [188, 292](#)
- Project view preferences [140](#)
- Projects
  - Adding items to projects [6, 291](#)
  - Creating new projects [6, 291](#)
  - Image preview [300](#)
  - Managing resources [188, 292](#)
  - Master files
    - Add files [304](#)
    - Contextual menu [304](#)
    - Detecting [303](#)
    - Enabling [303](#)
    - Overview [302](#)
    - Transformations [304](#)
    - Validation [304](#)
  - Move resources [299](#)
  - Project view [188, 292](#)
  - Rename resources [299](#)
  - Sharing [300](#)
- Proxy auto-config script [138](#)
- Proxy preferences [137](#)
- Publishing [698](#)

## Q

- Quick Assist feature in Text Mode [215, 388](#)
- Quick Find toolbar [318](#)
- Quick fix support in XML documents [418](#)

## R

- RDP performance issues [1243](#)
- Read-only files [333](#)
- Rectangular Selection feature [177, 368](#)
- Refactoring Operations plugin extension [1054](#)
- Refactoring XML Documents [437, 1074](#)
- Register a floating license for multiple users [36](#)
- Regular expressions syntax [319](#)
- Relax NG schemas
  - Component Dependencies View [618](#)
  - Content completion [612](#)
  - Custom datatype library [621](#)
  - Diagram Editor
    - Contextual menu actions [611](#)

- Full Model view [609](#)
- Introduction [609](#)
- Logical Model view [610](#)
- Symbols [610](#)
- Editing in Master Files context [608](#)
- Moving resources [618](#)
- Outline view [614](#)
- Quick Assist feature [620](#)
- Refactoring actions [619](#)
- Renaming resources [618](#)
- Resource Hierarchy/Dependencies view [616](#)
- Search actions [619](#)
- Syntax highlighting [613](#)
- Validation [612](#)
- Release a floating license [29](#)
- Remote Desktop performance issues [1243](#)
- Rename XML resources [432](#)
- Request a floating license from a TCP license server [29](#)
- Request a floating license from an HTTP license server [28](#)
- Reserving a floating license [30](#)
- Reset Global Options [145](#)
- Reset Layout [146, 268](#)
- Resolve schemas through XML catalogs [427, 434](#)
- Resource Hierarchy/Dependencies view for XML documents [430](#)
- Resource Locking plugin extension [1050](#)
- Restricting Schematron Quick Fix operations [655](#)
- Results view
  - Make persistent copy of results [206](#)
- Run DITA OT Integrator transformation [748](#)

## S

- Sample XML File Generator preferences [99](#)
- Save file [281](#)
- Save preferences [87](#)
- Save remote document [282](#)
- Save template as button [766](#)
- Saxon 6 XSLT preferences [102](#)
- Saxon HE/PE/EE advanced XQuery preferences [109](#)
- Saxon HE/PE/EE advanced XSLT preferences [105](#)
- Saxon HE/PE/EE XQuery preferences [108](#)
- Saxon HE/PE/EE XSLT preferences [103](#)
- Saxon XSLT and XQuery transformer add-on [1072](#)
- Schema annotations in Text Mode [182, 373](#)
- Schema Design mode [231, 507](#)
- Schema Diagram Editor [231, 507](#)
- Schematron
  - Unit test (XSpec) [649](#)
- Schematron Quick Fix Operations
  - Add [652](#)
  - Delete [652](#)
  - Replace [652](#)
  - String Replace [652](#)
- Schematron Quick Fixes
  - Content Completion [657](#)
  - Customizing [651](#)
  - Defining [651](#)
  - Embedded [659](#)
  - Executing SQF in Other Documents [656](#)
  - Formatting and Indenting [656](#)
  - Highlight occurrences [658](#)
  - Integrating in a framework [660](#)
  - Localization [656](#)
  - Multiple similar quick fixes [656](#)

- Refactoring actions [658](#)
- Restricting operations [655](#)
- Search actions [658](#)
- SQF Operations [652](#)
- Use-When Condition [655](#)
- User Entry operation [655](#)
- Validation [657](#)
- Schematron schemas
  - Content completion [641](#)
  - Syntax highlighting [642](#)
- Schematron Schemas
  - Editing features [639](#)
  - Editing in Master Files context [640](#)
  - Embedded [642](#)
  - Highlight occurrences [647](#)
  - Moving resources [646](#)
  - Outline view [643](#)
  - Quick Assist feature [649](#)
  - Refactoring actions [647](#)
  - Renaming resources [646](#)
  - Resource Hierarchy/Dependencies view [645](#)
  - Search actions [647](#)
  - Validation [640](#)
- Scratch Buffer [333](#)
- Search actions for IDs [428](#)
- Search dialog box [313](#)
- Search multiple files [314](#)
- Search preferences [135](#)
- Searching documents
  - Open/Find Resource
    - In content [310](#)
    - In file paths [312](#)
    - In reviews [312](#)
  - Open/Find Resource dialog box [308](#)
  - Open/Find Resource view [194, 306](#)
- Searching in current file [312](#)
- Selecting content in Text Mode [177, 368](#)
- Selection plugin extension [1055](#)
- Set indent to zero in Text Mode [213, 386](#)
- Set schema for content completion in Text Mode [181, 372](#)
- SFTP connection settings [139](#)
- Share transformation scenarios [799](#)
- Share validation scenarios [417](#)
- SharePoint Browser view [1007](#)
- SharePoint contextual menu actions [1010](#)
- SharePoint database connection [1006](#)
- Sharing project level options [144](#)
- Sharing project options file
  - Minimize differences between versions [302](#)
- Sharing settings [144](#)
- Sharing Transformation Scenarios [300](#)
- Sharing Validation Scenarios [300](#)
- Sharing XML refactoring operations [455, 1090](#)
- Shortcut actions in Text Mode [171, 362](#)
- Shortcut key configuration [132](#)
- Shortcut Keys [10](#)
- Sign files tool [460, 1114](#)
- Signing XML document preferences [117](#)
- Simple text editor [290](#)
- Single sign-on [287](#)
- Smart Editing in Text Mode [170, 361](#)
- Some templates could not be loaded [899](#)
- Sorting exotic languages [1072](#)
- Special character preferences [87](#)
- Special characters
  - Character Map [327](#)
  - Fallback Font Support [328](#)
  - Inserting symbols [327](#)
  - Unsupported characters [329](#)
- Special characters in Grid mode [226, 330](#)
- Special characters in Text mode [209, 330](#)
- Spell check preferences [75](#)
- Spell checking
  - Add dictionaries [322](#)
  - Add term lists [323, 324](#)
  - Customizing dictionaries and term lists [321](#)
  - Dictionaries and term lists [321](#)
  - Forbidden words [323](#)
  - Ignored words [325](#)
  - Learned words [324](#)
  - Multiple files [325](#)
  - Replace dictionaries [324](#)
- Spell Checking
  - Automatic spell check [325](#)
- SQF
  - Content Completion [657](#)
  - Customizing [651](#)
  - Defining [651](#)
  - Embedded [659](#)
  - Executing SQF in Other Documents [656](#)
  - Formatting and Indenting [656](#)
  - Highlight occurrences [658](#)
  - Integrating in a framework [660](#)
  - Localization [656](#)
  - Multiple similar quick fixes [656](#)
  - Operations [652](#)
  - Refactoring actions [658](#)
  - Restricting operations [655](#)
  - Search actions [658](#)
  - Use-When Condition [655](#)
  - User Entry operation [655](#)
  - Validation [657](#)
- SQF attribute: use-for-each [656](#)
- SQF multi-lingual support [656](#)
- SQL transformation scenario [792](#)
- SSH connection settings [139](#)
- StackOverflowException error [95](#)
- Startup parameter
  - Application launcher parameters [160](#)
  - Command line script parameters [161](#)
  - Custom startup parameters file [161](#)
- Startup parameters [160](#)
- Status information [356](#)
- Storing global options [143](#)
- Storing project level options [143](#)
- Storing XML refactoring operations [455, 1090](#)
- StratML documents
  - Editing features [633](#)
- Supported document types [680, 696](#)
- Supported processors for XSLT/XQuery debugging [1043](#)
- SVG files
  - SVG Viewer [661, 1123](#)
  - SVG viewer in Results panel [662](#)
- SVG Viewer in Results panel [662](#)
- SVG Viewer tool [661, 1123](#)
- SVN Client
  - Authentication [1158](#)
  - Branches/Tags
    - Create branch/tag [1181](#)



- Exporting resources [1205](#)
- Importing resources [1203](#)
- Manage resources [1206](#)
- Merging [1182](#)
- Patching [1194](#)
- Relocate working copy [1194](#)
- Switch repository location [1192](#)
- Checking out a working copy [1161](#)
- Define a working copy [1160](#)
- Entering local paths and URLs [1237](#)
- History dialog box [1163](#)
- Manage repository locations [1157](#)
- Menus [1148](#)
- Preferences [1237](#)
- Properties [1180](#)
- Request history for a resource [1180](#)
- Request status information for a resource [1179](#)
- Resource History view
  - Directory Change Set view [1225](#)
- Revision Graph [1233](#)
- Share projects [1159](#)
- Sparse checkouts [1207](#)
- Status bar [1157](#)
- Synchronize with the SVN repository
  - Conflicts [1171](#)
  - Integrating bug tracking tools [1178](#)
  - Send changes to repository [1176](#)
  - Update working copy [1175](#)
  - View differences [1169](#)
- Technical issues [1238](#)
- Toolbar [1156](#)
- Use an existing working copy [1163](#)
- Views
  - Annotations view [1226](#), [1233](#)
  - Compare Images view [1231](#)
  - Compare view [1229](#)
  - Dynamic Help view [1233](#)
  - Editor view [1226](#)
  - History view [1221](#)
  - Image Preview panel [1231](#)
  - Properties view [1231](#)
  - Repositories view [1208](#)
  - Working Copy view [1211](#)
- Working copy resource management
  - Add resources [1164](#)
  - Copy resources [1166](#)
  - Delete resources [1166](#)
  - Edit files [1164](#)
  - Ignore resources [1166](#)
  - Lock/Unlock resources [1167](#)
  - Move resources [1167](#)
  - Rename resources [1167](#)
- SVN message preferences [126](#)
- SVN preferences [124](#)
- Switch file tabs [288](#)
- Syntax highlight preferences [86](#)
- Syntax highlighting in Text Mode [206](#), [379](#)
- Syntax highlights in Text mode [207](#)
- System properties [156](#)

## T

- Table Explorer view [954](#)
- Tags transparency selector [209](#), [382](#)
- TEI ODD document type [693](#)

- TEI P5 document type [692](#)
- Template descriptor file [871](#)
- Template resources [873](#)
- Text editing mode
  - Attributes view [185](#), [199](#), [376](#)
  - Bidirectional text [209](#), [330](#)
  - Content completion [179](#), [370](#)
  - Contextual menu actions [216](#), [388](#)
  - Drag and Drop [177](#), [368](#)
  - Editing XML markup [172](#), [364](#)
  - Elements view [186](#), [202](#), [377](#)
  - Entities view [187](#), [202](#), [378](#)
  - File related actions [209](#), [382](#)
  - Folding [176](#), [368](#)
  - Format and indent [210](#), [383](#)
  - Format and indent multiple files [214](#), [386](#), [1103](#)
  - Highlight ID occurrences [215](#), [388](#)
  - Lock/Unlock XML tags [210](#), [383](#)
  - Manage highlighted content [214](#), [387](#)
  - Markup transparency [209](#), [382](#)
  - Model view [183](#), [201](#), [374](#)
  - Navigation [168](#), [360](#)
  - Outline view [197](#), [379](#)
  - Rectangular selection [177](#), [368](#)
  - Schema annotations [182](#), [373](#)
  - Selecting content [177](#), [368](#)
  - Set indent to zero [213](#), [386](#)
  - Set schema for content completion [181](#), [372](#)
  - Shortcut actions [171](#), [362](#)
  - Smart Editing [170](#), [361](#)
  - Special characters [209](#), [330](#)
  - Syntax highlighting [206](#), [379](#)
  - Syntax highlights [207](#)
  - Validation errors [207](#), [404](#)
  - Views [188](#)
- Text mode preferences [72](#)
- Three-way directory comparison and merge tool [351](#), [1143](#)
- Three-way file comparison [334](#), [1125](#)
- Toolbar configuration [149](#), [272](#)
- Trackpad scroll function doesn't work on Lenovo Thinkpad [1256](#)
- Transform DITA document to MS Word [747](#)
- Transformation parameters [887](#)
- Transformation Scenarios
  - Ant [773](#)
  - Apply transformation scenarios [795](#)
  - Batch transformation [798](#)
  - Built-in transformation scenarios [699](#)
  - Configure [793](#)
  - Configure Calabash with XEP [941](#)
  - Configure Transformation Scenario dialog box [795](#)
  - Configure XSLT processor extension paths [758](#), [783](#)
  - Custom XSLT processor [757](#), [783](#)
  - Debugging PDF transformations [941](#)
  - DITA map [703](#)
  - DITA Map to CHM (Compiled Help) [748](#)
  - DITA Map to Kindle [748](#)
  - DITA Map to MS Office Word [747](#)
  - DITA Map to PDF [711](#)
  - DITA Map to PDF WYSIWYG [712](#)
  - DITA Map to WebHelp Classic [708](#)
  - DITA Map to WebHelp Responsive [703](#)
  - DITA OT [763](#)
  - DocBook [699](#)
  - DocBook to DITA [702](#)
  - DocBook to EPUB [702](#)

- DocBook to PDF [702](#)
- DocBook to WebHelp [700](#)
- Duplicate [794](#)
- Integrate external XProc engine [786](#)
- New [749](#)
- PDF output using Calabash XProc processor [941](#)
- Run DITA OT Integrator [748](#)
- Sharing [799](#)
- SQL [792](#)
- Supported XSLT processors [755](#), [781](#)
- XML with XQuery [758](#)
- XML with XSLT [749](#)
- XProc [784](#)
- XQuery [787](#)
- XSL-FO processors [936](#)
- XSLT [775](#)
- Transformation Scenarios view [799](#)
- Transformation types [793](#)
- Transforming Documents [698](#)
- Translation package builder add-on [1072](#)
- Travis CI integration [820](#), [891](#)
- Tree editor preferences [140](#)
- Tree Editor tool [1125](#)
- Trusted hosts connection settings [139](#)
- Two-way file comparison [334](#), [1125](#)

## U

- Unicode support [329](#)
- Uninstalling Oxygen [42](#)
- Upgrading Oxygen [40](#)
- Uppercase plugin [1055](#)
- URL Stream Handler plugin extension [1050](#)
- Use-When SQF Condition [655](#)
- User Entry SQF operation [655](#)
- Using a floating license offline [30](#)
- UTF-8 BOM handling [69](#)

## V

- Validating XML Documents
  - Against a schema [403](#)
  - Against Schematron [641](#)
  - Automatic validation [403](#)
  - Check Well-formedness [402](#)
  - Create new validation scenarios [409](#)
  - Custom validators [406](#)
  - Customizing error messages [406](#)
  - Edit validation scenarios [413](#)
  - Manual validation [404](#)
  - Resolving references to remote schemas [417](#)
  - Sharing scenarios [417](#)
  - Text Mode [207](#), [404](#)
- Validating XSLT that call Java extensions [464](#)
- Validation engine 'StackOverflowException' error [95](#)
- Validation errors in Text mode [207](#), [404](#)
- Validation preferences [77](#)
- Verify Signature tool [461](#), [1116](#)

## W

- WebDAV connection [997](#)
- WebDAV connection settings [138](#)
- WebDAV contextual menu actions [998](#)

- WebDAV over HTTPS [285](#)
- WebHelp Classic
  - Add custom HTML content [824](#)
  - Add Favicon [826](#)
  - Add logo image [826](#)
  - Add video and audio objects in DITA [827](#)
  - Add videos in DocBook [828](#)
  - Adding additional resources [831](#)
  - Changing icons in the table of contents [829](#)
  - Context-Sensitive [811](#)
  - Customize highlights in the table of contents [831](#)
  - Customize ordered lists [828](#)
  - Customizing
    - Overriding the XSLT processing step [848](#)
  - Disable caching [833](#)
  - Edit scoring in search results [829](#)
  - Exclude DITA topics from search results [833](#)
  - Flag DITA content [834](#)
  - Indexing Japanese content [846](#)
  - Integrate Facebook [835](#)
  - Integrate Google + [837](#)
  - Integrate Google Analytics [839](#)
  - Integrate Google Search [840](#)
  - Integrate Twitter [838](#)
  - Layout and features [803](#)
  - Localize email notifications [842](#)
  - Localizing the interface for DITA transformations [844](#)
  - Localizing the interface for DocBook transformations [845](#)
  - Overriding the XSLT processing step [848](#)
  - Publishing on SharePoint Site [851](#)
  - Remove Previous/Next links [852](#)
  - Right-to-Left languages [847](#)
  - Search engine optimization [847](#)
  - Skin Builder [853](#)
  - Use custom CSS [832](#)
- WebHelp Classic system [803](#)
- WebHelp Classic with Feedback
  - Deploying [808](#), [864](#)
  - Installing [808](#), [864](#)
- WebHelp feature matrix [802](#)
- WebHelp Responsive Output [854](#)
- WebHelp Responsive system
  - Add custom HTML content [901](#)
  - Configure tiles [905](#)
  - CSS styling to customize WebHelp output [900](#)
  - Customizing
    - XSLT-Import extension point [896](#)
    - XSLT-Parameter extension point [896](#)
    - XSLT-Import extension point [896](#)
    - XSLT-Parameter extension point [896](#)
- WebHelp Responsive Templates tab
  - Save template as button [766](#)
- WebHelp Responsive with Feedback
  - Deploying [808](#), [864](#)
  - Installing [808](#), [864](#)
- WebHelp System Output
  - WebHelp Classic [803](#)
  - WebHelp Responsive [854](#)
- Workspace Access (JS-based) plugin extension [1053](#)
- Workspace Access plugin extension [1051](#)
- WSDL documents
  - Component Dependencies view [592](#)
  - Content completion [585](#)
  - Editing in Master Files context [585](#)

- Generate documentation for WSDL documents
  - Custom format [600](#)
  - From command line [600](#)
  - HTML format [599](#)
- Highlight occurrences [593](#)
- Moving resources [592](#)
- Outline view [587](#)
- Quick Assist feature [596](#)
- Refactoring actions [594](#)
- Renaming resources [592](#)
- Resource Hierarchy/Dependencies view [590](#)
- Search actions [594](#)
- SOAP analyzer
  - Test remote files [602](#), [1118](#)
  - UDDI Registry Browser [602](#), [1118](#)
- Syntax highlighting [586](#)
- Validation [585](#)
- WSDL SOAP Analyzer tool
  - Test remote files [602](#), [1118](#)
  - UDDI Registry Browser [602](#), [1118](#)

## X

- XHTML document type [691](#)
- XHTML documents
  - Editing features [663](#)
- XInclude [434](#), [435](#)
- XInclude 1.1 features [435](#)
- XLIFF documents
  - Editing features [633](#)
- XML catalog preferences [95](#)
- XML Catalogs [432](#)
- XML documents
  - Associate schema [420](#)
  - Associate schema directly in XML documents [424](#)
  - Associate schema in a framework configuration [427](#)
  - Associate schema in a validation scenario defined in framework [423](#)
  - Associate schema through a validation scenario [420](#)
- Author Mode editing
  - Entities view [187](#), [202](#), [378](#)
  - Model view [183](#), [201](#), [374](#)
- Code templates [188](#), [379](#)
- DTD Entities [434](#), [434](#)
- Editing in Master Files context [429](#)
- Grid Mode editing
  - Content Completion Assistant [230](#), [401](#)
  - Copy/Paste [229](#), [399](#)
  - Drag and Drop [228](#), [398](#)
  - Editing actions [227](#), [397](#)
  - Export to Excel [230](#), [401](#)
- Learn document structure [427](#)
- Moving resources [432](#)
- Quick Assist feature [215](#), [388](#)
- Quick fix support [418](#)
- Refactoring
  - Custom operations [444](#), [1081](#)
  - Localizing operations [456](#), [1090](#)
  - Predefined operations [440](#), [1077](#)
  - Sharing operations [455](#), [1090](#)
  - Storing operations [455](#), [1090](#)
- Renaming resources [432](#)
- Resolve schemas through XML catalogs [427](#), [434](#)
- Resource Hierarchy/Dependencies view [430](#)
- Search actions for IDs [428](#)

- Text Mode editing
  - Attributes view [185](#), [199](#), [376](#)
  - Content completion [179](#), [370](#)
  - Contextual menu actions [216](#), [388](#)
  - Drag and Drop [177](#), [368](#)
  - Editing XML markup [172](#), [364](#)
  - Elements view [186](#), [202](#), [377](#)
  - Entities view [187](#), [202](#), [378](#)
  - File related actions [209](#), [382](#)
  - Folding [176](#), [368](#)
  - Format and indent [210](#), [383](#)
  - Format and indent multiple files [214](#), [386](#), [1103](#)
  - Highlight ID occurrences [215](#), [388](#)
  - Lock/Unlock XML tags [210](#), [383](#)
  - Manage highlighted content [214](#), [387](#)
  - Markup transparency [209](#), [382](#)
  - Model view [183](#), [201](#), [374](#)
  - Navigation [168](#), [360](#)
  - Outline view [197](#), [379](#)
  - Rectangular selection [177](#), [368](#)
  - Schema annotations [182](#), [373](#)
  - Selecting content [177](#), [368](#)
  - Set indent to zero [213](#), [386](#)
  - Set schema for content completion [181](#), [372](#)
  - Shortcut actions [171](#), [362](#)
  - Smart Editing [170](#), [361](#)
  - Syntax highlighting [206](#), [379](#)
- Validation
  - Against a schema [403](#)
  - Against Schematron [641](#)
  - Automatic validation [403](#)
  - Check Well-formedness [402](#)
  - Create new validation scenario [409](#)
  - Custom validators [406](#)
  - Customizing error messages [406](#)
  - Edit validation scenario [413](#)
  - Manual validation [404](#)
  - Resolving references to remote schemas [417](#)
  - Sharing scenarios [417](#)
  - Text Mode [207](#), [404](#)
- XInclude [434](#), [435](#)
- XML catalogs [432](#)
- XML documents without a schema [427](#)
- XML parser preferences [97](#)
- XML refactoring preferences [118](#)
- XML Refactoring tool
  - Custom operations [444](#), [1081](#)
  - Localizing operations [456](#), [1090](#)
  - Predefined operations [440](#), [1077](#)
  - Sharing operations [455](#), [1090](#)
  - Storing operations [455](#), [1090](#)
- XML Schema Design mode [231](#), [507](#)
- XML Schema Diagram Editor
  - Attributes view [235](#), [540](#)
  - Components [245](#), [515](#)
  - Contextual menu actions [239](#), [509](#)
  - Edit namespaces [266](#), [536](#)
  - Editing actions [238](#), [508](#)
  - Facets view [237](#), [542](#)
  - Navigation [232](#), [508](#)
  - Outline view [233](#), [538](#)
  - Palette view [238](#), [542](#)
  - Validation [265](#), [535](#)
- XML Schema Regular Expression Builder tool [568](#), [1119](#)

## XML Schemas

- Attributes view [235, 540](#)
- Component Dependencies view [546](#)
- Content completion [538](#)
- Convert DB Structure to XML Schema tool [566, 1098](#)
- Design mode editing
  - Components
    - Grouping components [263, 533](#)
    - xs:all [258, 528](#)
    - xs:alternative [255, 525](#)
    - xs:any [259, 529](#)
    - xs:anyAttribute [259, 529](#)
    - xs:assert [262, 532](#)
    - xs:attribute [249, 519](#)
    - xs:attributeGroup [251, 521](#)
    - xs:choice [258, 528](#)
    - xs:complexType [251, 521](#)
    - xs:element [246, 516](#)
    - xs:field [262, 532](#)
    - xs:group [255, 525](#)
    - xs:import [256, 526](#)
    - xs:include [256, 526](#)
    - xs:key [260, 530](#)
    - xs:keyRef [261, 531](#)
    - xs:notation [257, 527](#)
    - xs:openContent [263, 533](#)
    - xs:override [257, 527](#)
    - xs:redefine [257, 527](#)
    - xs:schema [245, 515](#)
    - xs:selector [261, 531](#)
    - xs:sequence [258, 528](#)
    - xs:simpleType [253, 523](#)
    - xs:unique [260, 530](#)
  - Contextual menu actions [239, 509](#)
  - Edit namespaces [266, 536](#)
  - Editing actions [238, 508](#)
  - Facets view [237, 542](#)
  - Navigation [232, 508](#)
  - Palette view [238, 542](#)
  - Validation [265, 535](#)
- Editing in Master Files context [536](#)
- Flatten Schema tool [566, 1098](#)
- Generate documentation for XML Schema
  - Customize PDF output for DITA [562](#)
  - Customize PDF output for DocBook [562](#)
  - From command line [563](#)
  - Output formats [558](#)
- Generate Sample XML Files tool
  - Advanced tab [554, 1095](#)
  - From command line [554, 1095](#)
  - Options tab [552, 1093](#)
  - Schema tab [550, 1091](#)
- Generate/Convert Schema tool [564, 1096](#)
- Highlight occurrences [548](#)
- Moving resources [546](#)
- Outline view [233, 538](#)
- Quick Assist feature [549](#)
- Refactoring actions [548](#)
- Regular Expressions Builder [568, 1119](#)
- Renaming resources [546](#)
- Resource Hierarchy/Dependencies view [544](#)
- Search actions [548](#)
- Set version [571](#)
- Syntax highlighting [538](#)
- Text mode editing [536](#)

- Validation [537](#)
- XML Schema 1.1 support [570](#)
- XML to JSON tool [632, 1101](#)
- XML transformation with XQuery [758](#)
- XML transformation with XSLT [749](#)
- XPath Expressions
  - Catalogs [947](#)
  - Prefix mapping [947](#)
  - Toolbar [942](#)
  - XPath Builder view [944](#)
  - XPath Results view [946](#)
- XProc Scripts
  - Editing features [638](#)
- XProc transformation scenario
  - Inputs tab [784](#)
  - Options tab [786](#)
  - Outputs tab [785](#)
  - Parameters tab [785](#)
  - XProc tab [784](#)
- XQuery
  - Content completion [573](#)
  - Folding [574](#)
  - Format and Indent [574](#)
  - Generate HTML documentation [580, 1110](#)
  - Input view [475, 578](#)
  - Outline view [574](#)
  - Sequence view [582](#)
  - Syntax highlighting [573](#)
  - Transformations
    - Sequence view [582](#)
    - Updating XML documents [584](#)
    - XQJ [1004](#)
  - Updating XML documents [584](#)
  - Validation [572](#)
  - XQuery Builder view [576](#)
- XQuery Debugger perspective
  - Breakpoints [1038](#)
  - Debugging Java extensions [1043](#)
  - Identify expressions [1036](#)
  - Information views
    - Breakpoints view [1027](#)
    - Context view [1028](#)
    - Messages view [1029](#)
    - Nodes/Values Set view [1034](#)
    - Output Mapping Stack view [1031](#)
    - Stack view [1030](#)
    - Templates view [1033](#)
    - Trace view [1032](#)
    - Variables view [1034](#)
    - XPath Watch view [1028](#)
  - Layout [1023](#)
  - Performance profiling [1039](#)
  - Profiling
    - Hotspots view [1041](#)
    - Invocation Tree view [1040](#)
  - Steps in a typical debugging process [1036](#)
  - Toolbar [1024](#)
- XQuery Documentation tool [580, 1110](#)
- XQuery preferences [107](#)
- XQuery Profiler preferences [110](#)
- XQuery transformation scenario
  - FO Processor tab [762, 791](#)
  - Output tab [762, 791](#)
  - XQuery tab [758, 787](#)
- xsl:sort for exotic languages [1072](#)

## XSLT

- Component Dependencies view [480](#)
  - Component documentation [482](#)
  - Content completion [466](#)
  - Content completion in XPath expressions [468](#)
  - Editing features [462](#)
  - Editing in Master Files context [462](#)
  - Generate documentation for XSLT stylesheets
    - Custom format [494](#)
    - From command line [495](#)
    - HTML format [492](#)
  - Highlight occurrences [482](#)
  - Input view [475, 578](#)
  - Moving resources [480](#)
  - Outline view [472](#)
  - Quick Assist feature [487](#)
  - Quick fix support [464](#)
  - Refactoring actions [484](#)
  - Renaming resources [480](#)
  - Resource Hierarchy/Dependencies view [478](#)
  - Search declarations [482](#)
  - Search references [482](#)
  - Syntax highlighting [471](#)
  - Text Value Templates [483](#)
  - Unit test (XSpec) [488](#)
  - Validating XSLT that call Java extensions [464](#)
  - Validating XSLT with custom engines [464](#)
  - Validation [463](#)
  - XPath Tooltip Helper [470](#)
- XSLT Debugger perspective
- Breakpoints [1038](#)
  - Debugging Java extensions [1043](#)
  - Debugging XSLT that call Java extensions [1042](#)
  - Identify expressions [1036](#)
  - Information views
    - Breakpoints view [1027](#)
    - Context view [1028](#)
    - Messages view [1029](#)
    - Nodes/Values Set view [1034](#)
    - Output Mapping Stack view [1031](#)
    - Stack view [1030](#)
    - Templates view [1033](#)
    - Trace view [1032](#)
    - Variables view [1034](#)
    - XPath Watch view [1028](#)
  - Layout [1023](#)
  - Performance profiling [1039](#)
  - Profiling
    - Hotspots view [1041](#)
    - Invocation Tree view [1040](#)
  - Steps in a typical debugging process [1036](#)
  - Supported processors [1043](#)
  - Toolbar [1024](#)
- XSLT extensions [887](#)
- XSLT Import extension points for WebHelp Responsive [896](#)
- XSLT Parameter extension points for WebHelp Responsive [896](#)
- XSLT preferences [102](#)
- XSLT Profiler preferences [110](#)
- XSLT transformation scenario
- FO Processor tab [754, 780](#)
  - Output tab [754, 780](#)
  - XSLT tab [749, 775](#)
- XSLTProc preferences [105](#)
- XSpec Helper View add-on [1073](#)
- XSpec Test Results view [1073](#)

# Copyright

---

Oxygen XML Developer User Manual

Syncro Soft SRL.

Copyright © 2002-2018 Syncro Soft SRL. All Rights Reserved.

**All rights reserved.** No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher. Products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

**Trademarks.** Many of the designations used by manufacturers and sellers to distinguish their products are claimed as trademarks. Where those designations appear in this document, and Syncro Soft SRL was aware of a trademark claim, the designations have been rendered in caps or initial caps.

**Notice.** While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document or from the use of programs and source code that may accompany it. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly by this document.

**Link disclaimer.** Syncro Soft SRL is not responsible for the contents or reliability of any linked Web sites referenced elsewhere within this documentation, and Syncro Soft SRL does not necessarily endorse the products, services, or information described or offered within them. We cannot guarantee that these links will work all the time and we have no control over the availability of the linked pages.

**Warranty.** Syncro Soft SRL provides a limited warranty on this product. Refer to your sales agreement to establish the terms of the limited warranty. In addition, Oxygen XML Developer End User License Agreement, as well as information regarding support for this product, while under warranty, is available through the [Oxygen XML Developer website](#).

**Third-party components.** Certain software programs or portions thereof included in the Product may contain software distributed under third party agreements ("Third Party Components"), which may contain terms that expand or limit rights to use certain portions of the Product ("Third Party Terms"). Information identifying Third Party Components and the Third Party Terms that apply to them is available on the [Oxygen XML Developer website](#).

**Documentation.** For the most current versions of documentation, see the [Oxygen XML Developer website](#).

**Contact Syncro Soft SRL.** Syncro Soft SRL provides telephone numbers and e-mail addresses for you to report problems or to ask questions about your product, see the [Oxygen XML Developer website](#).